



FCC PART 15E TEST REPORT No.24T04Z101721-005

for

HMD Global Oy

Mobile Phone

TA-1658

FCC ID: 2AJOTTA-1658

with

Hardware Version: V1.0

Software Version: 000T_0_362

Issued Date: 2024-09-05

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z101721-005	Rev.0	1st edition	2024-09-05

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

CONTENTS	3
1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	8
6. TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
6.3. TEST CONDITIONS	9
7. TEST FACILITIES UTILIZED	10
8. MEASUREMENT UNCERTAINTY	11
8.1. TRANSMITTER OUTPUT POWER	11
8.2. PEAK POWER SPECTRAL DENSITY	11
8.3. 6dB EMISSION BANDWIDTH	11
8.4. BAND EDGES COMPLIANCE	11
8.5. SPURIOUS EMISSIONS	11
8.6. AC POWER-LINE CONDUCTED EMISSION	11
ANNEX A: MEASUREMENT RESULTS	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM PEAK OUTPUT POWER	13
A.2.1. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	13
A.3. PEAK POWER SPECTRAL DENSITY	17

A.4. 6dB EMISSION BANDWIDTH	19
A.5. TRANSMITTER SPURIOUS EMISSION	24
A.5.1 TRANSMITTER SPURIOUS EMISSION - RADIATED	24
A.6. BAND EDGES COMPLIANCE	29
A.6.1 BAND EDGES - RADIATED	29
FIG. 1 BAND EDGES (802.11A CH149,5745MHZ).....	30
FIG. 2 BAND EDGES (802.11A CH165, 5825MHZ).....	30
FIG. 3 BAND EDGES (802.11N-HT20 CH149, 5745MHZ).....	31
FIG. 4 BAND EDGES (802.11N-HT20 CH165, 5825MHZ).....	31
FIG. 5 BAND EDGES (802.11N-HT40 CH151, 5755MHZ).....	32
FIG. 6 BAND EDGES (802.11N-HT40 CH159, 5795MHZ).....	32
FIG. 7 BAND EDGES (802.11AC-HT20 CH149, 5745MHZ).....	33
FIG. 8 BAND EDGES (802.11AC-HT20 CH165, 5825MHZ).....	33
FIG. 9 BAND EDGES (802.11AC-HT40 CH151, 5755MHZ).....	34
FIG. 10 BAND EDGES (802.11AC-HT40 CH159, 5795MHZ).....	34
FIG. 11 BAND EDGES (802.11AC-HT80 CH155, 5775MHZ).....	35
FIG. 12 BAND EDGES (802.11AC-HT80 CH155, 5775MHZ).....	35
A.7. AC POWERLINE CONDUCTED EMISSION.....	36
A.7.1 SUMMARY	36
A.7.2 METHOD OF MEASUREMENT	36
A.7.3 TEST CONDITION	36
A.7.4 TEST SETUP	36
ANNEX B: EUT PARAMETERS.....	40
ANNEX C: ACCREDITATION CERTIFICATE	40

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
100191, P. R. China

1.3. TestingEnvironment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2024-07-23

Testing End Date: 2024-09-05

1.5. Signature



Dong Jiaxuan
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Pang Shuai
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: HMD Global Oy
Address: Bertel Jungin aukio 9, 02600 Espoo, Finland
Contact: Reza Serafat
Email: reza.serafat@hmdglobal.com
Telephone: +491735287964
Fax: /

2.2. Manufacturer Information

Company Name: HMD Global Oy
Address: Bertel Jungin aukio 9, 02600 Espoo, Finland
Contact: Reza Serafat
Email: reza.serafat@hmdglobal.com
Telephone: +491735287964
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Mobile Phone
Model name	TA-1658
FCC ID	2AJOTTA-1658
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Nominal Voltage	3.87V

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT05a	353401640000108	V1.0	000T_0_362	2024-07-31
	353401640000116			
UT19a	353401640000082	V1.0	000T_0_362	2024-07-31
	353401640000090			

*EUT ID: is used to identify the test sample in the lab internally.

UT05a is used for Conduction test, UT19a is used for Radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1-1	Battery	HBA5033AA	Huizhou Highpower Technology Co., Ltd.
AE1-2	Battery	HBA5033AA	HuiZhou GanFeng LiEnergy Battery Technology Co., Ltd.
AE2-1	Charger US	HAD-020U	Shenzhen BaiJunDa Electronic Co.,Ltd.
AE2-2	Charger EU	HAD-020E	Shenzhen BaiJunDa Electronic Co.,Ltd.
AE2-3	Charger UK	HAD-020X	Shenzhen BaiJunDa Electronic Co.,Ltd.
AE2-4	Charger AU	HAD-020A	Shenzhen BaiJunDa Electronic Co.,Ltd.
AE3-1	USB cable	CC-3A	Saibao(jiangxi)Communication industrial Co.,Ltd.
AE3-2	USB cable	CC-3A	Huizhou Juwei Electronics Co.,Ltd

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of Mobile Phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E:	
	15.205 Restricted bands of operation;	2021
	15.209 Radiated emission limits, general requirements;	
	15.407 General technical requirements	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from	
	Low-Voltage Electrical and Electronic Equipment in the	2013
	Range of 9 kHz to 40 GHz	
UNII: KDB 789033	General U-NII Test Procedures New Rules v02r01	2017-12
D02		

5. Laboratory Environment

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.87V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2025-07-04
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-01
3	LISN	ENV216	101200	R&S	1 year	2025-05-16
4	Test Receiver	ESW44	103144	R&S	1 year	2024-11-26
5	Attenuator	10dB/2W	/	Rosenberger	/	/
6	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	Rohde & Schwarz	1 year	2025-06-06
	EMI Antenna	HFH2-Z2	829324/007	Rohde & Schwarz	1 year	2025-01-04
2	EMI Antenna	VULB9163	01223	Schwarzbeck	2 years	2025-07-18
3	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2025-04-11
4	EMI Antenna	3116	2661	ETS-Lindgren	2 years	2025-01-30

Test software information(Huayuan North Road)		
Test Item	Software	Manufacturer
Radiated emission	EMC32 V11.50.00	R&S
Conducted emission	EMC32 V8.53.0	R&S

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. 6dB Emission Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB) k=2
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.72
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.84
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.12

8.6. AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

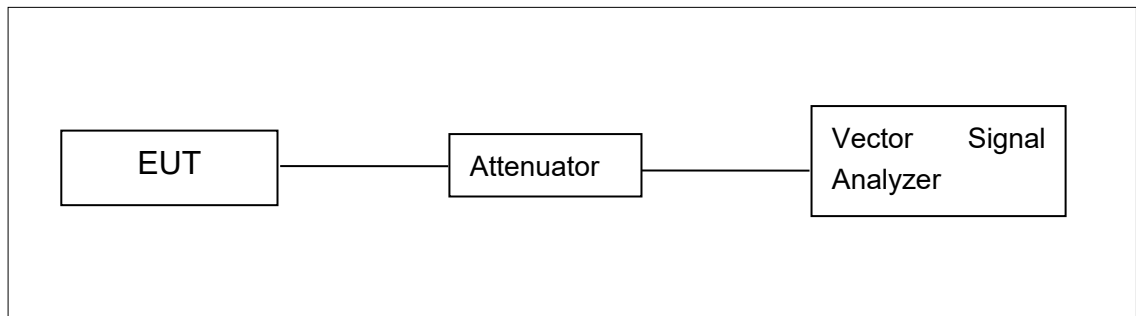


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

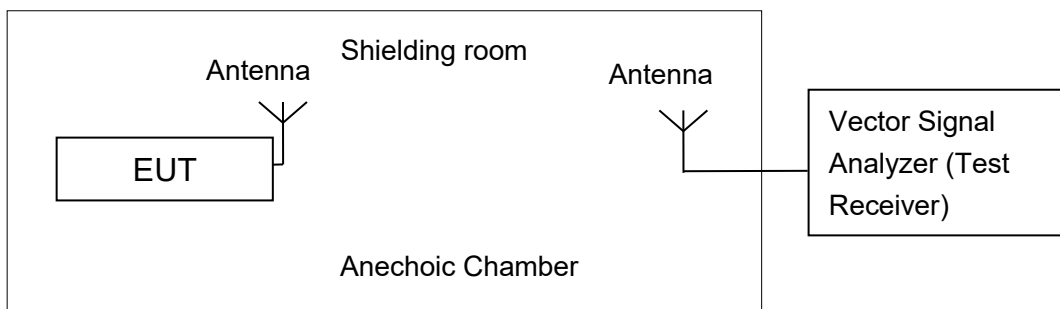

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

Set RBW = 1 MHz.

Set VBW $\geq$ 3 MHz.

Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.

Sweep time = auto.

Detector = power averaging (rms)

Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal. Add 10 log (1/x), where x is the duty cycle

A.2.1. Maximum Average Output Power-Conducted

EUT ID: UT05a

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	17.51	18.20	18.34
	9	\	\	\
	12	\	\	\
	18	\	\	\
	24	\	\	\
	36	\	\	\
	48	\	\	\
	54	\	\	\

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	17.60	18.19	18.34
	MCS1	\	\	\
	MCS2	\	\	\
	MCS3	\	\	\
	MCS4	\	\	\
	MCS5	\	\	\
	MCS6	\	\	\
	MCS7	\	\	\

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	17.59	18.21	18.35
	MCS1	\	\	\
	MCS2	\	\	\
	MCS3	\	\	\
	MCS4	\	\	\
	MCS5	\	\	\
	MCS6	\	\	\
	MCS7	\	\	\
	MCS8	\	\	\

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	17.17	17.76
	MCS1	\	\
	MCS2	\	\
	MCS3	\	\
	MCS4	\	\
	MCS5	\	\
	MCS6	\	\
	MCS7	\	\

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	17.18	17.77
	MCS1	\	\
	MCS2	\	\
	MCS3	\	\
	MCS4	\	\
	MCS5	\	\
	MCS6	\	\
	MCS7	\	\
	MCS8	\	\
	MCS9	\	\


The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	16.70
	MCS1	\
	MCS2	\
	MCS3	\
	MCS4	\
	MCS5	\
	MCS6	\
	MCS7	\
	MCS8	\
	MCS9	\

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 98%

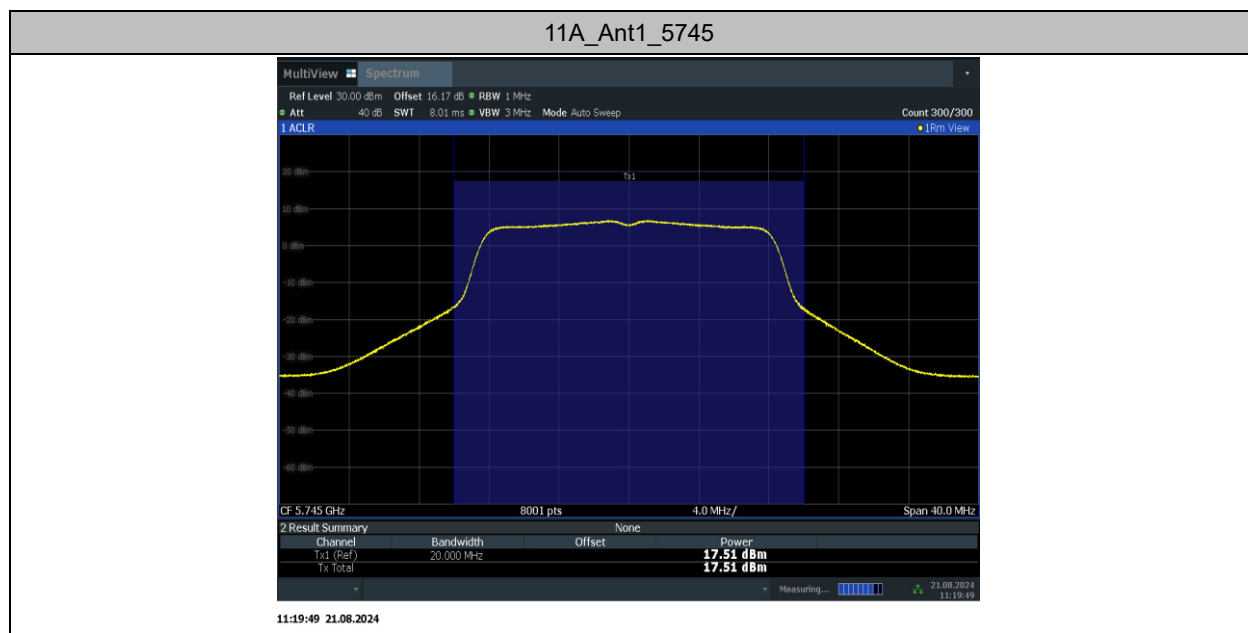

Maximum output Power

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

Set RBW = 500 kHz.

Set VBW $\geq$ 3 MHz.

Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.

Sweep time = auto.

Detector = power averaging (rms)

Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter. Use the peak search function on the instrument to find the peak of the spectrum and record its value. Add $10 \log (1/x)$, where x is the duty cycle.


Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

EUT ID: UT05a

Measurement Results:

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Verdict
11A	Ant1	5745	3.99	PASS
		5785	4.19	PASS
		5825	4.28	PASS
11AC20SISO	Ant1	5745	3.57	PASS
		5785	3.67	PASS
		5825	3.93	PASS
11AC40SISO	Ant1	5755	-0.11	PASS
		5795	0.14	PASS
11AC80SISO	Ant1	5775	-4.11	PASS

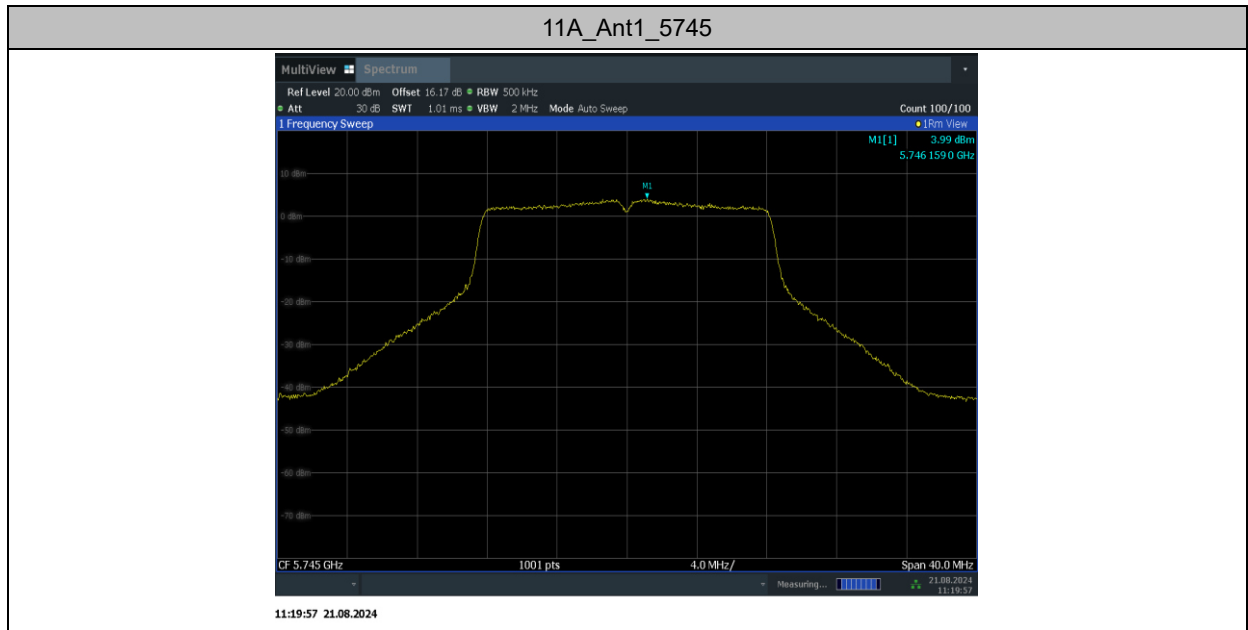

Peak Power Spectral Density

Conclusion: PASS

A.4. 6dB Emission Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

Set RBW = 100 kHz.

Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------


EUT ID: UT05a

Measurement Result:


TestMode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5745	15.88	5736.84	5752.72	PASS
		5785	15.68	5777.04	5792.72	PASS
		5825	15.64	5817.20	5832.84	PASS
11AC20SISO	Ant1	5745	15.64	5737.20	5752.84	PASS
		5785	15.36	5777.16	5792.52	PASS
		5825	15.92	5816.80	5832.72	PASS
11AC40SISO	Ant1	5755	35.68	5737.00	5772.68	PASS
		5795	35.28	5777.40	5812.68	PASS
11AC80SISO	Ant1	5775	75.04	5737.40	5812.44	PASS

Test graphs as below:

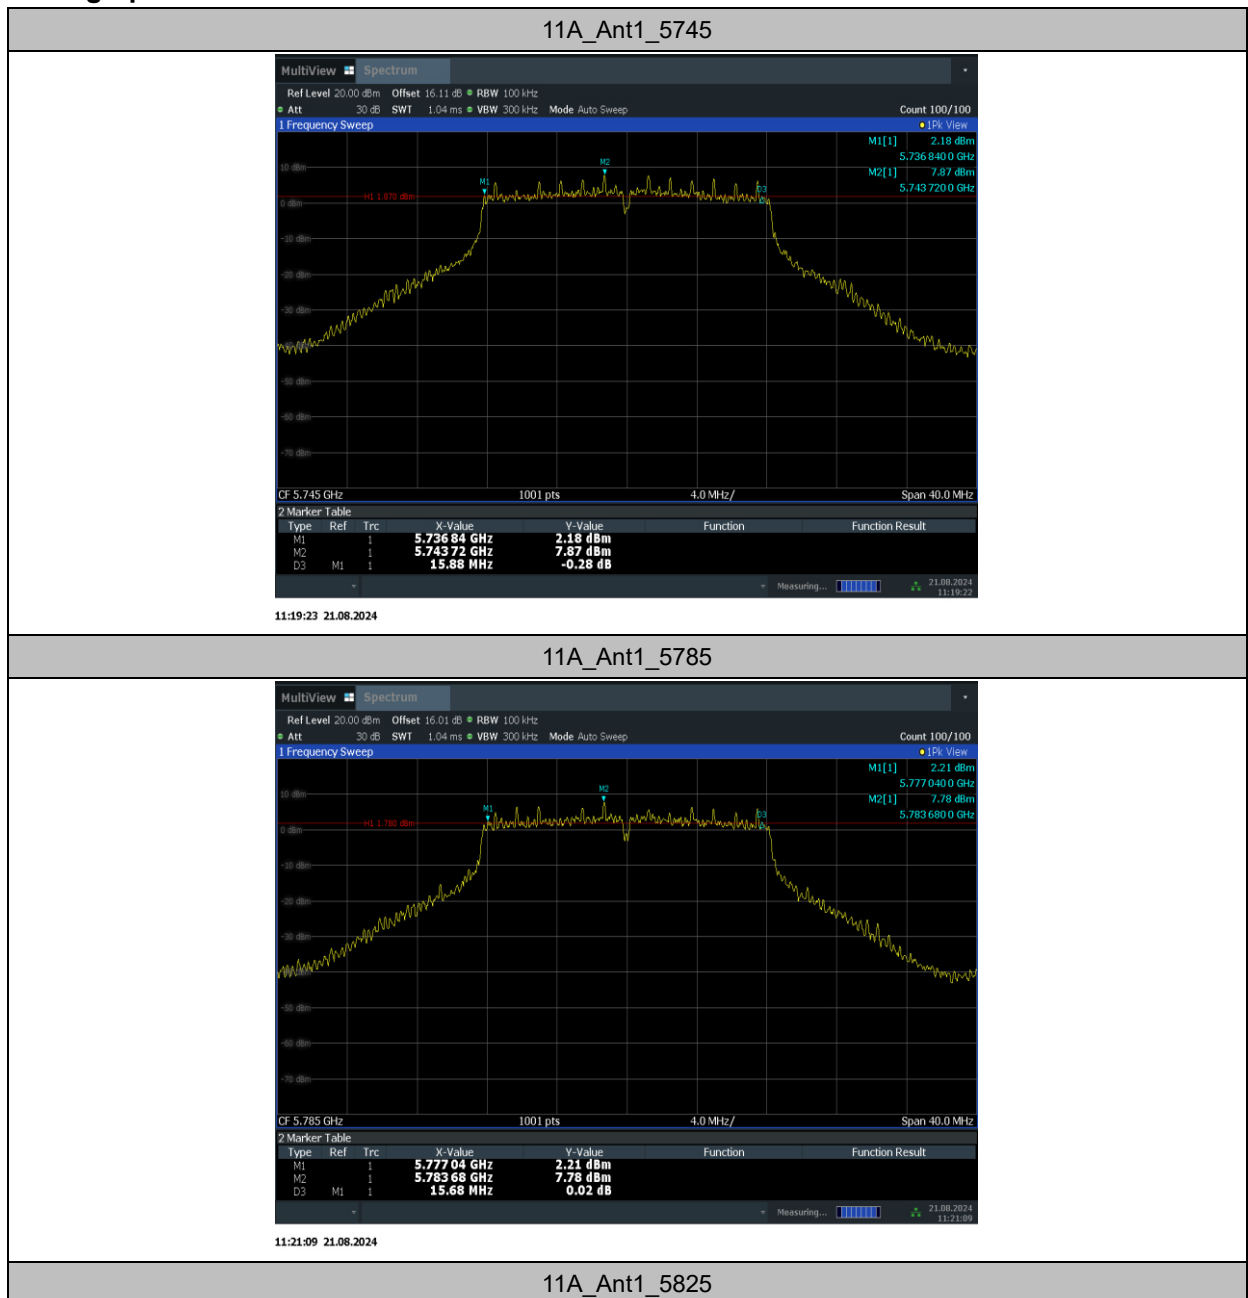


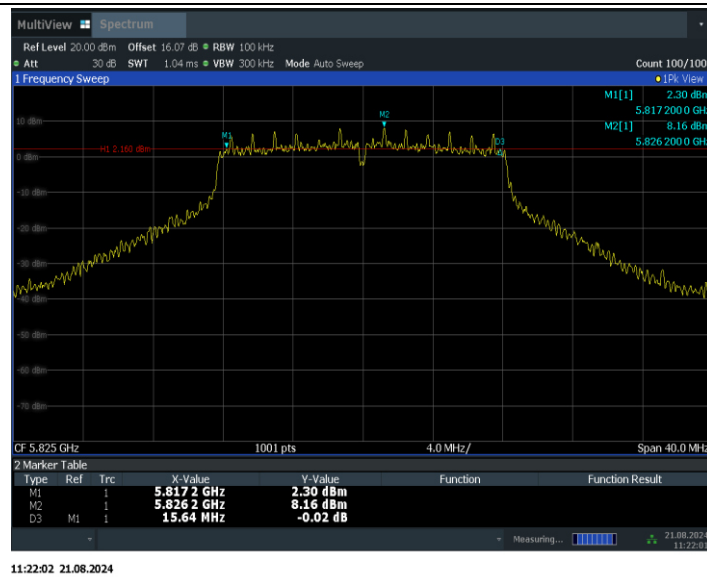


11AC20SISO_Ant1_5745

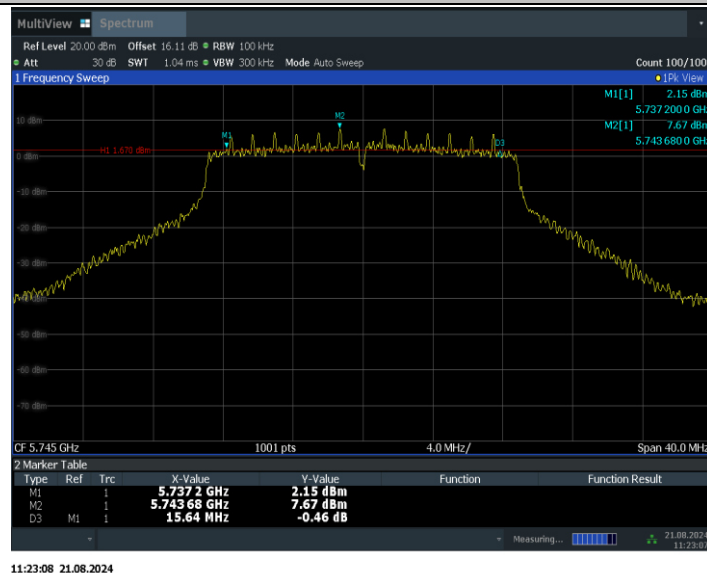

11AC20SISO_Ant1_5785

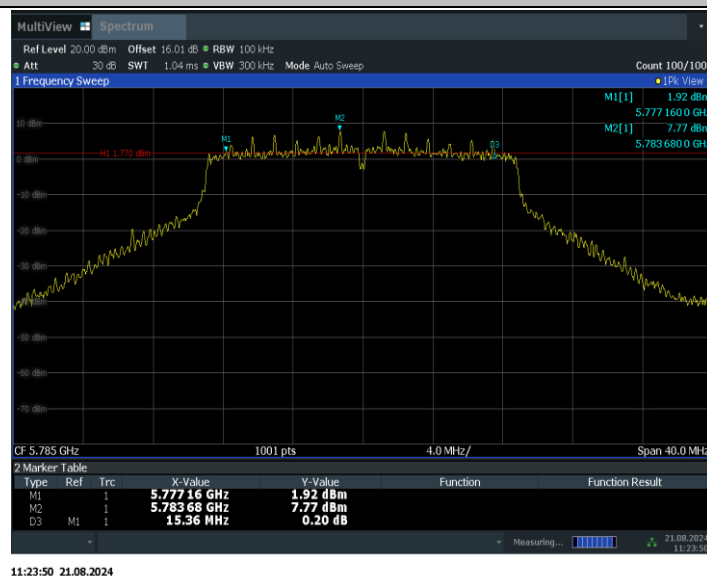


11AC20SISO_Ant1_5825

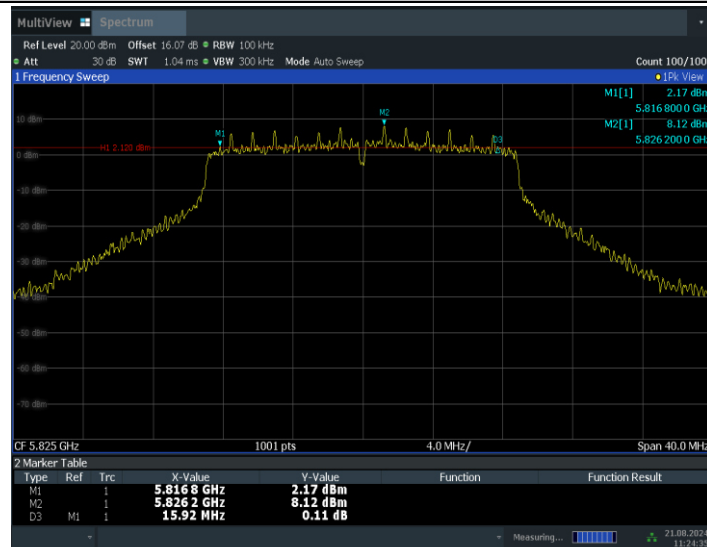


11:24:35 21.08.2024

11AC40SISO_Ant1_5755

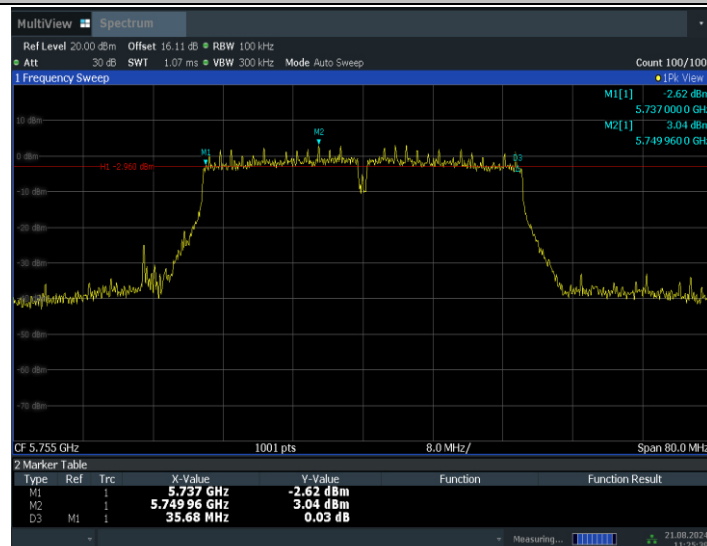


11:25:40 21.08.2024

11AC40SISO_Ant1_5795

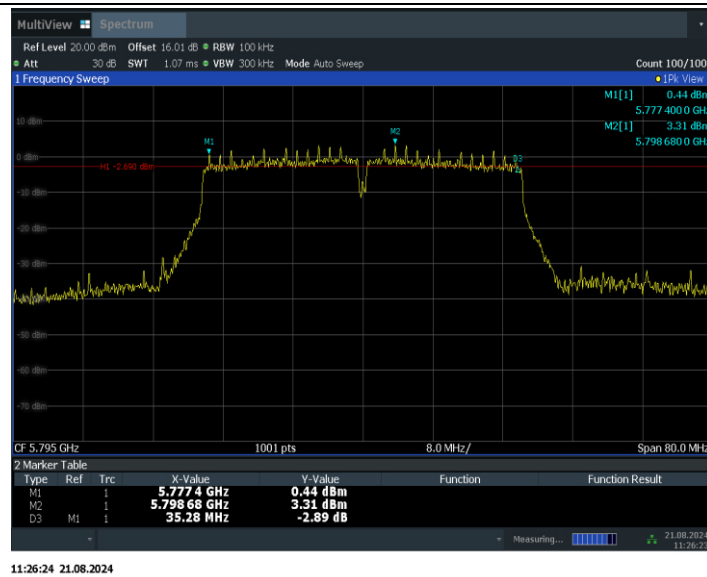

11:26:24 21.08.2024

11AC80SISO_Ant1_5775

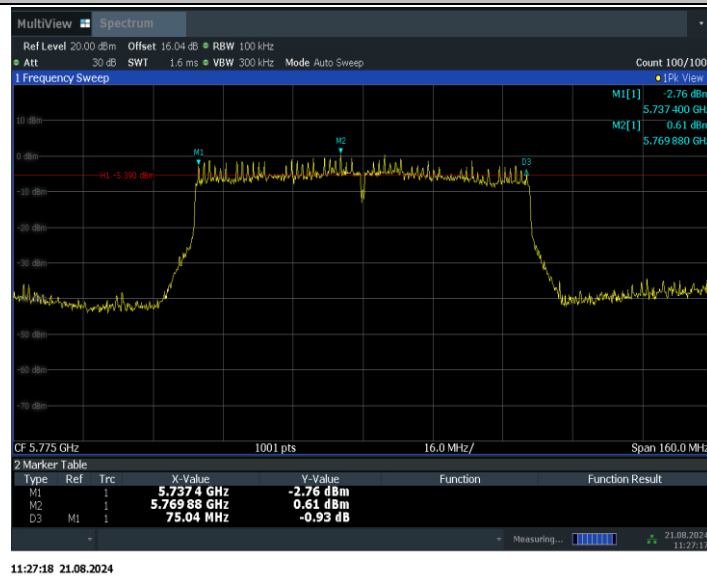

11:27:18 21.08.2024

Conclusion: PASS

A.5. Transmitter Spurious Emission

A.5.1 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBμV/m)	Measurement distance(m)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Measurement Results:

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

Conclusion: PASS

Average Results:

802.11a

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17917.500	44.61	-26.18	45.95	24.84	54.00	9.39	H
17911.500	44.59	-26.18	45.95	24.82	54.00	9.41	V
14485.000	38.83	-28.77	41.90	25.70	54.00	15.17	H
14480.000	38.77	-28.77	41.90	25.64	54.00	15.23	V
11650.200	37.15	-31.81	39.20	29.76	54.00	16.85	V
11642.000	37.06	-31.81	39.20	29.67	54.00	16.94	V

802.11n-HT20

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17903.200	44.80	-26.18	45.95	25.03	54.00	9.20	H
17912.500	44.69	-26.18	45.95	24.92	54.00	9.31	H
14493.800	38.89	-28.77	41.90	25.76	54.00	15.11	V
15654.800	38.72	-27.94	38.20	28.46	54.00	15.28	V
11653.000	37.33	-31.81	39.20	29.94	54.00	16.67	V
11647.000	37.03	-31.81	39.20	29.64	54.00	16.97	V

802.11n-HT40

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17895.500	44.77	-26.18	45.95	25.00	54.00	9.23	V
17906.500	44.45	-26.18	45.95	24.68	54.00	9.55	V
14478.400	39.20	-28.77	41.90	26.07	54.00	14.80	H
14480.000	38.78	-28.77	41.90	25.65	54.00	15.22	V
11840.500	36.59	-31.54	39.15	28.98	54.00	17.41	V
11786.600	36.46	-31.76	39.20	29.02	54.00	17.54	V

802.11ac-HT20

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17925.200	44.69	-26.18	45.95	24.92	54.00	9.31	V
17902.100	44.56	-26.18	45.95	24.79	54.00	9.44	V
14471.800	38.85	-28.77	41.90	25.72	54.00	15.15	V
14492.600	38.72	-28.77	41.90	25.59	54.00	15.28	H
11648.000	36.90	-31.81	39.20	29.51	54.00	17.10	V
11650.200	36.83	-31.81	39.20	29.44	54.00	17.17	V

802.11ac-HT40

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17902.700	44.64	-26.18	45.95	24.87	54.00	9.36	V
17910.300	44.64	-26.18	45.95	24.87	54.00	9.36	H
14498.100	38.80	-28.77	41.90	25.67	54.00	15.20	H
14492.600	38.65	-28.77	41.90	25.52	54.00	15.35	V
11844.400	36.69	-31.54	39.15	29.08	54.00	17.31	V
11794.900	36.62	-31.76	39.20	29.18	54.00	17.38	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17945.000	44.73	-26.18	45.95	24.96	54.00	9.27	H
17914.800	44.61	-26.18	45.95	24.84	54.00	9.39	H
14472.900	38.97	-28.77	41.90	25.84	54.00	15.03	H
14474.500	38.88	-28.77	41.90	25.75	54.00	15.12	V
11825.700	36.65	-31.76	39.20	29.21	54.00	17.35	H
11817.500	36.48	-31.76	39.20	29.04	54.00	17.52	V

Peak Results:
802.11a

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17926.300	55.91	-26.18	45.95	36.14	74.00	18.09	V
17952.700	55.66	-26.18	45.95	35.89	74.00	18.34	V
16467.700	52.00	-27.78	38.80	40.98	68.30	16.30	H
16708.000	51.83	-27.70	39.65	39.88	68.30	16.47	V
11418.100	48.22	-32.13	39.00	41.35	74.00	25.78	V
11335.100	48.16	-32.12	38.70	41.58	74.00	25.84	H

802.11n-HT20

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17899.300	55.77	-26.18	45.95	36.00	74.00	18.23	V
17962.000	55.70	-26.18	45.95	35.93	74.00	18.30	V
16994.000	52.41	-27.38	40.85	38.94	68.30	15.89	V
14156.600	52.04	-28.86	41.70	39.20	68.30	16.26	H
11815.200	47.65	-31.76	39.20	40.21	74.00	26.35	H
10894.000	47.40	-32.30	38.50	41.20	74.00	26.60	V

802.11n-HT40

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17924.100	55.82	-26.18	45.95	36.05	74.00	18.18	H
17971.400	55.44	-26.18	45.95	35.67	74.00	18.56	H
16994.000	51.96	-27.38	40.85	38.49	68.30	16.34	V
16990.200	51.80	-27.38	40.85	38.33	68.30	16.50	V
11820.800	48.58	-31.76	39.20	41.14	74.00	25.42	H
11422.500	48.08	-32.13	39.00	41.21	74.00	25.92	H

802.11ac-HT20

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.300	55.75	-26.18	45.95	35.98	74.00	18.25	H
17900.500	55.57	-26.18	45.95	35.80	74.00	18.43	V
16393.500	51.65	-27.84	38.70	40.79	68.30	16.65	V
13704.000	51.60	-29.51	41.00	40.11	68.30	16.70	V
11995.600	47.82	-31.01	39.00	39.83	74.00	26.18	H
11648.600	47.80	-31.81	39.20	40.41	74.00	26.20	V

802.11ac-HT40

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17888.900	56.17	-26.18	45.95	36.40	74.00	17.83	V
17822.900	55.76	-26.18	45.95	35.99	74.00	18.24	H
13829.900	51.90	-29.34	41.25	39.99	68.30	16.40	H
16527.700	51.47	-27.72	39.00	40.19	68.30	16.83	H
11234.500	47.79	-32.14	38.60	41.33	74.00	26.21	V
11758.600	47.78	-31.80	39.20	40.38	74.00	26.22	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17922.500	55.97	-26.18	45.95	36.20	74.00	18.03	H
17939.000	55.64	-26.18	45.95	35.87	74.00	18.36	H
13701.800	51.93	-29.51	41.00	40.44	68.30	16.37	V
16975.300	51.74	-27.34	40.60	38.48	68.30	16.56	V
11755.900	48.30	-31.80	39.20	40.90	74.00	25.70	H
11831.200	48.21	-31.76	39.20	40.77	74.00	25.79	V

A.6. Band Edges Compliance

A6.1 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.1	P
	5825 MHz	Fig.2	P
802.11n HT20	5745 MHz	Fig.3	P
	5825 MHz	Fig.4	P
802.11n HT40	5755 MHz	Fig.5	P
	5795 MHz	Fig.6	P
802.11ac HT20	5745 MHz	Fig.7	P
	5825 MHz	Fig.8	P
802.11ac HT40	5755 MHz	Fig.9	P
	5795 MHz	Fig.10	P
802.11ac HT80	5775 MHz	Fig.11	P
	5775 MHz	Fig.12	P

Conclusion: PASS

Test graphs as below:

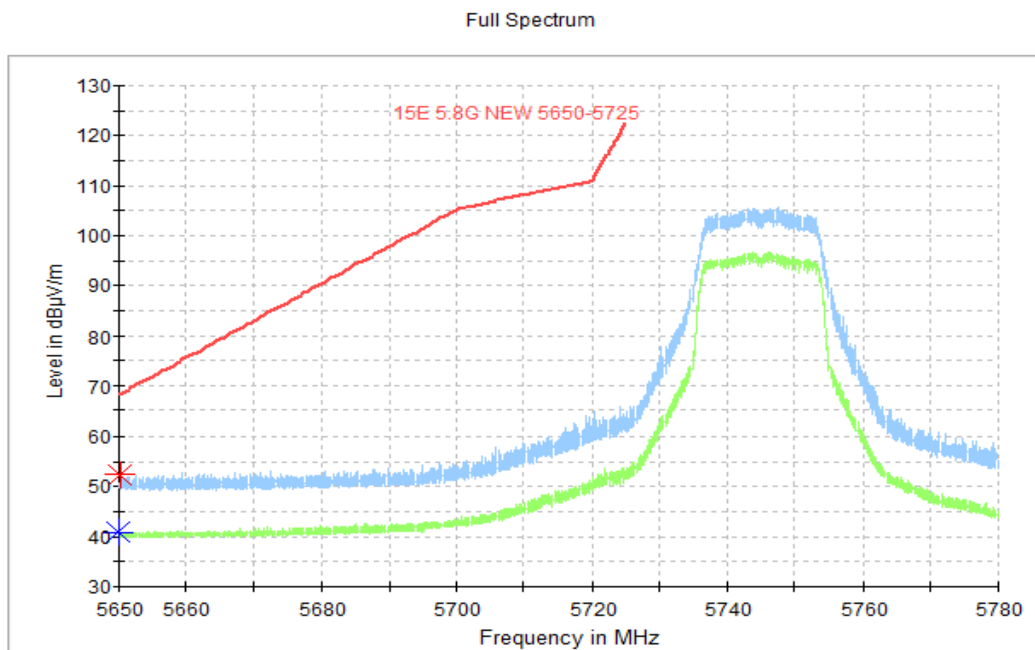


Fig. 1 Band Edges (802.11a Ch149,5745MHz)

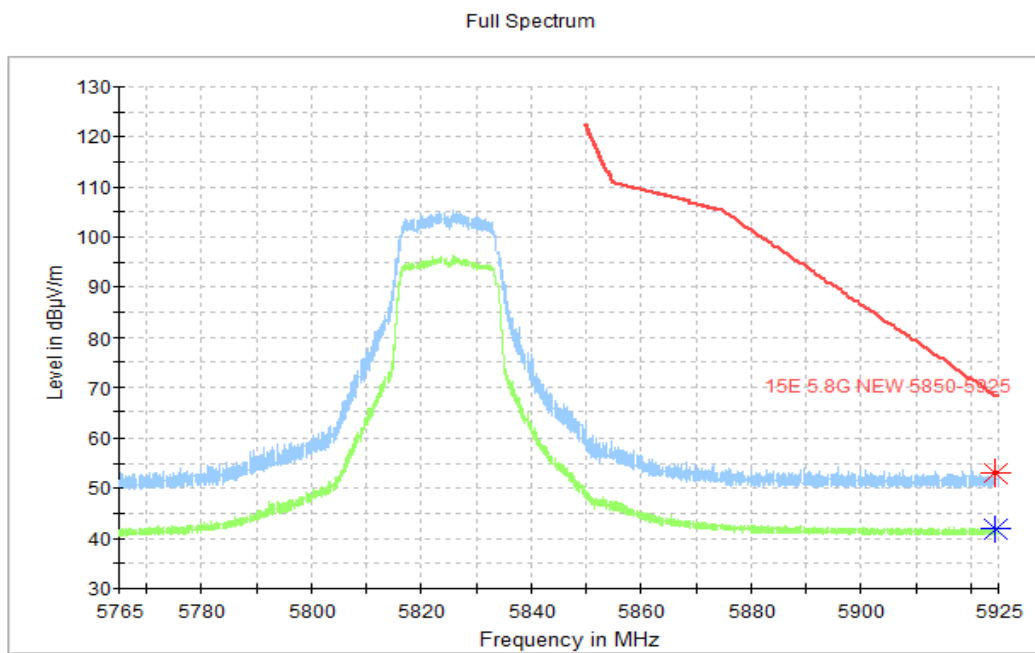


Fig. 2 Band Edges (802.11a Ch165, 5825MHz)

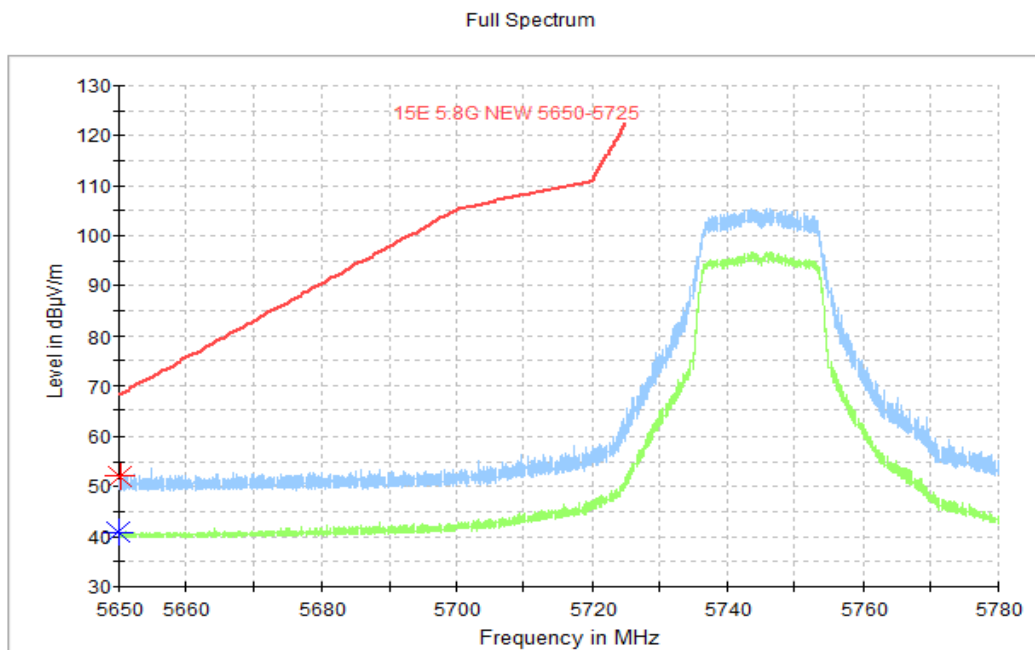


Fig. 3 Band Edges (802.11n-HT20 Ch149, 5745MHz)

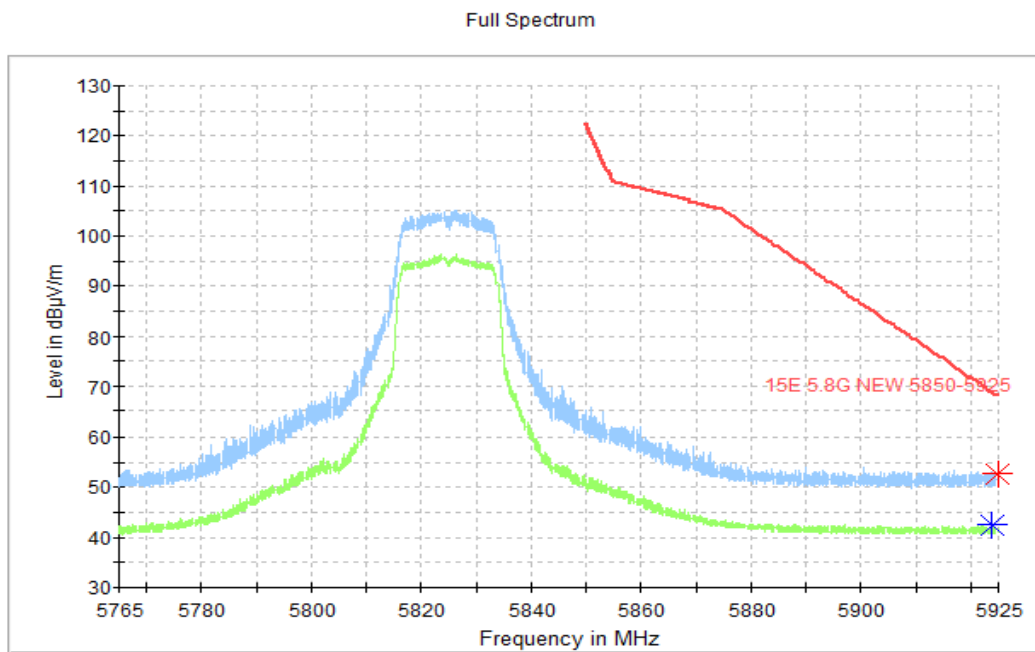


Fig. 4 Band Edges (802.11n-HT20 Ch165, 5825MHz)

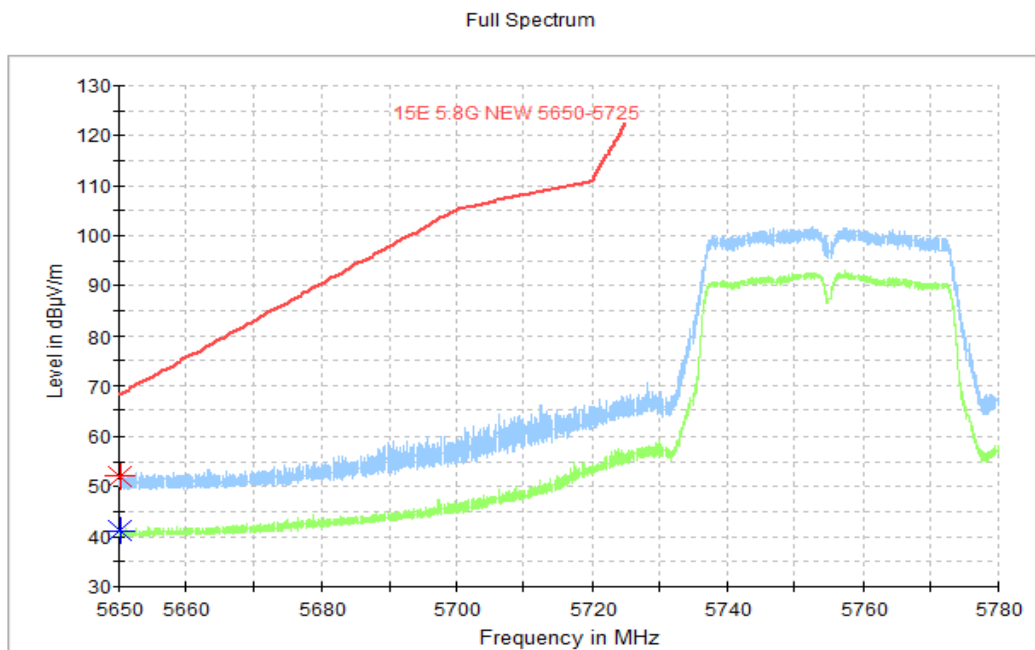


Fig. 5 Band Edges (802.11n-HT40 Ch151, 5755MHz)

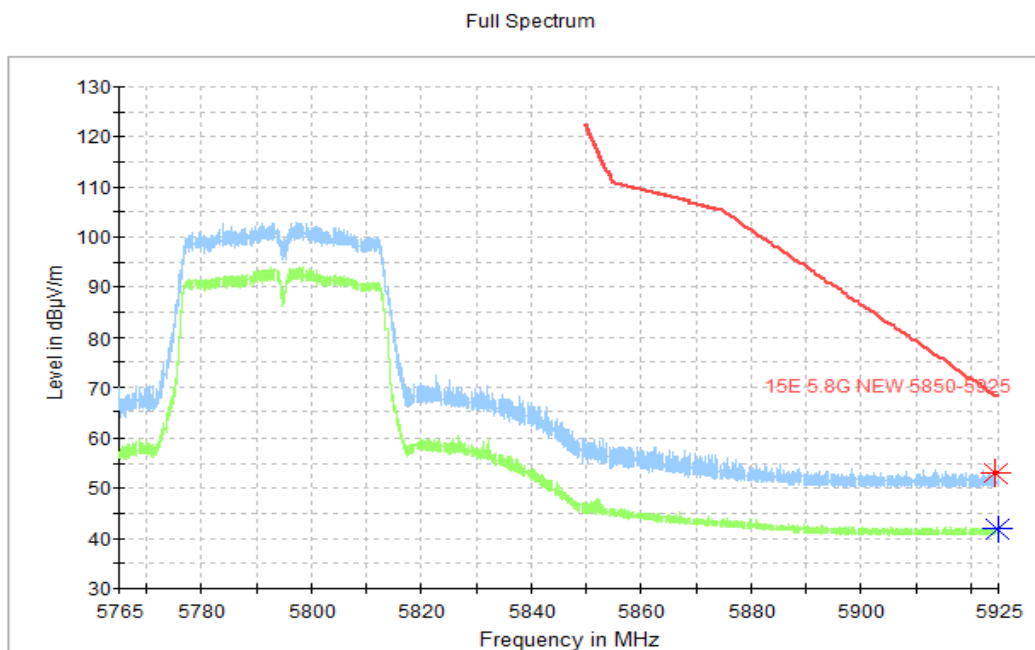


Fig. 6 Band Edges (802.11n-HT40 Ch159, 5795MHz)

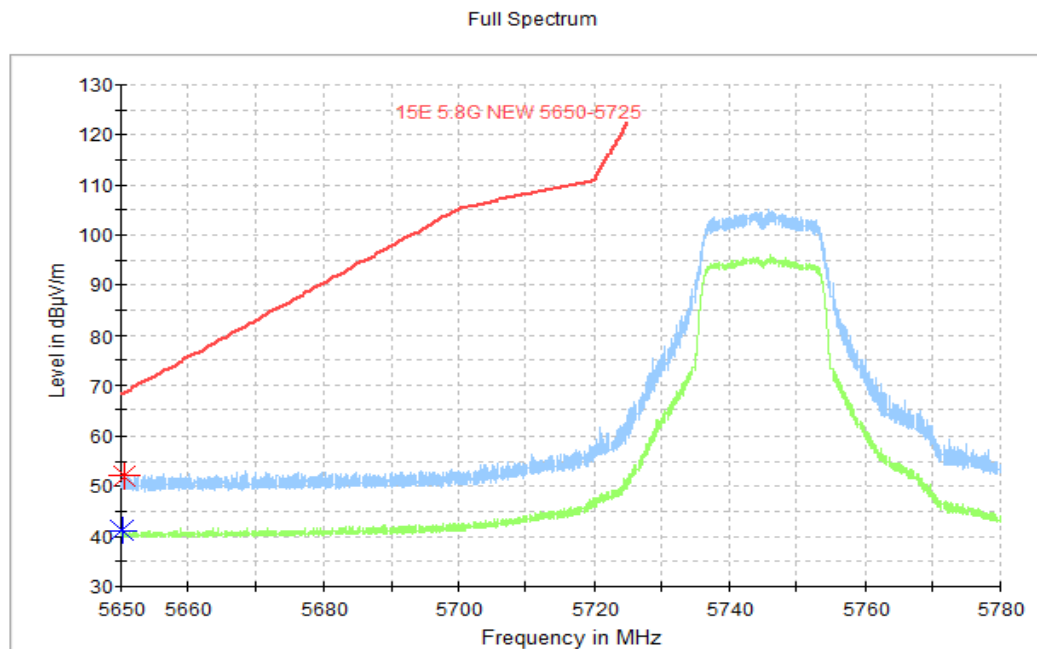


Fig. 7 Band Edges (802.11ac-HT20 Ch149, 5745MHz)

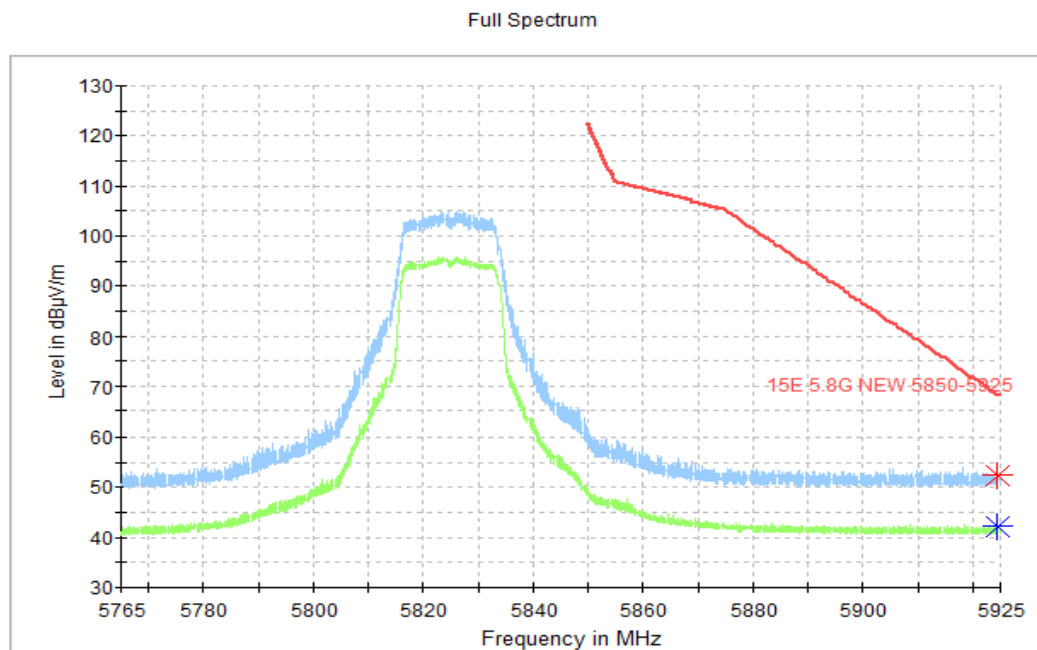


Fig. 8 Band Edges (802.11ac-HT20 Ch165, 5825MHz)

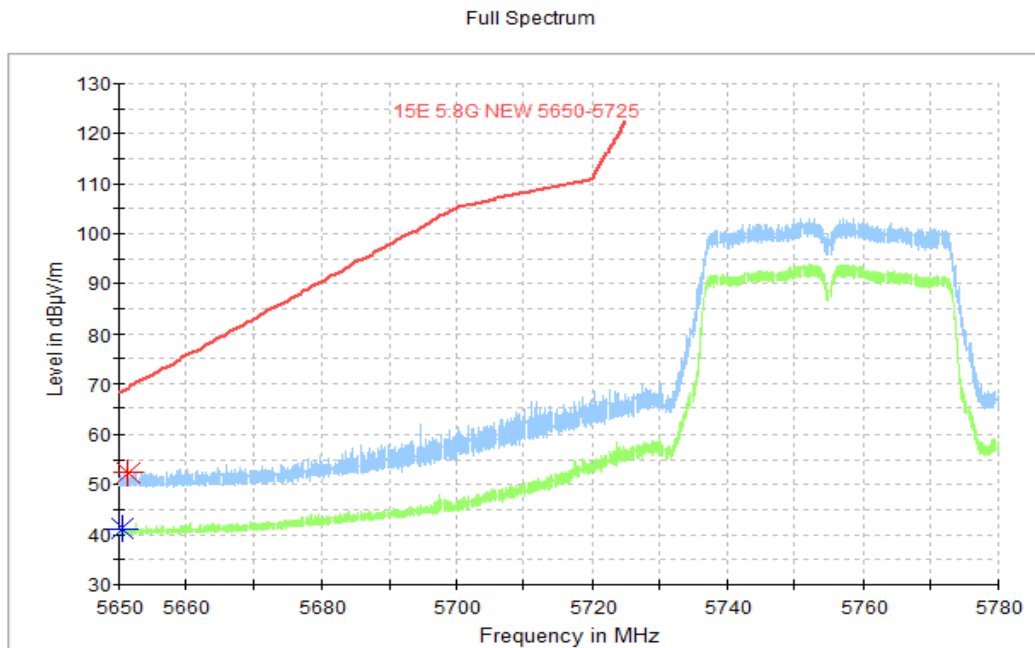


Fig. 9 Band Edges (802.11ac-HT40 Ch151, 5755MHz)

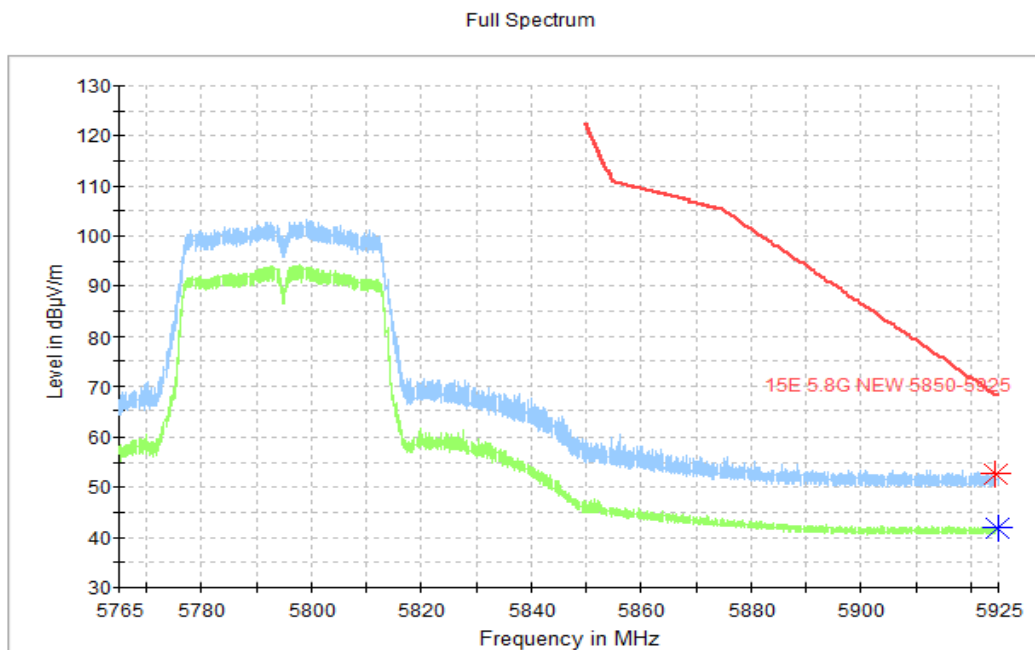


Fig. 10 Band Edges (802.11ac-HT40 Ch159, 5795MHz)

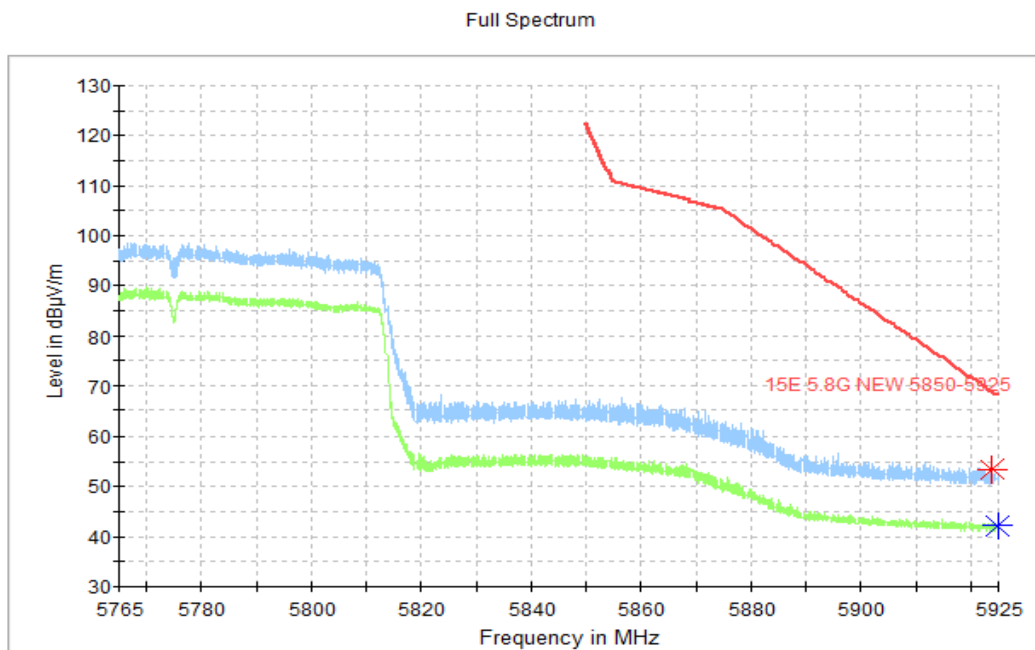


Fig. 11 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

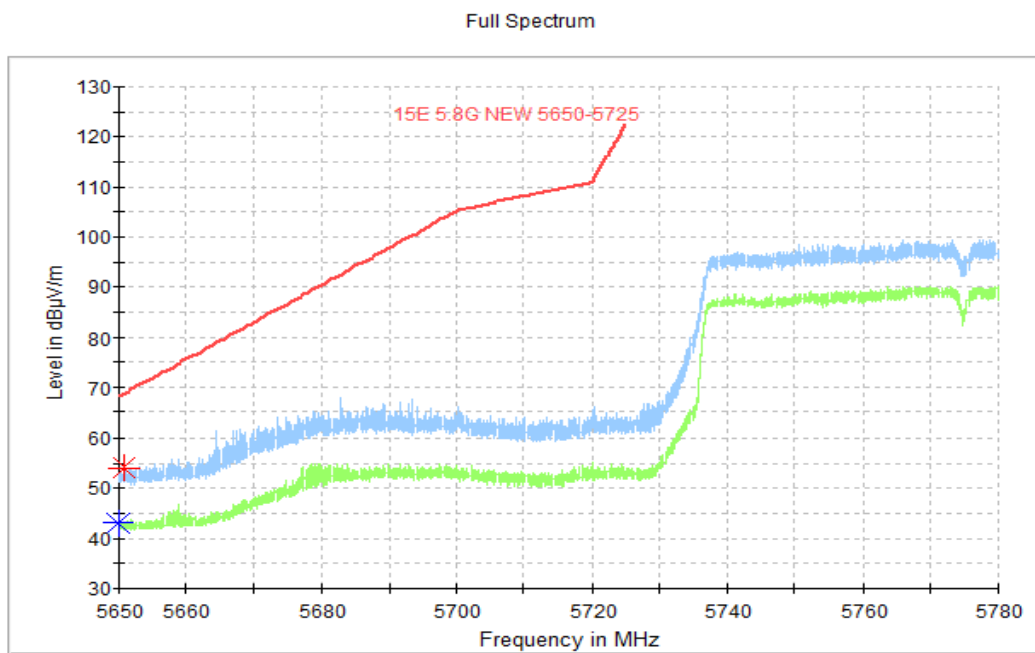


Fig. 12 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

A.7. AC Powerline Conducted Emission

A.7.1 Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

A.7.2 Method of Measurement

See Clause 8.8 of RSS-Gen specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

A.7.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60

A.7.4 Test setup

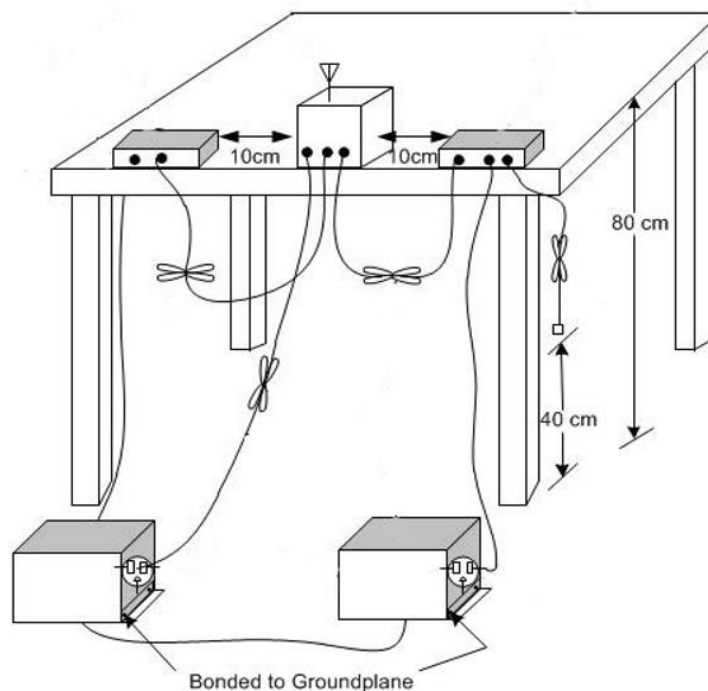

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.13	Fig.14	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.27	Fig.28	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS
Test graphs as below:

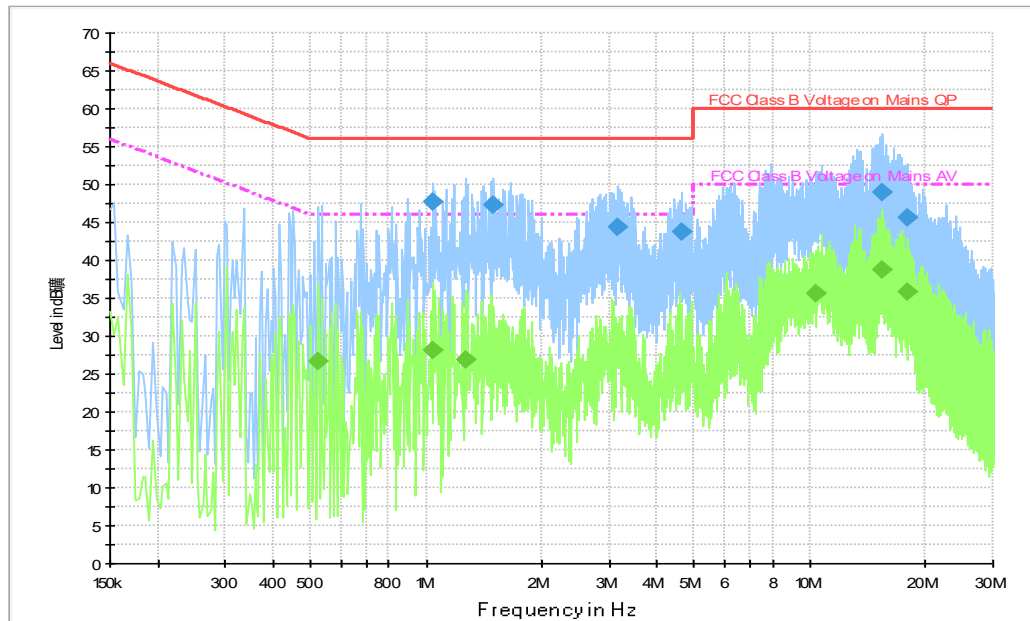


Fig. 1 AC Powerline Conducted Emission-802.11a

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.046000	47.7	2000.0	9.000	On	L1	19.9	8.3	56.0
1.502000	47.3	2000.0	9.000	On	L1	19.9	8.7	56.0
3.170000	44.3	2000.0	9.000	On	L1	19.8	11.7	56.0
4.646000	43.8	2000.0	9.000	On	L1	19.8	12.2	56.0
15.410000	49.0	2000.0	9.000	On	L1	20.0	11.0	60.0
17.998000	45.6	2000.0	9.000	On	L1	20.0	14.4	60.0
4.526000	30.8	2000.0	9.000	On	L1	19.8	25.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.522000	26.7	2000.0	9.000	On	L1	20.0	19.3	46.0
1.046000	28.2	2000.0	9.000	On	L1	19.9	17.8	46.0
1.266000	26.9	2000.0	9.000	On	L1	19.9	19.1	46.0
10.350000	35.7	2000.0	9.000	On	L1	19.9	14.3	50.0
15.438000	38.8	2000.0	9.000	On	L1	20.0	11.2	50.0
17.862000	35.8	2000.0	9.000	On	L1	20.0	14.2	50.0
4.746000	18.7	2000.0	9.000	On	L1	19.8	27.3	46.0

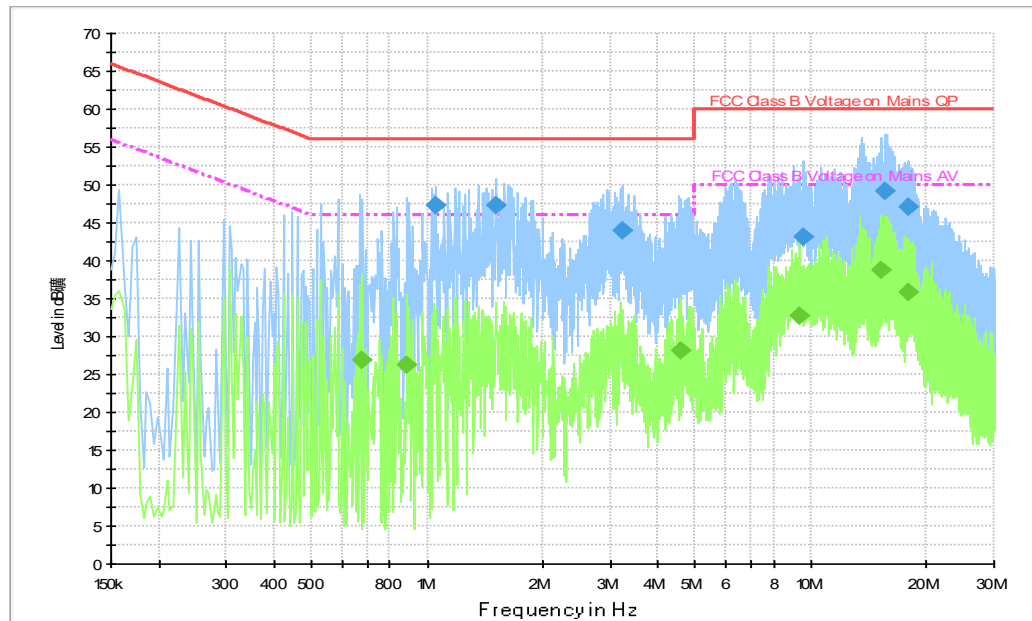


Fig. 2 AC Powerline Conducted Emission-Idle

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.050000	47.3	2000.0	9.000	On	L1	19.9	8.7	56.0
1.506000	47.3	2000.0	9.000	On	L1	19.9	8.7	56.0
3.246000	44.0	2000.0	9.000	On	L1	19.8	12.0	56.0
9.590000	43.1	2000.0	9.000	On	L1	19.9	16.9	60.0
15.526000	49.3	2000.0	9.000	On	L1	20.0	10.7	60.0
17.918000	47.1	2000.0	9.000	On	L1	20.0	12.9	60.0
4.526000	30.8	2000.0	9.000	On	L1	19.8	25.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.678000	26.8	2000.0	9.000	On	L1	20.0	19.2	46.0
0.886000	26.3	2000.0	9.000	On	L1	19.9	19.7	46.0
4.590000	28.2	2000.0	9.000	On	L1	19.8	17.8	46.0
9.346000	32.7	2000.0	9.000	On	L1	19.9	17.3	50.0
15.334000	38.8	2000.0	9.000	On	L1	20.0	11.2	50.0
17.890000	35.8	2000.0	9.000	On	L1	20.0	14.2	50.0
4.746000	18.7	2000.0	9.000	On	L1	19.8	27.3	46.0

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*** END OF REPORT BODY ***