

Report No.: TW2206192-01E

File reference No.: 2022-07-04

Applicant: SHENZHEN TQSKY TECHNOLOGY CO.,LTD

Product: TQSky Tbox

Model No.: TBOX

Trademark: TQSKY

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tong

Terry Tang

Manager

Dated: July 04, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2206192-01E

Date: 2022-07-04



Page 2 of 94

# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

## **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

# Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

### **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



# **Test Report Conclusion**

## Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT	14
5.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	24
8.0	Maximum Output Power.	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement.	35
11.0	Antenna Requirement.	83
12.0	FCC ID Label	84
13.0	Photo of Test Setup and EUT View.	85

Report No.: TW2206192-01E Page 4 of 94

Date: 2022-07-04



#### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: SHENZHEN TQSKY TECHNOLOGY CO.,LTD

Address: No.2306 Haowei Building Yuehai Street, Nanshan, Shenzhen, China.

Telephone: 18923731089

Fax: --

### 1.3 Description of EUT

Product: TQSky Tbox

Manufacturer: SHENZHEN TQSKY TECHNOLOGY CO.,LTD

Address: No.2306 Haowei Building Yuehai Street, Nanshan, Shenzhen, China.

Trademark: TQSKY
Model Number: TBOX
Additional Model Number: N/A

Hardware Version: BJ203-V1

Software Version: 20220708.V1.4.2
Serial No.: 2AA227C0001
Rating: Input: DC5V, 2A

Battery: DC3.85V, 5000mAh Li-ion battery

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz;

IEEE 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20, HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2206192-01E Page 5 of 94

Date: 2022-07-04



IEEE 802.11n HT20/HT40: mcs0-mcs15

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels;

IEEE 802.11n (HT40): 7 Channels;

Antenna: FPC Antenna. The gain of the antennas is 1.42dBi (Get from the antenna

specification)

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2022-06-17 to 2022-07-04

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Andy -xing

Page 6 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



2.0 Test Equipment						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	R&S	ESPI 3	100379	2022-06-17	2023-06-16	
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-06-17	2023-06-16	
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17	
Spectrum	R&S	FSIQ26	100292	2022-06-17	2023-06-16	
Horn Antenna	A-INFO	LB-180400-KF	ANT01060660	2021-07-02	2024-07-02	
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-02	
Power meter	Anritsu	ML2487A	6K00003613	2022-06-17	2023-06-16	
Power sensor	Anritsu	MA2491A	32263	2022-06-17	2023-06-16	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01	
9*6*6 Anechoic			N/A	2022-06-17	2023-06-16	
EMI Test Receiver	RS	ESVB	826156/011	2022-06-17	2023-06-16	
EMI Test Receiver	RS	ESH3	860904/006	2022-06-17	2023-06-16	
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2022-06-17	2023-06-16	
Spectrum	HP/Agilent	E4407B	MY50441392	2022-06-17	2023-06-16	
Spectrum	RS	FSP	1164.4391.38	2022-01-14	2023-01-13	
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2022-06-17	2023-06-16	
RF Cable	Zhengdi	7m		2022-06-17	2023-06-16	
RF Switch	EM	EMSW18	060391	2022-06-17	2023-06-16	
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-06-17	2023-06-16	
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-06-17	2023-06-16	
LISN	SCHAFFNER	NNB42	00012	2022-01-05	2023-01-04	

## 2.2 Automation Test Software

#### For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

## For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 3. DESCRIPTION OF TEST MODES

## IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing;

### IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

Page 8 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph15.207	<b>Conducted Emission Test</b>	Pass	Complies
	Spectrum bandwidth of a	Pass	Complies
FCC Part 15 Subpart C	Orthogonal Frequency		
Paragraph 15.247(a)(2) Limit	<b>Division Multiplex System</b>		
1 urugrupii 1012 i / (u)(2) 2iiiii	Limit: 6dB		
	bandwidth>500kHz		
FCC Part 15, Paragraph	Maximum peak output	Pass	
15.247(b)	power		Complies
15.247(0)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	Pass	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	<b>Power Spectral Density</b>	Pass	Complies
15.247(e)	Limit: max. 8dBm/3kHz		
FCC Part 15, Paragraph	Out of Band Emission and	Pass	Complies
15.247(d)	<b>Restricted Band</b>		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	<b>Table 15.209</b>		

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2206192-01E

Date: 2022-07-04



#### **5.0** Power Line Conducted Emission Test

## 5.1 Schematics of the test

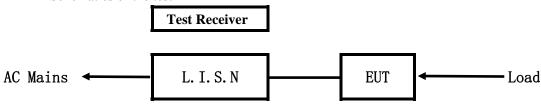


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

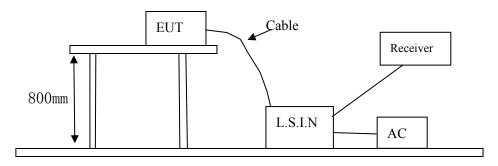

## 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	vice Manufacturer		FCC ID
TQSky Tbox	SHENZHEN TQSKY TECHNOLOGY CO.,LTD	TBOX	2A7Q4-TBOX

#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

Report No.: TW2206192-01E Page 10 of 94

Date: 2022-07-04



## C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply KEYU		KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

## 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (c	lB μV)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

## 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2022-07-04



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)


## **EUT Operating Environment**

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

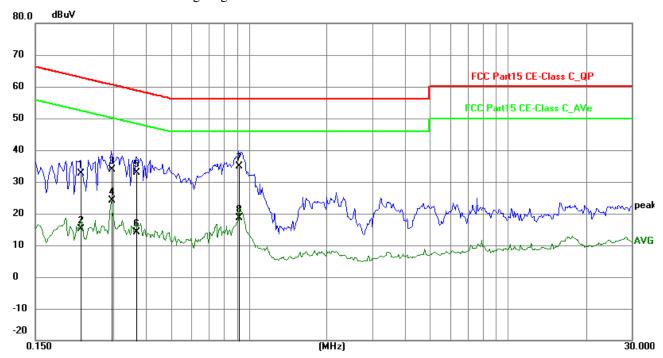

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2241	22.97	9.75	32.72	62.67	-29.95	QP	Р
2	0.2241	5.27	9.75	15.02	52.67	-37.65	AVG	Р
3	0.2943	24.16	9.76	33.92	60.40	-26.48	QP	Р
4	0.2943	14.32	9.76	24.08	50.40	-26.32	AVG	Р
5	0.3684	23.00	9.76	32.76	58.54	-25.78	QP	Р
6	0.3684	4.47	9.76	14.23	48.54	-34.31	AVG	Р
7	0.9144	25.20	9.79	34.99	56.00	-21.01	QP	Р
8	0.9144	8.81	9.79	18.60	46.00	-27.40	AVG	Р

Report No.: TW2206192-01E Page 12 of 94

Date: 2022-07-04



## B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

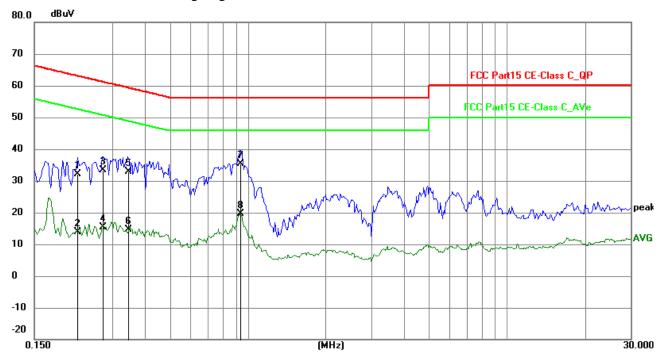

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2202	22.36	9.75	32.11	62.81	-30.70	QP	Р
2	0.2202	4.22	9.75	13.97	52.81	-38.84	AVG	Р
3	0.2748	23.74	9.75	33.49	60.97	-27.48	QP	Р
4	0.2748	5.60	9.75	15.35	50.97	-35.62	AVG	Р
5	0.3450	23.04	9.76	32.80	59.08	-26.28	QP	Р
6	0.3450	4.86	9.76	14.62	49.08	-34.46	AVG	Р
7	0.9378	25.52	9.79	35.31	56.00	-20.69	QP	Р
8	0.9378	9.96	9.79	19.75	46.00	-26.25	AVG	Р

Report No.: TW2206192-01E Page 13 of 94

Date: 2022-07-04




#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

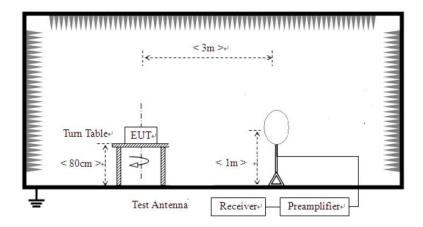


Page 14 of 94

Report No.: TW2206192-01E


Date: 2022-07-04



For radiated emissions from 30MHz to1GHz

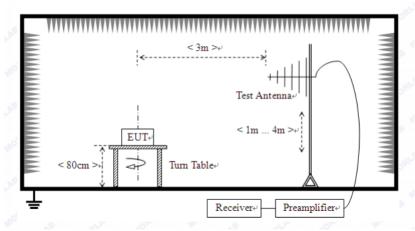

For radiated emissions above 1GHz

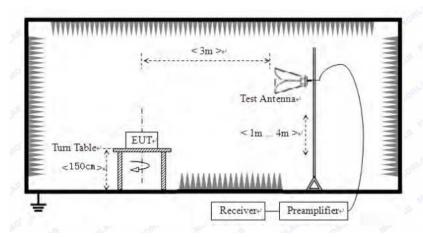

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2206192-01E Page 15 of 94

Date: 2022-07-04



## Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 7. Battery fully charged was used during tests.
- 8. Worse case was recorded in the test report. 802.11g was the worst case.

Page 16 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




# Test result General Radiated Emission Data and Harmonics Radiated Emission Data

## Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting** 

**Results: Pass** 

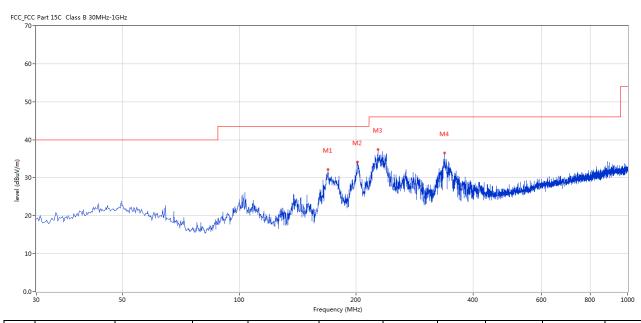

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	168.918	32.18	-16.11	43.5	-11.32	Peak	99.00	200	Horizontal	Pass
2	201.647	34.19	-13.41	43.5	-9.31	Peak	81.00	200	Horizontal	Pass
3	227.588	37.48	-12.79	46.0	-8.52	Peak	71.00	100	Horizontal	Pass
4	337.656	36.49	-9.81	46.0	-9.51	Peak	84.00	100	Horizontal	Pass

Page 17 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




# Test result General Radiated Emission Data and Harmonics Radiated Emission Data

## Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting** 

**Results: Pass** 

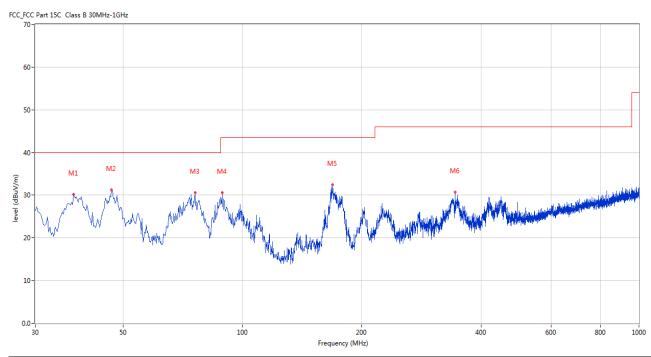

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	37.516	30.24	-12.95	40.0	-9.76	Peak	129.00	100	Vertical	Pass
2	46.728	31.21	-11.44	40.0	-8.79	Peak	333.00	100	Vertical	Pass
3	75.821	30.62	-17.51	40.0	-9.38	Peak	186.00	200	Vertical	Pass
4	88.913	30.57	-15.46	43.5	-12.93	Peak	151.00	100	Vertical	Pass
5	168.675	32.47	-16.12	43.5	-11.03	Peak	328.00	200	Vertical	Pass
6	344.201	30.68	-9.56	46.0	-15.32	Peak	124.00	100	Vertical	Pass

Page 18 of 94


Report No.: TW2206192-01E

Date: 2022-07-04



Please refer to the following test plots for details:

# CH01 for 11g at 6Mbps: Horizontal

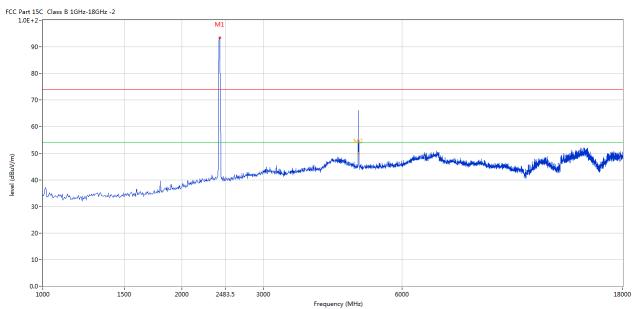


No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2414.896	93.43	-3.57	74.0	19.43	Peak	274.00	100	Horizontal	N/A
2	4824.044	66.06	3.14	74.0	-7.94	Peak	284.00	100	Horizontal	Pass
2**	4824.044	49.63	3.14	54.0	-4.37	AV	284.00	100	Horizontal	Pass

Page 19 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## CH01 for 11g at 6Mbps: Vertical

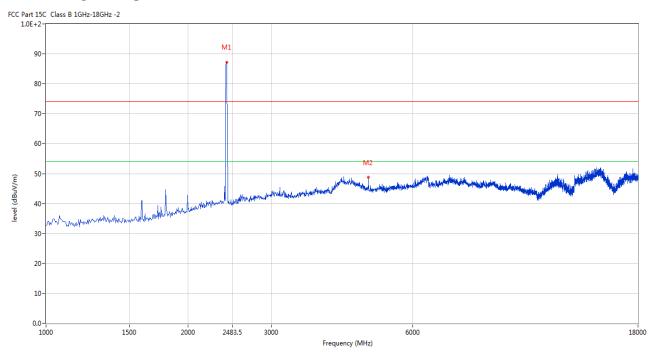


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2414.896	87.29	-3.57	74.0	13.29	Peak	337.00	100	Vertical	N/A
2	4824.044	48.74	3.14	74.0	-25.26	Peak	166.00	100	Vertical	Pass

Page 20 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## CH06 for 11g at 6Mbps: Horizontal

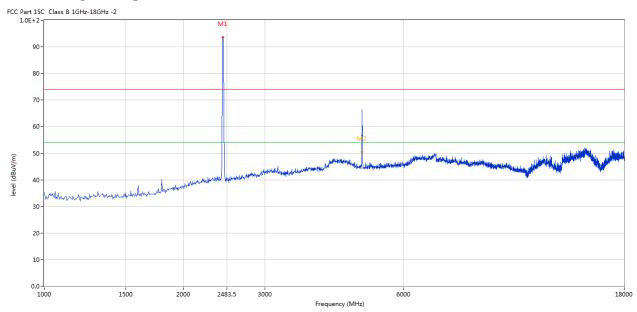


No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2436.141	93.64	-3.57	74.0	19.64	Peak	279.00	100	Horizontal	N/A
2	4875.031	66.55	3.19	74.0	-7.45	Peak	274.00	100	Horizontal	Pass
2**	4875.031	50.45	3.19	54.0	-3.55	AV	274.00	100	Horizontal	Pass

Page 21 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## CH06 for 11g at 6Mbps: Vertical

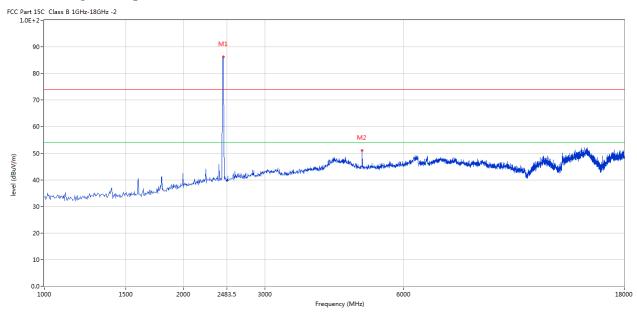


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	86.19	-3.57	74.0	12.19	Peak	338.00	100	Vertical	N/A
2	4875.031	50.99	3.19	74.0	-23.01	Peak	7.00	100	Vertical	Pass

Page 22 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## CH11 for 11g at 6Mbps: Horizontal

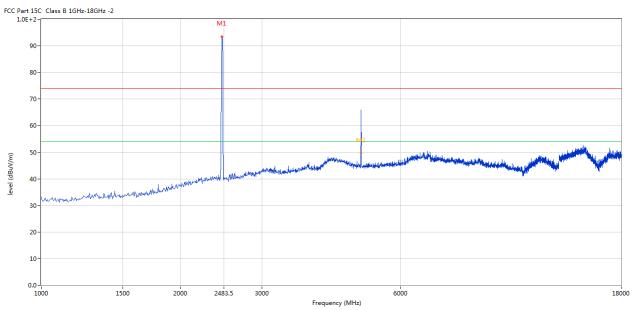


No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2461.635	93.41	-3.57	74.0	19.41	Peak	265.00	100	Horizontal	N/A
2	4921.770	66.00	3.27	74.0	-8.00	Peak	280.00	100	Horizontal	Pass
2**	4921.770	49.65	3.27	54.0	-4.35	AV	280.00	100	Horizontal	Pass

Report No.: TW2206192-01E Page 23 of 94

Date: 2022-07-04



## CH11 for 11g at 6Mbps: Vertical

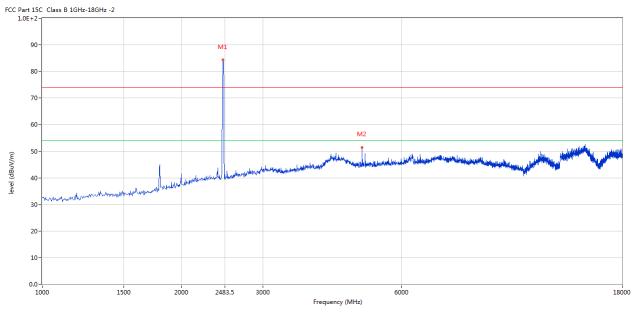

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2461.635	84.30	-3.57	74.0	10.30	Peak	172.00	100	Vertical	N/A
2	4921.770	51.44	3.27	74.0	-22.56	Peak	177.00	100	Vertical	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- 5. Note: the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result


Report No.: TW2206192-01E Page 24 of 94

Date: 2022-07-04



## 7.0 6dB Bandwidth Measurement

## 7.1 Test Setup



## 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

## 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 7.4 Test Result

Page 25 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## 6dB Occupied Bandwidth


EUT		Т	QSky Tbox	K	Mode	el	TB	BOX		
Mode			802.11b		Test V	/oltage	DC3	3.85V		
Temperat	ure		24 deg. C,		Humi	nidity		6 RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail		
1		2412	1	10.04			0.5	Pass		
6		2437	1	10.04			0.5	Pass		
11		2462	1	10.04			0.5	Pass		
1		2412	11	11.30	11.30		11.30		0.5	Pass
6		2437	11	11.30		0.5		Pass		
11		2462	11	11.30		0.5		Pass		

Report No.: TW2206192-01E Page 26 of 94

Date: 2022-07-04



## 1. 802.11b at 1Mbps of CH01

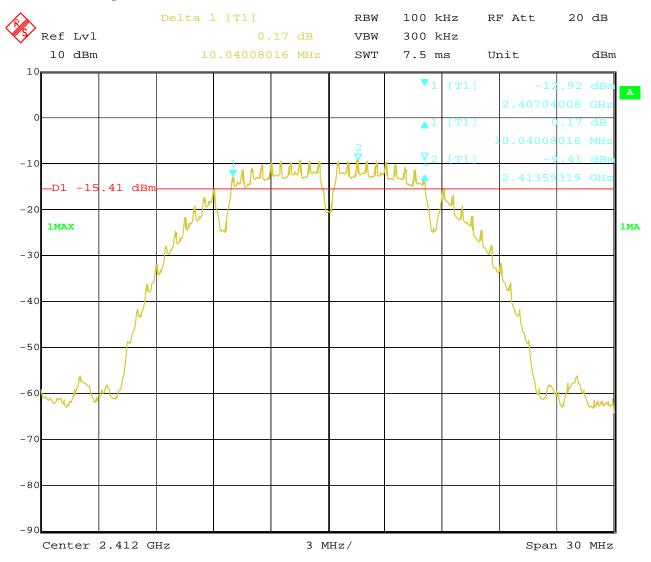


Date: 23.JUN.2022 14:44:39

Page 27 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## 2. 802.11b at 1Mbps of CH06

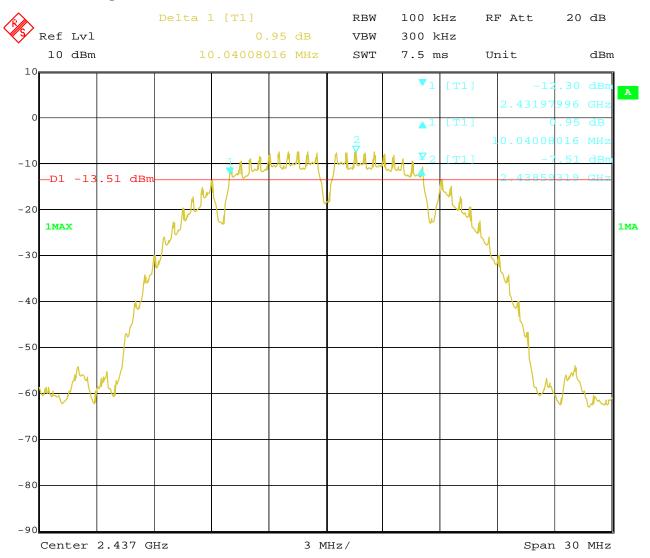


Date: 23.JUN.2022 15:05:39 Report No.: TW2206192-01E Page 28 of 94

Date: 2022-07-04



## 3. 802.11b at 1Mbps of CH11

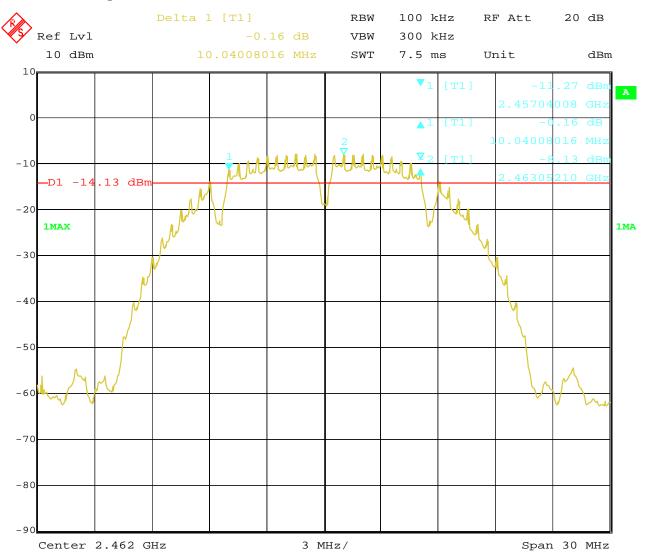


Date: 23.JUN.2022 15:28:04 Report No.: TW2206192-01E Page 29 of 94

Date: 2022-07-04



## 4. 802.11b at 11Mbps of CH01

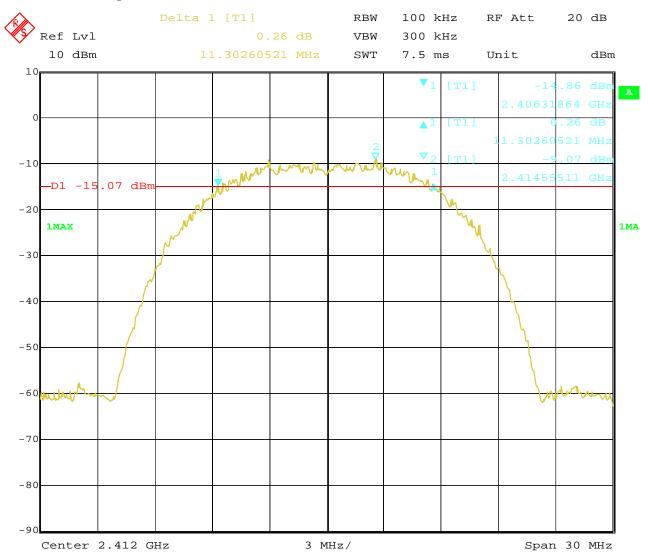


Date: 23.JUN.2022 14:47:51

Page 30 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## 5. 802.11b at 11Mbps of CH06

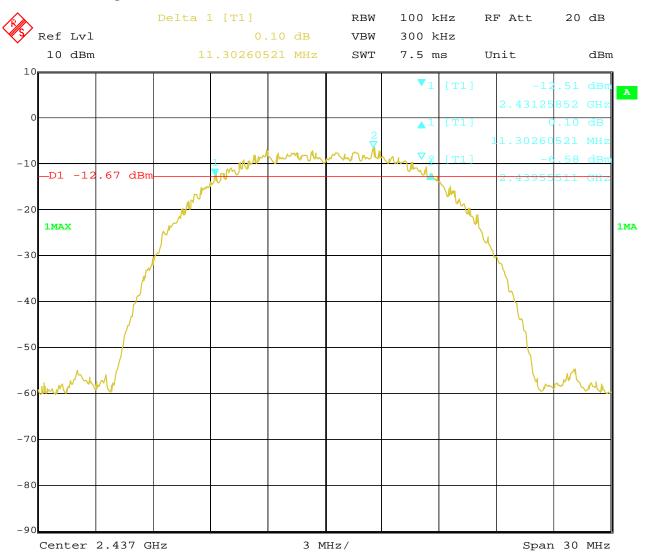


Date: 23.JUN.2022 15:10:15

Page 31 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## 6. 802.11b at 11Mbps of CH11

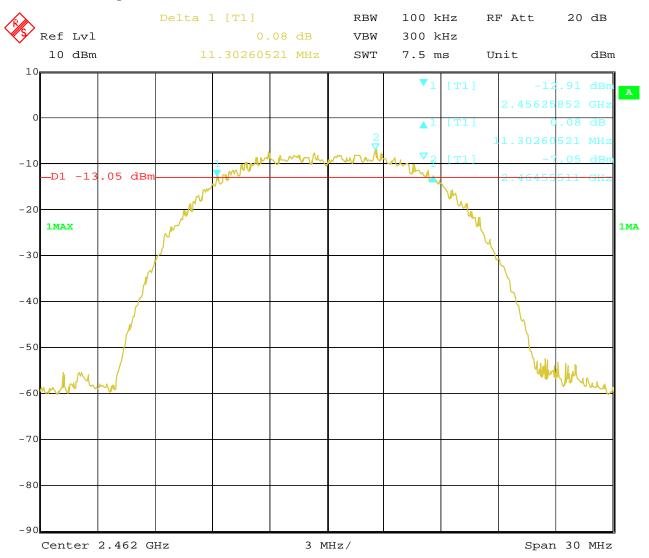

Date: 23.JUN.2022 15:19:01 Report No.: TW2206192-01E

Date: 2022-07-04



Page 32 of 94

## 6dB Occupied Bandwidth

EUT		7	TQSky Tbo	X	Mo	del		TBOX
Mode			802.11g		Tes	t Voltage		DC3.85V
Temperat	ure		24 deg. C, Humidity			56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwi (MHz)	dth	Minimum (MH		Pass/ Fail
1		2412	6	16.29		0.5		Pass
6		2437	6	16.41		0.5		Pass
11		2462	6	16.29		0.5		Pass

Page 33 of 94


Report No.: TW2206192-01E

Date: 2022-07-04



#### **Test Plots:**

## 1. 802.11g at 6Mbps of CH01

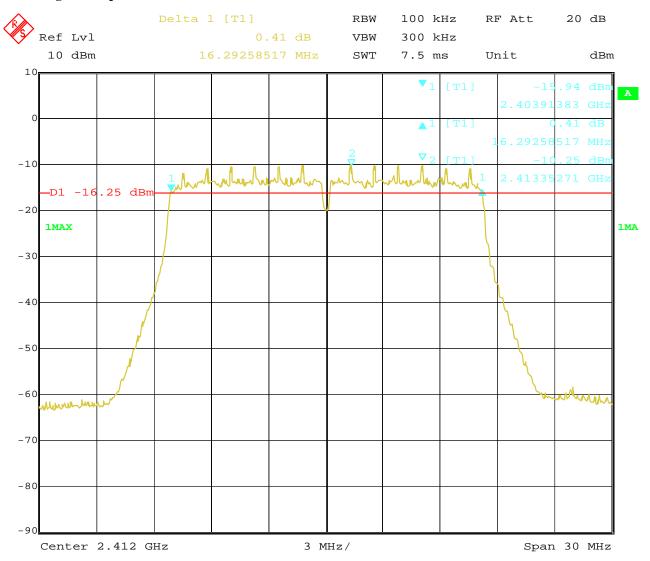


23.JUN.2022 14:55:33 Date:

Report No.: TW2206192-01E Page 34 of 94

Date: 2022-07-04



## 2. 802.11g at 6Mbps of CH06

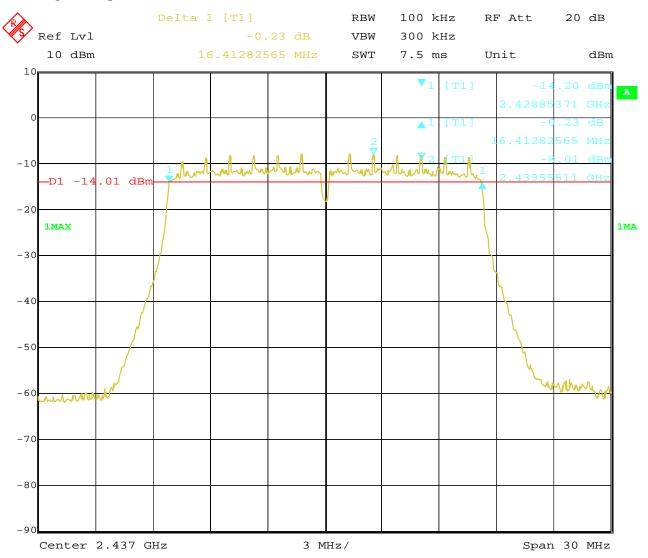


Date: 23.JUN.2022 15:00:08

Page 35 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## 3. 802.11g at 6Mbps of CH11

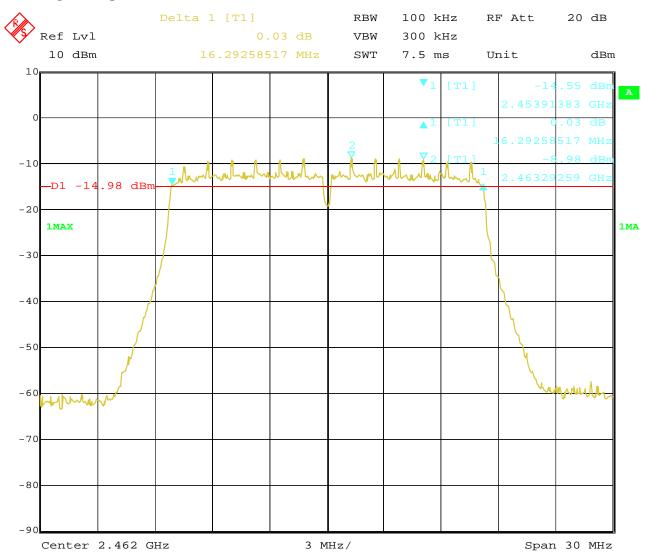

Date: 23.JUN.2022 15:32:49

Page 36 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



## 6dB Occupied Bandwidth

EUT		TQSky Tbox			Model		TBOX	
Mode		802.11n HT20			Test Voltage		DC3.85V	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1	2412		mcs0	17.56		0.5		Pass
6	2437		mcs0	17.56		0.5		Pass
11		2462	mcs0	17.5	6		0.5	Pass


Page 37 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



#### **Test Plots:**

## 1. 802.11n at HT20 of CH01

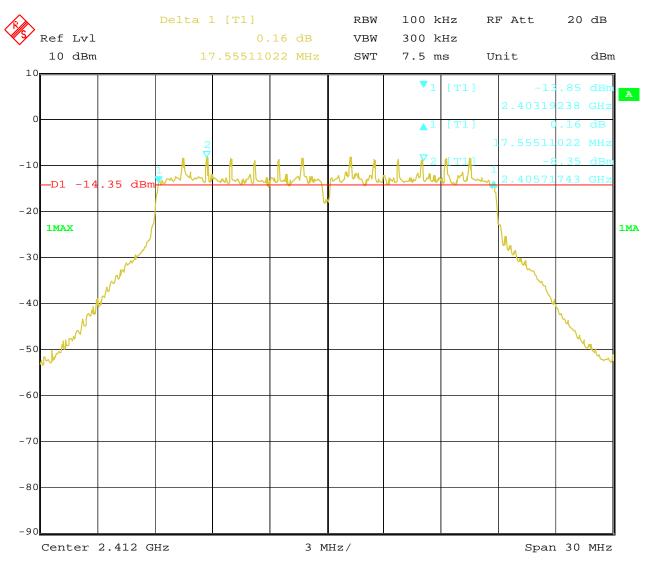


Date: 4.JUL.2022 16:08:46 Report No.: TW2206192-01E Page 38 of 94

Date: 2022-07-04



### 2. 802.11n at HT20 of CH06

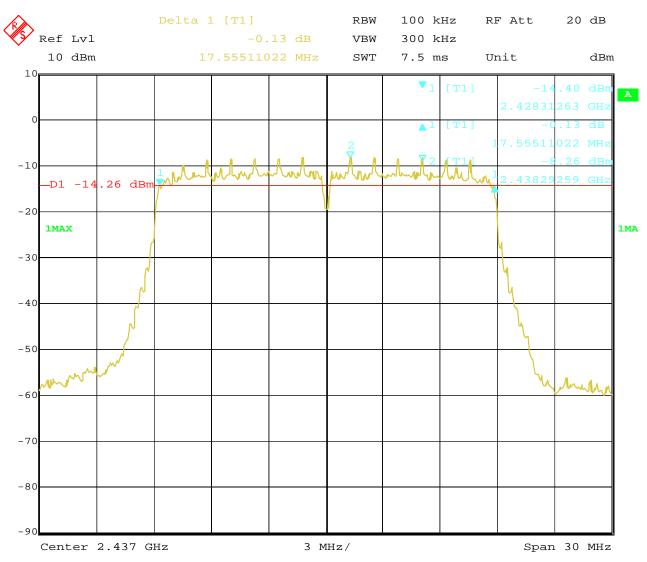


23.JUN.2022 15:46:54 Date:

Page 39 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



### 3. 802.11n at HT20 of CH11

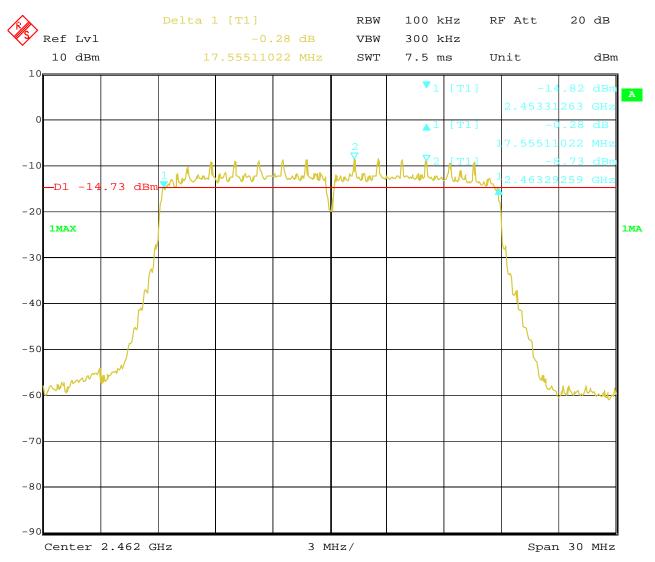

23.JUN.2022 15:49:28 Date:

Page 40 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



### 6dB Occupied Bandwidth

EUT		TO	Model		TBOX			
Mode		802	2.11n HT40	)	Test Voltage		nge DC3.85V	
Temperat	ure	2		Humidity		56%	6 RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
3		2422 mcs0		36.2	.7		0.5	Pass
6		2437	mcs0	36.27		0.5		Pass
9	2452		mcs0	36.2	.7		0.5	Pass

Page 41 of 94


Report No.: TW2206192-01E

Date: 2022-07-04



#### **Test Plots:**

### 1. 802.11n at HT40 of CH03

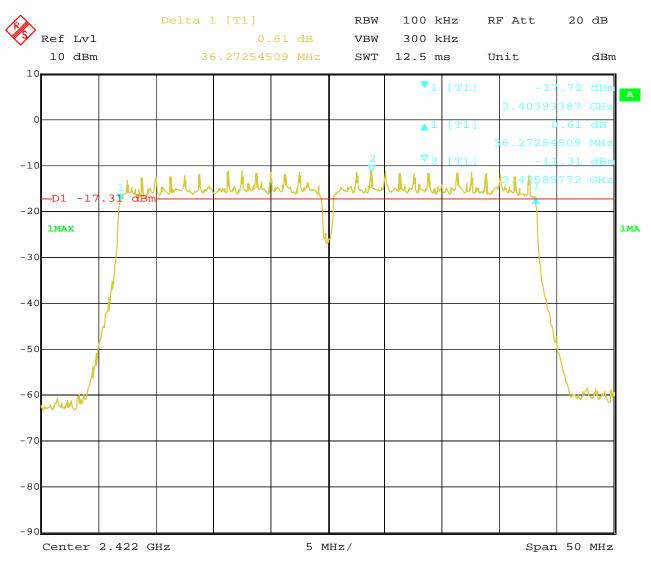


Date: 23.JUN.2022 15:52:27 Report No.: TW2206192-01E Page 42 of 94

Date: 2022-07-04



### 2. 802.11n at HT40 of CH06

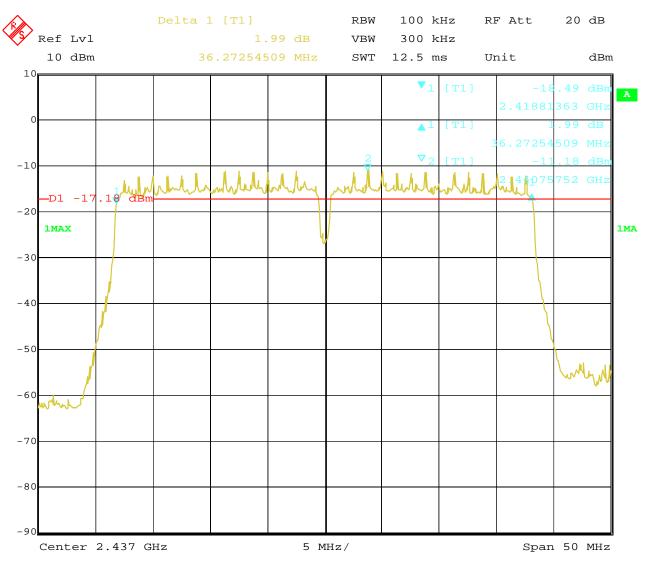


23.JUN.2022 15:55:42 Date:

Report No.: TW2206192-01E Page 43 of 94

Date: 2022-07-04



### 3. 802.11n at HT40 of CH09

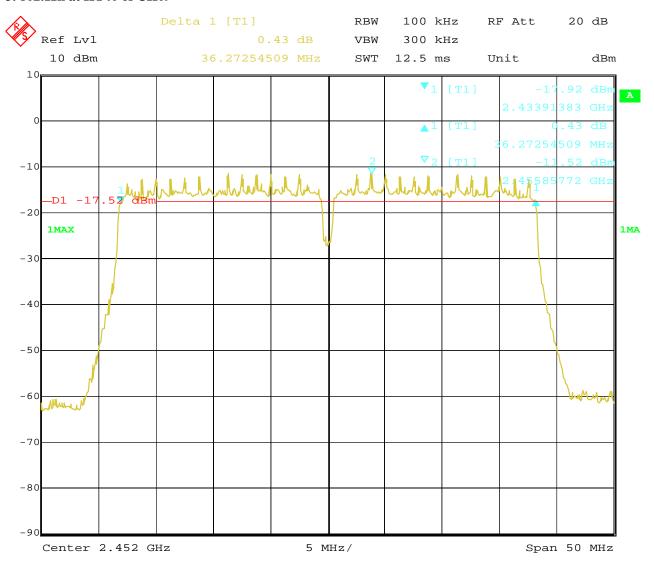

23.JUN.2022 16:01:20 Date:

Report No.: TW2206192-01E


Date: 2022-07-04



# Page 44 of 94

### 8. Maximum Output Power

## 8.1 Test Setup



### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The AV power was measured

Page 45 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### **8.4Test Results**

EUT			TQSky Tbox	Model		TBOX
Mode		802.11b		Test Voltage	Test Voltage D	
Temperati	ure		24 deg. C,	Humidity	56% RH	
Channel	nannel Frequency (MHz)		AV Power (dBm)	Power Lin (dBm)	nit	Pass/ Fail
1	2412		1.14	30		Pass
6	2437		1.33	30		Pass
11	11 2462		1.32	30		Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			TQSky Tbox	Model	TBOX
Mode			802.11g	Test Voltage	DC3.85V
Temperat	Temperature 24 deg. C,		24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)		AV Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	1 2412		3.50	30	Pass
6	6 2437		3.58	30	Pass
11	11 2462		3.22	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Report No.: TW2206192-01E Page 46 of 94

Date: 2022-07-04



EUT		TQSky Tbox		Model	TBOX
Mode		802.11n (HT20)		Test Voltage	DC3.85V
Temperat	ure		24 deg. C,	Humidity	56% RH
Channel	Frequency (MHz)		AV Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	1 2412		3.63	30	Pass
6	6 2437		3.79	30	Pass
11	11 2462		3.52	30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		TQSky Tbox		Model		TBOX
Mode		802.11n (HT40)		Test Voltage		DC3.85V
Temperat	Temperature		24 deg. C,	Humidity		56% RH
Channel	_	uency [Hz)	AV Power (dBm)	AV Power (dBm)  Power Limit (dBm)		Pass/ Fail
3	3 2422		3.94	30		Pass
6	6 2437		4.03	30		Pass
9	9 2452		3.68	30		Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

The result basic equation calculation as follow:
 Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No.: TW2206192-01E Page 47 of 94

Date: 2022-07-04



### 9. Power Spectral Density Measurement

### 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8 \text{ dBm/3kHz}$ .

Page 48 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 9.4Test Result

EUT			TQSky Tbox	Model	TB	OX
Mode			802.11b 11Mbps Test Voltage		DC3	.85V
Temperat	perature		24 deg. C,	Humidity	56%	6 RH
Channel	Freq	uency	Power Spectral Density (dBm/10kHz)		Limit	Pass/ Fail
	(M	IHz)			(dBm/3kHz)	
1	24	-17.31			8	Pass
6	24	437	-17.20		8	Pass
11	24	462	-17.08		8	Pass

EUT		TQSky Tbox		Model	TBO	OX
Mode		802.11b 1Mbps		Test Voltage	DC3.85V	
Temperat	erature		24 deg. C, Hun		56% RH	
Channel	Freq	uency	Power Spectral Density (dB	Power Spectral Density (dBm/10kHz)		Pass/ Fail
	(M	Hz)			(dBm/3kHz)	
1	24	112	-18.39		8	Pass
6	24	137	-18.40		8	Pass
11	24	162	-18.54		8	Pass

EUT		TQSky Tbox		Model	TBO	OX	
Mode		802.11g 6Mbps		Test Voltage	DC3.85V		
Temperat	ure		24 deg. C,	Humidity	56%	56% RH	
Channel	Freq	uency	Power Spectral Density (dBm	Power Spectral Density (dBm/10kHz)		Pass/ Fail	
	(M	(Hz)			(dBm/3kHz)		
1	24	412	-19.22		8	Pass	
6	24	437	-19.02		8	Pass	
11	24	162	-19.88		8	Pass	

Report No.: TW2206192-01E Page 49 of 94

Date: 2022-07-04



EUT			TQSky Tbox	Model	TBO	OX
Mode		802.11n HT20 mcs0 Test Voltage		802.11n HT20 mcs0 Test Voltage		85V
Temperat	ature		24 deg. C,	Humidity	56%	RH
Channel	_	uency	Power Spectral Density (dBm	Power Spectral Density (dBm/10kHz)		Pass/ Fail
	(M	(Hz)			(dBm/3kHz)	
1	24	-19.29			8	Pass
6	24	437	-19.16		8	Pass
11	24	162	-19.54		8	Pass

EUT		TQSky Tbox		Model	TBO	OX
Mode		802.11n HT40 mcs0		Test Voltage	DC3.	85V
Temperat	ure	24 deg. C,		Humidity	56%	RH
Channel	Freq	uency	Power Spectral Density (dBm/10kHz)		Limit	Pass/ Fail
	(M	(Hz)			(dBm/3kHz)	
3	24	-22.43			8	Pass
6	24	437	-22.25		8	Pass
9	24	452	-22.73		8	Pass


Page 50 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



### 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

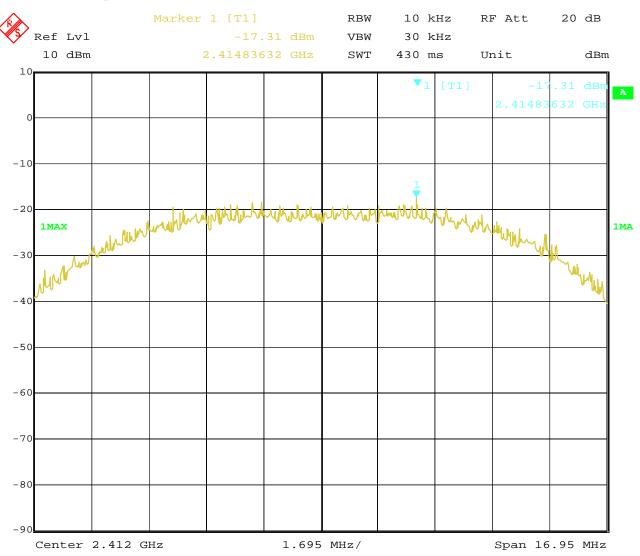

Date: 23.JUN.2022 17:58:04


Page 51 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 2. 802.11b at 11Mbps at CH06

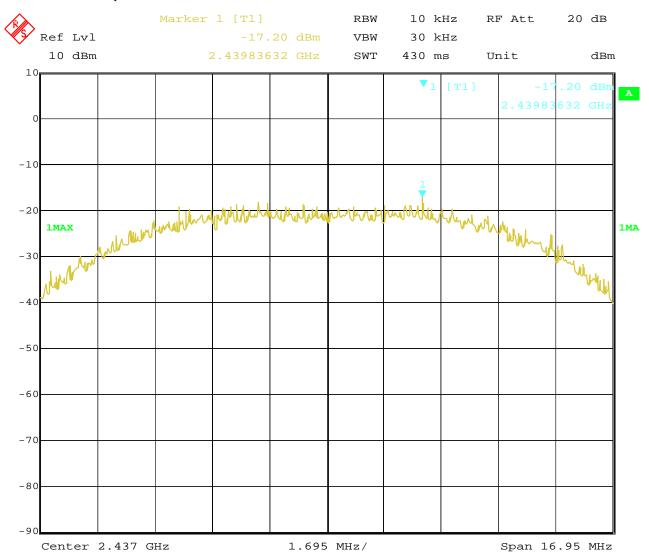

Date: 23.JUN.2022 17:56:31


Page 52 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 3. 802.11b at 11Mbps of CH11

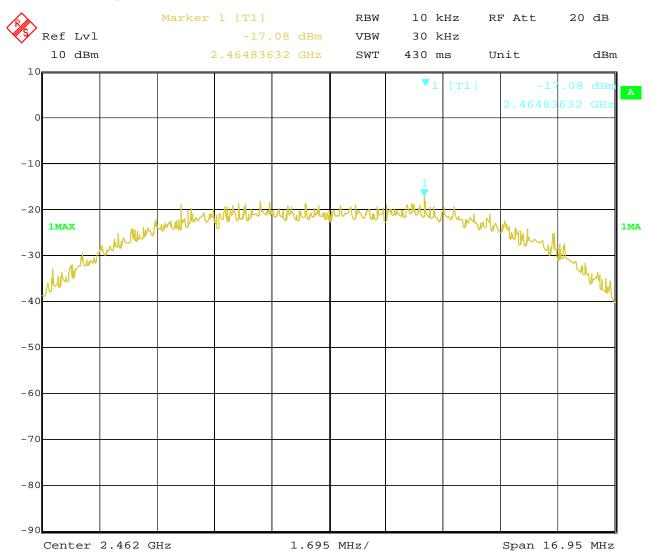

Date: 23.JUN.2022 17:54:55


Page 53 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 4. 802.11b at 1Mbps of CH1

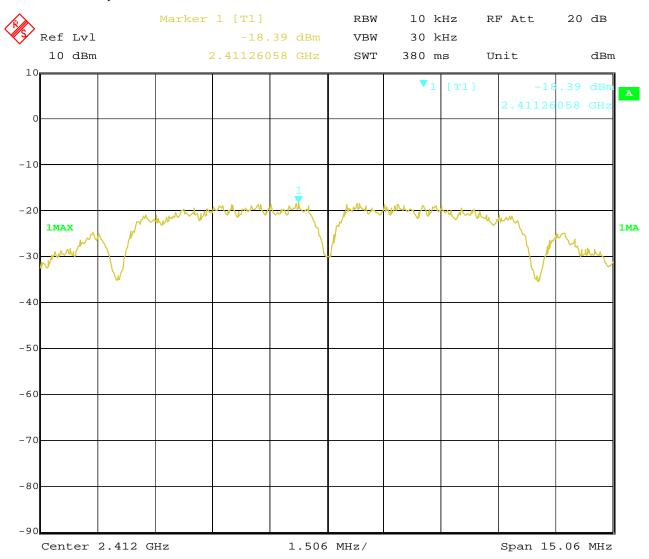

Date: 23.JUN.2022 17:48:13


Page 54 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 5. 802.11b at 1Mbps of CH6

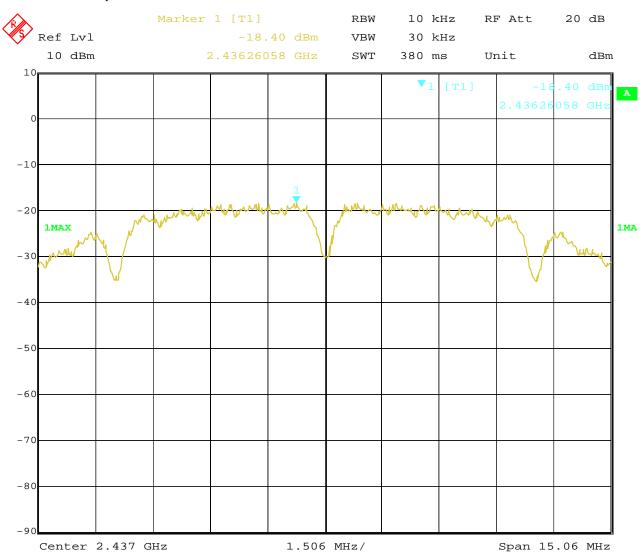

Date: 23.JUN.2022 17:50:38


Page 55 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 6. 802.11b at 1Mbps of CH11

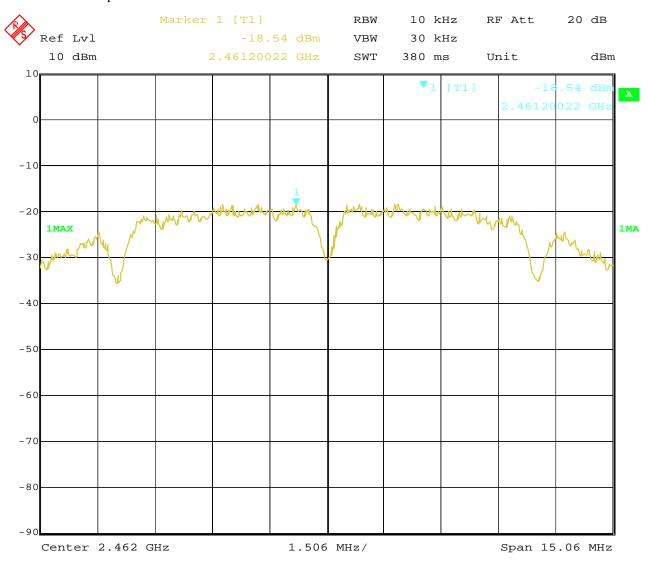

Date: 23.JUN.2022 17:51:57


Page 56 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 7. 802.11g at 6Mbps of CH1

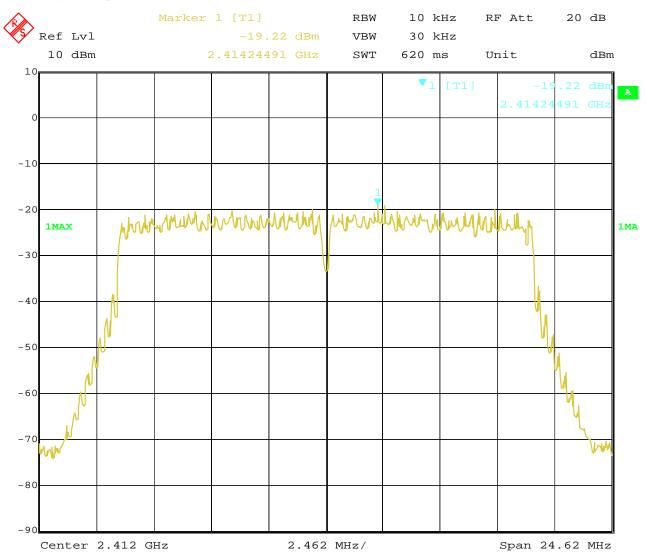

Date: 23.JUN.2022 18:00:01


Page 57 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



### 8. 802.11g at 6Mbps of CH6

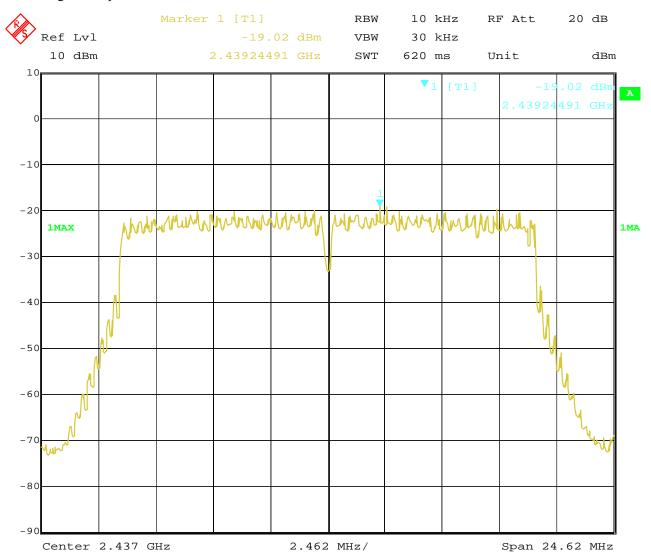

Date: 23.JUN.2022 18:01:49


Page 58 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



## 9. 802.11g at 6Mbps of CH11

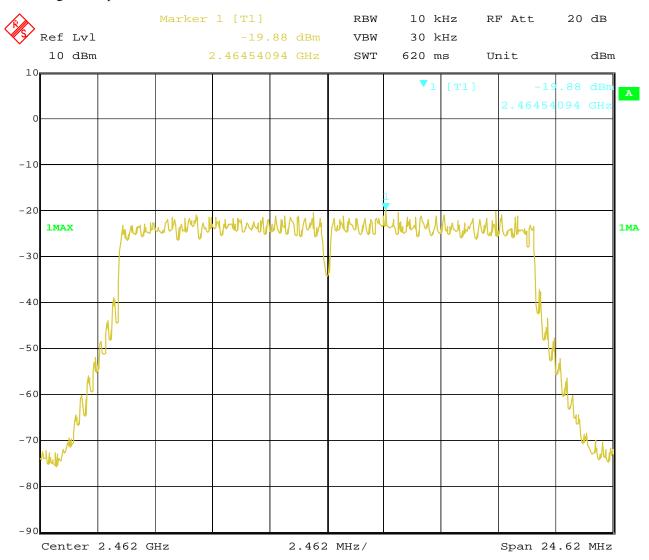

Date: 23.JUN.2022 18:02:22


Page 59 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 10. 802.11n at HT20 of CH01

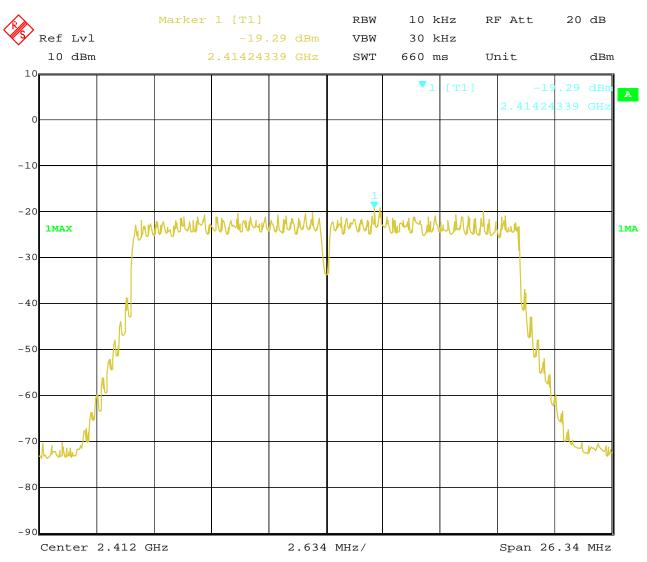

Date: 23.JUN.2022 17:00:11


Page 60 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 11. 802.11n at HT20 of CH06

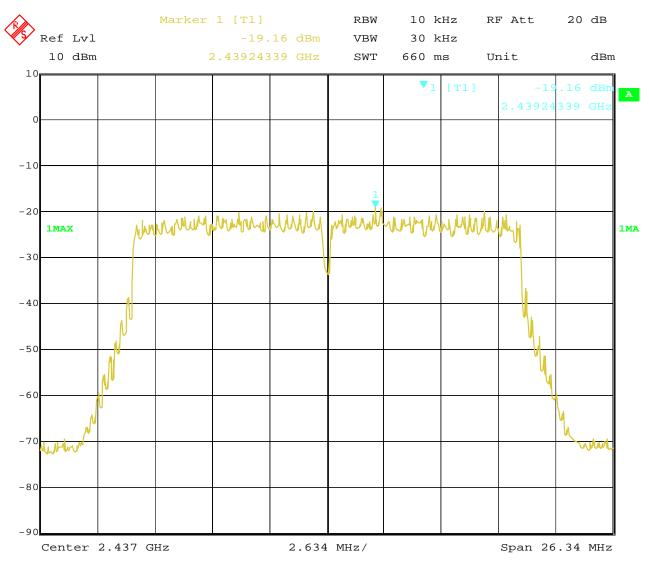

Date: 23.JUN.2022 17:05:07


Page 61 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 12. 802.11n at HT20 of CH11

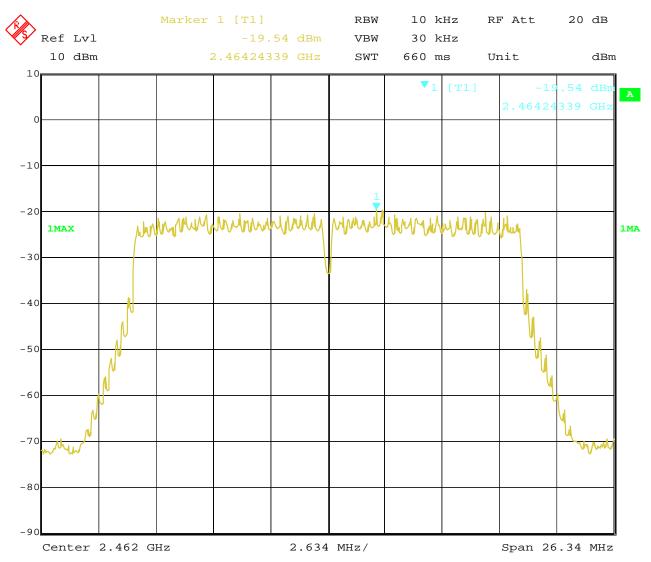


Date: 23.JUN.2022 17:14:24

Page 62 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



#### 13. 802.11n at HT40 of CH03

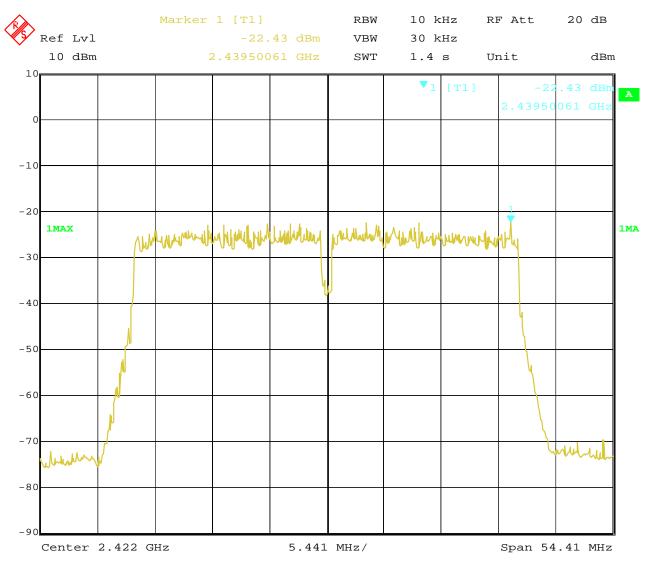

Date: 23.JUN.2022 17:19:20


Page 63 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 14. 802.11n at HT40 of CH06

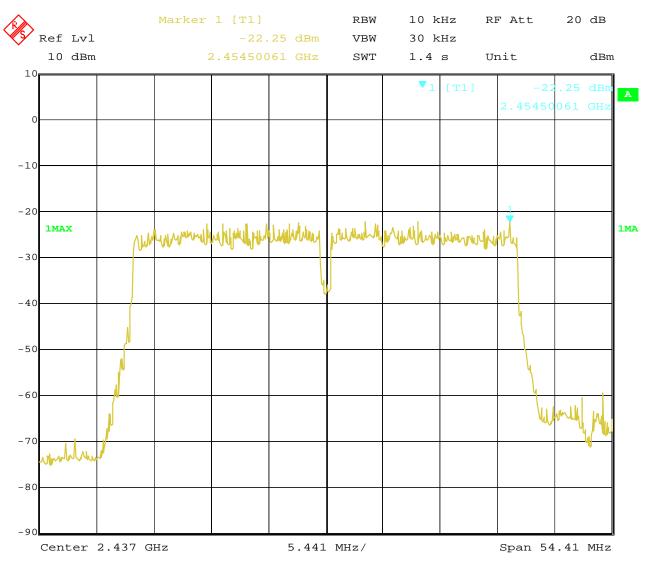

Date: 23.JUN.2022 17:36:20


Page 64 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 15. 802.11n at HT40 of CH09

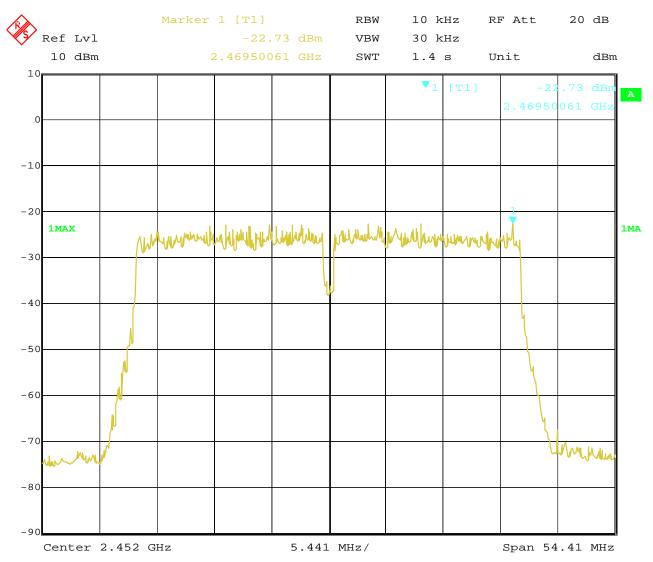


Date: 23.JUN.2022 17:43:09 Report No.: TW2206192-01E Page 65 of 94

Date: 2022-07-04



## 10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

#### 10.4 Test Result

Please see next pages

Note: 1. for band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 66 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### For 802.11b mode

CH01 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

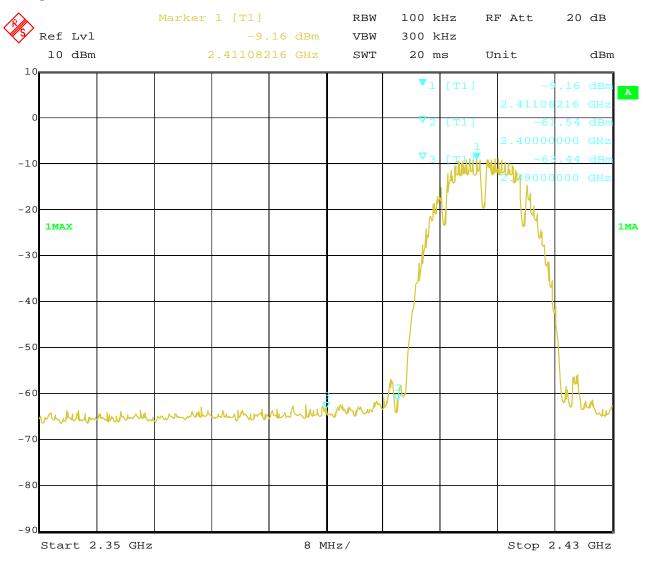

23.JUN.2022 18:24:23 Date:

Page 67 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### CH11 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

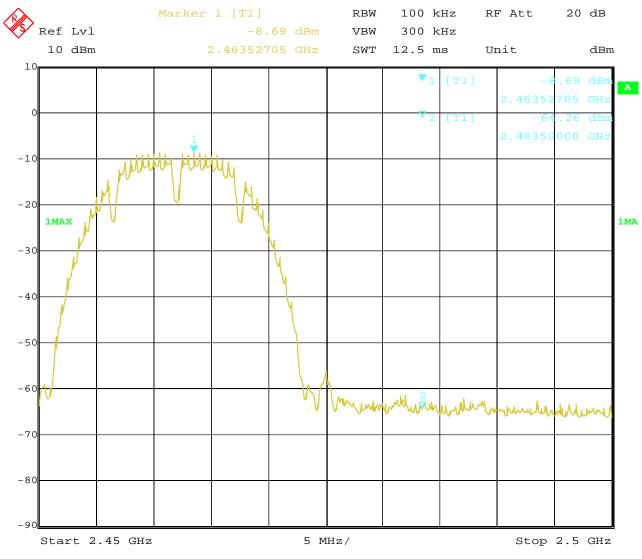

23.JUN.2022 Date: 18:19:34

Page 68 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### For 802.11b mode

## CH01 at 11Mbps

### **10.4** Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

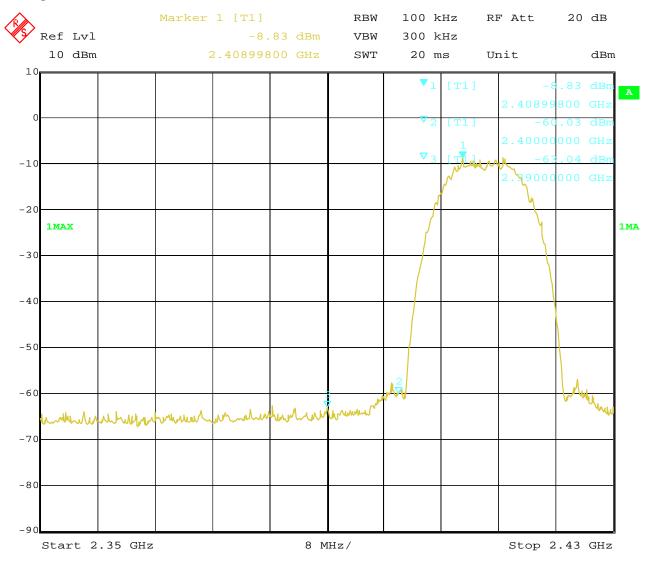

Date: 23.JUN.2022 18:25:01

Page 69 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### CH11 at 11Mbps

#### 10.4 Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

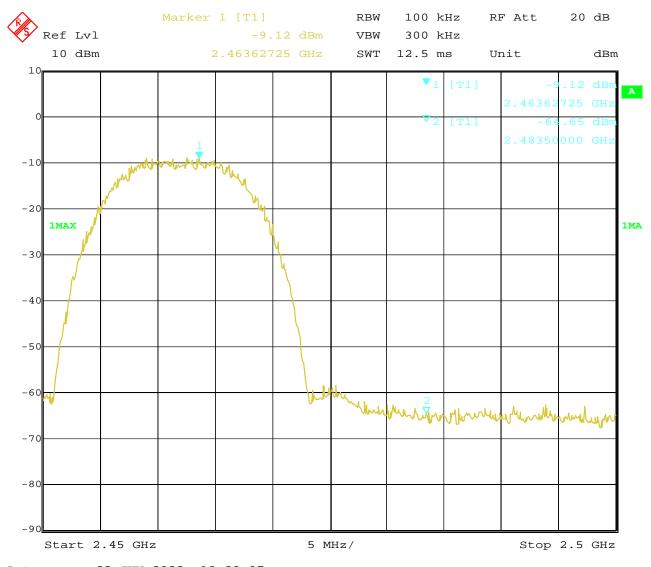

23.JUN.2022 Date: 18:20:07

Page 70 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### For 802.11g mode

CH01 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

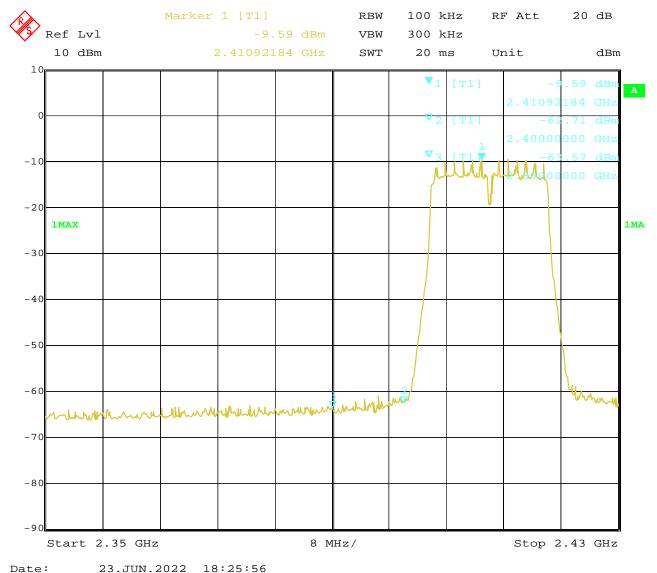

Page 71 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### CH11 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

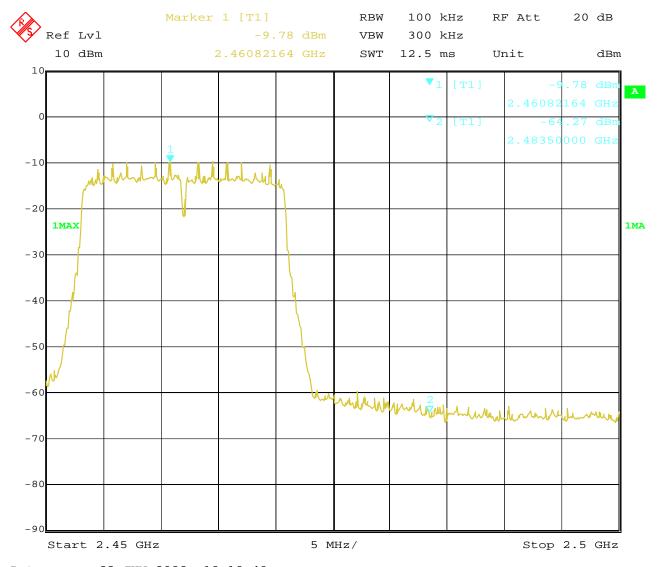

23.JUN.2022 Date: 18:18:48

Page 72 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### For 802.11n (HT20) mode

CH01 at mcs0

### **10.4** Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

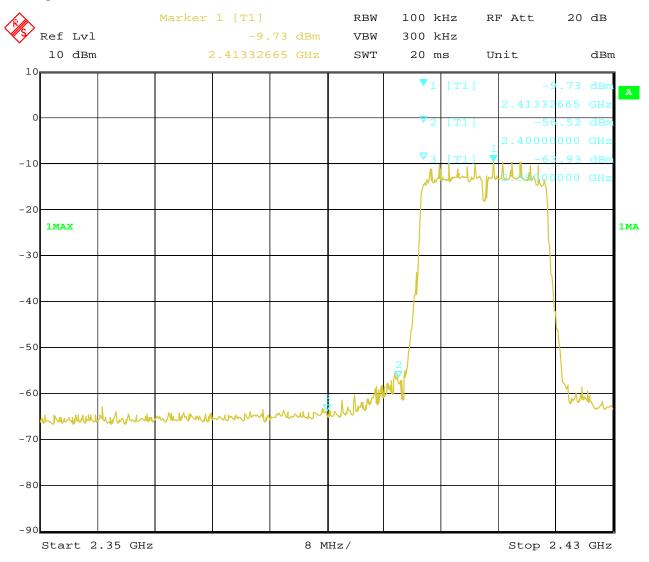

Date: 23.JUN.2022 18:26:35

Page 73 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### CH11 at mcs0

#### 10.4 Band-edge Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

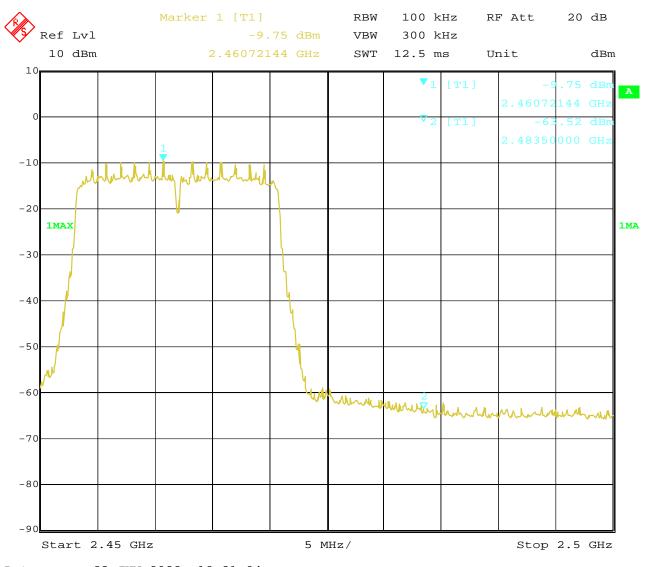

23.JUN.2022 Date: 18:21:04

Page 74 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### For 802.11n (HT40) mode

CH03 at msc0

# **10.4** Band-edge and Restricted band Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

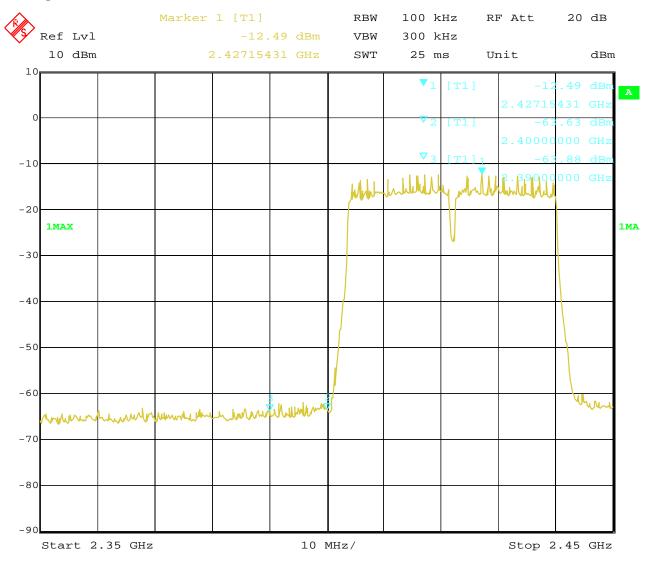

Date: 23.JUN.2022 18:23:26

Page 75 of 94

Report No.: TW2206192-01E

Date: 2022-07-04




### CH09 at msc0

# **10.4** Band-edge and Restricted band Measurement

EUT	TQSky Tbox	Model	TBOX
Mode	Keeping Transmitting	Test Voltage	DC3.85V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

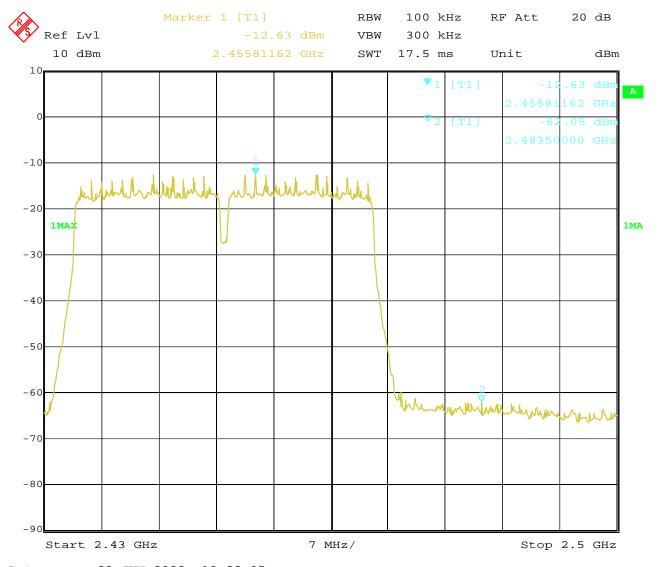

Date: 23.JUN.2022 18:22:05

Page 76 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



#### 10.5 Restricted band Measurement

EUT			Mo	del	TBOX				
Mode	Kee	Test V	oltage/	DC3.85V					
Temperature		24 deg. C,			nidity	56% RH			
Test Result:			Dete	ector	PK				
	802.11b mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	43.29	т:.	:4		$74(dB\mu V/m)$			
	AV (dBμV/m)		Lli	nit		$54(dB\mu V/m)$			
		802.11b mode, Low	Channel,	Vertical					
2390	PK (dBµV/m)	41.58	т:.	nit	74(dBμV/m)				
	AV (dBμV/m)		LII	mı		$54(dB\mu V/m)$			

EUT		TQSky Tbox		Model		TBOX		
Mode	Ke	Keeping Transmitting				DC3.85V		
Temperature		24 deg. C,				56% RH		
Test Result:		Pass		Det	Detector PK			
802.11b mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	42.36	т ::			$74(dB\mu V/m)$		
	AV (dBμV/m)		Limi	I		$54(dB\mu V/m)$		
		802.11b mode, High	Channel, V	ertical				
2483.5	PK (dBµV/m)	40.16	Limi	. 4	$74(dB\mu V/m)$			
	AV (dBμV/m)		LIIIII	ıı		$54(dB\mu V/m)$		

Report No.: TW2206192-01E Page 77 of 94

Date: 2022-07-04



#### 10.5 Restricted band Measurement

EUT		TQSky Tbox				TBOX		
Mode	Kee		Test Voltage		DC3.85V			
Temperature		24 deg. C,			nidity	56% RH		
Test Result:			Dete	ector	PK			
802.11g mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	43.75	т.	•4		$74(dB\mu V/m)$		
	AV (dBμV/m)		Lli	mit		$54(dB\mu V/m)$		
		802.11g mode, Low	Channel,	Vertical				
2390	PK (dBµV/m)	42.35	т.:.	mit		$74(dB\mu V/m)$		
	AV (dBμV/m)		LII	IIII	_	$54(dB\mu V/m)$		

	1								
EUT		TQSky Tbox		Model		TBOX			
Mode	Ke	Keeping Transmitting			Voltage	DC3.85V			
Temperature		24 deg. C,		Hur	Humidity 56% RH				
Test Result:		Pass			ector PK				
802.11g mode, High Channel, Horizontal									
2483.5	PK (dBμV/m)	43.01	т ::			$74(dB\mu V/m)$			
	AV (dBμV/m)		Limi	I		$54(dB\mu V/m)$			
		802.11g mode, High	Channel, V	ertical					
2483.5	PK (dBμV/m)	40.29	Tima		$74(dB\mu V/m)$				
	AV (dBμV/m)		Limi	Limit		54(dBµV/m)			

Report No.: TW2206192-01E Page 78 of 94

Date: 2022-07-04



#### 10.5 Restricted band Measurement

EUT		TQSky Tbox				TBOX			
Mode	Kee	Keeping Transmitting				DC3.85V			
Temperature		24 deg. C,		Hum	nidity	56% RH			
Test Result:			Dete	ector	PK				
	802.11n HT20 mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	43.21	т.	•4		$74(dB\mu V/m)$			
	AV (dBμV/m)		Lli	mit		$54(dB\mu V/m)$			
	8	302.11n HT20 mode, Lo	ow Chanr	nel, Vertic	al				
2390	PK (dBµV/m)	43.75	т:.	mit	$74(dB\mu V/m)$				
	AV (dBμV/m)		Lli	IIII		54(dBµV/m)			

EUT		TQSky Tbox		Model		TBOX		
Mode	Ke	Keeping Transmitting				DC3.85V		
Temperature		24 deg. C,			nidity	56% RH		
Test Result:		Pass	SS Detector PK					
802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	43.22	т ::	.,		$74(dB\mu V/m)$		
	AV (dBμV/m)		Limi	IT		$54(dB\mu V/m)$		
	8	302.11n HT20 mode, Hi	igh Channe	l, Verti	cal			
2483.5	PK (dBµV/m)	40.52	Limi	4	$74(dB\mu V/m)$			
	AV (dBμV/m)		LIIII	ll		54(dBµV/m)		

Report No.: TW2206192-01E Page 79 of 94


Date: 2022-07-04



#### 10.5 Restricted band Measurement

EUT		TQSky Tbox				TBOX			
Mode	Kee	Keeping Transmitting				DC3.85V			
Temperature		24 deg. C,			nidity	56% RH			
Test Result:		Pass		De	etector PK				
	802.11n HT40 mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	44.58				$74(dB\mu V/m)$			
	AV (dBμV/m)		Lli	nit		54(dBμV/m)			
		802.11n HT40 mode, L	ow Chan	nel Vertic	al				
2390	PK (dBµV/m)	47.67	т:.	nit	$74(dB\mu V/m)$				
	AV (dBμV/m)		Lli	IIII		54(dBμV/m)			

# **Test Plots**

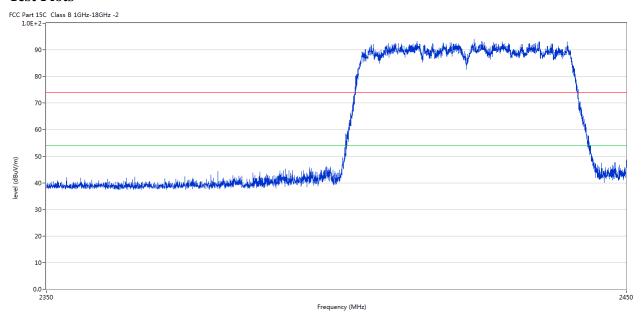


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2390.390	44.58	-3.53	74.0	-29.42	Peak	200.00	100	Horizontal	Pass

Report No.: TW2206192-01E Page 80 of 94

Date: 2022-07-04



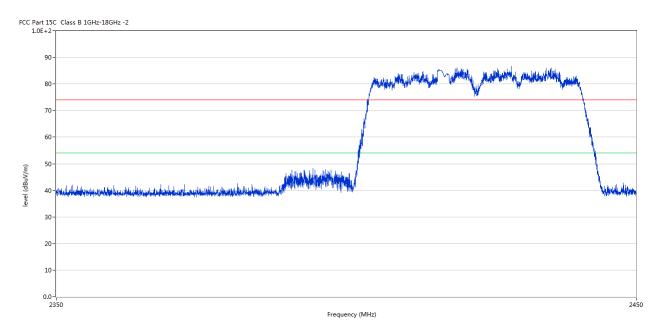

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2390.140	47.67	-3.53	74.0	-26.33	Peak	130.00	100	Vertical	Pass


Page 81 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



EUT		TQSky Tbox	N	Iodel	TBOX				
Mode	Keeping Transmitting				Voltage	DC3.85V			
Temperature	24 deg. C,				midity	56% RH			
Test Result:		Pass	De	etector	PK				
802.11n HT40 mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	43.69	т :	.,		$74(dB\mu V/m)$			
	AV (dBμV/m)		Lim	Ιτ	54(dBµV/m)				
802.11n HT40 mode, High Channel, Vertical									
2483.5	PK (dBµV/m)	40.55	т	-,		$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit			$54(dB\mu V/m)$			

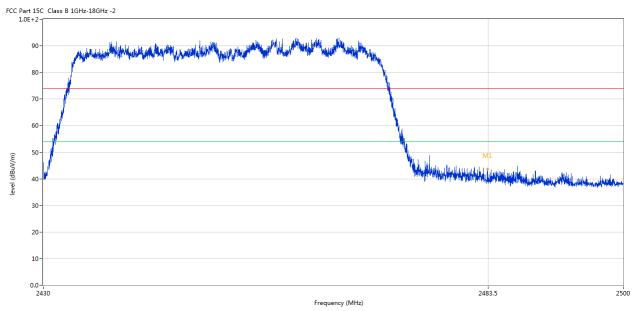


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2483.432	43.69	-3.57	74.0	-30.31	Peak	264.00	100	Horizontal	Pass

Page 82 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



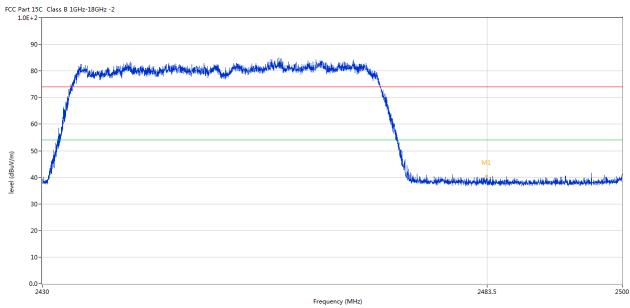

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2483.466	40.55	-3.57	74.0	-33.45	Peak	360.00	100	Vertical	Pass

Report No.: TW2206192-01E

Date: 2022-07-04



Page 83 of 94

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 11.2 Antenna Connected construction

FPC antenna with gain 1.42dBi Max (Get from the antenna specification)

Report No.: TW2206192-01E Page 84 of 94

Date: 2022-07-04



### 12.0 FCC ID Label

# FCC ID: 2A7Q4-TBOX

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### **Mark Location:**



Page 85 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



#### 13.0 Photo of testing

Conducted Emission Test Setup:




Page 86 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



# Radiated Emission Test Setup:

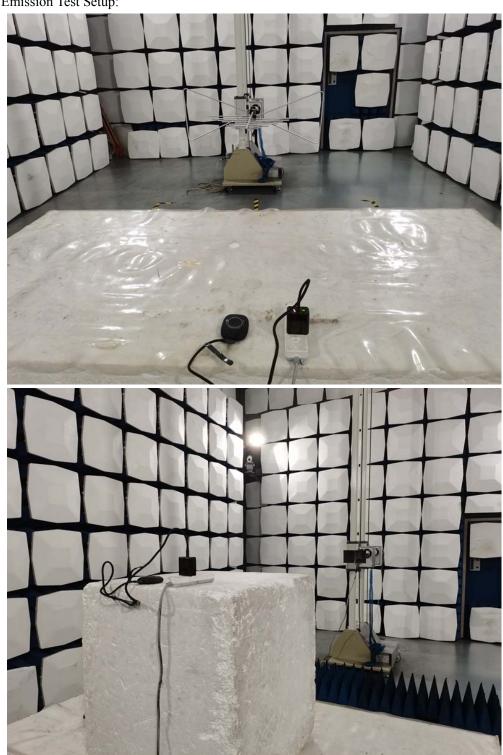

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2206192-01E

Date: 2022-07-04



#### 11.2 Photographs – EUT

# Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 88 of 94

Report No.: TW2206192-01E

Date: 2022-07-04





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 89 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



Outside View




Page 90 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



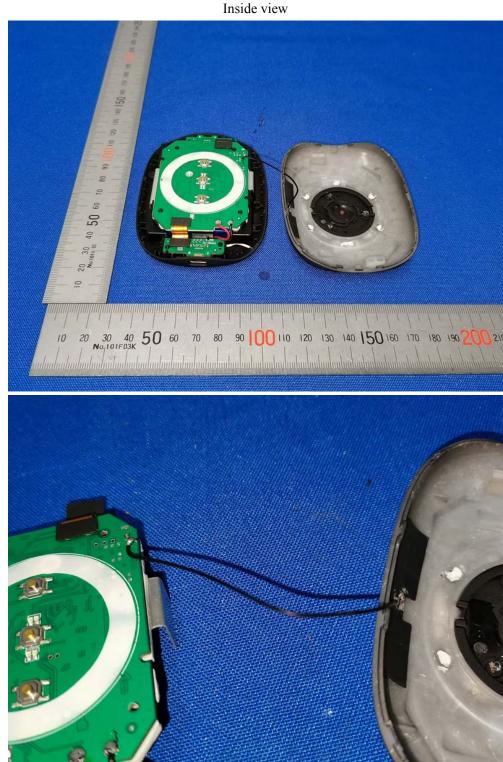

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 91 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 92 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



Inside view

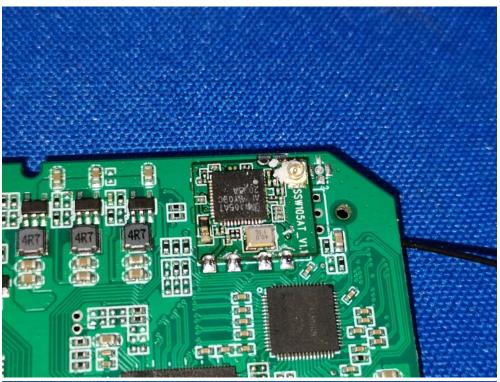



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 93 of 94

Report No.: TW2206192-01E

Date: 2022-07-04



Inside view

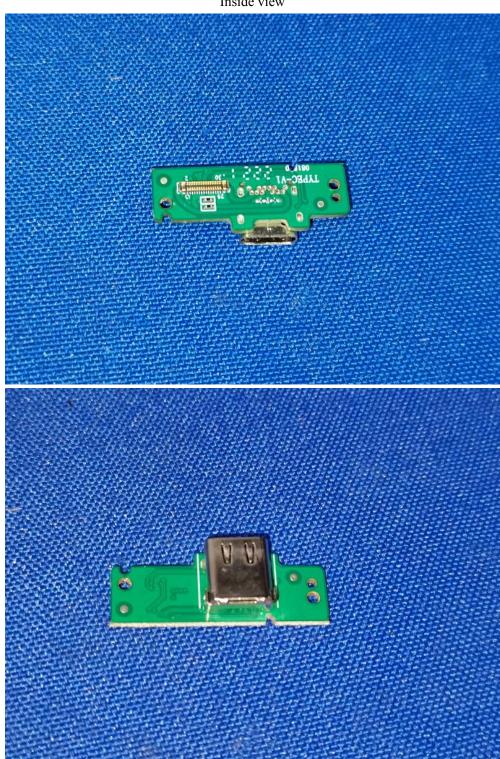

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 94 of 94 Report No.: TW2206192-01E

Date: 2022-07-04



### Inside view



-End of the report-