



APPLICATION SPECIFICATION

2.4/5GHZ WIFI DUAL BAND ANTENNA WITH SIDE SOLDER CABLE

TABLE OF CONTENTS

1.0 SCOPE

2.0 PRODUCT DESCRIPTION

3.0 APPLICABLE DOCUMENTS

4.0 ANTENNA PERFORMANCE

5.0 ASSEMBLY GUIDELINE

6.0 THE ANTENNA PERFORMANCE VARIATION WITH CABLE LENGTH

7.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24



APPLICATION SPECIFICATION

2.4/5GHZ WIFI DUAL BAND ANTENNA WITH SIDE SOLDER CABLE

1.0 SCOPE

This specification describes the antenna application and surrounding. The information in this document is for reference and benchmark purposes only. The user is responsible for validating antenna RF performance based on the user's actual implementation.

Although this document AS-2042810300 is for U.FL compatible connector and 300mm cable, it is applicable to all products under 204281 series. All measurements in this document are done with the part no.2042810300 with a cable length of 300mm, it is used to illustrate the product application. There is no different between the performances for 204810100 and 204811100. The document is applicable to all cable length as well.

Antenna illustrations in this document are generic representations. They are not intended to be an image of any antenna listed in the scope.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER (S)

Product name: 2.4/5GHz WIFI Dual Band Antenna with Side Solder Cable


Series Number: 204281

2.2 DESCRIPTION

Series 204281 is a balanced, side-fed, dipole-type, high efficiency antenna for 2.4/5 GHz applications, including WiFi, Bluetooth, Zigbee and others. This antenna is made from poly-flexible material with small size 35*11*0.1mm, and has double-sided adhesive tape for easy "peel and stick" mounting. This balanced antenna with ground plane independent design offers various cable length options for ease of integration into various devices.

2.3 PRODUCT STRUCTURE INFORMATION

Please refer to PS-2042810300 for full information.

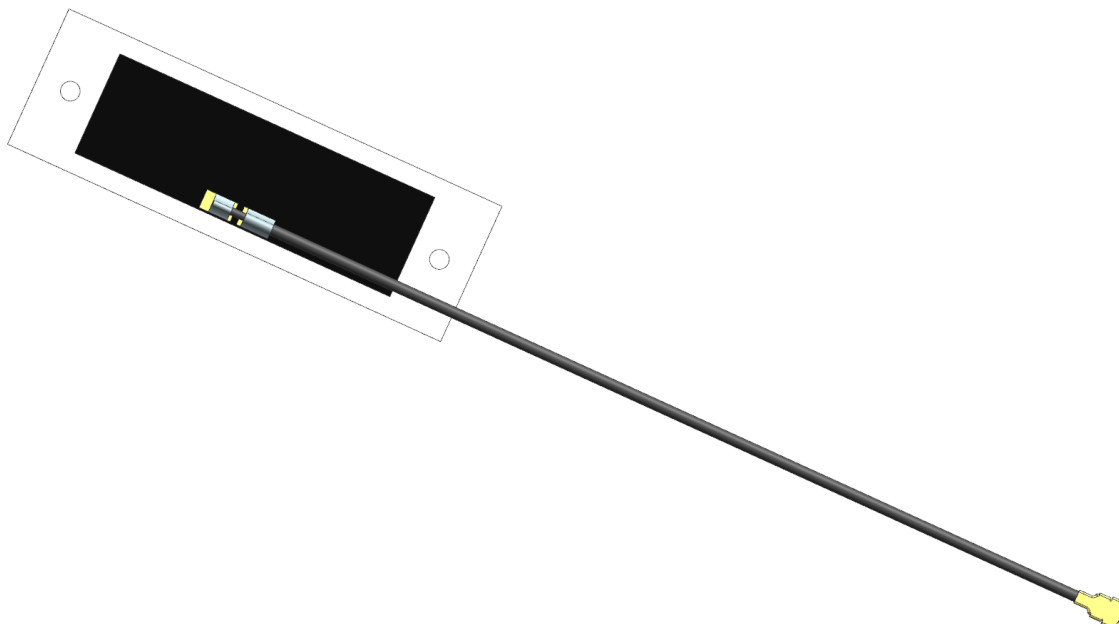

Molex 204281XXXX 2.4/5GHz Wide dual band Antenna 3D View

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

3.0 APPLICABLE DOCUMENTS

Document	Number	Description
Sales Drawing(SD)	SD-2042810300	Mechanical Dimension of the product
	SD-2042811300	
Product Specification (PS)	PS-2042810300	Product Specification
Packing Drawing(PK)	PK-2042810300	Product packaging specifications

4.0 ANTENNA PERFORMANCE

Product name	2.4/5GHz Wide Dual Band Antenna with side solder cable
Part number	204281****
Frequency	2.4GHz-2.5GHz
	5.15GHz-5.85GHz
Polarization	Linear
Operating with matching	-30℃ to 85℃
Storage with matching	-40℃ to 95℃
RF Power	2 Watts
Impedance with matching	50 Ohms
Antenna type	Flex
Connector type	U.FL for 2042810***
	IPEX MHF4 for 2042811***
User Implementation type	Adhesive 3M9077
Cable diameter	Ø1.13mm
Cable length	250mm for 2042810250 and 2042811250

4.1 RF TEST CONDITIONS

All measurements are done of the antenna mounted on a PC/ABS material block of 1mm thickness with VNA Agilent 5071C and Over-The-Air (OTA) chamber. All measurements in this document are done with the part no.2042810300 and 2042811300 with a cable length of 300mm.

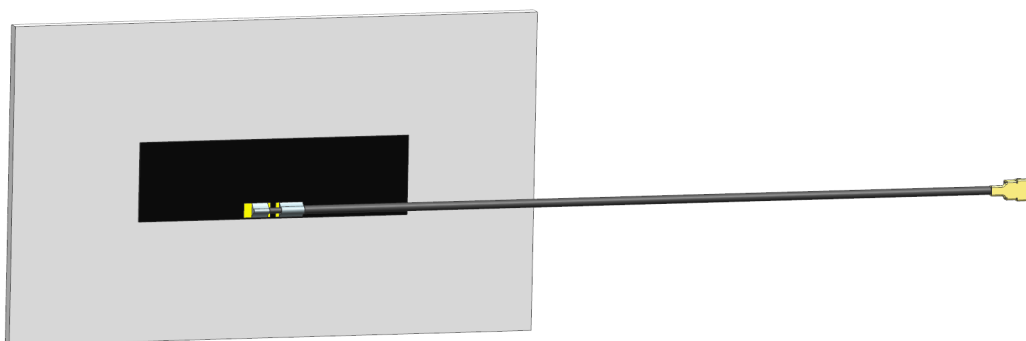


FIGURE4.1.1 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

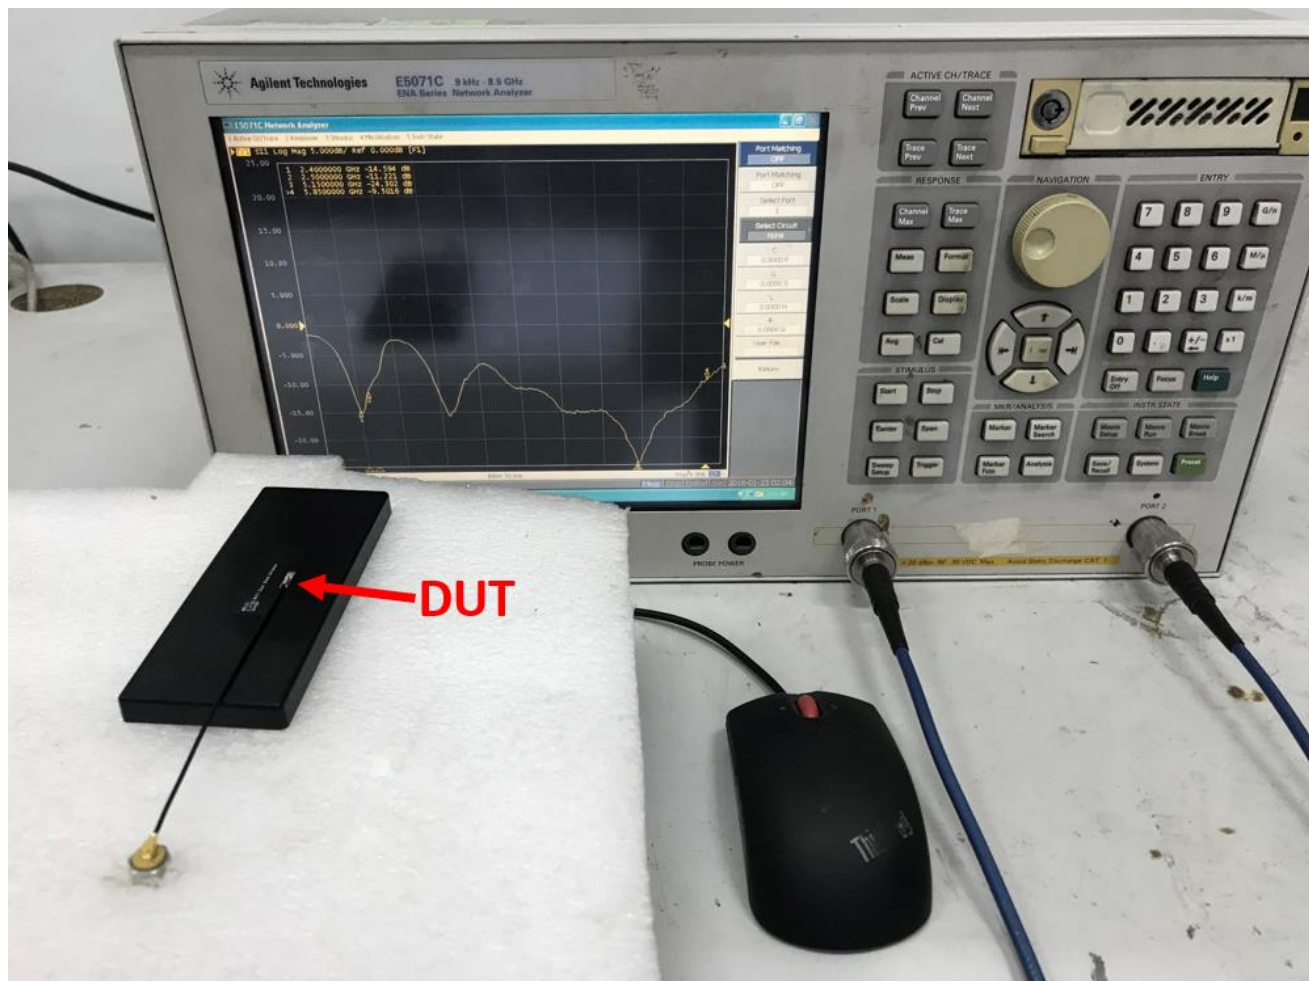


FIGURE 4.1.2 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS TESTED WITH VNA E5071C

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE			SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24		

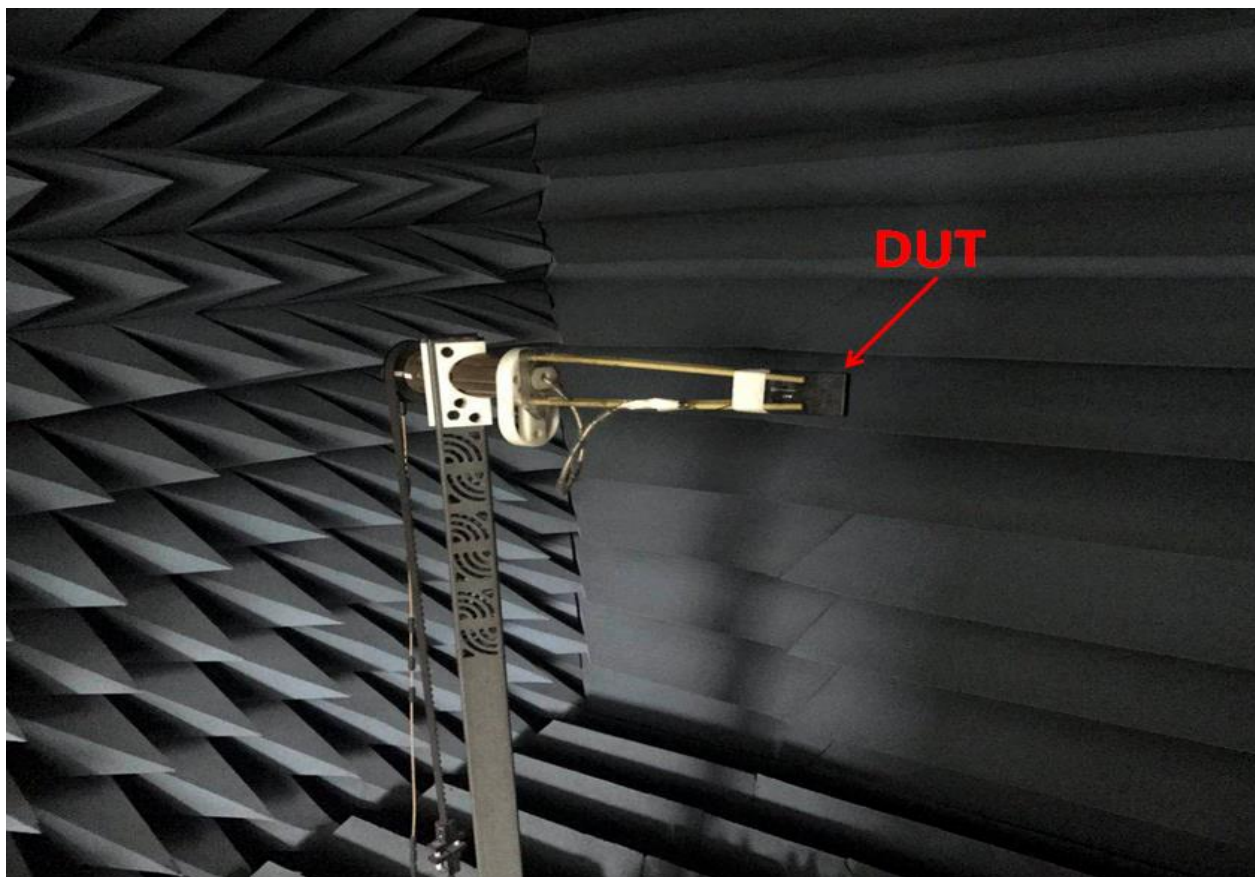


FIGURE4.1.3 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS TESTED IN OTA CHAMBER

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24



APPLICATION SPECIFICATION

4.2 ANTENNA PERFORMANCE

5.1.2 ANTENNA PERFORMANCE FOR CABLE LENGTH 250mm		
P/N	2042810250 and 2042811250	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain(Max)	2.0dBi	3.3dBi
Total efficiency	>65%	>68%
Return Loss	<-10dB	

REVISION:

C

ECR/ECN INFORMATION:

EC No: **171309**

DATE: **2018/01/24**

TITLE:

**2.4/5G WIFI ANTENNA WITH SIDE
SOLDER CABLE**

SHEET No.

DOCUMENT NUMBER:

AS-2042810300

CREATED / REVISED BY:

Benson Liu 2018/01/24

CHECKED BY:

Kang Cheng 2018/01/24

APPROVED BY:

Chris Zhong 2018/01/24

4.3 RETURN LOSS PLOT

All measurements in this document are done with a cable length of 250mm

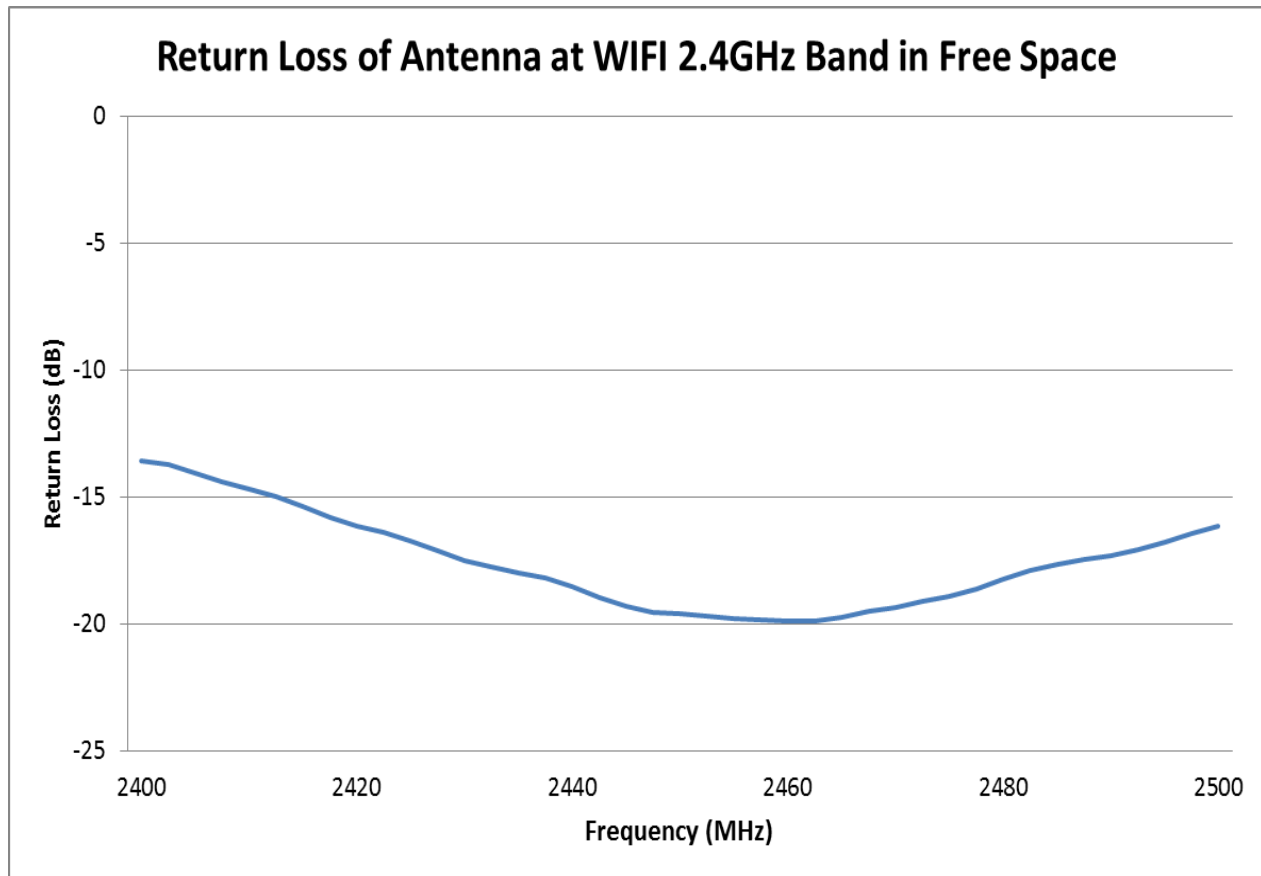


FIGURE 4.3.1 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

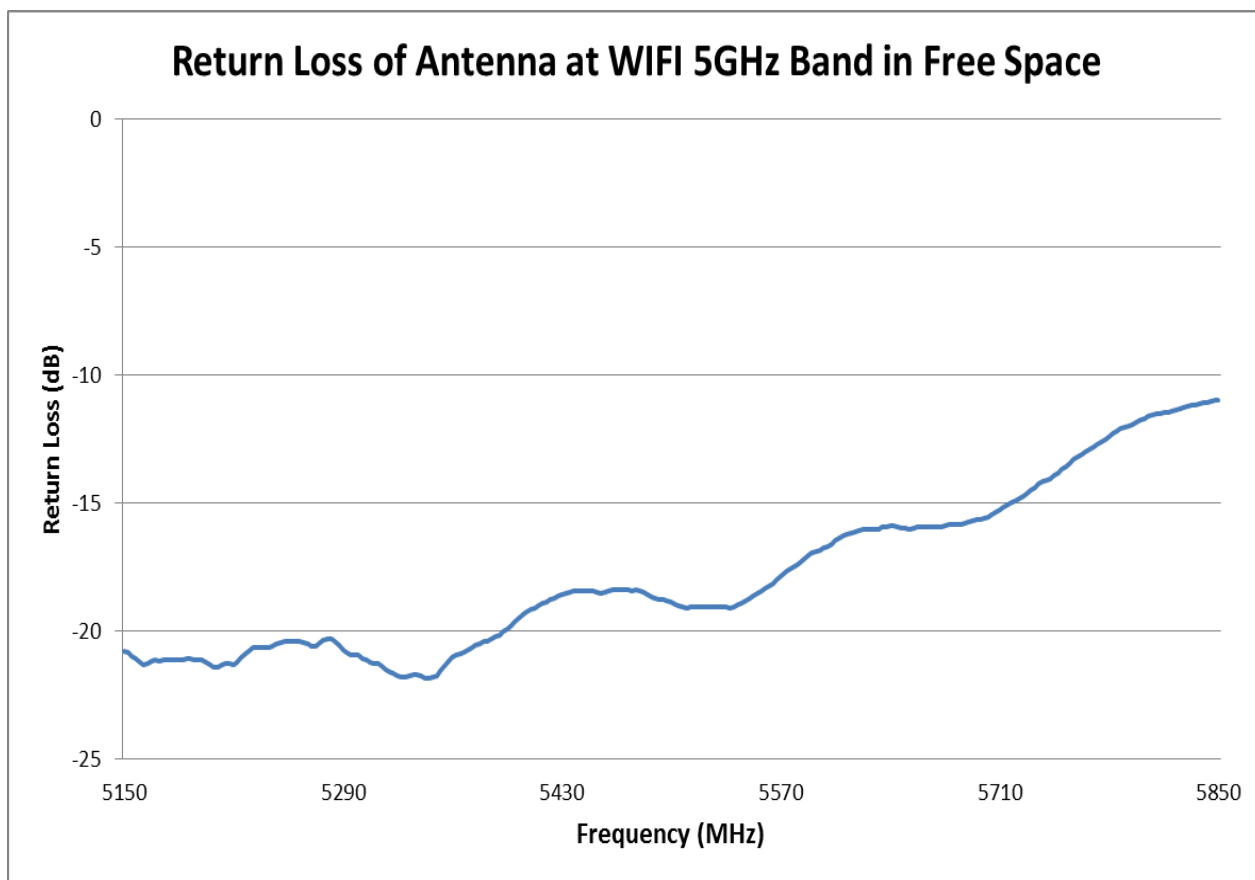


FIGURE 4.3.2 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24



APPLICATION SPECIFICATION

4.4 EFFICIENCY PLOT

All measurements in this document are done with a cable length of 250mm

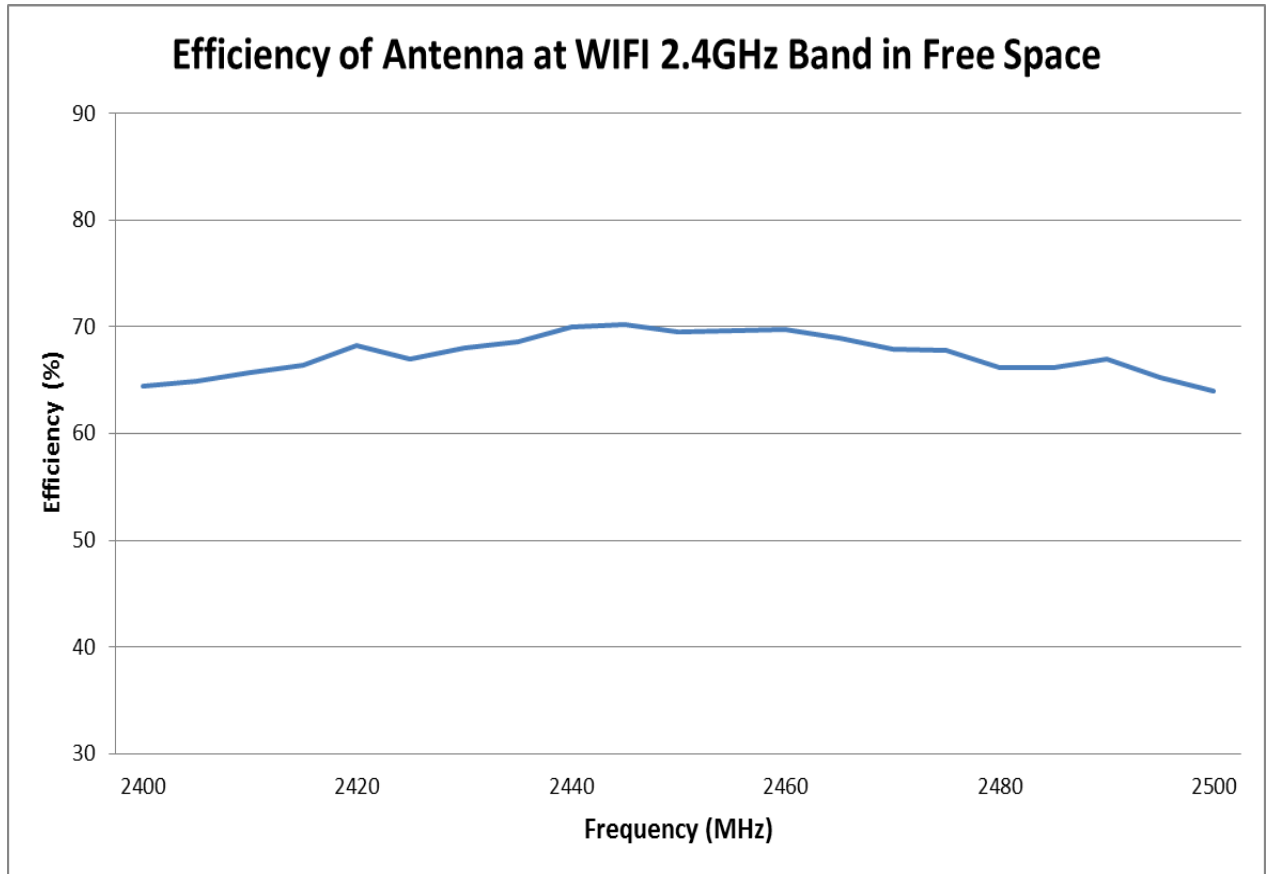


FIGURE 4.4.1 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND IN FREE SPACE

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

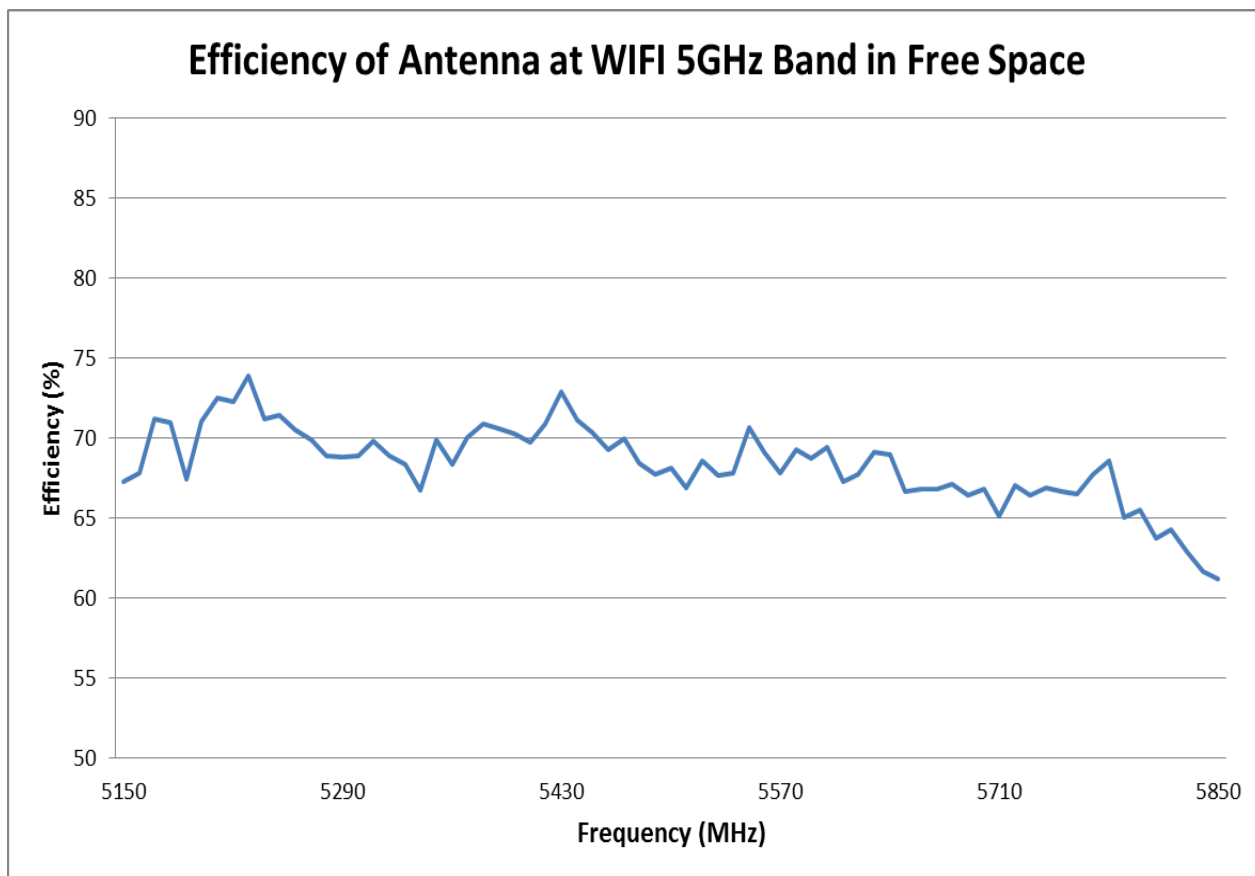


FIGURE 4.4.2 EFFICIENCY OF ANTENNA AT WIFI 5GHZ BAND IN FREE SPACE

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24	



APPLICATION SPECIFICATION

4.5 RADIATION PATTERN


All measurements in this document are done with a cable length of 250mm.

FIGURE 4.5.1 2D RADIATION PATTERN OF ANTENNA AT 2.44GHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

X

0

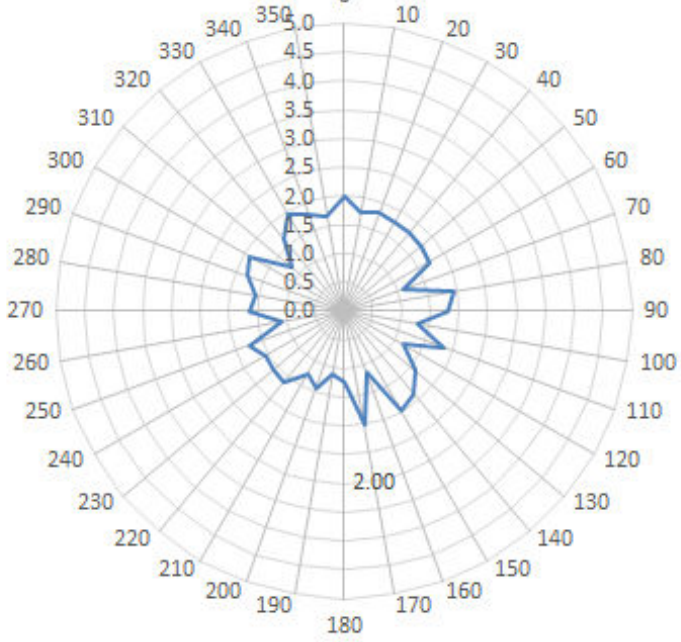

Z

0

10

20

30

40

50

60

70

80

90

100

110

120

130

140

150

160

170

180

190

200

210

220

230

240

250

260

270

280

290

300

310

320

330

340

350

360

370

380

390

400

410

420

430

440

450

460

470

480

490

500

510

520

530

540

550

560

570

580

590

600

610

620

630

640

650

660

670

680

690

700

710

720

730

740

750

760

770

780

790

800

810

820

830

840

850

860

870

880

890

900

910

920

930

940

950

960

970

980

990

1000

1010

1020

1030

1040

1050

1060

1070

1080

1090

1100

1110

1120

1130

1140

1150

1160

1170

1180

1190

1200

1210

1220

1230

1240

1250

1260

1270

1280

1290

1300

1310

1320

1330

1340

1350

1360

1370

1380

1390

1400

1410

1420

1430

1440

1450

1460

1470

1480

1490

1500

1510

1520

1530

1540

1550

1560

1570

1580

1590

1600

1610

1620

1630

1640

1650

1660

1670

1680

1690

1700

1710

1720

1730

1740

1750

1760

1770

1780

1790

1800

1810

1820

1830

1840

1850

1860

1870

1880

1890

1900

1910

1920

1930

1940

1950

1960

1970

1980

1990

2000

2010

2020

2030

2040

2050

2060

2070

2080

2090

2100

2110

2120

2130

2140

2150

2160

2170

2180

2190

2200

2210

2220

2230

2240

2250

2260

2270

2280

2290

2300

2310

2320

2330

2340

2350

2360

2370

2380

2390

2400

2410

2420

2430

2440

2450

2460

2470

2480

2490

2500

2510

2520

2530

2540

2550

2560

2570

2580

2590

2600

2610

2620

2630

2640

2650

2660

2670

2680

2690

2700

2710

2720

2730

2740

2750

2760

2770

2780

2790

2800

2810

2820

2830

2840

2850

2860

2870

2880

2890

2900

2910

2920

2930

2940

2950

2960

2970

2980

2990

3000

3010

3020

3030

3040

3050

3060

3070

3080

3090

3100

3110

3120

3130

3140

3150

3160

3170

3180

3190



APPLICATION SPECIFICATION

FIGURE 4.5.2 2D RADIATION PATTERN OF ANTENNA AT 5.80GHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

X

0

10
20

30

40

50

60

70

80

90

100

110

120

130

140

150

160

170

180

190

200

210

220

230

240

250

260

270

280

300

310

320

330

340

350

360

1.0

2.0

3.0

4.0

5.0

-1.0

-2.0

-3.0

-4.0

-5.0

Y

0

1.0

2.0

3.0

4.0

5.0

-1.0

-2.0

-3.0

-4.0

-5.0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90

80

70

60

50

40

30

20

10

0

350

340

330

320

310

300

290

280

270

260

250

240

230

220

210

200

190

180

170

160

150

140

130

120

110

100

90


80

70

60

Z

0

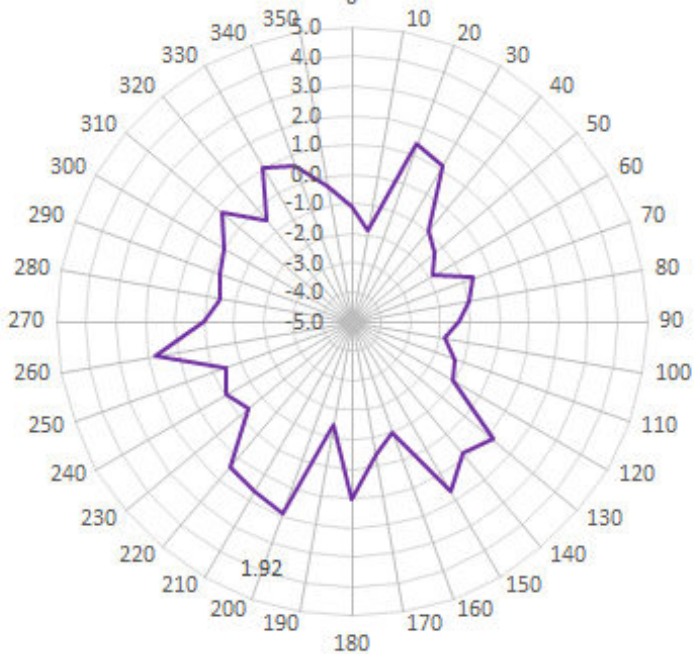

5.0 ASSEMBLY GUIDELINE

The flex antenna comes with an adhesive 3M9077 for assemble onto the plastic wall of the system. The surface should be smooth with $Ra < 1.6\mu m$, and need to clean the surface before sticking this product. The antenna cannot be placed on a metallic surface.

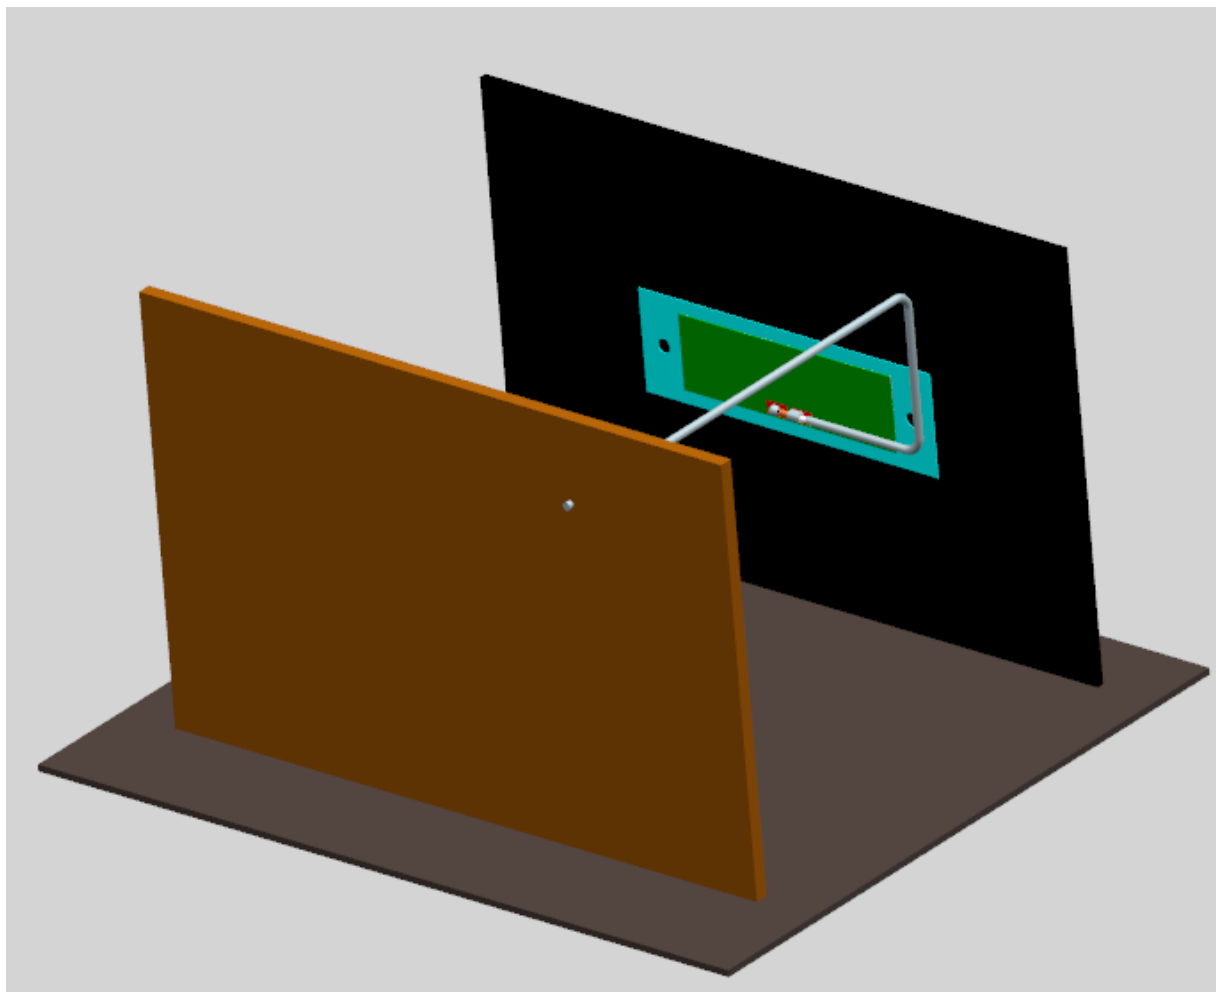


FIGURE 5.1 ASSEMBLY GUIDELINE

During the assembly of the antenna in a device, the cable needs to be positioned away from the antenna flex to achieve best performance. The cable must be away from the pattern at least 5mm as shown in figure 5.2. If the cable crosses into the antenna flex, the antenna performance will be degraded.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

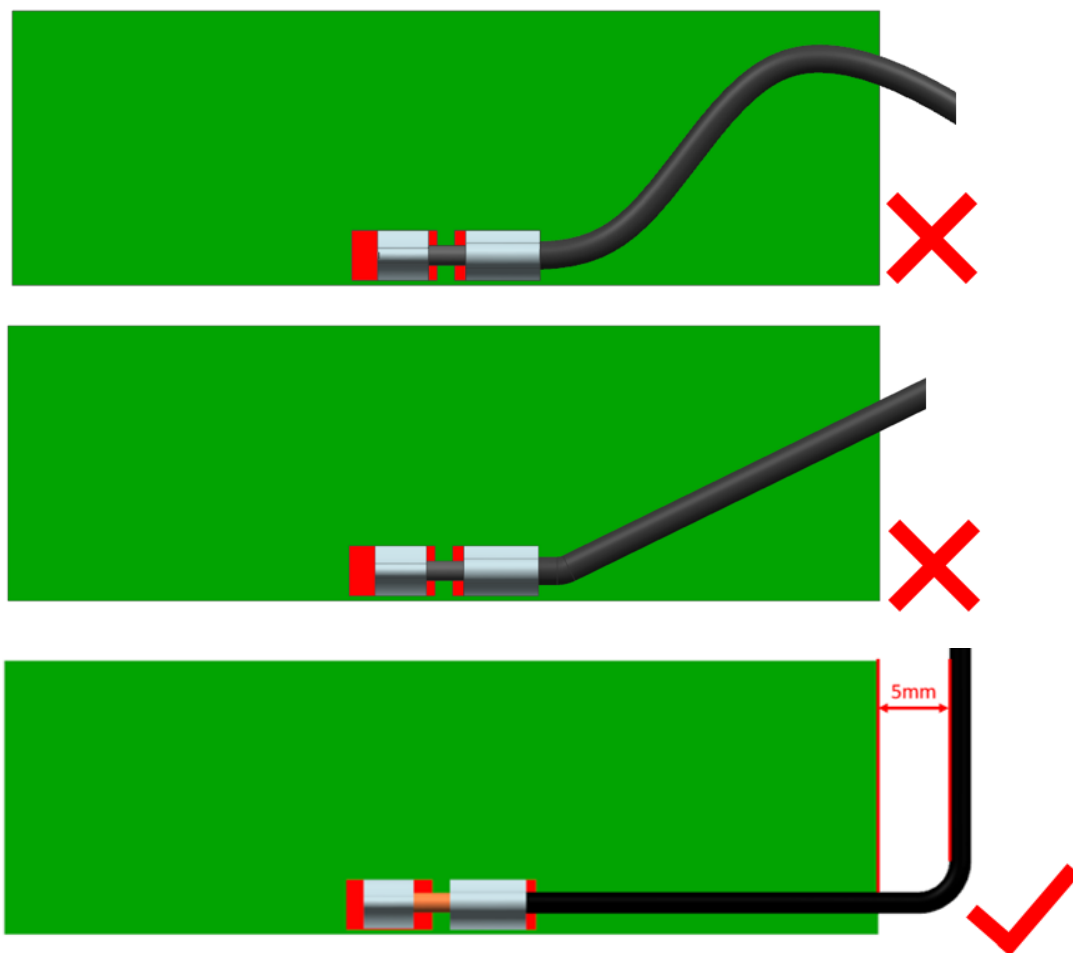


FIGURE 5.2 CABLE BENDING

6.0 THE ANTENNA PERFORMANCE VARIATION WITH CABLE LENGTH

6.1 CABLE LOSS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENTS	
	Frequency Range	2.4GHz/5GHz	2GHz~3GHz	5GHz~6.0GHz
6.1.1	Attenuation	1m cable measured by VNA5071C	$\leq 3.5\text{dB/m}$	$\leq 5\text{dB/m}$

REVISION:	ECR/ECN INFORMATION:	TITLE:			SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE			
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
AS-2042810300		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24	



APPLICATION SPECIFICATION

6.2 CABLE LENGTH AFFECT THE ANTENNA PERFORMANCE

Balance antenna resonance is insensitive by cable's length, but the cable's loss will affect the total efficiency. Refer to 6.1.1.

6.3 FOR EXAMPLE

	250mm cable		
Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Cable Loss
	X		X-LOSS=Y
2400	1.91	64.44	0.2m*3.5dB/m
2420	1.96	68.21	
2440	2.00	69.92	
2460	1.85	69.74	
2480	1.79	66.18	
2500	1.94	64.02	
5150	2.99	67.25	0.2m*5dB/m
5200	3.08	71.00	
5250	3.12	71.40	
5300	2.98	68.86	
5350	3.08	69.89	
5400	3.01	70.30	
5450	2.82	70.32	
5500	2.67	68.08	
5550	2.51	70.63	
5600	2.95	69.40	
5650	2.76	66.66	
5700	2.75	66.78	
5750	2.76	66.67	
5800	3.30	65.48	
5850	2.63	61.21	

- The data is just for your reference, all accurate performance should be according to the test results in the OTA chamber.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

7.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

7.1 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATIONS WITH PARALLEL PLANE GROUND

Antenna performance will be degraded if the antenna is placed too close to a ground plane. Four locations from 5mm, 10mm, 15mm and 20mm with a parallel plane ground have been evaluated. The locations are shown in figure 7.1.1. The plane ground size is 90mm*90mm. The antenna performance is better with larger distance between antenna and parallel plane ground. The minimum distance between antenna and plane ground is recommended to be at least 15mm to achieve acceptable RF performance.

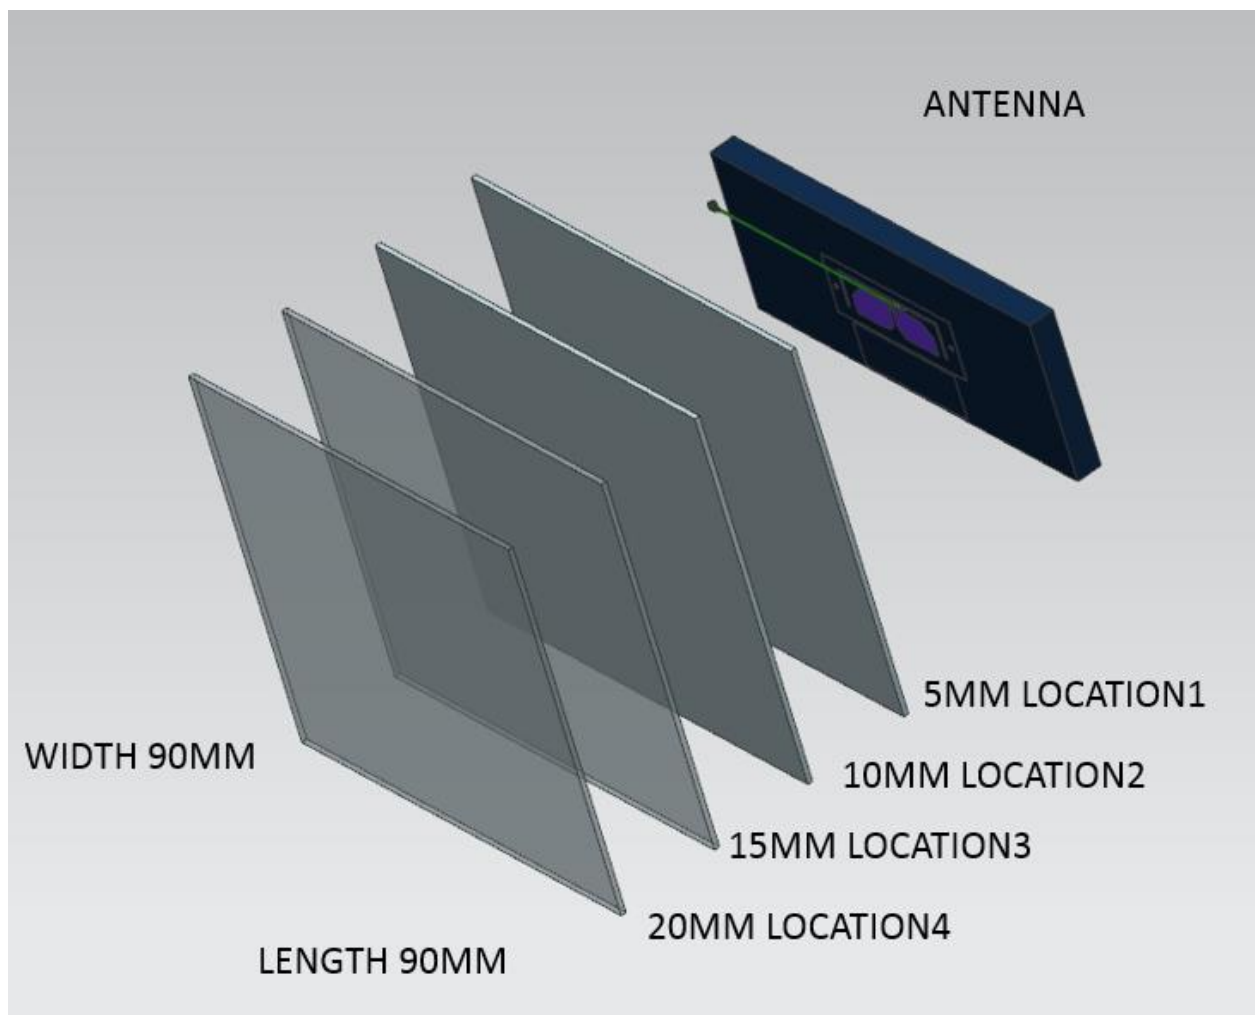


FIGURE 7.1.1 FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

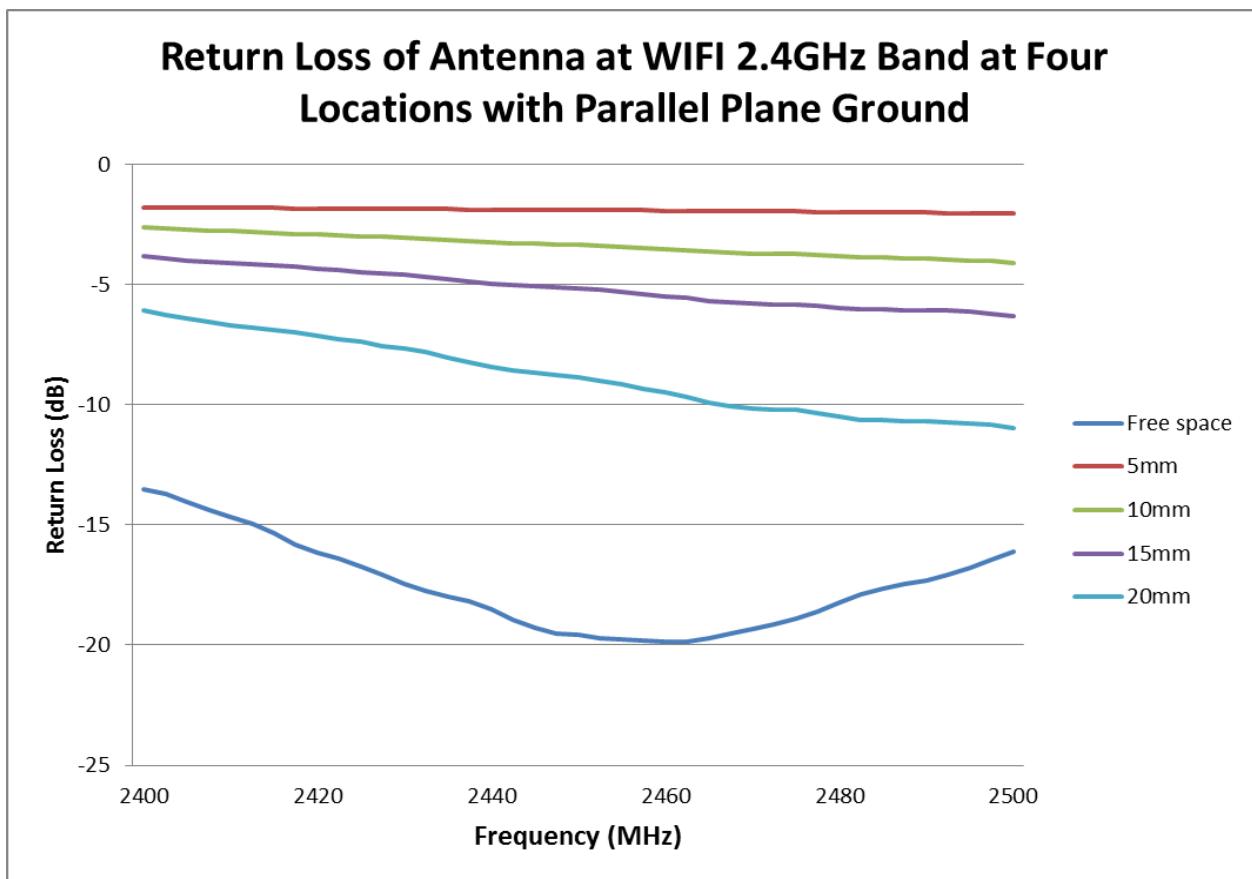


FIGURE 7.1.2 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

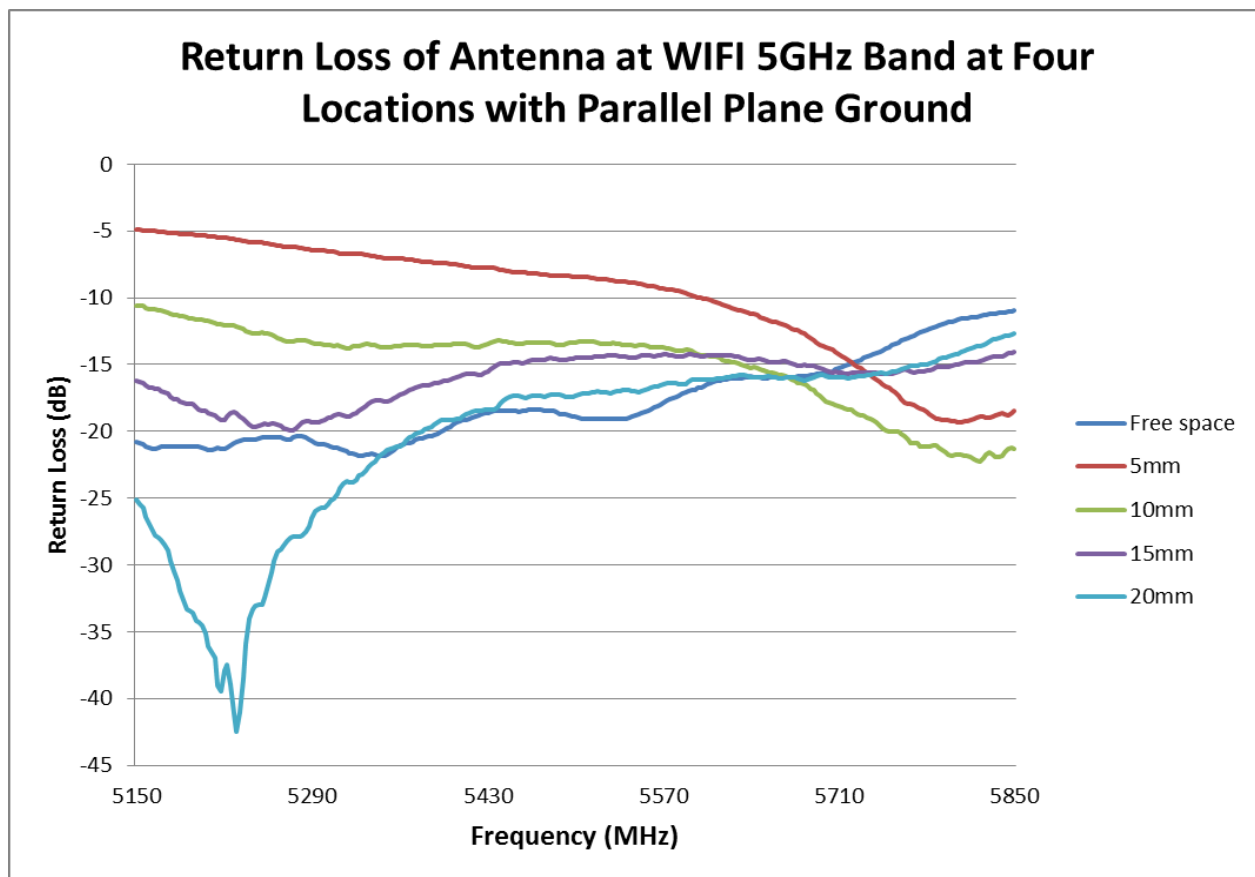


FIGURE 7.1.3 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

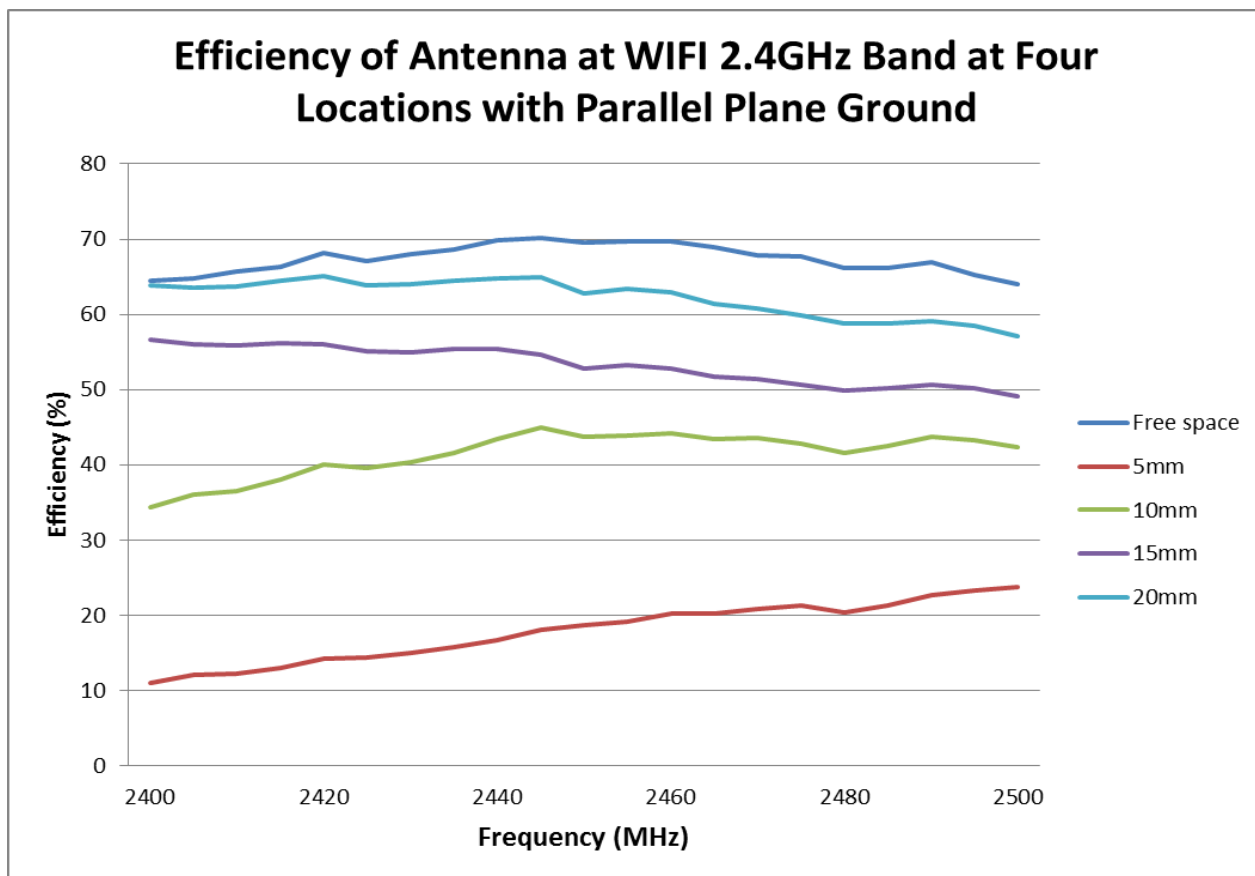


FIGURE 7.1.4 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

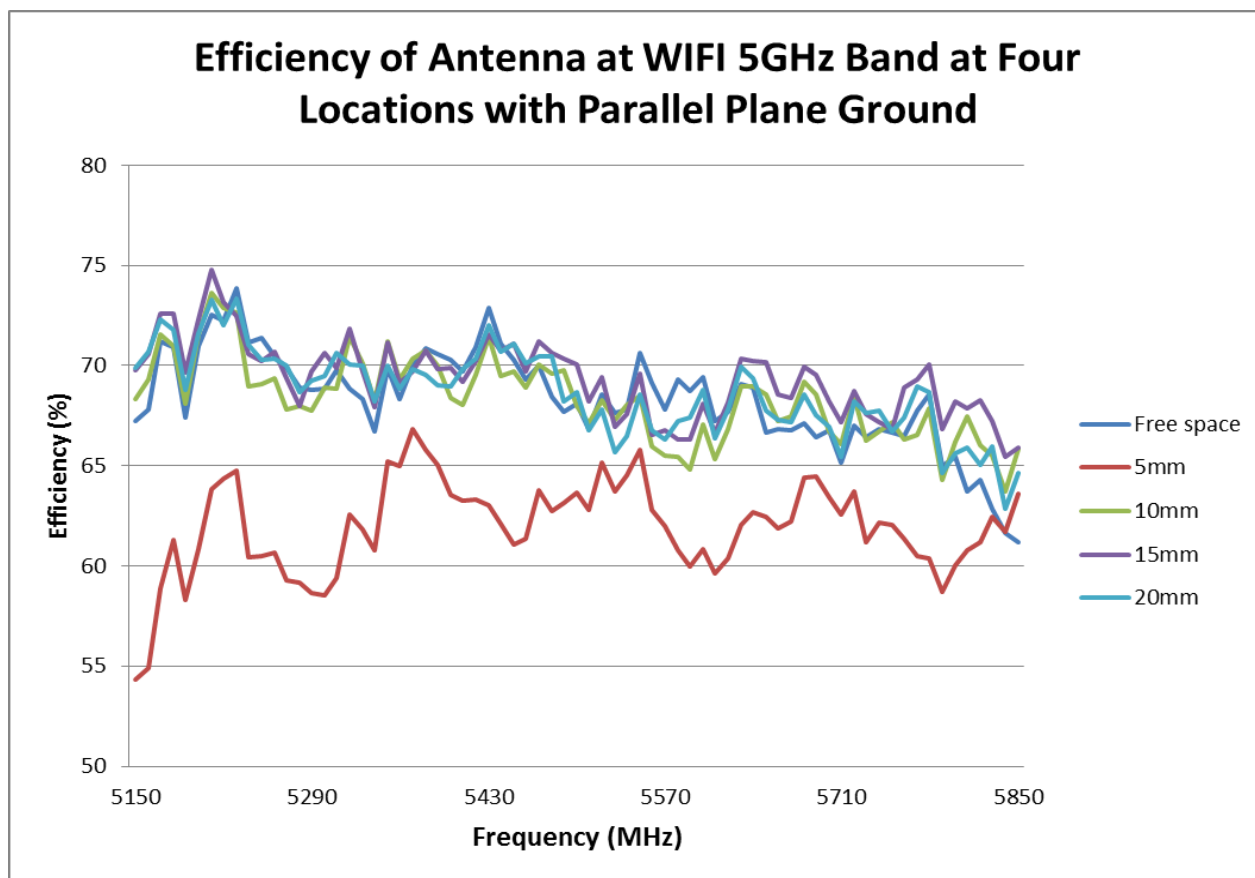


FIGURE 7.1.5 EFFICIENCY OF ANTENNA AT WIFI 5GHz BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

7.2 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATIONS WITH VERTICAL PLANE GROUND

Antenna performance will be degraded if the antenna is placed too close to a ground plane. Four locations of 5mm, 10mm, 15mm and 20mm away from the vertical plane ground have been evaluated. These locations are shown in figure 7.2.1. The plane ground size is 90mm*90mm. The antenna performance is better with larger distance between antenna and vertical plane ground. The minimum distance between antenna and plane ground is recommended to be at least 10mm to achieve acceptable RF performance.

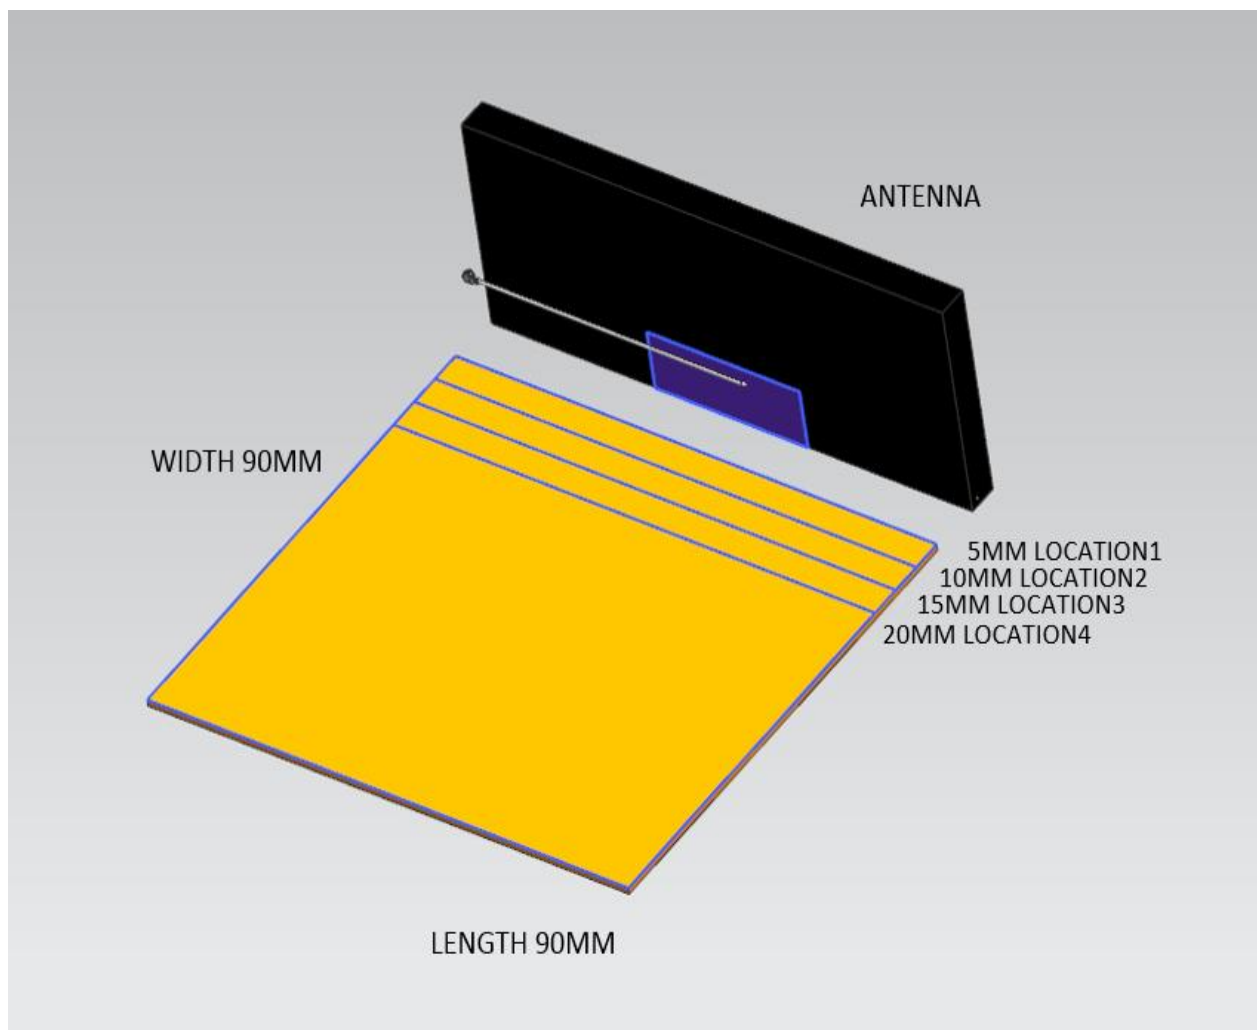


FIGURE 7.2.1 FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24



APPLICATION SPECIFICATION

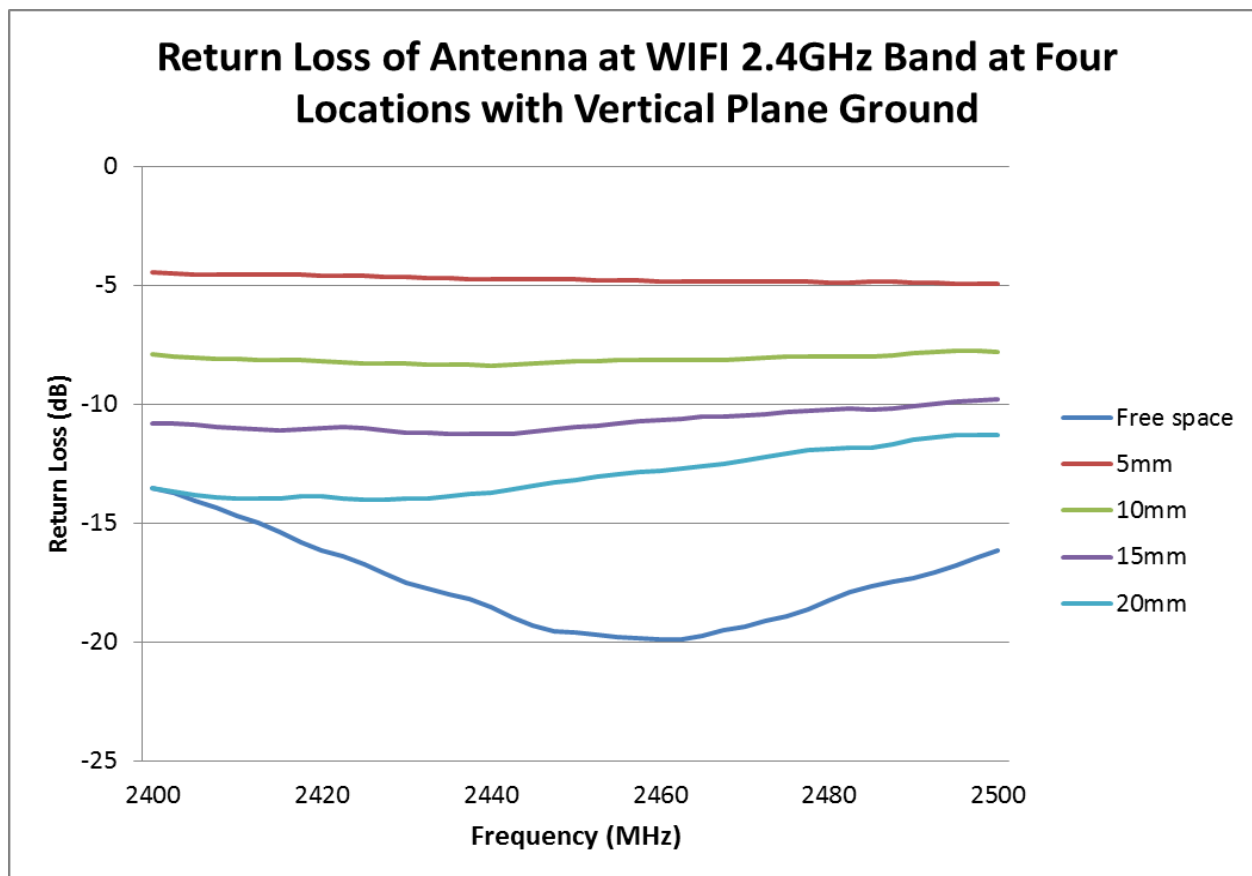


FIGURE 7.2.2 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24	

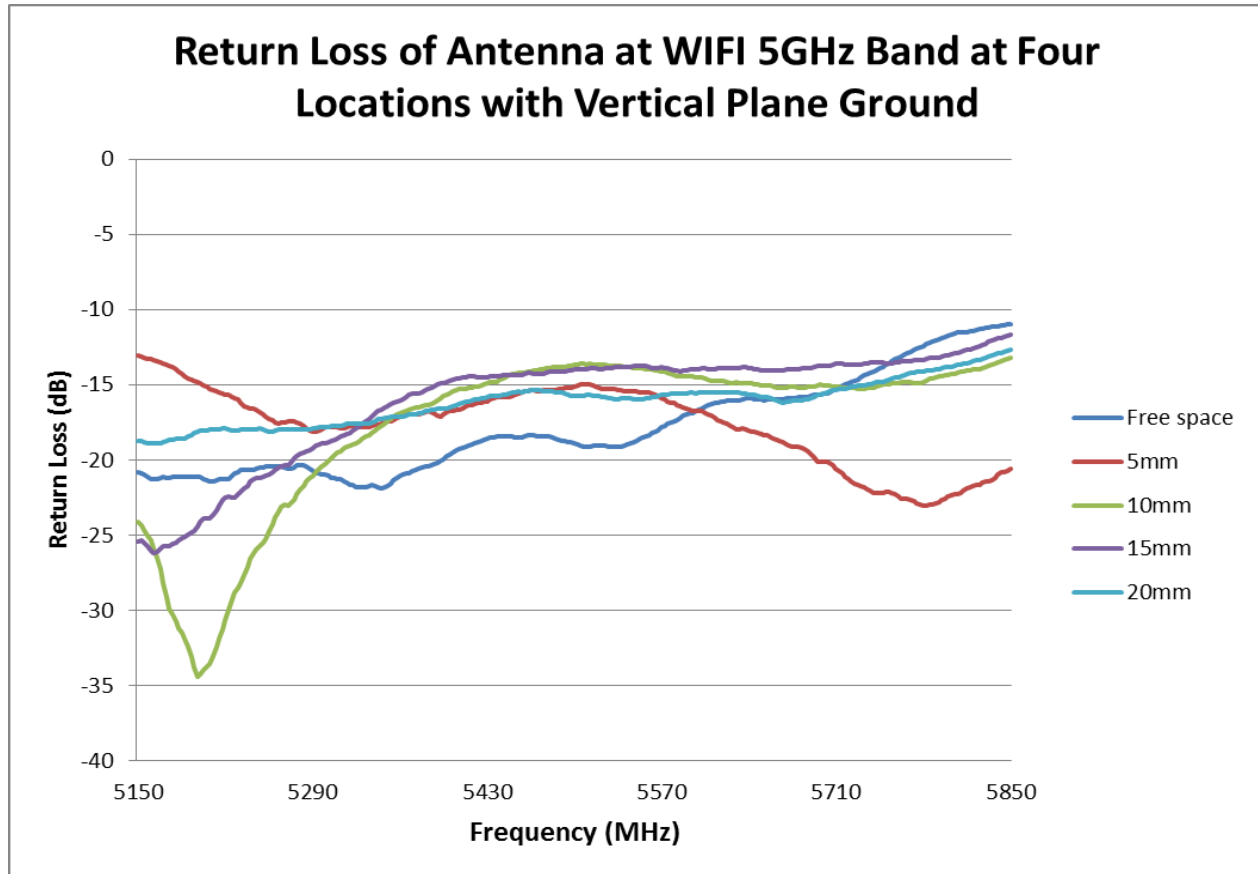


FIGURE 7.2.3 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

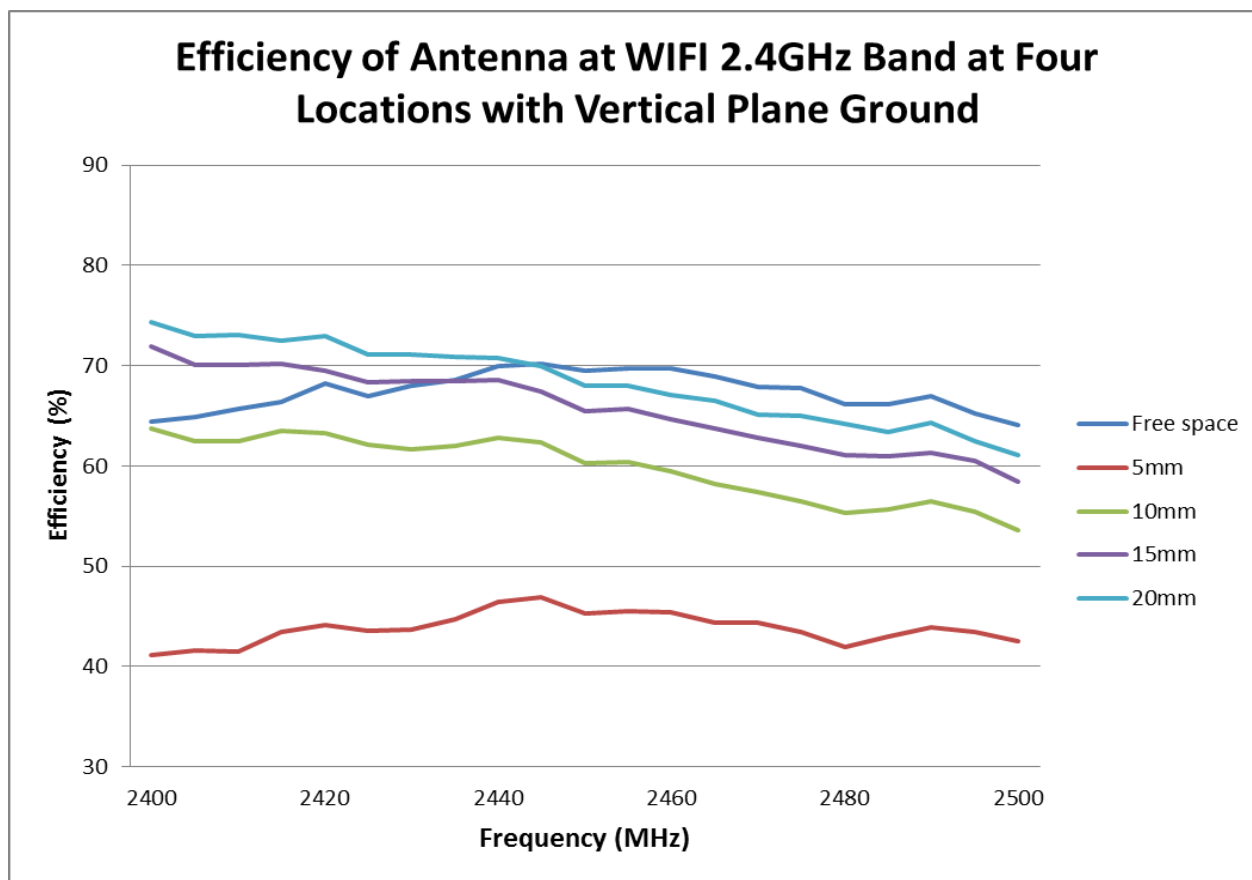


FIGURE 7.2.4 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No.
DOCUMENT NUMBER: AS-2042810300	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

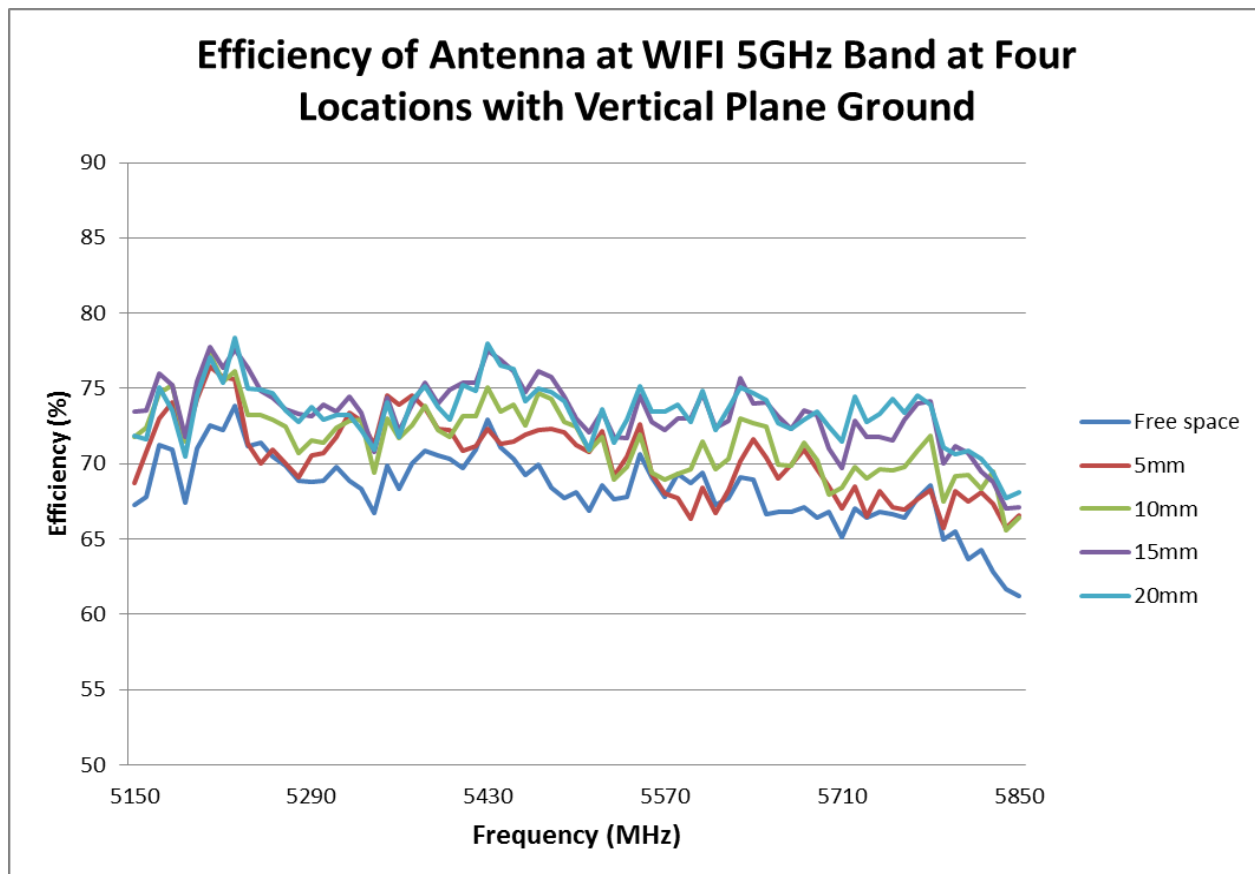


FIGURE 7.2.5 EFFICIENCY OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

7.3 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT DISTANCES WITH PARALLEL PLANE GROUND

Antenna performance will be degraded if the antenna is placed too close to a ground plane. Four locations 5mm,10mm,15mm and 20mm from a parallel plane ground have been evaluated. These locations are shown in figure 7.3.1. The plane ground size is 90mm*90mm. The antenna performance is better with larger distance between the antenna and the parallel plane ground. The minimum distance between the antenna and the plane ground is recommended to be at least 10mm to achieve acceptable RF performance.

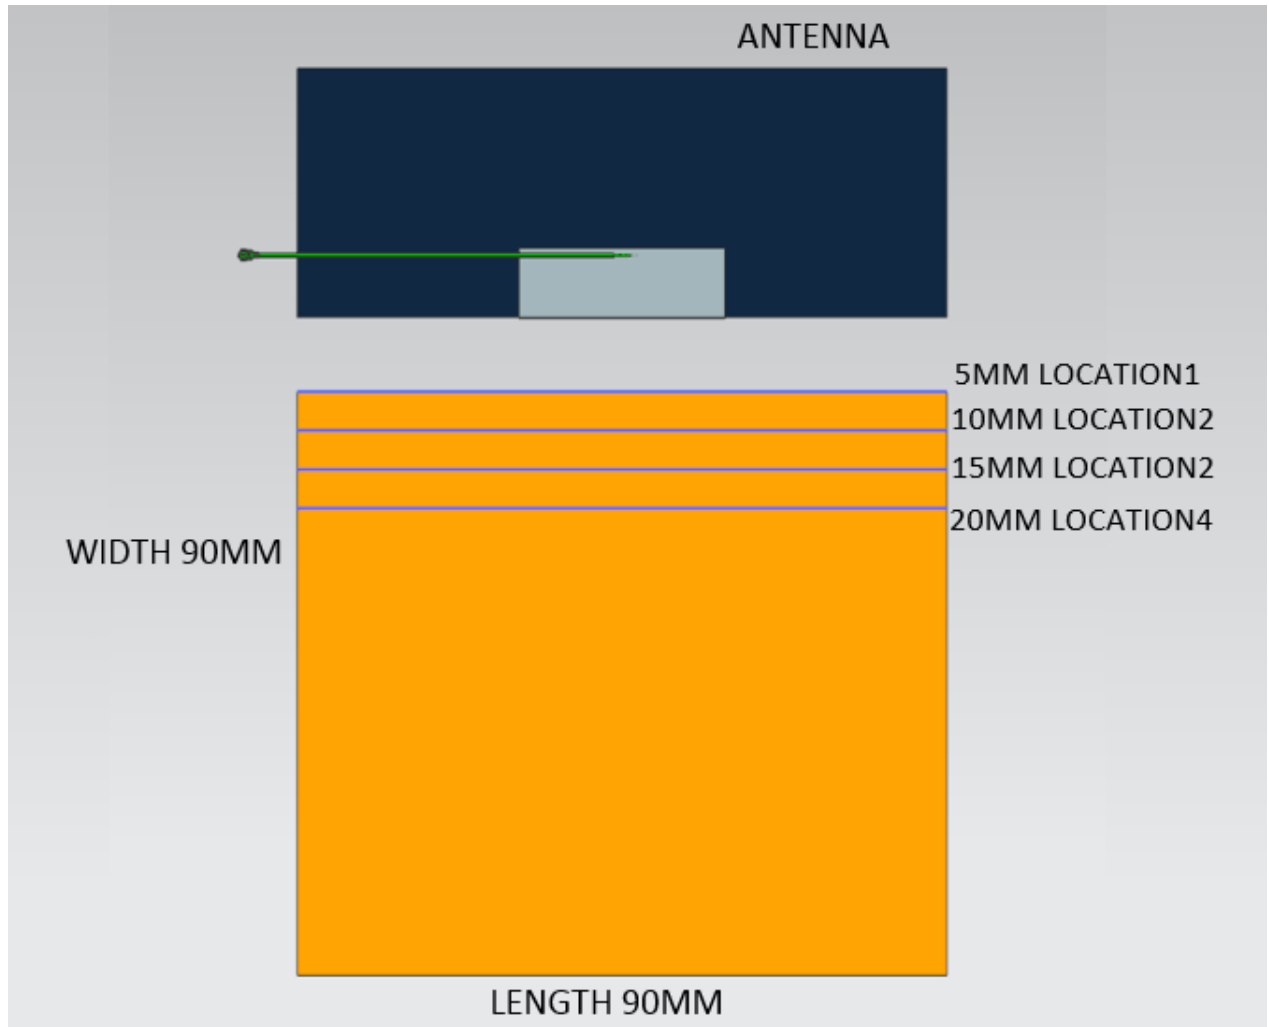


FIGURE 7.3.1 FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

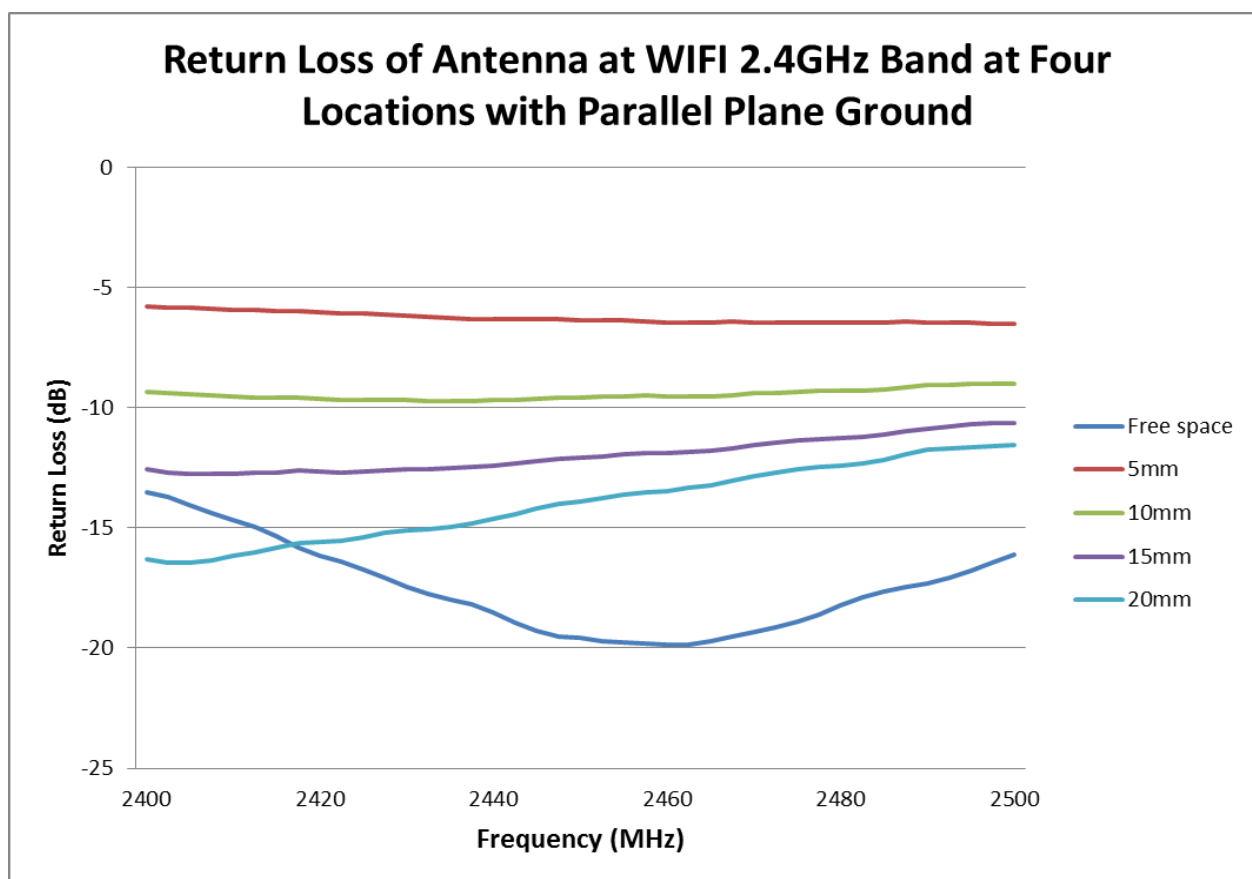


FIGURE 7.3.2 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

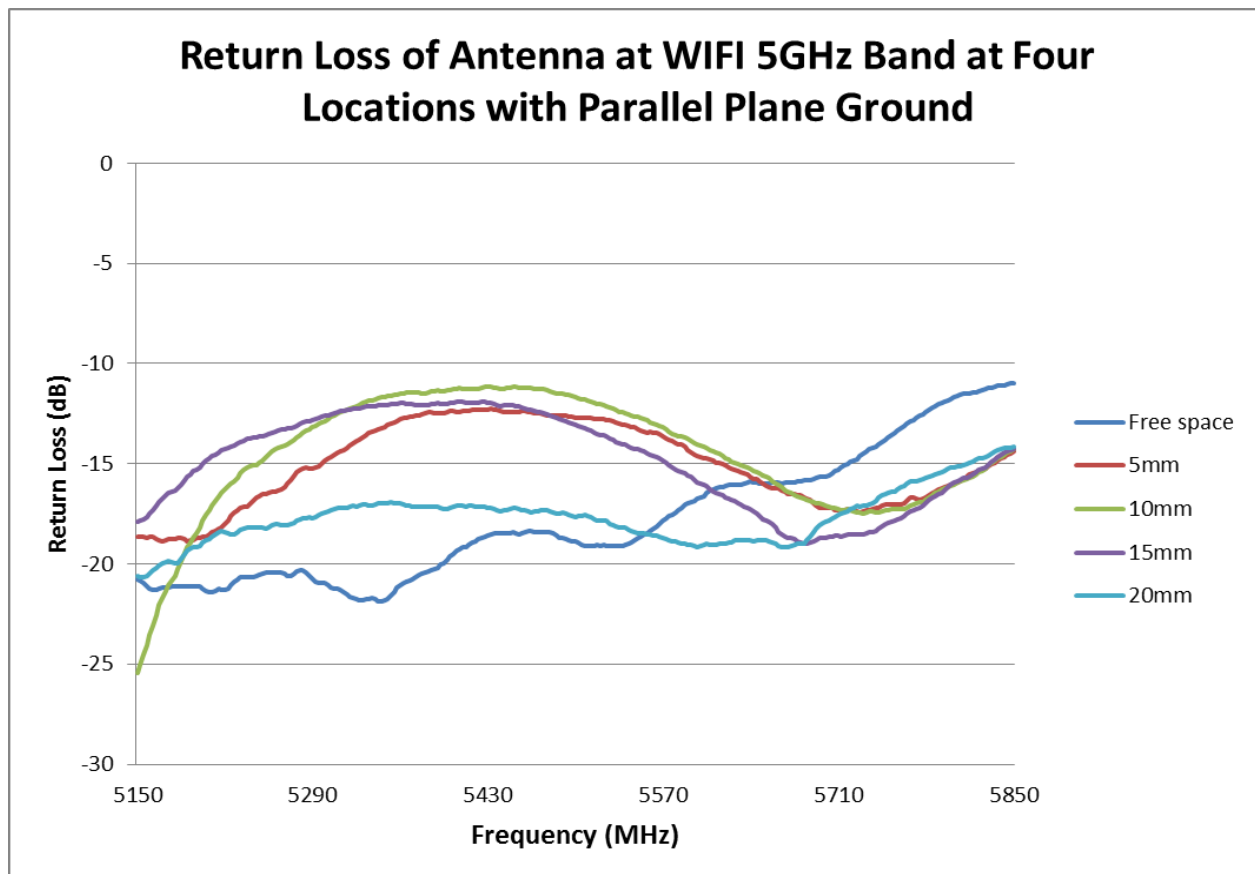


FIGURE 7.3.3 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

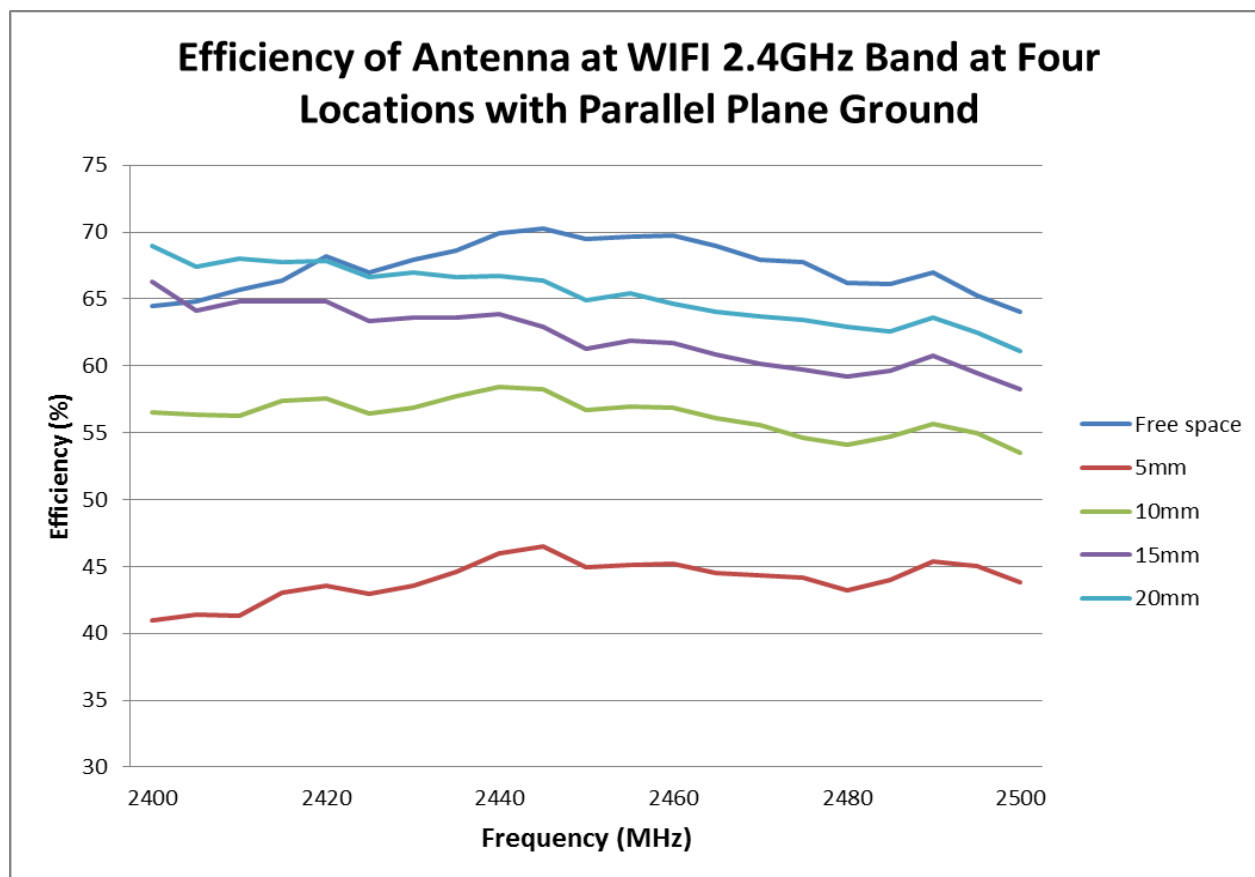


FIGURE 7.3.4 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24	

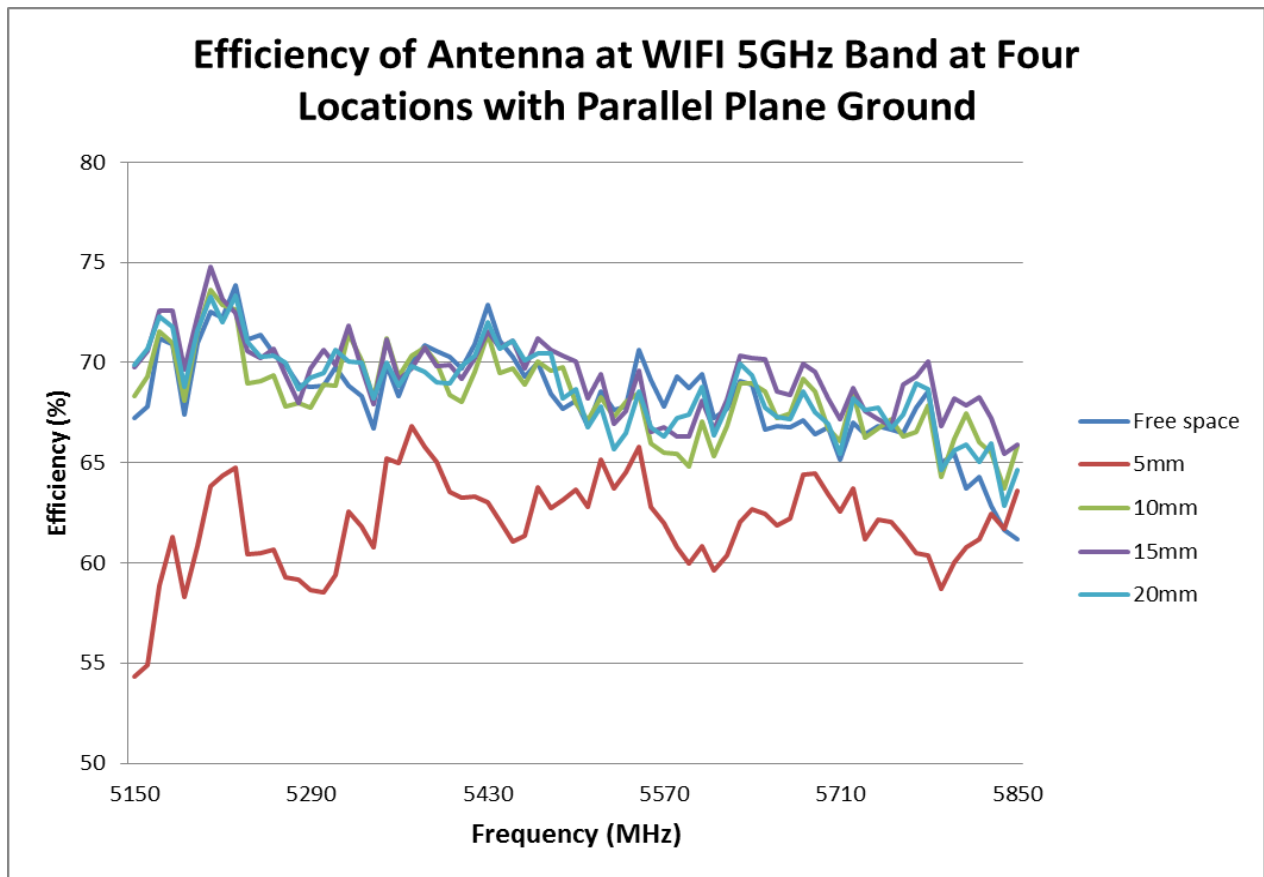


FIGURE 7.3.5 EFFICIENCY OF ANTENNA AT WIFI 5GHz BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810300	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24