

RADIO TEST REPORT

REPORT NUMBER: M2110003-9

**TEST STANDARD: FCC PART 15 SUBPART C
SECTION 15.247
ISED RSS-247 SECTION 5.0**

CLIENT: NEOZ LIGHTING

**DEVICE: U-BLOX BLUETOOTH LOW
ENERGY MODULE**

MODEL: NINA-B111

FCC ID: XPYNINAB1

IC: 8595A-NINAB1

DATE OF ISSUE: 20 DECEMBER 2021

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.

REVISION TABLE

Version	Sec/Para Changed	Changes Made	Date
1		Initial issue of document	20/12/2021



Accreditation No.5292

This document shall not be reproduced except in full.

CONTENTS

1	Test Summary	6
2	Test Facility	6
2.1	General	6
2.2	Test Laboratory/Accreditations.....	6
3	Test Equipment Calibration.....	7
4	Measurement Uncertainty	7
5	Device Details.....	8
5.1	EUT (Transmitter) Details	8
5.2	EUT (Host) Details	8
5.3	Test Configuration.....	8
5.4	Modifications	8
5.5	Deviations from the Standard.....	8
6	Results	9
6.1	§15.203/ RSS-Gen 6.8 Antenna Requirement	9
6.2	§15.247(d)/ RSS-247 5.5 Out-of-Band/Spurious Emissions	9
6.2.1	Test procedure	9
6.2.2	Evaluation of field strength	9
6.2.3	Limits.....	10
6.2.4	Transmitter Spurious Emissions: 9 kHz to 30 MHz	10
6.2.5	Transmitter Spurious Emissions: 30 - 1000 MHz.....	12
6.2.6	Transmitter Spurious Emissions: 1 - 18 GHz	13
6.2.7	Transmitter Spurious Emissions: 18 – 26 GHz.....	16
6.3	§15.247(d)/ §RSS-247 5.5 Band Edge Emission Measurements	19

GRAPHS

Graph 6-1: Transmitter Spurious Emissions, 9 kHz – 30 MHz, 2402 MHz	10
Graph 6-2: Transmitter Spurious Emissions, 9 kHz – 30 MHz, 2440 MHz	11
Graph 6-3: Transmitter Spurious Emissions, 9 kHz – 30 MHz, 2480 MHz	11
Graph 6-4: Transmitter Spurious Emissions, 30 – 1000 MHz, 2402 MHz	12
Graph 6-5: Transmitter Spurious Emissions, 30 – 1000 MHz, 2440 MHz	12
Graph 6-6: Transmitter Spurious Emissions, 30 – 1000 MHz, 2480 MHz	13
Graph 6-7: Transmitter Spurious Emissions, 1 – 18 GHz, 2402 MHz, Peak	13
Graph 6-8: Transmitter Spurious Emissions, 1 – 18 GHz, 2440 MHz, Peak	14
Graph 6-9: Transmitter Spurious Emissions, 1 – 18 GHz, 2480 MHz, Peak	14
Graph 6-10: Transmitter Spurious Emissions, 1 – 18 GHz, 2402 MHz, Average	15
Graph 6-11: Transmitter Spurious Emissions, 1 – 18 GHz, 2440 MHz, Average	15
Graph 6-12: Transmitter Spurious Emissions, 1 – 18 GHz, 2480 MHz, Average	16
Graph 6-13: Transmitter Spurious Emissions, 18 – 26 GHz, 2402 MHz, Peak	16
Graph 6-14: Transmitter Spurious Emissions, 18 – 26 GHz, 2440 MHz, Peak	17
Graph 6-15: Transmitter Spurious Emissions, 18 – 26 GHz, 2480 MHz, Peak	17
Graph 6-16: Transmitter Spurious Emissions, 18 – 26 GHz, 2402 MHz, Average	18
Graph 6-17: Transmitter Spurious Emissions, 18 – 26 GHz, 2440 MHz, Average	18
Graph 6-18: Transmitter Spurious Emissions, 18 – 26 GHz, 2480 MHz, Average	19
Graph 6-19: Lower Band-edge	19
Graph 6-20: Upper Band-edge, Peak	20
Graph 6-21: Upper Band-edge, Average	20

TABLES

Table 6-1: Transmitter Spurious Emissions, 30 – 1000 MHz, 2440 MHz	12
Table 6-2: Lower Band-edge	20
Table 6-3: Upper Band-edge	21

TEST CERTIFICATE

Radio Module: u-blox Bluetooth Low Energy module (Model: NINA-B111)
FCC ID: XPYNINAB1
IC: 8595A-NINAB1
Manufacturer: u-blox AG

Host Device: NEOZ LAMP CONTROL SYSTEM
Manufacturer: Neoz Lighting

Tested for: Neoz Lighting
Address: 20 Tepko Rd, Terrey Hills NSW 2084
Contact: James Assadi
Phone Number: 0413333454
Email: James@entroniQ.com


Standard: FCC Part 15, Subpart C, Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ISED RSS-247, Issue 2, Section 5 Standard specifications for frequency hopping systems and digital transmission systems operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Result: The u-blox Bluetooth Low Energy module (Model: NINA-B111) complied with the applicable requirements above standards. Refer to Report M2110003-9 for full details.

Test Date: 15 -17 November 2021

Issue Date: 20 December 2021

Test Engineer: 
Ian Paul Ng

Attestation: *I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.*

Authorised Signatory: 
Wilson Xiao
Lead Engineer - Radio

Issued by: EMC Technologies Pty. Ltd.,
176 Harrick Road, Keilor Park, VIC, 3042, Australia.

Phone: +61 3 9365 1000

E-mail: emc-general@emctech.com.au

Web: www.emctech.com.au



Accreditation No.5292

This document shall not be reproduced except in full.

RADIO TEST REPORT

1 TEST SUMMARY

Sec.	Description	FCC	ISED	Result(s)
6.1	Antenna Requirement	§15.203	RSS-Gen 6.8	Complied
6.2	Out-of-Band/Spurious Emissions	§15.247(d)	RSS-247 5.5	Complied
6.3	Band-Edge Emission Measurements	§15.247(d)	RSS-247 5.5	Complied

2 TEST FACILITY

2.1 General

EMC Technologies Pty Ltd is accredited by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies Pty Ltd has also been designated as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 and 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies Pty Ltd is also an ISED Canada recognized testing laboratory – **ISED company number: 3569B and CAB identifier number: AU0001.**

2.2 Test Laboratory/Accreditations

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system similar to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation to ISO 17025 for both testing and calibration and ISO 17020 for Inspection – **Accreditation Number 5292.**

The current full scope of accreditation can be found on the NATA website: www.nata.com.au



Accreditation No.5292

This document shall not be reproduced except in full.

3 TEST EQUIPMENT CALIBRATION

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Keysight Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI) or in-house. All equipment calibration is traceable to Australian national standards at the National Measurements Institute.

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yyyy	Due Date dd/mm/yyyy	Cal. Interval
Chamber	Frankonia SAC-3-2 (R-144)	10/08/2020	10/08/2023	3 Year ^{*1}
EMI Receiver	R&S ESW26 Sn: 101306 (R-143)	21/06/2021	21/06/2022	1 Year ^{*2}
Antennas	EMCO 6502 Active Loop Antenna Sn: 2021 (A-310)	31/08/2020	31/08/2022	2 Year ^{*2}
	SUNOL JB1 Sn: A052518 (A-434)	13/11/2020	13/11/2022	2 Year ^{*2}
	Com-Power AH-118 Horn Antenna Sn: 71168 (A-333)	16/01/2019	16/01/2022	3 Year ^{*1}
	ETS-Lindgren 3160-09 Horn Antenna Sn:66032 (A307)	30/04/2021	30/04/2024	3 Year ^{*1}
Cables ^{*3}	Huber & Suhner Sucoflex 104A Sn: 503055 (C-457)	05/01/2021	05/01/2022	1 Year ^{*1}
	Huber & Suhner Sucoflex 104A Sn: 800448 (C-520)	05/01/2021	05/01/2022	1 Year ^{*1}
	Huber & Suhner Sucoflex 104A Sn: 27319 (C-273)	06/01/2021	06/01/2022	1 Year ^{*1}

Note *1. Internal NATA calibration.

Note *2. External NATA / A2LA calibration.

Note *3. Cables are verified before measurements are taken.

4 MEASUREMENT UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

Radiated Emissions:	9 kHz to 30 MHz	±4.1 dB
	30 MHz to 300 MHz	±5.1 dB
	300 MHz to 1000 MHz	±4.7 dB
	1 GHz to 18 GHz	±4.6 dB
	18 GHz to 40 GHz	±4.6 dB
Peak Output Power:		±1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Application of measurement uncertainty for this report:

The referenced uncertainty standard specifies that determination of compliance shall be based on measurements without taking into account measurement instrumentation uncertainty. However, the measurement uncertainty shall appear in the test report.

5 Device Details

(Information supplied by the Client)

The sample is a table-top lamp.

5.1 EUT (Transmitter) Details

Radio:	Bluetooth Low Energy module (U-Blox, Model: NINA-B111)
Frequency Band:	2400 – 2483.5 MHz
Operating Frequency:	Low Channel: 2402 MHz Mid Channel: 2440 MHz High Channel: 2480 MHz
Nominal Bandwidth:	1 MHz
No. of Channels:	40
Modulation:	GFSK
Data Rate:	1 Mbps
Antenna:	Serica 2.4GHz Antenna Part No. SR4W035
Antenna Gain:	3.5 dBi

5.2 EUT (Host) Details

Test Sample:	NEOZ LAMP CONTROL SYSTEM
Serial Number:	422350037; 422350015; 422350017
Power requirements:	NEOZ 18650 Li-ion Rechargeable battery 3500mAh, 12.95Wh

5.3 Test Configuration

Testing was performed with the u-blox Bluetooth Low Energy module set to transmit continuously at Low Channel (2402 MHz), Mid Channel (2440 MHz) and High Channel (2480 MHz) with modulation applied.

5.4 Modifications

No modifications were required to achieve compliance.

5.5 Deviations from the Standard

No deviations from the standard.

6 RESULTS

6.1 §15.203/ RSS-Gen 6.8 Antenna Requirement

Test sample Radio Module incorporates a SMD antennas and cannot be replaced by another type.

Antenna: Serica 2.4 GHz Antenna, Part No. SR4W035

Antenna Type: SMD

Antenna Peak Gain: 3.5 dBi

Connector: Not Applicable

The above installation will prevent any unauthorised switching of antennas.

6.2 §15.247(d)/ RSS-247 5.5 Out-of-Band/Spurious Emissions

6.2.1 Test procedure

Radiated out-of-band/spurious emissions measurements were performed in a semi-anechoic chamber compliant with ANSI C63.4: 2014.

The test frequency range was sub-divided into smaller bands with the defined resolution bandwidths to permit reliable display and identification of emissions.

Frequency range (MHz)	Measurement Bandwidth (kHz)	Measurement Distance (m)	Antenna
0.009 to 0.150	0.2	3	0.6 metre loop antenna
0.150 to 30	9	3	
30 to 1000	120	3	
1000 to 18 000	1000	3	Biconilog hybrid
18 000 to 40 000	1000	1	Standard gain or broadband horn

EUT was set at a height of 0.8 m for measurements below 1000 MHz and set at a height of 1.5 m for measurements above 1000 MHz.

The sample was slowly rotated with the spectrum analyser set to Max-Hold. This was performed for at least two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. For below 1000 MHz the emissions were measured with a Quasi-Peak detector, and for above 1000 MHz the emissions were measured with Peak and Average detectors.

EUT was investigated on all three axes (x, y, and z) with the loop antenna. Measurements on the worst axis are presented below.

The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical polarisations of the measurement antenna.

6.2.2 Evaluation of field strength

Field strengths were calculated automatically by the software using pre-stored calibration data. The method of calculation is shown below:

$$E = V + AF - G + L$$

Where: E = Radiated Field Strength in dBμV/m.

V = EMI Receiver Voltage in dBμV.

AF = Antenna Factor in dB/m (stored as a data array).

G = Preamplifier Gain in dB (stored as a data array).

L = Cable loss in dB (stored as a data array of Insertion Loss versus frequency).

6.2.3 Limits


The limit applied is in accordance with the out-of-band/spurious emissions limit defined in §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The in-band peak PSD in 100 kHz bandwidth were measured on all three channels. The maximum PSD level was used to establish the limit. However, the general limits of §15.209 apply for the restricted bands of operation defined in §15.205.


6.2.4 Transmitter Spurious Emissions: 9 kHz to 30 MHz

All emissions measured in the frequency band 9 kHz – 30 MHz complied with the requirements of the standard.

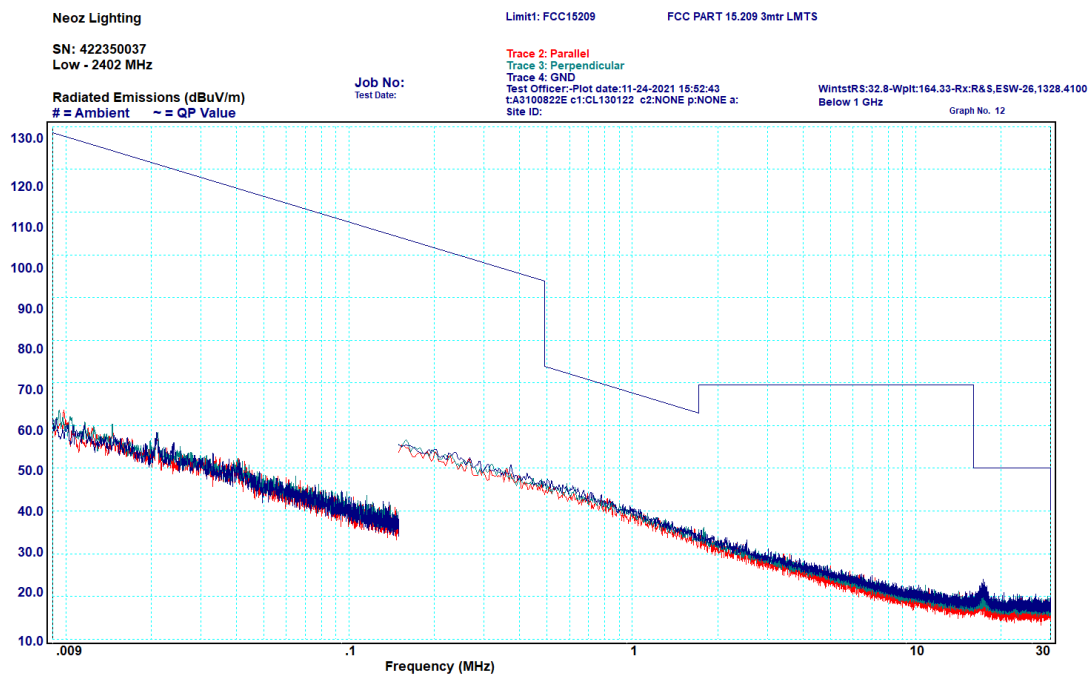


Graph 6-1: Transmitter Spurious Emissions, 9 kHz – 30 MHz, 2402 MHz

No peaks were measured within 10 dB of the limit.

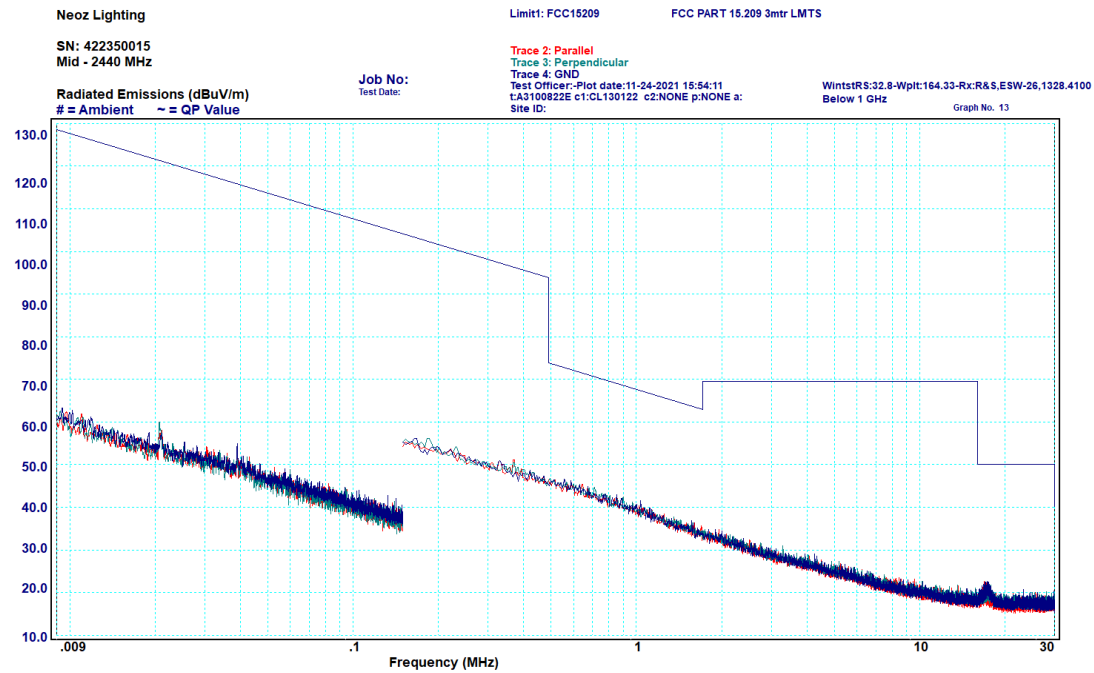

Graph 6-2: Transmitter Spurious Emissions, 9 kHz – 30 MHz, 2440 MHz

No peaks were measured within 10 dB of the limit.

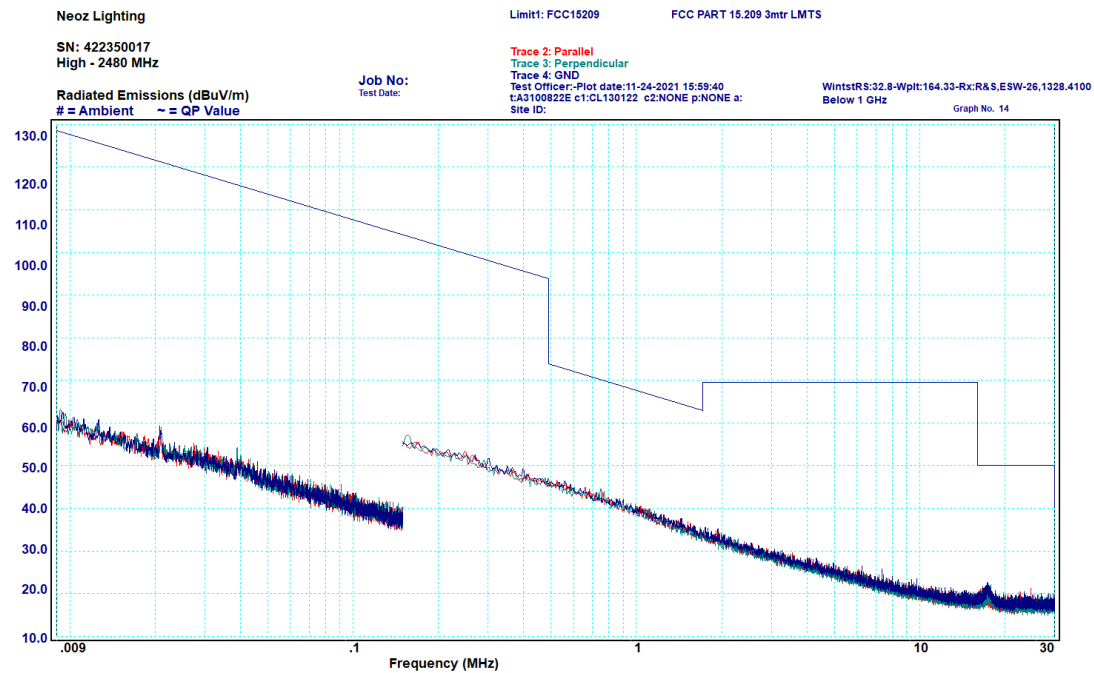


Graph 6-3: Transmitter Spurious Emissions, 9 kHz – 30 MHz, 2480 MHz


No peaks were measured within 10 dB of the limit.

6.2.5 Transmitter Spurious Emissions: 30 - 1000 MHz

All emissions measured in the frequency band 30 – 1000 MHz complied with the requirements of the standard.

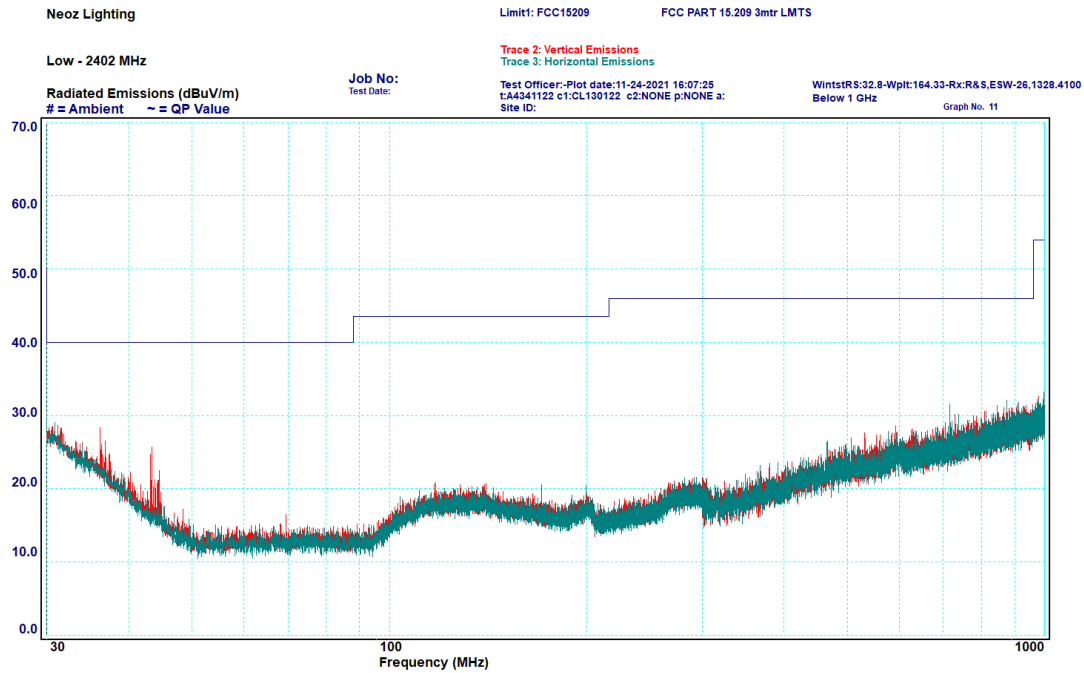


Graph 6-4: Transmitter Spurious Emissions, 30 – 1000 MHz, 2402 MHz

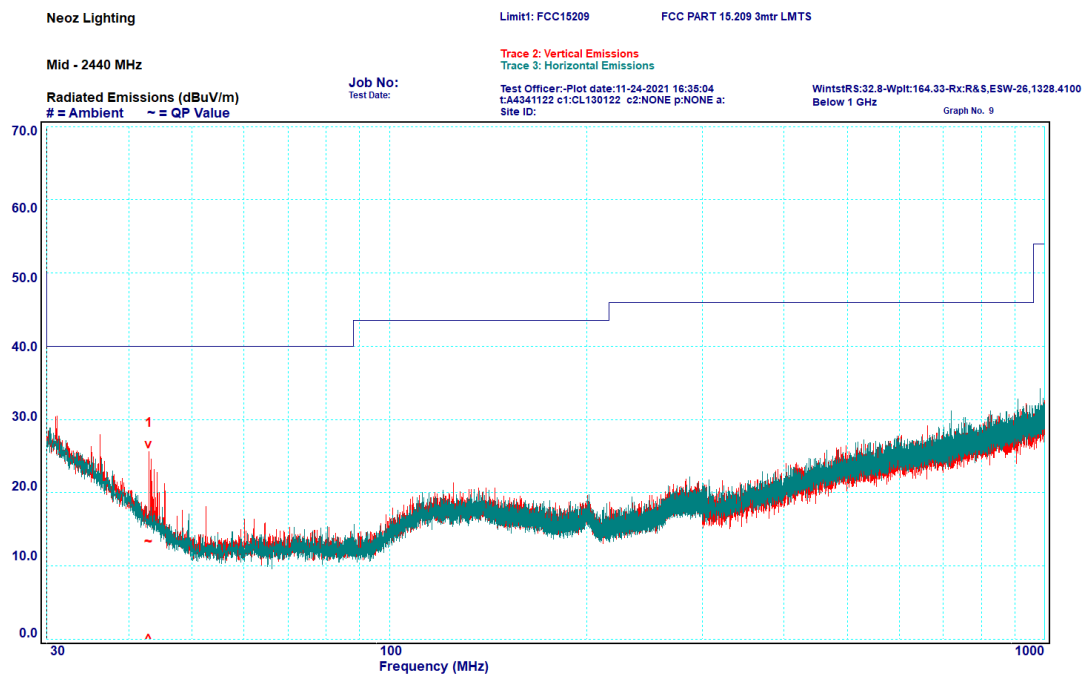

Graph 6-5: Transmitter Spurious Emissions, 30 – 1000 MHz, 2440 MHz

Table 6-1: Transmitter Spurious Emissions, 30 – 1000 MHz, 2440 MHz

Peak	Frequency (MHz)	Polarisation	Quasi Peak		
			Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	42.92	Vertical	13.3	40	-26.7

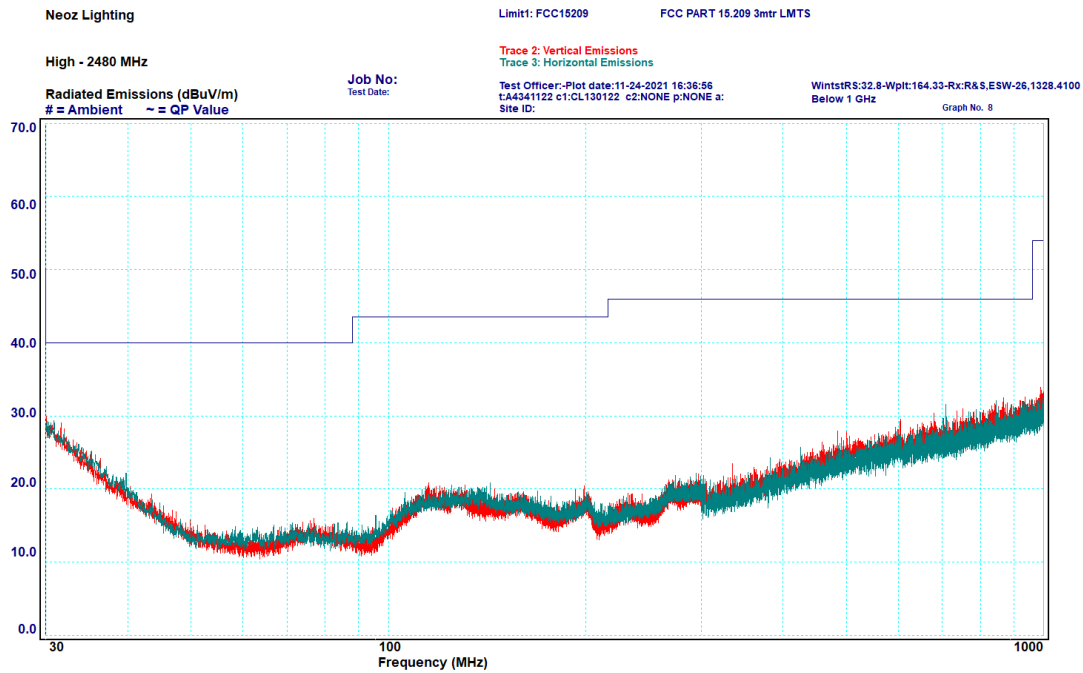


Graph 6-6: Transmitter Spurious Emissions, 30 – 1000 MHz, 2480 MHz

6.2.6 Transmitter Spurious Emissions: 1 - 18 GHz


All emissions measured in the frequency band 1 – 18 GHz complied with the requirements of the standard.

Peak Measurement:

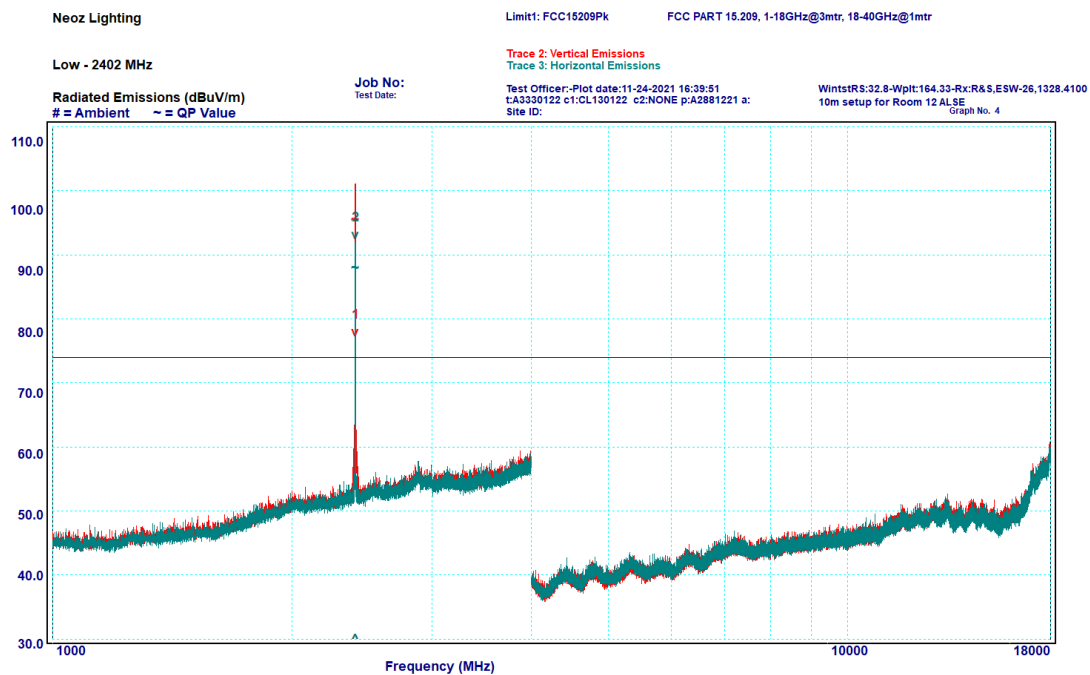


Graph 6-7: Transmitter Spurious Emissions, 1 – 18 GHz, 2402 MHz, Peak

*Note: The peaks above the limit are the fundamental transmission and not subject to the spurious emissions limit of the standard

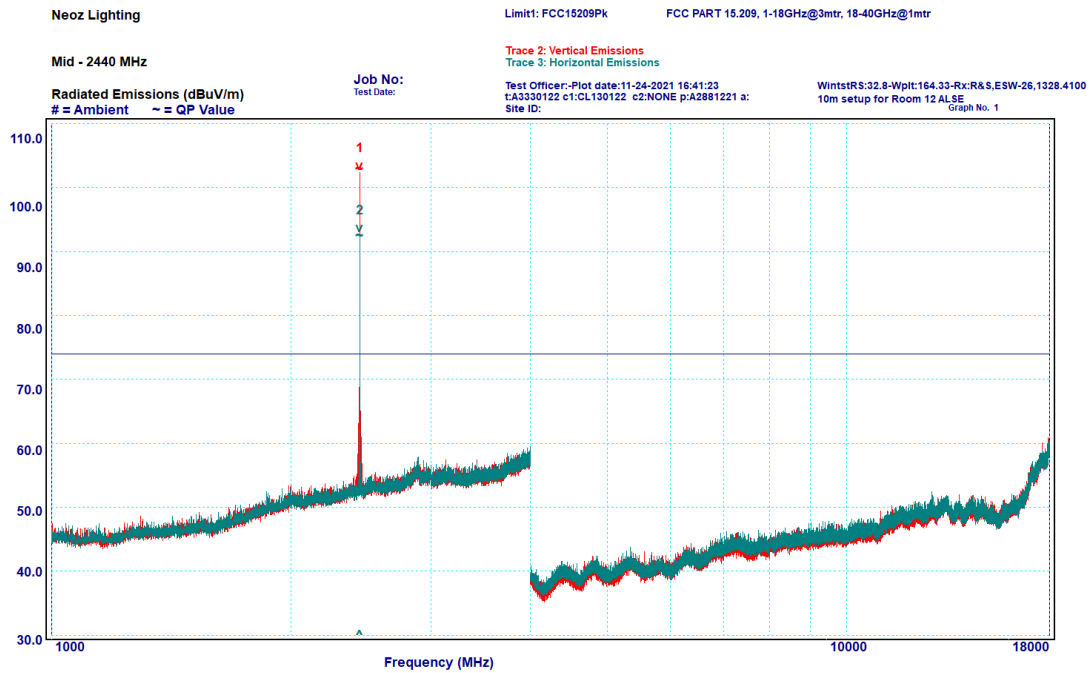

Graph 6-8: Transmitter Spurious Emissions, 1 – 18 GHz, 2440 MHz, Peak


*Note: The peaks above the limit are the fundamental transmission and not subject to the spurious emissions limit of the standard

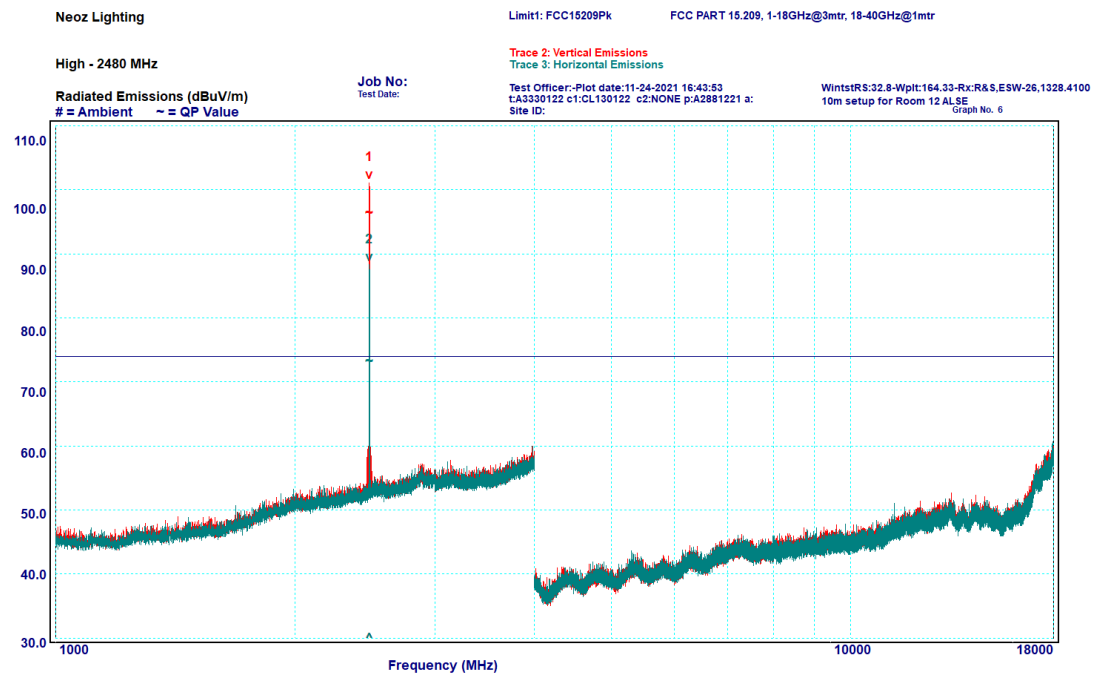

Graph 6-9: Transmitter Spurious Emissions, 1 – 18 GHz, 2480 MHz, Peak


*Note: The peaks above the limit are the fundamental transmission and not subject to the spurious emissions limit of the standard

Average Measurement:

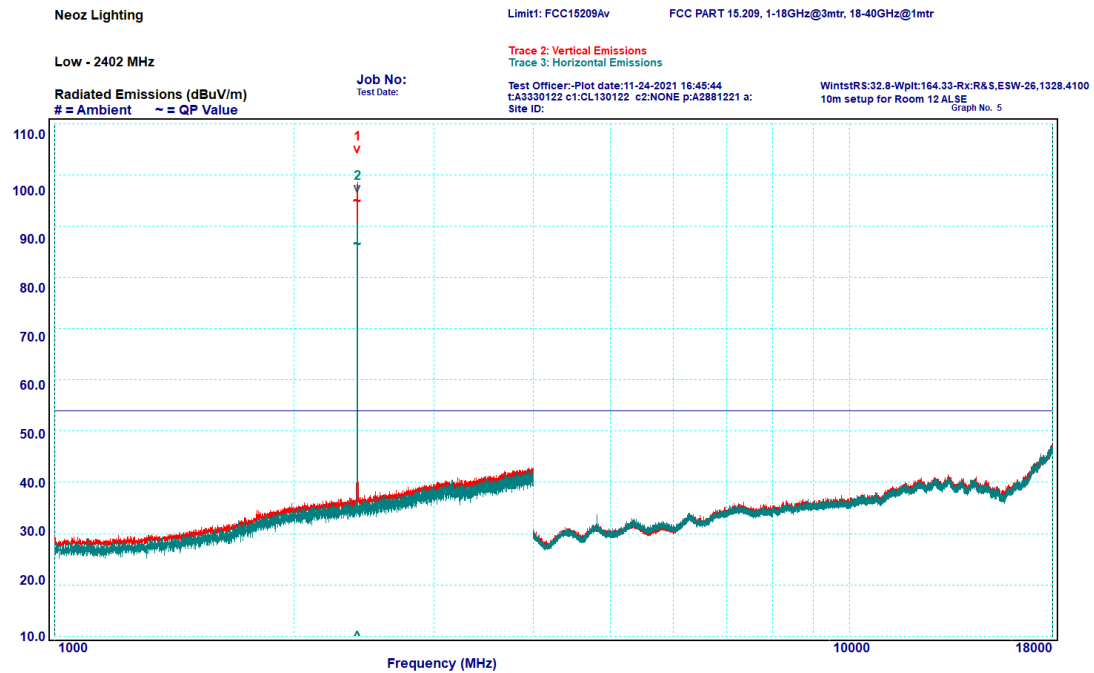


Graph 6-10: Transmitter Spurious Emissions, 1 – 18 GHz, 2402 MHz, Average

*Note: The peaks above the limit are the fundamental transmission and not subject to the spurious emissions limit of the standard

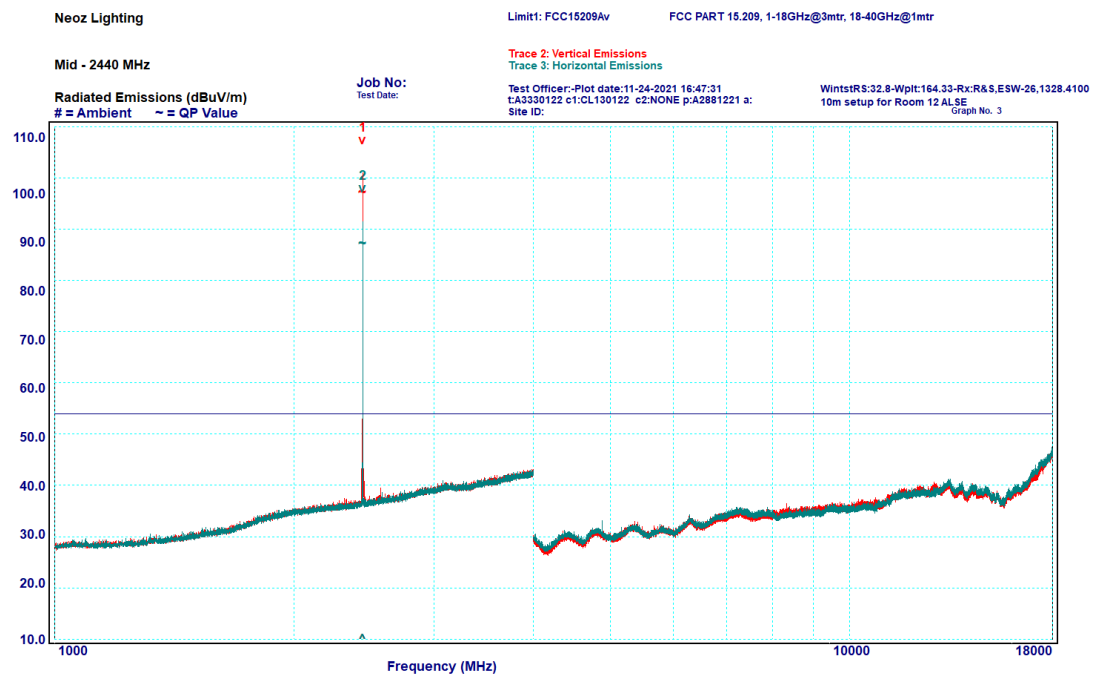

Graph 6-11: Transmitter Spurious Emissions, 1 – 18 GHz, 2440 MHz, Average

*Note: The peaks above the limit are the fundamental transmission and not subject to the spurious emissions limit of the standard

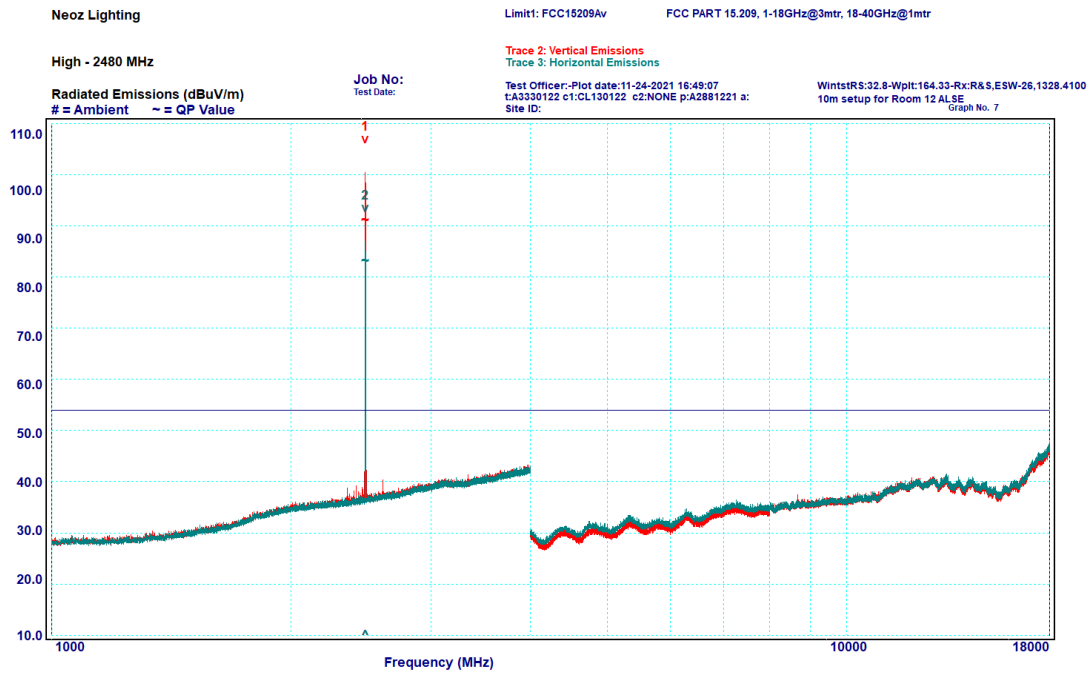


Graph 6-12: Transmitter Spurious Emissions, 1 – 18 GHz, 2480 MHz, Average

*Note: The peaks above the limit are the fundamental transmission and not subject to the spurious emissions limit of the standard

6.2.7 Transmitter Spurious Emissions: 18 – 26 GHz


All emissions measured in the frequency band 18 – 26 GHz complied with the requirements of the standard.

Peak Measurement:

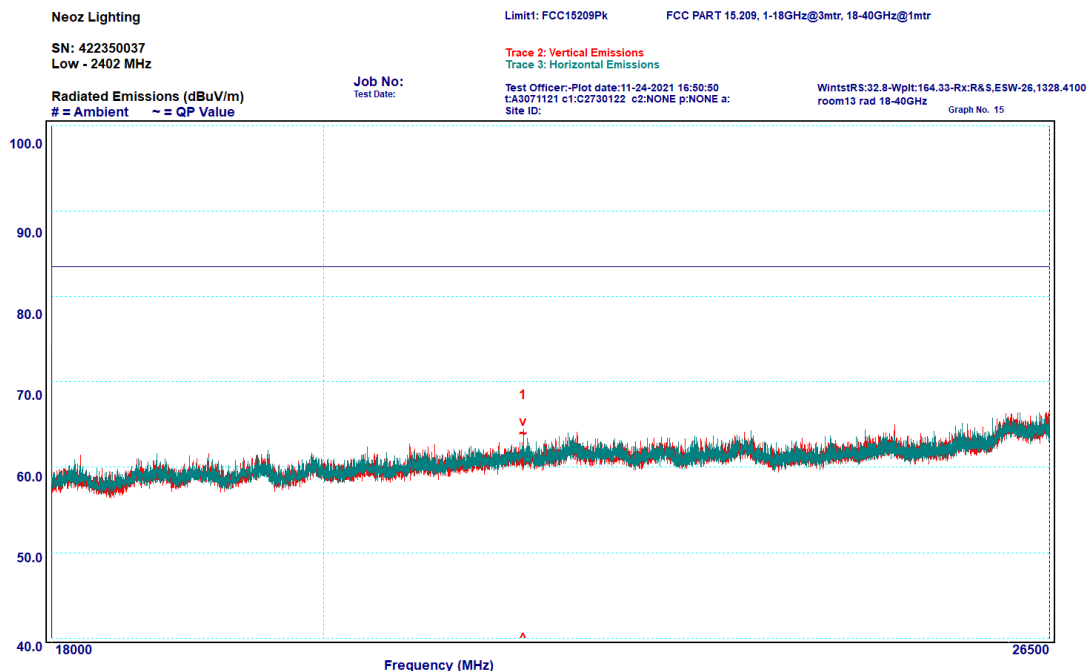


Graph 6-13: Transmitter Spurious Emissions, 18 – 26 GHz, 2402 MHz, Peak

No peaks were measured within 10 dB of the limit.

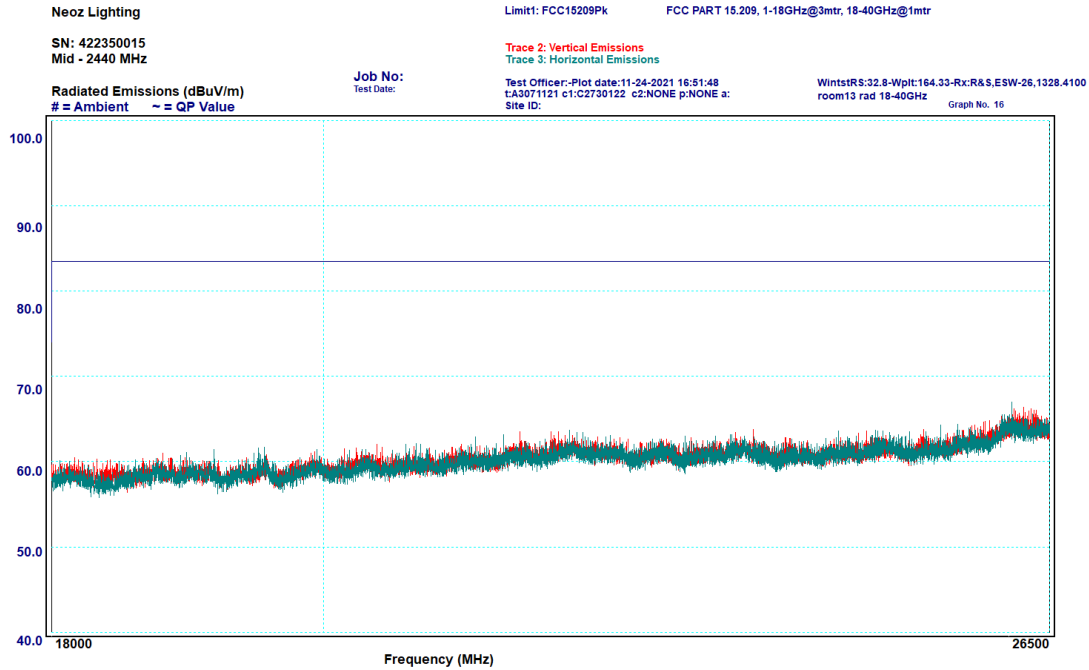

Graph 6-14: Transmitter Spurious Emissions, 18–26 GHz, 2440 MHz, Peak


No peaks were measured within 10 dB of the limit.

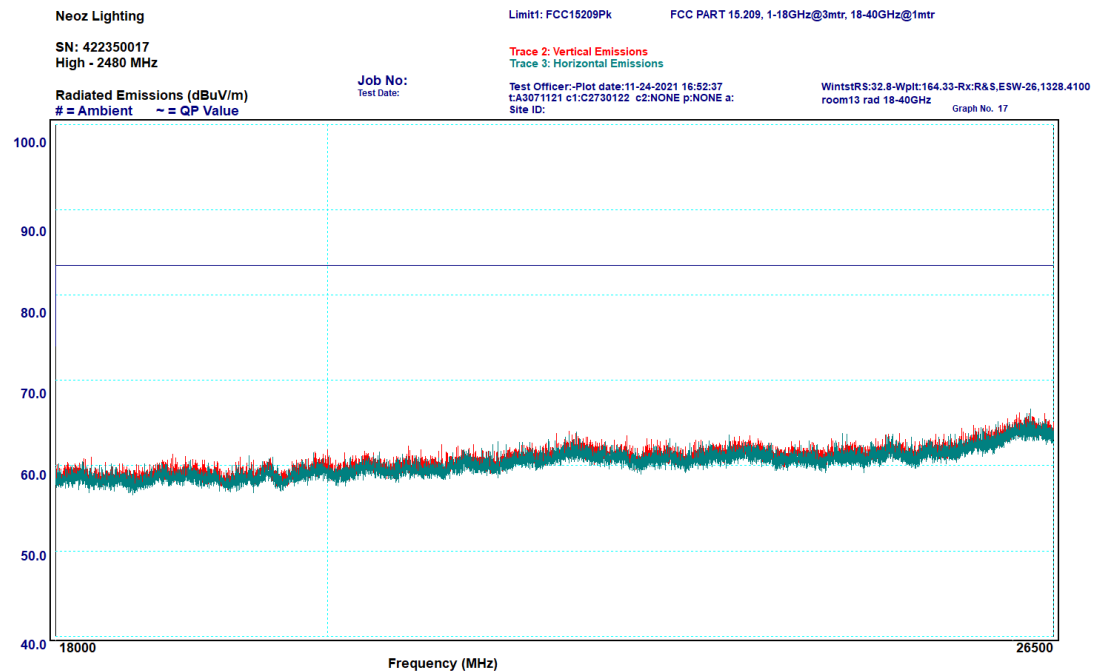

Graph 6-15: Transmitter Spurious Emissions, 18–26 GHz, 2480 MHz, Peak


No peaks were measured within 10 dB of the limit.

Average Measurement:

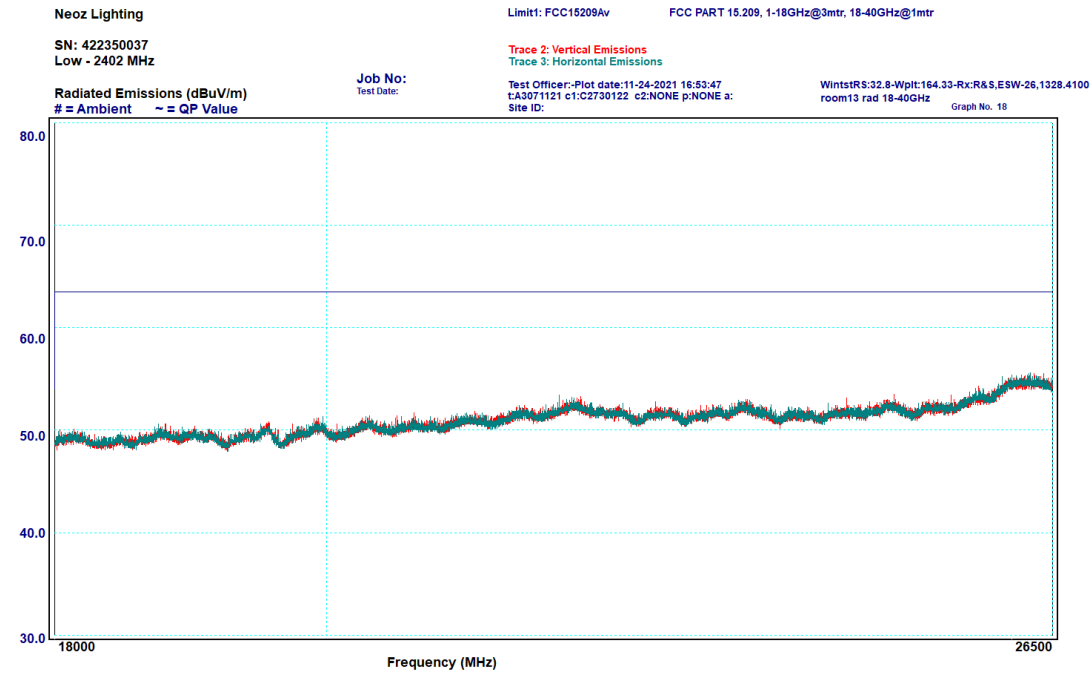


Graph 6-16: Transmitter Spurious Emissions, 18–26 GHz, 2402 MHz, Average

No peaks were measured within 10 dB of the limit.

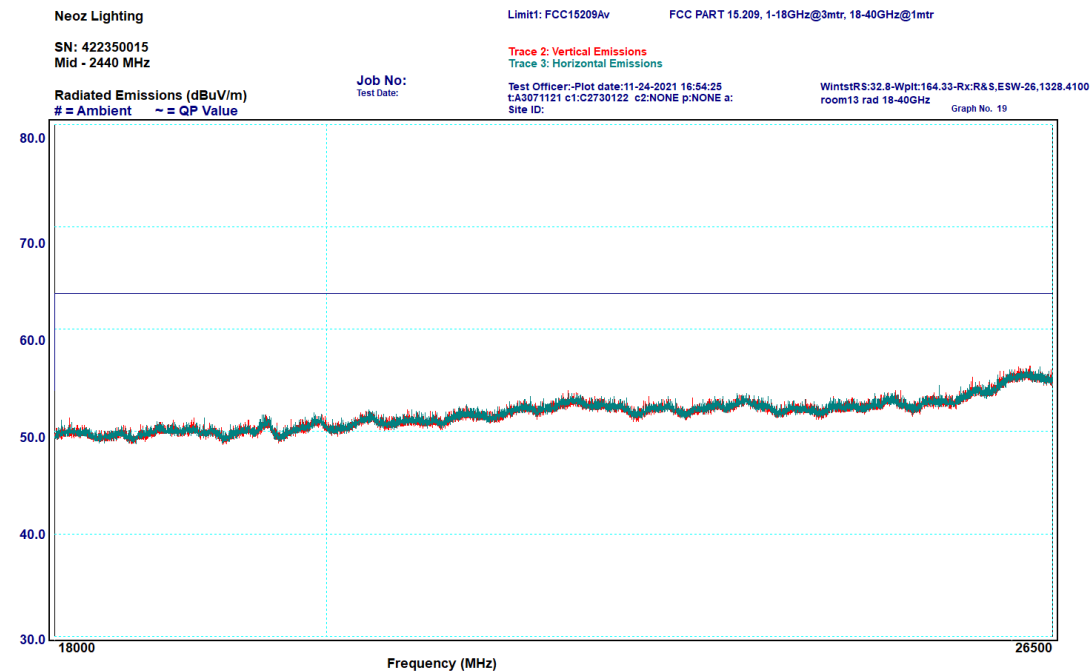

Graph 6-17: Transmitter Spurious Emissions, 18–26 GHz, 2440 MHz, Average

No peaks were measured within 10 dB of the limit.

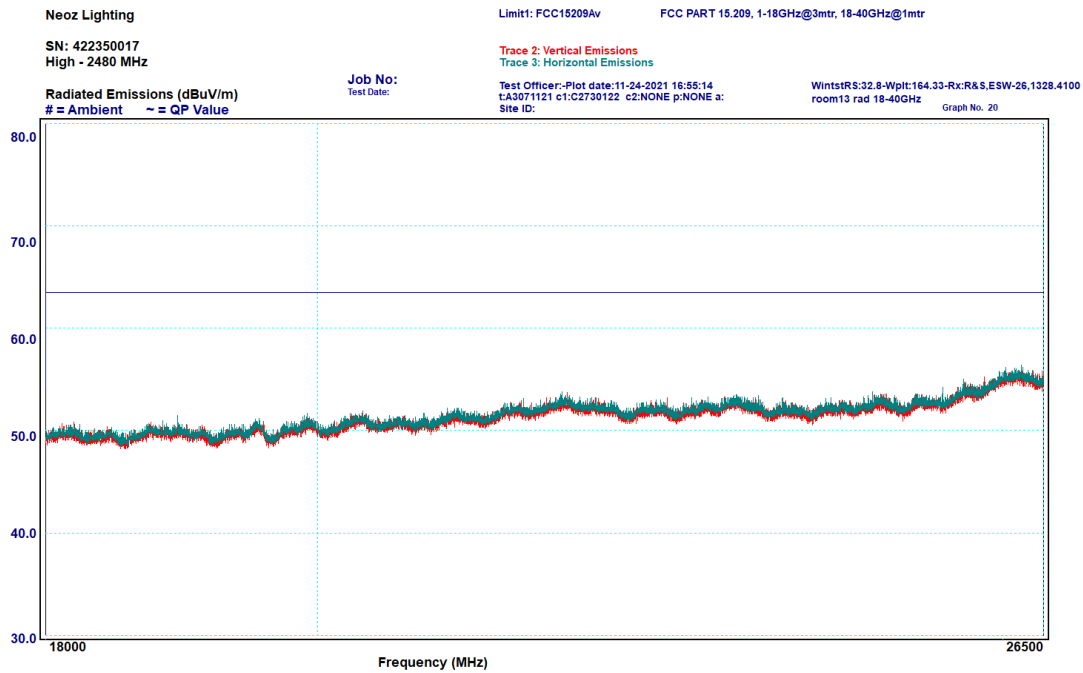


Graph 6-18: Transmitter Spurious Emissions, 18–26 GHz, 2480 MHz, Average

No peaks were measured within 10 dB of the limit.

6.3 §15.247(d)/ §RSS-247 5.5 Band Edge Emission Measurements

Band-edge measurements were done using radiated in accordance to ANSI C63.10 clause 6.10. All emissions measured near the lower and higher band edge complied with the requirements of §15.247/ RSS-247 5.0.

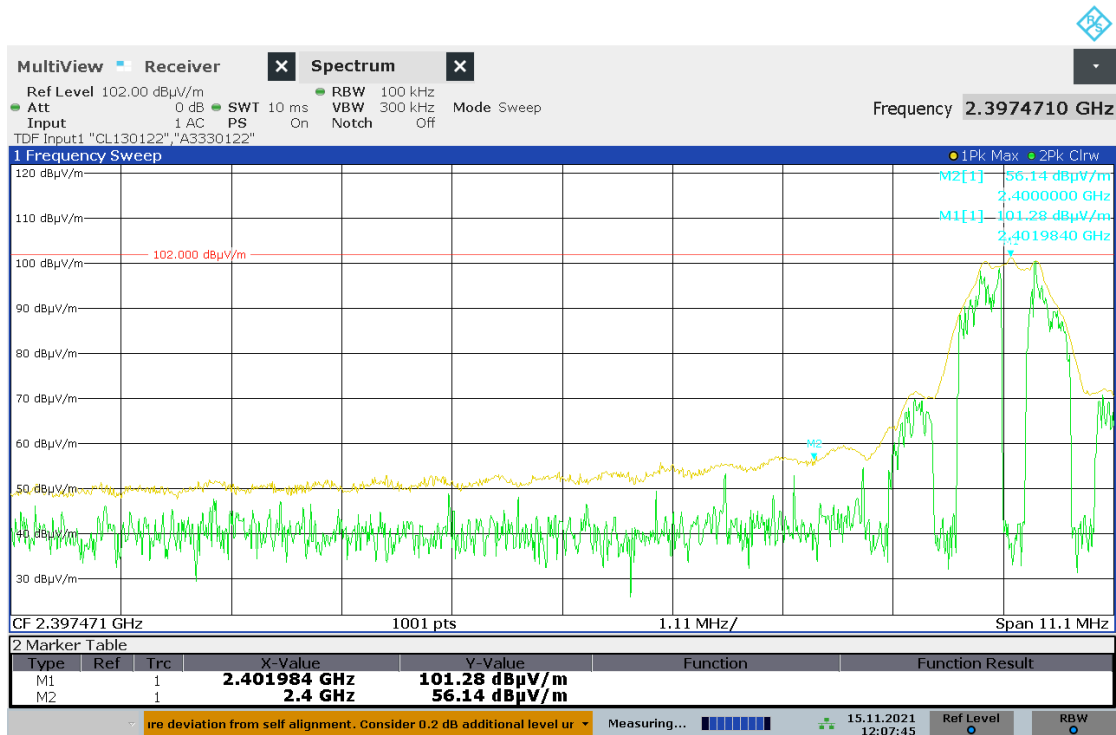

12:07:46 15.11.2021


Graph 6-19: Lower Band-edge

Table 6-2: Lower Band-edge

Measurement Type	Freq (MHz)	Measurement (dB μ V/m)	Limit (dB μ V/m)	Result
Peak	2400	56.14	74	Complied



Graph 6-20: Upper Band-edge, Peak

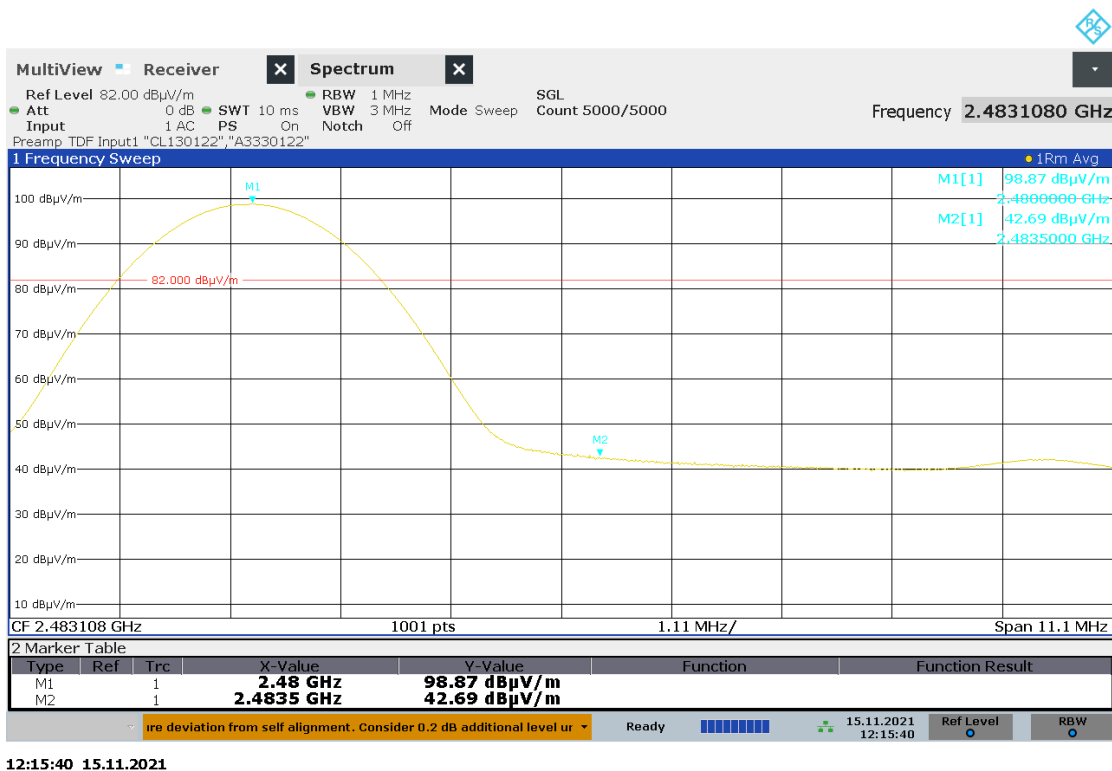

Graph 6-21: Upper Band-edge, Average

Table 6-3: Upper Band-edge

Measurement Type	Freq (MHz)	Measurement (dB μ V/m)	Limit (dB μ V/m)	Result
Peak	2483.5	69.98	74	Complied
Average	2483.5	42.69	54	Complied

END OF REPORT