



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.

Address : 685 Third Avenue, New York, New York 10017,
USA

Equipment : UniFi Talk Phone Touch Max

Model No. : UTP-TouchMax, UTP-TouchMax-White

Trade Name : UBIQUITI

FCC ID : SWX-UTPTM

I HEREBY CERTIFY THAT :

The sample was received on May. 27, 2021 and the testing was completed on Mar. 07, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channes.....	7
2.3 Test Mode & Test Software	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	11
3. Test Equipment and Ancillaries Used for Tests.....	12
4. Antenna Requirements.....	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain.....	14
5. Frequency Hopping System Requirements	15
5.1 Frequency Hopping Requirement	15
5.2 EUT Hopping System.....	16
5.3 Pseudorandom Frequency Hopping Sequence	16
6. Test of AC Power Line Conducted Emission	17
6.1 Test Limit	17
6.2 Test Procedures	17
6.3 Typical Test Setup	18
6.4 Test Result and Data	19
6.5 Test Photographs	21
7. Test of Radiated Spurious Emission.....	22
7.1 Test Limit	22
7.2 Test Procedures.....	23
7.3 Typical Test Setup	24
7.4 Test Result and Data (9kHz ~ 30MHz).....	25
7.5 Test Result and Data (30MHz ~ 1GHz).....	25
7.6 Test Result and Data (1GHz ~ 25GHz).....	27
7.7 Restricted Bands of Operation	39
7.8 Test Photographs (30MHz ~ 1GHz)	40
7.9 Test Photographs (1GHz ~ 25GHz)	41
8. Test of Conducted Spurious Emission	43
8.1 Test Limit	43
8.2 Test Procedure	43
8.3 Test Setup Layout	43
8.4 Test Result and Data	43
9. 20dB Bandwidth Measurement Data.....	51
9.1 Test Limit	51
9.2 Test Procedures	51
9.3 Test Setup Layout	51



9.4	Test Result and Data	51
10.	Carrier Frequency Separation	54
10.1	Test Limit	54
10.2	Test Procedures	54
10.3	Test Setup Layout	54
10.4	Test Result and Data	54
11.	Dwell Time on each channel	57
11.1	Test Limit	57
11.2	Test Procedures	57
11.3	Test Setup Layout	57
11.4	Test Result and Data	57
12.	Number of Hopping Channels	60
12.1	Test Limit	60
12.2	Test Procedures	60
12.3	Test Setup Layout	60
12.4	Test Result and Data	60
13.	Maximum Peak Output Power	62
13.1	Test Limit	62
13.2	Test Procedures	62
13.3	Test Setup Layout	62
13.4	Test Result and Data	63
14.	Radio Frequency Exposure	64
14.1	EUT Specification	64
14.2	Test Results	64
14.3	Calculation	65
14.4	Maximum Permissible Exposure	66

**History of this test report**

Report No.	Issued Date	Description
21050188-TRFCC03	Mar. 07, 2022	Original
21050188-TRFCC03-A	May. 10, 2022	1. One item added: Pseudorandom Frequency Hopping Sequence.



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.247(a)(1)	. Pseudorandom Frequency Hopping Sequence	Pass
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(b)	. Peak Output Power Measurement Data	PASS
2.1091	. Radio Frequency Exposure	PASS

* The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21050188-TEFV01).

After engineering evaluation, the test results can refer to original report number:
TEFB1912016.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	NFC: 13.553MHz~13.567MHz BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Modulation Type	NFC : ASK BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 802.11b: CCK, DQPSK, DBPSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	For NFC: Loop Antenna For BT&WLAN: Internal Antenna
Antenna Gain	For NFC: 13.553MHz~13.567MHz: 0dBi For BT/BLE:2400-2480MHz: 0dBi For WLAN: 2400-2483.5MHz: 2dBi 5150-5850MHz: 4.5dBi
Type-C Adapter	Brand: UBIQUITI Model: E015-1G050300VU

Note:

1. EUT supports DFS Client Mode
2. For more details, please refer to the User's manual of the EUT.

Difference description:

Model No.	Remark
UTP-TouchMax	Black enclosure.
UTP-TouchMax-White	White enclosure.



2.2 Carrier Frequency of Channes

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode & Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- The complete test system included Notebook and EUT for RF test.
- An executive program, "QRCT ver. 4.0.00129.0" under Windows OS system was executed to transmit and receive data via Bluetooth.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 3" generated the worst case, they were reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 1.3" generated the worst case, they were reported as the final data.	

Modulation Type	TX CONFIGURATION
GFSK	1TX
$\pi/4$ -DQPSK	1TX
8DPSK	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
USB TYPE-C	N/A	N/A	1m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	15m / NS	N/A
USB TYPE-C	N/A	N/A	1m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
USB TYPE-C	N/A	N/A	1m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Finish Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2019/12/30	22°C / 63%	Nick Guan
Radiated Emissions	3M02-NK	2020/03/27	22°C / 50%	Vic Yeh
AC Power Line Conducted Emission	CON01-NK	2020/03/25	25°C / 49%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	$\pm 1.60\text{dB}$
Radiated Spurious Emission(9KHz~30MHz)	$\pm 3.405\text{dB}$
Radiated Spurious Emission(30MHz~1GHz)	$\pm 5.326\text{dB}$
Radiated Spurious Emission(1GHz~25GHz)	$\pm 5.918\text{dB}$
Conducted Spurious Emission	$\pm 2.156\text{dB}$
6dB Bandwidth	$\pm 4.401\%$
20dB Bandwidth	$\pm 4.40\%$
Occupied Bandwidth	$\pm 4.41\%$
Peak Output Power(Conducted Power Meter)	$\pm 1.31\text{dB}$
Dwell Time	$\pm 0.11\%$
Power Spectral Density	$\pm 2.146\text{dB}$
Duty Cycle	$\pm 0.17\%$



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2019/09/24	2020/09/23
Bilog Antenna	Schwarzbeck	VULB9168	369	2019/03/29	2020/03/28
Active Loop Antenna	EMCO	6507	40855	2019/05/24	2020/05/23
Horn Antenna	EMCO	3115	31589	2019/04/01	2020/03/31
Horn Antenna	EMCO	3116	31974	2019/09/17	2020/09/16
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2019/05/14	2020/05/13
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2019/07/22	2020/07/21
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Preamplifier	EM Electronics corp.	EM330	60660	2020/03/16	2021/03/15
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2019/09/20	2020/09/19
Preamplifier	Agilent	8449B	3008A01954	2020/03/16	2021/03/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2019/11/07	2020/11/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2019/04/09	2020/04/08
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2019/09/20	2020/09/19
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2019/05/20	2020/05/19
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2019/05/20	2020/05/19
Cable-8m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2019/05/20	2020/05/19
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2019/07/22	2020/07/21
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2019/11/25	2020/11/24
Attenuator	KEYSIGHT	8491B	MY39250703	2019/09/12	2020/09/11
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2019/08/28	2020/08/27
Power Meter	Anritsu	ML2495A	1224005	2019/04/11	2020/04/10
Power Sensor	Anritsu	MA2411B	1207295	2019/04/09	2020/04/08



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2019/09/16	2020/09/15
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2020/03/12	2021/03/11
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2020/03/11	2021/03/10
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2020/03/11	2021/03/10
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Internal Antenna
Antenna Gain	0 dBi



5. Frequency Hopping System Requirements

5.1 Frequency Hopping Requirement

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.



5.2 EUT Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

5.3 Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel number:

50	54	15	49	69	43	59	46	55	20
59	14	34	59	25	9	50	59	54	48
65	22	12	74	64	27	38	21	61	28
33	39	35	43	65	14	65	20	25	10

etc.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6. Test of AC Power Line Conducted Emission

6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

6.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




6.3 Typical Test Setup

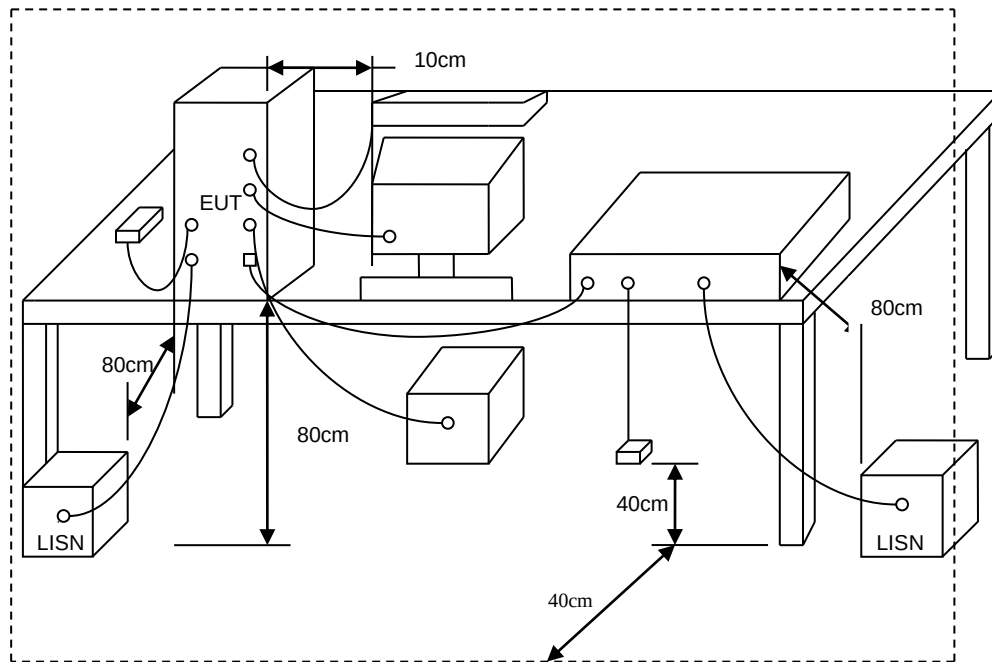



6.4 Test Result and Data

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 3, CH00		:

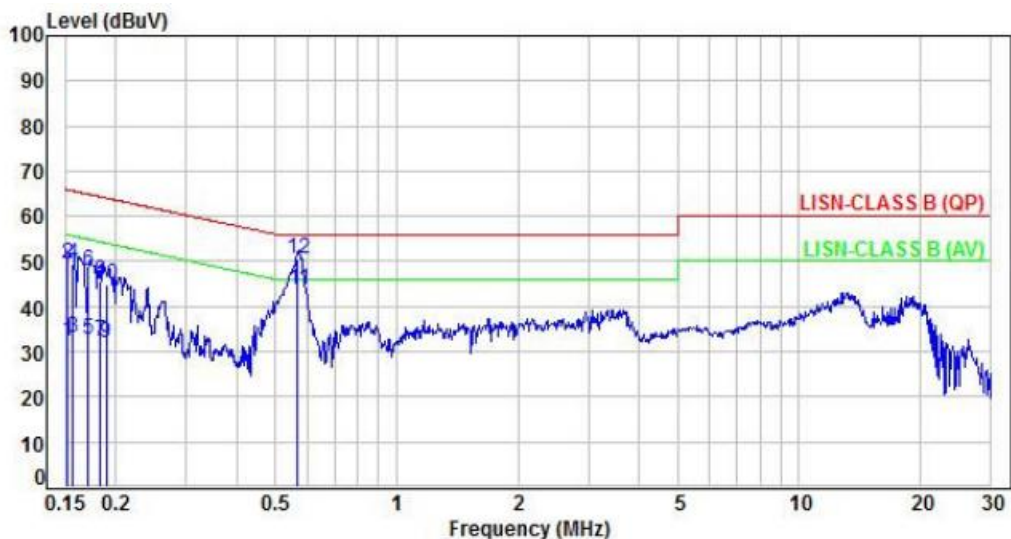

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.92	22.57	32.49	55.92	-23.43	Average	P
2	0.15	9.92	39.70	49.62	65.92	-16.30	QP	P
3	0.16	9.92	23.27	33.19	55.69	-22.50	Average	P
4	0.16	9.92	39.66	49.58	65.69	-16.11	QP	P
5	0.17	9.92	22.65	32.57	54.96	-22.39	Average	P
6	0.17	9.92	37.86	47.78	64.96	-17.18	QP	P
7	0.18	9.92	22.24	32.16	54.37	-22.21	Average	P
8	0.18	9.92	35.85	45.77	64.37	-18.60	QP	P
9	0.19	9.92	21.92	31.84	54.06	-22.22	Average	P
10	0.19	9.92	35.09	45.01	64.06	-19.05	QP	P
11	0.57	9.95	33.86	43.81	46.00	-2.19	Average	P
12	0.57	9.95	40.79	50.74	56.00	-5.26	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 3, CH00		:

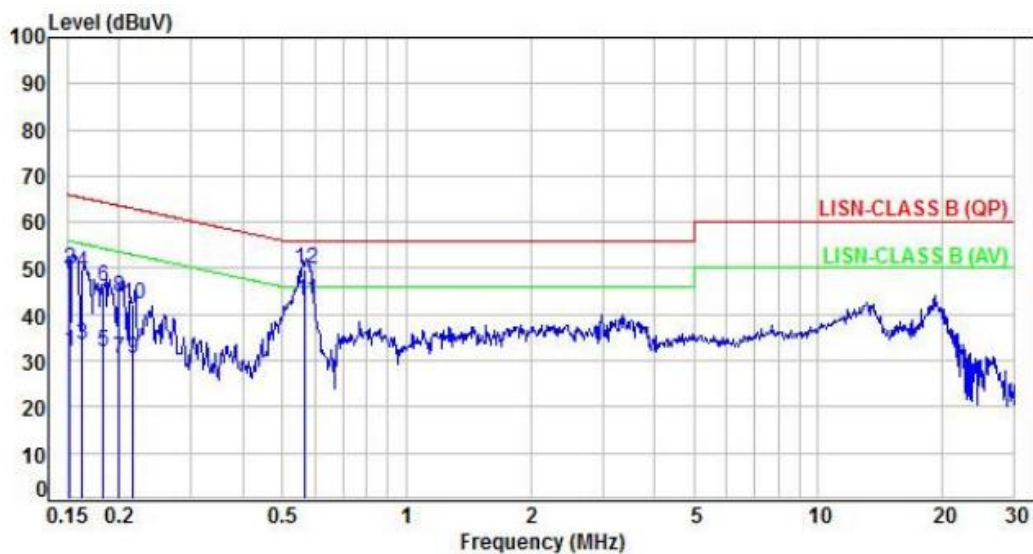

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.15	9.95	22.14	32.09	55.93	-23.84	Average	P
2	0.15	9.95	39.94	49.89	65.93	-16.04	QP	P
3	0.16	9.95	23.49	33.44	55.33	-21.89	Average	P
4	0.16	9.95	38.93	48.88	65.33	-16.45	QP	P
5	0.18	9.95	21.88	31.83	54.36	-22.53	Average	P
6	0.18	9.95	36.01	45.96	64.36	-18.40	QP	P
7	0.20	9.95	20.48	30.43	53.64	-23.21	Average	P
8	0.20	9.95	33.67	43.62	63.64	-20.02	QP	P
9	0.22	9.95	20.47	30.42	52.98	-22.56	Average	P
10	0.22	9.95	32.21	42.16	62.98	-20.82	QP	P
11	0.57	9.96	32.93	42.89	46.00	-3.11	Average	P
12	0.57	9.96	39.69	49.65	56.00	-6.35	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



7. Test of Radiated Spurious Emission

7.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



7.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

1. The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(X-AXIS is the worst.)




7.3 Typical Test Setup


Below 30MHz test setup

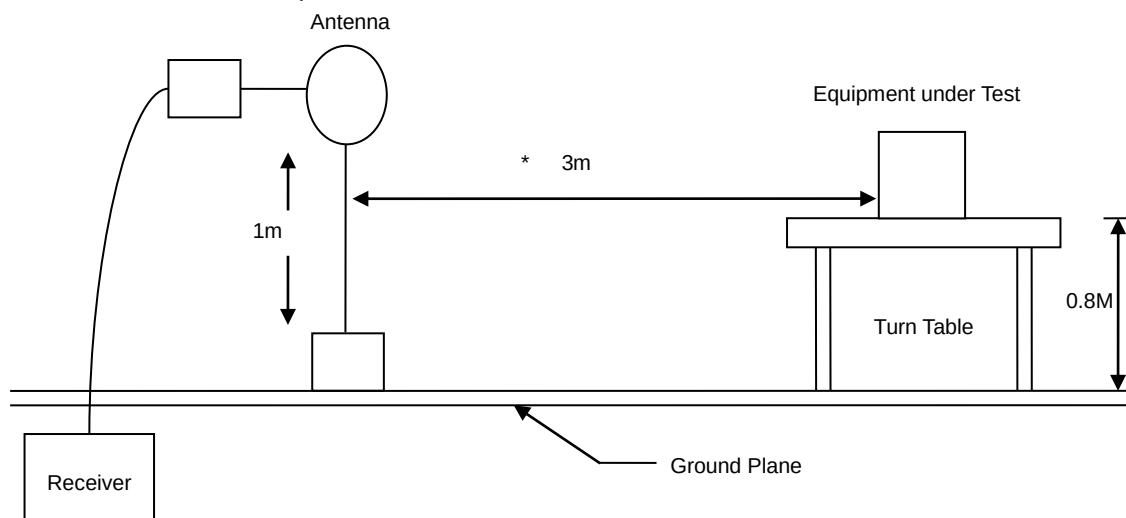

30MHz- 1GHz Test Setup

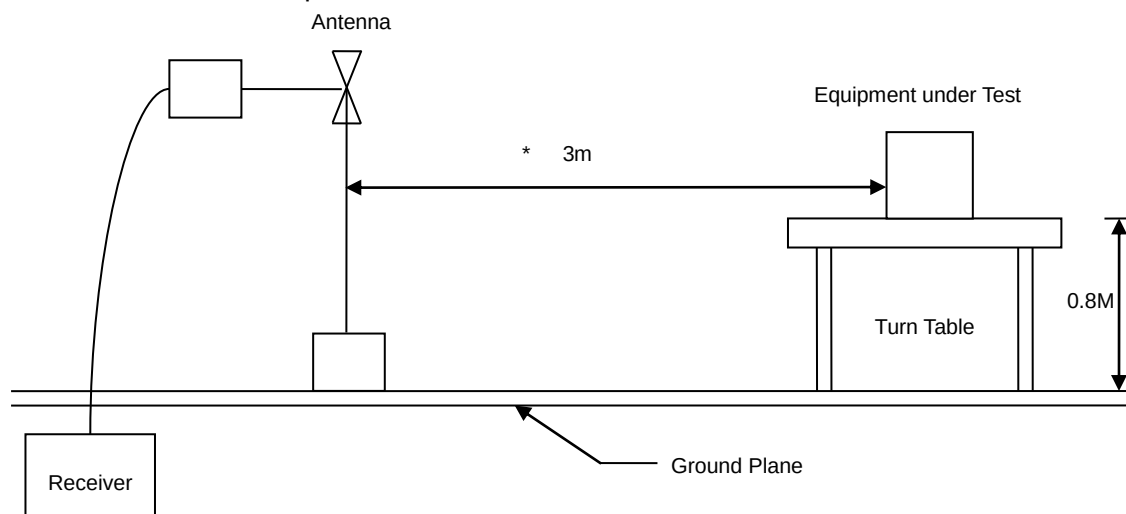

Above 1GHz Test Setup

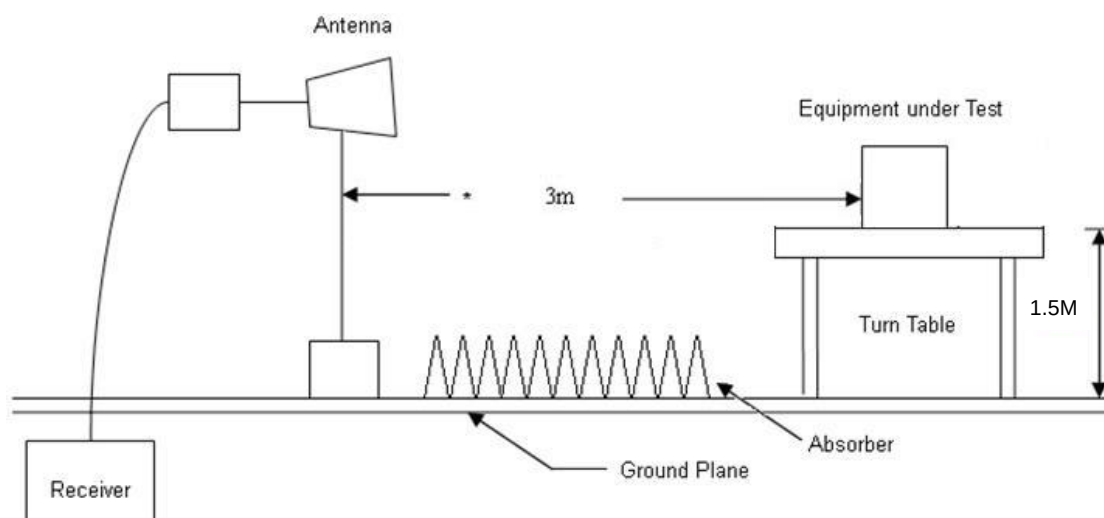




7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

7.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH00		:

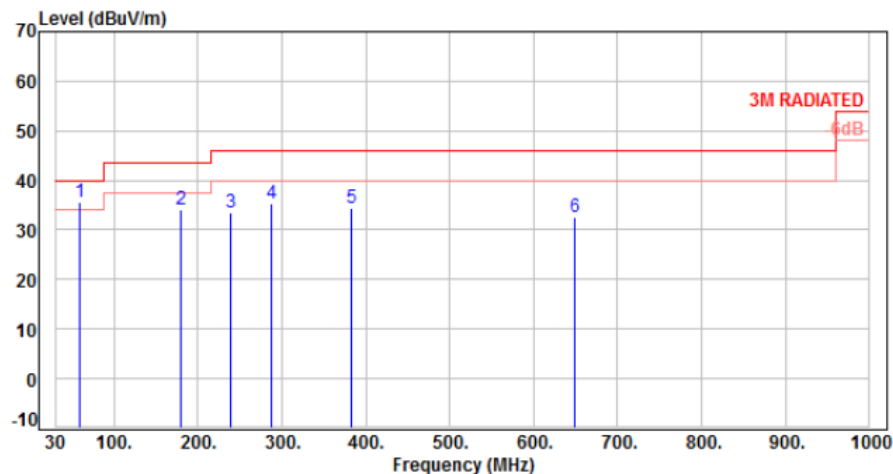

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	59.10	-9.42	45.10	35.68	40.00	-4.32	QP	100	0	P
2	179.38	-10.52	44.60	34.08	43.50	-9.42	Peak	100	0	P
3	239.52	-10.46	44.01	33.55	46.00	-12.45	Peak	100	0	P
4	288.02	-8.55	43.78	35.23	46.00	-10.77	Peak	100	0	P
5	383.08	-5.86	40.19	34.33	46.00	-11.67	Peak	100	0	P
6	648.86	-0.37	32.98	32.61	46.00	-13.39	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH00		:

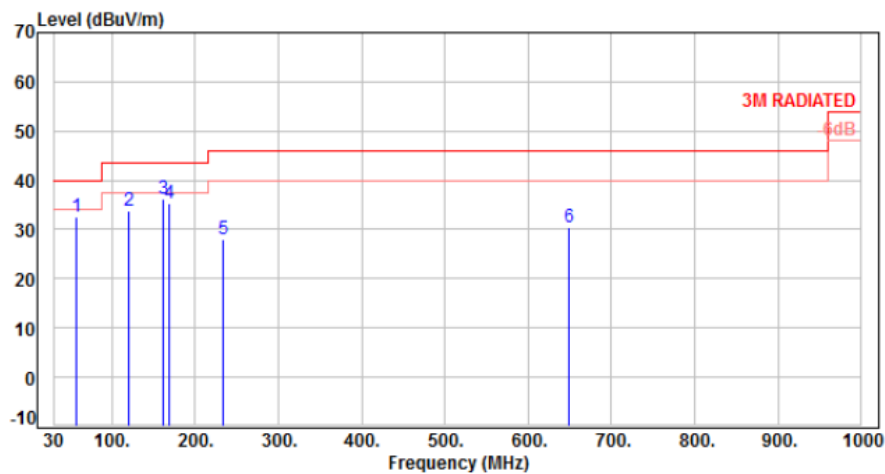

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	57.16	-9.19	41.83	32.64	40.00	-7.36	Peak	100	0	P
2	121.18	-11.70	45.62	33.92	43.50	-9.58	Peak	100	0	P
3	161.92	-9.25	45.55	36.30	43.50	-7.20	Peak	100	0	P
4	169.68	-9.45	44.64	35.19	43.50	-8.31	Peak	100	0	P
5	233.70	-10.96	39.07	28.11	46.00	-17.89	Peak	100	0	P
6	648.86	-0.37	30.94	30.57	46.00	-15.43	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



7.6 Test Result and Data (1GHz ~ 25GHz)

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00		:	

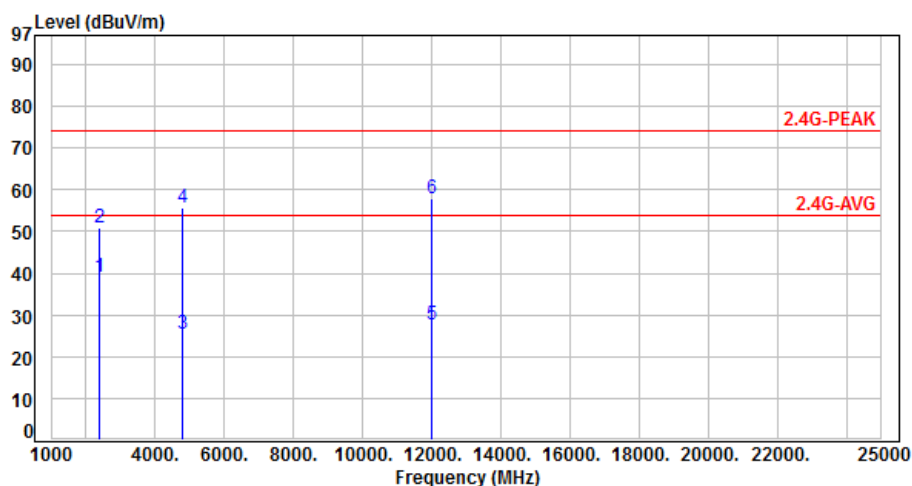

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.55	38.91	54.00	-15.09	Average	100	162	P
2	2390.00	-3.64	54.56	50.92	74.00	-23.08	Peak	100	162	P
3	4804.00	3.65	21.98	25.63	54.00	-28.37	Average	360	168	P
4	4804.00	3.65	52.08	55.73	74.00	-18.27	Peak	360	168	P
5	12010.00	13.50	14.18	27.68	54.00	-26.32	Average	100	233	P
6	12010.00	13.50	44.28	57.78	74.00	-16.22	Peak	100	233	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00		:

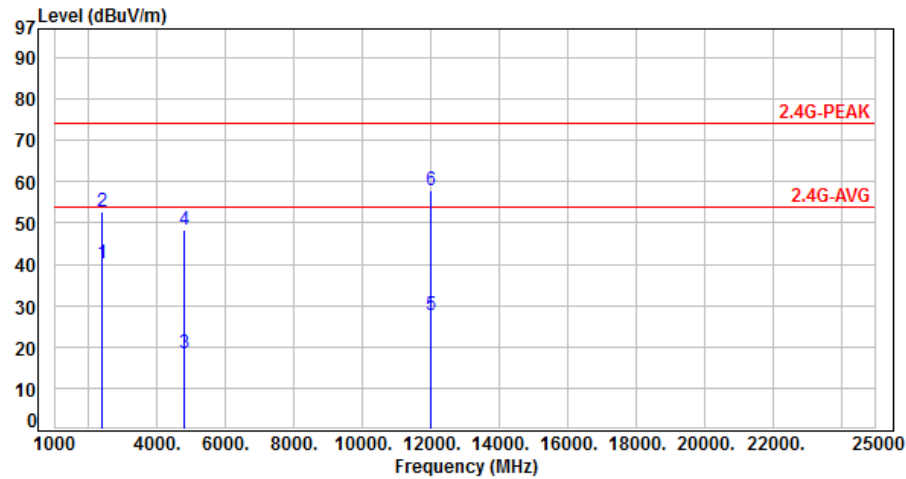

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.95	40.31	54.00	-13.69	Average	100	296	P
2	2390.00	-3.64	56.35	52.71	74.00	-21.29	Peak	100	296	P
3	4804.00	3.65	14.68	18.33	54.00	-35.67	Average	100	156	P
4	4804.00	3.65	44.78	48.43	74.00	-25.57	Peak	100	156	P
5	12010.00	13.50	14.20	27.70	54.00	-26.30	Average	100	202	P
6	12010.00	13.50	44.30	57.80	74.00	-16.20	Peak	100	202	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH39		:

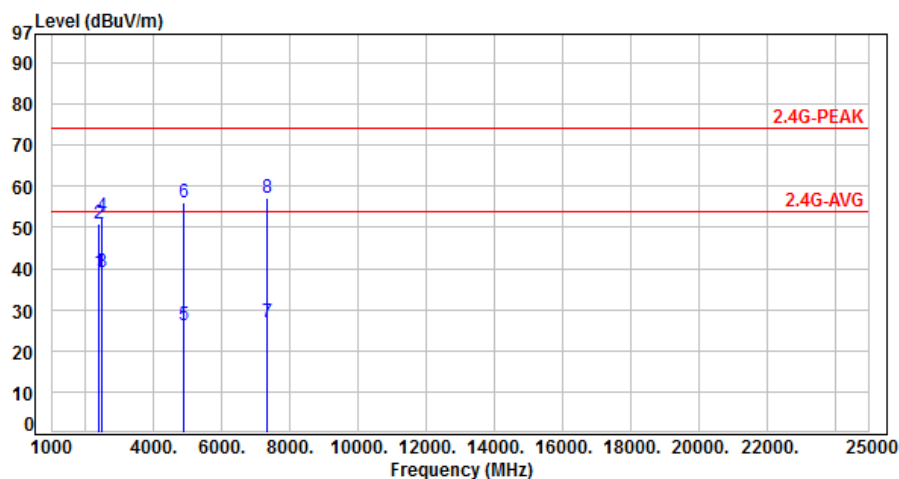

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.70	39.06	54.00	-14.94	Average	100	183	P
2	2390.00	-3.64	54.68	51.04	74.00	-22.96	Peak	100	183	P
3	2483.50	-3.30	42.41	39.11	54.00	-14.89	Average	100	185	P
4	2483.50	-3.30	55.95	52.65	74.00	-21.35	Peak	100	185	P
5	4882.00	3.97	22.06	26.03	54.00	-27.97	Average	366	167	P
6	4882.00	3.97	52.16	56.13	74.00	-17.87	Peak	366	167	P
7	7323.00	8.84	18.22	27.06	54.00	-26.94	Average	170	183	P
8	7323.00	8.84	48.32	57.16	74.00	-16.84	Peak	170	183	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39		:

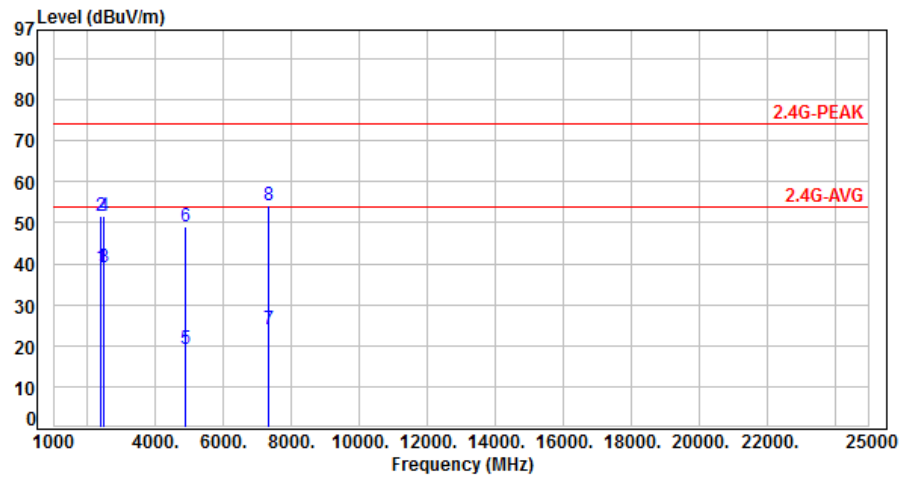

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.60	38.96	54.00	-15.04	Average	100	302	P
2	2390.00	-3.64	55.11	51.47	74.00	-22.53	Peak	100	302	P
3	2483.50	-3.30	42.49	39.19	54.00	-14.81	Average	100	304	P
4	2483.50	-3.30	54.89	51.59	74.00	-22.41	Peak	100	304	P
5	4882.00	3.97	15.11	19.08	54.00	-34.92	Average	100	110	P
6	4882.00	3.97	45.21	49.18	74.00	-24.82	Peak	100	110	P
7	7323.00	8.84	15.25	24.09	54.00	-29.91	Average	100	170	P
8	7323.00	8.84	45.35	54.19	74.00	-19.81	Peak	100	170	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH78		:	

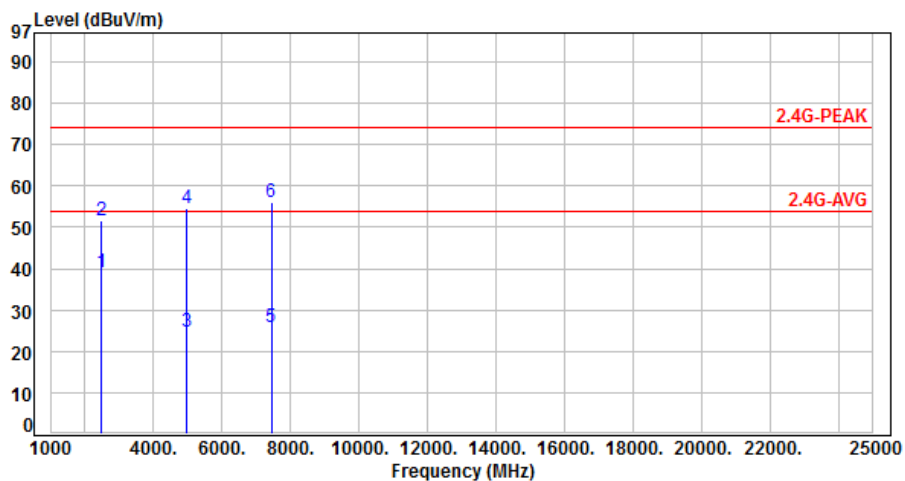

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	42.55	39.25	54.00	-14.75	Average	100	167	P
2	2483.50	-3.30	54.95	51.65	74.00	-22.35	Peak	100	167	P
3	4960.00	4.21	20.36	24.57	54.00	-29.43	Average	335	172	P
4	4960.00	4.21	50.46	54.67	74.00	-19.33	Peak	335	172	P
5	7440.00	8.98	16.83	25.81	54.00	-28.19	Average	188	186	P
6	7440.00	8.98	46.93	55.91	74.00	-18.09	Peak	188	186	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH78		:

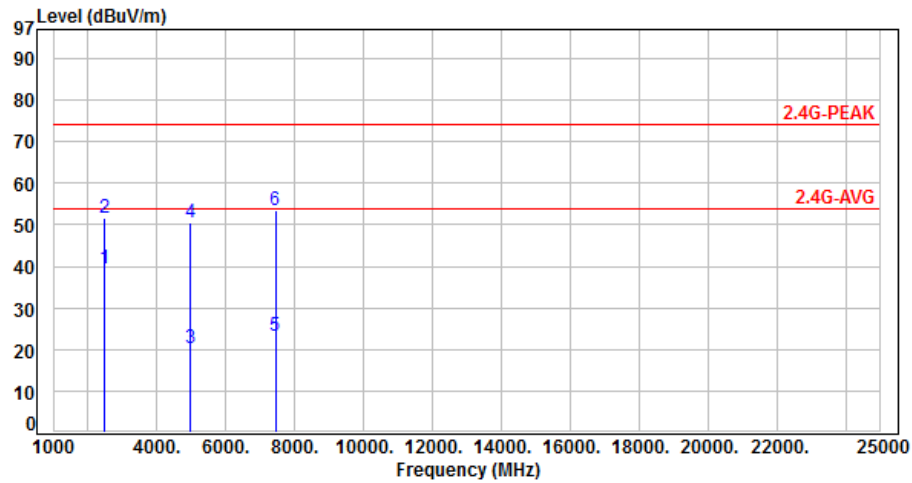

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	42.64	39.34	54.00	-14.66	Average	100	305	P
2	2483.50	-3.30	54.97	51.67	74.00	-22.33	Peak	100	305	P
3	4960.00	4.21	16.07	20.28	54.00	-33.72	Average	121	148	P
4	4960.00	4.21	46.17	50.38	74.00	-23.62	Peak	121	148	P
5	7440.00	8.98	14.41	23.39	54.00	-30.61	Average	100	305	P
6	7440.00	8.98	44.51	53.49	74.00	-20.51	Peak	100	305	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH00		:

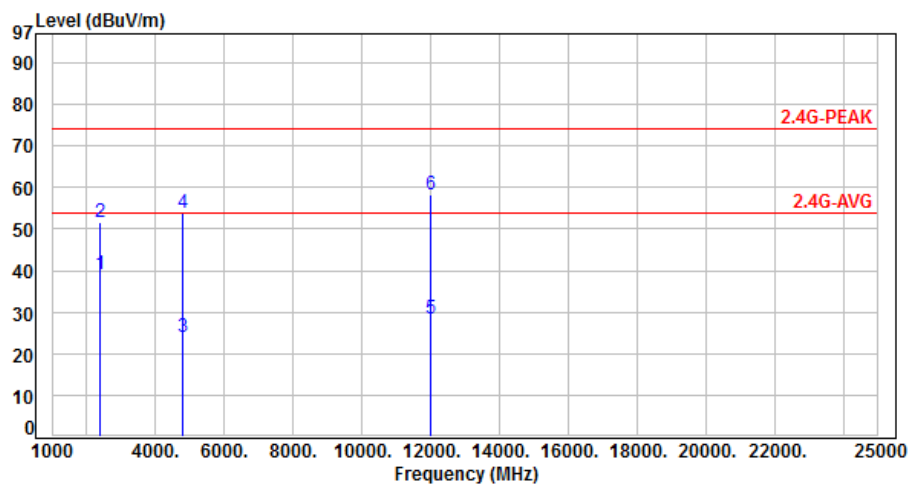

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.61	38.97	54.00	-15.03	Average	100	159	P
2	2390.00	-3.64	55.40	51.76	74.00	-22.24	Peak	100	159	P
3	4804.00	3.65	20.20	23.85	54.00	-30.15	Average	357	163	P
4	4804.00	3.65	50.30	53.95	74.00	-20.05	Peak	357	163	P
5	12010.00	13.50	14.83	28.33	54.00	-25.67	Average	159	359	P
6	12010.00	13.50	44.93	58.43	74.00	-15.57	Peak	159	359	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH00		:

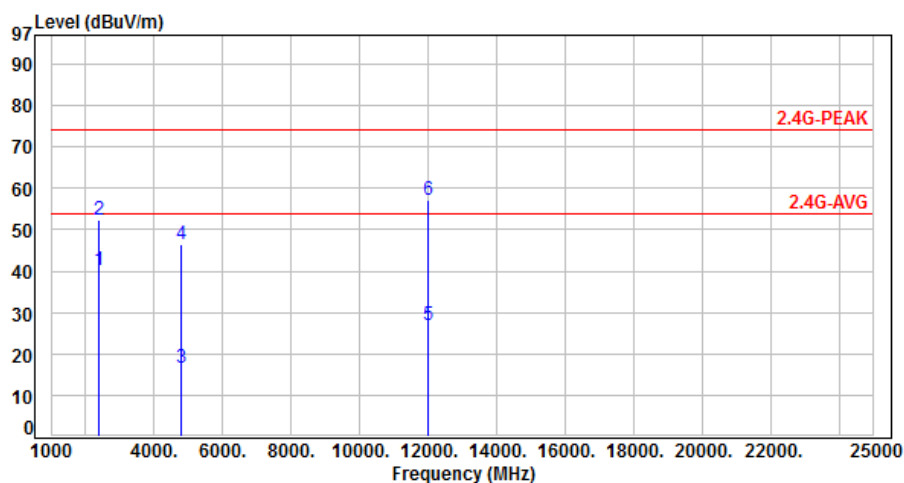

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.76	40.12	54.00	-13.88	Average	100	289	P
2	2390.00	-3.64	55.94	52.30	74.00	-21.70	Peak	100	289	P
3	4804.00	3.65	12.78	16.43	54.00	-37.57	Average	100	162	P
4	4804.00	3.65	42.88	46.53	74.00	-27.47	Peak	100	162	P
5	12010.00	13.50	13.54	27.04	54.00	-26.96	Average	100	215	P
6	12010.00	13.50	43.64	57.14	74.00	-16.86	Peak	100	215	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH39		:	

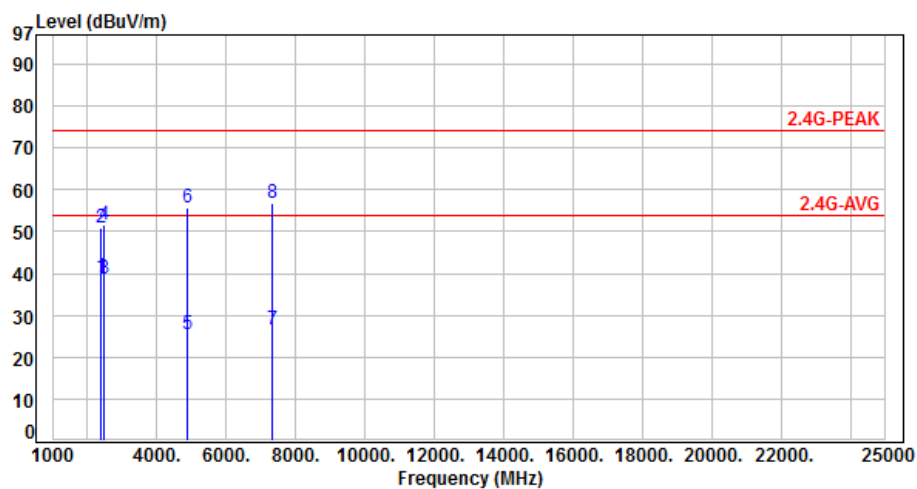

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.59	38.95	54.00	-15.05	Average	100	181	P
2	2390.00	-3.64	54.39	50.75	74.00	-23.25	Peak	100	181	P
3	2483.50	-3.30	42.07	38.77	54.00	-15.23	Average	100	181	P
4	2483.50	-3.30	55.08	51.78	74.00	-22.22	Peak	100	181	P
5	4882.00	3.97	21.66	25.63	54.00	-28.37	Average	365	164	P
6	4882.00	3.97	51.76	55.73	74.00	-18.27	Peak	365	164	P
7	7323.00	8.84	17.69	26.53	54.00	-27.47	Average	168	183	P
8	7323.00	8.84	47.79	56.63	74.00	-17.37	Peak	168	183	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH39		:

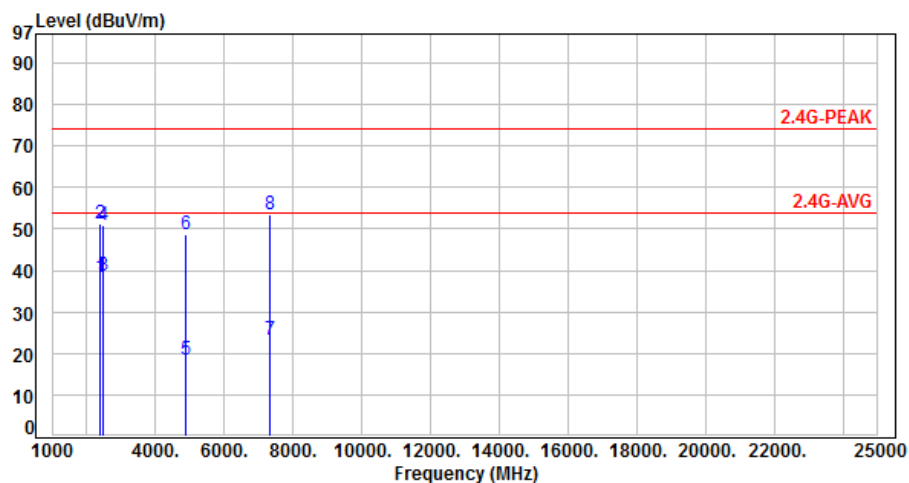

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	41.82	38.18	54.00	-15.82	Average	100	305	P
2	2390.00	-3.64	54.95	51.31	74.00	-22.69	Peak	100	305	P
3	2483.50	-3.30	41.91	38.61	54.00	-15.39	Average	100	305	P
4	2483.50	-3.30	54.22	50.92	74.00	-23.08	Peak	100	305	P
5	4882.00	3.97	14.64	18.61	54.00	-35.39	Average	100	113	P
6	4882.00	3.97	44.74	48.71	74.00	-25.29	Peak	100	113	P
7	7323.00	8.84	14.56	23.40	54.00	-30.60	Average	100	168	P
8	7323.00	8.84	44.66	53.50	74.00	-20.50	Peak	100	168	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH78		:	

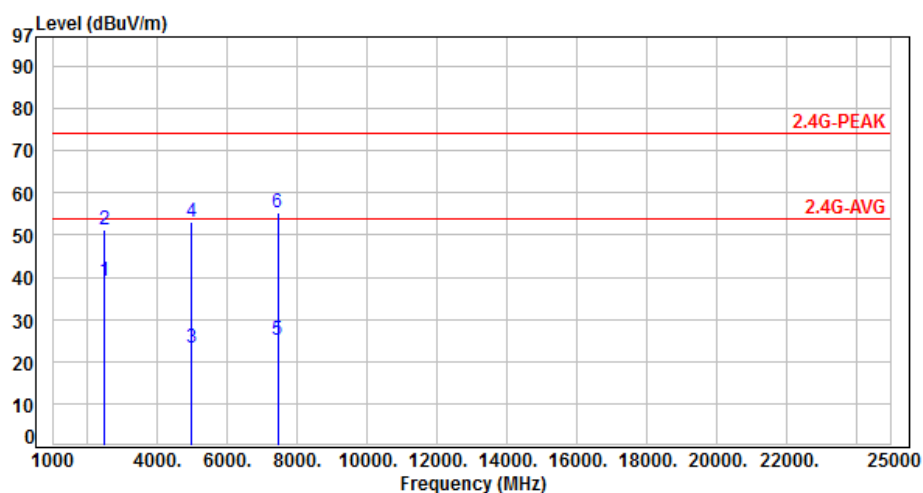

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	42.28	38.98	54.00	-15.02	Average	100	169	P
2	2483.50	-3.30	54.72	51.42	74.00	-22.58	Peak	100	169	P
3	4960.00	4.21	18.97	23.18	54.00	-30.82	Average	340	186	P
4	4960.00	4.21	49.07	53.28	74.00	-20.72	Peak	340	186	P
5	7440.00	8.98	16.21	25.19	54.00	-28.81	Average	176	181	P
6	7440.00	8.98	46.31	55.29	74.00	-18.71	Peak	176	181	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH78		:

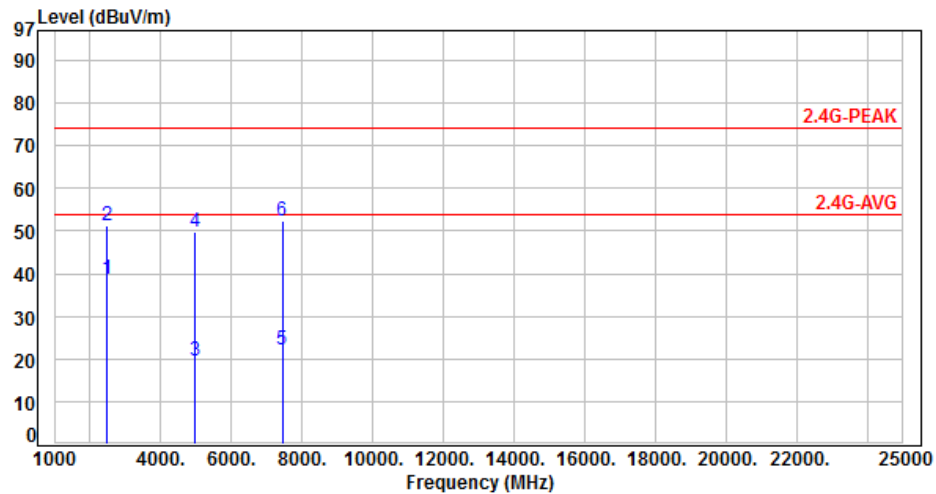

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	42.15	38.85	54.00	-15.15	Average	100	308	P
2	2483.50	-3.30	54.68	51.38	74.00	-22.62	Peak	100	308	P
3	4960.00	4.21	15.48	19.69	54.00	-34.31	Average	100	152	P
4	4960.00	4.21	45.58	49.79	74.00	-24.21	Peak	100	152	P
5	7440.00	8.98	13.20	22.18	54.00	-31.82	Average	100	315	P
6	7440.00	8.98	43.30	52.28	74.00	-21.72	Peak	100	315	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



7.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



8. Test of Conducted Spurious Emission

8.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 7.8.8


Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

8.3 Test Setup Layout




8.4 Test Result and Data






Note: Test plots refer to the following pages.



Modulation Type: GFSK, CH00






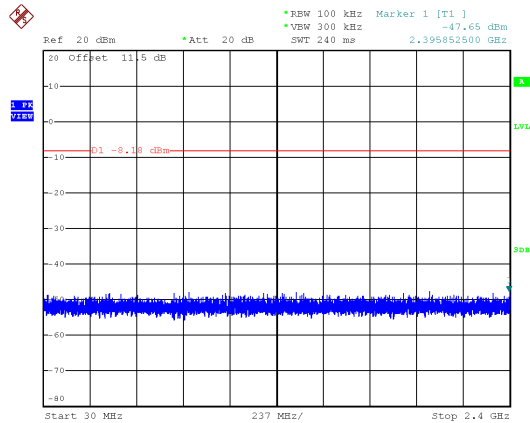


Modulation Type: GFSK, CH39

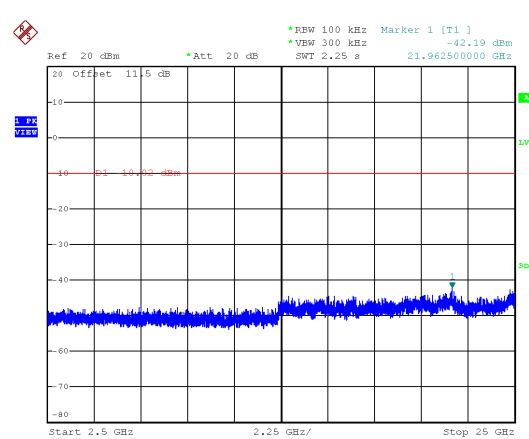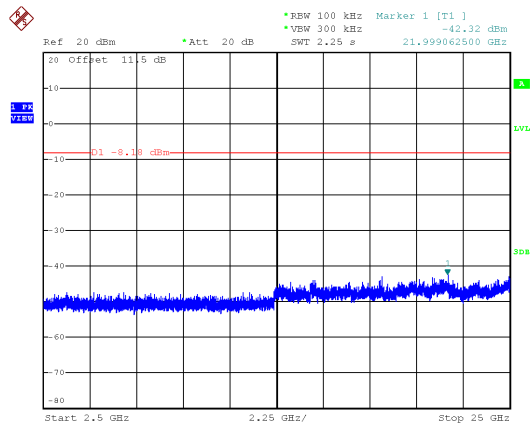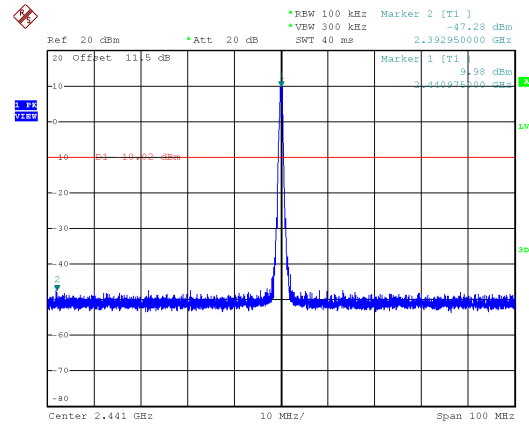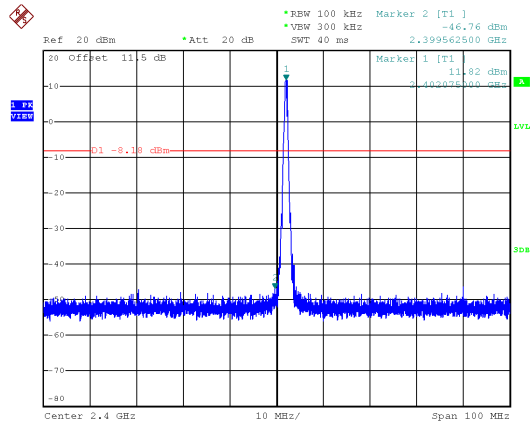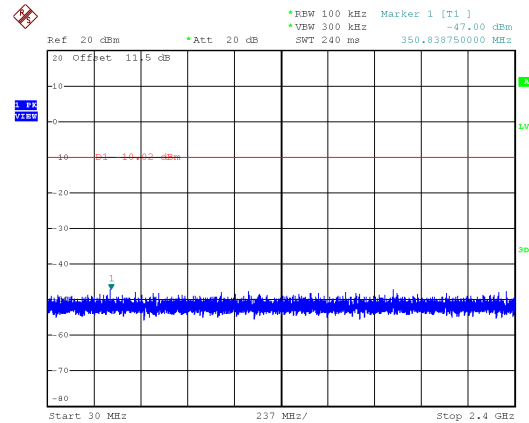




Modulation Type: GFSK, CH78

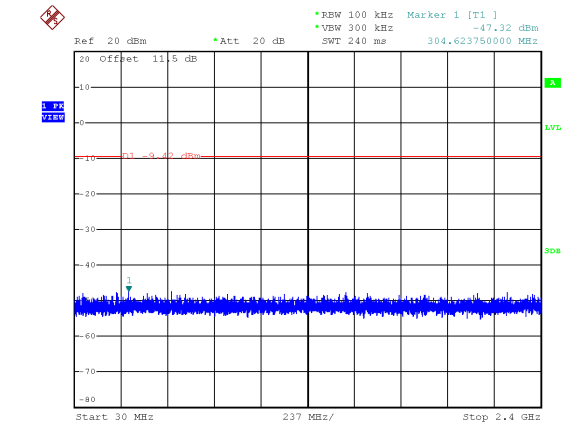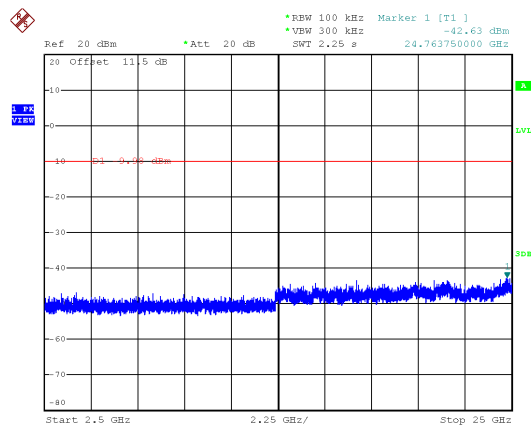
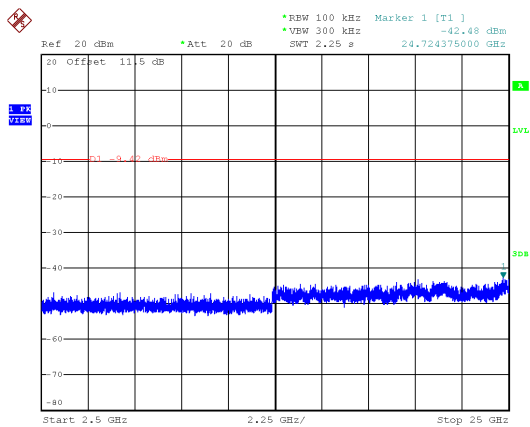
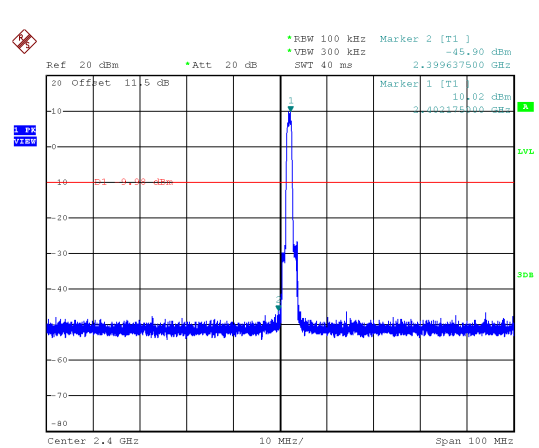
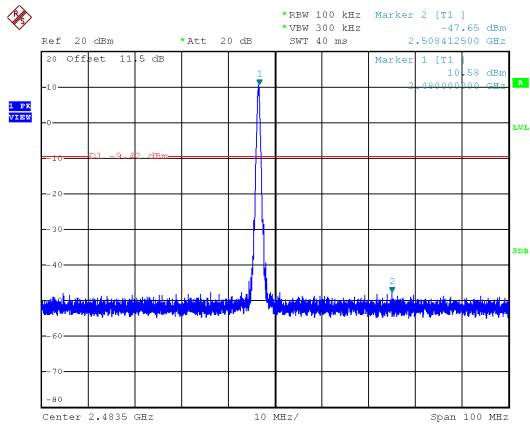
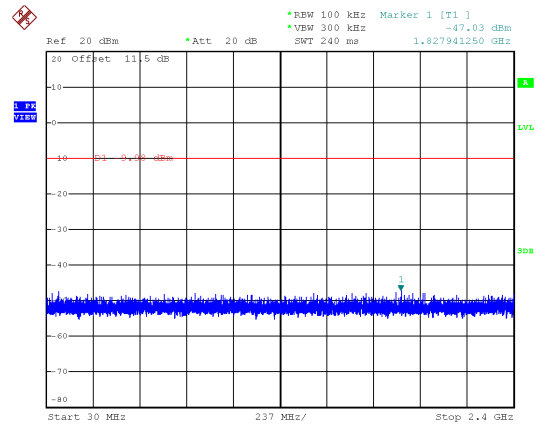
Modulation Type: $\pi/4$ -DQPSK, CH00



Modulation Type: $\pi/4$ -DQPSK, CH39

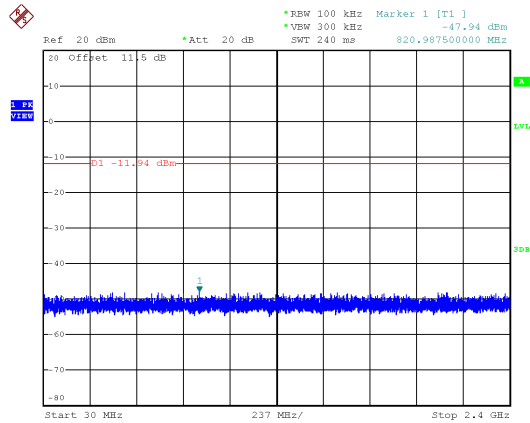


Modulation Type: $\pi/4$ -DQPSK, CH78

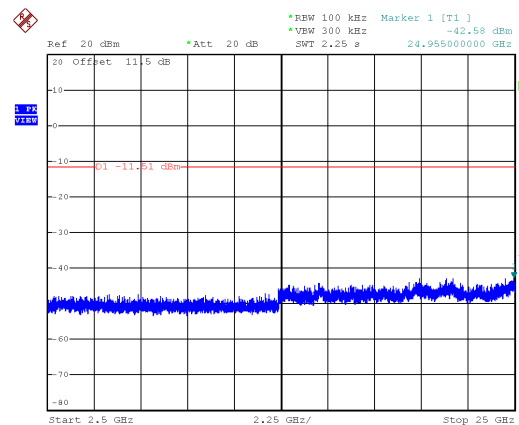
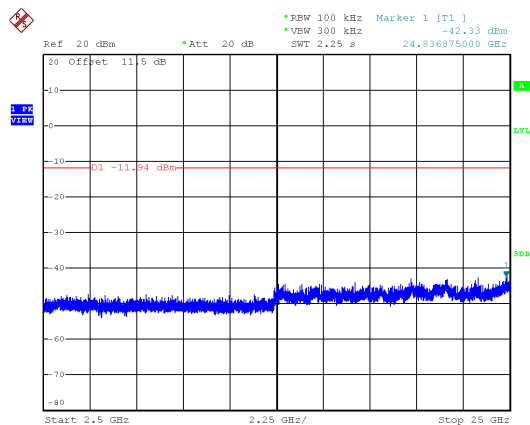
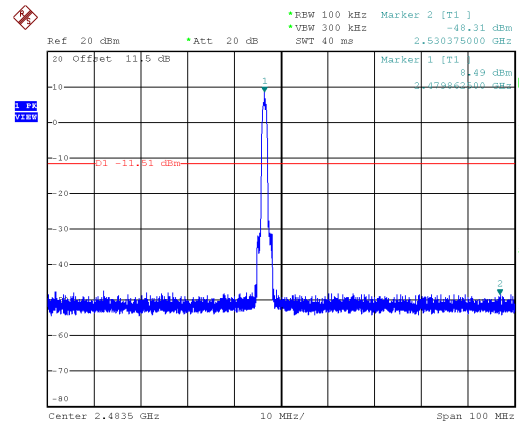
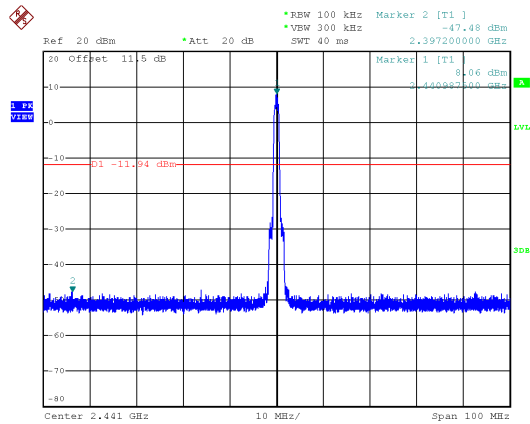
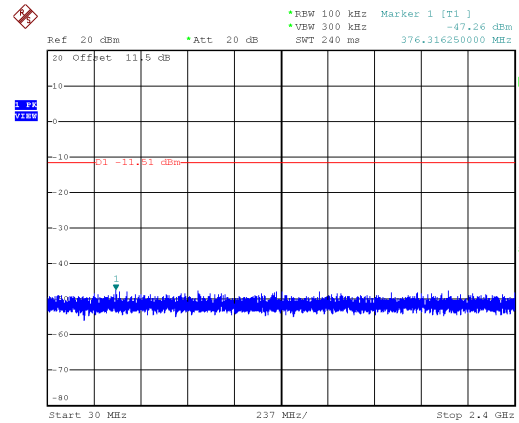




Modulation Type: 8DPSK, CH00



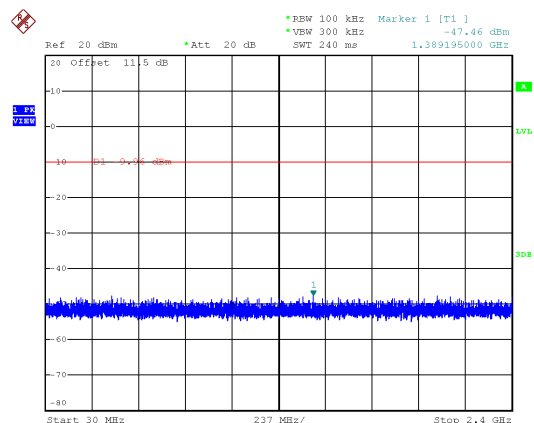


Modulation Type: 8DPSK, CH39

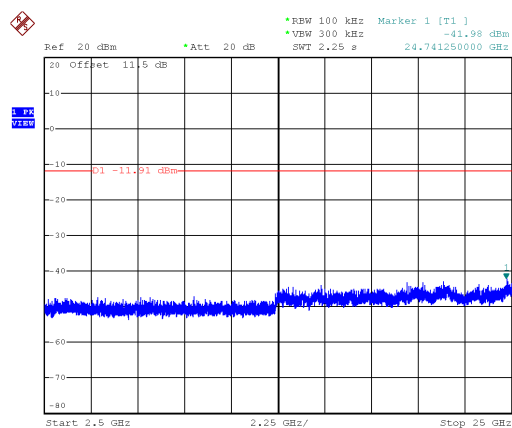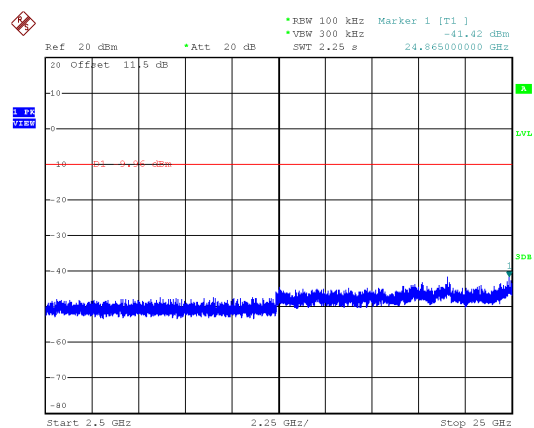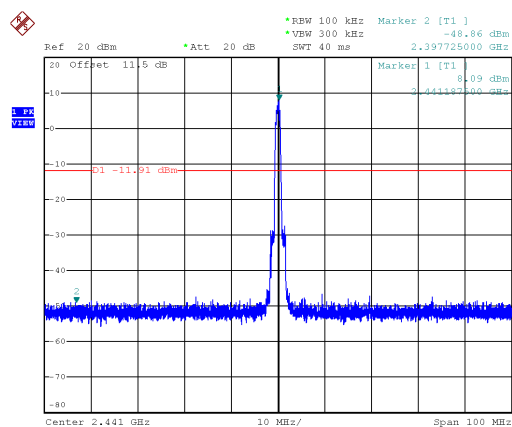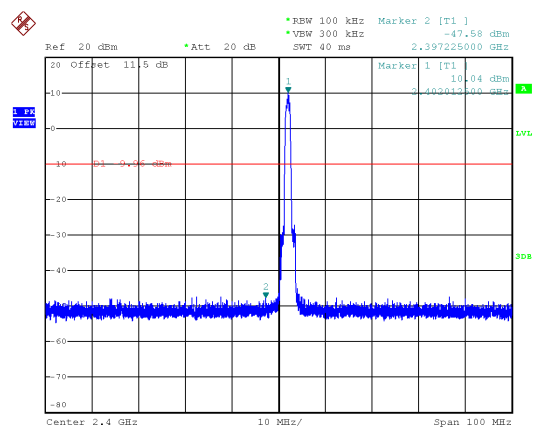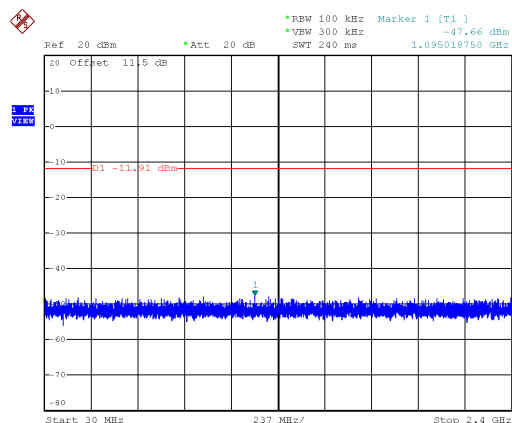




Modulation Type: 8DPSK, CH78



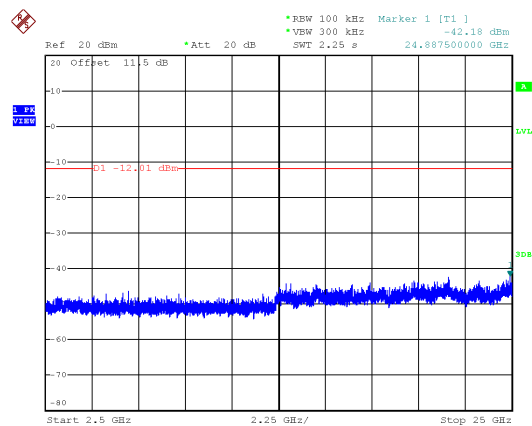
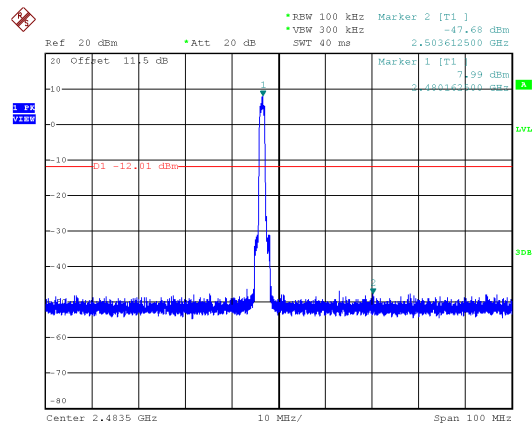
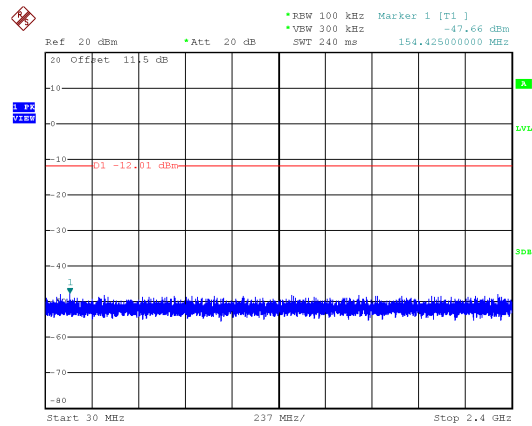




Hopping Mode:
Modulation Type: GFSK



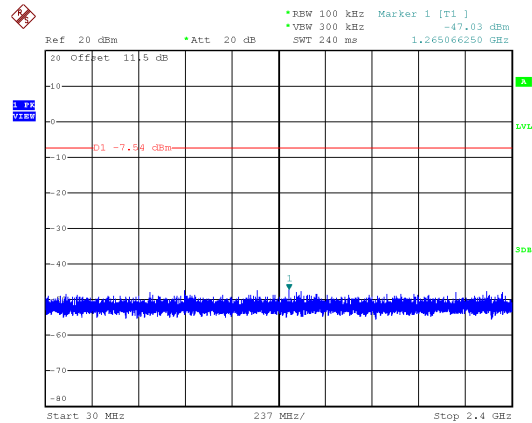


Modulation Type: $\pi/4$ -DQPSK

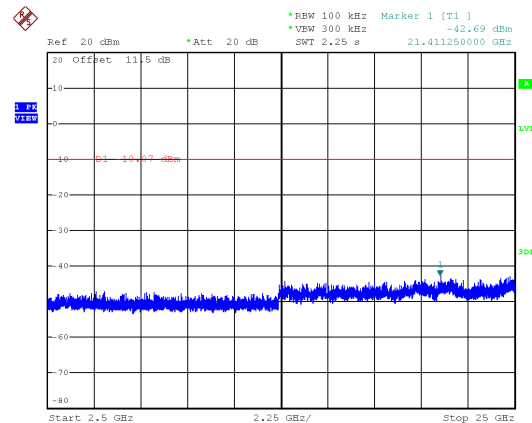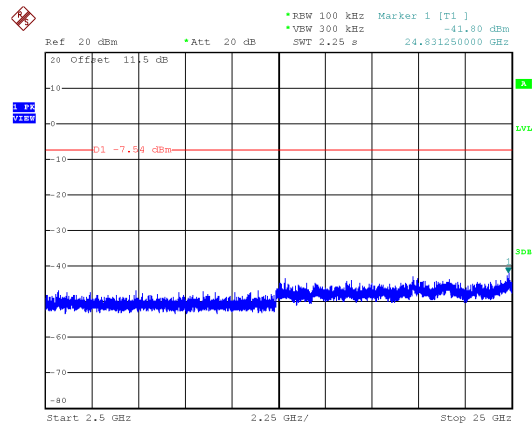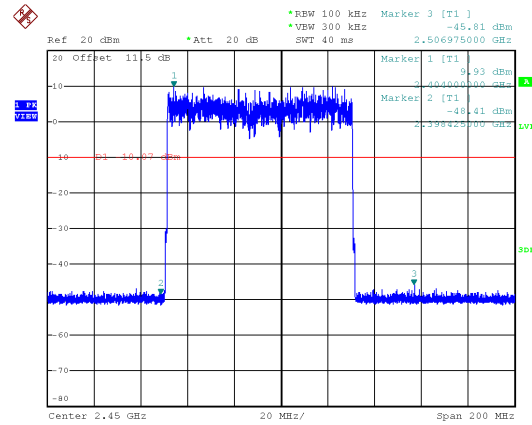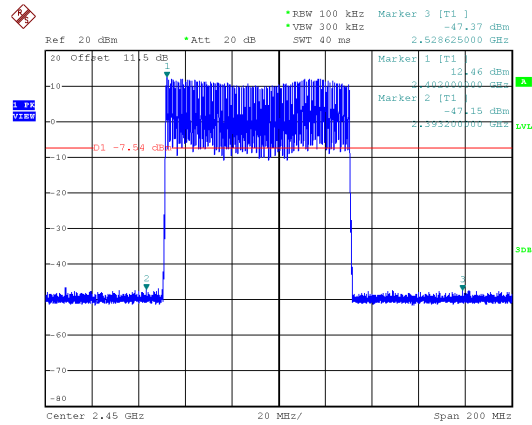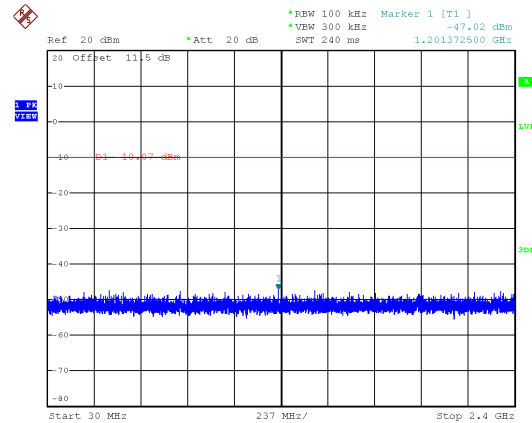



Modulation Type: 8DPSK

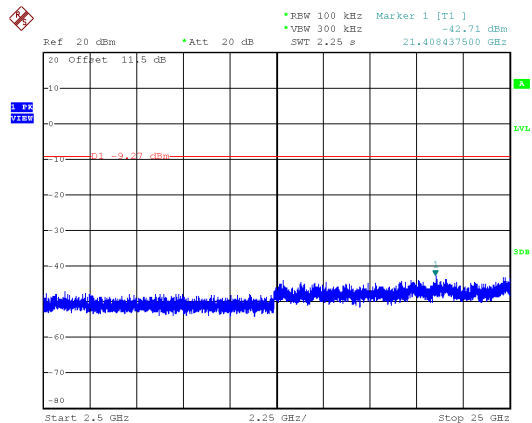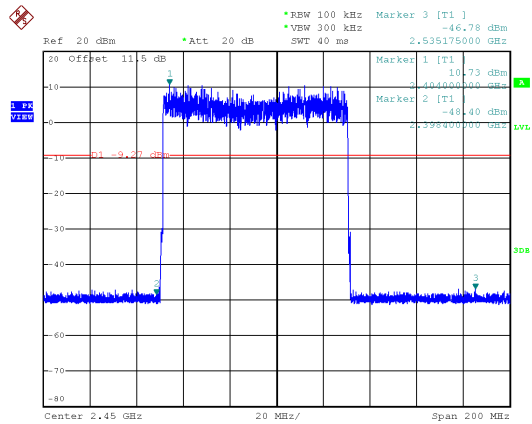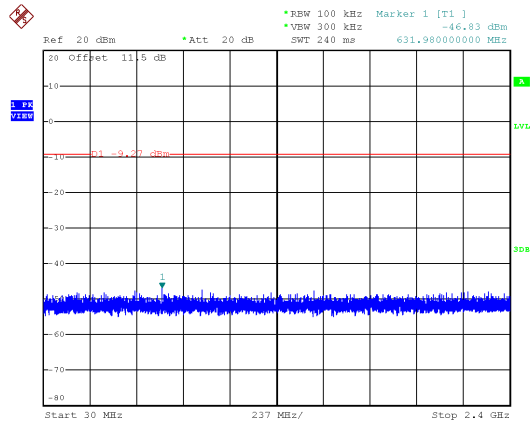



9. 20dB Bandwidth Measurement Data

9.1 Test Limit


For reference data.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 6.9

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the 20dB bandwidth and VBW to approximately three time RBW..
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

9.3 Test Setup Layout





9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth (MHz)
GFSK	0	2402	0.960	0.640
	39	2441	0.980	0.653
	78	2480	0.970	0.647
$\pi/4$ -DQPSK	0	2402	1.300	0.867
	39	2441	1.290	0.860
	78	2480	1.300	0.867
8DPSK	0	2402	1.300	0.867
	39	2441	1.290	0.860
	78	2480	1.300	0.867




20dB Bandwidth


Modulation Type: GFSK
CH00

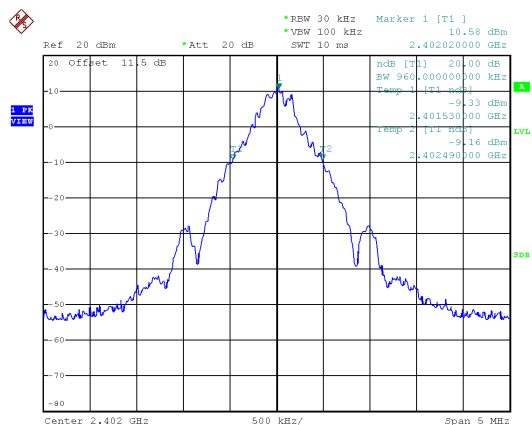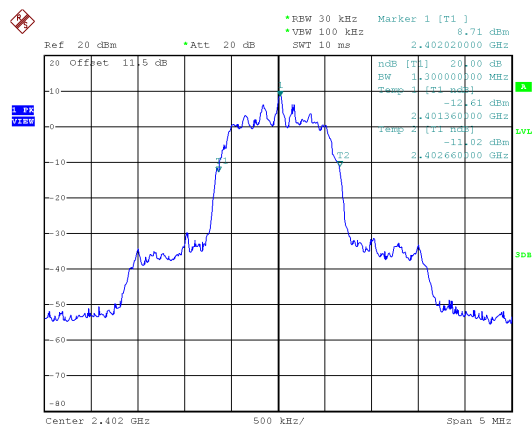Modulation Type: $\pi/4$ -DQPSK
CH00


CH39

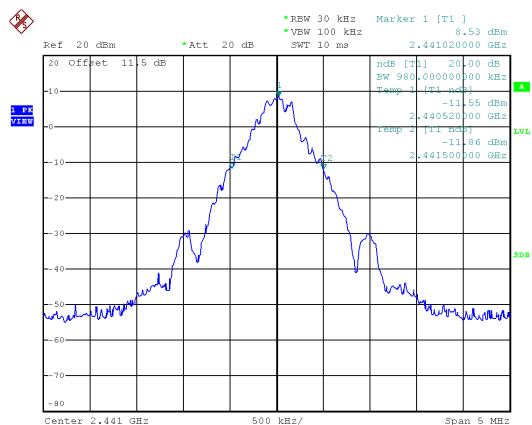


CH39

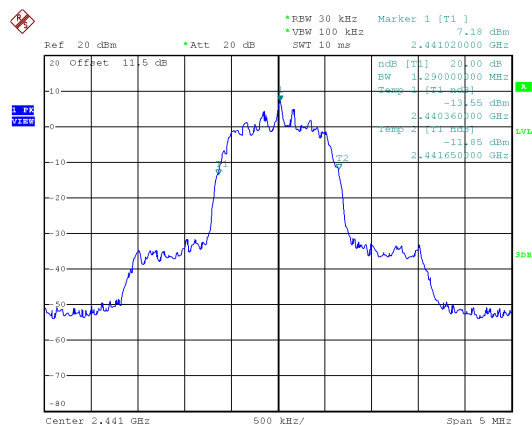

CH78

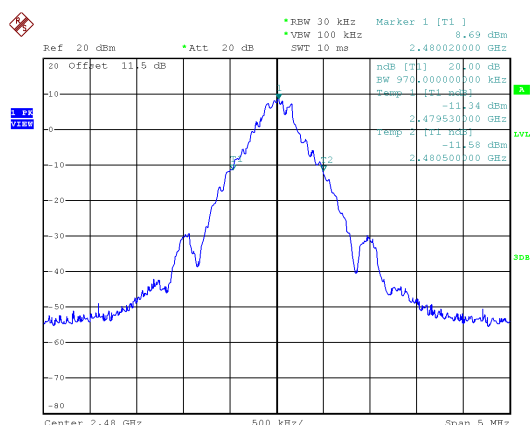


CH78

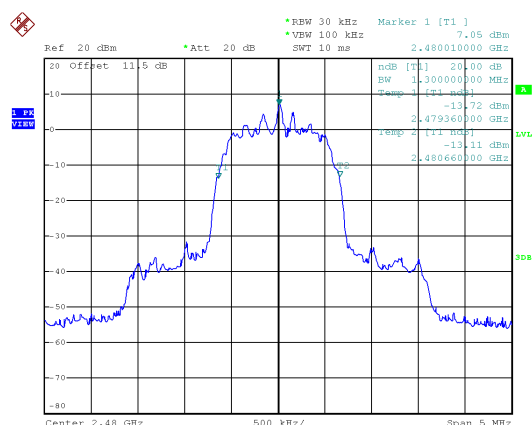





20dB Bandwidth
Modulation Type: 8DSPK
CH00

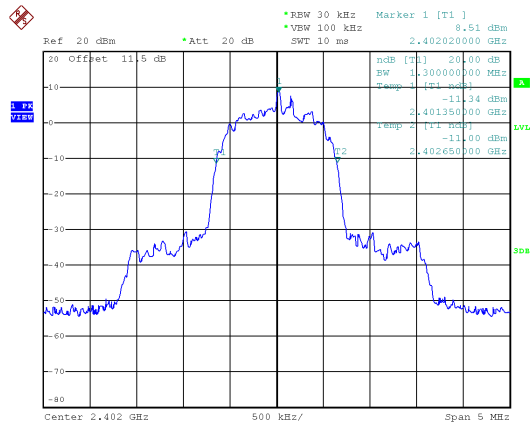

CH39

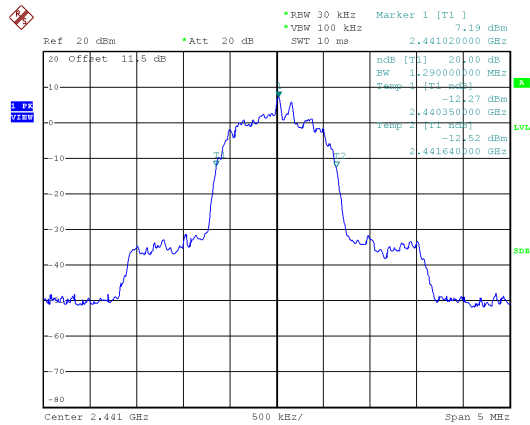

CH78

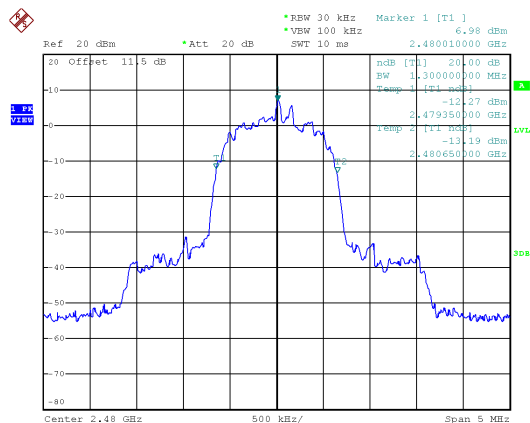



10. Carrier Frequency Separation

10.1 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.2

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 300 KHz and VBW to 1000 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

10.3 Test Setup Layout




10.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	0	2402	1.002	0.640
	39	2441	1.002	0.653
	78	2480	1.002	0.647
$\pi/4$ -DQPSK	0	2402	1.002	0.867
	39	2441	1.002	0.860
	78	2480	1.002	0.867
8DPSK	0	2402	1.002	0.867
	39	2441	1.002	0.860
	78	2480	1.002	0.867




Modulation Type: GFSK
CH00

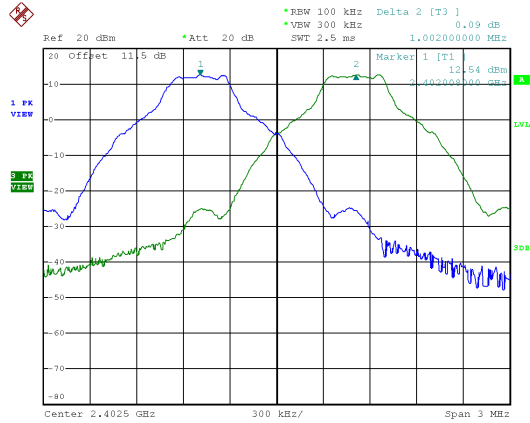


Modulation Type: $\pi/4$ -DQPSK
CH00

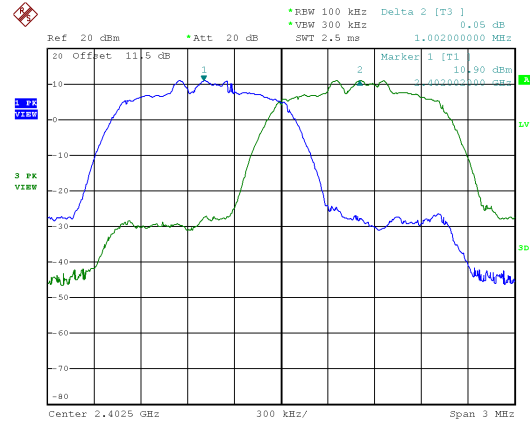


CH39

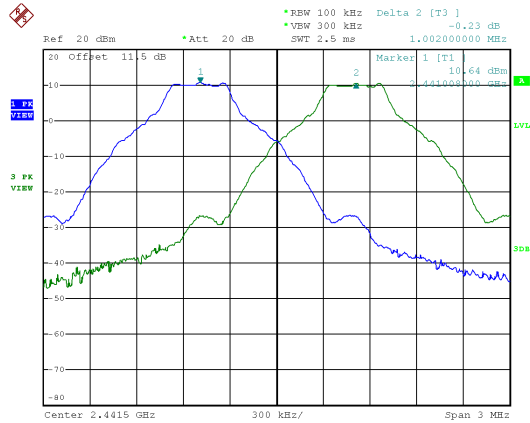


CH39

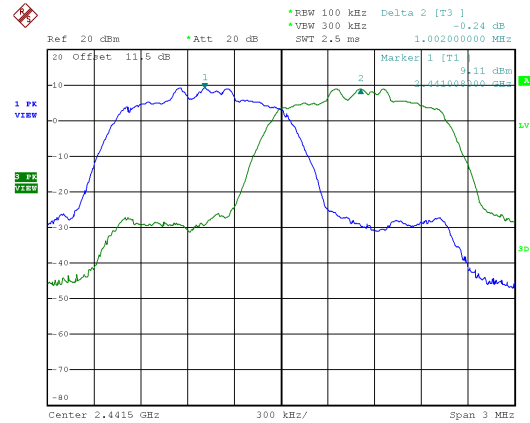

CH78

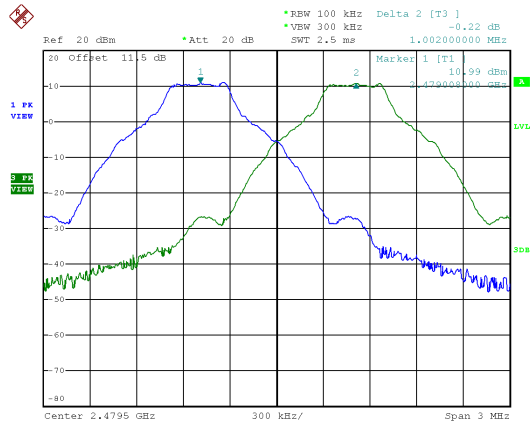


CH78

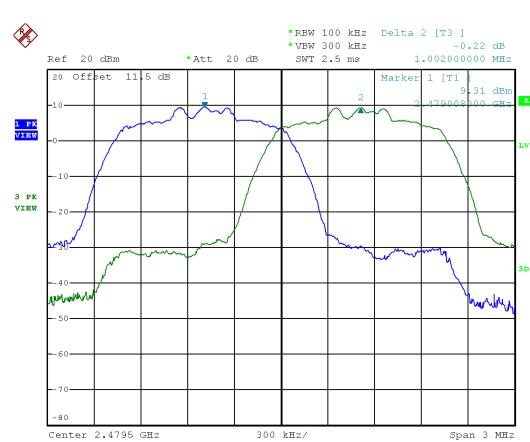





Modulation Type: 8DSPK
CH00

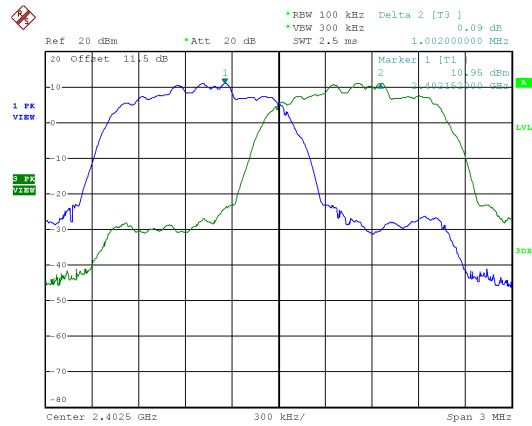

CH39

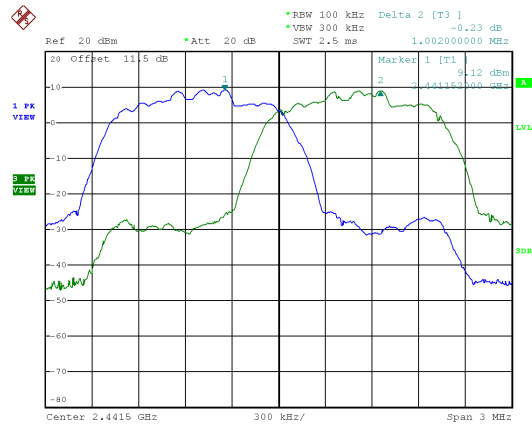

CH78

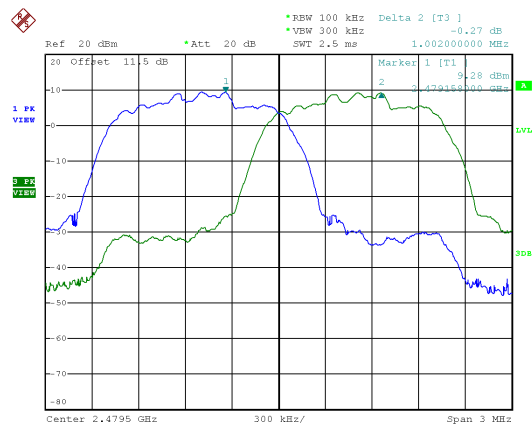



11. Dwell Time on each channel

11.1 Test Limit


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.4

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

11.3 Test Setup Layout





11.4 Test Result and Data

Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK-DH1	2402	0.420	320.10	134.44	400
GFSK-DH3	2402	1.680	159.90	268.63	400
GFSK-DH5	2402	2.940	106.81	314.02	400
$\pi/4$ -DQPSK-DH1	2402	0.430	320.10	137.64	400
$\pi/4$ -DQPSK-DH3	2402	1.680	159.90	268.63	400
$\pi/4$ -DQPSK-DH5	2402	2.960	106.81	316.16	400
8DPSK-DH1	2402	0.430	320.10	137.64	400
8DPSK-DH3	2402	1.680	159.90	268.63	400
8DPSK-DH5	2402	2.940	106.81	314.02	400



Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 8 (20 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
AFH-DH1	2402-2421	0.420	160.00	67.20	400
AFH-DH3	2402-2421	1.680	80.00	134.40	400
AFH-DH5	2402-2421	2.940	53.33	156.79	400





Modulation Type: GFSK(DH1)

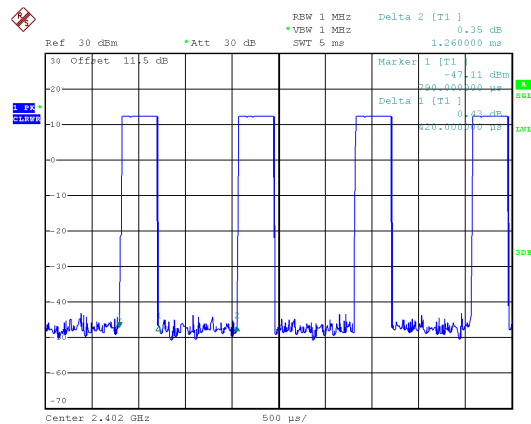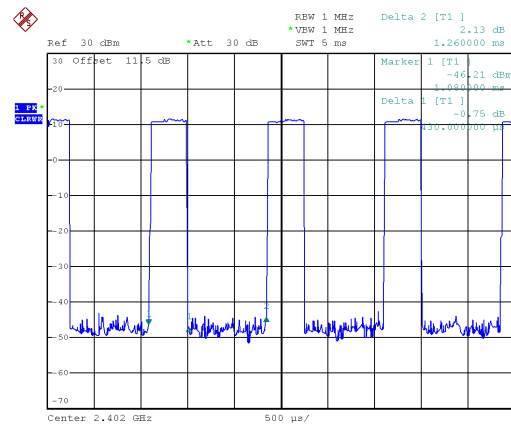Modulation Type: $\pi/4$ -DQPSK (DH1)

Modulation Type: GFSK(DH3)

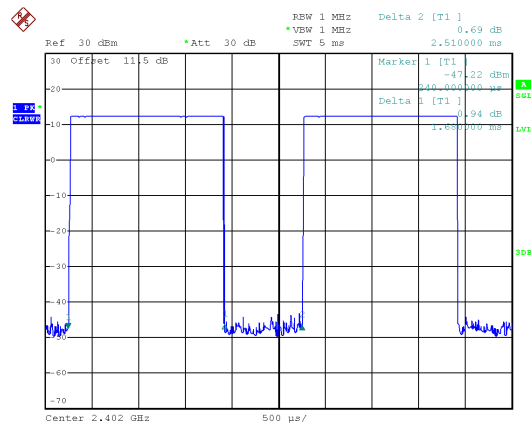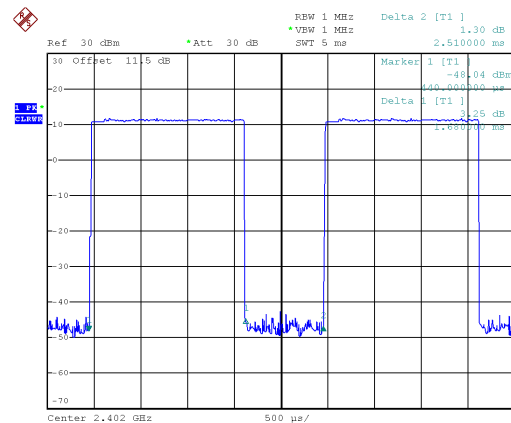
Modulation Type: $\pi/4$ -DQPSK (DH3)

Modulation Type: GFSK(DH5)

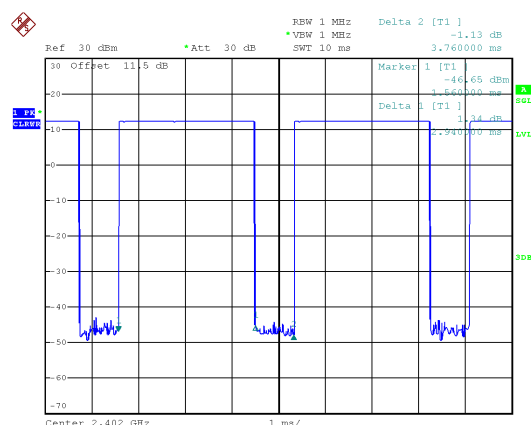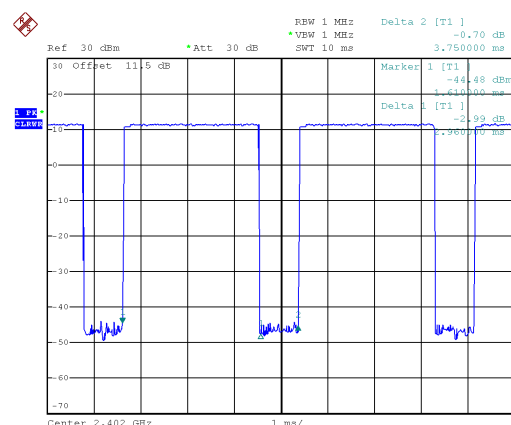
Modulation Type: $\pi/4$ -DQPSK (DH5)




Modulation Type: 8DSPK (DH1)

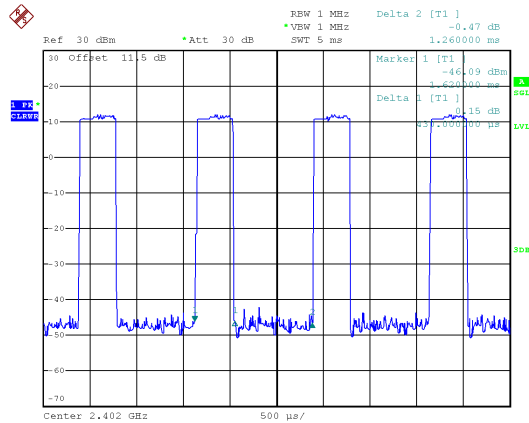


Modulation Type: AFH (DH1)

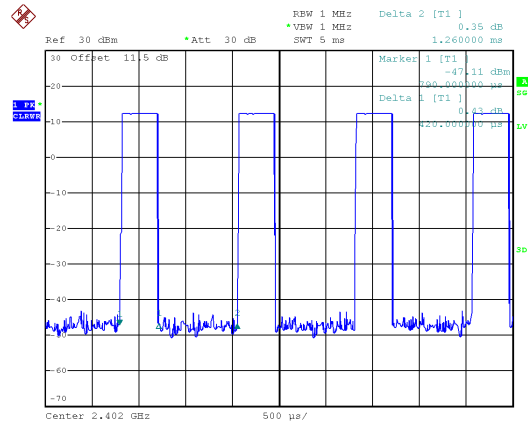


Modulation Type: 8DSPK (DH3)

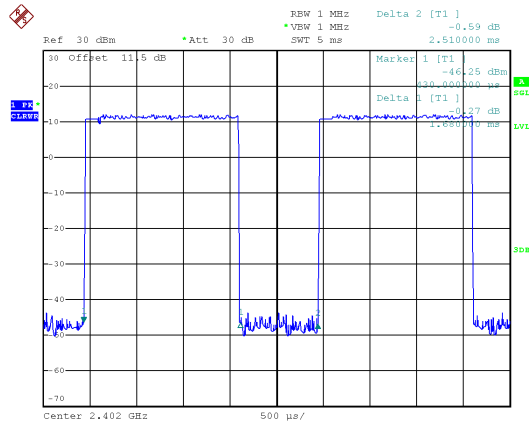


Modulation Type: AFH (DH3)

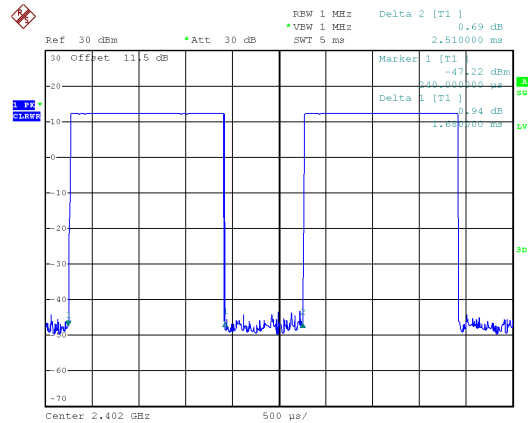

Modulation Type: 8DSPK (DH5)

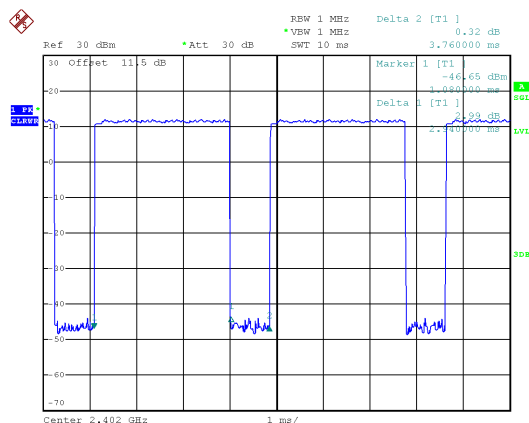

Modulation Type: AFH (DH5)

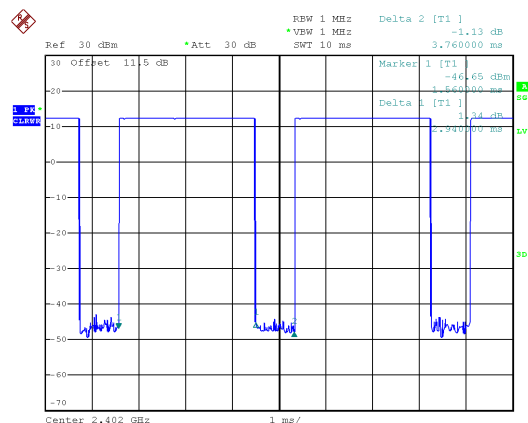



12. Number of Hopping Channels

12.1 Test Limit


Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

12.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.3

- The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

12.3 Test Setup Layout




12.4 Test Result and Data


Modulation Type	Hopping Channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79




Modulation Type: GFSK

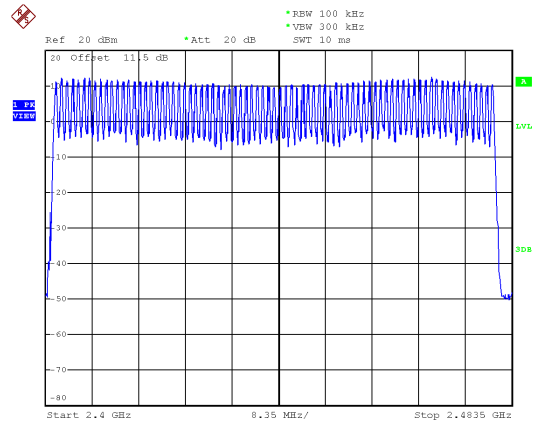

Modulation Type: $\pi/4$ -DQPSK

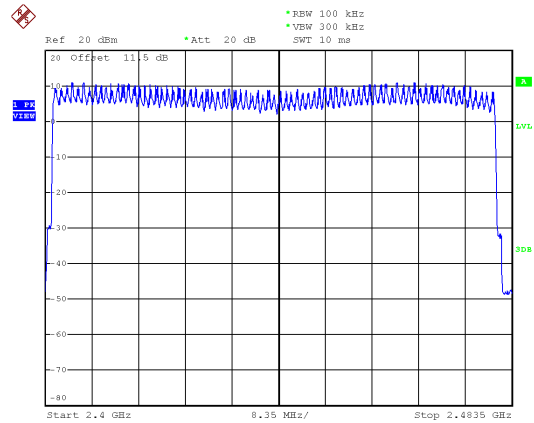

Modulation Type: 8DPSK

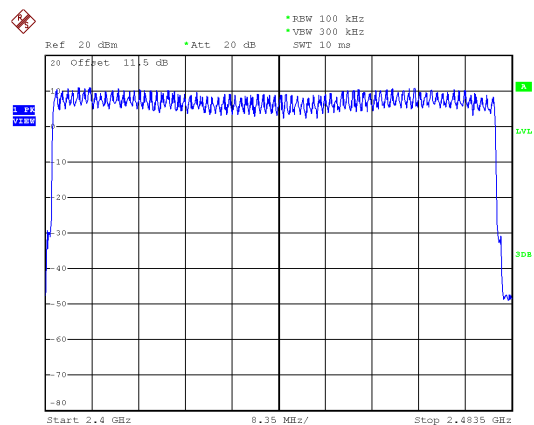



13. Maximum Peak Output Power

13.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.


13.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.5

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter.

Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

13.3 Test Setup Layout





13.4 Test Result and Data

Modulation Type	Setting	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	9	0	2402	12.82	19.143
	9	39	2441	10.89	12.274
	9	78	2480	11.19	13.152
$\pi/4$ -DQPSK	9	0	2402	12.62	18.281
	9	39	2441	10.77	11.940
	9	78	2480	11.14	13.002
8DPSK	9	0	2402	12.84	19.231
	9	39	2441	10.93	12.388
	9	78	2480	11.35	13.646

Modulation Type	Setting	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	9	0	2402	12.70	18.621
	9	39	2441	10.74	11.858
	9	78	2480	11.04	12.706
$\pi/4$ -DQPSK	9	0	2402	10.53	11.298
	9	39	2441	8.66	7.345
	9	78	2480	8.86	7.691
8DPSK	9	0	2402	10.54	11.324
	9	39	2441	8.65	7.328
	9	78	2480	8.81	7.603

*Average power is for reference only

AFH Mode

Modulation Type	Setting	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	9	0-19	2402-2421	12.45	17.579
$\pi/4$ -DQPSK	9	0-19	2402-2421	12.34	17.140
8DPSK	9	0-19	2402-2421	12.57	18.072

AFH Mode

Modulation Type	Setting	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	9	0-19	2402-2421	12.32	17.061
$\pi/4$ -DQPSK	9	0-19	2402-2421	10.13	10.304
8DPSK	9	0-19	2402-2421	10.14	10.328

*Average power is for reference only