

Report No.:	SUCR240600021201
Rev.:	01
Page:	1 of 55

TEST REPORT

Application No.:	SUCR2406000212MO
Applicant:	Asiatelco Technologies Co.
Address of Applicant:	#68 HuaTuo Road, Building-8, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China
Manufacturer:	Asiatelco Technologies Co.
Address of Manufacturer:	#68 HuaTuo Road, Building-8, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China
EUT Description:	4G/5G Wi-Fi Router
Model No.:	RE600 RE600-V RE600-A RE600-D RE610
Trade Mark:	ATEL
FCC ID:	XYO-RE600
Standards:	47 CFR Part 2 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90 47 CFR Part 96
Date of Receipt:	June 20, 2024
Date of Test:	June 29, 2024 to July 22, 2024
Date of Issue:	July 24, 2024
Test Result :	PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Nature Shen

well wei

Prepared by: Nature Shen/ Project Manager

Approved by: Well Wei/ Wireless Laboratory Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions-sepy Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions-Sepy Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles textent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. 1td Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	2 of 55

Version

		Revision Record		
Version	Chapter	Date	Modifier	Remark
01		July 24, 2024		Original

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 3 of 55

Contents

Versio	on		2
1	Tes	st Summary	5
1.		UMTS Band 5/LTE Band 5/26(824~849 MHz)	5
1.	.2	UMTS Band 2 /LTE Band 2 /25	
1.	.3	UMTS Band 4 /LTE Band 4 /66	.7
1.	.4	LTE Band 7/41/CA 41C	.8
1.	.5	LTE CA_41C(HPUE)	10
1.	.6	LTE Band 12/17	
1.	.7	LTE Band 13	
1.	.8	LTE Band 14	14
1.	.9	LTE Band 26(814~824 MHz)	16
1.	.10	LTE Band 30	17
1.	.11	LTE Band 71	19
1.	.12	LTE Band 48	20
2	Ger	neral Information	23
2.	.1	Details of Client	23
2.	.2	Test Location	23
2.	.3	Test Facility	23
2.	.4	General Description of EUT	24
2.	.5	Test Mode	25
2.	.6	Test Environment	25
2.	.7	Description of Support Units	25
2.	.8	Technical Specification	26
2.	.9	Test Frequencies	28
3	Des	scription of Tests	39
3.	.1	Conducted Output Power	39
3.	.2	Effective (Isotropic) Radiated Power of Transmitter	40
3.	.3	EIRP Power Density	41
3.	.4	Occupied Bandwidth	42
3.	.5	Band Edge at Antenna Terminals	
3.	.6	Spurious And Harmonic Emissions at Antenna Terminal	
3.	.7	Peak-Average Ratio	
3.	.8	Field Strength of Spurious Radiation	
3.	.9	Frequency Stability / Temperature Variation	48
3.	.10	Test Setups	49
Conditions.a	spx and, fo	d by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-orelectronic Documents at http://www.sgs.com/en/Terms-and-conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions for a divised that information issues defined therein. Any holder of this document is advised that information issues defined therein. Any holder of this document is exposibility is to its the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's ending the responsibility is to its its the company's finding to the time of its intervention only and within the limits of Client's instructions, if any. The Company's finding to the time of its intervention only and within the limits of Client's instructions, if any. The Company's finding to the time of its intervention only and within the limits of Client's instructions, if any. The Company's finding to the time of its intervention only and within the limits of Client's instructions, if any. The Company's finding to the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole that information is the company's finding to the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole that information is the company's finding to the tintervention on the time of its interventi	

contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 4 of 55

	3.11 Test Conditions	
4	Main Test Instruments	
5		54
6	-	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	5 of 55

1 Test Summary

1.1 UMTS Band 5/LTE Band 5/26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.3&B.6&B.14	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report SAR/2021/4000901	
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 2 of Appendix B.3&B.6&B.14	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	±2.5ppm.	Reference r SAR/2021/40	•

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-
Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-
Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information
contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its
Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be
eproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful
and offenders may be prosecuted to the fullest extent of the law.
Inless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	6 of 55

1.2 UMTS Band 2 /LTE Band 2 /25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1&B.4&B.12	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference r SAR/2021/40	
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 2 of Appendix B.1&B.4&B.12	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Reference r SAR/2021/40	

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions-sepy Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions-Sepy Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles textent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. 1td Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	7 of 55

1.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.2&B.5&B.18	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference r SAR/2021/40	
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 2 of Appendix B.2&B.5&B.18	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1)(2) §27.54	Within authorized bands of operation/frequency block.	Reference r SAR/2021/40	

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory Sol



Report No.:	SUCR240600021201
Rev.:	01
Page:	8 of 55

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.7&B.16&B.20	Pass
Peak- Average Ratio		≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(m)(4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Reference re SAR/2021/400	
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25 dBm/ 1 MHz 1 MHz 9 kHz 9.5 MHz XMHz 10 th harmonics X=Max {6MHz, EBW}		

1.4 LTE Band 7/41/CA_41C


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	9 of 55

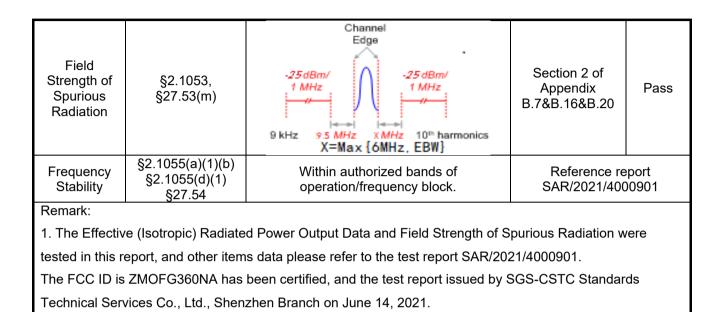

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	10 of 55

FCC Rule No. Test Item **Requirements** Test Result Verdict Effective (Isotropic) §2.1046. Section 1 of Radiated EIRP ≤ 2W Pass §27.50(h)(2) Appendix B.20 Power Output Data Peak-≤13 dB Average Ratio OBW: No limit. Bandwidth §2.1049 EBW: No limit. For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more Band Edges §2.1051, than X megahertz from the channel edge, Compliance §27.53(m)(4) where X is the greater of 6 megahertz or Reference report the actual emission bandwidth as defined SUZR/2021/7002001 in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Channel Edge Spurious -25 dBm/ -25dBm/ Emission at §2.1051, 1 MHz 1 MHz Antenna §27.53(m) Terminals 10th harmonics 9 kHz 95 MHz X MHz X=Max {6MHz, EBW}

1.5 LTE CA_41C(HPUE)

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.forms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	11 of 55

Field Strength of Spurious Radiation	§2.1053, §27.53(m)	P kHz 9 5 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 2 of Appendix B.20	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference re SUZR/2021/70	
Remark: 1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were				
tested in this report, and other items data please refer to the test report SUZR/2021/7002001.				
The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards				

Technical Services (Suzhou) Co., Ltd. on October 30, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	12 of 55

1.6 LTE Band 12/17

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.8&B.11	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Reference re SAR/2021/40	
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])		
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 2 of Appendix B.8&B.11	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference re SAR/2021/40	
Pomark:				

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were

tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	13 of 55

1.7 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.9	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(c)	≤ 43+10log10(P[Watts])		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	 ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. 	Reference SAR/2021/4	
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 2 of Appendix B.9	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference SAR/2021/4	

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereor oneflects the Company's find responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	14 of 55

1.8 LTE Band 14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §90.542(a)	ERP ≤ 3 W.	Section 1 of Appendix B.10	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Emission Mask	§2.1051 §90.210(b)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	Reference SAR/2021/4	
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	 (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and 		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.



Report No.:	SUCR240600021201
Rev.:	01
Page:	15 of 55

Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10 log (P) dB. FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788– 805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.		
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 2 of Appendix B.10	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Reference SAR/2021/4	•
Remark:	·			

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-
Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-
Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information
contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its
Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be
reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful
and offenders may be prosecuted to the fullest extent of the law.
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	16 of 55

1.9 LTE Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B.13	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Reference SAR/2021/40	•
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of- band emissions		
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of- band emissions	Section 2 of Appendix B.13	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Reference report SAR/2021/4000901	

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901. The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions-sepy Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions-Sepy Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles textent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. 1td Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	17 of 55

1.10 LTE Band 30

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective		Nequilements		Veruici
(Isotropic) Radiated Power Output Data	§2.1046, §27.50(a)(3)	EIRP ≤ 50mW/1MHz EIRP ≤ 250mW/5MHz	Section 1 of Appendix B.15	Pass
Peak-Average Ratio		FCC: Limit≤13 dB		
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(a)(4)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(a)(4)	 For: Unsub Display Control of the Cont	Reference SAR/2021/4	.000901

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions-sepy Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions-Sepy Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles textent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	18 of 55

Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the range of the operating frequency blocks	Reference SAR/2021/4	•
Field Strength of Spurious Radiation	§2.1053, §27.53(a)(4)	≤ -40dBm/MHz.	Section 2 of Appendix B.15	Pass
		between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;(iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.		

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	19 of 55

1.11 LTE Band 71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W	Section 1 of Appendix B.19	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report SAR/2021/4000901	
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])		
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 2 of Appendix B.19	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the authorized bands of operation.	Reference report SAR/2021/4000901	
	§27.54		0, (2021) 10	

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	20 of 55

1.12 LTE Band 48

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §96.41	EIRP ≤ 23dBm/10MHz	Section 1 of Appendix B.17	Pass
Peak-Average Ratio	§96.41	FCC: Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Adjacent Channel Leakage Ratio	§96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.		
Band Edges Compliance	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD- assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.	Reference SAR/2021/4	
Spurious Emission at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD- assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. (2) Additional protection levels. Notwithstanding		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's find information only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 Wireless Laboratory

www.sgsgroup.com.cn



Report No.:	SUCR240600021201
Rev.:	01
Page:	21 of 55

		paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.		
Field Strength of Spurious Radiation	§2.1053, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed –13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD- assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed –25 dBm/MHz. (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed –25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed –40dBm/MHz.	Section 2 of Appendix B.17	Pass
Frequency Stability	§2.1055, §96.41	Within authorized bands of operation/ frequency block.	Reference r SAR/2021/40	

Remark:

1. The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report SAR/2021/4000901.

2. (CBRS)End User Device additional requirement data please refer to SZCR210502103201.

The FCC ID is ZMOFG360NA has been certified, and the test report issued by SGS-CSTC Standards

Technical Services Co., Ltd., Shenzhen Branch on June 14, 2021.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn Wireless Laboratory



Report No.: SUCR240600021201 Rev.: 01 22 of 55 Page:

Remark: Model name: RE600, RE600-V, RE600-A, RE600-D, RE610

All the hardware of product are all the same, just different brand and model for different market. The RF parameters are the same.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-conditions/Terms-and-conditions.aspx Add, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.



Report No.: SUCR240600021201 01 Rev.: Page: 23 of 55

2 **General Information**

2.1 Details of Client

Applicant:	Asiatelco Technologies Co.
Address of Applicant:	#68 HuaTuo Road, Building-8, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China
Manufacturer:	Asiatelco Technologies Co.
Address of Manufacturer:	#68 HuaTuo Road, Building-8, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions-service-printed-overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions-Service-printed-overleat, available on request or accessible at http://www.sgs.com/en/lems-and-Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions for accounts on printed-overleat, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-ends-conditions-com/en/lems-and-Conditions-end-conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	24 of 55

2.4 General Description of EUT

		-				
EUT Description:	4G/5G Wi-Fi Router					
	RE600					
Model No.:	RE600-V RE600-A					
model No	RE600-D					
	RE610					
Trade Mark:	ATEL					
Hardware Version:	P2					
Software Version:	CPE5_RE600_00_\	/1.0.2				
Power Supply:	12V	-				
IMEI:	RF Conducted	86242	24050265452			
	RSE	86242	4050218238			
Antenna Type:	PCB Antenna					
HPUE Power Class:	LTE Band 41; LTE CA_41C					
	WCDMA Band II:	3.59d	Bi (Ant0)	WCDMA Bar	nd IV:	3.83dBi (Ant0)
	WCDMA Band V:	3.53d	Bi (Ant0)			
	LTE Band 2:	3.59d	Bi (Ant0)	LTE Band 4:		3.83dBi (Ant0)
	LTE Band 5:	3.53d	Bi (Ant0)	LTE Band 7:		2.37dBi (Ant0)
	LTE Band 12:	3.19d	Bi (Ant0)	LTE Band 13	:	1.92dBi (Ant0)
	LTE Band 14:	2.41d	Bi (Ant0)	LTE Band 17	':	3.13dBi (Ant0)
Antenna Gain:	LTE Band 25:	3.65d	Bi (Ant0)	LTE Band 26	6:	3.53dBi (Ant0)
	LTE Band 30:	1.39d	Bi (Ant0)	LTE Band 41	:	3.72dBi (Ant0)
	LTE Band 48:	0dBi (Ant0)	LTE Band 66):	3.83dBi (Ant0)
	LTE Band 71:	2.79d	Bi (Ant0)	LTE CA_41C	:	3.72dBi (Ant0)
	Note: The antenna gain a manufacturer.	re deriv	ed from the g	ain information	report	provided by the
	0.8dB(Below 1GHz))	1.0dB(1.0~2	.4GHz)	1.2dB	6(2.4~3.4GHz)
RF Cable:	1.5dB(Above 3.4GHz)					

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	25 of 55

2.5 Test Mode

Test Mode	Test Modes Description
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM3	LTE system, 64QAM modulation
LTE/TM4	LTE system, 256QAM modulation
Remark: The test mode(s) are selected according to relevant radio technology specifications.	

2.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(℃)	Voltage(V)
NTNV	22~23	12
Remark:		
NV: Normal Voltage		
NT: Normal Temperature		

2.7 Description of Support Units

The EUT has been tested as an independent unit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	26 of 55

2.8 Technical Specification

Characteristics	Description				
Radio System Type	🖾 UMTS	⊠ LTE			
	Band		ТХ		RX
	UMTS Band	II	1850 to 1910 M	/IHz	1930 to 1990 MHz
	UMTS Band	IV	1710 to 1755 M	/IHz	2110 to 2155 MHz
	UMTS Band	V	824 to 849 MH	z	869 to 894 MHz
	LTE Band 2		1850 to 1910 M	/IHz	1930 to 1990 MHz
	LTE Band 4		1710 to 1755 M	/Hz	2110 to 2155 MHz
	LTE Band 5		824 to 849 MH	Z	869 to 894 MHz
	LTE Band 7		2500 to 2570 N	/Hz	2620 to 2690 MHz
	LTE Band 12		699 to 716 MH	Z	729 to 746 MHz
	LTE Band 13		777 to 787 MHz		746 to 756 MHz
	LTE Band 14		788 to 798 MHz		758 to 768 MHz
Supported Frequency Range	LTE Band 17		704 to 716 MH	Z	734 to 746 MHz
	LTE Band 25		1850 to 1915M	Hz	1930 to 1995 MHz
	LTE Band 26 (814 to 824 MHz)		814 to 824MHz		859 to 869 MHz
	LTE Band 26 (824 to 849 MHz)		824 to 849 MHz 869		869 to 894 MHz
	LTE Band 30		2305 to 2315 MHz		2350 to 2360 MHz
	LTE Band 41		2496 to 2690MHz		2496 to 2690MHz
	LTE Band 48	5	3550 to 3700 MHz		3550 to 3700 MHz
	LTE Band 66	i	1710 to 1780 M	/Hz	2110 to 2200 MHz
	LTE Band 71		663 to 698 MH	Z	617 to 652 MHz
	LTE CA: LTE UL CA_4	41C; LTE UL	CA_2A-12A; LT	E UL CA_1	2A-66A;
	UMTS syster	n:	⊠5 MHz		
Supported Channel Bandwidth	LTE Band 2		⊠1.4 MHz ⊠3 MHz ⊠5 MHz ⊠10 MHz ⊠15 MHz ⊠20 MHz		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	27 of 55

LTE Band 4	⊠1.4 MHz	🖂3 MHz	⊠5 MHz	⊠10 MHz
	🛛 15 MHz	⊠20 MHz		
LTE Band 5	⊠1.4 MHz	🖂 3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 7	⊠5 MHz	⊠10 MHz	🛛 15 MHz	⊠20 MHz
LTE Band 12	⊠1.4 MHz	🖂 3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 13	⊠5 MHz	⊠10 MHz		
LTE Band 14	⊠5 MHz	⊠10 MHz		
LTE Band 17	⊠5 MHz	⊠10 MHz		
LTE Band 25	⊠1.4 MHz	🖂 3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 25	⊠15 MHz	⊠20 MHz		
LTE Band 26(814-824)	⊠1.4 MHz	🖂 3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 26(824-849)	⊠1.4 MHz	🖂 3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 20(824-849)	⊠15 MHz			
LTE Band 30	⊠5 MHz	⊠10 MHz		
LTE Band 41	⊠5 MHz	⊠10 MHz	🛛 15 MHz	⊠20 MHz
LTE Band 48	⊠5 MHz	⊠10 MHz	🛛 15 MHz	⊠20 MHz
	⊠1.4 MHz	🖂 3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 66	⊠15MHz	⊠20MHz		
LTE Band 71	⊠5MHz	⊠10MHz	⊠15MHz	20MHz
	⊠10MHz+15MHz		⊠10MHz+2	20MHz
	⊠15MHz+′	10MHz	⊠15MHz+′	15MHz
LTE Band CA_41C	⊠15MHz+2	20MHz	20MHz+	10MHz
	⊠20MHz+15MHz		⊠20MHz+20MHz	
	⊠20MHz+	5MHz	⊠5MHz+20	OMHz
Note: WCDMA supports H	ISUPA, HSC	PA, DC-HS	OPA, HSPA+	, but only
the worst case was tested and the data displayed in this report.				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	28 of 55

2.9 Test Frequencies

Test Mode	TX / RX	RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)	
	ТХ	Channel 9262	Channel 9400	Channel 9538	
WCDMA Band II RX		1852.4 MHz	1880.0 MHz	1907.6 MHz	
	DV	Channel 9662	Channel 9800	Channel 9938	
	КЛ	1932.4 MHz	1960.0 MHz	1987.6 MHz	

Test Mode	TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
		Channel 1312	Channel 1413	Channel 1513
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz
	RX	Channel 1537	Channel 1638	Channel 1738
	КЛ	2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	RF Channel			
I EST MODE		Low (L)	Middle (M)	High (H)	
WCDMA Band V	ТХ	Channel 4132	Channel 4182	Channel 4233	
		826.4MHz	836.4 MHz	846.6 MHz	
	RX	Channel 4357	Channel 4407	Channel 4458	
	ΓΛ	871.4 MHz	881.4 MHz	891.6 MHz	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	29 of 55

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Wode	Danuwiutii		Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
			1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
			1931.5 MHz	1960 MHz	1988.5 MHz
			Channel 18625	Channel 18900	Channel 19175
	5MHz	TX	1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
	10MHz	ТΧ	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
		11/1	1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		ТХ	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
-			1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		ТХ	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		κX	1940 MHz	1960 MHz	1980 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	30 of 55

Test Mede	Dondwidth		RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 19957	Channel 20175	Channel 20393	
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz	
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375	
		ГЛ	2112.5 MHz	2132.5MHz	2152.5 MHz	
			Channel 19965	Channel 20175	Channel 20385	
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz	
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350	
		ГЛ	2115 MHz	2132.5MHz	2150 MHz	
			Channel 19975	Channel 20175	Channel 20375	
	5MHz -	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz	
		RX	Channel 1975	Channel 2175	Channel 2375	
			2112.5 MHz	2132.5MHz	2152.5 MHz	
LTE Band 4	10MHz	ТХ	Channel 20000	Channel 20175	Channel 20350	
			1715 MHz	1732.5 MHz	1750 MHz	
		RX	Channel 2000	Channel 2175	Channel 2350	
		11/1	2115 MHz	2132.5MHz	2150 MHz	
		ТΧ	Channel 20025	Channel 20175	Channel 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz	
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325	
			2117.5 MHz	2132.5MHz	2147.5 MHz	
			Channel 20050	Channel 20175	Channel 20300	
		TX	1720 MHz	1732.5 MHz	1745 MHz	
	20MHz	PV	Channel 2050	Channel 2175	Channel 2300	
		RX	2120 MHz	2132.5MHz	2145 MHz	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	31 of 55

Test Made	Dondwidth	TX / RX		RF Channel	
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
1.4MHz		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		ГЛ	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		тх	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
		RĂ	871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		ΓA	874 MHz	881.5 MHz	889 MHz

Test Made	Dondwidth	TX / RX		RF Channel	
Test Mode Bandwidth	Danuwiuun		Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		КЛ	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
			2625 MHz	2655 MHz	2685 MHz
LTE Band 7		ТХ	Channel 20825	Channel 21100	Channel 21375
			2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	DΥ	Channel 2825	Channel 3100	Channel 3375
		RX	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	BV	Channel 2850	Channel 3100	Channel 3350
		RX	2630 MHz	2655 MHz	2680 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	32 of 55

Test Made	Dondwidth			RF Channel	
Test Mode Band	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
1.4		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		ГЛ	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
	3MHz	ТХ	700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12	5MHz		Channel 23035	Channel 23095	Channel 23155
		ТХ	701.5 MHz	707.5 MHz	713.5 MHz
		RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	PV	Channel 5060	Channel 5095	Channel 5130
		RX	734 MHz	737.5 MHz	741 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
	5MHz		Channel 23025	Channel 23230	Channel 23255
		TX	779.5 MHz	782 MHz	784.5 MHz
		DV	Channel 5205	Channel 5230	Channel 5255
LTE Band 13		RX	748.5 MHz	751 MHz	753.5 MHz
LIE Dallu 13			Channel 23230	Channel 23230	Channel 23230
	10MHz	TX	782 MHz	782 MHz	782 MHz
		DV	Channel 5230	Channel 5230	Channel 5230
		RX	751 MHz	751 MHz	751 MHz

Test Mode	e Bandwidth	TX / RX	RF Channel		
Test Mode			Low (L)	Middle (M)	High (H)
5MHz LTE Band 14 10MHz		Channel 23305	Channel 23330	Channel 23355	
		TX	790.5 MHz	793 MHz	795.5 MHz
	5MHz	RX	Channel 5305	Channel 5330	Channel 5355
			760.5 MHz	763 MHz	765.5 MHz
	10MHz	ΤХ	Channel 23330	Channel 23330	Channel 23330
			793MHz	793 MHz	793 MHz
		RX	Channel 5330	Channel 5330	Channel 5330
		۲A	763MHz	763 MHz	763 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	33 of 55

Test Mode	Bandwidth	Bandwidth TX / RX	RF Channel		
Test Mode			Low (L)	Middle (M)	High (H)
5MHz		Channel 23755	Channel 23790	Channel 23825	
		TX	706.5 MHz	710 MHz	713.5 MHz
	5MHz	NA	Channel 5755	Channel 5790	Channel 5825
LTE Band 17		RX	736.5 MHz	740 MHz	743.5 MHz
			Channel 23780	Channel 23790	Channel 23800
		TX	709 MHz	710 MHz	711 MHz
	10MHz	DV	Channel 5780	Channel 5790	Channel 5800
		RX	739 MHz	740 MHz	741 MHz

Test Mede	Bandwidth	TX / RX		RF Channel	
Test Mode			Low (L)	Middle (M)	High (H)
			Channel 26047	Channel 26365	Channel 26683
		TX	1850.7 MHz	1882.5 MHz	1914.3 MHz
	1.4MHz	RX	Channel 8047	Channel 8365	Channel 8683
		ΓΛ	1930.7 MHz	1962.5 MHz	1994.3 MHz
			Channel 26055	Channel 26365	Channel 26675
	3MHz	TX	1851.5 MHz	1882.5 MHz	1913.5 MHz
		RX	Channel 8055	Channel 8365	Channel 8675
		ΓΛ	1931.5 MHz	1962.5 MHz	1993.5 MHz
			Channel 26065	Channel 26365	Channel 26665
	5MHz	TX	1852.5 MHz	1882.5 MHz	1912.5 MHz
		RX	Channel 8065	Channel 8365	Channel 8665
			1932.5 MHz	1962.5 MHz	1992.5 MHz
LTE Band 25	10MHz	ТХ	Channel 26090	Channel 26365	Channel 26640
			1855 MHz	1882.5 MHz	1910 MHz
		RX	Channel 8090	Channel 8365	Channel 8640
		ΓΛ	1935 MHz	1962.5 MHz	1990 MHz
		ТХ	Channel 26115	Channel 26365	Channel 26615
			1857.5 MHz	1882.5 MHz	1907.5 MHz
-	15MHz	RX	Channel 8115	Channel 8365	Channel 8615
			1937.5 MHz	1962.5 MHz	1987.5 MHz
			Channel 26140	Channel 26365	Channel 26590
		TX	1860 MHz	1882.5 MHz	1905 MHz
	20MHz	RX	Channel 8140	Channel 8365	Channel 8590
		ΓΛ	1940 MHz	1962.5 MHz	1985 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	34 of 55

Test Made	Bandwidth	TX / RX	RF Channel		
Test Mode			Low (L)	Middle (M)	High (H)
			Channel 26697	Channel 26740	Channel 26783
1.4MHz		TX	814.7 MHz	819 MHz	823.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783
		ГЛ	859.7 MHz	864MHz	868.3 MHz
			Channel 26705	Channel 26740	Channel 26775
	3MHz	TX	815.5 MHz	819 MHz	822.5 MHz
		RX	Channel 8705	Channel 8740	Channel 8775
LTE Band 26			860.5 MHz	864MHz	867.5 MHz
(814-824)	5MHz	тх	Channel 26715	Channel 26740	Channel 26765
(011 021)			816.5 MHz	819 MHz	821.5 MHz
		RX	Channel 8715	Channel 8740	Channel 8755
			861.5 MHz	864MHz	866.5 MHz
			Channel 26740	Channel 26740	Channel 26740
		TX	819 MHz	819 MHz	819 MHz
	10MHz	PV	Channel 8740	Channel 8740	Channel 8740
		RX	864MHz	864MHz	864MHz

Test Mede	Denduziath	TX / RX		RF Channel	
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
			Channel 26797	Channel 26915	Channel 27033
1.4		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033
			859.7 MHz	881.5 MHz	893.3 MHz
			Channel 26805	Channel 26915	Channel 27025
		ТХ	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	RX	Channel 8805	Channel 8915	Channel 9025
		КЛ	860.5 MHz	881.5 MHz	892.5 MHz
	5MHz	тх	Channel 26815	Channel 26915	Channel 27015
LTE Band 26			826.5 MHz	836.5 MHz	846.5 MHz
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015
			871.5 MHz	881.5 MHz	891.5 MHz
			Channel 26840	Channel 26915	Channel 26990
		ТХ	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 8840	Channel 8915	Channel 8990
			874 MHz	881.5 MHz	889 MHz
			Channel 26865	Channel 26915	Channel 26965
		ТХ	831.5 MHz	836.5 MHz	841.5 MHz
	15MHz	RX	Channel 8865	Channel 8915	Channel 8965
		100	876.5 MHz	881.5 MHz	886.5 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	35 of 55

Test Mode	Bandwidth	TX / RX	RF Channel		
Test Mode Bandwidth		Low (L)	Middle (M)	High (H)	
			Channel 27685	Channel27710	Channel 27735
5MHz	TX	2307.5 MHz	2310MHz	2312.5 MHz	
	RX	Channel 9795	Channel 9820	Channel 9845	
		2352.5MHz	2355 MHz	2357.5MHz	
LIE Danu 30			Channel 27710	Channel27710	Channel27710
10MHz	TX	2310 MHz	2310MHz	2310MHz	
	DV	Channel 9820	Channel 9820	Channel 9820	
		RX	2355 MHz	2355 MHz	2355 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
Test Mode Bandwidth			Low (L)	Middle (M)	High (H)
			Channel 39675	Channel40620	Channel 41565
	5MHz	TX / RX	2498.5 MHz	2593 MHz	2687.5 MHz
			Channel 39700	Channel40620	Channel 41540
LTE Band 41	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz
(2496-2690)			Channel 39725	Channel40620	Channel 41515
· · · · ·	15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz
			Channel 39750	Channel40620	Channel 41490
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz

Test Mode Bandwidth	Dondwidth	TX / RX	RF Channel			
	Danuwiutin		Low (L)	Middle (M)	High (H)	
LTE Band 48	5MHz	TX/RX	Channel 55265	Channel55990	Channel 56715	
			3552.5 MHz	3625.0 MHz	3697.5 MHz	
	10MHz	TX/RX	Channel 55290	Channel55990	Channel 56690	
			3555.0 MHz	3625.0 MHz	3695.0 MHz	
	15MHz	TX/RX	Channel 55315	Channel55990	Channel 56665	
			3557.5 MHz	3625.0 MHz	3692.5 MHz	
	20MHz		Channel 55340	Channel55990	Channel 56640	
		TX/RX	3560.0 MHz	3625.0 MHz	3690.0 MHz	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	36 of 55

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
		ТХ	Channel 131979	Channel 132322	Channel 132665
			1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329
		RA.	2110.7 MHz	2145MHz	2199.3 MHz
			Channel 131987	Channel 132322	Channel 132657
		TX	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	RX	Channel 66451	Channel 66786	Channel 67321
		ΓΛ.	2111.5 MHz	2145MHz	2198.5MHz
		ТХ	Channel 131997	Channel 132322	Channel 132647
	5MHz		1712.5 MHz	1745 MHz	1777.5 MHz
		DV	Channel 66461	Channel 66786	Channel 67311
		RX	2112.5 MHz	2145MHz	2197.5 MHz
LTE Band 66	10MHz	ТХ	Channel 132022	Channel 132322	Channel 132622
			1715 MHz	1745 MHz	1775 MHz
		RX	Channel 66486	Channel 66786	Channel 67286
			2115 MHz	2145MHz	2195 MHz
	15MHz	ТХ	Channel 132047	Channel 132322	Channel 132597
-			1717.5 MHz	1745 MHz	1772.5 MHz
		RX	Channel 66511	Channel 66786	Channel 67261
			2117.5 MHz	2145MHz	2192.5 MHz
	20MHz	тх	Channel 132072	Channel 132322	Channel 132572
			1720 MHz	1745 MHz	1770 MHz
		RX	Channel 66536	Channel 66786	Channel 67236
			2120 MHz	2145MHz	2190 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	37 of 55

Test Made	Dondwidth			RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 133147	Channel 133297	Channel 133447
		TX	665.5 MHz	680.5 MHz	695.5 MHz
	5MHz	RX	Channel 68611	Channel 68761	Channel 68911
			619.5 MHz	634.5 MHz	649.5 MHz
			Channel 133172	Channel 133297	Channel 133422
		TX	668 MHz	680.5 MHz	693 MHz
	10MHz	RX	Channel 68636	Channel 68761	Channel 68886
			622 MHz	634.5 MHz	647 MHz
LTE Band 71		TX RX	Channel 133197	Channel 133297	Channel 133397
			670.5 MHz	680.5 MHz	690.5 MHz
	15MHz		Channel 68661	Channel 68761	Channel 68861
			624.5 MHz	634.5 MHz	644.5 MHz
			Channel 133222	Channel 133297	Channel 133372
		TX	673 MHz	680.5 MHz	688 MHz
	20MHz	RX	Channel 68686	Channel 68761	Channel 68836
		ΓΛ	627 MHz	634.5 MHz	642 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 38 of 55

Range	CC- Combo / N _{RB_agg} [RB]		CC1 Note1			CC2 Note1	
		BW [RB]	NUL/DL	ful/dl [MHz]	BW [RB]	NUL/DL	ful/dl [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
2011		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
	75+100	75	39728	2503.8	100	39899	2520.9
		100	39750	2506	75	39921	2523.1
	100+100	100	39750	2506	100	39948	2525.8
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
	Ι Γ	100	40546	2585.6	75	40717	2602.7
	100+100	100	40521	2583.1	100	40719	2602.9
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
		100	41341	2665.1	75	41512	2682.2
	100+100	100 41292 2660.2 100 41490 2680					

Table 4.3.1.2.9A-1: Test frequencies for CA_41C

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 39 of 55

3 Description of Tests

3.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 40 of 55

3.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4 Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 41 of 55

3.3 EIRP Power Density

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.3

Test Settings

- 1. Set instrument center frequency to OBW center frequency.
- 2. Set span to at least 1.5 times the OBW.
- 3. Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4. Set VBW \geq 3 × RBW.
- 5. Detector = RMS (power averaging).
- 6. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- 7. Sweep time = auto couple.
- 8. Employ trace averaging (RMS) mode over a minimum of 100 traces.

9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.forms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 42 of 55

3.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.forms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 43 of 55

3.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.forms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 44 of 55

3.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental

frequency(Separated into at least two plots per channel)

- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.forms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 45 of 55

3.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.forms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.: SUCR240600021201 Rev.: 01 Page: 46 of 55

3.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.
 - E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

- Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn Wireless Laborator

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.sspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-andreproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 47 of 55

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 48 of 55

3.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory




Report No.:	SUCR240600021201
Rev.:	01
Page:	49 of 55

3.10Test Setups

3.10.1 Test Setup 1

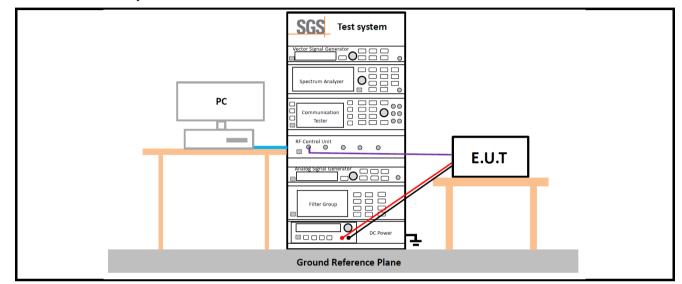

3.10.2 Test Setup 2

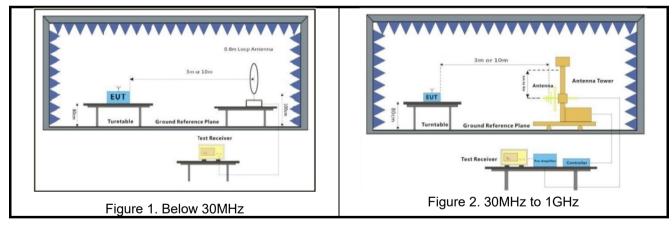


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	50 of 55

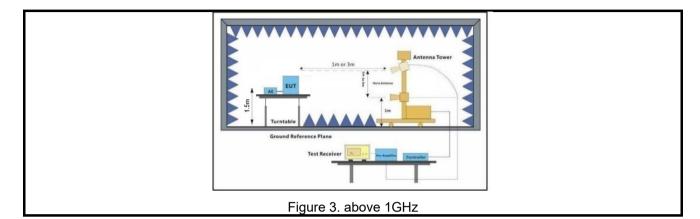

3.10.3 Test Setup 3

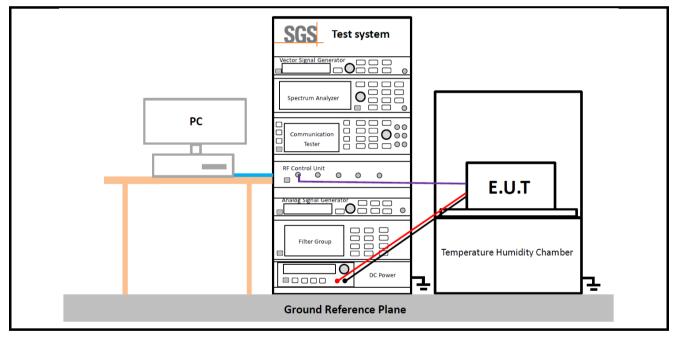

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	51 of 55

3.11Test Conditions

Transmit Output Power Data - Average Power, Spectral Density				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3;LTE/TM4			
	Field Strength of Spurious Radiation			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 2			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	UMTS/TM1;LTE/TM1 Remark: All bandwidth and modulation of UMTS/LTE have been pre tested, and only the worst results are reflected in the report.			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	52 of 55

Main Test Instruments 4

	RF Test Equipment				
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2022/11/09	2025/11/08
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2024/02/18	2025/02/17
Signal Analyzer	ROHDE &SCHWARZ	FSV3030	SUWI-01-02-02	2024/05/08	2025/05/07
Measurement Software	TST	TST-271-2.0	SUWI-03-55-01	NCR	NCR
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20
Wideband Radio Communication Tester	ROHDE &SCHWARZ	CMW500	SUWI-01-16-05	2024/05/06	2025/05/05
Signal Analyzer	ROHDE &SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2023/09/12	2024/09/11
Programmable Temperature & Humidity Chamber	GiantForce	LCD-9531	SUWI-03-55-01	2024/05/09	2025/05/08

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-conditions/Terms-and-conditions.aspx Add, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	53 of 55

	RSE Test System				
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/06/03	2026/06/02
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2024/02/18	2025/02/17
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	2023/11/21	2024/11/20
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2024/02/01	2025/01/31
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2024/02/04	2025/02/03
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2023/05/13	2025/05/12
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2023/05/13	2025/05/12
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2025/05/11
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2024/02/04	2025/02/03
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2024/02/04	2025/02/03
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2024/02/04	2025/02/03
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	2023/09/16	2024/09/15
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

Remark: NCR=No Calibration Requirement

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-conditions/Terms-and-conditions.aspx Add, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solid responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn Wireless Laboratory



 Report No.:
 SUCR240600021201

 Rev.:
 01

 Page:
 54 of 55

5 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty		
1	Total RF power, conducted	±0.54dB		
		± 3.13dB (9k -30MHz)		
2	Radiated Emission	± 4.8dB (30M -1GHz)		
2		± 4.8dB (1GHz to 18GHz)		
		± 4.80dB (Above 18GHz)		
Remark:				

The U_{lab} (lab Uncertainty) is less than U_{cispr/ETSI} (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.:	SUCR240600021201
Rev.:	01
Page:	55 of 55

6 Appendixes

Appendix A.1	WWAN Setup Photos
Appendix B.1	WCDMA Band II
Appendix B.2	WCDMA Band IV
Appendix B.3	WCDMA Band V
Appendix B.4	LTE Band 2
Appendix B.5	LTE Band 4
Appendix B.6	LTE Band 5
Appendix B.7	LTE Band 7
Appendix B.8	LTE Band 12
Appendix B.9	LTE Band 13
Appendix B.10	LTE Band 14
Appendix B.11	LTE Band 17
Appendix B.12	LTE Band 25
Appendix B.13	LTE Band 26(814-824)
Appendix B.14	LTE Band 26(824-849)
Appendix B.15	LTE Band 30
Appendix B.16	LTE Band 41
Appendix B.17	LTE Band 48
Appendix B.18	LTE Band 66
Appendix B.19	LTE Band 71
Appendix B.20	LTE CA_41C

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx <u>Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx <u>Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sool responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory