

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E06NR-004
AGR No. : A069A-054
Applicant : Bluebird Soft Inc.
Address : 558-5, Sinsa-dong, Gangnam-gu, Seoul, Korea
Manufacturer : Bluebird Soft Inc.
Address : 558-5, Sinsa-dong, Gangnam-gu, Seoul, Korea
Type of Equipment : Personal PDA with Bluetooth and WLAN 802.11b, 802.11g
FCC ID. : SS4BM300
Model Name : BM-300
Serial number : N/A
Total page of Report : 63 pages (including this page)
Date of Incoming : August 10, 2006
Date of issue : October 14, 2006

SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.247.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS.....	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION.....	8
5.1 JUSTIFICATION	8
5.2 PERIPHERAL EQUIPMENT.....	8
5.3 MODE OF OPERATION DURING THE TEST.....	8
5.4 CONFIGURATION OF TEST SYSTEM	9
5.5 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS.....	10
7. TEST DATA FOR 802.11B WLAN MODE.....	11
7.1 MINIMUM 6DB BANDWIDTH.....	11
7.1.1 OPERATING ENVIRONMENT	11
7.1.2 TEST SET-UP	11
7.1.3 TEST EQUIPMENT USED	11
7.1.4 TEST DATA.....	12
7.2. MAXIMUM PEAK OUTPUT POWER.....	15
7.2.1 OPERATING ENVIRONMENT	15
7.2.2 TEST SET-UP	15

7.2.3 TEST EQUIPMENT USED	15
7.2.4 TEST DATA	16
7.3 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	19
7.3.1 OPERATING ENVIRONMENT	19
7.3.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	19
7.3.3 TEST SET-UP FOR RADIATED MEASUREMENT	19
7.3.4 TEST EQUIPMENT USED	19
7.3.5. TEST DATA FOR CONDUCTED EMISSION	20
7.3.6. TEST DATA FOR RADIATED EMISSION	24
7.3.6.1 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	24
7.3.6.2 SPURIOUS & HARMONIC RADIATED EMISSION	26
7.4 PEAK POWER SPECTRUL DENSITY	29
7.4.1 OPERATING ENVIRONMENT	29
7.4.2 TEST SET-UP	29
7.4.3 TEST EQUIPMENT USED	29
7.4.4 TEST DATA	30
8. TEST DATA FOR 802.11G WLAN MODE	33
8.1 MINIMUM 6DB BANDWIDTH	33
8.1.1 OPERATING ENVIRONMENT	33
8.1.2 TEST SET-UP	33
8.1.3 TEST EQUIPMENT USED	33
8.1.4 TEST DATA	34
8.2. MAXIMUM PEAK OUTPUT POWER	37
8.2.1 OPERATING ENVIRONMENT	37
8.2.2 TEST SET-UP	37
8.2.3 TEST EQUIPMENT USED	37
8.2.4 TEST DATA	38
8.3 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	41
8.3.1 OPERATING ENVIRONMENT	41
8.3.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	41
8.3.3 TEST SET-UP FOR RADIATED MEASUREMENT	41
8.3.4 TEST EQUIPMENT USED	41
8.3.5. TEST DATA FOR CONDUCTED EMISSION	42
8.3.6. TEST DATA FOR RADIATED EMISSION	46

8.3.6.1 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	46
8.3.6.2 SPURIOUS & HARMONIC RADIATED EMISSION.....	48
8.4 PEAK POWER SPECTRUL DENSITY	51
8.4.1 OPERATING ENVIRONMENT	51
8.4.2 TEST SET-UP	51
8.4.3 TEST EQUIPMENT USED	51
8.4.4 TEST DATA	52
9. RADIO FREQUENCY EXPOSURE.....	55
9.1 RF EXPOSURE LIMIT	55
9.2 EUT DESCRIPTION.....	55
9.3 TEST RESULT.....	55
10. RADIATED EMISSION TEST, CO-LOCATED OPERATION.....	55
10.1 OPERATING ENVIRONMENT	55
10.2 TEST SET-UP	55
10.3 OPERATING CONDITION FOR TEST SETUP	55
10.4 MEASUREMENT UNCERTAINTY	55
10.5 TEST EQUIPMENT USED	55
10.6. TEST DATA FOR CO-LOCATION	55
10.6.1 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	55
10.6.2 SPURIOUS & HARMONIC RADIATED EMISSION.....	55
11. CONDUCTED EMISSION TEST	55
11.1 OPERATING ENVIRONMENT	55
11.2 TEST SET-UP	55
11.3 TEST EQUIPMENT USED	55
11.4 TEST DATA.....	55

1. VERIFICATION OF COMPLIANCE

APPLICANT : Bluebird Soft Inc.
ADDRESS : 558-5, Sinsa-dong, Gangnam-gu, Seoul, Korea
CONTACT PERSON : Mr. Jin-Sung, Gu / Developing Engineer
TELEPHONE NO : +82-2-7324-1232
FCC ID : SS4BM300
MODEL NAME : BM-300
SERIAL NUMBER : N/A
DATE : October 14, 2006

EQUIPMENT CLASS	<i>DTS – DIGITAL TRNSMISSION SYSTEM</i>
KIND OF EQUIPMENT	Personal PDA with Bluetooth and WLAN 802.11b, 802.11g
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met the Limit / PASS
15.247 (c)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (c)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (d)	Peak Power Spectral Density	Met the Limit / PASS
15.209 and 15.109	Radiated Emission Limits	N/A (See Note)
15.207 and 15.107	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not applicable, because the EUT is not directly connected to public low-voltage distribution system when it use WLAN mode.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 31, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. GENERAL INFORMATION

3.1 Product Description

The Bluebird Soft Inc., Model BM-300 (referred to as the EUT in this report) is a Personal PDA with Bluetooth and WLAN which has a function of battery charging and data uploading/downloading by USB cable. This report is for WLAN function. And the report for the Bluetooth mode and Peripheral Device for Class B Computing Device will be issued by other report. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Personal PDA with Bluetooth and WLAN 802.11b/g
OPERATING FREQUENCY	WLAN: 2412-2472 MHz
RF OUTPUT POWER	WLAN: 22.7 dBm
NUMBER OF CHANNEL	WLAN: 14 Channels
MAX. DATA TRANSFER RATE	WLAN: 11 Mbps (802.11b), 54Mbps (802.11g)
MODULATION TYPE	WLAN: DSSS/CCK(802.11b), CCK/OFDM(802.11g)
ANTENNA	WLAN MFR.: GIGA ANT., Model No.: COMATA 2.4GHz
ANTENNA CONNECTOR TYPE	WLAN: SMD Type
ANTENNA GAIN	WLAN: 1.9dBi
USED WLAN MODULE	MFR: Samsung Electro-Mechanics Co., Ltd.
	Model No: SWL-2460C
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ.>=1MHz)	26 MHz, 24.576 MHz and 13 MHz
NUMBER OF LAYER	8 Layers
POWER REQUIREMENT	DC 5V, 2A from an AC/DC Adaptor Model Name: PSC11R-050, MFR: PHIHONG TECHNOLOGY CO., LTD. Rechargeable Lithium Polymer Battery Standard Type: 1250mAh install/removable type

3.2 Alternative type(s)/model(s); also covered by this test report.

No other model differences have been mentioned.

4. EUT MODIFICATIONS

None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	BM300 DMB REV2000	N/A
Key Board	N/A	BM300 DMB KEY REV2000	N/A
LCD	N/A	TD028STEB2	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
BM-300	Bluebird Soft Inc.	SS4BM300	Personal PDA with Bluetooth and WLAN (EUT)	PC
PSC11R-050	Phihong Technology	N/A	AC/DC Adapter	EUT
MANIAC2004MRW	LG International	DoC	PC	-
E176FPb	Dell Computer	DoC	LCD Monitor	PC
SK-8115	Dell Computer	DoC	Keyboard	PC
N/A	ARtec	DoC	Mouse	PC
UP-DP10	Sony	DoC	Printer	PC
3453C	U.S.Robotics	CJE-0263	Modem	PC

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. For final testing, WLAN was set at Low Channel (2412MHz), Middle Channel (2437MHz), and High Channel (2462MHz) with 11Mbps(802.11b) and Low Channel (2412MHz), Middle Channel (2437MHz), and High Channel (2462MHz) with 54Mbps(802.11g) data rate. To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

5.4 Configuration of Test System

Line Conducted Test: The power cord of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power lines Conducted Emission tests were performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is installed inside of the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Stand-by mode	
Charging mode	
TX mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Stand-by mode	
Charging mode	
TX mode	X

7. TEST DATA FOR 802.11b WLAN MODE

7.1 MINIMUM 6dB BANDWIDTH


7.1.1 Operating environment

Temperature : 21°C

Relative humidity : 43 %

7.1.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

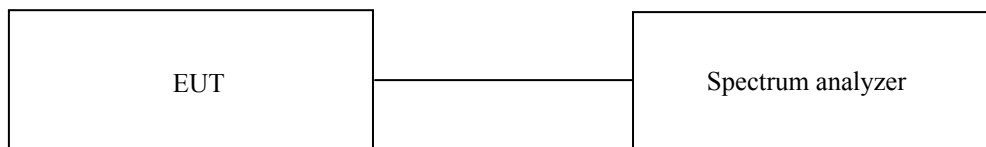

7.1.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006


All test equipment used is calibrated on a regular basis.

7.1.4 Test data

- Test Date : September 14, 2006
- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2412	10170	500	-9670
Middle	2437	10200	500	-9700
High	2462	10130	500	-9630


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Ki-Hong, Nam / Test Engineer



Low Channel

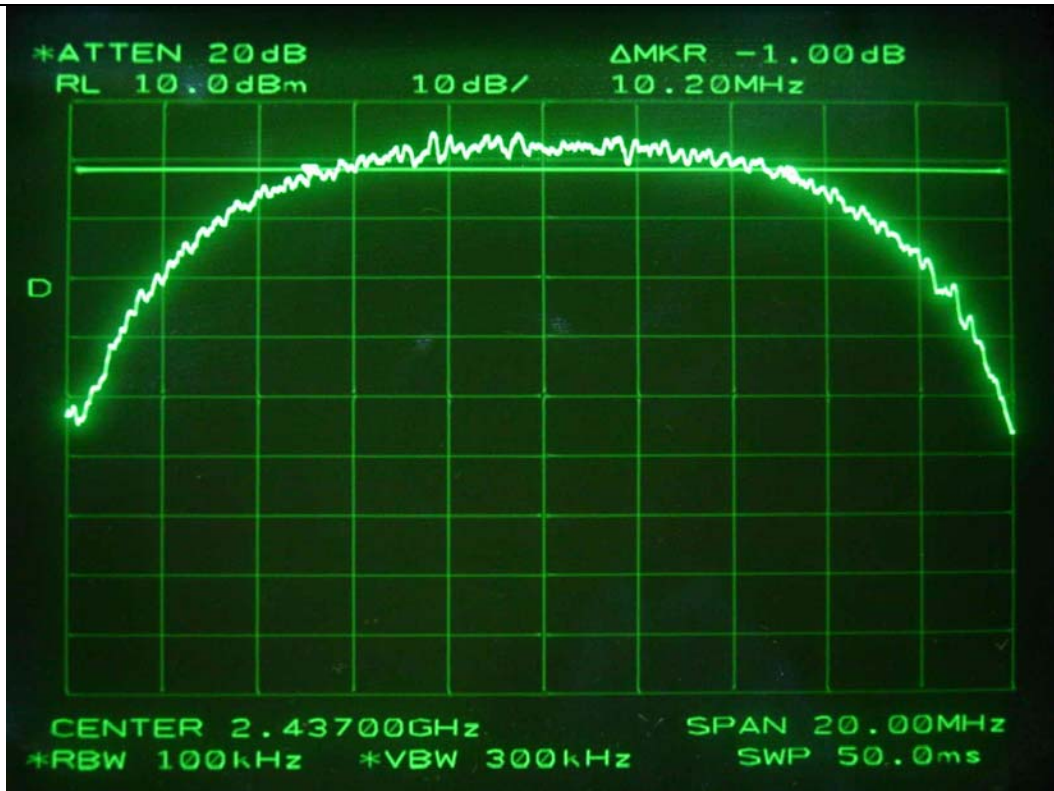

Middle Channel

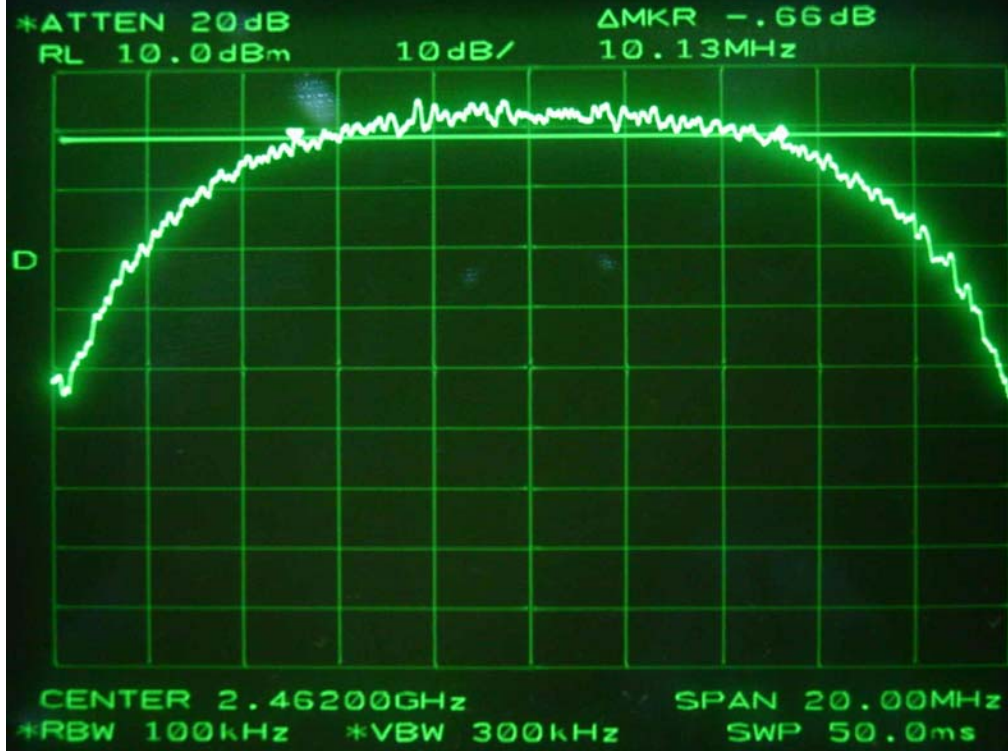

High Channel

7.2. MAXIMUM PEAK OUTPUT POWER


7.2.1 Operating environment

Temperature : 21°C

Relative humidity : 43 %

7.2.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

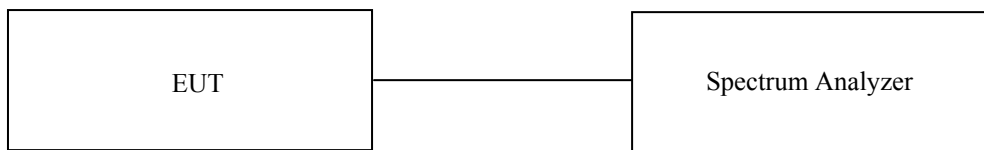

7.2.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

7.2.4 Test data

- Test Date : September 14, 2006


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2412	13.91	20.40	30.0	-9.60
Middle	2437	13.95	20.80	30.0	-9.20
High	2462	13.99	20.80	30.0	-9.20

Remark: See next page for an overview sweep performed with peak detector.



Tested by: Ki-Hong, Nam / Test Engineer

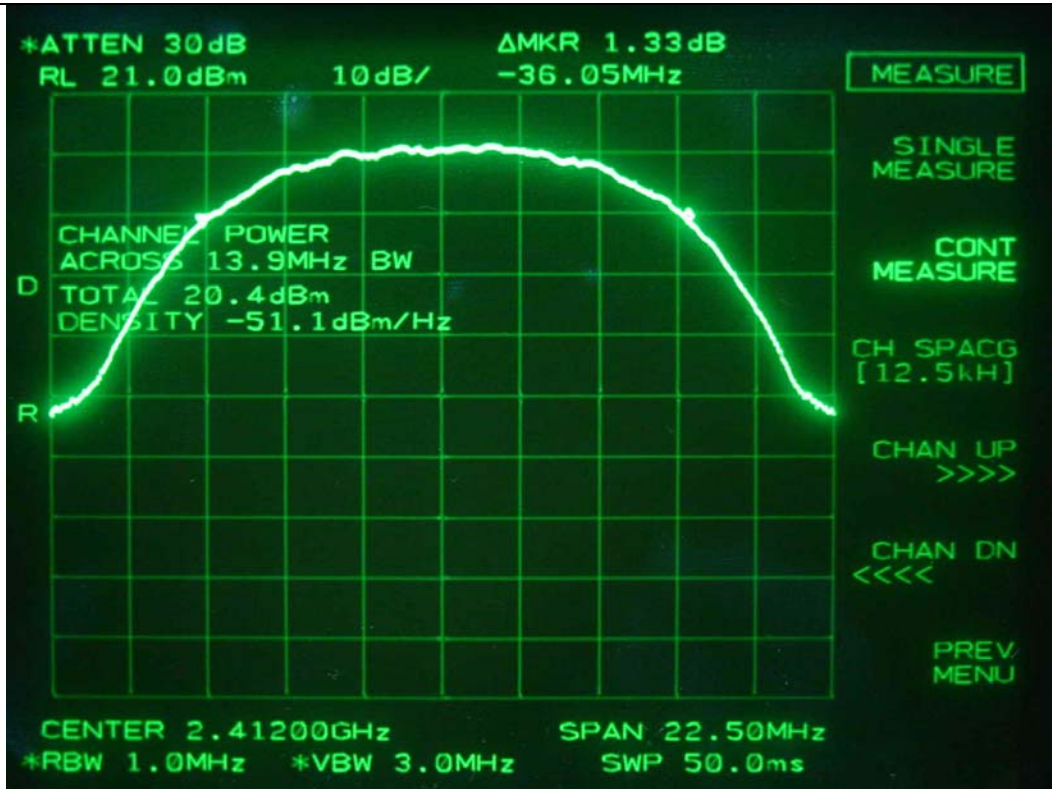

Low Channel



Middle Channel



High Channel

7.3 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


7.3.1 Operating environment

Temperature : 21°C

Relative humidity : 43 %

7.3.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

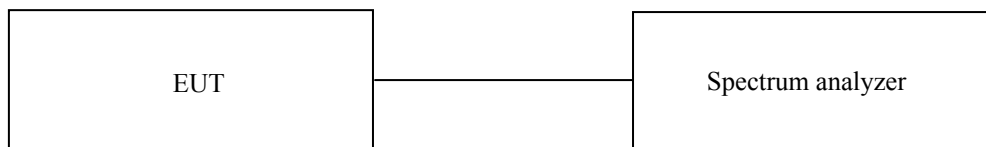

7.3.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3meters, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.


The frequency spectrum from 30MHz to 25GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

7.3.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 22, 2006
■ -	8447D	Hewlett-Packard	Amplifier	2727A04987	June 14, 2006
□ -	83051A	Agilent	Preamplifier	3950M00201	June 23, 2006
■ -	F-40-5000-RF	RLC Electronics	Highpass Filter	0425	July 14, 2006
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	July 03, 2006
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

7.3.5. Test data for conducted emission

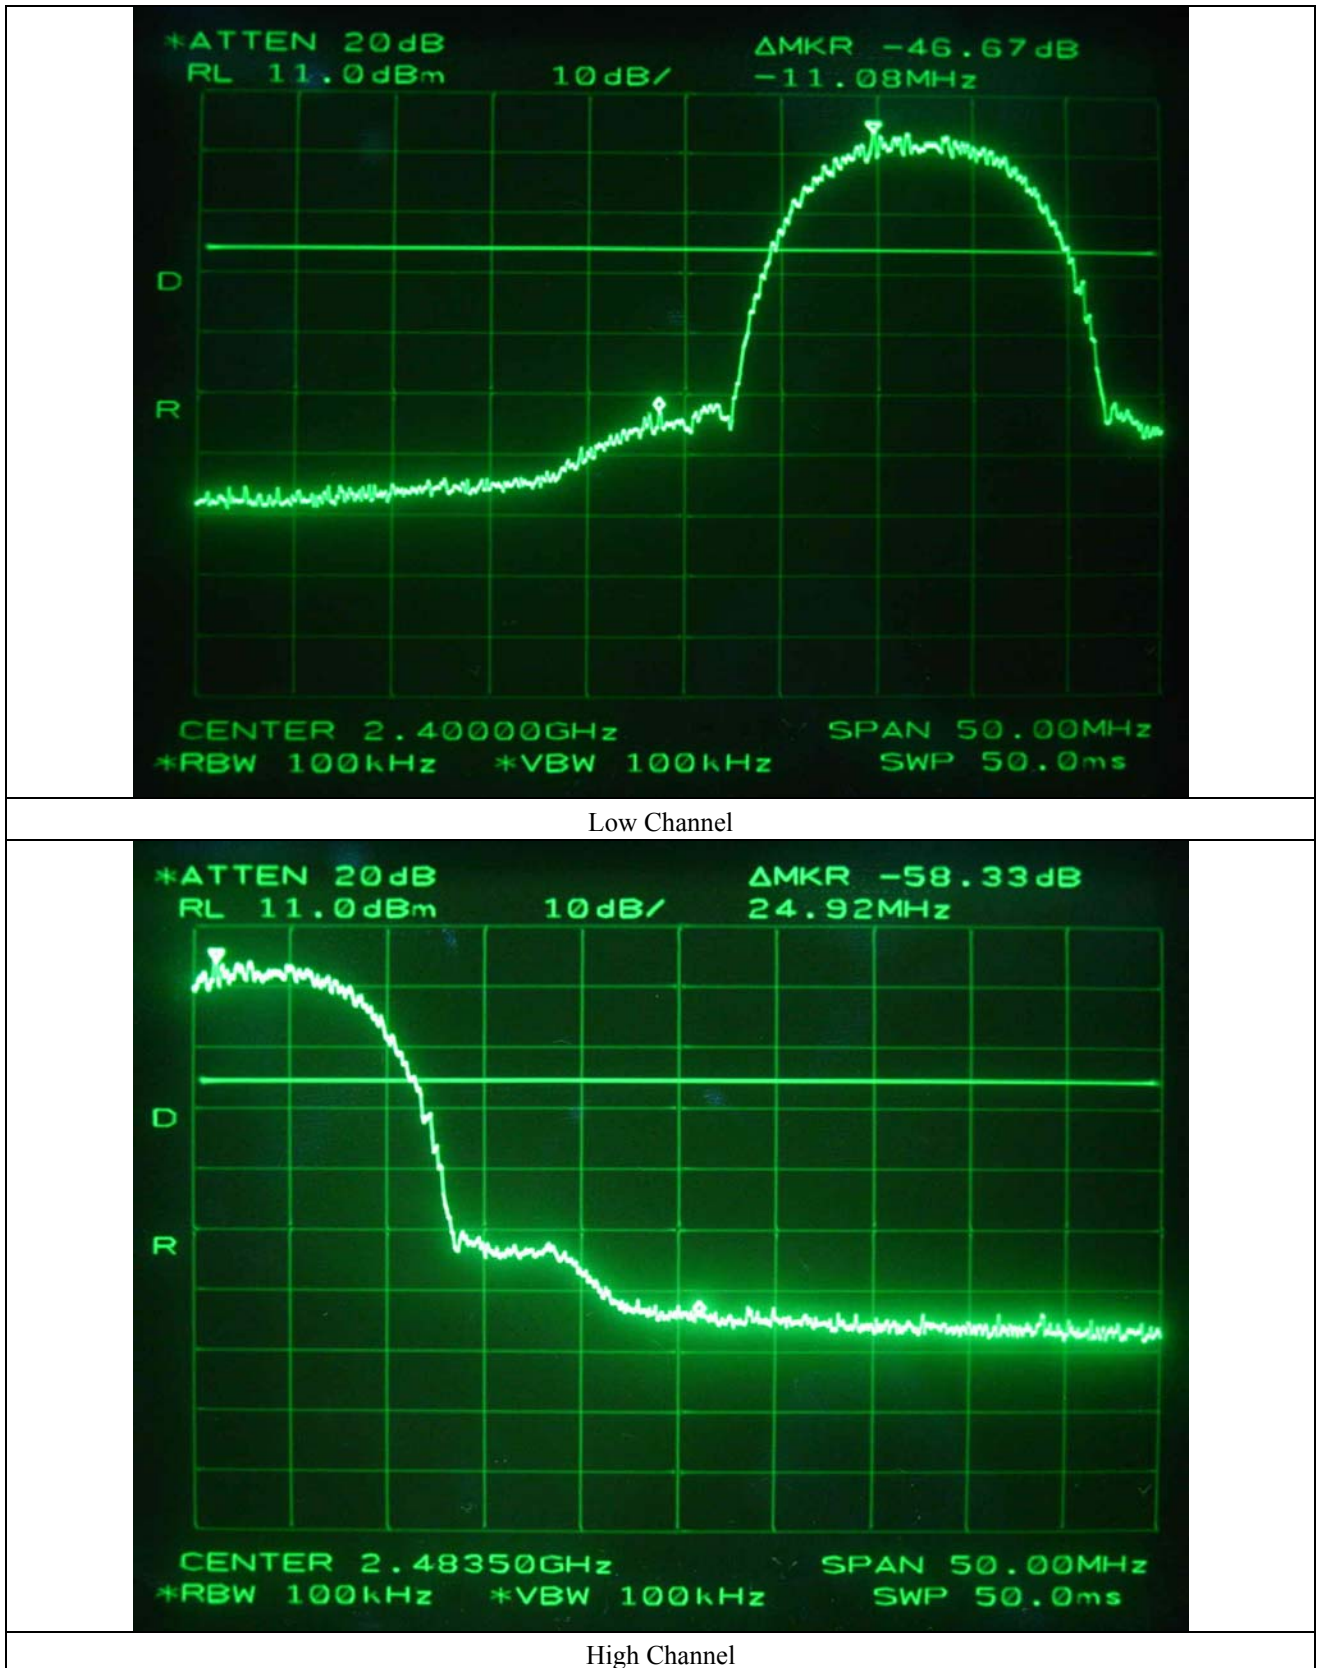


It should not be reproduced except in full, without the written approval of ONETECH.


EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

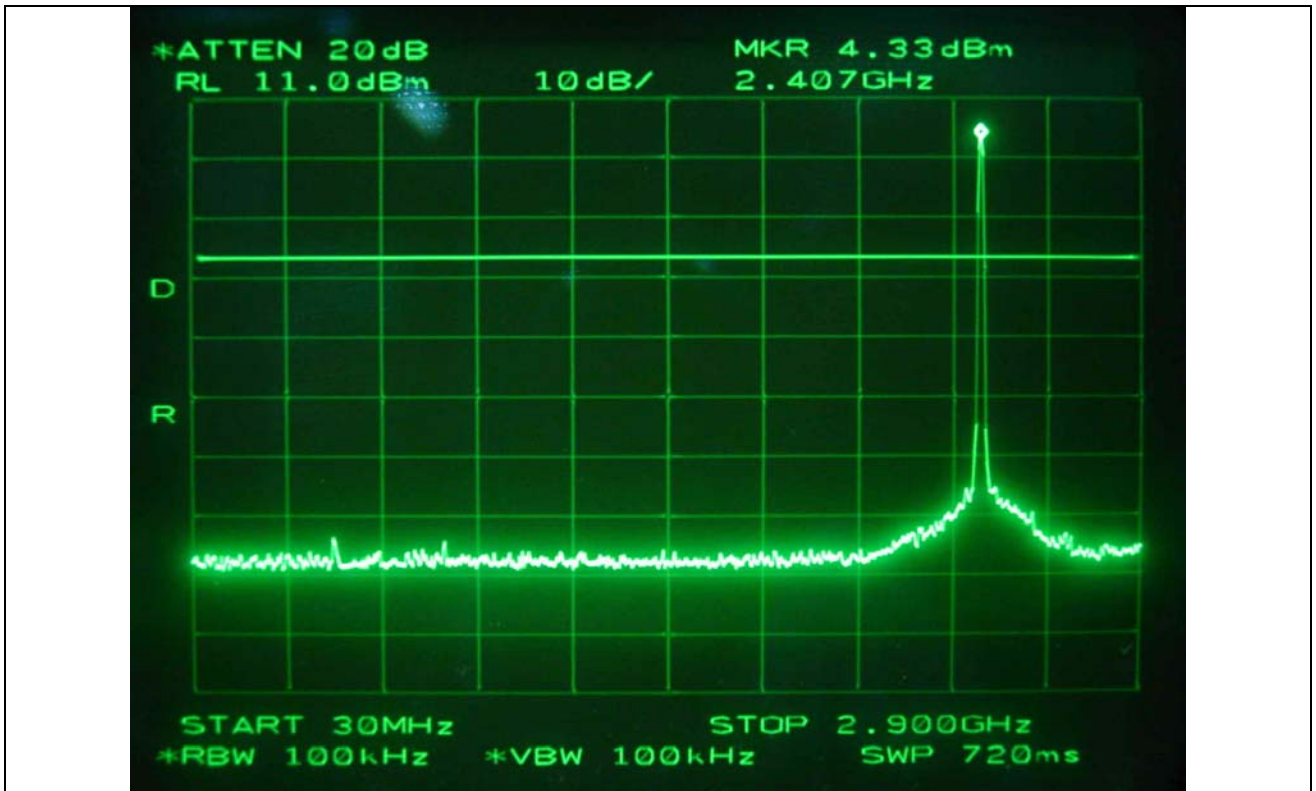


Low Channel

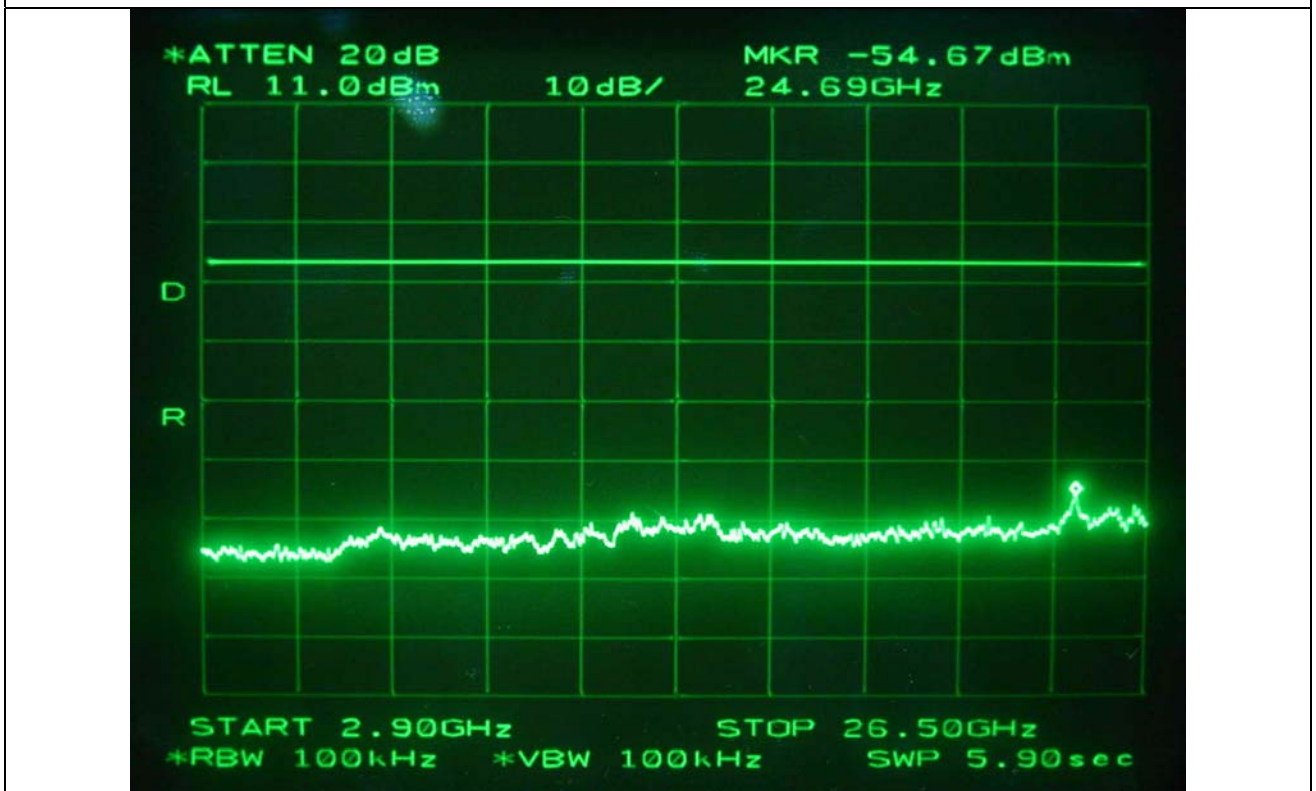


Low Channel

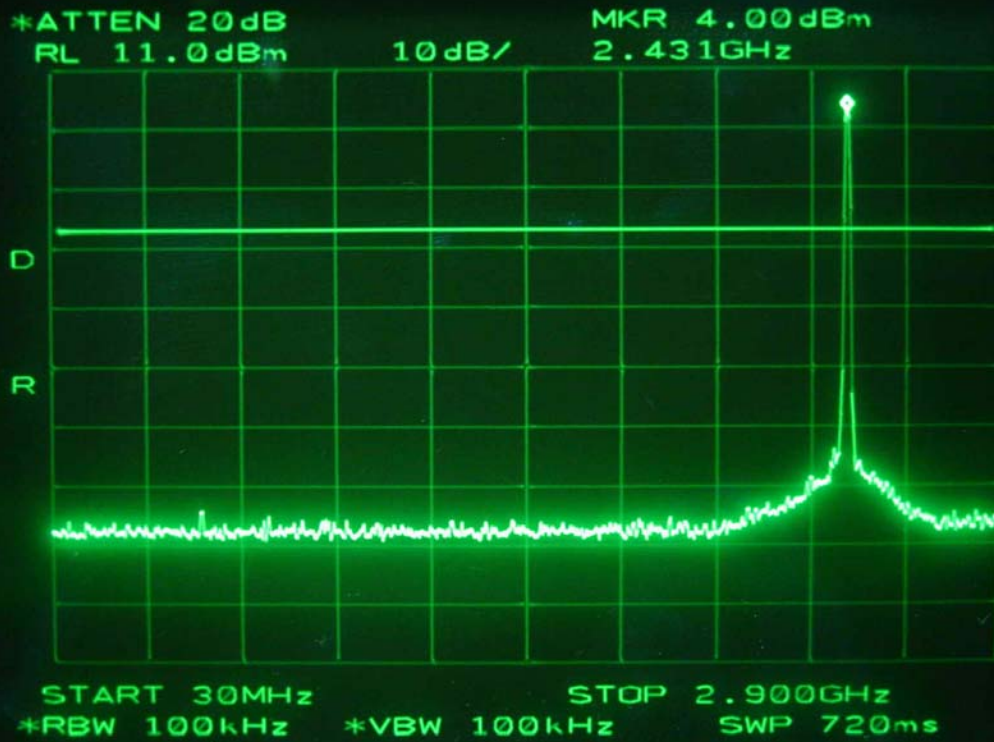


Middle Channel

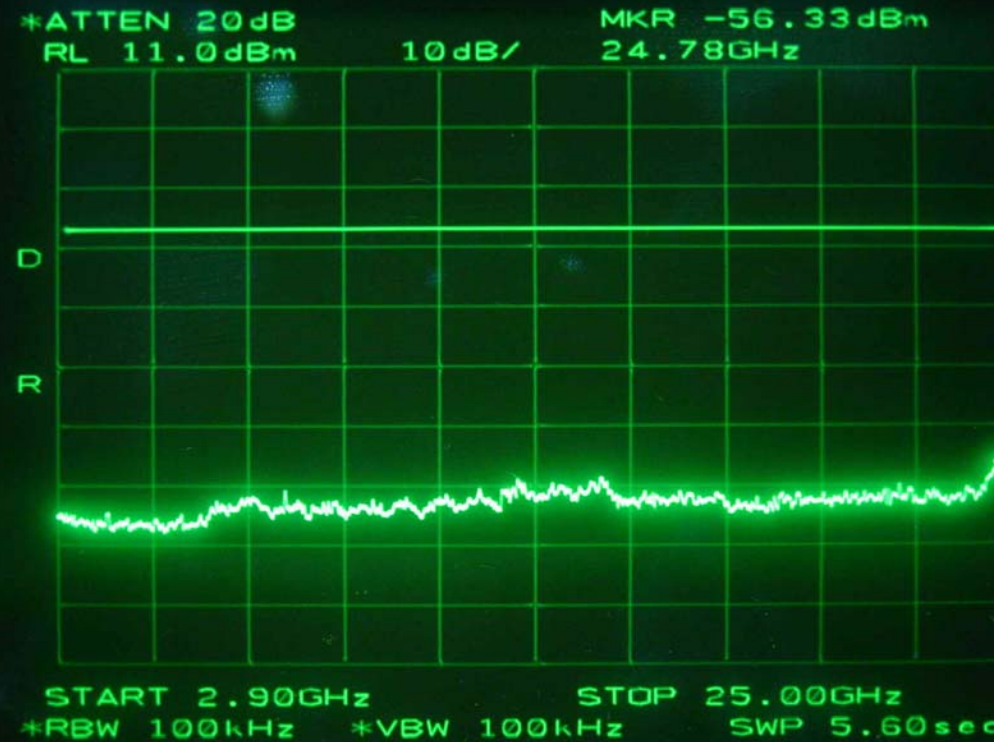

Middle Channel

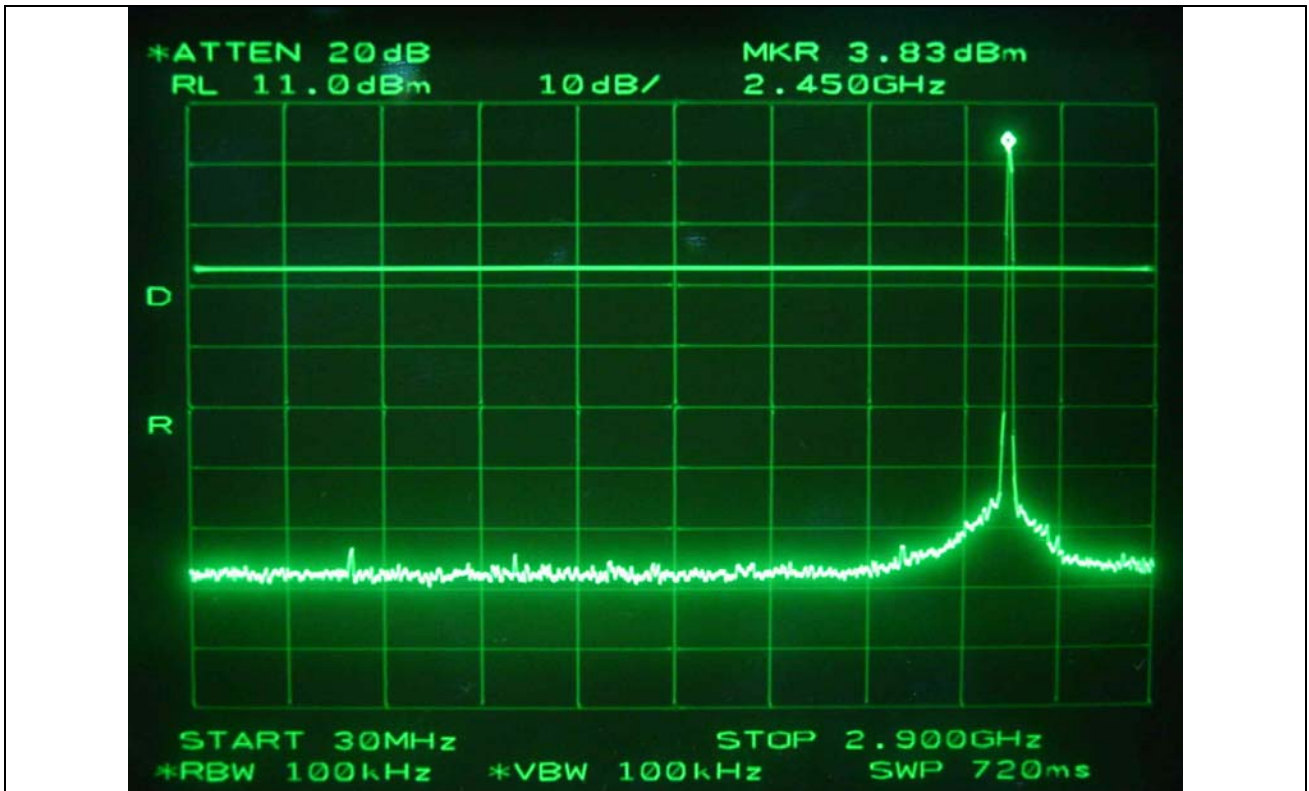

High Channel

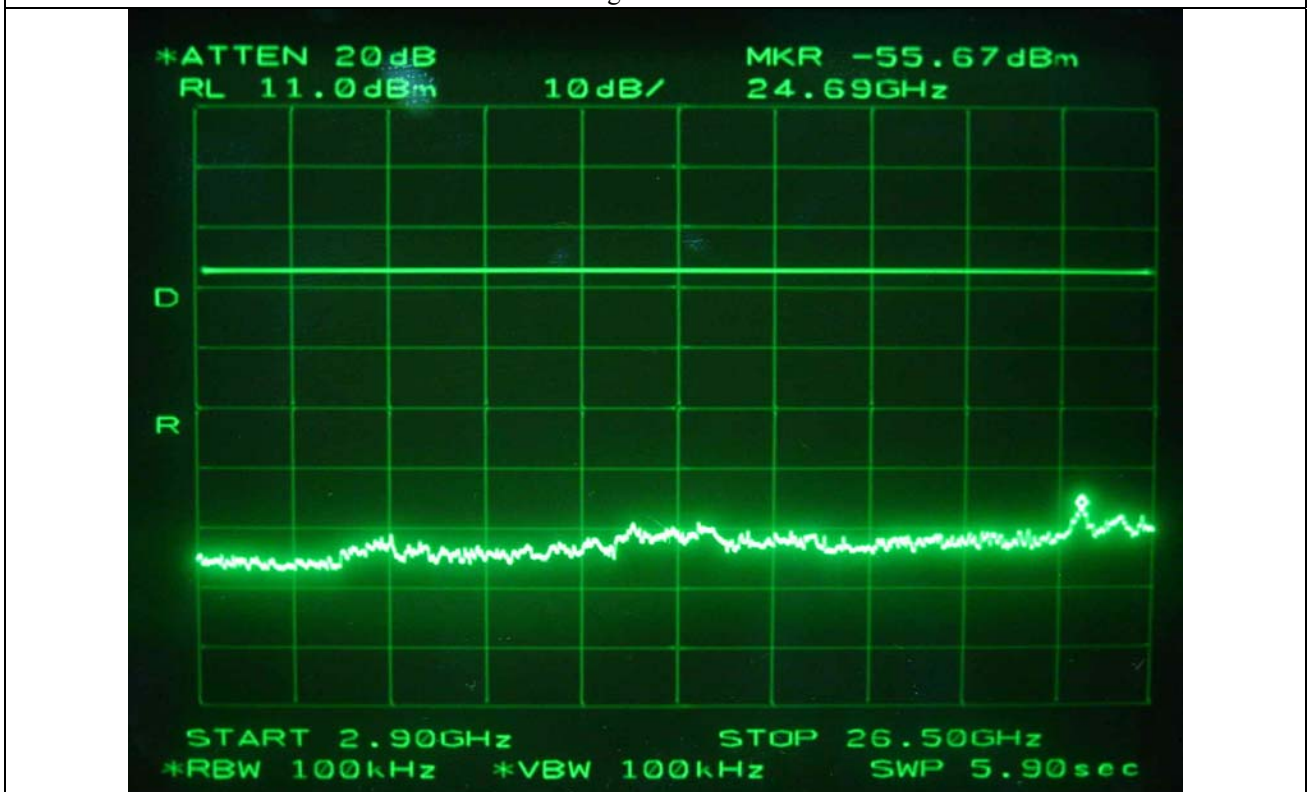

High Channel

7.3.6. Test data for radiated emission

7.3.6.1 Radiated Emission which fall in the Restricted Band

- Test Date : September 28, 2006
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25GHz
- Measurement distance : 3m
- Operating Condition : Low / High Channel
- Result : PASSED BY -26.63 dB at Low Channel(1 & 11 Mbps)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel (1 Mbps)										
2389.87	35.17	Peak	H	27.64	1.33	26.1		38.04	74.00	-35.96
	24.50	Average	H					27.37	54.00	-26.63
	34.83	Peak	V					37.70	74.00	-36.30
	23.83	Average	V					26.70	54.00	-27.30
Test Data for Low Channel (5.5 Mbps)										
2389.87	35.17	Peak	H	27.64	1.33	26.1		38.04	74.00	-35.96
	24.33	Average	H					27.20	54.00	-26.80
	34.83	Peak	V					37.70	74.00	-36.30
	23.67	Average	V					26.54	54.00	-27.46
Test Data for Low Channel (11 Mbps)										
2389.87	35.00	Peak	H	27.64	1.33	26.1		37.87	74.00	-36.13
	24.50	Average	H					27.37	54.00	-26.63
	34.33	Peak	V					37.20	74.00	-36.80
	23.40	Average	V					26.27	54.00	-27.73

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

-Continued

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel (1 Mbps)										
2483.56	33.83	Peak	H	27.59	1.33	26.1		36.65	74.00	-37.36
	23.50	Average	H					26.32	54.00	-27.69
	35.67	Peak	V					38.49	74.00	-35.52
	24.50	Average	V					27.32	54.00	-26.69
Test Data for High Channel (5.5 Mbps)										
2483.56	33.67	Peak	H	27.59	1.33	26.1		36.49	74.00	-37.52
	23.33	Average	H					26.15	54.00	-27.86
	35.67	Peak	V					38.49	74.00	-35.52
	24.17	Average	V					26.99	54.00	-27.02
Test Data for High Channel (11 Mbps)										
2483.56	33.50	Peak	H	27.59	1.33	26.1		36.32	74.00	-37.69
	23.50	Average	H					26.32	54.00	-27.69
	35.40	Peak	V					38.22	74.00	-35.79
	24.33	Average	V					27.15	54.00	-26.86

기홍

Tested by: Ki-Hong, Nam / Test Engineer

7.3.6.2 Spurious & Harmonic Radiated Emission

- Test Date : September 28, 2006
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 3m
- Result : PASSED BY -20.63 dB at Low Channel

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel (1 Mbps)										
2412.00	57.67	Peak	H	27.33	1.50			86.50	-	
	60.50	Peak	V					89.33	-	
4824.00	35.50	Peak	H	31.30	2.67	26.10		43.37	74.00	-30.63
	25.50	Average	H					33.37	54.00	-20.63
	35.00	Peak	V					42.87	74.00	-31.13
	25.33	Average	V					33.20	54.00	-20.80
Test Data for Low Channel (5.5 Mbps)										
2412.00	57.33	Peak	H	27.33	1.50			86.16	-	
	60.00	Peak	V					88.83	-	
4824.00	35.10	Peak	H	31.30	2.67	26.10		42.97	74.00	-31.03
	25.50	Average	H					33.37	54.00	-20.63
	35.00	Peak	V					42.87	74.00	-31.13
	25.17	Average	V					33.04	54.00	-20.96
Test Data for Low Channel (11 Mbps)										
2412.00	57.00	Peak	H	27.33	1.50			85.83	-	
	59.67	Peak	V					88.50	-	
4824.00	35.10	Peak	H	31.30	2.67	26.10		42.97	74.00	-31.03
	25.00	Average	H					32.87	54.00	-21.13
	35.00	Peak	V					42.87	74.00	-31.13
	25.50	Average	V					33.37	54.00	-20.63

Tabulated test data for Restricted Band

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Middle Channel (1 Mbps)										
2437.00	57.50	Peak	H	27.40	1.50			86.40	-	
	60.33	Peak	V					89.23	-	
4874.00	34.33	Peak	H	31.37	2.67	26.10		42.27	74.00	-31.73
	23.83	Average	H					31.77	54.00	-22.23
	34.67	Peak	V					42.61	74.00	-31.39
	23.67	Average	V					31.61	54.00	-22.39
Test Data for Middle Channel (5.5 Mbps)										
2437.00	56.83	Peak	H	27.40	1.50			85.73	-	
	59.90	Peak	V					88.80	-	
4874.00	34.10	Peak	H	31.37	2.67	26.10		42.04	74.00	-31.96
	23.15	Average	H					31.09	54.00	-22.91
	34.83	Peak	V					42.77	74.00	-31.23
	23.33	Average	V					31.27	54.00	-22.73
Test Data for Middle Channel (11 Mbps)										
2437.00	56.67	Peak	H	27.40	1.50			85.57	-	
	59.50	Peak	V					88.40	-	
4874.00	34.33	Peak	H	31.37	2.67	26.10		42.27	74.00	-31.73
	23.50	Average	H					31.44	54.00	-22.56
	34.15	Peak	V					42.09	74.00	-31.91
	23.33	Average	V					31.27	54.00	-22.73

Tabulated test data for Restricted Band

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel (1 Mbps)										
2462.00	57.60	Peak	H	27.48	1.50			86.58	-	
	60.52	Peak	V					89.50	-	
4924.00	34.67	Peak	H	31.44	2.67	26.10		42.68	74.00	-31.32
	23.67	Average	H					31.68	54.00	-22.32
	35.67	Peak	V					43.68	74.00	-30.32
	23.67	Average	V					31.68	54.00	-22.32
Test Data for High Channel (5.5 Mbps)										
2462.00	57.00	Peak	H	27.48	1.50			85.98	-	
	59.92	Peak	V					88.90	-	
4924.00	34.50	Peak	H	31.44	2.67	26.10		42.51	74.00	-31.49
	23.67	Average	H					31.68	54.00	-22.32
	35.33	Peak	V					43.34	74.00	-30.66
	23.00	Average	V					31.01	54.00	-22.99
Test Data for High Channel (11 Mbps)										
2462.00	56.67	Peak	H	27.48	1.50			85.65	-	
	59.83	Peak	V					88.81	-	
4924.00	34.33	Peak	H	31.44	2.67	26.10		42.34	74.00	-31.66
	23.50	Average	H					31.51	54.00	-22.49
	35.00	Peak	V					43.01	74.00	-30.99
	23.50	Average	V					31.51	54.00	-22.49

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

기홍

Tested by: Ki-Hong, Nam / Test Engineer

7.4 PEAK POWER SPECTRUL DENSITY

7.4.1 Operating environment


Temperature : 21°C

Relative humidity : 43 %

7.4.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth, and sweep time was set to span / 3 kHz. The sweep time was allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

The maximum level from the EUT in a 3 kHz bandwidth was measured with above condition.

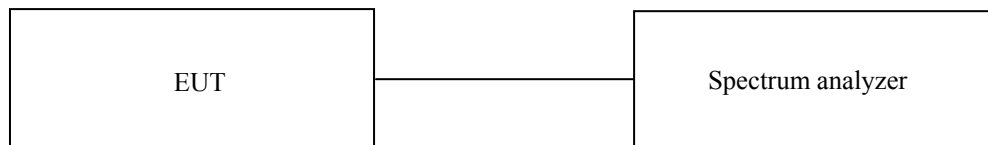

7.4.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

7.4.4 Test data


- Test Date : September 14, 2006
- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2412	-11.67	8	-19.67
Middle	2437	-11.17	8	-19.17
High	2462	-11.67	8	-19.67


Remark: See next page for measurement data.




Tested by: Ki-Hong, Nam / Test Engineer

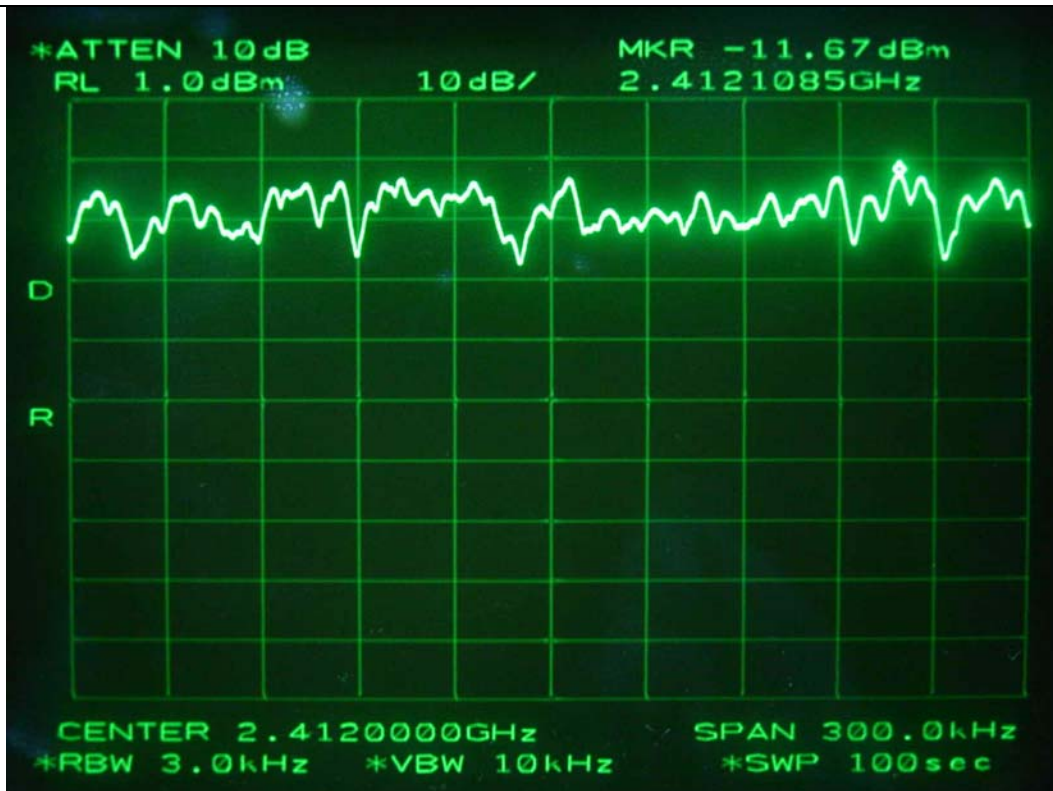

Low Channel

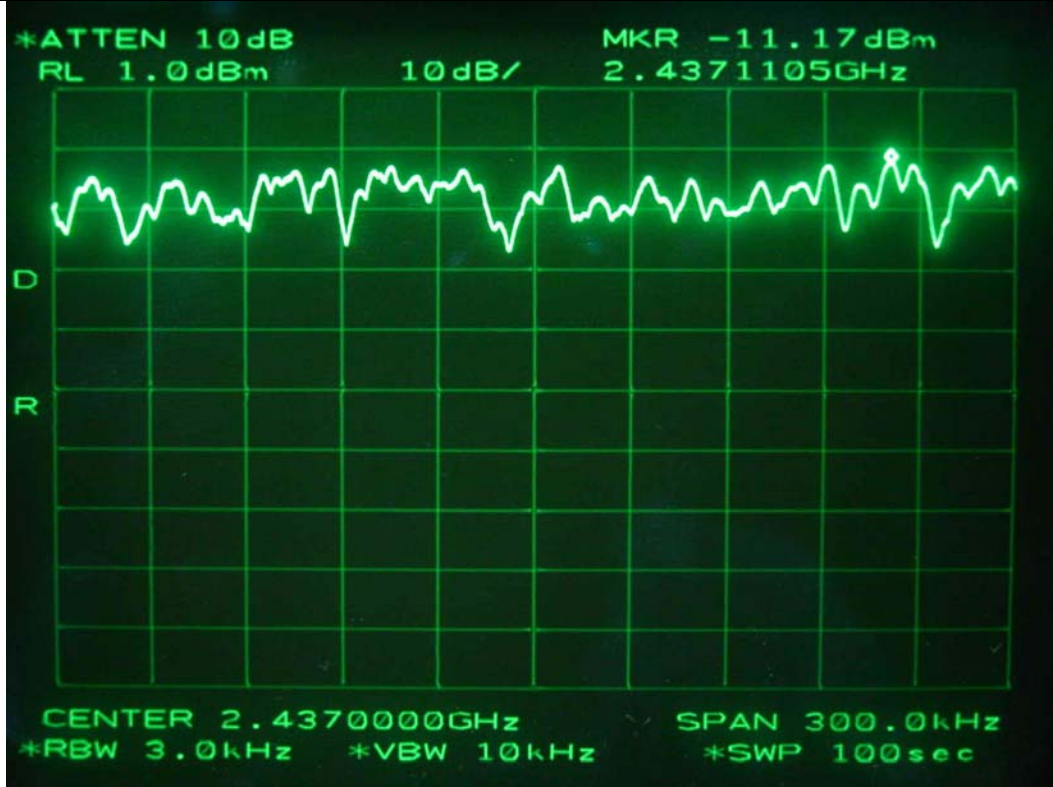

Middle Channel

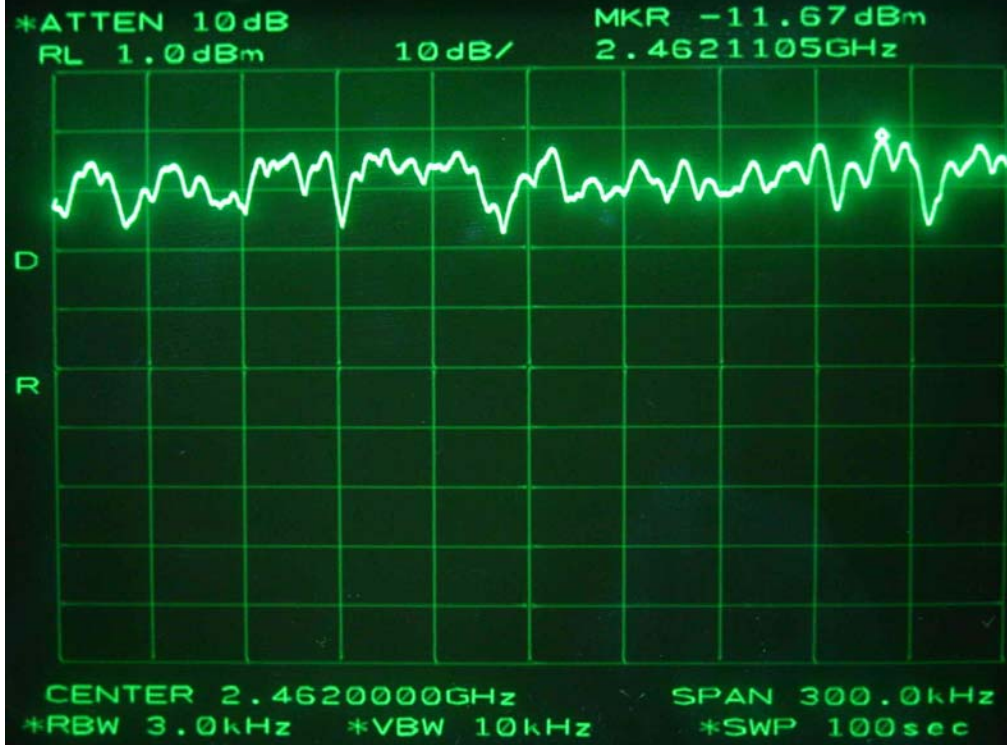

High Channel

8. TEST DATA FOR 802.11g WLAN MODE

8.1 MINIMUM 6dB BANDWIDTH


8.1.1 Operating environment

Temperature : 21°C

Relative humidity : 43 %

8.1.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

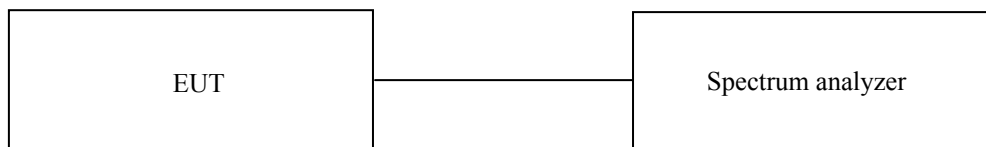

8.1.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006


All test equipment used is calibrated on a regular basis.

8.1.4 Test data

- Test Date : September 14, 2006
- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2412	16630	500	-16130
Middle	2437	16600	500	-16100
High	2462	16670	500	-16170


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Ki-Hong, Nam / Test Engineer



Low Channel

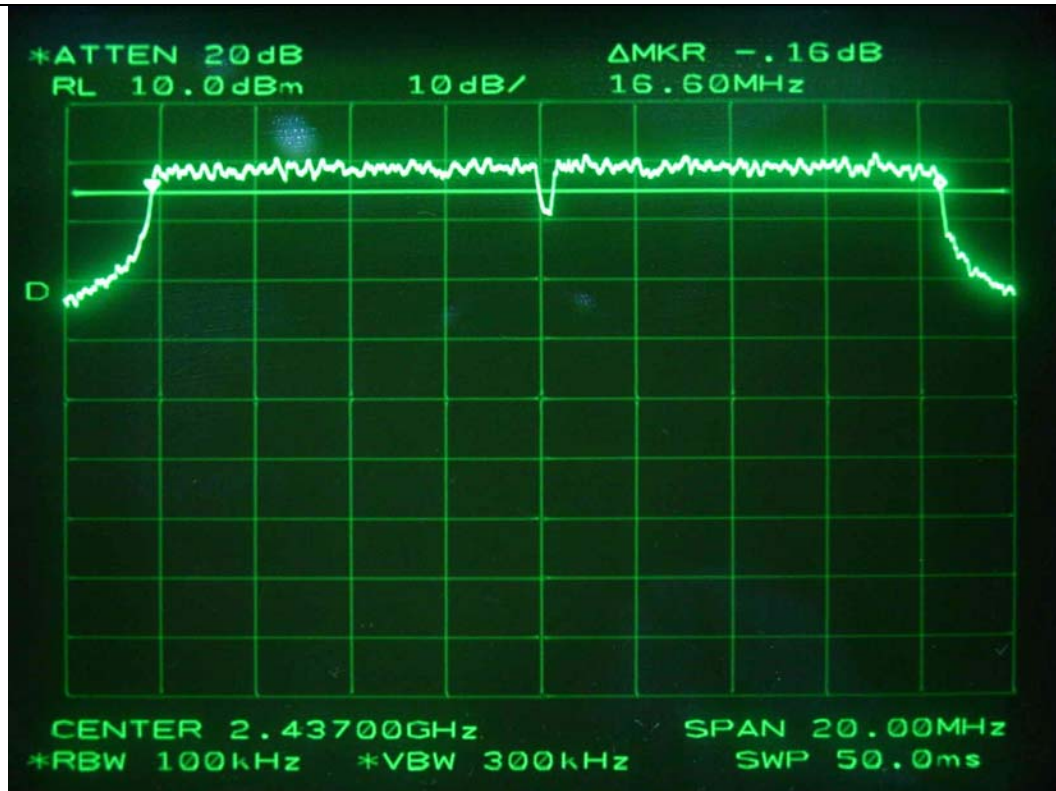

Middle Channel

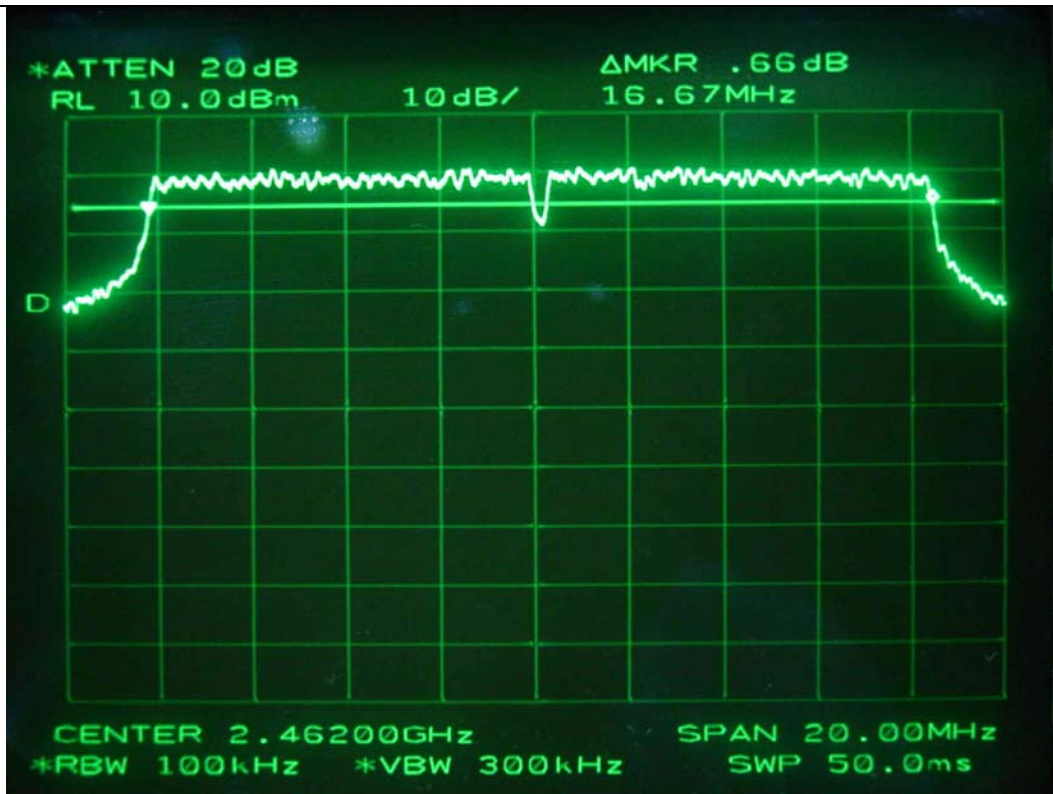

High Channel

8.2. MAXIMUM PEAK OUTPUT POWER


8.2.1 Operating environment

Temperature : 21°C

Relative humidity : 43 %

8.2.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

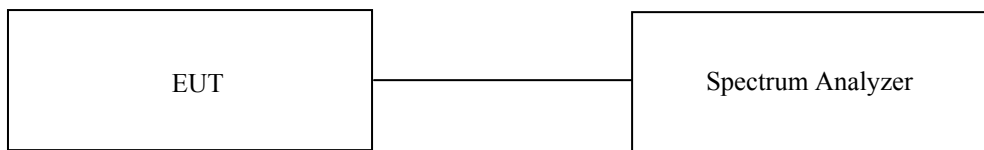

8.2.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

8.2.4 Test data

- Test Date : September 14, 2006
- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2412	18.03	22.10	30.0	-7.90
Middle	2437	18.20	22.60	30.0	-7.40
High	2462	18.23	22.70	30.0	-7.30

Remark: See next page for an overview sweep performed with peak detector.

기홍


Tested by: Ki-Hong, Nam / Test Engineer



Low Channel



Middle Channel

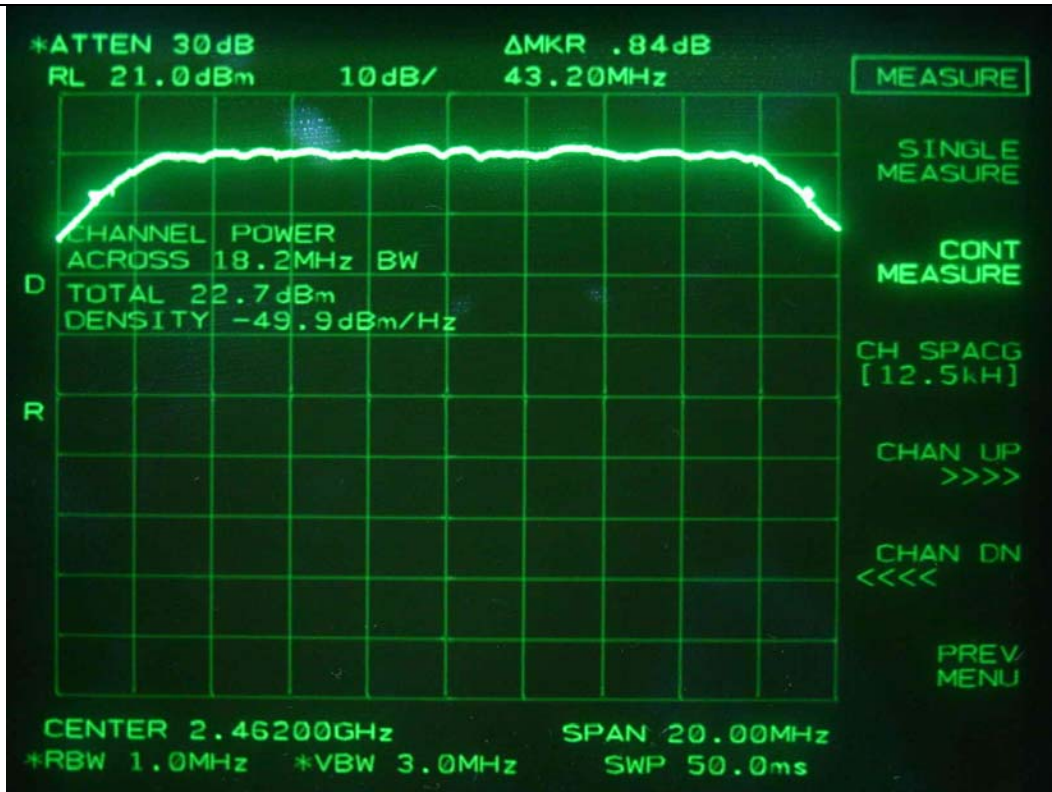

High Channel

8.3 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


8.3.1 Operating environment

Temperature : 21°C

Relative humidity : 43 %

8.3.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

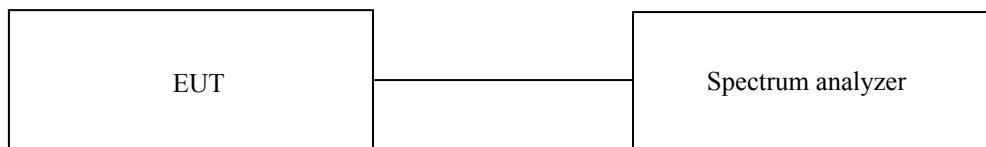

8.3.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3meters, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.


The frequency spectrum from 30MHz to 25GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

8.3.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 22, 2006
■ -	8447D	Hewlett-Packard	Amplifier	2727A04987	June 14, 2006
□ -	83051A	Agilent	Preamplifier	3950M00201	June 23, 2006
■ -	F-40-5000-RF	RLC Electronics	Highpass Filter	0425	July 14, 2006
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	July 03, 2006
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

8.3.5. Test data for conducted emission

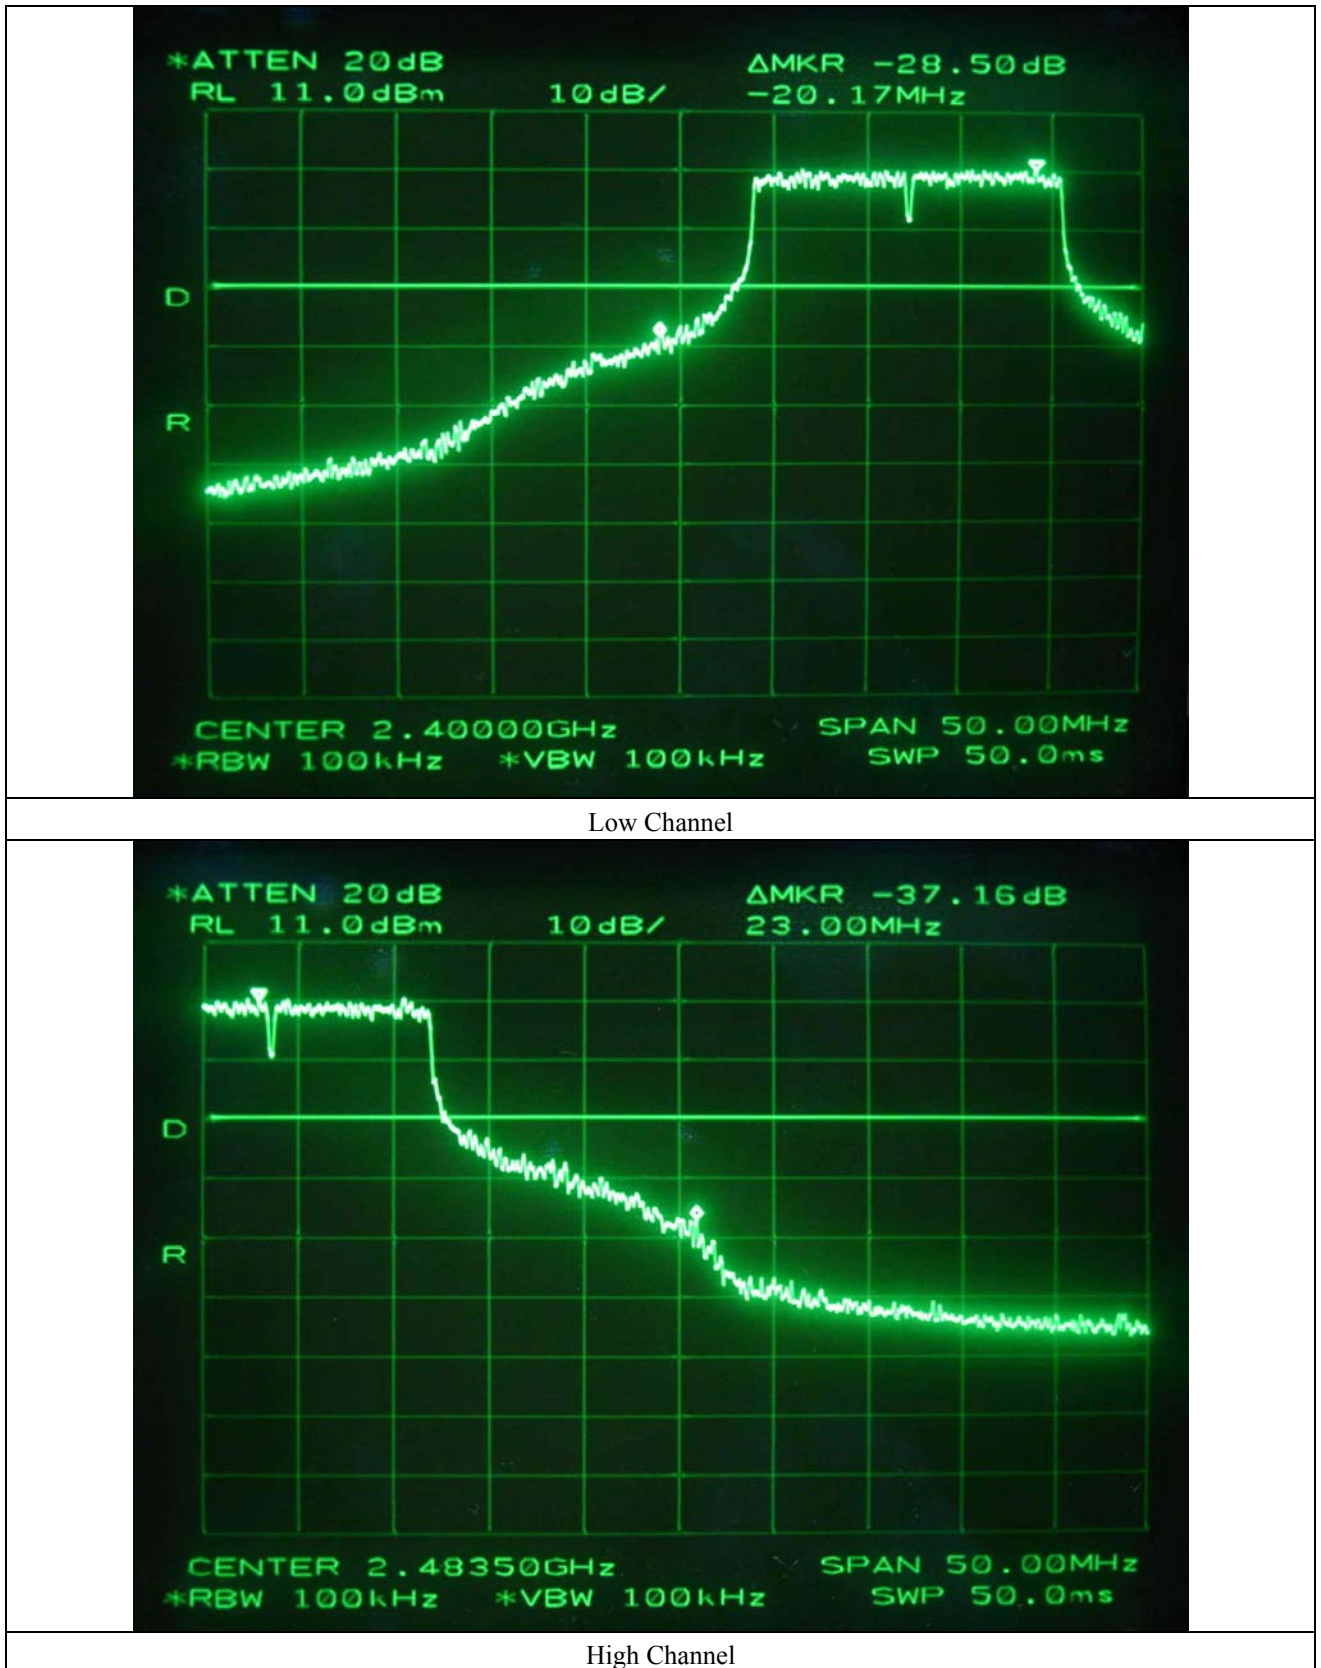


It should not be reproduced except in full, without the written approval of ONETECH.


EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

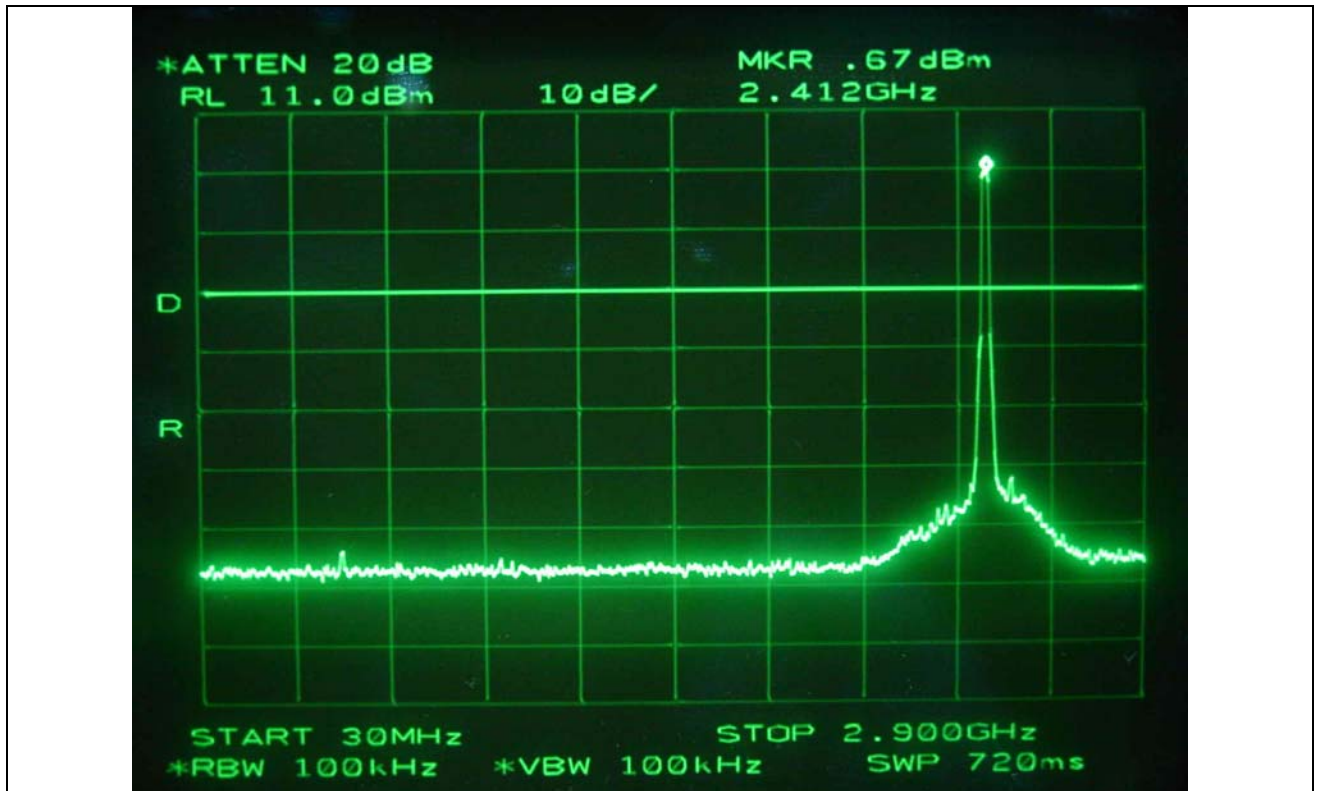

Low Channel

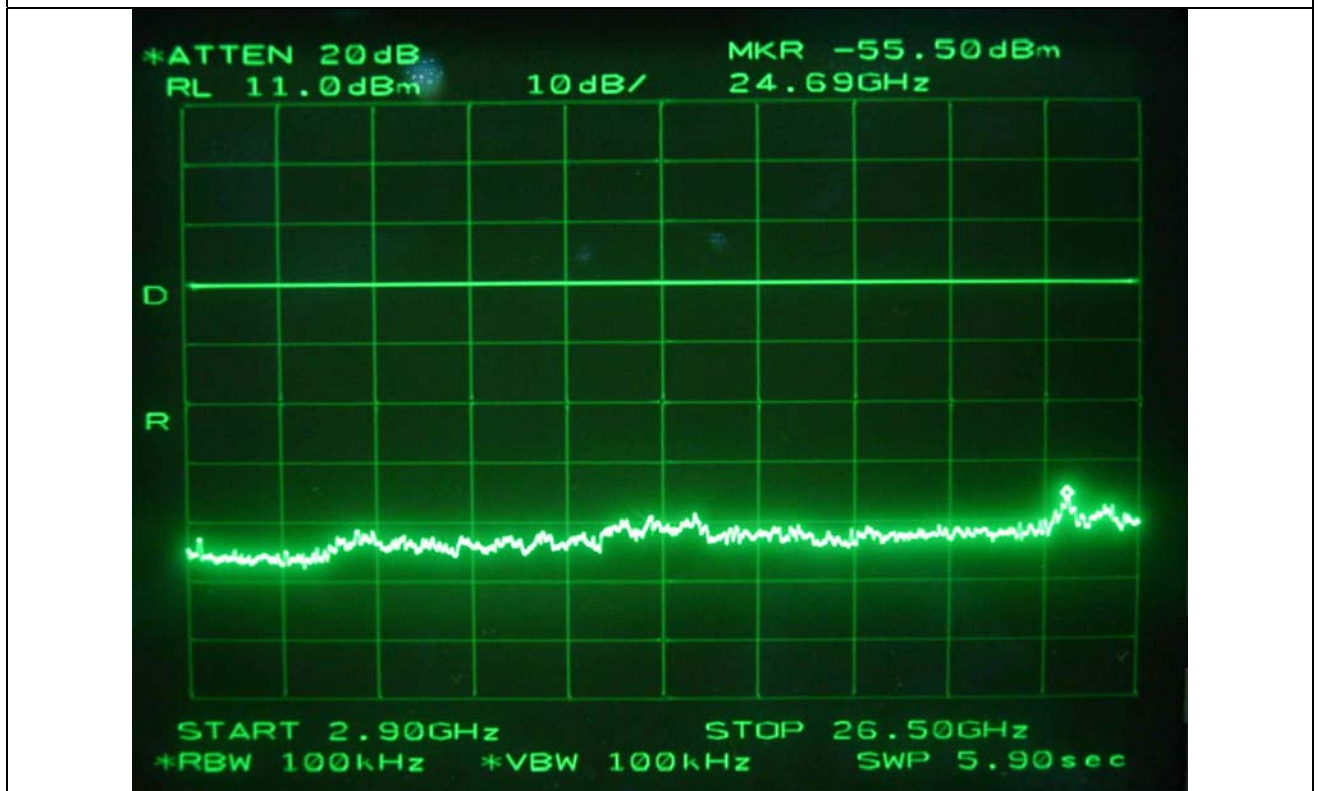


Low Channel

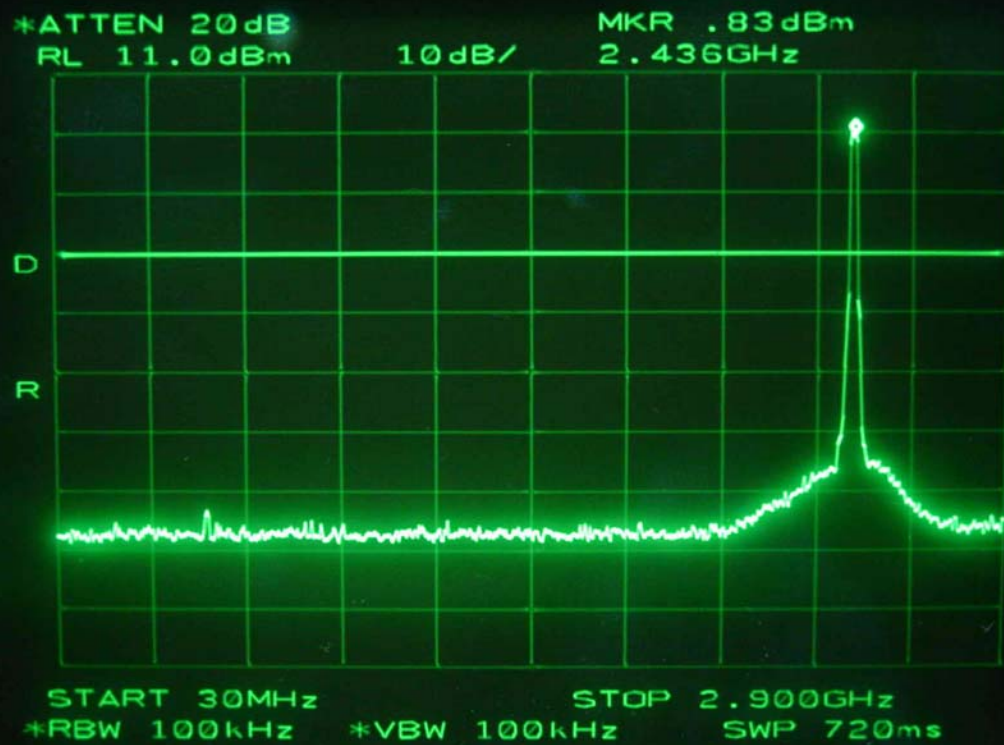


Middle Channel



Middle Channel

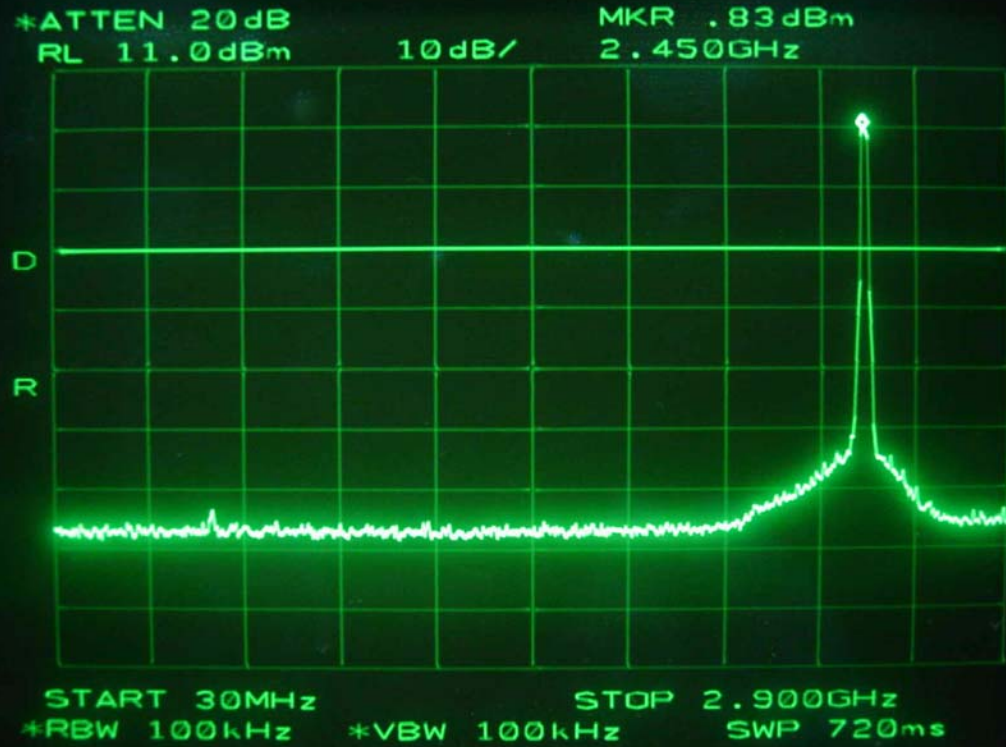

High Channel

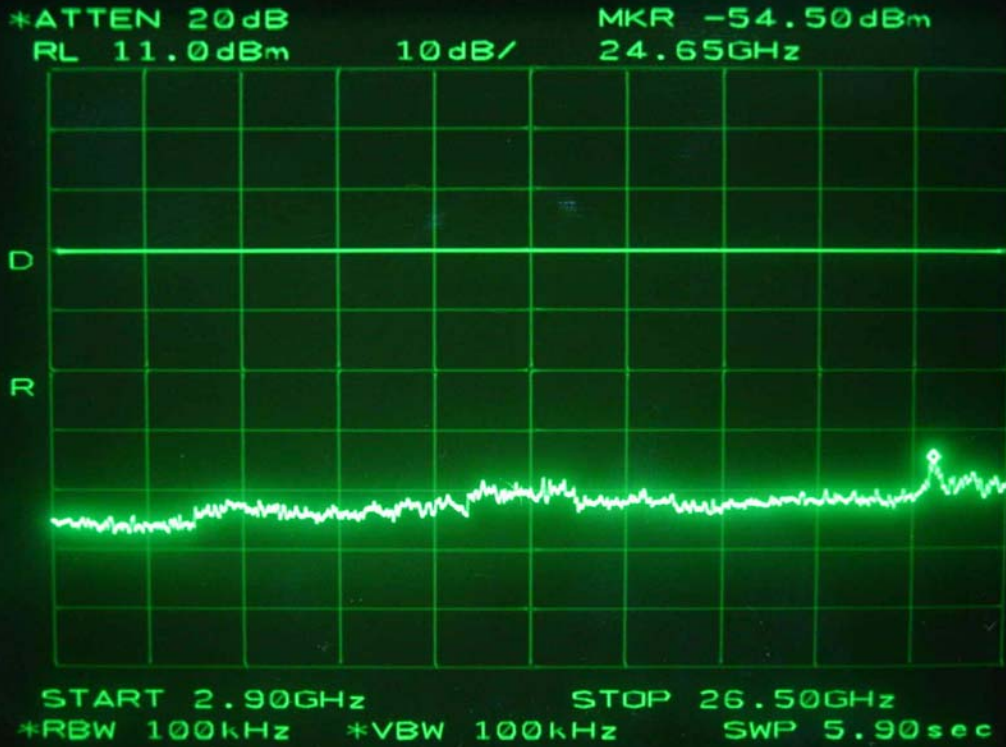

High Channel

8.3.6. Test data for radiated emission

8.3.6.1 Radiated Emission which fall in the Restricted Band

- Test Date : September 28, 2006
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25GHz
- Measurement distance : 3m
- Operating Condition : Low / High Channel
- Result : PASSED BY -27.13 dB at Low Channel (6 Mbps)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel (6 Mbps)										
2389.73	34.83	Peak	H	27.64	1.33	26.1		37.70	74.00	-36.30
	24.00	Average	H					26.87	54.00	-27.13
	34.00	Peak	V					36.87	74.00	-37.13
	23.17	Average	V					26.04	54.00	-27.96
Test Data for Low Channel (24 Mbps)										
2389.73	34.83	Peak	H	27.59	1.33	26.1		37.65	74.00	-36.35
	23.83	Average	H					26.65	54.00	-27.35
	33.50	Peak	V					36.32	74.00	-37.68
	23.00	Average	V					25.82	54.00	-28.18
Test Data for Low Channel (54 Mbps)										
2389.73	34.50	Peak	H	27.59	1.33	26.1		37.32	74.00	-36.69
	23.50	Average	H					26.32	54.00	-27.69
	33.83	Peak	V					36.65	74.00	-37.36
	23.50	Average	V					26.32	54.00	-27.69

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

-Continued

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel (6 Mbps)										
2483.53	33.83	Peak	H	27.64	1.33	26.1		36.70	74.00	-37.30
	23.50	Average	H					26.37	54.00	-27.63
	35.00	Peak	V					37.87	74.00	-36.13
	23.83	Average	V					26.70	54.00	-27.30
Test Data for High Channel (24 Mbps)										
2483.53	33.83	Peak	H	27.59	1.33	26.1		36.65	74.00	-37.35
	23.33	Average	H					26.15	54.00	-27.85
	34.83	Peak	V					37.65	74.00	-36.35
	23.67	Average	V					26.49	54.00	-27.51
Test Data for High Channel (54 Mbps)										
2483.53	33.67	Peak	H	27.59	1.33	26.1		-36.49	74.00	-37.51
	23.50	Average	H					-26.32	54.00	-27.68
	34.50	Peak	V					-37.32	74.00	-36.68
	23.67	Average	V					-26.49	54.00	-27.51

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Ki-Hong, Nam / Test Engineer

8.3.6.2 Spurious & Harmonic Radiated Emission

- Test Date : September 28, 2006
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 3m
- Result : PASSED BY -20.82 dB at Middle Channel (6 Mbps)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel (6 Mbps)										
2412.00	58.83	Peak	H	27.62	1.33			87.78	-	
	60.83	Peak	V					89.78	-	
4824.00*	35.00	Peak	H	31.30	2.67	26.10		42.87	74.00	-31.13
	24.00	Average	H					31.87	54.00	-22.13
	36.33	Peak	V					44.20	74.00	-29.80
	24.33	Average	V					32.20	54.00	-21.80
Test Data for Low Channel (24 Mbps)										
2412.00	58.50	Peak	H	27.61	1.33			87.44	-	
	60.33	Peak	V					89.27	-	
4824.00*	34.67	Peak	H	31.37	2.67	26.10		42.61	74.00	-31.39
	23.83	Average	H					31.77	54.00	-22.23
	36.20	Peak	V					44.14	74.00	-29.86
	24.15	Average	V					32.09	54.00	-21.91
Test Data for Low Channel (54 Mbps)										
2412.00	58.00	Peak	H	27.61	1.33			86.94	-	
	60.17	Peak	V					89.11	-	
4824.00*	35.00	Peak	H	31.37	2.67	26.10		42.94	74.00	-31.06
	23.83	Average	H					31.77	54.00	-22.23
	36.17	Peak	V					44.11	74.00	-29.89
	24.00	Average	V					31.94	54.00	-22.06

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Middle Channel (6 Mbps)										
2437.00	60.00	Peak	H	27.62	1.33			88.95	-	
	61.67	Peak	V					90.62	-	
4874.00*	36.50	Peak	H	31.44	2.67	26.10		44.51	74.00	-29.49
	25.17	Average	H					33.18	54.00	-20.82
	34.67	Peak	V					42.68	74.00	-31.32
	24.17	Average	V					32.18	54.00	-21.82
Test Data for Middle Channel (24 Mbps)										
2437.00	59.13	Peak	H	27.61	1.33			88.07	-	
	59.83	Peak	V					88.77	-	
4874.00*	36.33	Peak	H	31.30	2.67	26.10		44.20	74.00	-29.80
	25.00	Average	H					32.87	54.00	-21.13
	34.33	Peak	V					42.20	74.00	-31.80
	24.17	Average	V					32.04	54.00	-21.96
Test Data for Middle Channel (54 Mbps)										
2437.00	58.67	Peak	H	27.61	1.33			87.61	-	
	59.67	Peak	V					88.61	-	
4874.00*	36.50	Peak	H	31.30	2.67	26.10		44.37	74.00	-29.63
	24.83	Average	H					32.70	54.00	-21.30
	34.17	Peak	V					42.04	74.00	-31.96
	24.00	Average	V					31.87	54.00	-22.13

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel (6 Mbps)										
2462.00	58.83	Peak	H	27.62	1.33			87.78	-	
	60.17	Peak	V					89.12	-	
4924.00*	34.50	Peak	H	31.37	2.67	26.10		42.44	74.00	-31.56
	24.17	Average	H					32.11	54.00	-21.89
	35.00	Peak	V					42.94	74.00	-31.06
	23.67	Average	V					31.61	54.00	-22.39
Test Data for High Channel (24 Mbps)										
2462.00	58.33	Peak	H	27.61	1.33			87.27	-	
	59.50	Peak	V					88.44	-	
4924.00*	34.10	Peak	H	31.44	2.67	26.10		42.11	74.00	-31.87
	23.83	Average	H					31.84	54.00	-22.16
	34.67	Peak	V					42.68	74.00	-31.32
	23.67	Average	V					31.68	54.00	-22.32
Test Data for High Channel (54 Mbps)										
2462.00	57.67	Peak	H	27.61	1.33			86.61	-	
	58.95	Peak	V					87.89	-	
4924.00*	34.50	Peak	H	31.44	2.67	26.10		42.51	74.00	-31.49
	23.33	Average	H					31.34	54.00	-22.66
	34.50	Peak	V					42.51	74.00	-31.49
	23.33	Average	V					31.34	54.00	-22.66

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

기홍

Tested by: Ki-Hong, Nam / Test Engineer

8.4 PEAK POWER SPECTRUL DENSITY

8.4.1 Operating environment


Temperature : 21°C

Relative humidity : 43 %

8.4.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth, and sweep time was set to span / 3 kHz. The sweep time was allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

The maximum level from the EUT in a 3 kHz bandwidth was measured with above condition.

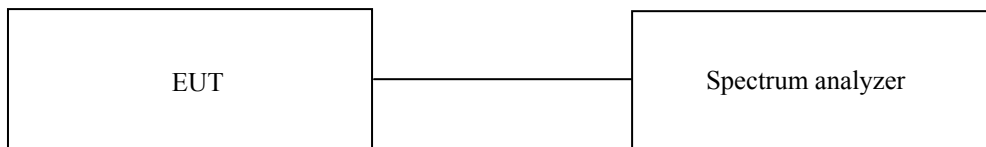

8.4.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006

All test equipment used is calibrated on a regular basis.

8.4.4 Test data


- Test Date : September 14, 2006
- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2412	-19.67	8	-27.67
Middle	2437	-18.67	8	-26.67
High	2462	-19.17	8	-27.17


Remark: See next page for measurement data.




Tested by: Ki-Hong, Nam / Test Engineer

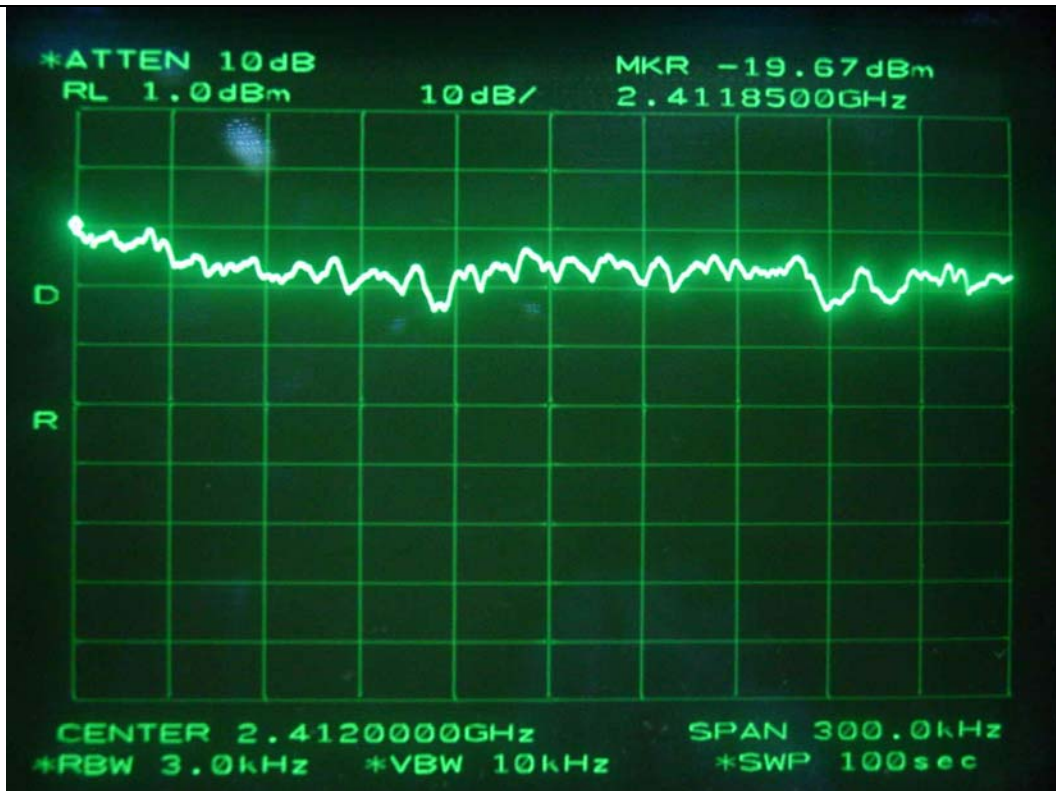

Low Channel

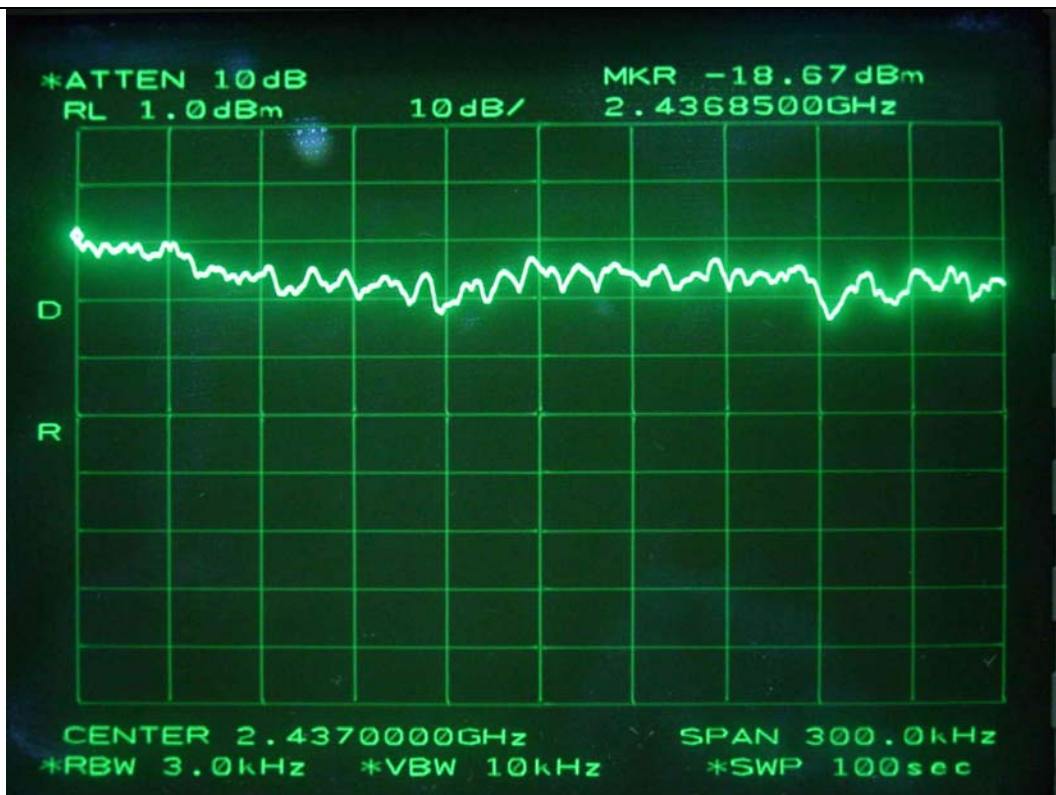

Middle Channel

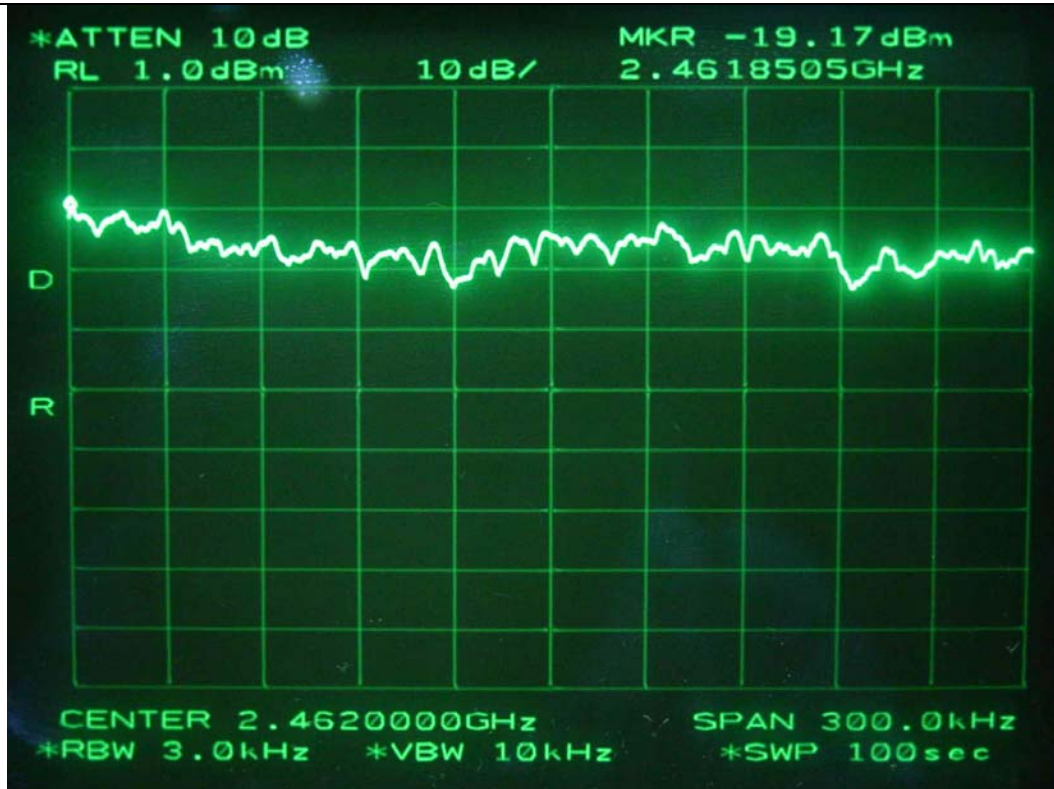

High Channel

9. RADIO FREQUENCY EXPOSURE

9.1 RF Exposure Limit

According to the FCC rule §1.1310, the limit for General Population/Uncontrolled exposure is 1mW/cm² for the device operating 1,500~100,000 MHz.

9.2 EUT Description

Kind of EUT	Personal PDA with Bluetooth and WLAN with Bluetooth and WLAN 802.11b, 802.11g
Operating Frequency Band	☒ WLAN: 2400 ~ 2483.5 MHz ☐ WLAN: 5180 ~ 5320 MHz / 5500 ~ 5700 MHz ☐ WLAN: 5745 ~ 5825 MHz ☒ Bluetooth: 2400 ~ 2483.5 MHz
Device Category	☒ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others
Max. Output Power	WLAN: 20.8 dBm (802.11b), 22.7 dBm (802.11g) Bluetooth: -3.0 dBm
Used Antenna	2 Same Antenna
Used Antenna Gain	WLAN and Bluetooth: 1.9dBi
Exposure Evaluation Applied	☐ MPE ☐ SAR ☒ N/A

9.3 Test Result

According to the rule, §1.1307(b) (1) and §2.1093, PORTABLE devices using WLAN and Bluetooth technology according to §15.247 are exempt from the regulation.

So, the device meets the RF exposure requirement.

10. RADIATED EMISSION TEST, Co-located Operation

10.1 Operating environment

Temperature : 21°C

Relative humidity : 44 %

10.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to 1000MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

10.3 Operating Condition for Test Setup

During above testing, the WLAN and Bluetooth function of the EUT was operated simultaneously among the combination of the Bluetooth middle channel with WLAN low, middle and high channel.

10.4 Measurement uncertainty

Radiated emission electric field intensity, 30 MHz ~ 300 MHz : ± 4.43 dB

Radiated emission electric field intensity, 300 MHz ~ 1000 MHz : ± 3.80 dB

Measurement uncertainty is calculated in accordance with WECC 19-1990. The measurement uncertainty is given with a confidence of 95% with the coverage factor, k=2.

10.5 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Dec 20, 2005
■ -	MA240	HD GmbH	Antenna Master	N/A	N/A
■ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DS420S	HD GmbH	Turn Table	N/A	N/A
■ -	VHA9103	Schwarzbeck	Biconical Antenna	91031852	Feb 13, 2006
■ -	9108-A(494)	Schwarzbeck	Log Periodic Antenna	62281001	Feb 13, 2006

All test equipment used is calibrated on a regular basis.

10.6. Test data for co-location

10.6.1 Radiated Emission which fall in the Restricted Band

- Test Date : September 28, 2006
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 40GHz
- Measurement distance : 3m
- Result : PASSED BY -27.17 dB at WLAN 802.11g, Low Channel (6 Mbps) + Bluetooth Low Channel

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for WLAN 802.11b, Low Channel + Bluetooth Low Channel										
2389.87	35.83	Peak	H	27.26	1.50	26.10		38.49	74.0	-35.51
	24.00	Average	H					26.66	54.0	-27.34
	34.17	Peak	V					36.83	74.00	-37.17
	23.67	Average	V					26.33	54.0	-27.67
Test Data for WLAN 802.11b, High Channel + Bluetooth High Channel										
2483.56	34.50	Peak	H	27.55	1.50	26.10		37.45	74.0	-36.56
	23.50	Average	H					26.45	54.0	-27.56
	35.50	Peak	V					38.45	74.00	-35.56
	23.50	Average	V					26.45	54.0	-27.56

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for WLAN 802.11g, Low Channel + Bluetooth Low Channel										
2389.33	34.00	Peak	H	27.26	1.50	26.10		36.66	74.0	-37.34
	24.17	Average	H					26.83	54.0	-27.17
	35.00	Peak	V					37.66	74.00	-36.34
	24.17	Average	V					26.83	54.0	-27.17
Test Data for WLAN 802.11g, High Channel + Bluetooth High Channel										
2483.56	34.67	Peak	H	27.55	1.50	26.10		37.62	74.0	-36.39
	23.67	Average	H					26.62	54.0	-27.39
	35.33	Peak	V					38.28	74.00	-35.73
	24.17	Average	V					27.12	54.0	-26.89

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

기홍

Tested by: Ki-Hong, Nam / Test Engineer

10.6.2 Spurious & Harmonic Radiated Emission

- Test Date : September 28, 2006
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3m
- Result : PASSED BY -21.04 dB at WLAN 802.11g, High Channel(6 Mbps) + Bluetooth Middle Channel

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for WLAN 802.11b, Low Channel + Bluetooth Middle Channel										
4824.00*	34.83	Peak	H	31.63	3.32	26.10		43.69	74.00	-30.31
	23.83	Average	H					32.69	54.00	-21.31
	34.50	Peak	V					43.36	74.00	-30.64
	23.33	Average	V					32.19	54.00	-21.81
Test Data for WLAN 802.11b, Middle Channel + Bluetooth Middle Channel										
4874.00*	34.67	Peak	H	31.72	3.37	26.10		43.67	74.00	-30.34
	23.67	Average	H					32.67	54.00	-21.34
	34.17	Peak	V					43.17	74.00	-30.84
	23.33	Average	V					32.33	54.00	-21.68
Test Data for WLAN 802.11b, High Channel + Bluetooth Middle Channel										
4924.00*	33.33	Peak	H	31.81	3.42	26.10		42.46	74.00	-31.54
	23.67	Average	H					32.80	54.00	-21.20
	33.67	Peak	V					42.80	74.00	-31.20
	23.67	Average	V					32.80	54.00	-21.20

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for WLAN 802.11g, Low Channel + Bluetooth Middle Channel										
4824.00*	34.67	Peak	H	31.63	3.32	26.10		43.53	74.00	-30.47
	23.83	Average	H					32.69	54.00	-21.31
	34.00	Peak	V					42.86	74.00	-31.14
	23.50	Average	V					32.36	54.00	-21.64
Test Data for WLAN 802.11g, Middle Channel + Bluetooth Middle Channel										
4874.00*	34.50	Peak	H	31.72	3.37	26.10		43.50	74.00	-30.51
	23.50	Average	H					32.50	54.00	-21.51
	34.83	Peak	V					43.83	74.00	-30.18
	23.67	Average	V					32.67	54.00	-21.34
Test Data for WLAN 802.11g, High Channel + Bluetooth Middle Channel										
4924.00*	34.17	Peak	H	31.81	3.42	26.10		43.30	74.00	-30.70
	23.33	Average	H					32.46	54.00	-21.54
	34.50	Peak	V					43.63	74.00	-30.37
	23.83	Average	V					32.96	54.00	-21.04

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

기홍

Tested by: Ki-Hong, Nam / Test Engineer

11. CONDUCTED EMISSION TEST

11.1 Operating environment

Temperature : 20°C

Relative humidity : 41 %

11.2 Test set-up

The EUT was placed on a wooden table, 0.8 meters height above the floor. The power of the EUT was connected through a 50 ohm/ 50 uH Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	May 15, 2006
■ -	NSLK 8126	Schwarzbeck	AMN	8126-404	July. 04, 2006
□ -	3825/2	EMCO	AMN	9109-1867	June 23, 2006

All test equipment used is calibrated on a regular basis.

11.4 Test data

- . Type of Test : FCC Class B
- . Test Date : September 28, 2006
- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15MHz ~ 30MHz
- . Test Result : PASSED BY -9.12dB at 0.205 MHz under average mode

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Limits		Emission level	Limits	
0.175	H	49.20	64.72	-15.50	35.21	54.72	-19.51
0.205	N	48.64	63.41	-14.77	44.29	53.41	-9.12
0.220	H	48.36	62.82	-14.46	34.64	52.82	-18.18
0.480	N	46.65	56.34	-9.69	35.03	46.34	-11.31
0.825	H	43.83	56.00	-12.17	33.08	46.00	-12.92
11.015	H	39.39	60.00	-20.61	24.73	50.00	-25.27


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line


See next page for an overview sweep performed with peak and average detector modes.



Tested by: Ki-Hong, Nam / Test Engineer

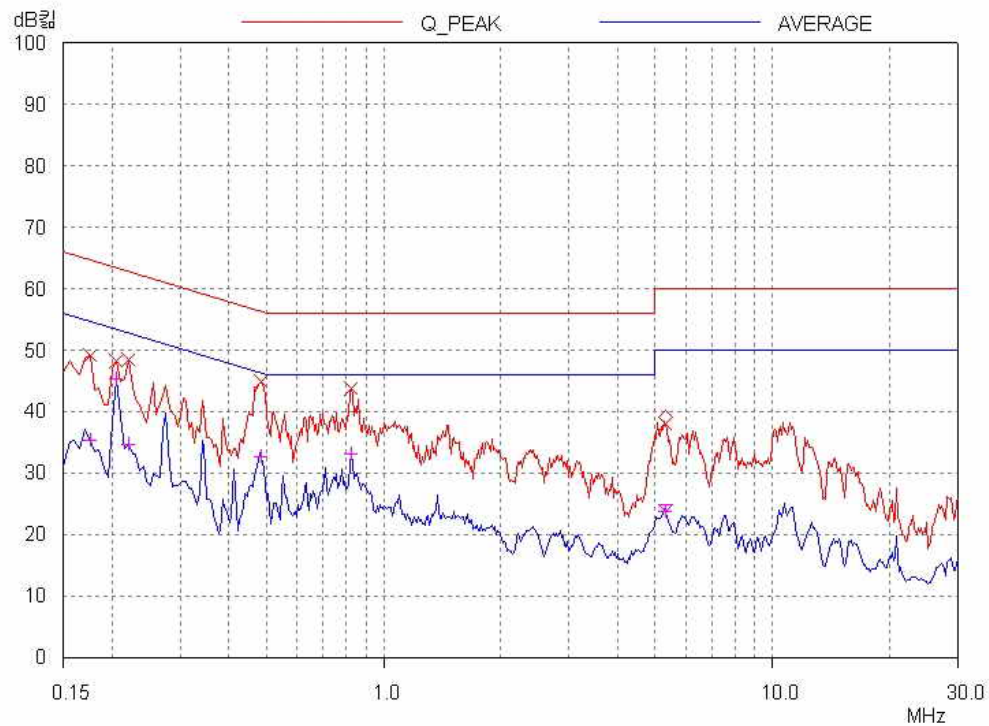

HOT LINE

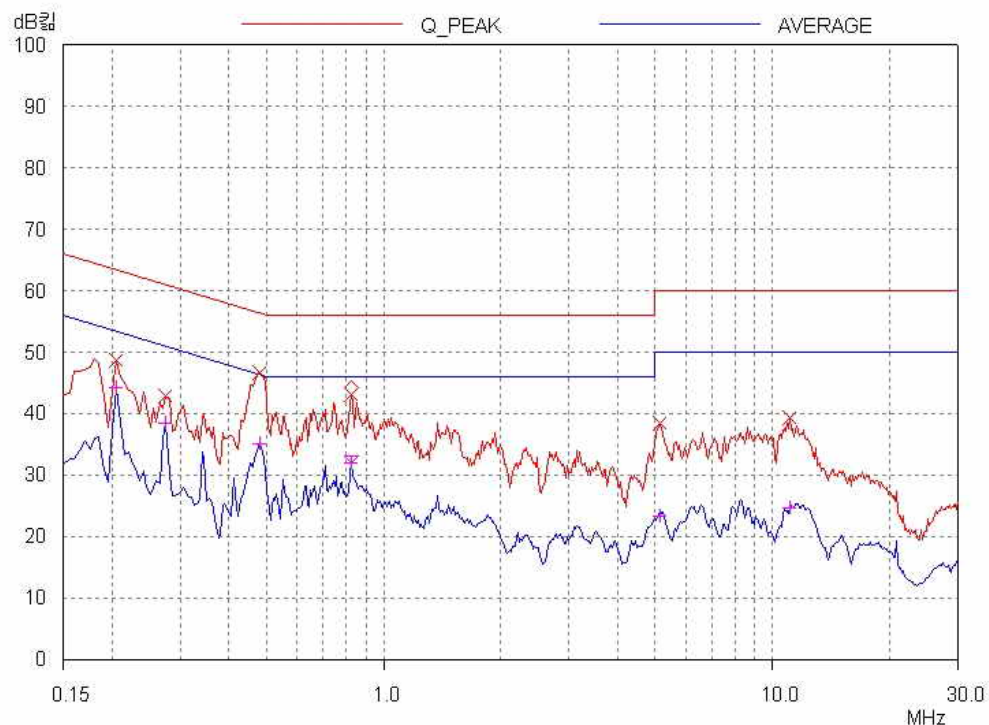

NEUTRAL LINE