


Antenna specification


Shenzhen Anchuang Zhilian Electronics Co., Ltd
Room 506, Runji Building, Building 1, Xingdong Community, Xin'an Street, Bao'an District,
Shenzhen
Model: C200

1.test data

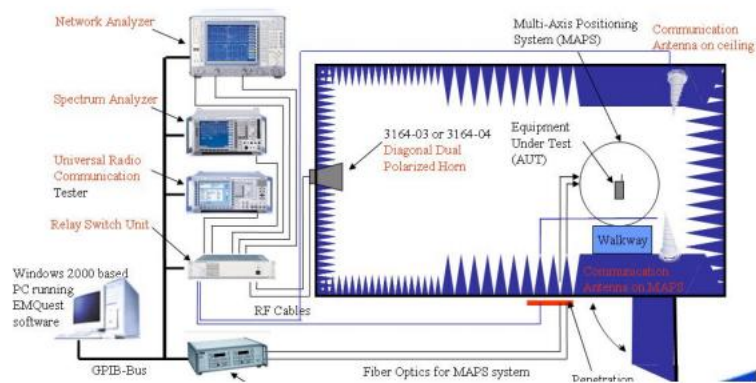

XH-IOE MPS2440 Test System	
23℃	
52%	
101KPa	



2.Antenna position

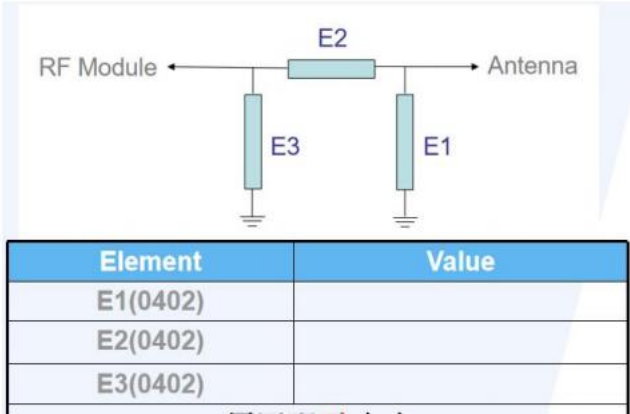


3.Frequency band

Frequency / MHz	Efficiency / dB	Efficiency / %	Gain/ dBi
2400	-5.2	30.2	-0.23
2410	-4.91	32.28	-0.13
2420	-4.85	32.73	0.39
2430	-4.21	37.93	1.2
2440	-4.49	35.56	0.99
2450	-4.29	37.24	1.56
2460	-3.83	41.4	1.75
2470	-3.82	41.5	2.35
2480	-3.73	42.36	2.16
2490	-3.85	41.21	2.37
2500	-3.76	42.07	2.21

5100	-3.29	46.88	0.91
5150	-3.91	40.64	0.95
5200	-3.31	46.67	1.81
5250	-3.12	48.75	2.17
5300	-3.62	43.45	2.47
5350	-3.29	46.88	2.93
5400	-3.23	47.53	3.18
5450	-3.16	48.31	3.47
5500	-3.37	46.03	3.85
5550	-3.56	44.06	3.82
5600	-3.57	43.95	4.04
5650	-3.98	39.99	3.82
5700	-3.66	43.05	4.28
5745	-3.59	42.85	4.3
5750	-3.91	40.73	4.32
5800	-3.94	39.89	4.43
5825	-3.89	40.44	4.31

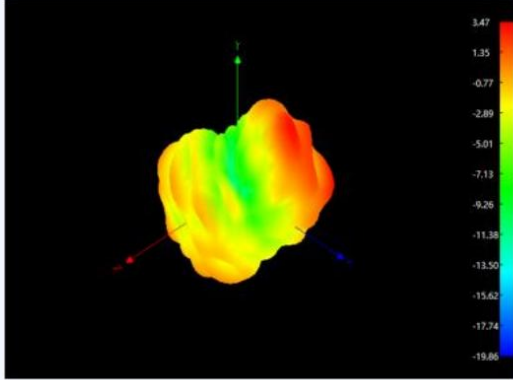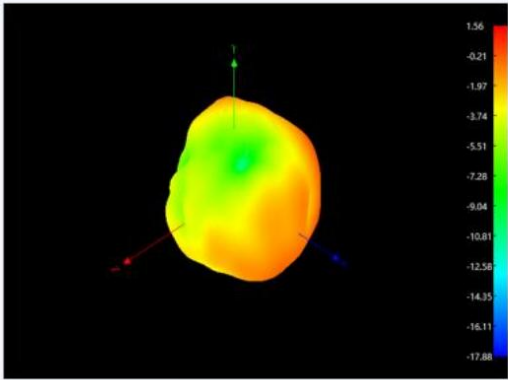

4.Antenna size

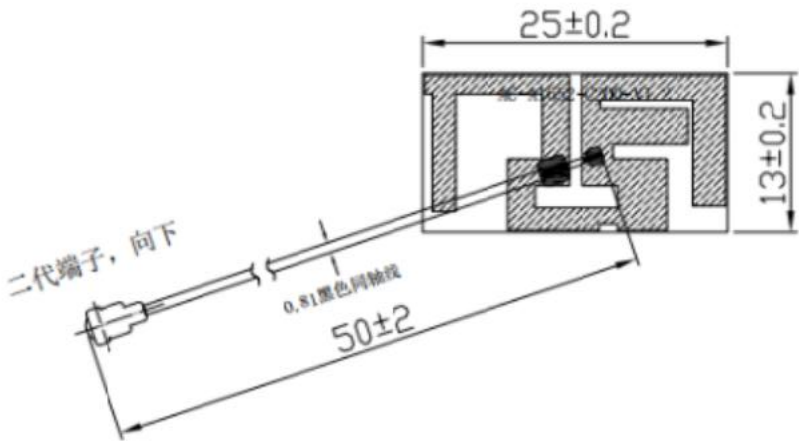

Sign: fei ti