

# FCC Test Report

Client Name : Grastron Technology CO., LTD  
Address : 4A Building NO.B, Dingxin Science and Technology Park,  
Honglangbei NO.2 Road, Xin'an street, Baoan district,  
Shenzhen, China  
Product Name : Wireless Presentation System  
Date : Jun. 09, 2020



**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

|                                                   |     |
|---------------------------------------------------|-----|
| 1. General Information.....                       | 5   |
| 1.1. Client Information.....                      | 5   |
| 1.2. Description of Device (EUT).....             | 5   |
| 1.3. Auxiliary Equipment Used During Test.....    | 6   |
| 1.4. Description of Test Modes.....               | 6   |
| 1.5. List of channels.....                        | 7   |
| 1.6. Description Of Test Setup.....               | 8   |
| 1.7. Test Equipment List.....                     | 9   |
| 1.8. Measurement Uncertainty.....                 | 10  |
| 1.9. Description of Test Facility.....            | 10  |
| 2. Summary of Test Results.....                   | 11  |
| 3. Conducted Emission Test.....                   | 12  |
| 3.1. Test Standard and Limit.....                 | 12  |
| 3.2. Test Setup.....                              | 12  |
| 3.3. Test Procedure.....                          | 12  |
| 3.4. Test Data.....                               | 12  |
| 4. Radiation Spurious Emission and Band Edge..... | 17  |
| 4.1. Test Standard and Limit.....                 | 17  |
| 4.2. Test Setup.....                              | 17  |
| 4.3. Test Procedure.....                          | 18  |
| 4.4. Test Data.....                               | 19  |
| 5. Maximum Peak Output Power Test.....            | 64  |
| 5.1. Test Standard and Limit.....                 | 64  |
| 5.2. Test Setup.....                              | 64  |
| 5.3. Test Procedure.....                          | 64  |
| 5.4. Test Data.....                               | 64  |
| 6. Occupancy Bandwidth Test.....                  | 68  |
| 6.1. Test Standard.....                           | 68  |
| 6.2. Test Setup.....                              | 68  |
| 6.3. Test Procedure.....                          | 68  |
| 6.4. Test Data.....                               | 68  |
| 7. Power Spectral Density Test.....               | 85  |
| 7.1. Test Standard and Limit.....                 | 85  |
| 7.2. Test Setup.....                              | 85  |
| 7.3. Test Procedure.....                          | 85  |
| 7.4. Test Data.....                               | 85  |
| 8. Antenna Requirement.....                       | 102 |
| 8.1. Test Standard and Requirement.....           | 102 |
| 8.2. Antenna Connected Construction.....          | 103 |
| 9. Frequency Stability.....                       | 104 |







## TEST REPORT

Applicant : Grastron Technology CO., LTD

Manufacturer : Grastron Technology CO., LTD

Product Name : Wireless Presentation System

Model No. : WMS-40, WMS-10, WMS-20, WMS-10x, WMS-20x, WMS-40x, WMS-40C,  
WMS-20C, WMS-10C, WMF-10C, WMF-20C, WMF-40C, WMF-10, WMF-20,  
WMF-40, WMB-Pro, WMS-15, WMS-25, WMS-45

Trade Mark : N.A.

Rating(s) : Input: DC 12V, 1A (via adapter input: AC 100~240V, 50/60Hz, 0.8A)  
POE Input: DC 48V, 0.27A

Test Standard(s) : FCC Part15 Subpart E 2019, Paragraph 15.407  
ANSI C63.10: 2013,

Test Method(s) : KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
KDB662911 D01 Multiple Transmitter Output v02r01

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Apr. 28, 2020

Date of Test

Apr. 28~May 25, 2020

Prepared By

*Dolly Mo*  
(Engineer / Dolly Mo)

Reviewer

*Bibo Zhang*  
(Supervisor / Bibo Zhang)

Approved &amp; Authorized Signer

*Tom Chen*  
(Manager / Tom Chen)

## 1. General Information

### 1.1. Client Information

|              |   |                                                                                                                              |
|--------------|---|------------------------------------------------------------------------------------------------------------------------------|
| Applicant    | : | Grastron Technology CO., LTD                                                                                                 |
| Address      | : | 4A Building NO.B, Dingxin Science and Technology Park, Honglangbei NO.2 Road, Xin'an street, Baoan district, Shenzhen, China |
| Manufacturer | : | Grastron Technology CO., LTD                                                                                                 |
| Address      | : | 4A Building NO.B, Dingxin Science and Technology Park, Honglangbei NO.2 Road, Xin'an street, Baoan district, Shenzhen, China |
| Factory      | : | Grastron Technology CO., LTD                                                                                                 |
| Address      | : | 4A Building NO.B, Dingxin Science and Technology Park, Honglangbei NO.2 Road, Xin'an street, Baoan district, Shenzhen, China |

### 1.2. Description of Device (EUT)

|                     |                      |                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name        | :                    | Wireless Presentation System                                                                                                                                                                                                                                                                                                                                          |
| Model No.           | :                    | WMS-40, WMS-10, WMS-20, WMS-10x, WMS-20x, WMS-40x, WMS-40C, WMS-20C, WMS-10C, WMF-10C, WMF-20C, WMF-40C, WMF-10, WMF-20, WMF-40, WMB-Pro, WMS-15, WMS-25, WMS-45<br>(Note: All samples are the same except the color and software function(but that does not affect the structure, electronic circuit, RF and EMC parameters), so we prepare "WMS-40" for test only.) |
| Trade Mark          | :                    | N.A.                                                                                                                                                                                                                                                                                                                                                                  |
| Test Power Supply   | :                    | AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter                                                                                                                                                                                                                                                                                                                 |
| Test Sample No.     | :                    | 1-2-1(Normal Sample), 1-2-2(Engineering Sample)                                                                                                                                                                                                                                                                                                                       |
| Product Description | Operation Frequency: | WiFi 2.4G: 802.11b/ g/ n(HT20) 2412-2462MHz<br>802.11n(HT40) 2422-2452MHz<br>WiFi 5.1G: 5180MHz~5240MHz<br>WiFi 5.8G: 5745MHz~5825MHz                                                                                                                                                                                                                                 |
|                     | Number of Channel:   | WiFi 2.4G: 11 Channels for 802.11b/ g/ n(HT20)<br>7 Channels for 802.11n(HT40)<br>WiFi 5.1G: 4 Channels for 802.11a<br>4 Channels for 802.11n(HT20)<br>4 Channels for 802.11ac(HT20)<br>2 Channels for 802.11n(HT40)<br>2 Channels for 802.11ac(HT40)<br>1 Channels for 802.11ac(HT80)<br>WiFi 5.8G: 5 Channels for 802.11a<br>5 Channels for 802.11n(HT20)           |



|                                                                                                                                                                                                      |                     |                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                      |                     | 5 Channels for 802.11ac(HT20)<br>2 Channels for 802.11n(HT40)<br>2 Channels for 802.11ac(HT40)<br>1 Channels for 802.11ac(HT80)                        |
|                                                                                                                                                                                                      | Modulation Type:    | WiFi 2.4G: 802.11b CCK; 802.11g/n OFDM<br>WiFi 5.1G: OFDM with<br>BPSK/QPSK/16QAM/64QAM/256QAM<br>WiFi 5.8G: OFDM with<br>BPSK/QPSK/16QAM/64QAM/256QAM |
|                                                                                                                                                                                                      | Antenna Type:       | Columnar Antenna                                                                                                                                       |
|                                                                                                                                                                                                      | Antenna Gain(Peak): | WiFi 2.4G: ANT A & ANT B 2 dBi<br>WiFi 5.1G&WiFi 5.8G: ANT A & ANT B 3 dBi                                                                             |
|                                                                                                                                                                                                      | Directional Gain:   | WiFi 2.4G: 5 dBi<br>WiFi 5.1G&WiFi 5.8G: 6 dBi                                                                                                         |
| Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.<br>2) This report is for 5.1G module.<br>3) All modes are support MIMO. |                     |                                                                                                                                                        |

### 1.3. Auxiliary Equipment Used During Test

|         |   |                                                                                   |
|---------|---|-----------------------------------------------------------------------------------|
| Adapter | : | M/N: GME18A-120150FXR<br>Input: 100-240V~ 50/60Hz, 0.8A<br>Output: DC 12.0V, 1.5A |
|---------|---|-----------------------------------------------------------------------------------|

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Mode                   | Test channel | Frequency (MHz) |
|------------------------|--------------|-----------------|
| OFDM(802.11a/n20/ac20) | CH 36        | 5180MHz         |
|                        | CH 40        | 5200MHz         |
|                        | CH 48        | 5240MHz         |
| OFDM(802.11n40/ac40)   | CH 38        | 5190MHz         |
|                        | CH 46        | 5230MHz         |
| OFDM(802.11ac80)       | CH 42        | 5210MHz         |

**Note:**

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

**1.5. List of channels****802.11a/n20/ac20**

| Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|---------|----------------|---------|----------------|
| 36      | 5180           | 44      | 5220           |
| 40      | 5200           | 48      | 5240           |



**802.11n40/ac40**

| Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|---------|----------------|---------|----------------|
| 38      | 5190           | 46      | 5230           |

**802.11ac80**

| Channel | Freq.<br>(MHz) |
|---------|----------------|
| 42      | 5210           |

## 1.6. Description Of Test Setup

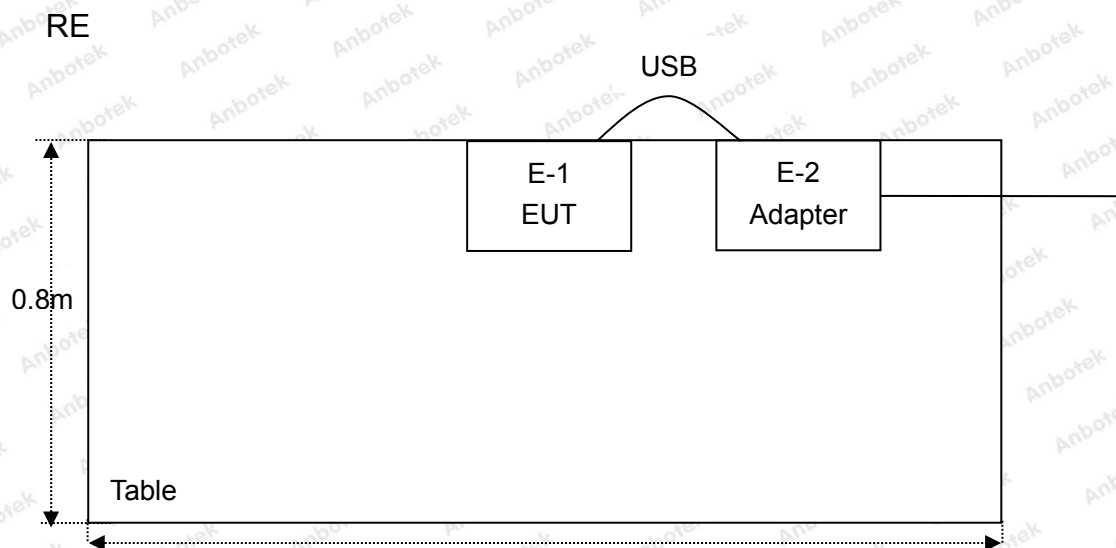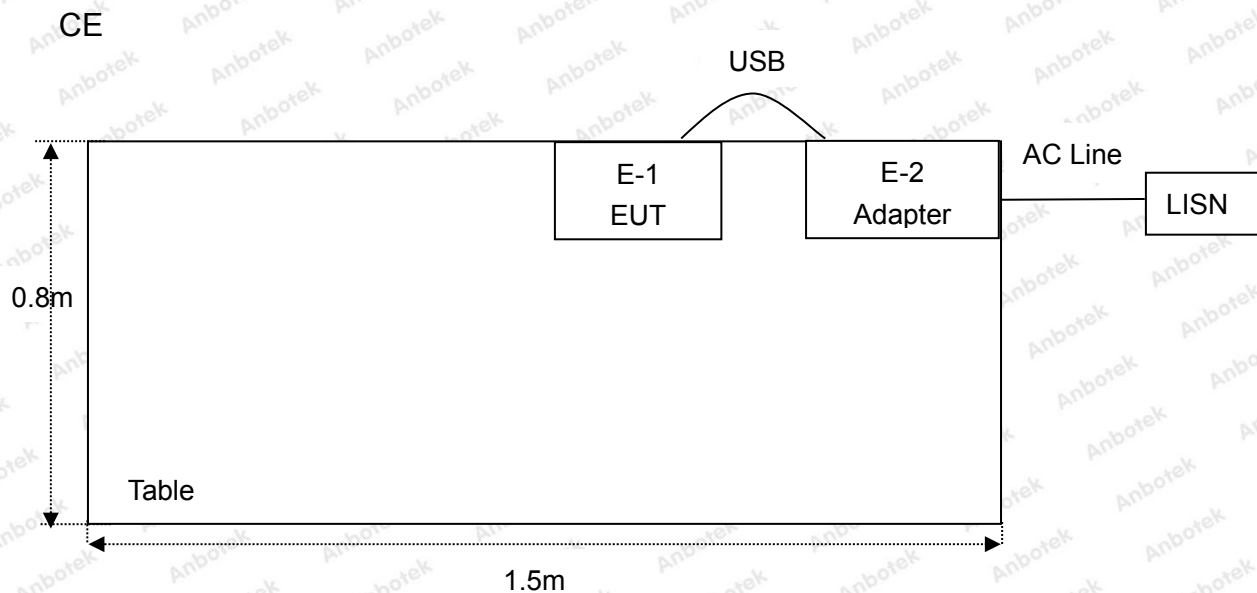



## 1.7. Test Equipment List

| Item | Equipment                                   | Manufacturer               | Model No.        | Serial No.    | Last Cal.     | Cal. Interval |
|------|---------------------------------------------|----------------------------|------------------|---------------|---------------|---------------|
| 1.   | L.I.S.N.<br>Artificial Mains<br>Network     | Rohde & Schwarz            | ENV216           | 100055        | Nov. 04, 2019 | 1 Year        |
| 2.   | EMI Test Receiver                           | Rohde & Schwarz            | ESPI3            | 101604        | Nov. 04, 2019 | 1 Year        |
| 3.   | RF Switching Unit                           | Compliance<br>Direction    | RSU-M2           | 38303         | Nov. 04, 2019 | 1 Year        |
| 4.   | MAX Spectrum<br>Analysis                    | Agilent                    | N9020A           | MY51170037    | Nov. 04, 2019 | 1 Year        |
| 5.   | Preamplifier                                | SKET Electronic            | BK1G18G30<br>D   | KD17503       | Nov. 04, 2019 | 1 Year        |
| 6.   | Double Ridged Horn<br>Antenna               | Instruments<br>corporation | GTH-0118         | 351600        | Nov. 01, 2019 | 1 Year        |
| 7.   | Bilog Broadband<br>Antenna                  | Schwarzbeck                | VULB9163         | VULB 9163-289 | Nov. 01, 2019 | 1 Year        |
| 8.   | Loop Antenna                                | Schwarzbeck                | FMZB1519B        | 00053         | Nov. 01, 2019 | 1 Year        |
| 9.   | Horn Antenna                                | A-INFO                     | LB-180400-K<br>F | J211060628    | Nov. 01, 2019 | 1 Year        |
| 10.  | Pre-amplifier                               | SONOMA                     | 310N             | 186860        | Nov. 04, 2019 | 1 Year        |
| 11.  | EMI Test Software<br>EZ-EMC                 | SHURPLE                    | N/A              | N/A           | N/A           | N/A           |
| 12.  | RF Test Control<br>System                   | YIHENG                     | YH3000           | 2017430       | Nov. 04, 2019 | 1 Year        |
| 13.  | Power Sensor                                | DAER                       | RPR3006W         | 15I00041SN045 | Nov. 04, 2019 | 1 Year        |
| 14.  | Power Sensor                                | DAER                       | RPR3006W         | 15I00041SN046 | Nov. 04, 2019 | 1 Year        |
| 15.  | MXA Spectrum<br>Analysis                    | Agilent                    | N9020A           | MY51170037    | Nov. 04, 2019 | 1 Year        |
| 16.  | MXG RF Vector<br>Signal Generator           | Agilent                    | N5182A           | MY48180656    | Nov. 04, 2019 | 1 Year        |
| 17.  | Signal Generator                            | Agilent                    | E4421B           | MY41000743    | Nov. 04, 2019 | 1 Year        |
| 18.  | DC Power Supply                             | LW                         | TPR-6420D        | 374470        | Nov. 04, 2019 | 1 Year        |
| 19.  | Constant<br>Temperature<br>Humidity Chamber | ZHONGJIAN                  | ZJ-KHWS80<br>B   | N/A           | Nov. 04, 2019 | 1 Year        |



### 1.8. Measurement Uncertainty

|                        |   |                          |
|------------------------|---|--------------------------|
| Radiation Uncertainty  | : | Ur = 3.9 dB (Horizontal) |
|                        |   | Ur = 3.8 dB (Vertical)   |
| Conduction Uncertainty | : | Uc = 3.4 dB              |

### 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 27, 2019.

#### ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

#### Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results

| Standard         | Test Type                      | Result |
|------------------|--------------------------------|--------|
| 15.207 & 15.407  | Conducted Emission             | PASS   |
| 15.205/15.209    | Spurious Emission              | PASS   |
| 15.407(b)        | Band Edge                      | PASS   |
| 15.407(a)(5)     | Occupy Bandwidth               | PASS   |
| 15.407(a)(1)(iv) | Maximum Conducted Output Power | PASS   |
| 15.407(a)(1)     | Peak Power Spectral Density    | PASS   |
| 15.203           | Antenna Requirement            | PASS   |
| 15.407(g)        | Frequency Stability            | PASS   |




### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

| Test Standard                                                                                                                            | FCC Part15 Section 15.207&15.407 |                                |               |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--------------------------------|---------------|
| Test Limit                                                                                                                               | Frequency                        | Maximum RF Line Voltage (dBuV) |               |
|                                                                                                                                          |                                  | Quasi-peak Level               | Average Level |
|                                                                                                                                          | 150kHz~500kHz                    | 66 ~ 56 *                      | 56 ~ 46 *     |
|                                                                                                                                          | 500kHz~5MHz                      | 56                             | 46            |
|                                                                                                                                          | 5MHz~30MHz                       | 60                             | 50            |
| <b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency.<br>(2) The lower limit shall apply at the transition frequency. |                                  |                                |               |

#### 3.2. Test Setup

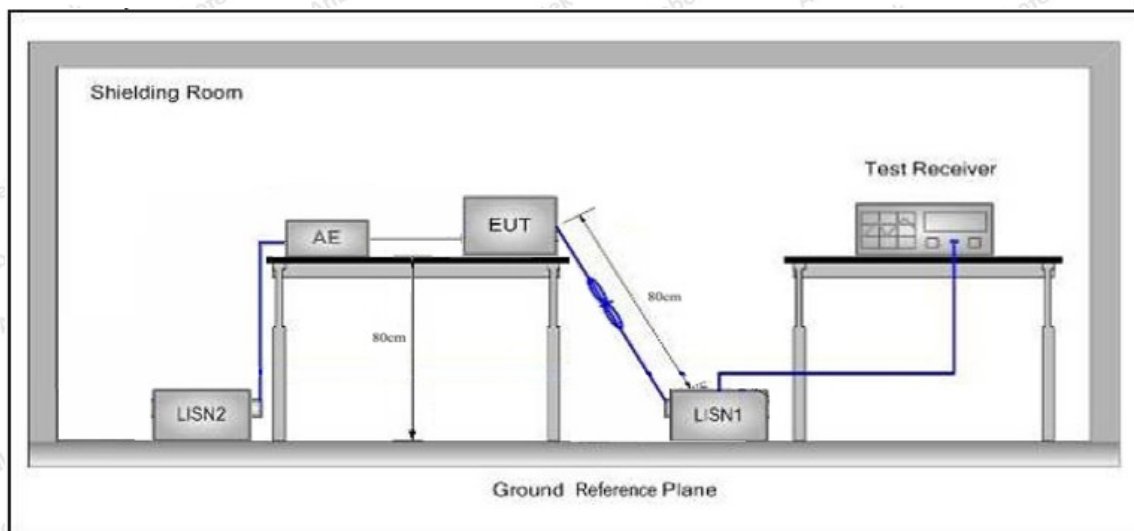

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

During the test, pre-scan all modes, and found the 802.11ac40 CH38 which is the worst case, only the worst case is recorded in the report.

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
Operating Condition: 802.11ac40 CH38  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Live Line  
Tem.: 24.4°C Hum.: 57%

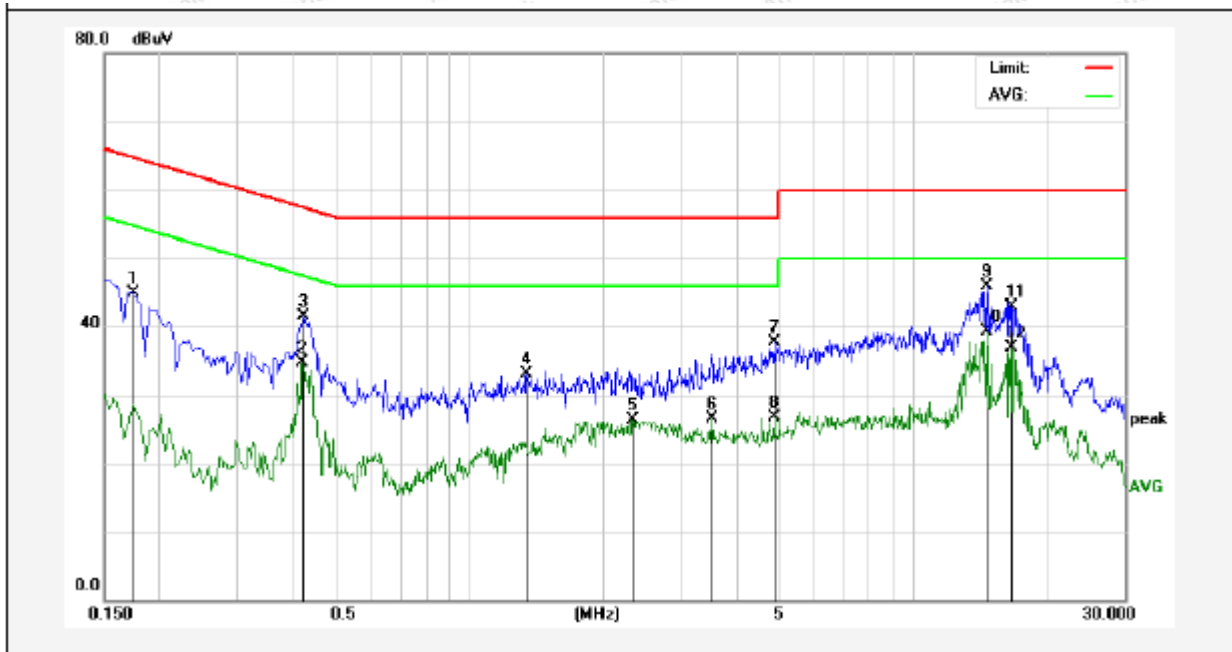

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.1737      | 25.05          | 19.90       | 44.95         | 64.78        | -19.83          | peak     |        |
| 2   | 0.4193      | 14.69          | 19.94       | 34.63         | 47.46        | -12.83          | AVG      |        |
| 3   | 0.4218      | 21.48          | 19.94       | 41.42         | 57.41        | -15.99          | peak     |        |
| 4   | 1.3460      | 12.88          | 20.13       | 33.01         | 56.00        | -22.99          | peak     |        |
| 5   | 2.3420      | 6.10           | 20.15       | 26.25         | 46.00        | -19.75          | AVG      |        |
| 6   | 3.5099      | 6.41           | 20.17       | 26.58         | 46.00        | -19.42          | AVG      |        |
| 7   | 4.8578      | 17.50          | 20.20       | 37.70         | 56.00        | -18.30          | peak     |        |
| 8   | 4.8578      | 6.58           | 20.20       | 26.78         | 46.00        | -19.22          | AVG      |        |
| 9   | 14.6777     | 25.55          | 20.27       | 45.82         | 60.00        | -14.18          | peak     |        |
| 10  | 14.6777     | 18.94          | 20.27       | 39.21         | 50.00        | -10.79          | AVG      |        |
| 11  | 16.7017     | 22.52          | 20.29       | 42.81         | 60.00        | -17.19          | peak     |        |
| 12  | 16.7017     | 16.56          | 20.29       | 36.85         | 50.00        | -13.15          | AVG      |        |

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: 802.11ac40 CH38  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.4°C Hum.: 57%

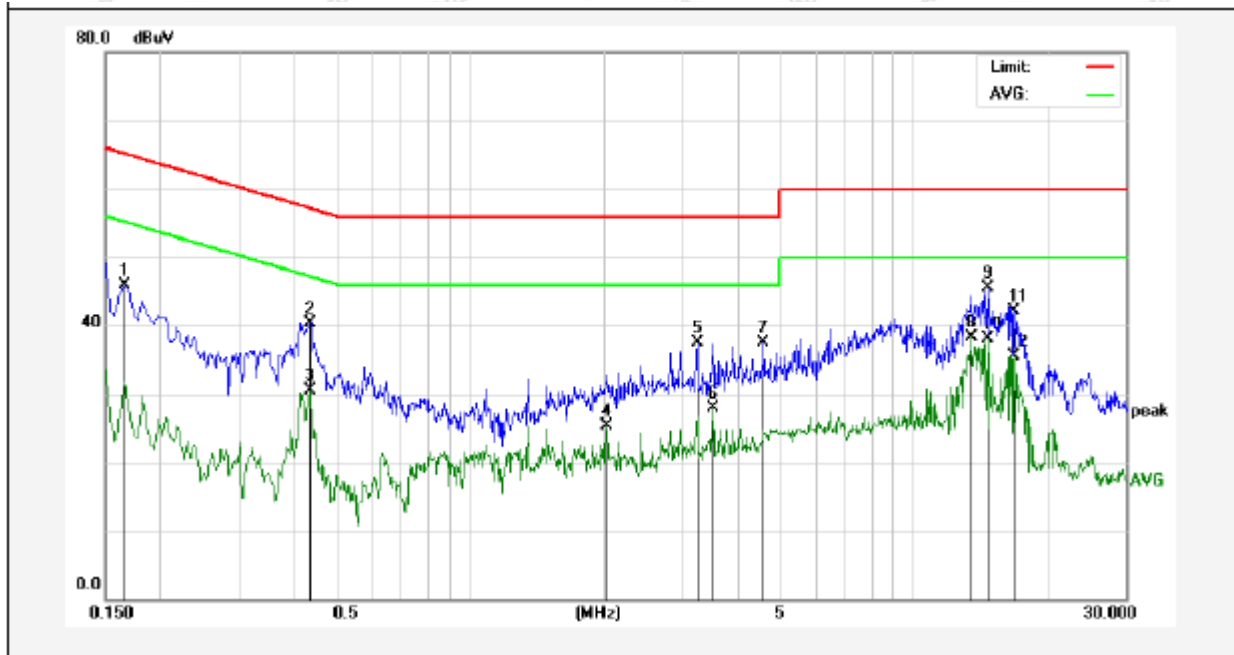


| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.1660      | 26.05          | 19.90       | 45.95         | 65.15        | -19.20          | peak     |        |
| 2   | 0.4339      | 20.43          | 19.95       | 40.38         | 57.18        | -16.80          | peak     |        |
| 3   | 0.4339      | 10.48          | 19.95       | 30.43         | 47.18        | -16.75          | AVG      |        |
| 4   | 2.0259      | 5.24           | 20.14       | 25.38         | 46.00        | -20.62          | AVG      |        |
| 5   | 3.2418      | 17.33          | 20.16       | 37.49         | 56.00        | -18.51          | peak     |        |
| 6   | 3.5099      | 7.67           | 20.17       | 27.84         | 46.00        | -18.16          | AVG      |        |
| 7   | 4.5899      | 17.40          | 20.20       | 37.60         | 56.00        | -18.40          | peak     |        |
| 8   | 13.4618     | 18.03          | 20.28       | 38.31         | 50.00        | -11.69          | AVG      |        |
| 9   | 14.6776     | 25.22          | 20.27       | 45.49         | 60.00        | -14.51          | peak     |        |
| 10  | 14.6776     | 17.90          | 20.27       | 38.17         | 50.00        | -11.83          | AVG      |        |
| 11  | 16.7776     | 21.91          | 20.29       | 42.20         | 60.00        | -17.80          | peak     |        |
| 12  | 16.7776     | 15.23          | 20.29       | 35.52         | 50.00        | -14.48          | AVG      |        |



**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: 802.11ac40 CH38  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.4°C Hum.: 57%

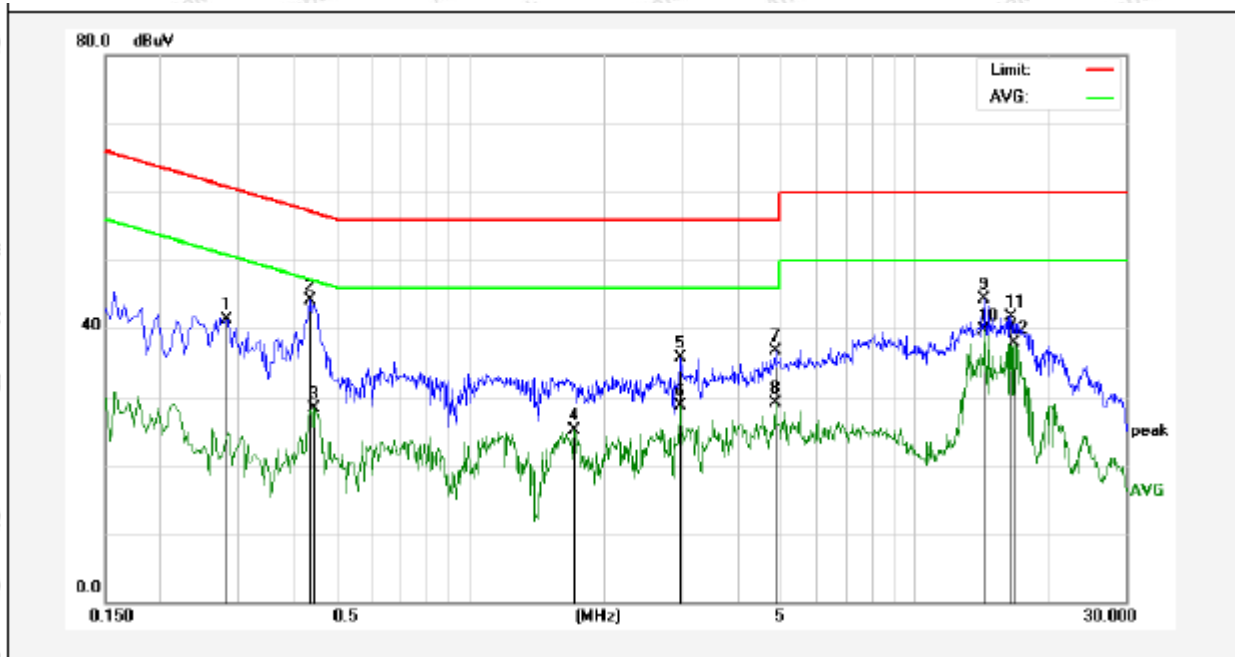

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.2818      | 21.46          | 19.89       | 41.35         | 60.76        | -19.41          | peak     |        |
| 2   | 0.4339      | 24.08          | 19.95       | 44.03         | 57.18        | -13.15          | peak     |        |
| 3   | 0.4460      | 8.26           | 19.96       | 28.22         | 46.95        | -18.73          | AVG      |        |
| 4   | 1.7098      | 4.92           | 20.13       | 25.05         | 46.00        | -20.95          | AVG      |        |
| 5   | 2.9700      | 15.60          | 20.16       | 35.76         | 56.00        | -20.24          | peak     |        |
| 6   | 2.9700      | 8.60           | 20.16       | 28.76         | 46.00        | -17.24          | AVG      |        |
| 7   | 4.8619      | 16.59          | 20.20       | 36.79         | 56.00        | -19.21          | peak     |        |
| 8   | 4.8619      | 8.96           | 20.20       | 29.16         | 46.00        | -16.84          | AVG      |        |
| 9   | 14.4099     | 24.07          | 20.27       | 44.34         | 60.00        | -15.66          | peak     |        |
| 10  | 14.4099     | 19.36          | 20.27       | 39.63         | 50.00        | -10.37          | AVG      |        |
| 11  | 16.5097     | 21.42          | 20.28       | 41.70         | 60.00        | -18.30          | peak     |        |
| 12  | 16.7777     | 17.57          | 20.29       | 37.86         | 50.00        | -12.14          | AVG      |        |

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: 802.11ac40 CH38  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.4°C Hum.: 57%

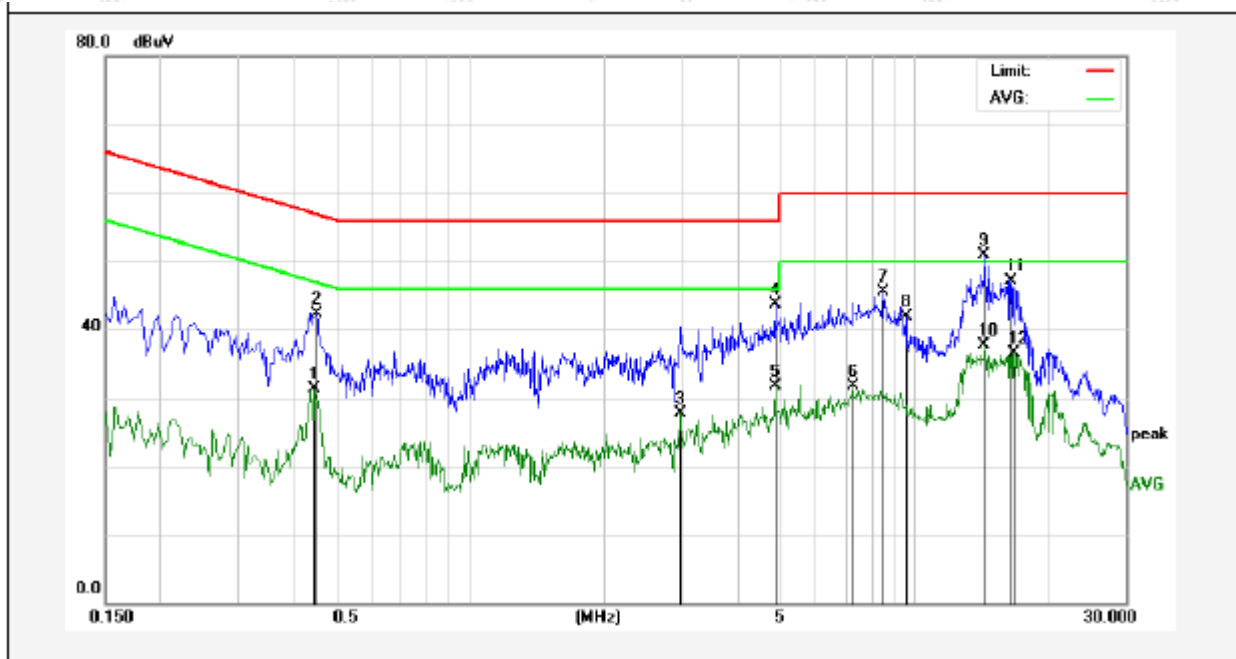

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.4460      | 11.26          | 19.96       | 31.22         | 46.95        | -15.73          | AVG      |        |
| 2   | 0.4500      | 22.30          | 19.96       | 42.26         | 56.87        | -14.61          | peak     |        |
| 3   | 2.9700      | 7.60           | 20.16       | 27.76         | 46.00        | -18.24          | AVG      |        |
| 4   | 4.8619      | 23.59          | 20.20       | 43.79         | 56.00        | -12.21          | peak     |        |
| 5   | 4.8619      | 11.46          | 20.20       | 31.66         | 46.00        | -14.34          | AVG      |        |
| 6   | 7.2899      | 11.42          | 20.27       | 31.69         | 50.00        | -18.31          | AVG      |        |
| 7   | 8.5059      | 25.13          | 20.30       | 45.43         | 60.00        | -14.57          | peak     |        |
| 8   | 9.5859      | 21.64          | 20.33       | 41.97         | 60.00        | -18.03          | peak     |        |
| 9   | 14.4099     | 30.57          | 20.27       | 50.84         | 60.00        | -9.16           | peak     |        |
| 10  | 14.4099     | 17.36          | 20.27       | 37.63         | 50.00        | -12.37          | AVG      |        |
| 11  | 16.5097     | 26.92          | 20.28       | 47.20         | 60.00        | -12.80          | peak     |        |
| 12  | 16.7017     | 16.21          | 20.29       | 36.50         | 50.00        | -13.50          | AVG      |        |

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209, 15.205 and 15.407 |                                  |                |            |                          |
|---------------|------------------------------------------------|----------------------------------|----------------|------------|--------------------------|
| Test Limit    | Frequency (MHz)                                | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|               | 0.009MHz~0.490MHz                              | 2400/F(kHz)                      | -              | -          | 300                      |
|               | 0.490MHz-1.705MHz                              | 24000/F(kHz)                     | -              | -          | 30                       |
|               | 1.705MHz-30MHz                                 | 30                               | -              | -          | 30                       |
|               | 30MHz~88MHz                                    | 100                              | 40.0           | Quasi-peak | 3                        |
|               | 88MHz~216MHz                                   | 150                              | 43.5           | Quasi-peak | 3                        |
|               | 216MHz~960MHz                                  | 200                              | 46.0           | Quasi-peak | 3                        |
|               | 960MHz~1000MHz                                 | 500                              | 54.0           | Quasi-peak | 3                        |
|               | Above 1000MHz                                  | 500                              | 54.0           | Average    | 3                        |
|               |                                                | -                                | 68.2           | Peak       | 3                        |

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit:  $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$ , for  $EIPR[dBm] = -27 \text{ dBm}$ .

### 4.2. Test Setup

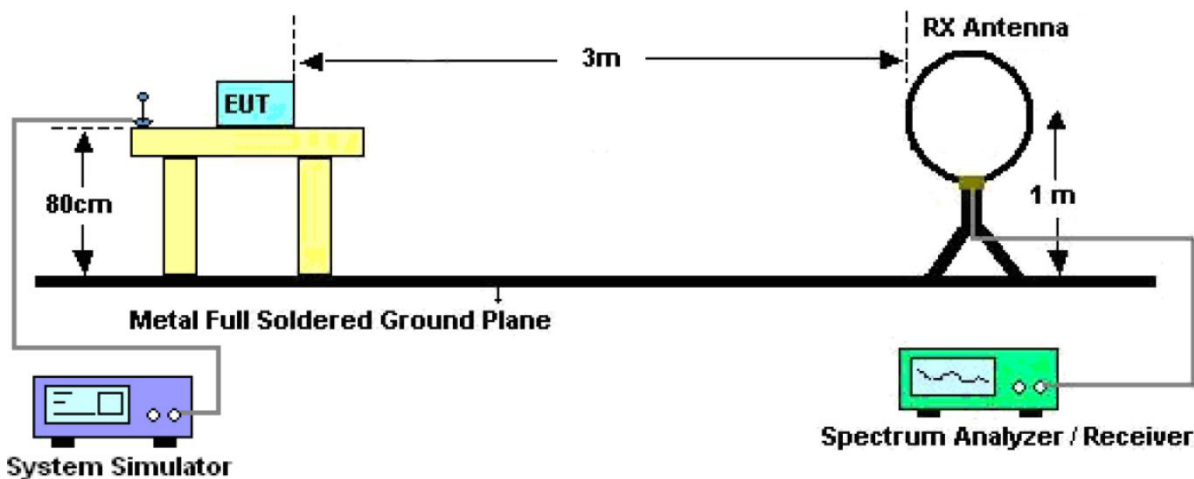


Figure 1. Below 30MHz



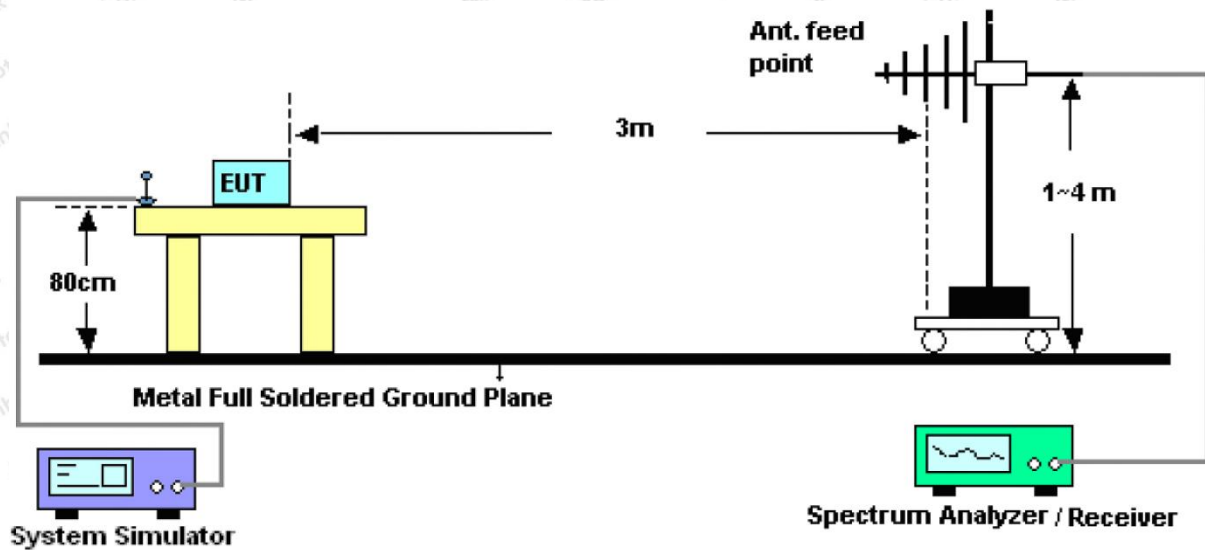


Figure 2. 30MHz to 1GHz

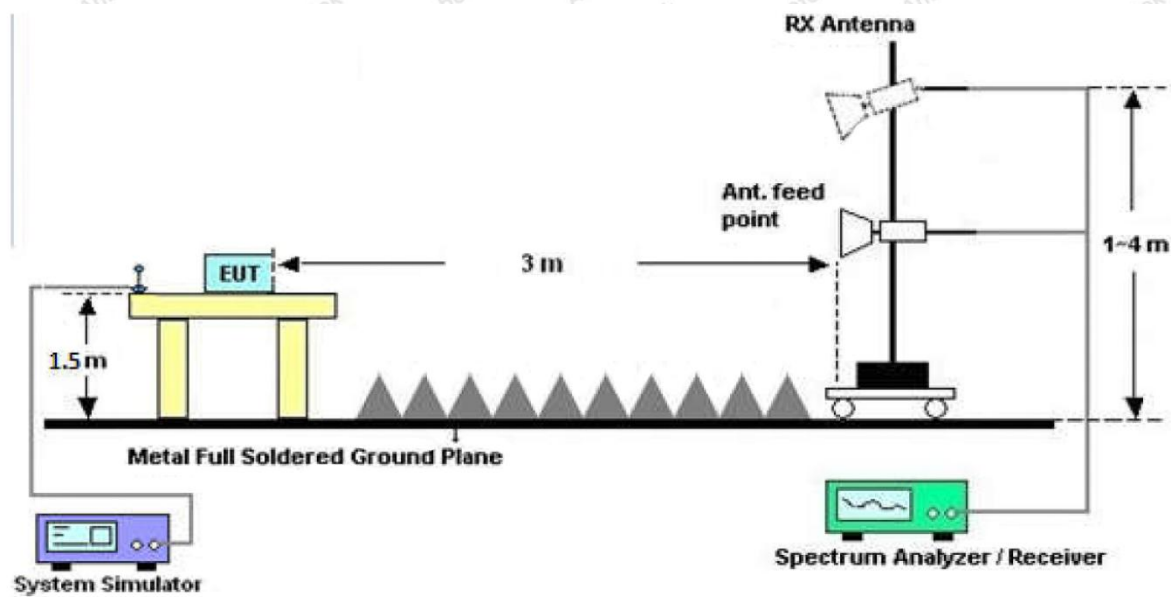


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

**Shenzhen Anbotek Compliance Laboratory Limited**

**Code:AB-RF-05-a**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data

##### PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found the 802.11ac40 CH38 which is the worst case, only the worst case is recorded in the report.



Report No.: 18220WC00044502

FCC ID: 2AWJK-WMS-40

Page 20 of 105

## Test Results (30~1000MHz)

Job No.: 18220WC00044502


Temp.(°C)/Hum.(%RH): 24.7°C/48%RH

Standard: FCC PART 15C

Power Source: AC 120V, 60Hz for adapter

Test Mode: 802.11ac40 CH38

Polarization: Horizontal

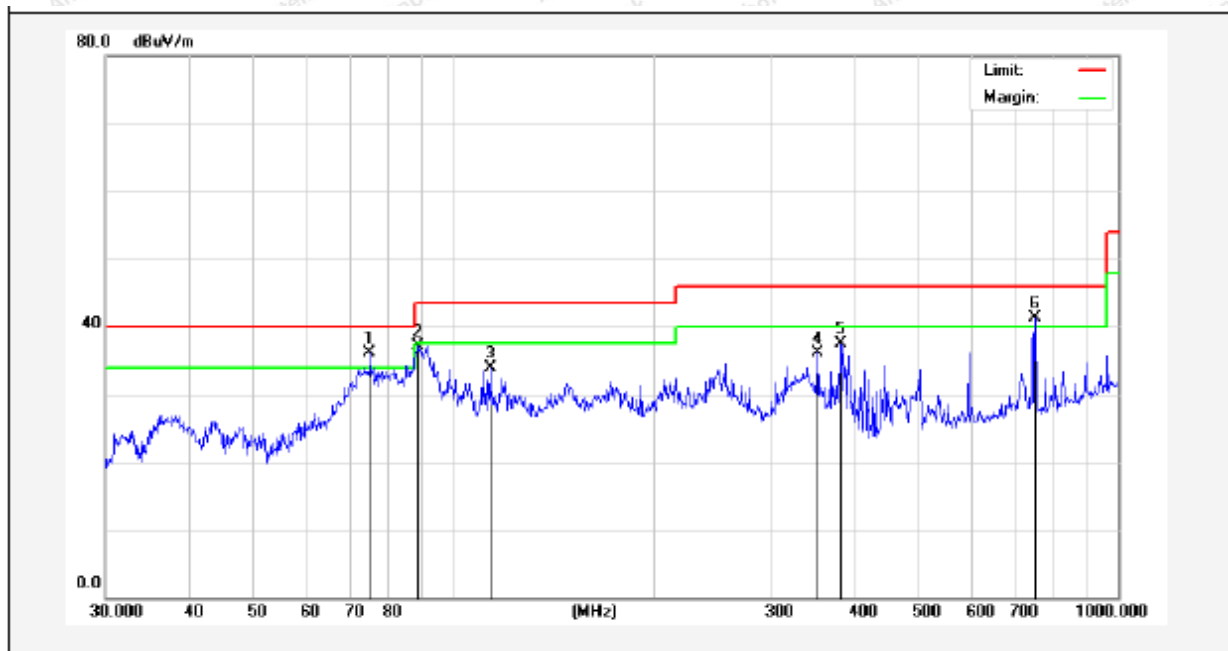

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1   | 74.9191     | 56.61          | -20.48        | 36.13           | 40.00          | -3.87           | QP       | 100         | 346          |        |
| 2   | 88.6524     | 57.71          | -20.54        | 37.17           | 43.50          | -6.33           | QP       | 100         | 264          |        |
| 3   | 113.7142    | 55.43          | -21.50        | 33.93           | 43.50          | -9.57           | QP       | 100         | 139          |        |
| 4   | 352.9433    | 49.19          | -12.99        | 36.20           | 46.00          | -9.80           | QP       | 100         | 76           |        |
| 5   | 382.5878    | 50.52          | -12.98        | 37.54           | 46.00          | -8.46           | QP       | 100         | 54           |        |
| 6   | 750.1082    | 46.60          | -5.22         | 41.38           | 46.00          | -4.62           | QP       | 100         | 238          |        |



Report No.: 18220WC00044502

FCC ID: 2AWJK-WMS-40

Page 21 of 105

## Test Results (30~1000MHz)

Job No.: 18220WC00044502


Temp.(°C)/Hum.(%RH): 24.7°C/48%RH

Standard: FCC PART 15C

Power Source: AC 120V, 60Hz for adapter

Test Mode: 802.11ac40 CH38

Polarization: Vertical

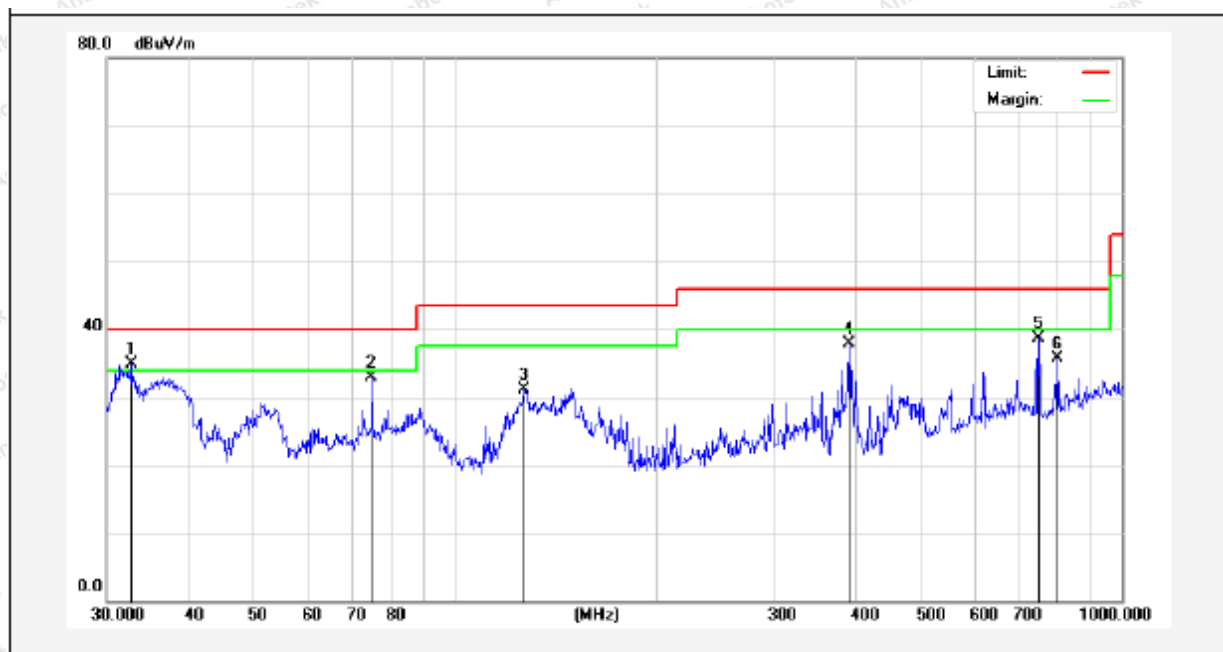

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1   | 32.6340     | 51.65          | -16.71        | 34.94           | 40.00          | -5.06           | QP       | 100         | 237          |        |
| 2   | 74.9191     | 51.20          | -18.37        | 32.83           | 40.00          | -7.17           | QP       | 100         | 51           |        |
| 3   | 126.7723    | 50.05          | -18.93        | 31.12           | 43.50          | -12.38          | QP       | 100         | 246          |        |
| 4   | 389.3548    | 49.25          | -11.43        | 37.82           | 46.00          | -8.18           | QP       | 100         | 67           |        |
| 5   | 750.1082    | 43.97          | -5.22         | 38.75           | 46.00          | -7.25           | QP       | 100         | 145          |        |
| 6   | 798.9796    | 39.81          | -4.17         | 35.64           | 46.00          | -10.36          | QP       | 100         | 186          |        |

## Test Results (Above 1000MHz)

## ANT A:

|            |              |               |        |
|------------|--------------|---------------|--------|
| Test mode: | IEEE 802.11a | Test channel: | Low CH |
|------------|--------------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 40.44             | 31.98                 | 17.08           | 33.91              | 55.59          | 68.20               | -12.61          | V    |
| 15540.00        | 41.57             | 32.65                 | 20.03           | 34.85              | 59.40          | 68.20               | -8.80           | V    |
| 10360.00        | 39.35             | 31.98                 | 17.08           | 33.91              | 54.50          | 68.20               | -13.70          | H    |
| 15540.00        | 39.28             | 32.65                 | 20.03           | 34.85              | 57.11          | 68.20               | -11.09          | H    |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 28.04             | 31.98                 | 17.08           | 33.91              | 43.19          | 54.00               | -10.81          | V    |
| 15540.00        | 27.76             | 32.65                 | 20.03           | 34.85              | 45.59          | 54.00               | -8.41           | V    |
| 10360.00        | 29.59             | 31.98                 | 17.08           | 33.91              | 44.74          | 54.00               | -9.26           | H    |
| 15540.00        | 29.25             | 32.65                 | 20.03           | 34.85              | 47.08          | 54.00               | -6.92           | H    |

|            |              |               |        |
|------------|--------------|---------------|--------|
| Test mode: | IEEE 802.11a | Test channel: | Mid CH |
|------------|--------------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.24             | 32.44                 | 17.18           | 33.91              | 56.95          | 68.20               | -11.25          | V    |
| 15600.00        | 39.54             | 32.78                 | 20.12           | 34.86              | 57.58          | 68.20               | -10.62          | V    |
| 10400.00        | 39.19             | 32.44                 | 17.18           | 33.91              | 54.90          | 68.20               | -13.30          | H    |
| 15600.00        | 41.65             | 32.78                 | 20.12           | 34.86              | 59.69          | 68.20               | -8.51           | H    |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 27.52             | 32.44                 | 17.18           | 33.91              | 43.23          | 54.00               | -10.77          | V    |
| 15600.00        | 29.07             | 32.78                 | 20.12           | 34.86              | 47.11          | 54.00               | -6.89           | V    |
| 10400.00        | 27.76             | 32.44                 | 17.18           | 33.91              | 43.47          | 54.00               | -10.53          | H    |
| 15600.00        | 28.48             | 32.78                 | 20.12           | 34.86              | 46.52          | 54.00               | -7.48           | H    |

|            |              |               |         |
|------------|--------------|---------------|---------|
| Test mode: | IEEE 802.11a | Test channel: | High CH |
|------------|--------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 41.91             | 32.59                 | 18.02           | 33.92              | 58.60          | 68.20               | -9.60           | V    |
| 15720.00        | 41.83             | 32.87                 | 20.15           | 34.88              | 59.97          | 68.20               | -8.23           | V    |
| 10480.00        | 40.40             | 32.59                 | 18.02           | 33.92              | 57.09          | 68.20               | -11.11          | H    |
| 15720.00        | 39.18             | 32.87                 | 20.15           | 34.88              | 57.32          | 68.20               | -10.88          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 28.87             | 32.59                 | 18.02           | 33.92              | 45.56          | 54.00               | -8.44           | V    |
| 15720.00        | 28.10             | 32.87                 | 20.15           | 34.88              | 46.24          | 54.00               | -7.76           | V    |
| 10480.00        | 29.94             | 32.59                 | 18.02           | 33.92              | 46.63          | 54.00               | -7.37           | H    |
| 15720.00        | 29.96             | 32.87                 | 20.15           | 34.88              | 48.10          | 54.00               | -5.90           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | Low CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 40.41             | 31.98                 | 17.08           | 33.91              | 55.56          | 68.20               | -12.64          | V    |
| 15540.00        | 39.67             | 32.65                 | 20.03           | 34.85              | 57.50          | 68.20               | -10.70          | V    |
| 10360.00        | 39.08             | 31.98                 | 17.08           | 33.91              | 54.23          | 68.20               | -13.97          | H    |
| 15540.00        | 40.78             | 32.65                 | 20.03           | 34.85              | 58.61          | 68.20               | -9.59           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 29.31             | 31.98                 | 17.08           | 33.91              | 44.46          | 54.00               | -9.54           | V    |
| 15540.00        | 28.03             | 32.65                 | 20.03           | 34.85              | 45.86          | 54.00               | -8.14           | V    |
| 10360.00        | 29.44             | 31.98                 | 17.08           | 33.91              | 44.59          | 54.00               | -9.41           | H    |
| 15540.00        | 28.22             | 32.65                 | 20.03           | 34.85              | 46.05          | 54.00               | -7.95           | H    |





|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | Mid CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 40.46             | 32.44                 | 17.18           | 33.91              | 56.17          | 68.20               | -12.03          | V    |
| 15600.00        | 41.39             | 32.78                 | 20.12           | 34.86              | 59.43          | 68.20               | -8.77           | V    |
| 10400.00        | 40.72             | 32.44                 | 17.18           | 33.91              | 56.43          | 68.20               | -11.77          | H    |
| 15600.00        | 41.51             | 32.78                 | 20.12           | 34.86              | 59.55          | 68.20               | -8.65           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 29.55             | 32.44                 | 17.18           | 33.91              | 45.26          | 54.00               | -8.74           | V    |
| 15540.00        | 28.15             | 32.78                 | 20.12           | 34.86              | 46.19          | 54.00               | -7.81           | V    |
| 10360.00        | 27.99             | 32.44                 | 17.18           | 33.91              | 43.70          | 54.00               | -10.30          | H    |
| 15540.00        | 27.71             | 32.78                 | 20.12           | 34.86              | 45.75          | 54.00               | -8.25           | H    |

|            |                    |               |         |
|------------|--------------------|---------------|---------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | High CH |
|------------|--------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 40.71             | 32.59                 | 18.02           | 33.92              | 57.40          | 68.20               | -10.80          | V    |
| 15720.00        | 41.89             | 32.87                 | 20.15           | 34.88              | 60.03          | 68.20               | -8.17           | V    |
| 10480.00        | 39.33             | 32.59                 | 18.02           | 33.92              | 56.02          | 68.20               | -12.18          | H    |
| 15720.00        | 39.69             | 32.87                 | 20.15           | 34.88              | 57.83          | 68.20               | -10.37          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 28.56             | 32.59                 | 18.02           | 33.92              | 45.25          | 54.00               | -8.75           | V    |
| 15600.00        | 29.54             | 32.87                 | 20.15           | 34.88              | 47.68          | 54.00               | -6.32           | V    |
| 10400.00        | 29.89             | 32.59                 | 18.02           | 33.92              | 46.58          | 54.00               | -7.42           | H    |
| 15600.00        | 28.65             | 32.87                 | 20.15           | 34.88              | 46.79          | 54.00               | -7.21           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | Low CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 41.55             | 31.98                 | 17.08           | 33.91              | 56.70          | 68.20               | -11.50          | V    |
| 15540.00        | 39.81             | 32.65                 | 20.03           | 34.85              | 57.64          | 68.20               | -10.56          | V    |
| 10360.00        | 39.11             | 31.98                 | 17.08           | 33.91              | 54.26          | 68.20               | -13.94          | H    |
| 15540.00        | 39.82             | 32.65                 | 20.03           | 34.85              | 57.65          | 68.20               | -10.55          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 28.65             | 31.98                 | 17.08           | 33.91              | 43.80          | 54.00               | -10.20          | V    |
| 15720.00        | 29.59             | 32.65                 | 20.03           | 34.85              | 47.42          | 54.00               | -6.58           | V    |
| 10480.00        | 27.53             | 31.98                 | 17.08           | 33.91              | 42.68          | 54.00               | -11.32          | H    |
| 15720.00        | 29.78             | 32.65                 | 20.03           | 34.85              | 47.61          | 54.00               | -6.39           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | Mid CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.53             | 32.44                 | 17.18           | 33.91              | 57.24          | 68.20               | -10.96          | V    |
| 15600.00        | 41.02             | 32.78                 | 20.12           | 34.86              | 59.06          | 68.20               | -9.14           | V    |
| 10400.00        | 39.71             | 32.44                 | 17.18           | 33.91              | 55.42          | 68.20               | -12.78          | H    |
| 15600.00        | 40.85             | 32.78                 | 20.12           | 34.86              | 58.89          | 68.20               | -9.31           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 27.98             | 32.44                 | 17.18           | 33.91              | 43.69          | 54.00               | -10.31          | V    |
| 15540.00        | 28.46             | 32.78                 | 20.12           | 34.86              | 46.50          | 54.00               | -7.50           | V    |
| 10360.00        | 29.84             | 32.44                 | 17.18           | 33.91              | 45.55          | 54.00               | -8.45           | H    |
| 15540.00        | 28.72             | 32.78                 | 20.12           | 34.86              | 46.76          | 54.00               | -7.24           | H    |

|            |                     |               |         |
|------------|---------------------|---------------|---------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | High CH |
|------------|---------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 39.43             | 32.59                 | 18.02           | 33.92              | 56.12          | 68.20               | -12.08          | V    |
| 15720.00        | 39.38             | 32.87                 | 20.15           | 34.88              | 57.52          | 68.20               | -10.68          | V    |
| 10480.00        | 39.11             | 32.59                 | 18.02           | 33.92              | 55.80          | 68.20               | -12.40          | H    |
| 15720.00        | 41.42             | 32.87                 | 20.15           | 34.88              | 59.56          | 68.20               | -8.64           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 28.88             | 32.59                 | 18.02           | 33.92              | 45.57          | 54.00               | -8.43           | V    |
| 15600.00        | 28.40             | 32.87                 | 20.15           | 34.88              | 46.54          | 54.00               | -7.46           | V    |
| 10400.00        | 27.14             | 32.59                 | 18.02           | 33.92              | 43.83          | 54.00               | -10.17          | H    |
| 15600.00        | 27.56             | 32.87                 | 20.15           | 34.88              | 45.70          | 54.00               | -8.30           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT40) | Test channel: | Low CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 40.58             | 31.98                 | 17.08           | 33.91              | 55.73          | 68.20               | -12.47          | V    |
| 15570.00        | 40.91             | 32.65                 | 20.03           | 34.85              | 58.74          | 68.20               | -9.46           | V    |
| 10380.00        | 39.93             | 31.98                 | 17.08           | 33.91              | 55.08          | 68.20               | -13.12          | H    |
| 15570.00        | 40.05             | 32.65                 | 20.03           | 34.85              | 57.88          | 68.20               | -10.32          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 29.79             | 31.98                 | 17.08           | 33.91              | 44.94          | 54.00               | -9.06           | V    |
| 15720.00        | 28.32             | 32.65                 | 20.03           | 34.85              | 46.15          | 54.00               | -7.85           | V    |
| 10480.00        | 28.06             | 31.98                 | 17.08           | 33.91              | 43.21          | 54.00               | -10.79          | H    |
| 15720.00        | 29.66             | 32.65                 | 20.03           | 34.85              | 47.49          | 54.00               | -6.51           | H    |



|            |                    |               |         |
|------------|--------------------|---------------|---------|
| Test mode: | IEEE 802.11n(HT40) | Test channel: | High CH |
|------------|--------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 39.87             | 32.59                 | 18.02           | 33.92              | 56.56          | 68.20               | -11.64          | V    |
| 15690.00        | 41.28             | 32.87                 | 20.15           | 34.88              | 59.42          | 68.20               | -8.78           | V    |
| 10460.00        | 40.72             | 32.59                 | 18.02           | 33.92              | 57.41          | 68.20               | -10.79          | H    |
| 15690.00        | 40.48             | 32.87                 | 20.15           | 34.88              | 58.62          | 68.20               | -9.58           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 27.95             | 32.59                 | 18.02           | 33.92              | 44.64          | 54.00               | -9.36           | V    |
| 15570.00        | 28.30             | 32.87                 | 20.15           | 34.88              | 46.44          | 54.00               | -7.56           | V    |
| 10380.00        | 27.06             | 32.59                 | 18.02           | 33.92              | 43.75          | 54.00               | -10.25          | H    |
| 15570.00        | 28.99             | 32.78                 | 20.12           | 34.86              | 47.03          | 54.00               | -6.97           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT40) | Test channel: | Low CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 39.81             | 31.98                 | 17.08           | 33.91              | 54.96          | 68.20               | -13.24          | V    |
| 15570.00        | 41.91             | 32.65                 | 20.03           | 34.85              | 59.74          | 68.20               | -8.46           | V    |
| 10380.00        | 40.79             | 31.98                 | 17.08           | 33.91              | 55.94          | 68.20               | -12.26          | H    |
| 15570.00        | 41.73             | 32.65                 | 20.03           | 34.85              | 59.56          | 68.20               | -8.64           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 29.10             | 31.98                 | 17.08           | 33.91              | 44.25          | 54.00               | -9.75           | V    |
| 15690.00        | 28.06             | 32.65                 | 20.03           | 34.85              | 45.89          | 54.00               | -8.11           | V    |
| 10460.00        | 28.65             | 31.98                 | 17.08           | 33.91              | 43.80          | 54.00               | -10.20          | H    |
| 15690.00        | 29.19             | 32.65                 | 20.03           | 34.85              | 47.02          | 54.00               | -6.98           | H    |

|            |                     |               |         |
|------------|---------------------|---------------|---------|
| Test mode: | IEEE 802.11ac(HT40) | Test channel: | High CH |
|------------|---------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 40.51             | 32.59                 | 18.02           | 33.92              | 57.20          | 68.20               | -11.00          | V    |
| 15690.00        | 39.53             | 32.87                 | 20.15           | 34.88              | 57.67          | 68.20               | -10.53          | V    |
| 10460.00        | 41.20             | 32.59                 | 18.02           | 33.92              | 57.89          | 68.20               | -10.31          | H    |
| 15690.00        | 39.82             | 32.87                 | 20.15           | 34.88              | 57.96          | 68.20               | -10.24          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 28.00             | 32.59                 | 18.02           | 33.92              | 44.69          | 54.00               | -9.31           | V    |
| 15690.00        | 27.08             | 32.87                 | 20.15           | 34.88              | 45.22          | 54.00               | -8.78           | V    |
| 10460.00        | 29.60             | 32.59                 | 18.02           | 33.92              | 46.29          | 54.00               | -7.71           | H    |
| 15690.00        | 27.76             | 32.78                 | 20.12           | 34.86              | 45.80          | 54.00               | -8.20           | H    |

|            |                     |               |  |
|------------|---------------------|---------------|--|
| Test mode: | IEEE 802.11ac(HT80) | Test channel: |  |
|------------|---------------------|---------------|--|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10420.00        | 40.23             | 32.44                 | 17.18           | 33.91              | 55.94          | 68.20               | -12.26          | V    |
| 15630.00        | 39.84             | 32.78                 | 20.12           | 34.86              | 57.88          | 68.20               | -10.32          | V    |
| 10420.00        | 39.04             | 32.44                 | 17.18           | 33.91              | 54.75          | 68.20               | -13.45          | H    |
| 15630.00        | 39.75             | 32.78                 | 20.12           | 34.86              | 57.79          | 68.20               | -10.41          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10420.00        | 28.38             | 32.44                 | 17.18           | 33.91              | 44.09          | 54.00               | -9.91           | V    |
| 15630.00        | 27.90             | 32.78                 | 20.12           | 34.86              | 45.94          | 54.00               | -8.06           | V    |
| 10420.00        | 27.57             | 32.44                 | 17.18           | 33.91              | 43.28          | 54.00               | -10.72          | H    |
| 15630.00        | 27.24             | 32.78                 | 20.12           | 34.86              | 45.28          | 54.00               | -8.72           | H    |

Note:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor



## Radiated Band Edge:

| Test Mode: 802.11a |                   |                       |                 |                          |                |                |                 |      |
|--------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00            | 45.97             | 28.65                 | 13.58           | 31.04                    | 57.16          | 74.00          | -16.84          | H    |
| 5350.00            | 48.58             | 29.16                 | 14.68           | 31.96                    | 60.46          | 74.00          | -13.54          | H    |
| 5150.00            | 46.85             | 28.65                 | 13.58           | 31.04                    | 58.04          | 74.00          | -15.96          | V    |
| 5350.00            | 48.37             | 29.16                 | 14.68           | 31.96                    | 60.25          | 74.00          | -13.75          | V    |
| Average Value      |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00            | 33.55             | 28.65                 | 13.58           | 31.04                    | 44.74          | 54.00          | -9.26           | H    |
| 5350.00            | 33.31             | 29.16                 | 14.68           | 31.96                    | 45.19          | 54.00          | -8.81           | H    |
| 5150.00            | 32.90             | 28.65                 | 13.58           | 31.04                    | 44.09          | 54.00          | -9.91           | V    |
| 5350.00            | 32.61             | 29.16                 | 14.68           | 31.96                    | 44.49          | 54.00          | -9.51           | V    |

| Test Mode: 802.11n20 |                   |                       |                 |                          |                |                |                 |      |
|----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value           |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 48.66             | 28.65                 | 13.58           | 31.04                    | 59.85          | 74.00          | -14.15          | H    |
| 5350.00              | 47.14             | 29.16                 | 14.68           | 31.96                    | 59.02          | 74.00          | -14.98          | H    |
| 5150.00              | 45.67             | 28.65                 | 13.58           | 31.04                    | 56.86          | 74.00          | -17.14          | V    |
| 5350.00              | 48.15             | 29.16                 | 14.68           | 31.96                    | 60.03          | 74.00          | -13.97          | V    |
| Average Value        |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 33.10             | 28.65                 | 13.58           | 31.04                    | 44.29          | 54.00          | -9.71           | H    |
| 5350.00              | 32.91             | 29.16                 | 14.68           | 31.96                    | 44.79          | 54.00          | -9.21           | H    |
| 5150.00              | 33.08             | 28.65                 | 13.58           | 31.04                    | 44.27          | 54.00          | -9.73           | V    |



|         |       |       |       |       |       |       |       |   |
|---------|-------|-------|-------|-------|-------|-------|-------|---|
| 5350.00 | 34.57 | 29.16 | 14.68 | 31.96 | 46.45 | 54.00 | -7.55 | V |
|---------|-------|-------|-------|-------|-------|-------|-------|---|

| Test Mode: 802.11ac20 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 47.86             | 28.65                 | 13.58           | 31.04                    | 59.05          | 74.00          | -14.95          | H    |
| 5350.00               | 45.77             | 29.16                 | 14.68           | 31.96                    | 57.65          | 74.00          | -16.35          | H    |
| 5150.00               | 45.06             | 28.65                 | 13.58           | 31.04                    | 56.25          | 74.00          | -17.75          | V    |
| 5350.00               | 46.44             | 29.16                 | 14.68           | 31.96                    | 58.32          | 74.00          | -15.68          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 34.56             | 28.65                 | 13.58           | 31.04                    | 45.75          | 54.00          | -8.25           | H    |
| 5350.00               | 32.43             | 29.16                 | 14.68           | 31.96                    | 44.31          | 54.00          | -9.69           | H    |
| 5150.00               | 34.81             | 28.65                 | 13.58           | 31.04                    | 46.00          | 54.00          | -8.00           | V    |
| 5350.00               | 33.06             | 29.16                 | 14.68           | 31.96                    | 44.94          | 54.00          | -9.06           | V    |


| Test Mode: 802.11n40 |                   |                       |                 |                          |                |                |                 |      |
|----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value           |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 47.62             | 28.65                 | 13.58           | 31.04                    | 58.81          | 74.00          | -15.19          | H    |
| 5350.00              | 46.47             | 29.16                 | 14.68           | 31.96                    | 58.35          | 74.00          | -15.65          | H    |
| 5150.00              | 45.36             | 28.65                 | 13.58           | 31.04                    | 56.55          | 74.00          | -17.45          | V    |
| 5350.00              | 47.81             | 29.16                 | 14.68           | 31.96                    | 59.69          | 74.00          | -14.31          | V    |
| Average Value        |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 32.05             | 28.65                 | 13.58           | 31.04                    | 43.24          | 54.00          | -10.76          | H    |
| 5350.00              | 34.43             | 29.16                 | 14.68           | 31.96                    | 46.31          | 54.00          | -7.69           | H    |
| 5150.00              | 34.40             | 28.65                 | 13.58           | 31.04                    | 45.59          | 54.00          | -8.41           | V    |

|         |       |       |       |       |       |       |       |   |
|---------|-------|-------|-------|-------|-------|-------|-------|---|
| 5350.00 | 33.42 | 29.16 | 14.68 | 31.96 | 45.30 | 54.00 | -8.70 | V |
|---------|-------|-------|-------|-------|-------|-------|-------|---|


| Test Mode: 802.11ac40 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 46.82             | 28.65                 | 13.58           | 31.04                    | 58.01          | 74.00          | -15.99          | H    |
| 5350.00               | 45.13             | 29.16                 | 14.68           | 31.96                    | 57.01          | 74.00          | -16.99          | H    |
| 5150.00               | 45.80             | 28.65                 | 13.58           | 31.04                    | 56.99          | 74.00          | -17.01          | V    |
| 5350.00               | 46.82             | 29.16                 | 14.68           | 31.96                    | 58.70          | 74.00          | -15.30          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 34.01             | 28.65                 | 13.58           | 31.04                    | 45.20          | 54.00          | -8.80           | H    |
| 5350.00               | 32.23             | 29.16                 | 14.68           | 31.96                    | 44.11          | 54.00          | -9.89           | H    |
| 5150.00               | 33.67             | 28.65                 | 13.58           | 31.04                    | 44.86          | 54.00          | -9.14           | V    |
| 5350.00               | 34.64             | 29.16                 | 14.68           | 31.96                    | 46.52          | 54.00          | -7.48           | V    |

| Test Mode: 802.11ac80 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 46.42             | 28.65                 | 13.58           | 31.04                    | 57.61          | 74.00          | -16.39          | H    |
| 5350.00               | 45.34             | 29.16                 | 14.68           | 31.96                    | 57.22          | 74.00          | -16.78          | H    |
| 5150.00               | 46.57             | 28.65                 | 13.58           | 31.04                    | 57.76          | 74.00          | -16.24          | V    |
| 5350.00               | 48.70             | 29.16                 | 14.68           | 31.96                    | 60.58          | 74.00          | -13.42          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 33.76             | 28.65                 | 13.58           | 31.04                    | 44.95          | 54.00          | -9.05           | H    |
| 5350.00               | 34.60             | 29.16                 | 14.68           | 31.96                    | 46.48          | 54.00          | -7.52           | H    |
| 5150.00               | 32.21             | 28.65                 | 13.58           | 31.04                    | 43.40          | 54.00          | -10.60          | V    |
| 5350.00               | 33.29             | 29.16                 | 14.68           | 31.96                    | 45.17          | 54.00          | -8.83           | V    |

For conducted test:

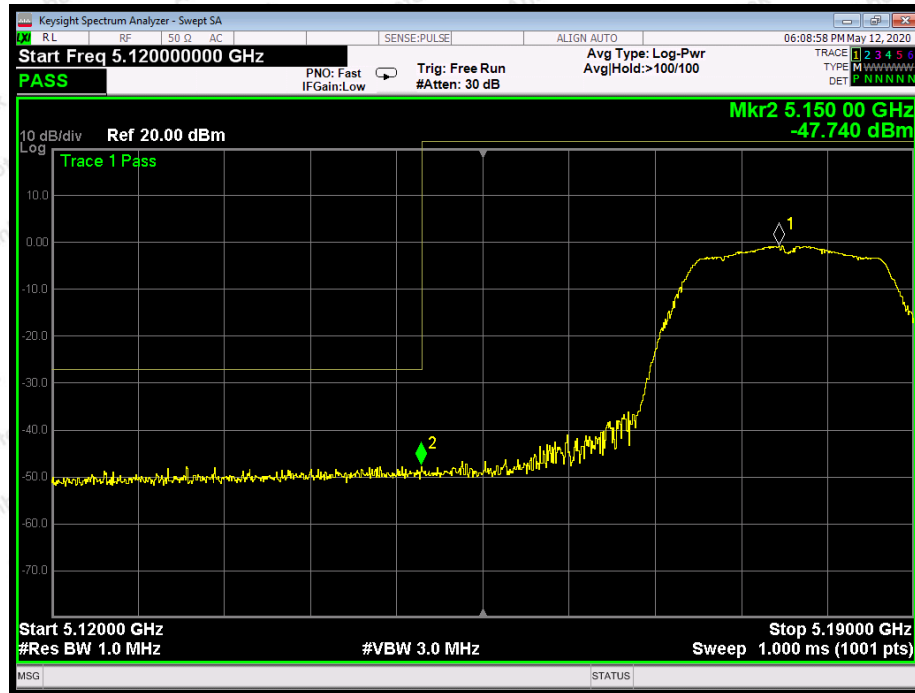


802.11a: Band Edge, Left Side

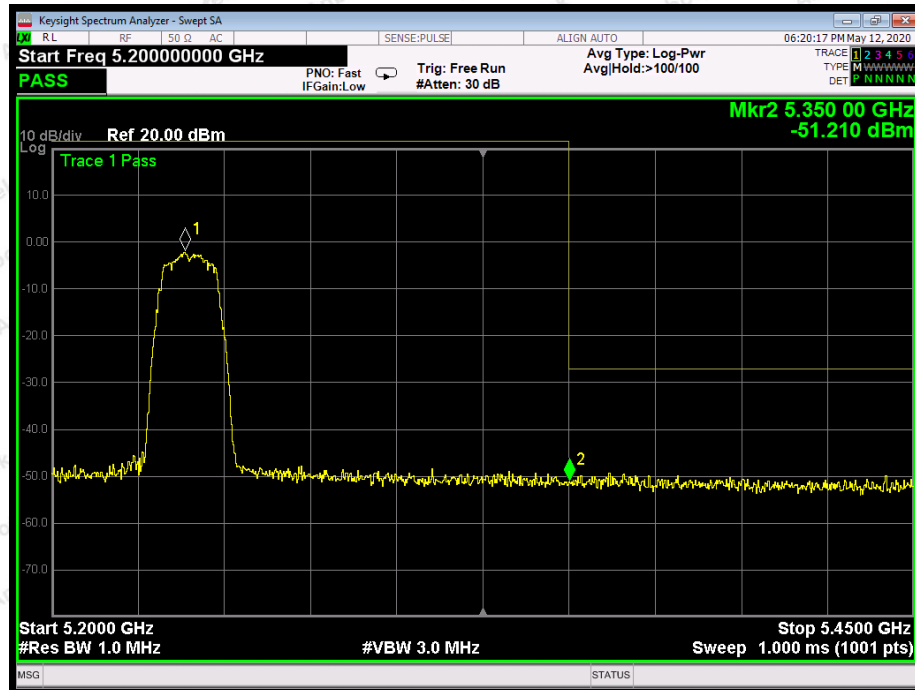


802.11a: Band Edge, Right Side




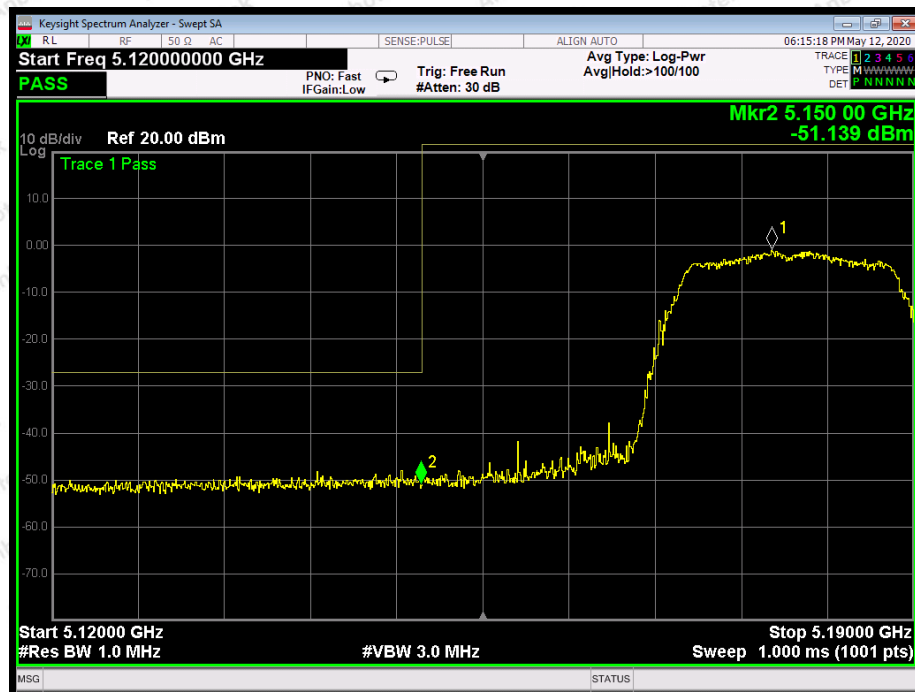


802.11n(20): Band Edge, Left Side

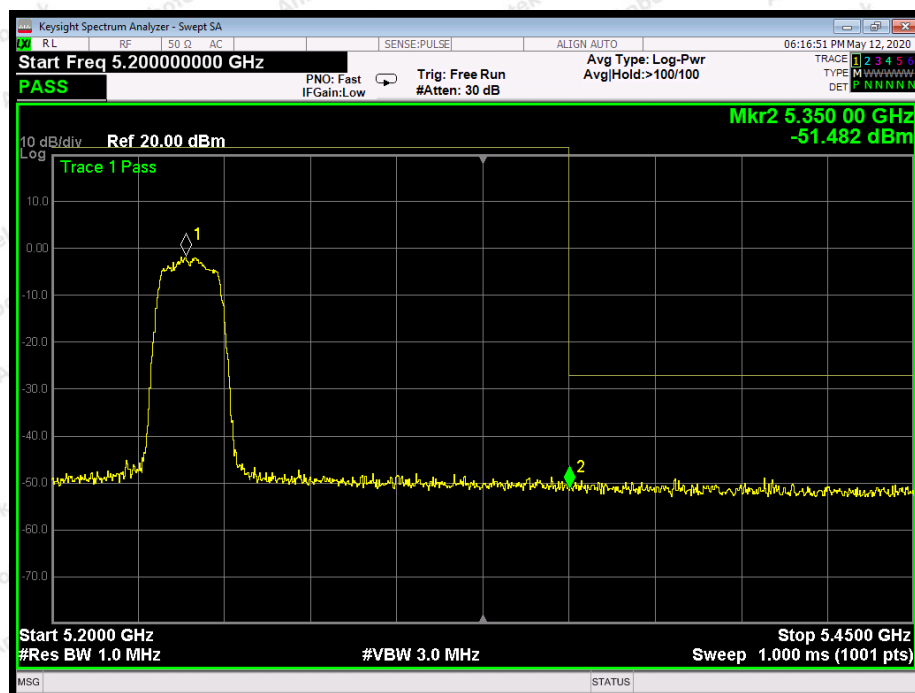

802.11n(20): Band Edge, Right Side

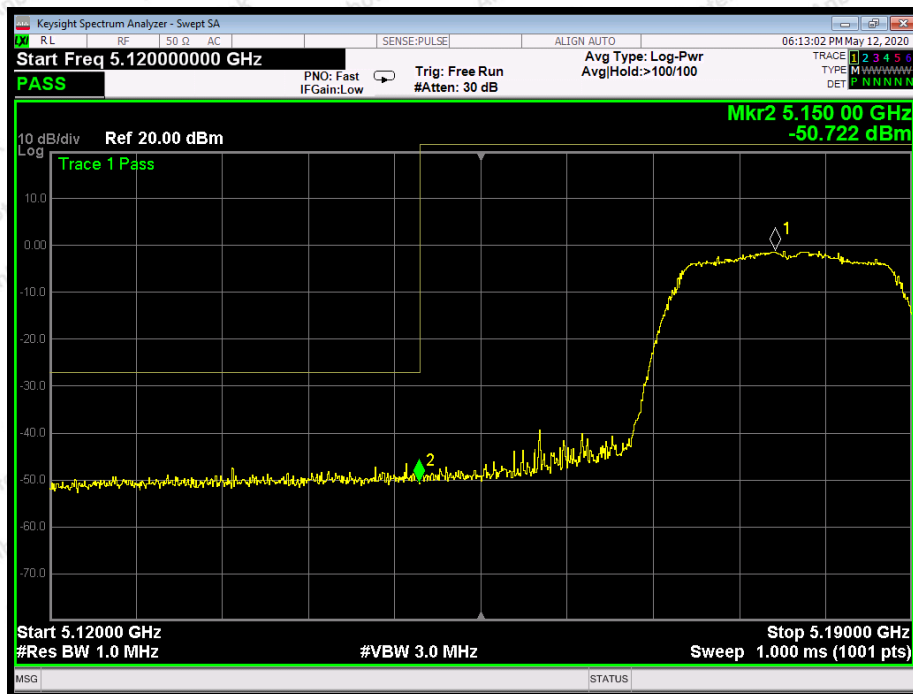


802.11ac(20): Band Edge, Left Side

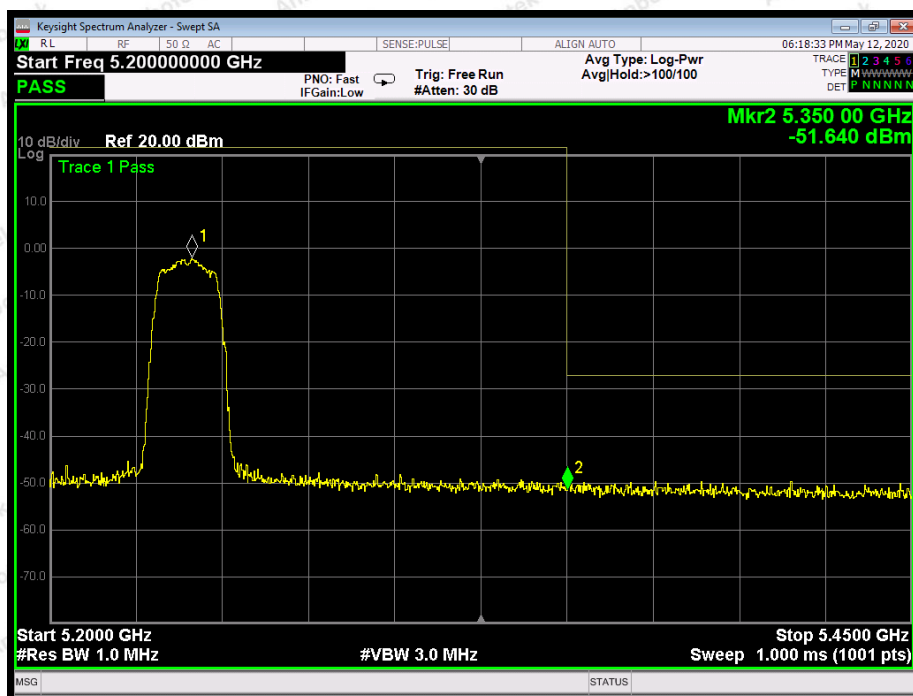

802.11ac(20): Band Edge, Right Side



802.11n(40): Band Edge, Left Side

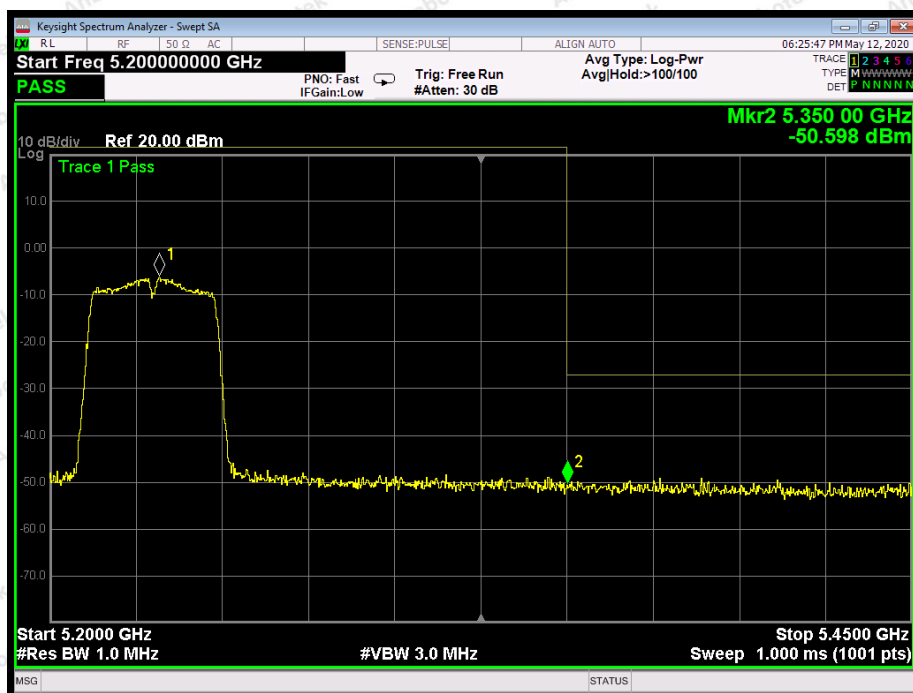


802.11n(40): Band Edge, Right Side






802.11ac(40): Band Edge, Left Side

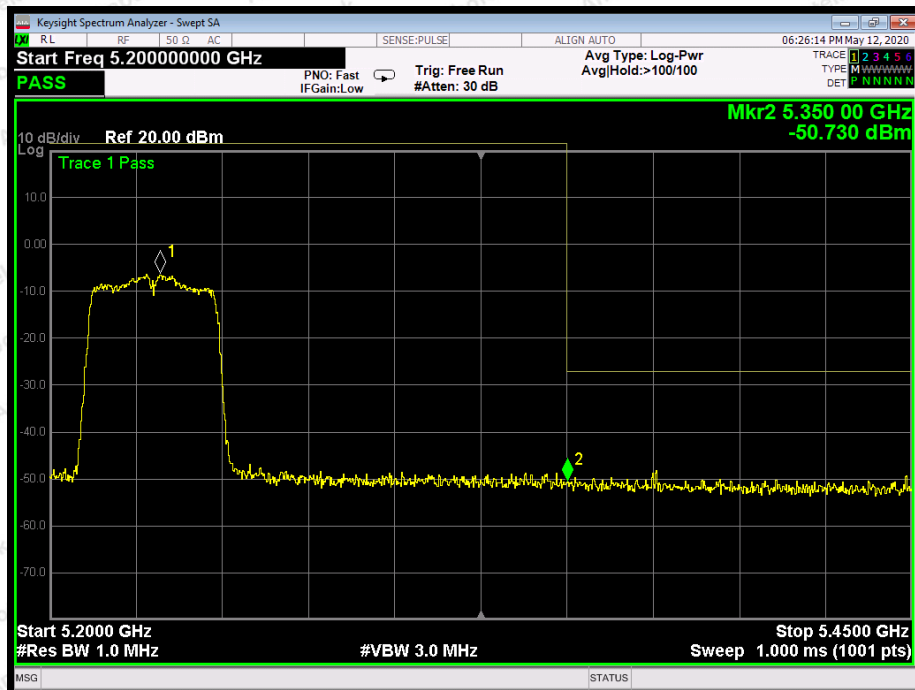

802.11ac(40): Band Edge, Right Side

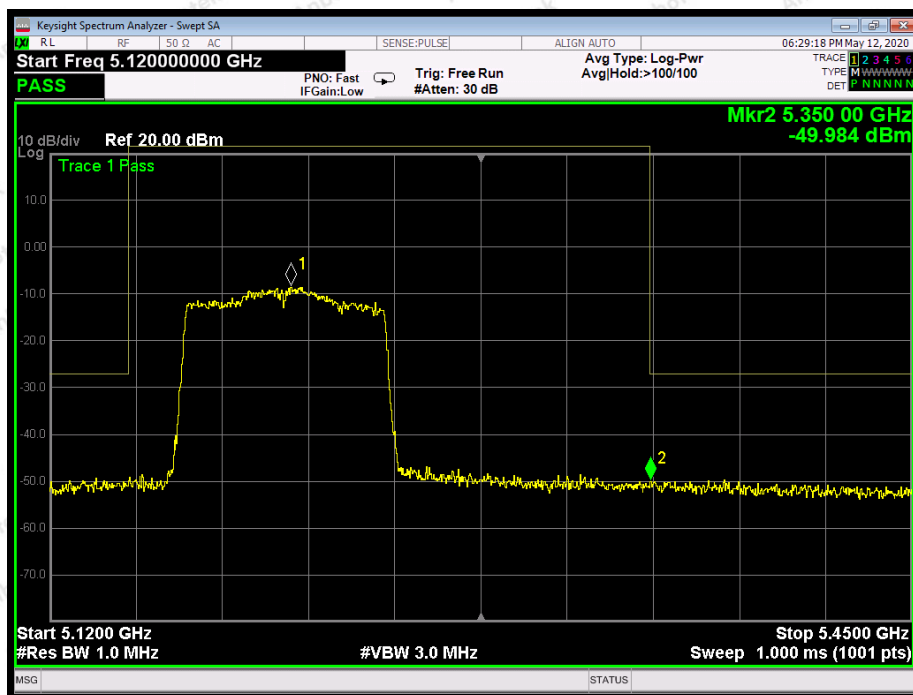

802.11ac(80): Band Edge



802.11ac(80): Band Edge

## Test Results (Above 1000MHz)

## ANT B:

|            |              |               |        |
|------------|--------------|---------------|--------|
| Test mode: | IEEE 802.11a | Test channel: | Low CH |
|------------|--------------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 39.98             | 31.98                 | 17.08           | 33.91              | 55.13          | 68.20               | -13.07          | V    |
| 15540.00        | 39.47             | 32.65                 | 20.03           | 34.85              | 57.30          | 68.20               | -10.90          | V    |
| 10360.00        | 40.30             | 31.98                 | 17.08           | 33.91              | 55.45          | 68.20               | -12.75          | H    |
| 15540.00        | 41.58             | 32.65                 | 20.03           | 34.85              | 59.41          | 68.20               | -8.79           | H    |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 27.38             | 31.98                 | 17.08           | 33.91              | 42.53          | 54.00               | -11.47          | V    |
| 15540.00        | 29.97             | 32.65                 | 20.03           | 34.85              | 47.80          | 54.00               | -6.20           | V    |
| 10360.00        | 27.21             | 31.98                 | 17.08           | 33.91              | 42.36          | 54.00               | -11.64          | H    |
| 15540.00        | 29.43             | 32.65                 | 20.03           | 34.85              | 47.26          | 54.00               | -6.74           | H    |

|            |              |               |        |
|------------|--------------|---------------|--------|
| Test mode: | IEEE 802.11a | Test channel: | Mid CH |
|------------|--------------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.89             | 32.44                 | 17.18           | 33.91              | 57.60          | 68.20               | -10.60          | V    |
| 15600.00        | 39.04             | 32.78                 | 20.12           | 34.86              | 57.08          | 68.20               | -11.12          | V    |
| 10400.00        | 40.11             | 32.44                 | 17.18           | 33.91              | 55.82          | 68.20               | -12.38          | H    |
| 15600.00        | 39.45             | 32.78                 | 20.12           | 34.86              | 57.49          | 68.20               | -10.71          | H    |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 29.86             | 32.44                 | 17.18           | 33.91              | 45.57          | 54.00               | -8.43           | V    |
| 15600.00        | 27.11             | 32.78                 | 20.12           | 34.86              | 45.15          | 54.00               | -8.85           | V    |
| 10400.00        | 27.48             | 32.44                 | 17.18           | 33.91              | 43.19          | 54.00               | -10.81          | H    |
| 15600.00        | 27.50             | 32.78                 | 20.12           | 34.86              | 45.54          | 54.00               | -8.46           | H    |



|            |              |               |         |
|------------|--------------|---------------|---------|
| Test mode: | IEEE 802.11a | Test channel: | High CH |
|------------|--------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 40.73             | 32.59                 | 18.02           | 33.92              | 57.42          | 68.20               | -10.78          | V    |
| 15720.00        | 40.39             | 32.87                 | 20.15           | 34.88              | 58.53          | 68.20               | -9.67           | V    |
| 10480.00        | 39.60             | 32.59                 | 18.02           | 33.92              | 56.29          | 68.20               | -11.91          | H    |
| 15720.00        | 41.29             | 32.87                 | 20.15           | 34.88              | 59.43          | 68.20               | -8.77           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 29.34             | 32.59                 | 18.02           | 33.92              | 46.03          | 54.00               | -7.97           | V    |
| 15720.00        | 27.68             | 32.87                 | 20.15           | 34.88              | 45.82          | 54.00               | -8.18           | V    |
| 10480.00        | 28.20             | 32.59                 | 18.02           | 33.92              | 44.89          | 54.00               | -9.11           | H    |
| 15720.00        | 28.56             | 32.87                 | 20.15           | 34.88              | 46.70          | 54.00               | -7.30           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | Low CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 41.49             | 31.98                 | 17.08           | 33.91              | 56.64          | 68.20               | -11.56          | V    |
| 15540.00        | 41.07             | 32.65                 | 20.03           | 34.85              | 58.90          | 68.20               | -9.30           | V    |
| 10360.00        | 41.02             | 31.98                 | 17.08           | 33.91              | 56.17          | 68.20               | -12.03          | H    |
| 15540.00        | 39.41             | 32.65                 | 20.03           | 34.85              | 57.24          | 68.20               | -10.96          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 29.75             | 31.98                 | 17.08           | 33.91              | 44.90          | 54.00               | -9.10           | V    |
| 15540.00        | 27.36             | 32.65                 | 20.03           | 34.85              | 45.19          | 54.00               | -8.81           | V    |
| 10360.00        | 28.20             | 31.98                 | 17.08           | 33.91              | 43.35          | 54.00               | -10.65          | H    |
| 15540.00        | 29.85             | 32.65                 | 20.03           | 34.85              | 47.68          | 54.00               | -6.32           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | Mid CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 40.95             | 32.44                 | 17.18           | 33.91              | 56.66          | 68.20               | -11.54          | V    |
| 15600.00        | 40.76             | 32.78                 | 20.12           | 34.86              | 58.80          | 68.20               | -9.40           | V    |
| 10400.00        | 41.09             | 32.44                 | 17.18           | 33.91              | 56.80          | 68.20               | -11.40          | H    |
| 15600.00        | 40.80             | 32.78                 | 20.12           | 34.86              | 58.84          | 68.20               | -9.36           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 28.49             | 32.44                 | 17.18           | 33.91              | 44.20          | 54.00               | -9.80           | V    |
| 15600.00        | 27.03             | 32.78                 | 20.12           | 34.86              | 45.07          | 54.00               | -8.93           | V    |
| 10400.00        | 27.79             | 32.44                 | 17.18           | 33.91              | 43.50          | 54.00               | -10.50          | H    |
| 15600.00        | 29.71             | 32.78                 | 20.12           | 34.86              | 47.75          | 54.00               | -6.25           | H    |

|            |                    |               |         |
|------------|--------------------|---------------|---------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | High CH |
|------------|--------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 41.48             | 32.59                 | 18.02           | 33.92              | 58.17          | 68.20               | -10.03          | V    |
| 15720.00        | 39.74             | 32.87                 | 20.15           | 34.88              | 57.88          | 68.20               | -10.32          | V    |
| 10480.00        | 40.67             | 32.59                 | 18.02           | 33.92              | 57.36          | 68.20               | -10.84          | H    |
| 15720.00        | 41.75             | 32.87                 | 20.15           | 34.88              | 59.89          | 68.20               | -8.31           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 29.25             | 32.59                 | 18.02           | 33.92              | 45.94          | 54.00               | -8.06           | V    |
| 15720.00        | 27.07             | 32.87                 | 20.15           | 34.88              | 45.21          | 54.00               | -8.79           | V    |
| 10480.00        | 28.71             | 32.59                 | 18.02           | 33.92              | 45.40          | 54.00               | -8.60           | H    |
| 15720.00        | 29.81             | 32.87                 | 20.15           | 34.88              | 47.95          | 54.00               | -6.05           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | Low CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 39.86             | 31.98                 | 17.08           | 33.91              | 55.01          | 68.20               | -13.19          | V    |
| 15540.00        | 40.83             | 32.65                 | 20.03           | 34.85              | 58.66          | 68.20               | -9.54           | V    |
| 10360.00        | 39.50             | 31.98                 | 17.08           | 33.91              | 54.65          | 68.20               | -13.55          | H    |
| 15540.00        | 39.23             | 32.65                 | 20.03           | 34.85              | 57.06          | 68.20               | -11.14          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 28.72             | 31.98                 | 17.08           | 33.91              | 43.87          | 54.00               | -10.13          | V    |
| 15540.00        | 29.01             | 32.65                 | 20.03           | 34.85              | 46.84          | 54.00               | -7.16           | V    |
| 10360.00        | 27.01             | 31.98                 | 17.08           | 33.91              | 42.16          | 54.00               | -11.84          | H    |
| 15540.00        | 27.83             | 32.65                 | 20.03           | 34.85              | 45.66          | 54.00               | -8.34           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | Mid CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.09             | 32.44                 | 17.18           | 33.91              | 56.80          | 68.20               | -11.40          | V    |
| 15600.00        | 39.49             | 32.78                 | 20.12           | 34.86              | 57.53          | 68.20               | -10.67          | V    |
| 10400.00        | 39.74             | 32.44                 | 17.18           | 33.91              | 55.45          | 68.20               | -12.75          | H    |
| 15600.00        | 41.12             | 32.78                 | 20.12           | 34.86              | 59.16          | 68.20               | -9.04           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 27.79             | 32.44                 | 17.18           | 33.91              | 43.50          | 54.00               | -10.50          | V    |
| 15600.00        | 29.04             | 32.78                 | 20.12           | 34.86              | 47.08          | 54.00               | -6.92           | V    |
| 10400.00        | 27.12             | 32.44                 | 17.18           | 33.91              | 42.83          | 54.00               | -11.17          | H    |
| 15600.00        | 27.96             | 32.78                 | 20.12           | 34.86              | 46.00          | 54.00               | -8.00           | H    |





|            |                     |               |         |
|------------|---------------------|---------------|---------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | High CH |
|------------|---------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 39.31             | 32.59                 | 18.02           | 33.92              | 56.00          | 68.20               | -12.20          | V    |
| 15720.00        | 42.00             | 32.87                 | 20.15           | 34.88              | 60.14          | 68.20               | -8.06           | V    |
| 10480.00        | 39.53             | 32.59                 | 18.02           | 33.92              | 56.22          | 68.20               | -11.98          | H    |
| 15720.00        | 41.28             | 32.87                 | 20.15           | 34.88              | 59.42          | 68.20               | -8.78           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 28.54             | 32.59                 | 18.02           | 33.92              | 45.23          | 54.00               | -8.77           | V    |
| 15720.00        | 27.19             | 32.87                 | 20.15           | 34.88              | 45.33          | 54.00               | -8.67           | V    |
| 10480.00        | 27.04             | 32.59                 | 18.02           | 33.92              | 43.73          | 54.00               | -10.27          | H    |
| 15720.00        | 29.88             | 32.87                 | 20.15           | 34.88              | 48.02          | 54.00               | -5.98           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT40) | Test channel: | Low CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 39.69             | 31.98                 | 17.08           | 33.91              | 54.84          | 68.20               | -13.36          | V    |
| 15570.00        | 40.32             | 32.65                 | 20.03           | 34.85              | 58.15          | 68.20               | -10.05          | V    |
| 10380.00        | 39.11             | 31.98                 | 17.08           | 33.91              | 54.26          | 68.20               | -13.94          | H    |
| 15570.00        | 41.78             | 32.65                 | 20.03           | 34.85              | 59.61          | 68.20               | -8.59           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 28.71             | 31.98                 | 17.08           | 33.91              | 43.86          | 54.00               | -10.14          | V    |
| 15570.00        | 28.51             | 32.65                 | 20.03           | 34.85              | 46.34          | 54.00               | -7.66           | V    |
| 10380.00        | 29.44             | 31.98                 | 17.08           | 33.91              | 44.59          | 54.00               | -9.41           | H    |
| 15570.00        | 28.55             | 32.65                 | 20.03           | 34.85              | 46.38          | 54.00               | -7.62           | H    |

|            |                    |               |         |
|------------|--------------------|---------------|---------|
| Test mode: | IEEE 802.11n(HT40) | Test channel: | High CH |
|------------|--------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 39.47             | 32.59                 | 18.02           | 33.92              | 56.16          | 68.20               | -12.04          | V    |
| 15690.00        | 40.95             | 32.87                 | 20.15           | 34.88              | 59.09          | 68.20               | -9.11           | V    |
| 10460.00        | 40.00             | 32.59                 | 18.02           | 33.92              | 56.69          | 68.20               | -11.51          | H    |
| 15690.00        | 40.62             | 32.87                 | 20.15           | 34.88              | 58.76          | 68.20               | -9.44           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 28.44             | 32.59                 | 18.02           | 33.92              | 45.13          | 54.00               | -8.87           | V    |
| 15690.00        | 27.89             | 32.87                 | 20.15           | 34.88              | 46.03          | 54.00               | -7.97           | V    |
| 10460.00        | 27.01             | 32.59                 | 18.02           | 33.92              | 43.70          | 54.00               | -10.30          | H    |
| 15690.00        | 28.15             | 32.78                 | 20.12           | 34.86              | 46.19          | 54.00               | -7.81           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT40) | Test channel: | Low CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 39.70             | 31.98                 | 17.08           | 33.91              | 54.85          | 68.20               | -13.35          | V    |
| 15570.00        | 39.54             | 32.65                 | 20.03           | 34.85              | 57.37          | 68.20               | -10.83          | V    |
| 10380.00        | 41.76             | 31.98                 | 17.08           | 33.91              | 56.91          | 68.20               | -11.29          | H    |
| 15570.00        | 39.04             | 32.65                 | 20.03           | 34.85              | 56.87          | 68.20               | -11.33          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 28.35             | 31.98                 | 17.08           | 33.91              | 43.50          | 54.00               | -10.50          | V    |
| 15570.00        | 27.32             | 32.65                 | 20.03           | 34.85              | 45.15          | 54.00               | -8.85           | V    |
| 10380.00        | 27.56             | 31.98                 | 17.08           | 33.91              | 42.71          | 54.00               | -11.29          | H    |
| 15570.00        | 29.48             | 32.65                 | 20.03           | 34.85              | 47.31          | 54.00               | -6.69           | H    |

|            |                     |               |         |
|------------|---------------------|---------------|---------|
| Test mode: | IEEE 802.11ac(HT40) | Test channel: | High CH |
|------------|---------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 39.27             | 32.59                 | 18.02           | 33.92              | 55.96          | 68.20               | -12.24          | V    |
| 15690.00        | 40.87             | 32.87                 | 20.15           | 34.88              | 59.01          | 68.20               | -9.19           | V    |
| 10460.00        | 41.31             | 32.59                 | 18.02           | 33.92              | 58.00          | 68.20               | -10.20          | H    |
| 15690.00        | 41.31             | 32.87                 | 20.15           | 34.88              | 59.45          | 68.20               | -8.75           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 29.91             | 32.59                 | 18.02           | 33.92              | 46.60          | 54.00               | -7.40           | V    |
| 15690.00        | 28.46             | 32.87                 | 20.15           | 34.88              | 46.60          | 54.00               | -7.40           | V    |
| 10460.00        | 28.30             | 32.59                 | 18.02           | 33.92              | 44.99          | 54.00               | -9.01           | H    |
| 15690.00        | 27.65             | 32.78                 | 20.12           | 34.86              | 45.69          | 54.00               | -8.31           | H    |

|            |                     |               |  |
|------------|---------------------|---------------|--|
| Test mode: | IEEE 802.11ac(HT80) | Test channel: |  |
|------------|---------------------|---------------|--|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10420.00        | 40.26             | 32.44                 | 17.18           | 33.91              | 55.97          | 68.20               | -12.23          | V    |
| 15630.00        | 40.82             | 32.78                 | 20.12           | 34.86              | 58.86          | 68.20               | -9.34           | V    |
| 10420.00        | 40.68             | 32.44                 | 17.18           | 33.91              | 56.39          | 68.20               | -11.81          | H    |
| 15630.00        | 39.66             | 32.78                 | 20.12           | 34.86              | 57.70          | 68.20               | -10.50          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10420.00        | 29.93             | 32.44                 | 17.18           | 33.91              | 45.64          | 54.00               | -8.36           | V    |
| 15630.00        | 28.76             | 32.78                 | 20.12           | 34.86              | 46.80          | 54.00               | -7.20           | V    |
| 10420.00        | 29.86             | 32.44                 | 17.18           | 33.91              | 45.57          | 54.00               | -8.43           | H    |
| 15630.00        | 27.49             | 32.78                 | 20.12           | 34.86              | 45.53          | 54.00               | -8.47           | H    |

Note:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor



## Radiated Band Edge:

| Test Mode: 802.11a |                   |                       |                 |                    |                |                |                 |      |
|--------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value         |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00            | 45.14             | 28.65                 | 13.58           | 31.04              | 56.33          | 74.00          | -17.67          | H    |
| 5350.00            | 47.34             | 29.16                 | 14.68           | 31.96              | 59.22          | 74.00          | -14.78          | H    |
| 5150.00            | 48.36             | 28.65                 | 13.58           | 31.04              | 59.55          | 74.00          | -14.45          | V    |
| 5350.00            | 46.62             | 29.16                 | 14.68           | 31.96              | 58.50          | 74.00          | -15.50          | V    |
| Average Value      |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00            | 34.17             | 28.65                 | 13.58           | 31.04              | 45.36          | 54.00          | -8.64           | H    |
| 5350.00            | 32.88             | 29.16                 | 14.68           | 31.96              | 44.76          | 54.00          | -9.24           | H    |
| 5150.00            | 32.67             | 28.65                 | 13.58           | 31.04              | 43.86          | 54.00          | -10.14          | V    |
| 5350.00            | 33.46             | 29.16                 | 14.68           | 31.96              | 45.34          | 54.00          | -8.66           | V    |

| Test Mode: 802.11n20 |                   |                       |                 |                    |                |                |                 |      |
|----------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value           |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 46.14             | 28.65                 | 13.58           | 31.04              | 57.33          | 74.00          | -16.67          | H    |
| 5350.00              | 48.28             | 29.16                 | 14.68           | 31.96              | 60.16          | 74.00          | -13.84          | H    |
| 5150.00              | 48.73             | 28.65                 | 13.58           | 31.04              | 59.92          | 74.00          | -14.08          | V    |
| 5350.00              | 45.45             | 29.16                 | 14.68           | 31.96              | 57.33          | 74.00          | -16.67          | V    |
| Average Value        |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 34.16             | 28.65                 | 13.58           | 31.04              | 45.35          | 54.00          | -8.65           | H    |
| 5350.00              | 33.95             | 29.16                 | 14.68           | 31.96              | 45.83          | 54.00          | -8.17           | H    |
| 5150.00              | 32.35             | 28.65                 | 13.58           | 31.04              | 43.54          | 54.00          | -10.46          | V    |
| 5350.00              | 32.90             | 29.16                 | 14.68           | 31.96              | 44.78          | 54.00          | -9.22           | V    |



| Test Mode: 802.11ac20 |                   |                       |                 |                    |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 48.73             | 28.65                 | 13.58           | 31.04              | 59.92          | 74.00          | -14.08          | H    |
| 5350.00               | 48.52             | 29.16                 | 14.68           | 31.96              | 60.40          | 74.00          | -13.60          | H    |
| 5150.00               | 45.58             | 28.65                 | 13.58           | 31.04              | 56.77          | 74.00          | -17.23          | V    |
| 5350.00               | 45.65             | 29.16                 | 14.68           | 31.96              | 57.53          | 74.00          | -16.47          | V    |
| Average Value         |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 34.67             | 28.65                 | 13.58           | 31.04              | 45.86          | 54.00          | -8.14           | H    |
| 5350.00               | 33.93             | 29.16                 | 14.68           | 31.96              | 45.81          | 54.00          | -8.19           | H    |
| 5150.00               | 33.15             | 28.65                 | 13.58           | 31.04              | 44.34          | 54.00          | -9.66           | V    |
| 5350.00               | 32.72             | 29.16                 | 14.68           | 31.96              | 44.60          | 54.00          | -9.40           | V    |


| Test Mode: 802.11n40 |                   |                       |                 |                    |                |                |                 |      |
|----------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value           |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 45.91             | 28.65                 | 13.58           | 31.04              | 57.10          | 74.00          | -16.90          | H    |
| 5350.00              | 45.74             | 29.16                 | 14.68           | 31.96              | 57.62          | 74.00          | -16.38          | H    |
| 5150.00              | 45.50             | 28.65                 | 13.58           | 31.04              | 56.69          | 74.00          | -17.31          | V    |
| 5350.00              | 47.29             | 29.16                 | 14.68           | 31.96              | 59.17          | 74.00          | -14.83          | V    |
| Average Value        |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 33.06             | 28.65                 | 13.58           | 31.04              | 44.25          | 54.00          | -9.75           | H    |
| 5350.00              | 33.78             | 29.16                 | 14.68           | 31.96              | 45.66          | 54.00          | -8.34           | H    |
| 5150.00              | 33.10             | 28.65                 | 13.58           | 31.04              | 44.29          | 54.00          | -9.71           | V    |
| 5350.00              | 34.33             | 29.16                 | 14.68           | 31.96              | 46.21          | 54.00          | -7.79           | V    |

| Test Mode: 802.11ac40 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 45.42             | 28.65                 | 13.58           | 31.04                    | 56.61          | 74.00          | -17.39          | H    |
| 5350.00               | 46.73             | 29.16                 | 14.68           | 31.96                    | 58.61          | 74.00          | -15.39          | H    |
| 5150.00               | 47.19             | 28.65                 | 13.58           | 31.04                    | 58.38          | 74.00          | -15.62          | V    |
| 5350.00               | 48.31             | 29.16                 | 14.68           | 31.96                    | 60.19          | 74.00          | -13.81          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 33.84             | 28.65                 | 13.58           | 31.04                    | 45.03          | 54.00          | -8.97           | H    |
| 5350.00               | 33.94             | 29.16                 | 14.68           | 31.96                    | 45.82          | 54.00          | -8.18           | H    |
| 5150.00               | 32.31             | 28.65                 | 13.58           | 31.04                    | 43.50          | 54.00          | -10.50          | V    |
| 5350.00               | 34.21             | 29.16                 | 14.68           | 31.96                    | 46.09          | 54.00          | -7.91           | V    |


| Test Mode: 802.11ac80 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 45.93             | 28.65                 | 13.58           | 31.04                    | 57.12          | 74.00          | -16.88          | H    |
| 5350.00               | 45.31             | 29.16                 | 14.68           | 31.96                    | 57.19          | 74.00          | -16.81          | H    |
| 5150.00               | 48.62             | 28.65                 | 13.58           | 31.04                    | 59.81          | 74.00          | -14.19          | V    |
| 5350.00               | 47.14             | 29.16                 | 14.68           | 31.96                    | 59.02          | 74.00          | -14.98          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 33.81             | 28.65                 | 13.58           | 31.04                    | 45.00          | 54.00          | -9.00           | H    |
| 5350.00               | 33.71             | 29.16                 | 14.68           | 31.96                    | 45.59          | 54.00          | -8.41           | H    |
| 5150.00               | 33.52             | 28.65                 | 13.58           | 31.04                    | 44.71          | 54.00          | -9.29           | V    |
| 5350.00               | 33.93             | 29.16                 | 14.68           | 31.96                    | 45.81          | 54.00          | -8.19           | V    |




For conducted test:

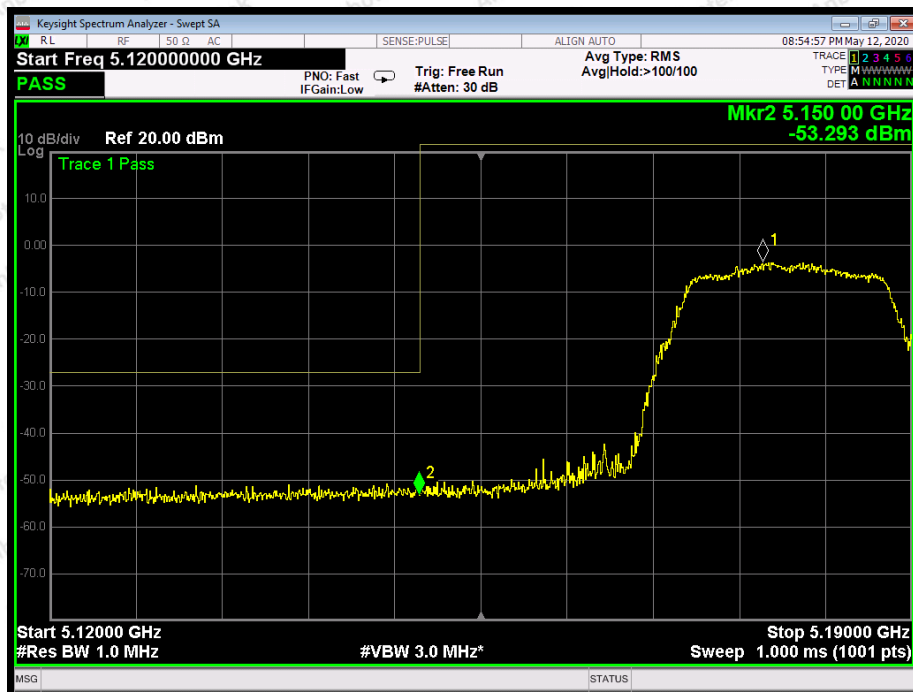


802.11a: Band Edge, Left Side

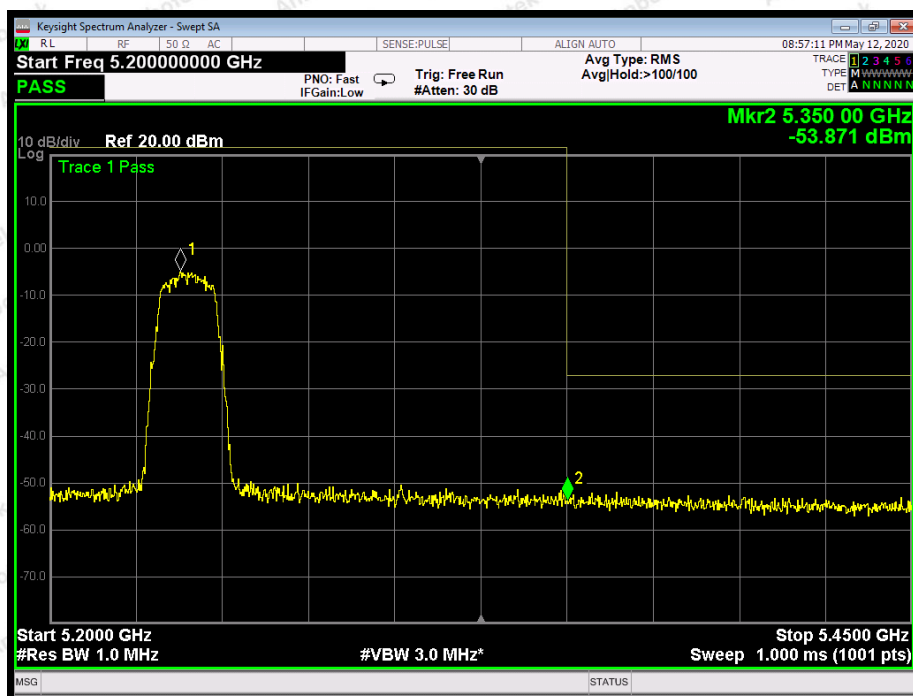


802.11a: Band Edge, Right Side

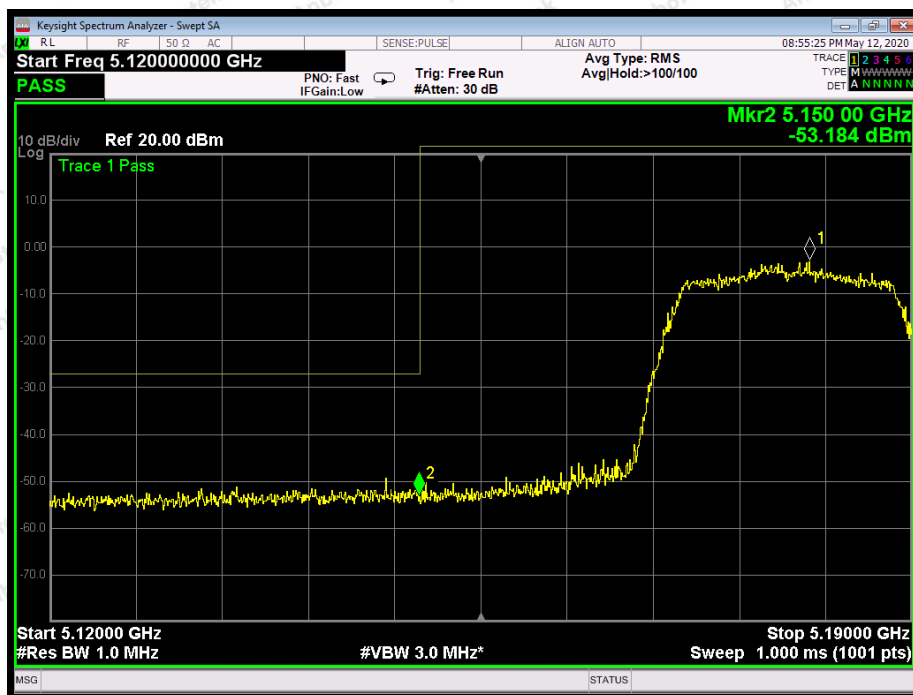


802.11n(20): Band Edge, Left Side

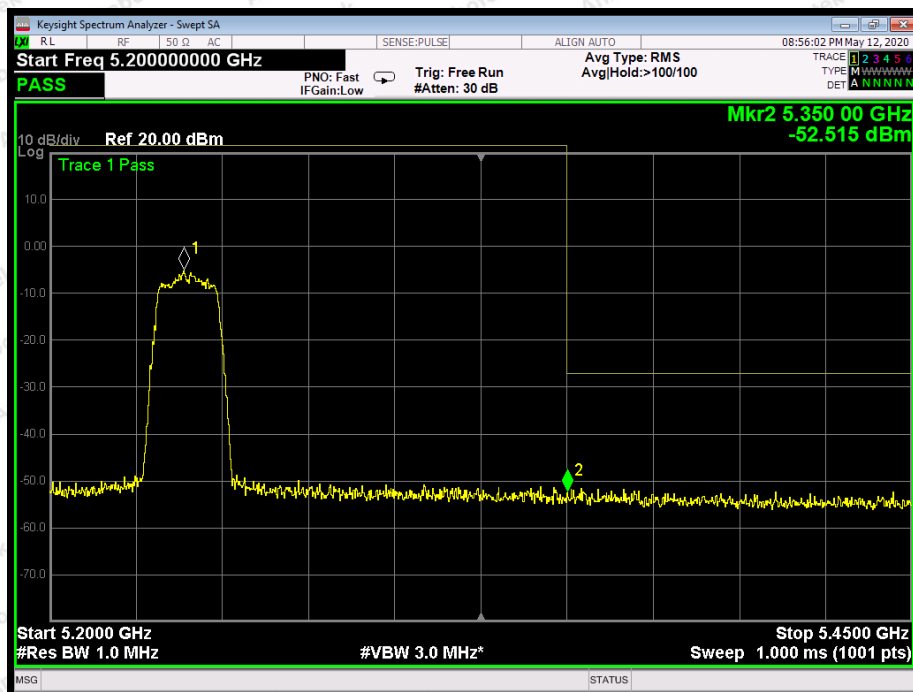

802.11n(20): Band Edge, Right Side

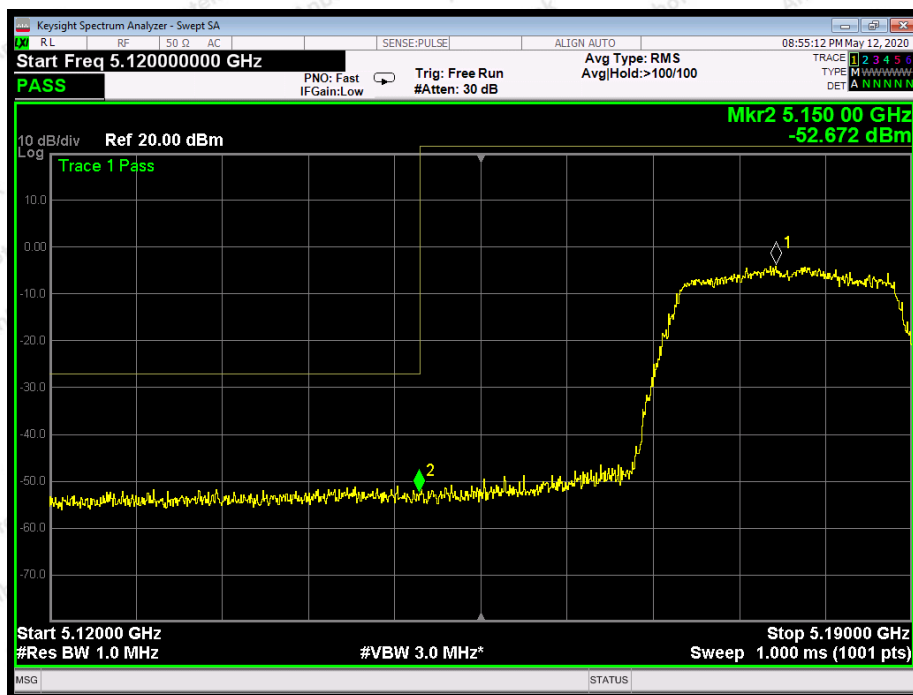

802.11ac(20): Band Edge, Left Side

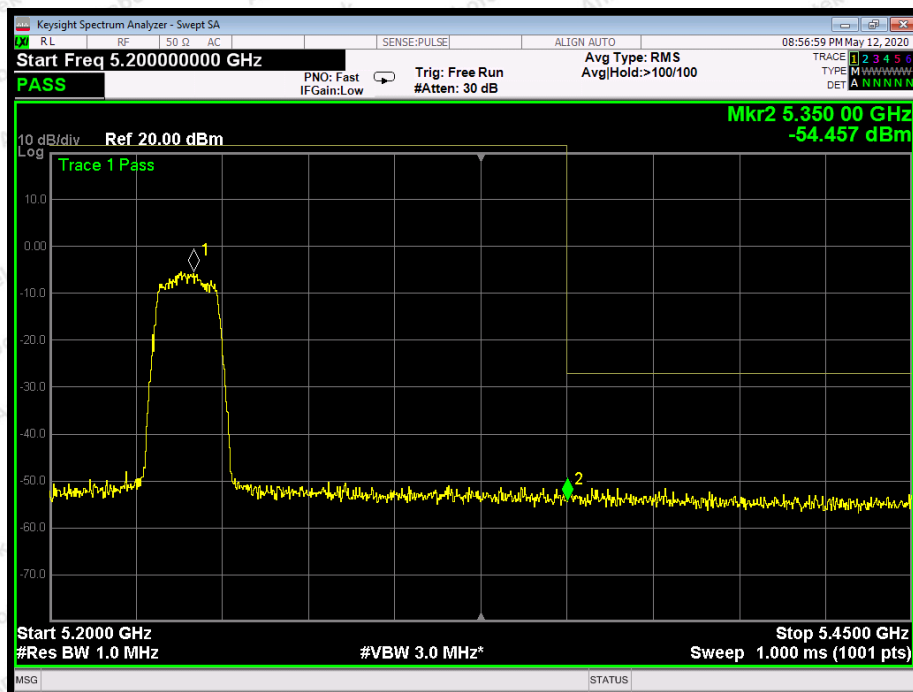

802.11ac(20): Band Edge, Right Side







802.11n(40): Band Edge, Left Side




802.11n(40): Band Edge, Right Side

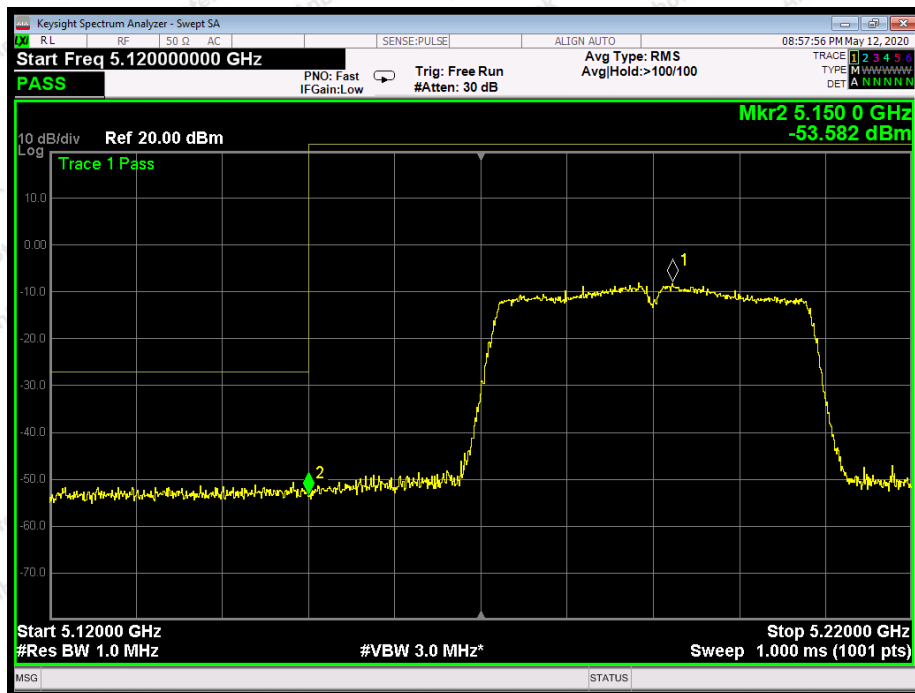


802.11ac(40): Band Edge, Left Side

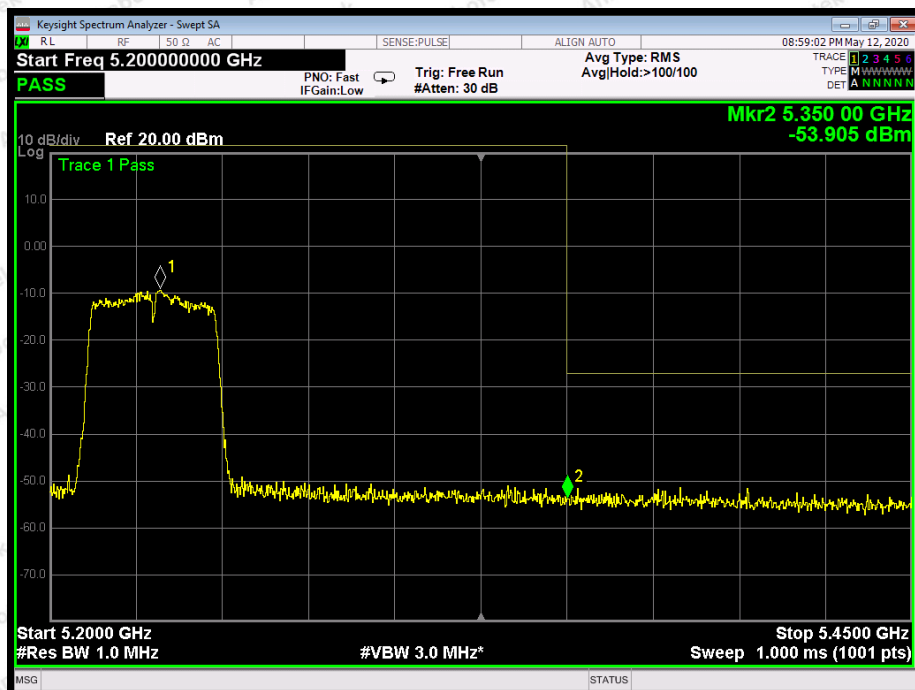

802.11ac(40): Band Edge, Right Side

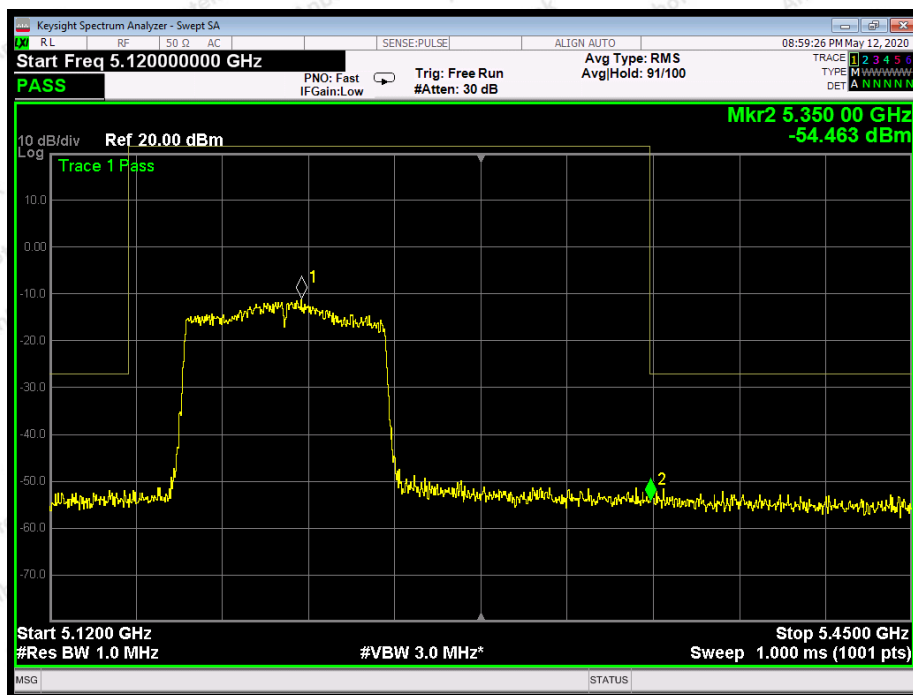

802.11ac(80): Band Edge

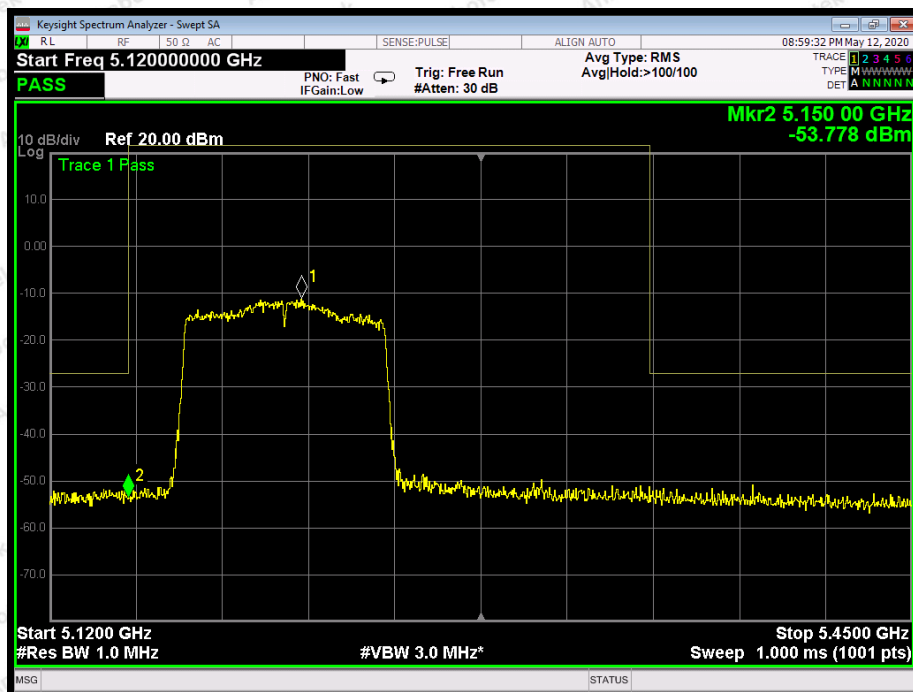

802.11ac(80): Band Edge



## Test Results (Above 1000MHz)

## ANT A+B:

|            |              |               |        |
|------------|--------------|---------------|--------|
| Test mode: | IEEE 802.11a | Test channel: | Low CH |
|------------|--------------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 42.86             | 31.98                 | 17.08           | 33.91              | 58.01          | 68.20               | -10.19          | V    |
| 15540.00        | 40.80             | 32.65                 | 20.03           | 34.85              | 58.63          | 68.20               | -9.57           | V    |
| 10360.00        | 41.25             | 31.98                 | 17.08           | 33.91              | 56.40          | 68.20               | -11.80          | H    |
| 15540.00        | 40.46             | 32.65                 | 20.03           | 34.85              | 58.29          | 68.20               | -9.91           | H    |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 29.93             | 31.98                 | 17.08           | 33.91              | 45.08          | 54.00               | -8.92           | V    |
| 15540.00        | 28.10             | 32.65                 | 20.03           | 34.85              | 45.93          | 54.00               | -8.07           | V    |
| 10360.00        | 28.63             | 31.98                 | 17.08           | 33.91              | 43.78          | 54.00               | -10.22          | H    |
| 15540.00        | 30.01             | 32.65                 | 20.03           | 34.85              | 47.84          | 54.00               | -6.16           | H    |

|            |              |               |        |
|------------|--------------|---------------|--------|
| Test mode: | IEEE 802.11a | Test channel: | Mid CH |
|------------|--------------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.03             | 32.44                 | 17.18           | 33.91              | 56.74          | 68.20               | -11.46          | V    |
| 15600.00        | 41.75             | 32.78                 | 20.12           | 34.86              | 59.79          | 68.20               | -8.41           | V    |
| 10400.00        | 41.30             | 32.44                 | 17.18           | 33.91              | 57.01          | 68.20               | -11.19          | H    |
| 15600.00        | 42.39             | 32.78                 | 20.12           | 34.86              | 60.43          | 68.20               | -7.77           | H    |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 28.19             | 32.44                 | 17.18           | 33.91              | 43.90          | 54.00               | -10.10          | V    |
| 15600.00        | 29.18             | 32.78                 | 20.12           | 34.86              | 47.22          | 54.00               | -6.78           | V    |
| 10400.00        | 29.79             | 32.44                 | 17.18           | 33.91              | 45.50          | 54.00               | -8.50           | H    |
| 15600.00        | 30.15             | 32.78                 | 20.12           | 34.86              | 48.19          | 54.00               | -5.81           | H    |

|            |              |               |         |
|------------|--------------|---------------|---------|
| Test mode: | IEEE 802.11a | Test channel: | High CH |
|------------|--------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 42.87             | 32.59                 | 18.02           | 33.92              | 59.56          | 68.20               | -8.64           | V    |
| 15720.00        | 42.35             | 32.87                 | 20.15           | 34.88              | 60.49          | 68.20               | -7.71           | V    |
| 10480.00        | 42.45             | 32.59                 | 18.02           | 33.92              | 59.14          | 68.20               | -9.06           | H    |
| 15720.00        | 42.44             | 32.87                 | 20.15           | 34.88              | 60.58          | 68.20               | -7.62           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 29.61             | 32.59                 | 18.02           | 33.92              | 46.30          | 54.00               | -7.70           | V    |
| 15720.00        | 29.84             | 32.87                 | 20.15           | 34.88              | 47.98          | 54.00               | -6.02           | V    |
| 10480.00        | 28.52             | 32.59                 | 18.02           | 33.92              | 45.21          | 54.00               | -8.79           | H    |
| 15720.00        | 29.69             | 32.87                 | 20.15           | 34.88              | 47.83          | 54.00               | -6.17           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | Low CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 40.85             | 31.98                 | 17.08           | 33.91              | 56.00          | 68.20               | -12.20          | V    |
| 15540.00        | 40.33             | 32.65                 | 20.03           | 34.85              | 58.16          | 68.20               | -10.04          | V    |
| 10360.00        | 40.68             | 31.98                 | 17.08           | 33.91              | 55.83          | 68.20               | -12.37          | H    |
| 15540.00        | 40.69             | 32.65                 | 20.03           | 34.85              | 58.52          | 68.20               | -9.68           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 28.55             | 31.98                 | 17.08           | 33.91              | 43.70          | 54.00               | -10.30          | V    |
| 15540.00        | 28.96             | 32.65                 | 20.03           | 34.85              | 46.79          | 54.00               | -7.21           | V    |
| 10360.00        | 28.45             | 31.98                 | 17.08           | 33.91              | 43.60          | 54.00               | -10.40          | H    |
| 15540.00        | 28.38             | 32.65                 | 20.03           | 34.85              | 46.21          | 54.00               | -7.79           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | Mid CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.62             | 32.44                 | 17.18           | 33.91              | 57.33          | 68.20               | -10.87          | V    |
| 15600.00        | 41.37             | 32.78                 | 20.12           | 34.86              | 59.41          | 68.20               | -8.79           | V    |
| 10400.00        | 42.47             | 32.44                 | 17.18           | 33.91              | 58.18          | 68.20               | -10.02          | H    |
| 15600.00        | 40.40             | 32.78                 | 20.12           | 34.86              | 58.44          | 68.20               | -9.76           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 29.96             | 32.44                 | 17.18           | 33.91              | 45.67          | 54.00               | -8.33           | V    |
| 15600.00        | 28.33             | 32.78                 | 20.12           | 34.86              | 46.37          | 54.00               | -7.63           | V    |
| 10400.00        | 30.83             | 32.44                 | 17.18           | 33.91              | 46.54          | 54.00               | -7.46           | H    |
| 15600.00        | 29.46             | 32.78                 | 20.12           | 34.86              | 47.50          | 54.00               | -6.50           | H    |

|            |                    |               |         |
|------------|--------------------|---------------|---------|
| Test mode: | IEEE 802.11n(HT20) | Test channel: | High CH |
|------------|--------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 42.01             | 32.59                 | 18.02           | 33.92              | 58.70          | 68.20               | -9.50           | V    |
| 15720.00        | 40.05             | 32.87                 | 20.15           | 34.88              | 58.19          | 68.20               | -10.01          | V    |
| 10480.00        | 41.60             | 32.59                 | 18.02           | 33.92              | 58.29          | 68.20               | -9.91           | H    |
| 15720.00        | 41.72             | 32.87                 | 20.15           | 34.88              | 59.86          | 68.20               | -8.34           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 30.59             | 32.59                 | 18.02           | 33.92              | 47.28          | 54.00               | -6.72           | V    |
| 15720.00        | 30.59             | 32.87                 | 20.15           | 34.88              | 48.73          | 54.00               | -5.27           | V    |
| 10480.00        | 30.68             | 32.59                 | 18.02           | 33.92              | 47.37          | 54.00               | -6.63           | H    |
| 15720.00        | 30.35             | 32.87                 | 20.15           | 34.88              | 48.49          | 54.00               | -5.51           | H    |



|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | Low CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 40.50             | 31.98                 | 17.08           | 33.91              | 55.65          | 68.20               | -12.55          | V    |
| 15540.00        | 42.77             | 32.65                 | 20.03           | 34.85              | 60.60          | 68.20               | -7.60           | V    |
| 10360.00        | 40.17             | 31.98                 | 17.08           | 33.91              | 55.32          | 68.20               | -12.88          | H    |
| 15540.00        | 40.22             | 32.65                 | 20.03           | 34.85              | 58.05          | 68.20               | -10.15          | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10360.00        | 30.52             | 31.98                 | 17.08           | 33.91              | 45.67          | 54.00               | -8.33           | V    |
| 15540.00        | 28.39             | 32.65                 | 20.03           | 34.85              | 46.22          | 54.00               | -7.78           | V    |
| 10360.00        | 28.10             | 31.98                 | 17.08           | 33.91              | 43.25          | 54.00               | -10.75          | H    |
| 15540.00        | 28.64             | 32.65                 | 20.03           | 34.85              | 46.47          | 54.00               | -7.53           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | Mid CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 41.49             | 32.44                 | 17.18           | 33.91              | 57.20          | 68.20               | -11.00          | V    |
| 15600.00        | 42.45             | 32.78                 | 20.12           | 34.86              | 60.49          | 68.20               | -7.71           | V    |
| 10400.00        | 40.87             | 32.44                 | 17.18           | 33.91              | 56.58          | 68.20               | -11.62          | H    |
| 15600.00        | 42.47             | 32.78                 | 20.12           | 34.86              | 60.51          | 68.20               | -7.69           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10400.00        | 28.51             | 32.44                 | 17.18           | 33.91              | 44.22          | 54.00               | -9.78           | V    |
| 15600.00        | 29.89             | 32.78                 | 20.12           | 34.86              | 47.93          | 54.00               | -6.07           | V    |
| 10400.00        | 30.22             | 32.44                 | 17.18           | 33.91              | 45.93          | 54.00               | -8.07           | H    |
| 15600.00        | 29.68             | 32.78                 | 20.12           | 34.86              | 47.72          | 54.00               | -6.28           | H    |

|            |                     |               |         |
|------------|---------------------|---------------|---------|
| Test mode: | IEEE 802.11ac(HT20) | Test channel: | High CH |
|------------|---------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 41.60             | 32.59                 | 18.02           | 33.92              | 58.29          | 68.20               | -9.91           | V    |
| 15720.00        | 40.18             | 32.87                 | 20.15           | 34.88              | 58.32          | 68.20               | -9.88           | V    |
| 10480.00        | 42.01             | 32.59                 | 18.02           | 33.92              | 58.70          | 68.20               | -9.50           | H    |
| 15720.00        | 42.40             | 32.87                 | 20.15           | 34.88              | 60.54          | 68.20               | -7.66           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10480.00        | 29.41             | 32.59                 | 18.02           | 33.92              | 46.10          | 54.00               | -7.90           | V    |
| 15720.00        | 30.10             | 32.87                 | 20.15           | 34.88              | 48.24          | 54.00               | -5.76           | V    |
| 10480.00        | 28.38             | 32.59                 | 18.02           | 33.92              | 45.07          | 54.00               | -8.93           | H    |
| 15720.00        | 29.03             | 32.87                 | 20.15           | 34.88              | 47.17          | 54.00               | -6.83           | H    |

|            |                    |               |        |
|------------|--------------------|---------------|--------|
| Test mode: | IEEE 802.11n(HT40) | Test channel: | Low CH |
|------------|--------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 40.27             | 31.98                 | 17.08           | 33.91              | 55.42          | 68.20               | -12.78          | V    |
| 15570.00        | 42.38             | 32.65                 | 20.03           | 34.85              | 60.21          | 68.20               | -7.99           | V    |
| 10380.00        | 42.72             | 31.98                 | 17.08           | 33.91              | 57.87          | 68.20               | -10.33          | H    |
| 15570.00        | 42.75             | 32.65                 | 20.03           | 34.85              | 60.58          | 68.20               | -7.62           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 30.65             | 31.98                 | 17.08           | 33.91              | 45.80          | 54.00               | -8.20           | V    |
| 15570.00        | 30.19             | 32.65                 | 20.03           | 34.85              | 48.02          | 54.00               | -5.98           | V    |
| 10380.00        | 28.22             | 31.98                 | 17.08           | 33.91              | 43.37          | 54.00               | -10.63          | H    |
| 15570.00        | 30.37             | 32.65                 | 20.03           | 34.85              | 48.20          | 54.00               | -5.80           | H    |

|            |                    |               |         |
|------------|--------------------|---------------|---------|
| Test mode: | IEEE 802.11n(HT40) | Test channel: | High CH |
|------------|--------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 40.82             | 32.59                 | 18.02           | 33.92              | 57.51          | 68.20               | -10.69          | V    |
| 15690.00        | 42.91             | 32.87                 | 20.15           | 34.88              | 61.05          | 68.20               | -7.15           | V    |
| 10460.00        | 40.51             | 32.59                 | 18.02           | 33.92              | 57.20          | 68.20               | -11.00          | H    |
| 15690.00        | 40.07             | 32.87                 | 20.15           | 34.88              | 58.21          | 68.20               | -9.99           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 30.19             | 32.59                 | 18.02           | 33.92              | 46.88          | 54.00               | -7.12           | V    |
| 15690.00        | 29.91             | 32.87                 | 20.15           | 34.88              | 48.05          | 54.00               | -5.95           | V    |
| 10460.00        | 29.55             | 32.59                 | 18.02           | 33.92              | 46.24          | 54.00               | -7.76           | H    |
| 15690.00        | 30.00             | 32.78                 | 20.12           | 34.86              | 48.04          | 54.00               | -5.96           | H    |

|            |                     |               |        |
|------------|---------------------|---------------|--------|
| Test mode: | IEEE 802.11ac(HT40) | Test channel: | Low CH |
|------------|---------------------|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 40.70             | 31.98                 | 17.08           | 33.91              | 55.85          | 68.20               | -12.35          | V    |
| 15570.00        | 40.28             | 32.65                 | 20.03           | 34.85              | 58.11          | 68.20               | -10.09          | V    |
| 10380.00        | 40.11             | 31.98                 | 17.08           | 33.91              | 55.26          | 68.20               | -12.94          | H    |
| 15570.00        | 42.90             | 32.65                 | 20.03           | 34.85              | 60.73          | 68.20               | -7.47           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10380.00        | 30.55             | 31.98                 | 17.08           | 33.91              | 45.70          | 54.00               | -8.30           | V    |
| 15570.00        | 28.06             | 32.65                 | 20.03           | 34.85              | 45.89          | 54.00               | -8.11           | V    |
| 10380.00        | 30.85             | 31.98                 | 17.08           | 33.91              | 46.00          | 54.00               | -8.00           | H    |
| 15570.00        | 28.33             | 32.65                 | 20.03           | 34.85              | 46.16          | 54.00               | -7.84           | H    |



|            |                     |               |         |
|------------|---------------------|---------------|---------|
| Test mode: | IEEE 802.11ac(HT40) | Test channel: | High CH |
|------------|---------------------|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 40.84             | 32.59                 | 18.02           | 33.92              | 57.53          | 68.20               | -10.67          | V    |
| 15690.00        | 41.35             | 32.87                 | 20.15           | 34.88              | 59.49          | 68.20               | -8.71           | V    |
| 10460.00        | 42.69             | 32.59                 | 18.02           | 33.92              | 59.38          | 68.20               | -8.82           | H    |
| 15690.00        | 41.65             | 32.87                 | 20.15           | 34.88              | 59.79          | 68.20               | -8.41           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10460.00        | 29.42             | 32.59                 | 18.02           | 33.92              | 46.11          | 54.00               | -7.89           | V    |
| 15690.00        | 30.34             | 32.87                 | 20.15           | 34.88              | 48.48          | 54.00               | -5.52           | V    |
| 10460.00        | 29.75             | 32.59                 | 18.02           | 33.92              | 46.44          | 54.00               | -7.56           | H    |
| 15690.00        | 30.98             | 32.78                 | 20.12           | 34.86              | 49.02          | 54.00               | -4.98           | H    |

|            |                     |               |  |
|------------|---------------------|---------------|--|
| Test mode: | IEEE 802.11ac(HT80) | Test channel: |  |
|------------|---------------------|---------------|--|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10420.00        | 40.01             | 32.44                 | 17.18           | 33.91              | 55.72          | 68.20               | -12.48          | V    |
| 15630.00        | 41.85             | 32.78                 | 20.12           | 34.86              | 59.89          | 68.20               | -8.31           | V    |
| 10420.00        | 41.24             | 32.44                 | 17.18           | 33.91              | 56.95          | 68.20               | -11.25          | H    |
| 15630.00        | 40.27             | 32.78                 | 20.12           | 34.86              | 58.31          | 68.20               | -9.89           | H    |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Pol. |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------|
| 10420.00        | 28.35             | 32.44                 | 17.18           | 33.91              | 44.06          | 54.00               | -9.94           | V    |
| 15630.00        | 28.84             | 32.78                 | 20.12           | 34.86              | 46.88          | 54.00               | -7.12           | V    |
| 10420.00        | 29.83             | 32.44                 | 17.18           | 33.91              | 45.54          | 54.00               | -8.46           | H    |
| 15630.00        | 28.76             | 32.78                 | 20.12           | 34.86              | 46.80          | 54.00               | -7.20           | H    |

Note:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

## Radiated Band Edge:

| Test Mode: 802.11a |                   |                       |                 |                    |                |                |                 |      |
|--------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value         |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00            | 46.64             | 28.65                 | 13.58           | 31.04              | 57.83          | 74.00          | -16.17          | H    |
| 5350.00            | 47.15             | 29.16                 | 14.68           | 31.96              | 59.03          | 74.00          | -14.97          | H    |
| 5150.00            | 48.40             | 28.65                 | 13.58           | 31.04              | 59.59          | 74.00          | -14.41          | V    |
| 5350.00            | 48.58             | 29.16                 | 14.68           | 31.96              | 60.46          | 74.00          | -13.54          | V    |
| Average Value      |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00            | 32.41             | 28.65                 | 13.58           | 31.04              | 43.60          | 54.00          | -10.40          | H    |
| 5350.00            | 34.49             | 29.16                 | 14.68           | 31.96              | 46.37          | 54.00          | -7.63           | H    |
| 5150.00            | 34.61             | 28.65                 | 13.58           | 31.04              | 45.80          | 54.00          | -8.20           | V    |
| 5350.00            | 32.64             | 29.16                 | 14.68           | 31.96              | 44.52          | 54.00          | -9.48           | V    |

| Test Mode: 802.11n20 |                   |                       |                 |                    |                |                |                 |      |
|----------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value           |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 48.55             | 28.65                 | 13.58           | 31.04              | 59.74          | 74.00          | -14.26          | H    |
| 5350.00              | 47.35             | 29.16                 | 14.68           | 31.96              | 59.23          | 74.00          | -14.77          | H    |
| 5150.00              | 48.57             | 28.65                 | 13.58           | 31.04              | 59.76          | 74.00          | -14.24          | V    |
| 5350.00              | 47.91             | 29.16                 | 14.68           | 31.96              | 59.79          | 74.00          | -14.21          | V    |
| Average Value        |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 34.66             | 28.65                 | 13.58           | 31.04              | 45.85          | 54.00          | -8.15           | H    |
| 5350.00              | 33.14             | 29.16                 | 14.68           | 31.96              | 45.02          | 54.00          | -8.98           | H    |
| 5150.00              | 33.82             | 28.65                 | 13.58           | 31.04              | 45.01          | 54.00          | -8.99           | V    |
| 5350.00              | 32.81             | 29.16                 | 14.68           | 31.96              | 44.69          | 54.00          | -9.31           | V    |



| Test Mode: 802.11ac20 |                   |                       |                 |                    |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 46.92             | 28.65                 | 13.58           | 31.04              | 58.11          | 74.00          | -15.89          | H    |
| 5350.00               | 47.11             | 29.16                 | 14.68           | 31.96              | 58.99          | 74.00          | -15.01          | H    |
| 5150.00               | 46.73             | 28.65                 | 13.58           | 31.04              | 57.92          | 74.00          | -16.08          | V    |
| 5350.00               | 48.73             | 29.16                 | 14.68           | 31.96              | 60.61          | 74.00          | -13.39          | V    |
| Average Value         |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 33.66             | 28.65                 | 13.58           | 31.04              | 44.85          | 54.00          | -9.15           | H    |
| 5350.00               | 34.91             | 29.16                 | 14.68           | 31.96              | 46.79          | 54.00          | -7.21           | H    |
| 5150.00               | 34.01             | 28.65                 | 13.58           | 31.04              | 45.20          | 54.00          | -8.80           | V    |
| 5350.00               | 33.93             | 29.16                 | 14.68           | 31.96              | 45.81          | 54.00          | -8.19           | V    |

| Test Mode: 802.11n40 |                   |                       |                 |                    |                |                |                 |      |
|----------------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|------|
| Peak Value           |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 46.44             | 28.65                 | 13.58           | 31.04              | 57.63          | 74.00          | -16.37          | H    |
| 5350.00              | 46.19             | 29.16                 | 14.68           | 31.96              | 58.07          | 74.00          | -15.93          | H    |
| 5150.00              | 47.87             | 28.65                 | 13.58           | 31.04              | 59.06          | 74.00          | -14.94          | V    |
| 5350.00              | 46.27             | 29.16                 | 14.68           | 31.96              | 58.15          | 74.00          | -15.85          | V    |
| Average Value        |                   |                       |                 |                    |                |                |                 |      |
| Frequency (MHz)      | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00              | 33.40             | 28.65                 | 13.58           | 31.04              | 44.59          | 54.00          | -9.41           | H    |
| 5350.00              | 32.14             | 29.16                 | 14.68           | 31.96              | 44.02          | 54.00          | -9.98           | H    |
| 5150.00              | 34.39             | 28.65                 | 13.58           | 31.04              | 45.58          | 54.00          | -8.42           | V    |
| 5350.00              | 33.65             | 29.16                 | 14.68           | 31.96              | 45.53          | 54.00          | -8.47           | V    |



| Test Mode: 802.11ac40 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 45.83             | 28.65                 | 13.58           | 31.04                    | 57.02          | 74.00          | -16.98          | H    |
| 5350.00               | 47.65             | 29.16                 | 14.68           | 31.96                    | 59.53          | 74.00          | -14.47          | H    |
| 5150.00               | 47.50             | 28.65                 | 13.58           | 31.04                    | 58.69          | 74.00          | -15.31          | V    |
| 5350.00               | 45.27             | 29.16                 | 14.68           | 31.96                    | 57.15          | 74.00          | -16.85          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 33.36             | 28.65                 | 13.58           | 31.04                    | 44.55          | 54.00          | -9.45           | H    |
| 5350.00               | 33.15             | 29.16                 | 14.68           | 31.96                    | 45.03          | 54.00          | -8.97           | H    |
| 5150.00               | 34.13             | 28.65                 | 13.58           | 31.04                    | 45.32          | 54.00          | -8.68           | V    |
| 5350.00               | 32.82             | 29.16                 | 14.68           | 31.96                    | 44.70          | 54.00          | -9.30           | V    |


| Test Mode: 802.11ac80 |                   |                       |                 |                          |                |                |                 |      |
|-----------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|----------------|-----------------|------|
| Peak Value            |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 46.75             | 28.65                 | 13.58           | 31.04                    | 57.94          | 74.00          | -16.06          | H    |
| 5350.00               | 45.54             | 29.16                 | 14.68           | 31.96                    | 57.42          | 74.00          | -16.58          | H    |
| 5150.00               | 48.85             | 28.65                 | 13.58           | 31.04                    | 60.04          | 74.00          | -13.96          | V    |
| 5350.00               | 45.36             | 29.16                 | 14.68           | 31.96                    | 57.24          | 74.00          | -16.76          | V    |
| Average Value         |                   |                       |                 |                          |                |                |                 |      |
| Frequency (MHz)       | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 5150.00               | 33.82             | 28.65                 | 13.58           | 31.04                    | 45.01          | 54.00          | -8.99           | H    |
| 5350.00               | 32.72             | 29.16                 | 14.68           | 31.96                    | 44.60          | 54.00          | -9.40           | H    |
| 5150.00               | 32.11             | 28.65                 | 13.58           | 31.04                    | 43.30          | 54.00          | -10.70          | V    |
| 5350.00               | 34.23             | 29.16                 | 14.68           | 31.96                    | 46.11          | 54.00          | -7.89           | V    |

## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

|               |                                       |
|---------------|---------------------------------------|
| Test Standard | FCC Part15 C Section 15.407(a)(1)(iv) |
| Test Limit    | 24dBm                                 |

### 5.2. Test Setup



### 5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

### 5.4. Test Data

|              |   |                           |
|--------------|---|---------------------------|
| Test Item    | : | Max. peak output power    |
| Test Voltage | : | AC 120V, 60Hz for adapter |
| Test Result  | : | PASS                      |

|             |   |                  |
|-------------|---|------------------|
| Test Mode   | : | CH Low ~ CH High |
| Temperature | : | 24℃              |
| Humidity    | : | 55%RH            |

**ANT A:**

| Mode       | Channel Frequency (MHz) | Peak Power output (dBm) | Correctional Limit (dBm) | Results |
|------------|-------------------------|-------------------------|--------------------------|---------|
| 802.11a    | 5180                    | 12.77                   | 24                       | PASS    |
|            | 5200                    | 11.77                   | 24                       | PASS    |
|            | 5240                    | 12.00                   | 24                       | PASS    |
| 802.11n20  | 5180                    | 11.94                   | 24                       | PASS    |
|            | 5200                    | 11.15                   | 24                       | PASS    |
|            | 5240                    | 10.53                   | 24                       | PASS    |
| 802.11ac20 | 5180                    | 11.90                   | 24                       | PASS    |
|            | 5200                    | 11.46                   | 24                       | PASS    |
|            | 5240                    | 10.48                   | 24                       | PASS    |
| 802.11n40  | 5190                    | 11.39                   | 24                       | PASS    |
|            | 5230                    | 10.62                   | 24                       | PASS    |
| 802.11ac40 | 5190                    | 11.21                   | 24                       | PASS    |
|            | 5230                    | 10.55                   | 24                       | PASS    |
| 802.11ac80 | 5210                    | <b>13.85</b>            | 24                       | PASS    |

Note: The EUT is Belongs to 15.407(a)(1)(iv)



**ANT B:**

| Mode       | Channel Frequency (MHz) | Peak Power output (dBm) | Correctional Limit (dBm) | Results |
|------------|-------------------------|-------------------------|--------------------------|---------|
| 802.11a    | 5180                    | 13.38                   | 24                       | PASS    |
|            | 5200                    | 12.41                   | 24                       | PASS    |
|            | 5240                    | 11.65                   | 24                       | PASS    |
| 802.11n20  | 5180                    | 12.53                   | 24                       | PASS    |
|            | 5200                    | 11.99                   | 24                       | PASS    |
|            | 5240                    | 11.15                   | 24                       | PASS    |
| 802.11ac20 | 5180                    | 12.58                   | 24                       | PASS    |
|            | 5200                    | 12.06                   | 24                       | PASS    |
|            | 5240                    | 11.16                   | 24                       | PASS    |
| 802.11n40  | 5190                    | 11.79                   | 24                       | PASS    |
|            | 5230                    | 11.37                   | 24                       | PASS    |
| 802.11ac40 | 5190                    | 11.66                   | 24                       | PASS    |
|            | 5230                    | 10.89                   | 24                       | PASS    |
| 802.11ac80 | 5210                    | 11.51                   | 24                       | PASS    |

Note: The EUT is Belongs to 15.407(a)(1)(iv)

## ANT A+B:

| Mode       | Channel Frequency (MHz) | Peak Power output (dBm) | Correctional Limit (dBm) | Results |
|------------|-------------------------|-------------------------|--------------------------|---------|
| 802.11a    | 5180                    | 16.10                   | 24                       | PASS    |
|            | 5200                    | 15.11                   | 24                       | PASS    |
|            | 5240                    | 14.84                   | 24                       | PASS    |
| 802.11n20  | 5180                    | 15.26                   | 24                       | PASS    |
|            | 5200                    | 14.60                   | 24                       | PASS    |
|            | 5240                    | 13.86                   | 24                       | PASS    |
| 802.11ac20 | 5180                    | 15.26                   | 24                       | PASS    |
|            | 5200                    | 14.78                   | 24                       | PASS    |
|            | 5240                    | 13.84                   | 24                       | PASS    |
| 802.11n40  | 5190                    | 14.60                   | 24                       | PASS    |
|            | 5230                    | 14.02                   | 24                       | PASS    |
| 802.11ac40 | 5190                    | 14.45                   | 24                       | PASS    |
|            | 5230                    | 13.73                   | 24                       | PASS    |
| 802.11ac80 | 5210                    | 15.85                   | 24                       | PASS    |


Note: The EUT is Belongs to 15.407(a)(1)(iv)

## 6. Occupy Bandwidth Test

### 6.1. Test Standard

|               |                                    |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.407 (a)(5) |
|---------------|------------------------------------|

### 6.2. Test Setup



### 6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

#### 26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

#### 6 dB bandwidth

RBW = 100kHz;

Set the video bandwidth (VBW)  $\geq 3$  RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.

5. Repeat until all the rest channels are investigated.

### 6.4. Test Data



Test Item : 6dB &26dB BW  
Test Voltage : AC 120V, 60Hz for adapter  
Test Result : PASS


Test Mode : CH Low ~ CH High  
Temperature : 24℃  
Humidity : 55%RH

**ANT A:**


| Mode       | Channel Frequency (MHz) | 26dB BW(MHz) | 99% Bandwidth (MHz) |
|------------|-------------------------|--------------|---------------------|
| 802.11a    | 5180                    | 20.85        | 16.643              |
|            | 5200                    | 21.12        | 16.645              |
|            | 5240                    | 20.99        | 16.672              |
| 802.11n20  | 5180                    | 21.49        | 17.841              |
|            | 5200                    | 21.33        | 17.766              |
|            | 5240                    | 21.22        | 17.777              |
| 802.11ac20 | 5180                    | 21.21        | 17.725              |
|            | 5200                    | 21.26        | 17.760              |
|            | 5240                    | 21.10        | 17.788              |
| 802.11n40  | 5190                    | 39.22        | 36.214              |
|            | 5230                    | 39.70        | 36.233              |
| 802.11ac40 | 5190                    | 39.69        | 36.246              |
|            | 5230                    | 39.89        | 36.275              |
| 802.11ac80 | 5210                    | 81.00        | 75.556              |




## 26dB & 99% Bandwidth

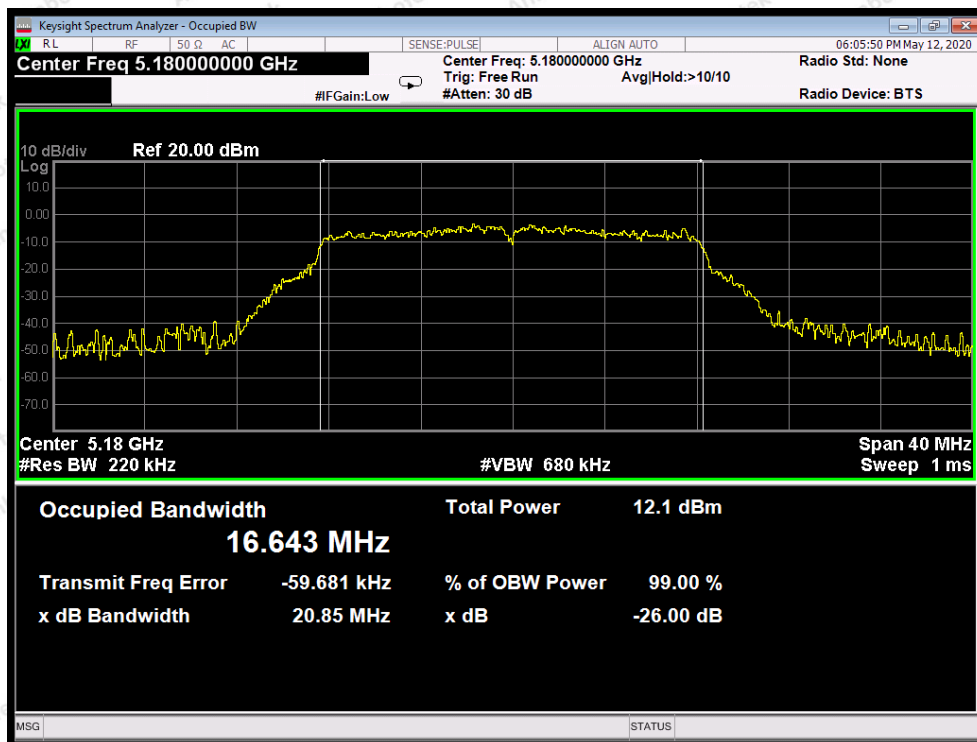


Test Mode: 802.11a--Low

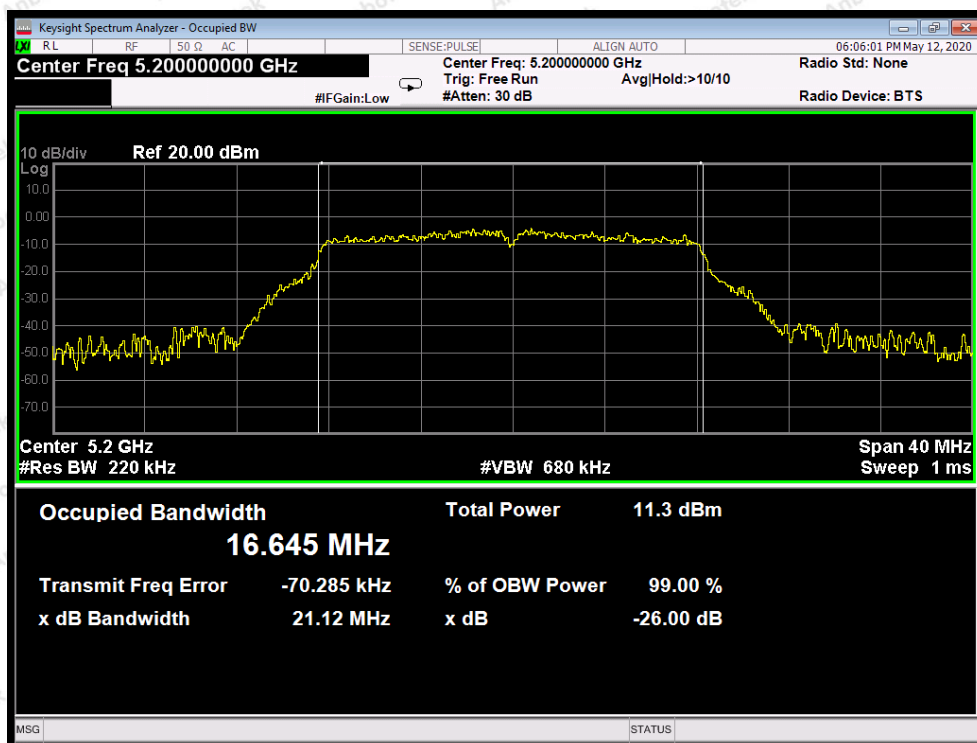

Test Mode: 802.11a---Middle

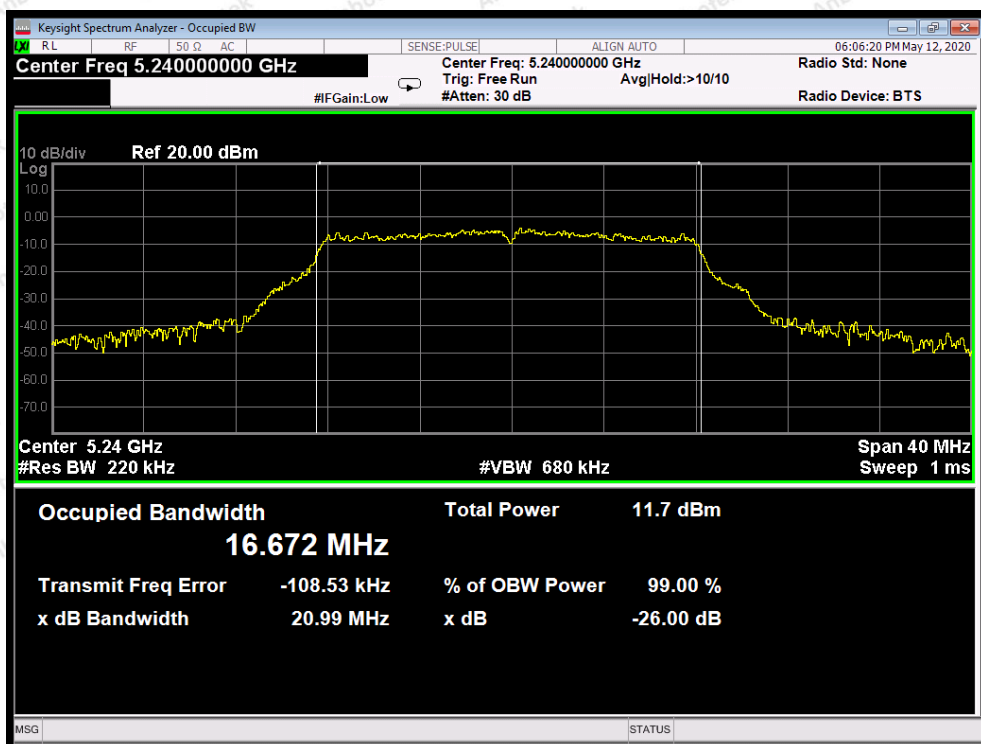


Test Mode: 802.11a---High

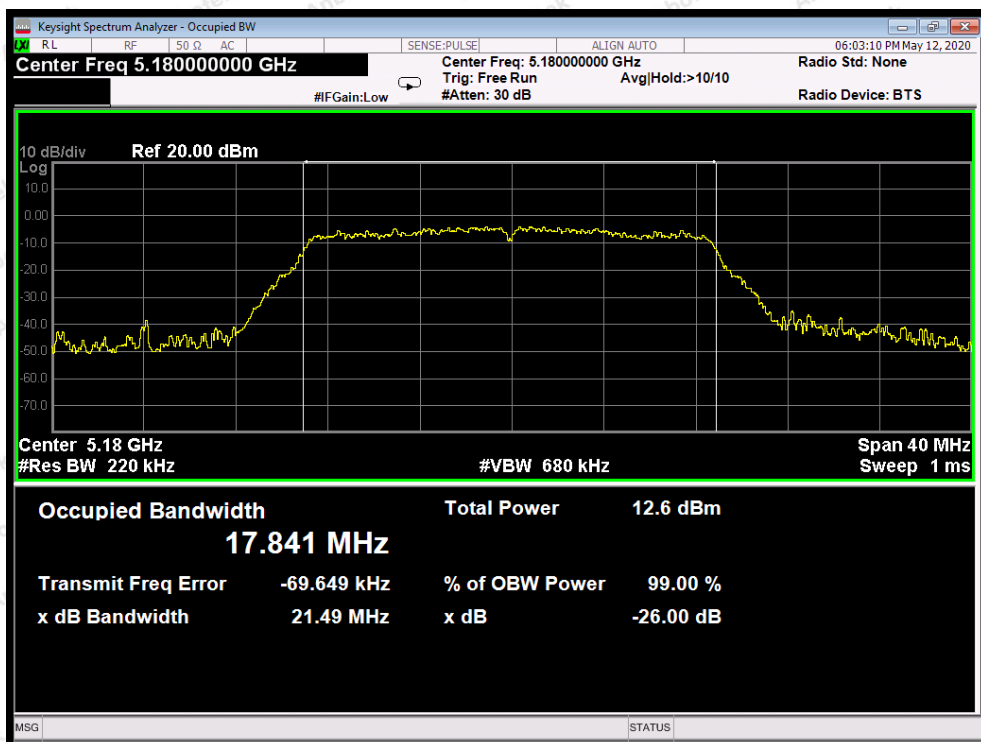


Test Mode: 802.11n20---Low






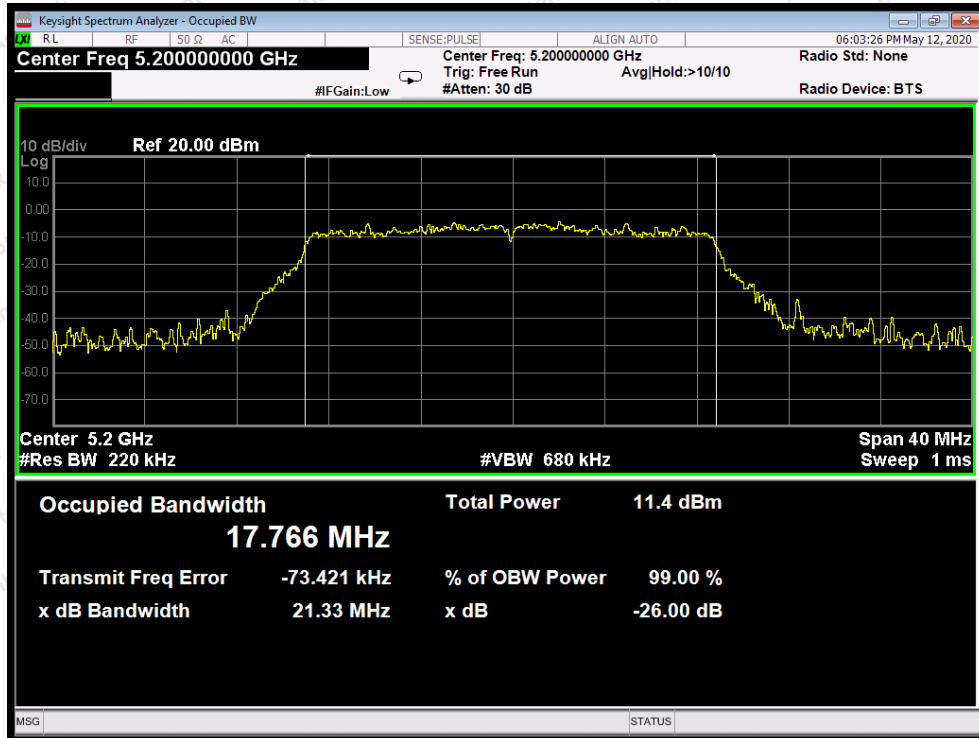


Test Mode: 802.11n20---Middle

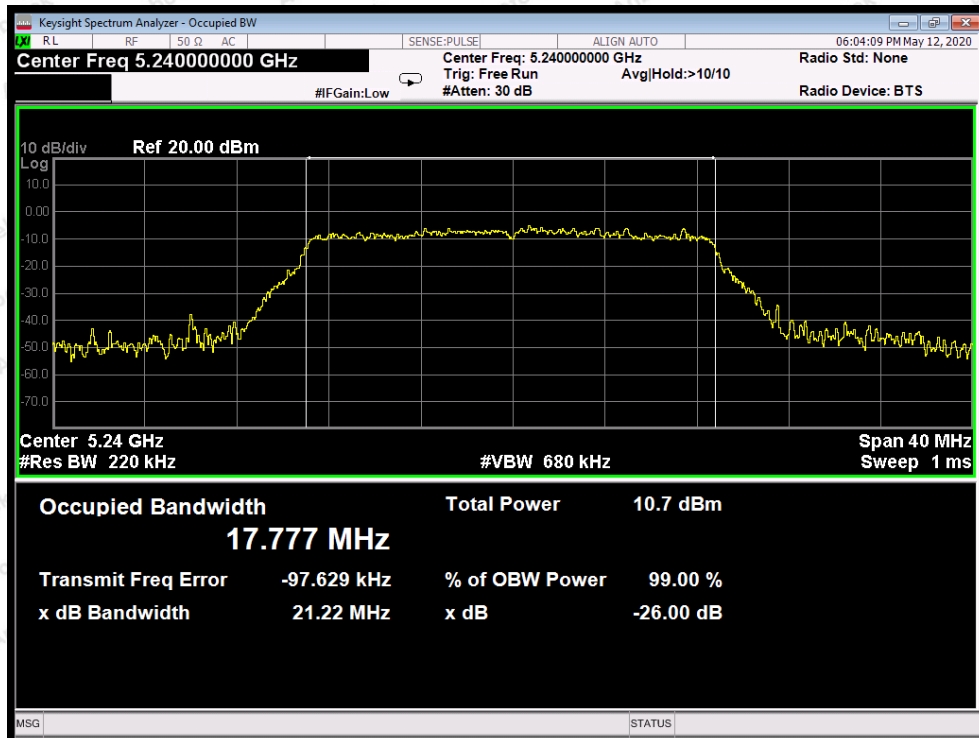


Test Mode: 802.11n20---High

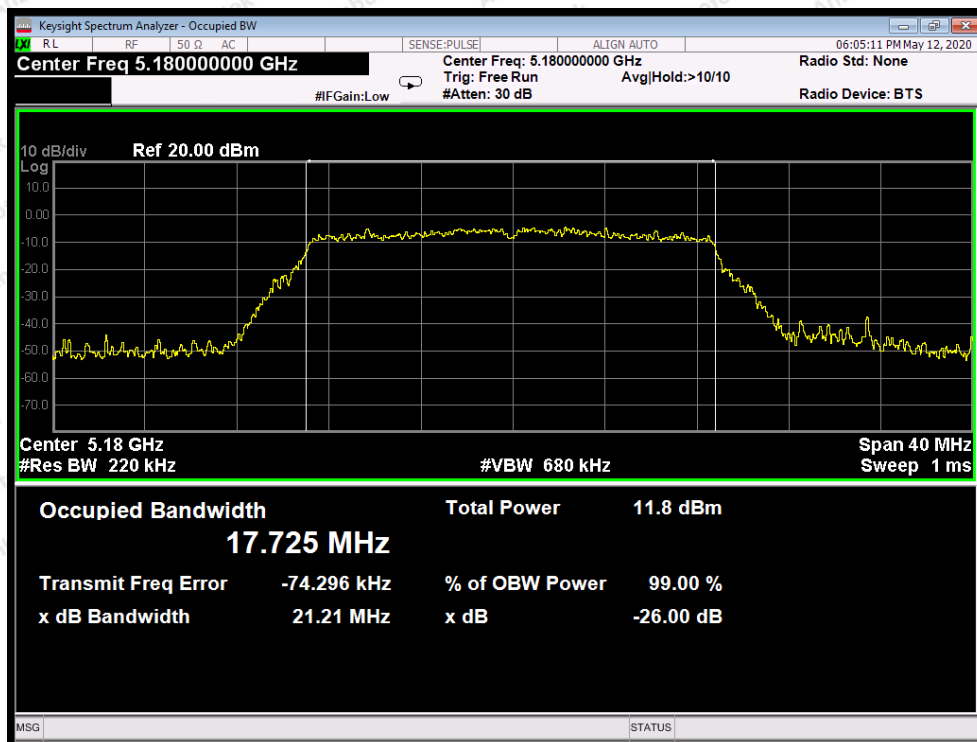


Test Mode: 802.11ac20--Low

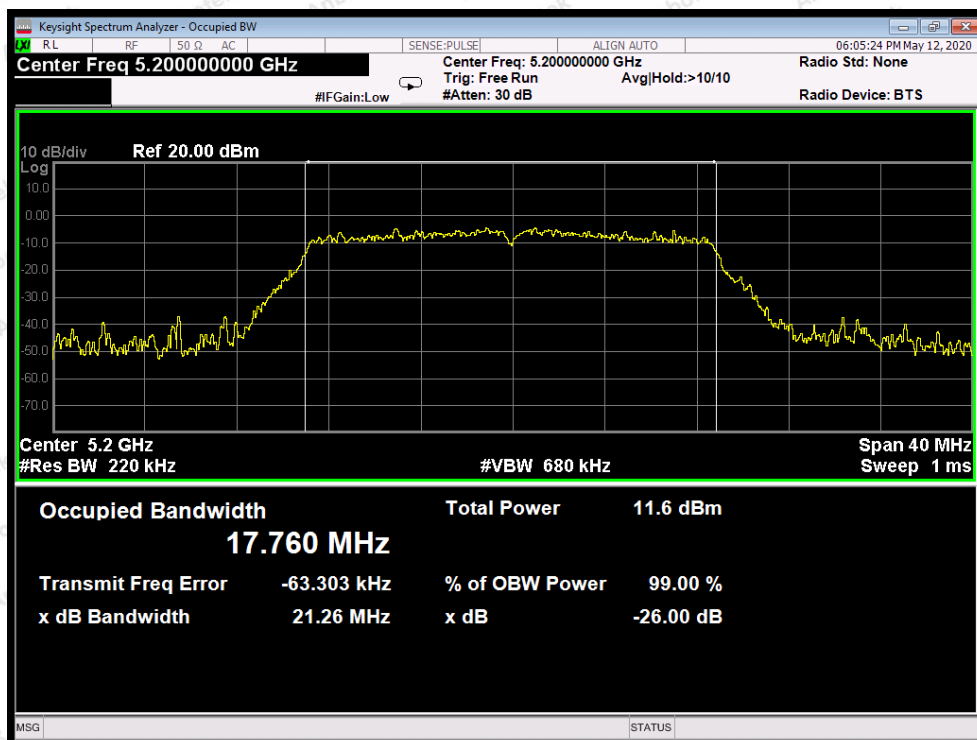

Test Mode: 802.11ac20---Middle

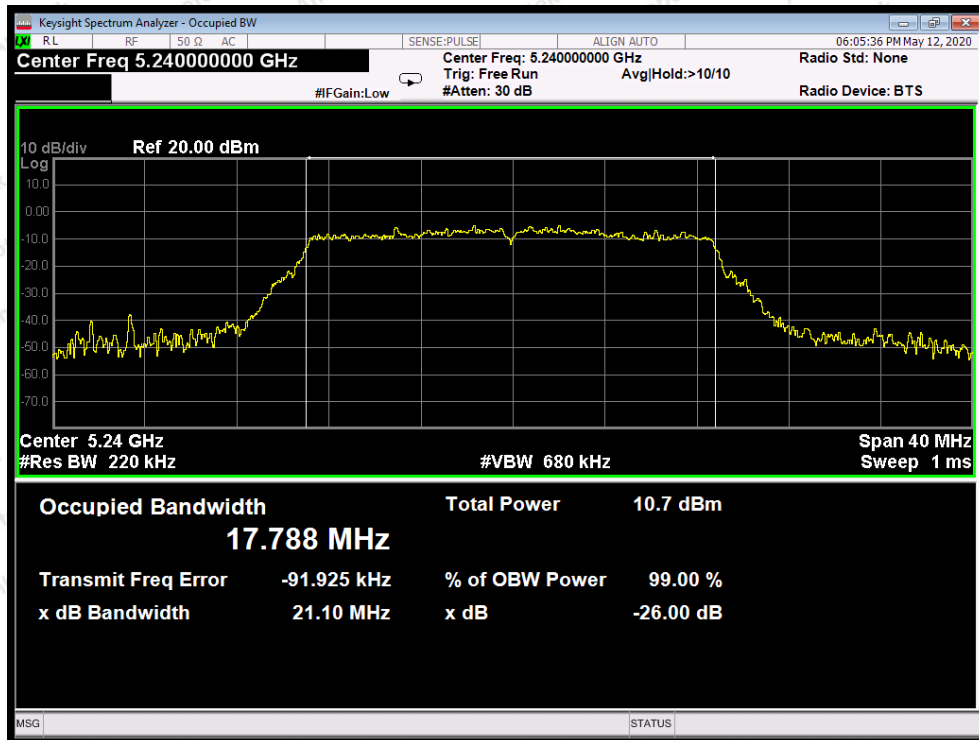


Test Mode: 802.11ac20---High

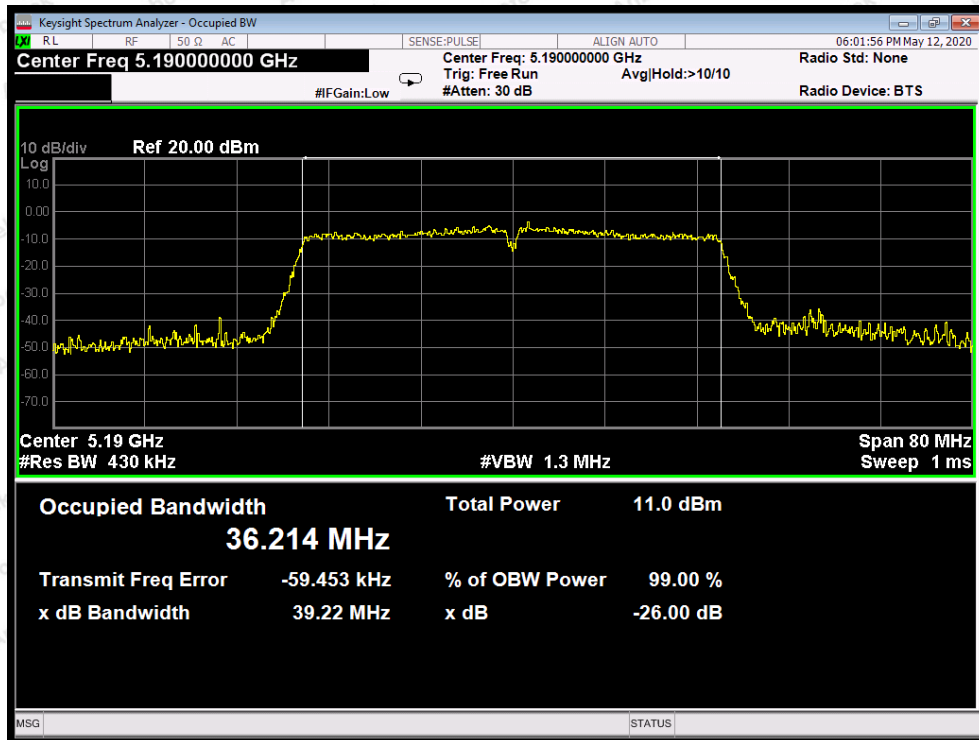


Test Mode: 802.11n40---Low




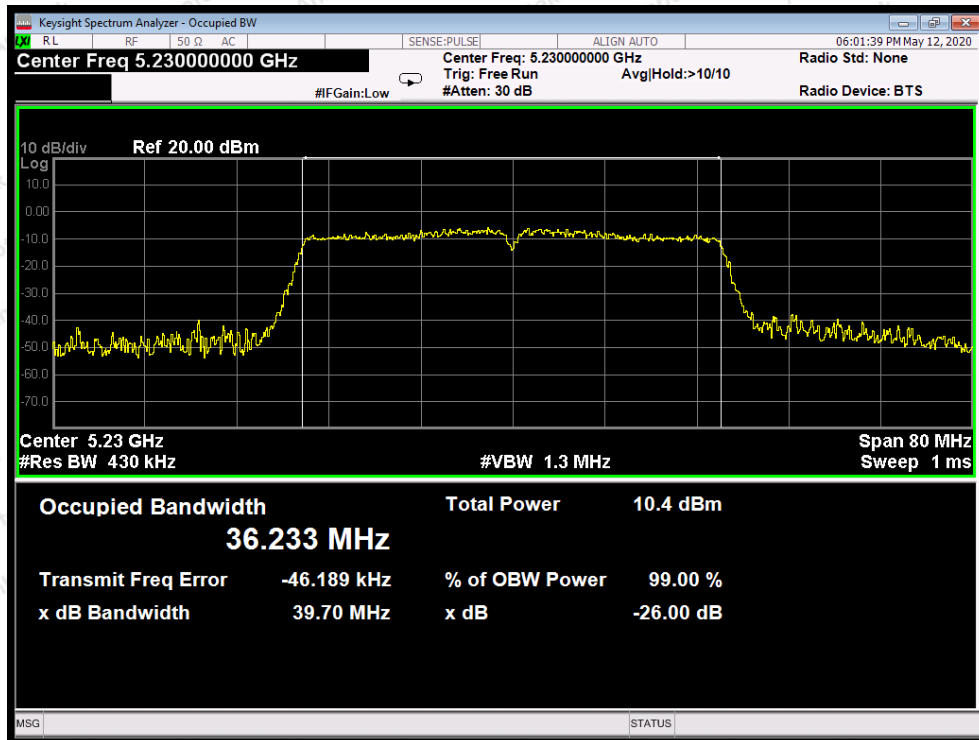


Test Mode: 802.11n40---High

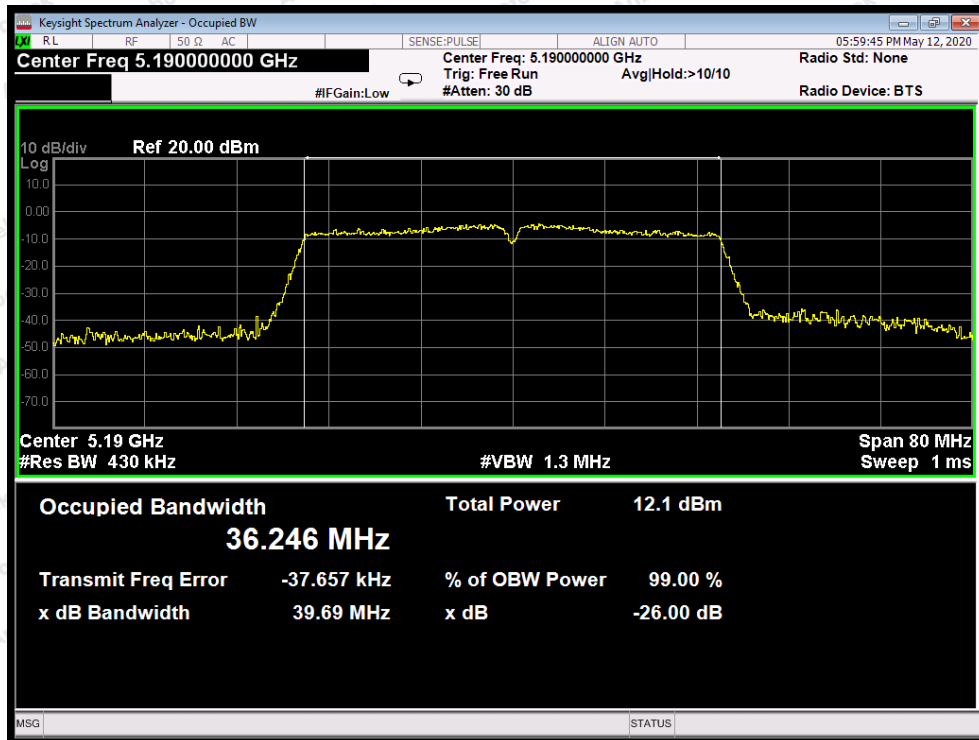

Test Mode: 802.11ac40---Low

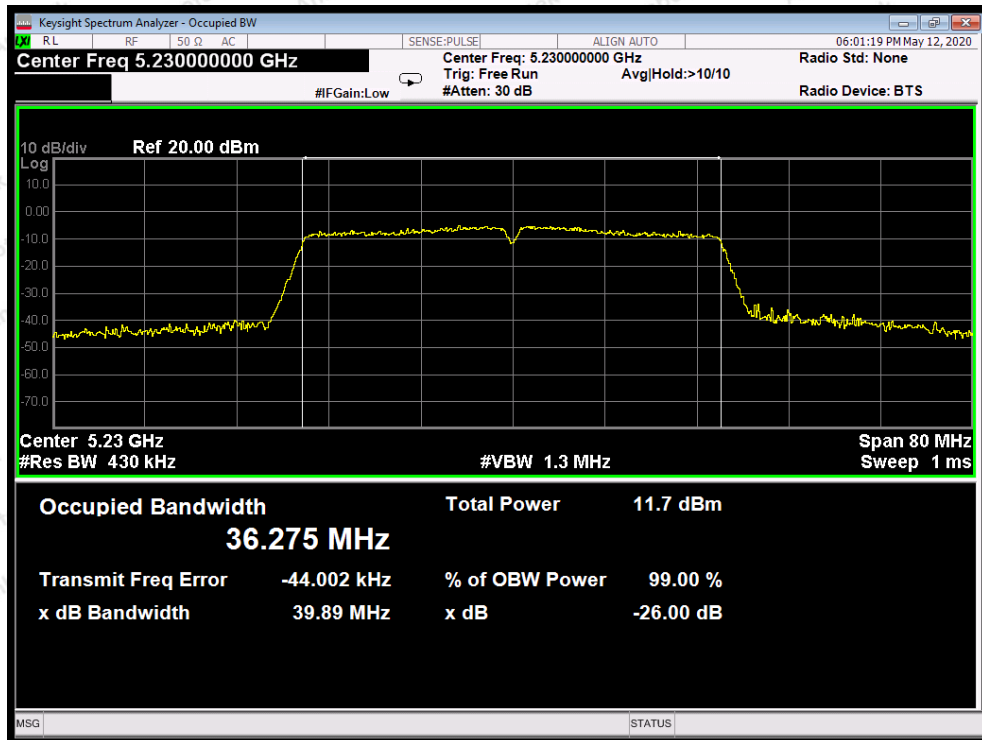

Test Mode: 802.11ac40---High

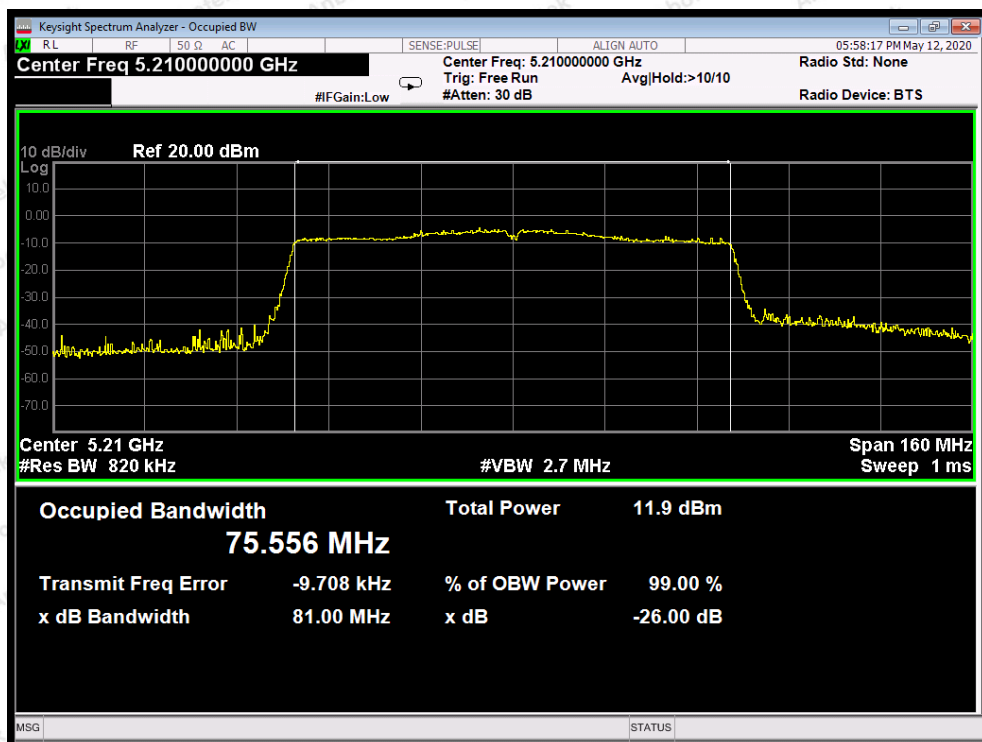

Test Mode: 802.11ac80




## ANT B:

| Mode       | Channel Frequency (MHz) | 26dB BW(MHz) | 99% Bandwidth (MHz) |
|------------|-------------------------|--------------|---------------------|
| 802.11a    | 5180                    | 20.90        | 16.657              |
|            | 5200                    | 20.85        | 16.635              |
|            | 5240                    | 21.17        | 16.674              |
| 802.11n20  | 5180                    | 21.56        | 17.835              |
|            | 5200                    | 21.54        | 17.796              |
|            | 5240                    | 21.21        | 17.761              |
| 802.11ac20 | 5180                    | 21.10        | 17.785              |
|            | 5200                    | 20.98        | 17.812              |
|            | 5240                    | 21.34        | 17.790              |
| 802.11n40  | 5190                    | 39.66        | 36.248              |
|            | 5230                    | 39.20        | 36.046              |
| 802.11ac40 | 5190                    | 39.81        | 36.227              |
|            | 5230                    | 40.00        | 36.249              |
| 802.11ac80 | 5210                    | 80.61        | 75.397              |







## 26dB &amp; 99% Bandwidth

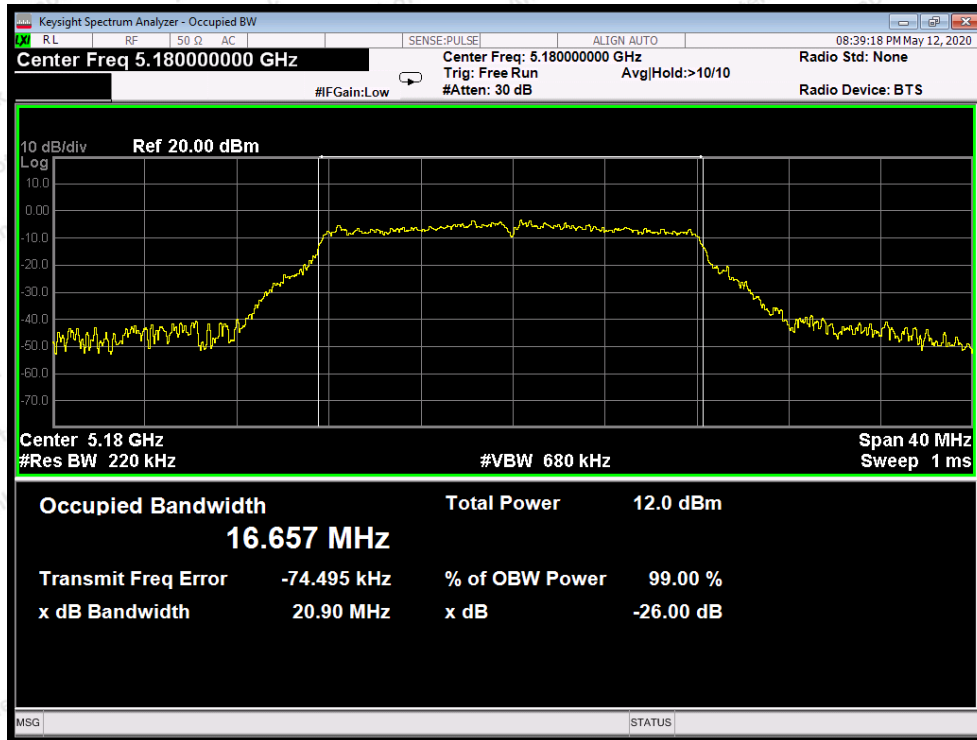


Test Mode: 802.11a--Low

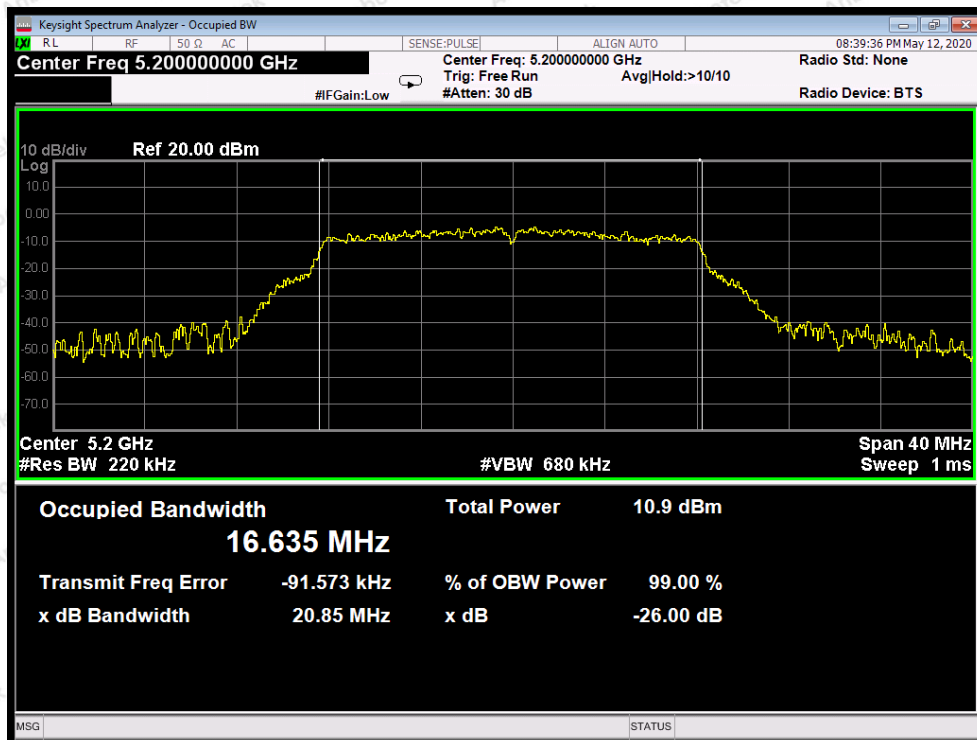

Test Mode: 802.11a---Middle

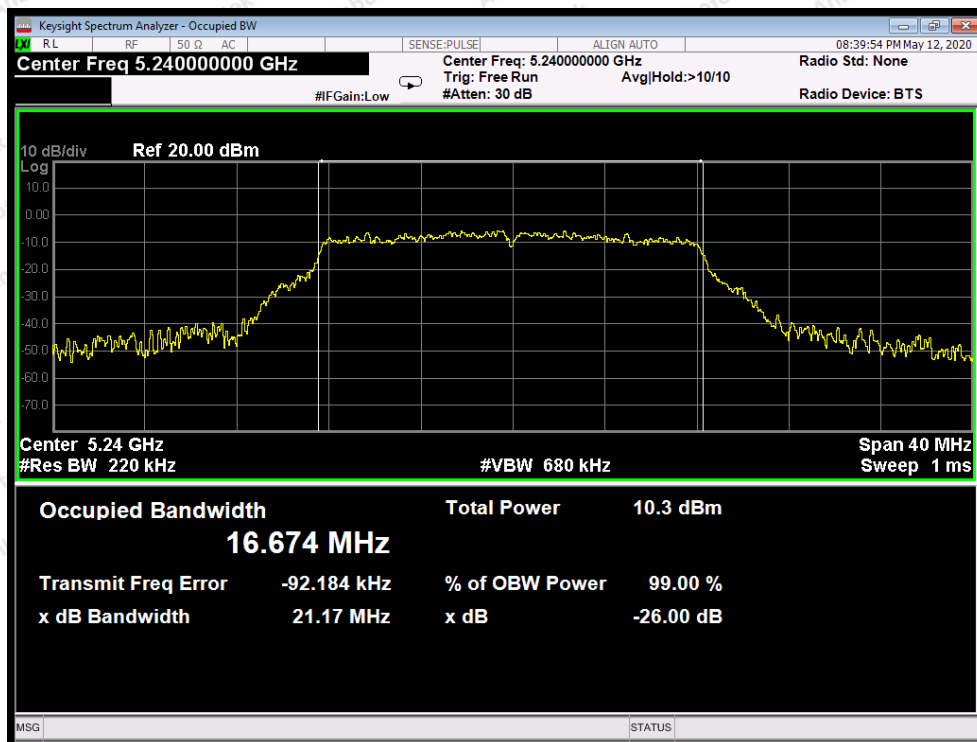


Test Mode: 802.11a---High

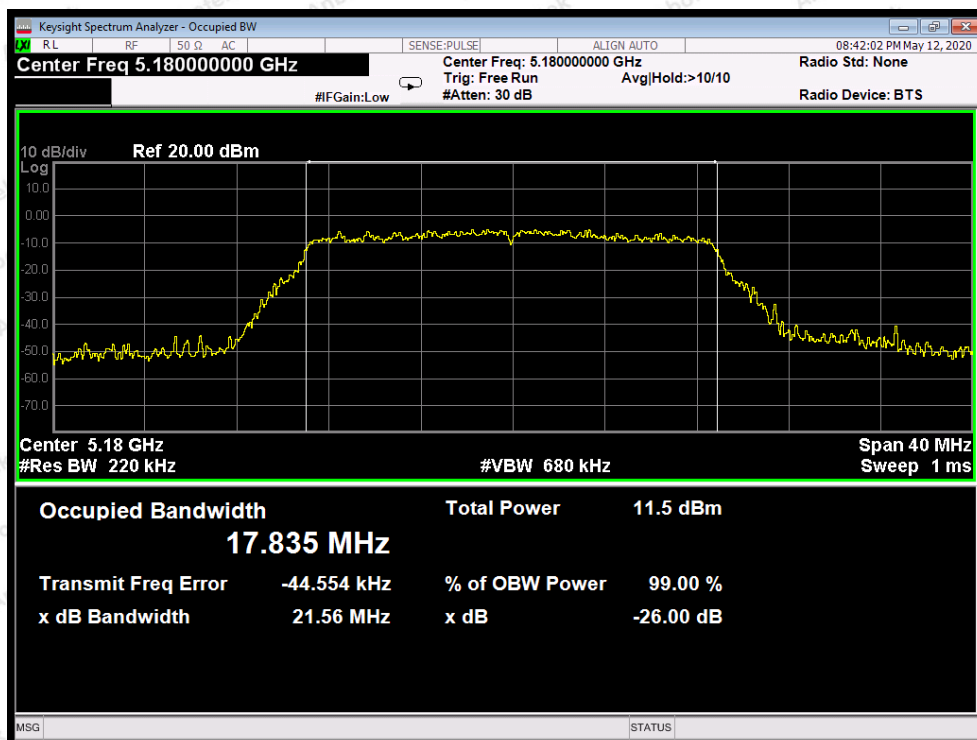


Test Mode: 802.11n20---Low



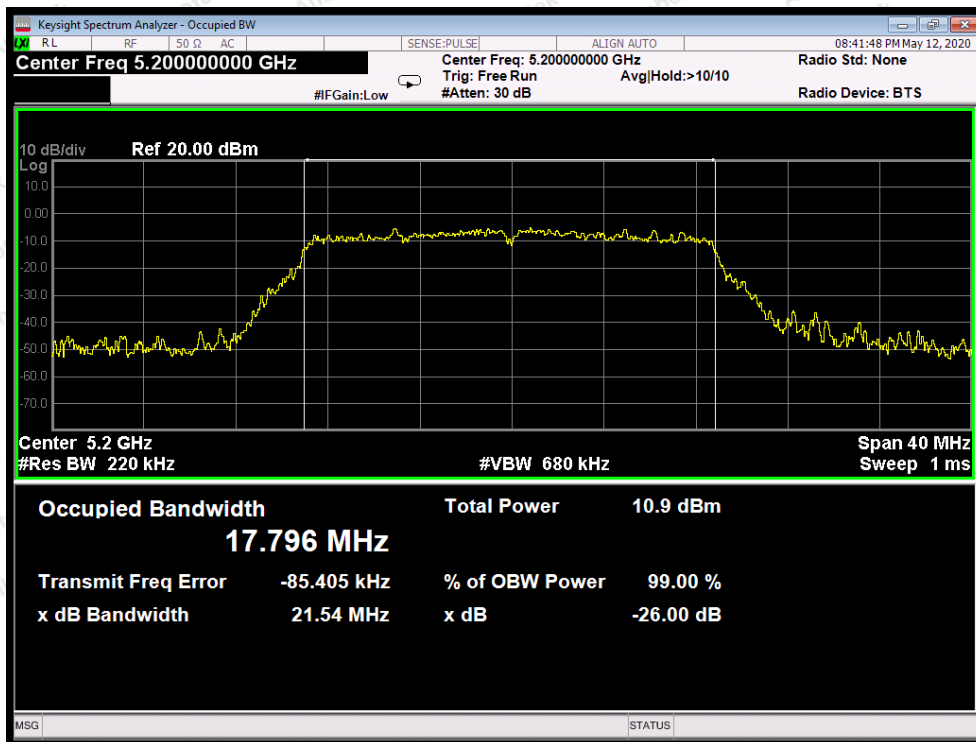


Test Mode: 802.11n20---Middle

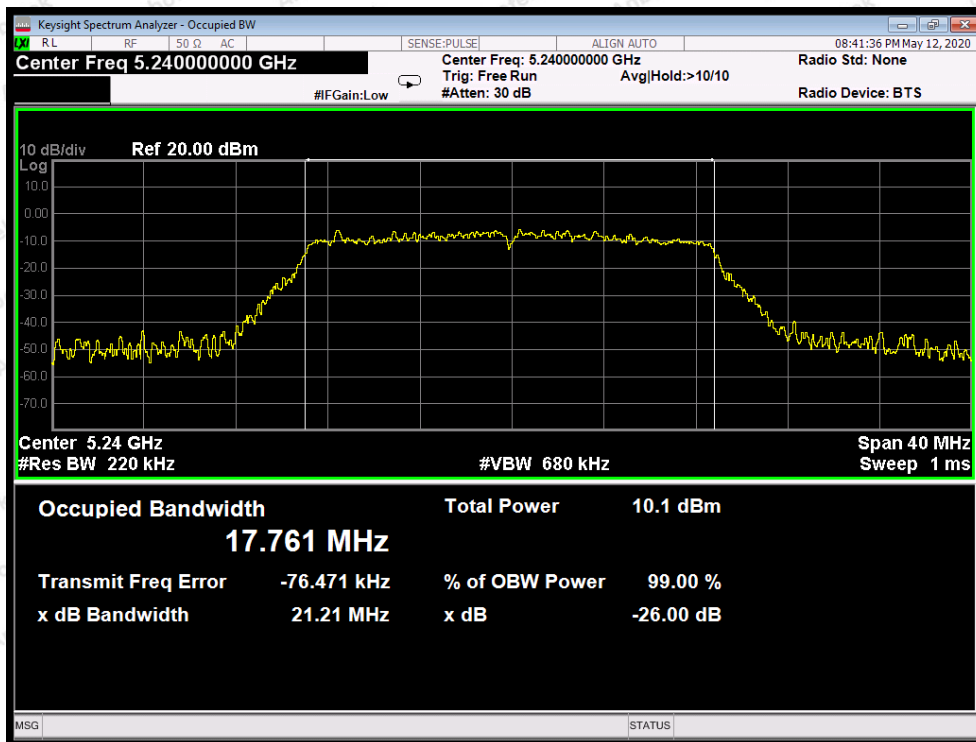


Test Mode: 802.11n20---High




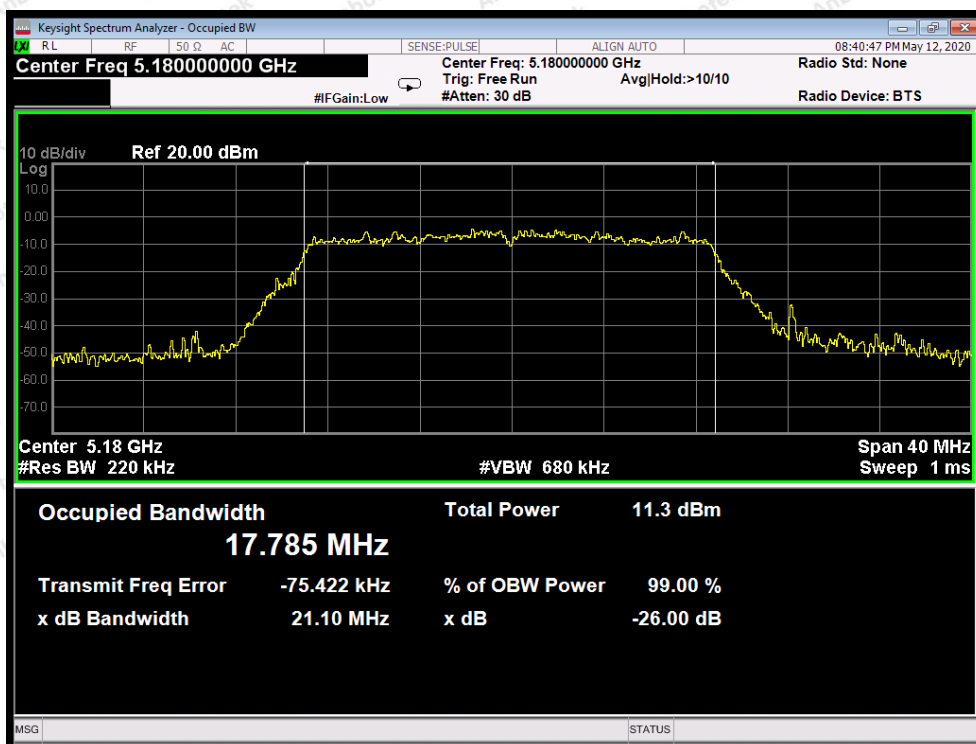


Test Mode: 802.11ac20--Low

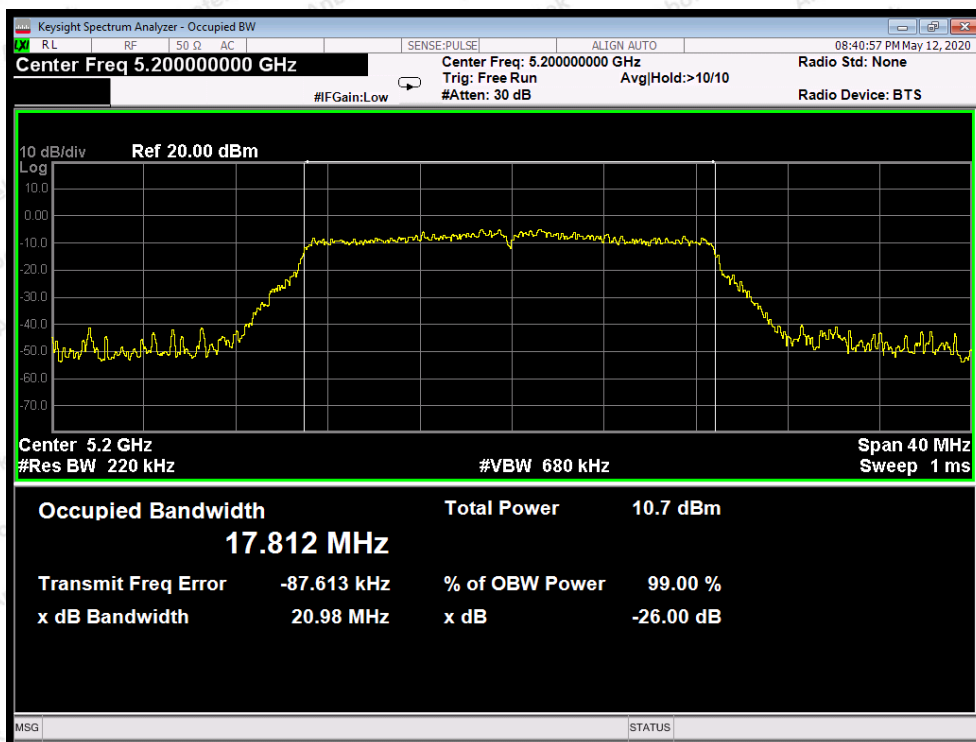


Test Mode: 802.11ac20---Middle

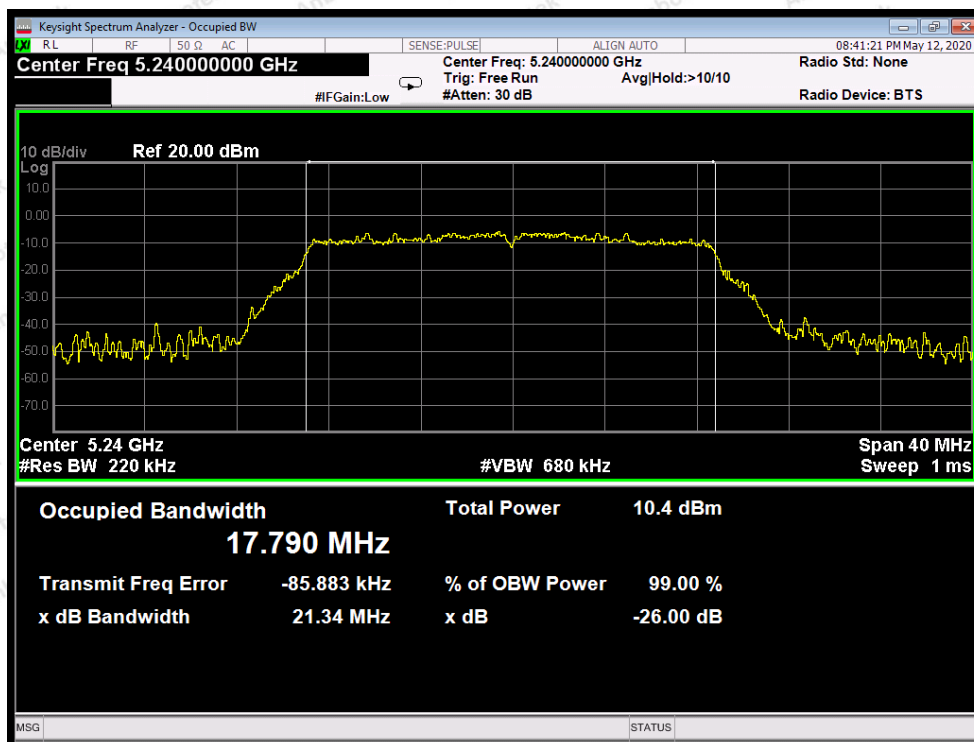


Test Mode: 802.11ac20---High

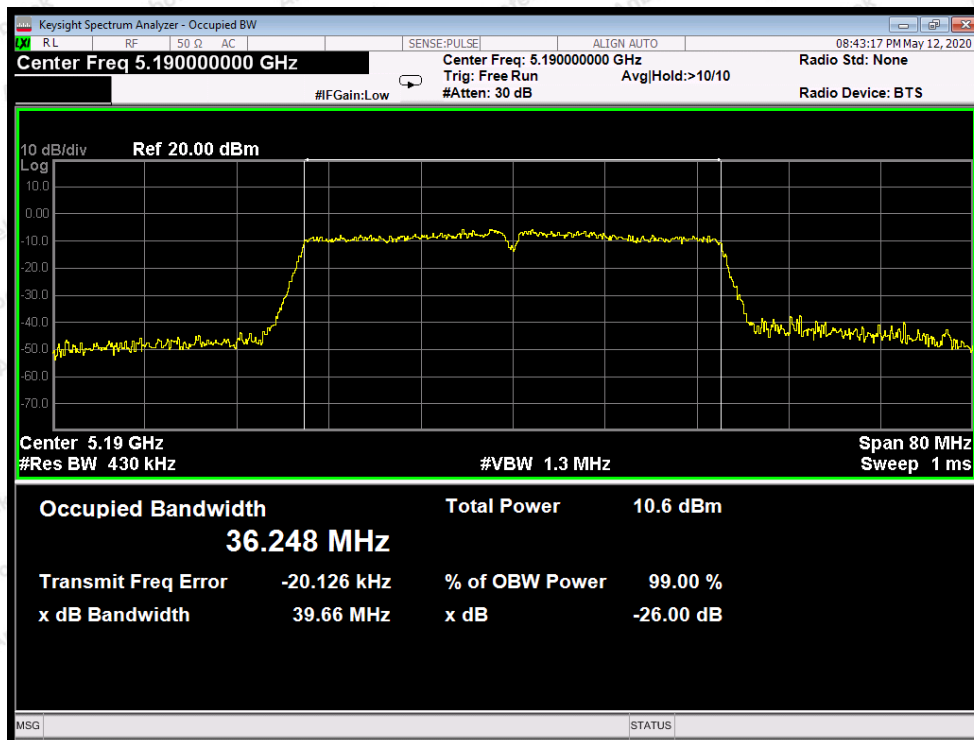

Test Mode: 802.11n40---Low

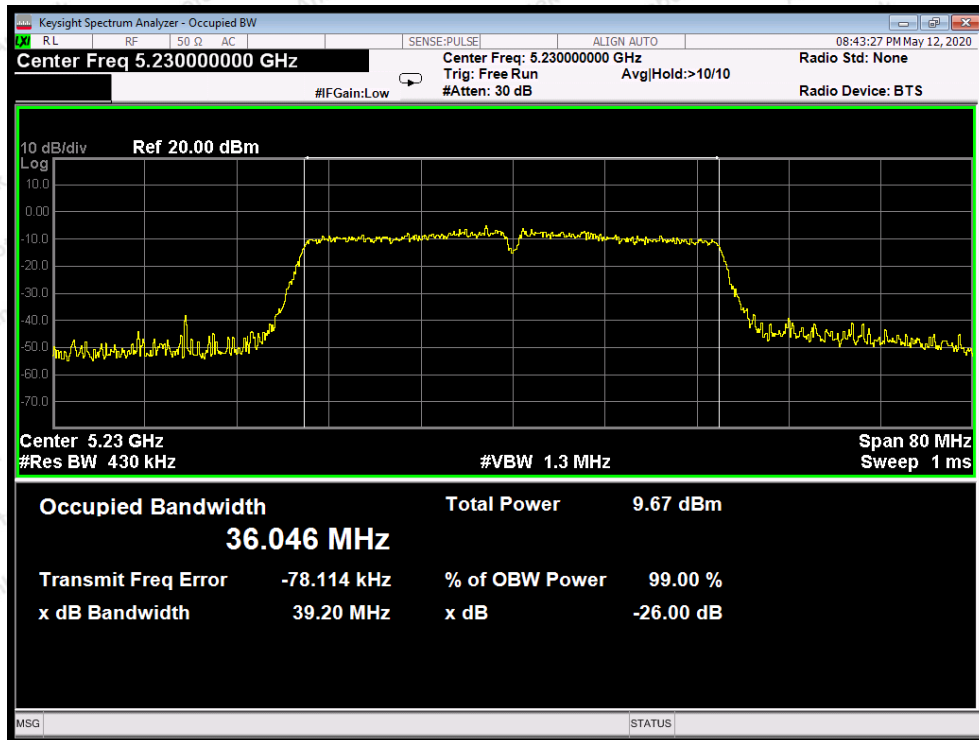


Test Mode: 802.11n40---High

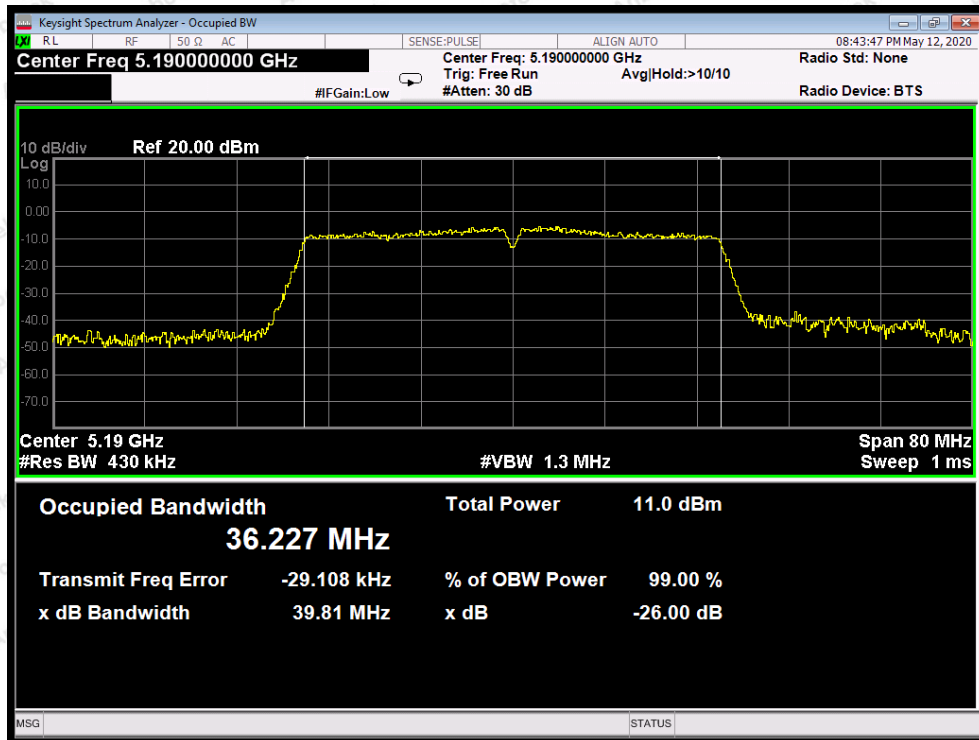


Test Mode: 802.11ac40---Low





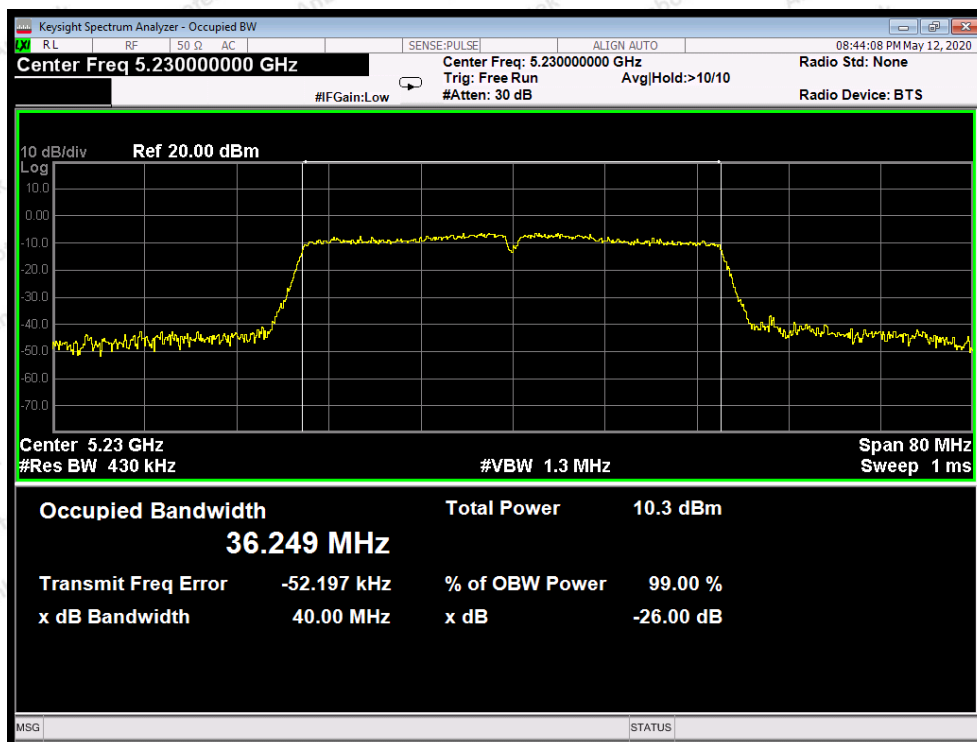

Test Mode: 802.11ac40---High

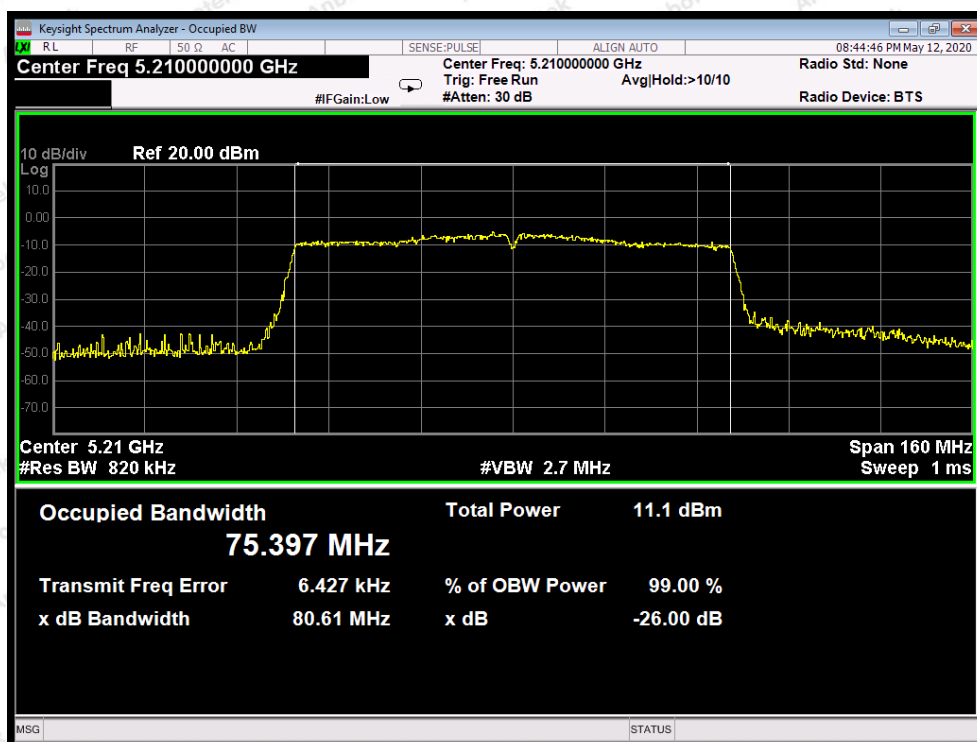


Test Mode: 802.11ac80

## 7. Power Spectral Density Test

### 7.1. Test Standard and Limit

|               |                                     |
|---------------|-------------------------------------|
| Test Standard | FCC Part15 C Section 15.407 (a) (1) |
| Test Limit    | 11 dBm/MHz                          |

### 7.2. Test Setup



### 7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;
3. Set VBW  $\geq$  3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

### 7.4. Test Data

Test Item : Power Spectral Density  
 Test Voltage : AC 120V, 60Hz for adapter  
 Test Result : PASS

Test Mode : CH Low ~ CH High  
 Temperature : 24℃  
 Humidity : 55%RH

**ANT A:**

| Test Mode  | Channel Frequency (MHz) | Final Power Spectral Density (dBm/MHz) | Correctional Limit (dBm/MHz) | Results |
|------------|-------------------------|----------------------------------------|------------------------------|---------|
| 802.11a    | 5180                    | 2.690                                  | 11                           | PASS    |
|            | 5200                    | 2.131                                  | 11                           | PASS    |
|            | 5240                    | 1.491                                  | 11                           | PASS    |
| 802.11n20  | 5180                    | 2.521                                  | 11                           | PASS    |
|            | 5200                    | 1.348                                  | 11                           | PASS    |
|            | 5240                    | 0.278                                  | 11                           | PASS    |
| 802.11ac20 | 5180                    | 2.595                                  | 11                           | PASS    |
|            | 5200                    | 1.742                                  | 11                           | PASS    |
|            | 5240                    | 0.864                                  | 11                           | PASS    |
| 802.11n40  | 5190                    | -1.287                                 | 11                           | PASS    |
|            | 5230                    | -2.287                                 | 11                           | PASS    |
| 802.11ac40 | 5190                    | -1.227                                 | 11                           | PASS    |
|            | 5230                    | -1.970                                 | 11                           | PASS    |
| 802.11ac80 | 5210                    | -3.936                                 | 11                           | PASS    |

**ANT B:**

| Test Mode | Channel Frequency (MHz) | Final Power Spectral Density (dBm/MHz) | Correctional Limit (dBm/MHz) | Results |
|-----------|-------------------------|----------------------------------------|------------------------------|---------|
| 802.11a   | 5180                    | 0.698                                  | 11                           | PASS    |
|           | 5200                    | 0.034                                  | 11                           | PASS    |
|           | 5240                    | -0.361                                 | 11                           | PASS    |
| 802.11n20 | 5180                    | -0.046                                 | 11                           | PASS    |
|           | 5200                    | -0.091                                 | 11                           | PASS    |
|           | 5240                    | -0.958                                 | 11                           | PASS    |




|            |      |        |    |      |
|------------|------|--------|----|------|
| 802.11ac20 | 5180 | 0.565  | 11 | PASS |
|            | 5200 | -0.509 | 11 | PASS |
|            | 5240 | -1.055 | 11 | PASS |
| 802.11n40  | 5190 | -3.219 | 11 | PASS |
|            | 5230 | -3.438 | 11 | PASS |
| 802.11ac40 | 5190 | -3.882 | 11 | PASS |
|            | 5230 | -4.354 | 11 | PASS |
| 802.11ac80 | 5210 | -6.802 | 11 | PASS |


**ANT A+B:**

| Test Mode  | Channel Frequency (MHz) | Final Power Spectral Density (dBm/MHz) | Correctional Limit (dBm/MHz) | Results |
|------------|-------------------------|----------------------------------------|------------------------------|---------|
| 802.11a    | 5180                    | 4.818                                  | 11                           | PASS    |
|            | 5200                    | 4.218                                  | 11                           | PASS    |
|            | 5240                    | 3.673                                  | 11                           | PASS    |
| 802.11n20  | 5180                    | 4.435                                  | 11                           | PASS    |
|            | 5200                    | 3.698                                  | 11                           | PASS    |
|            | 5240                    | 2.714                                  | 11                           | PASS    |
| 802.11ac20 | 5180                    | 4.708                                  | 11                           | PASS    |
|            | 5200                    | 3.771                                  | 11                           | PASS    |
|            | 5240                    | 3.020                                  | 11                           | PASS    |
| 802.11n40  | 5190                    | 0.864                                  | 11                           | PASS    |
|            | 5230                    | 0.186                                  | 11                           | PASS    |
| 802.11ac40 | 5190                    | 0.656                                  | 11                           | PASS    |
|            | 5230                    | 0.010                                  | 11                           | PASS    |
| 802.11ac80 | 5210                    | -2.126                                 | 11                           | PASS    |


ANT A

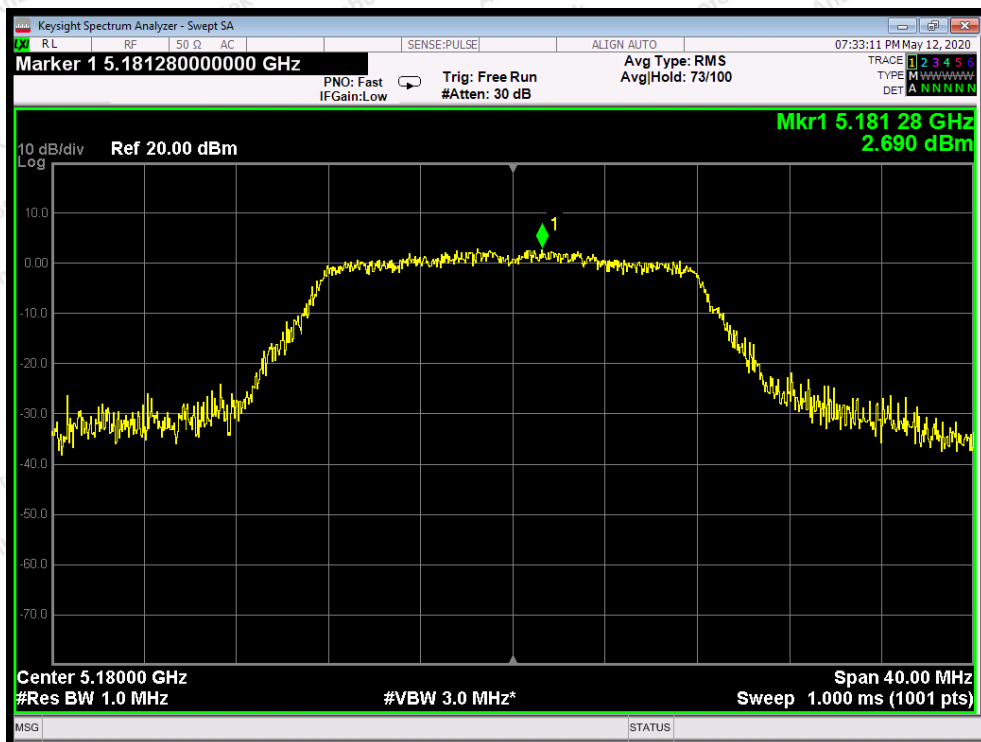


Test Mode: 802.11a--Low

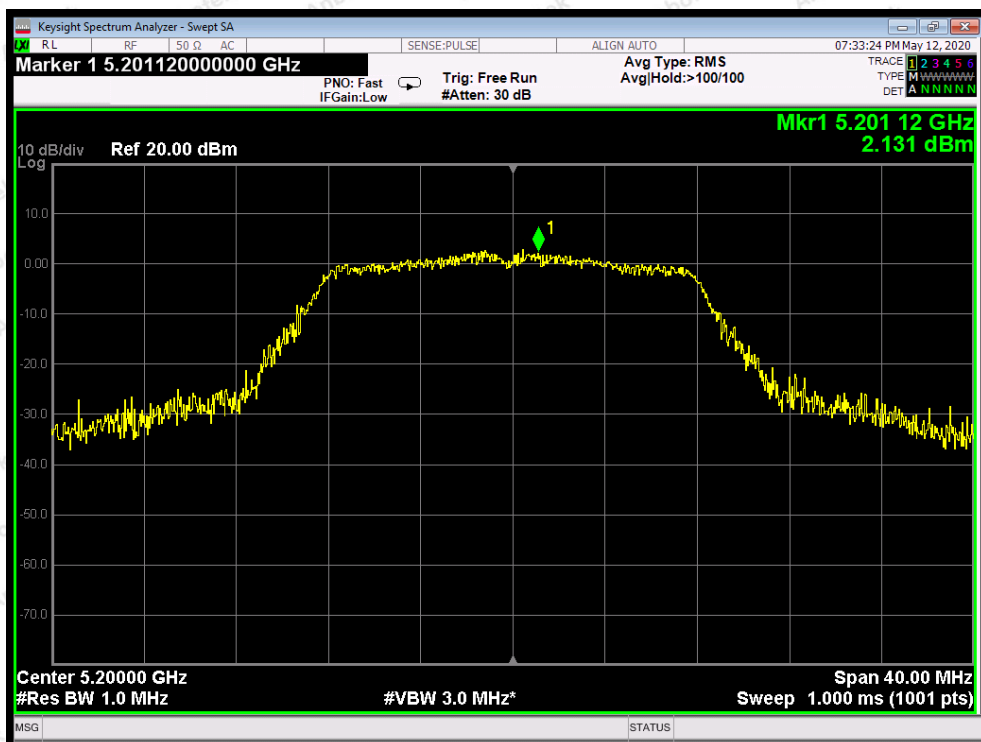

Test Mode: 802.11a---Middle

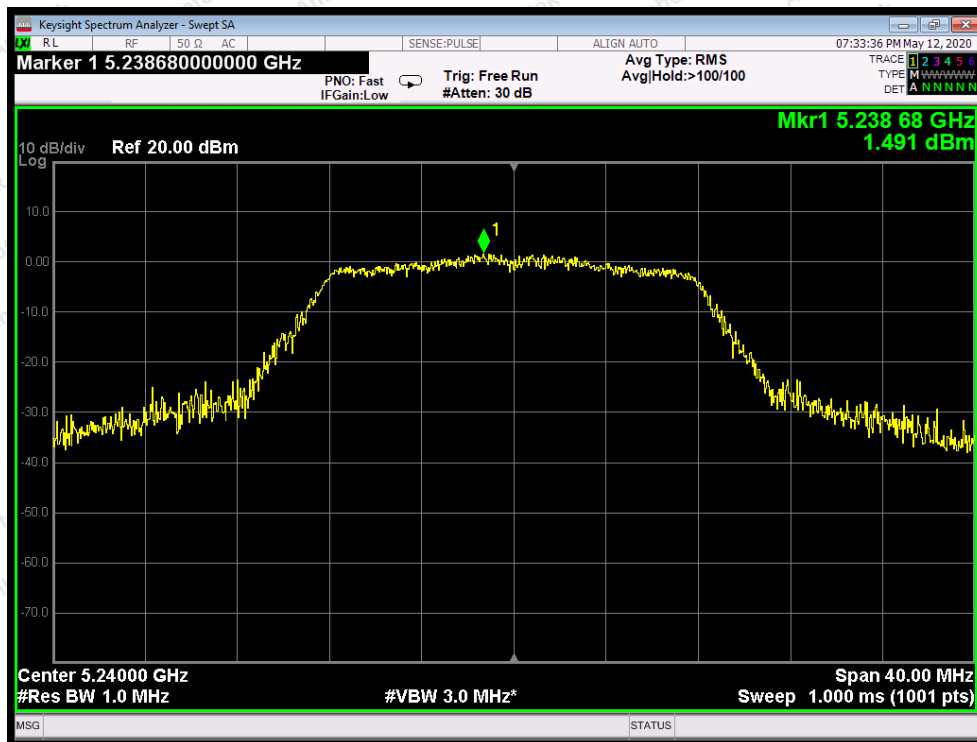


Test Mode: 802.11a---High

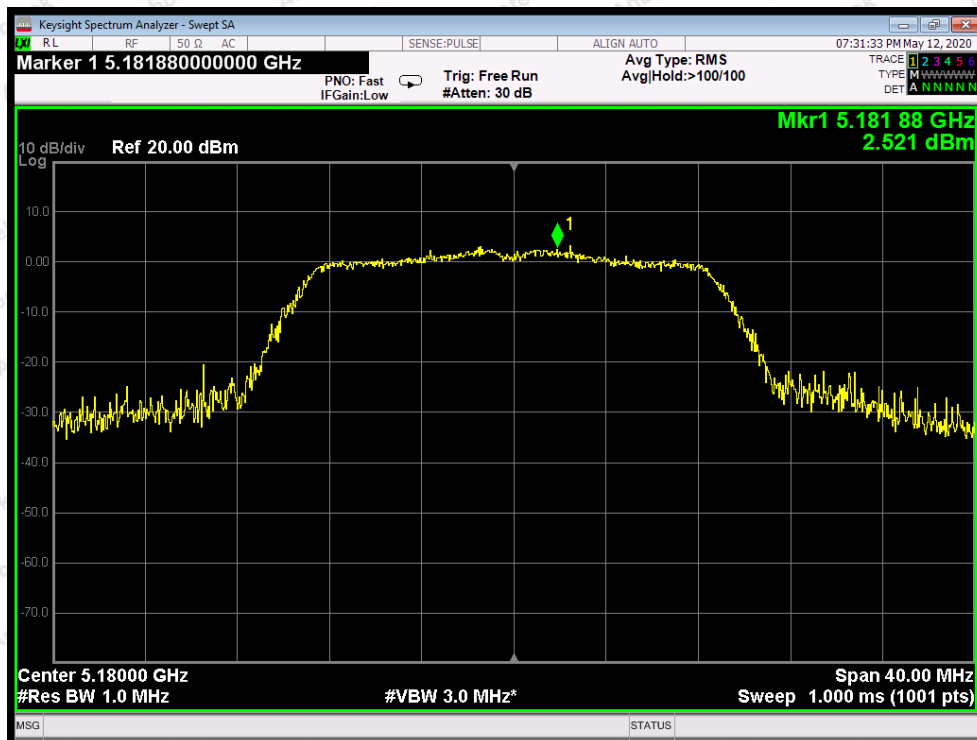


Test Mode: 802.11n20---Low




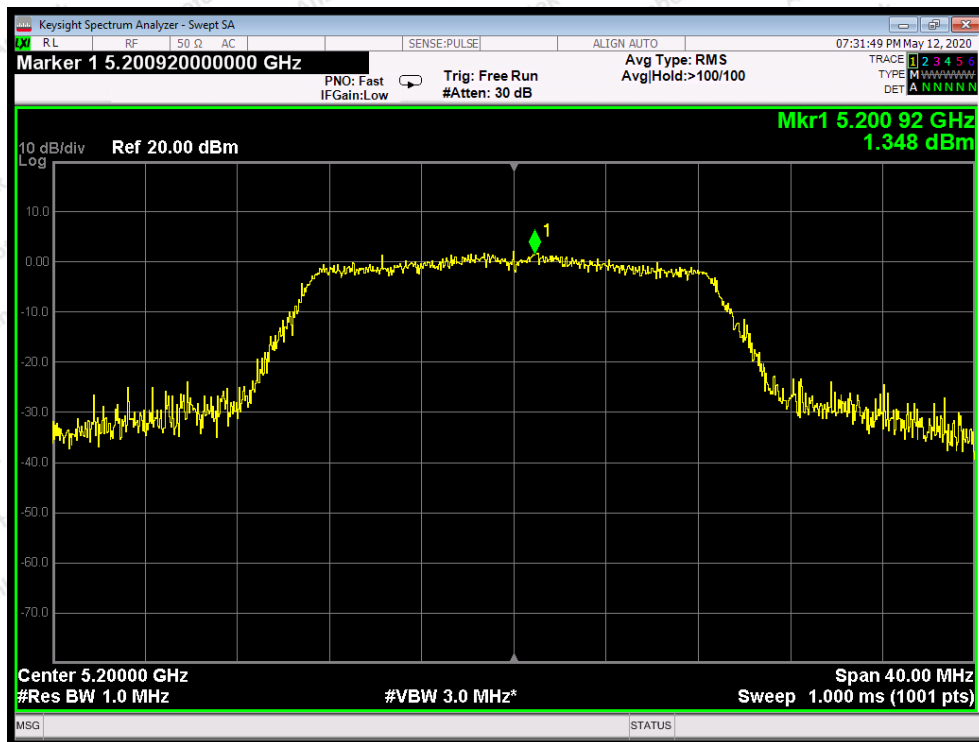


Test Mode: 802.11n20---Middle

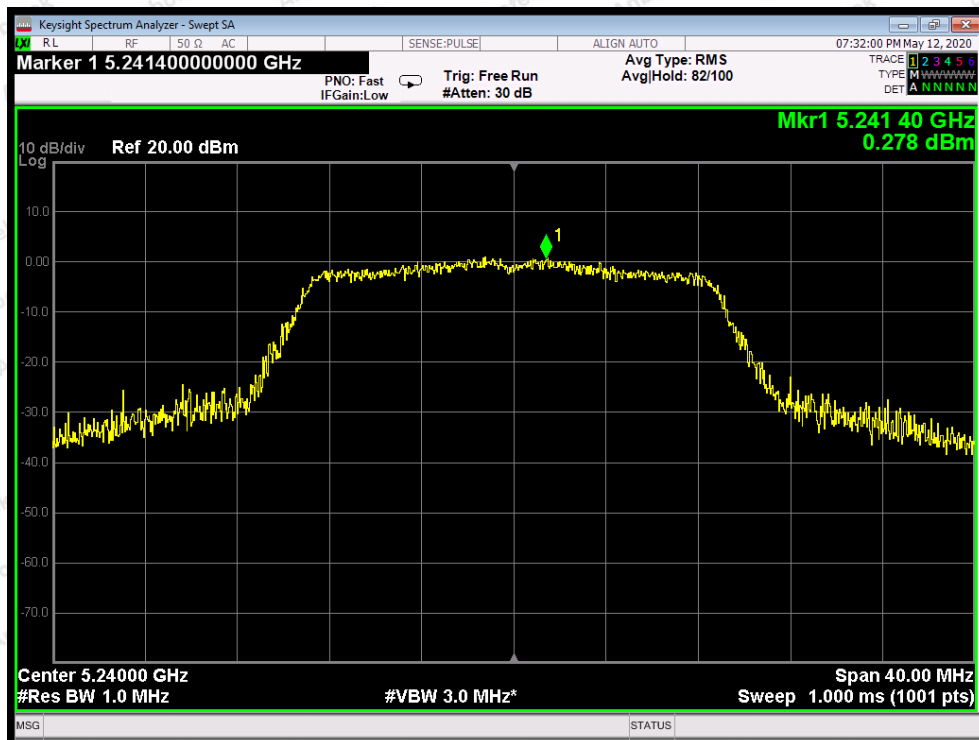


Test Mode: 802.11n20---High

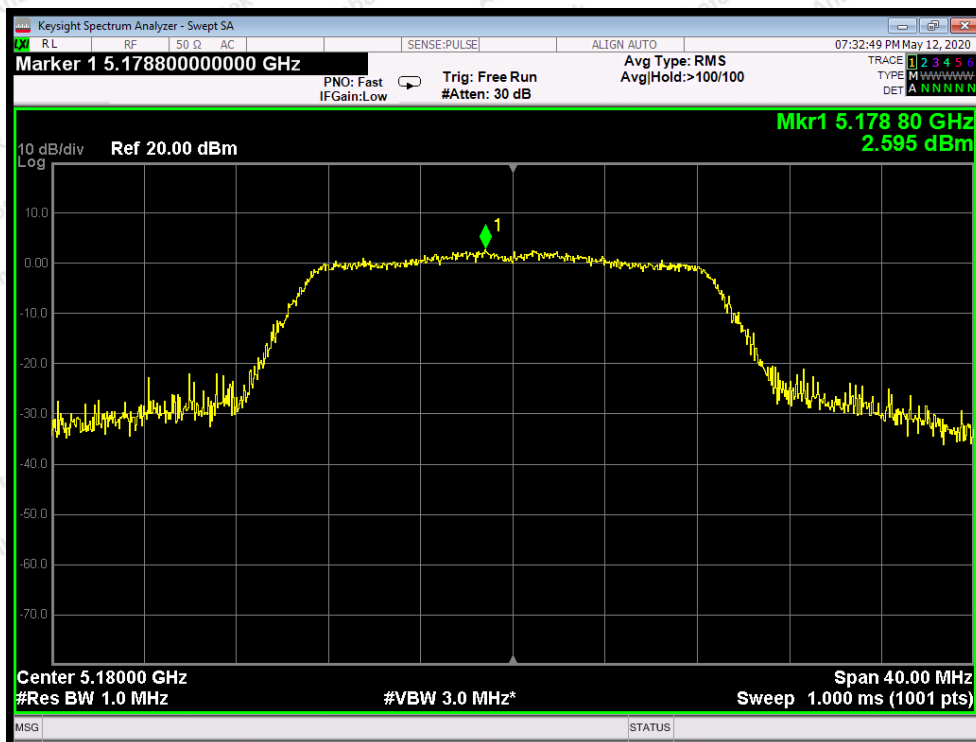


Test Mode: 802.11ac20--Low

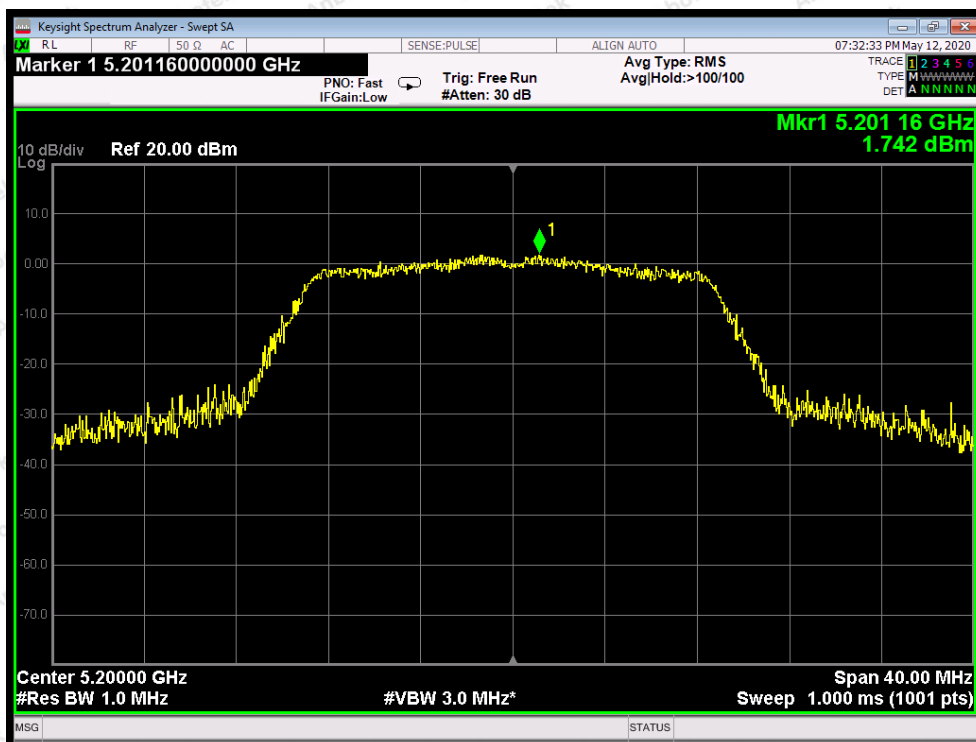

Test Mode: 802.11ac20---Middle

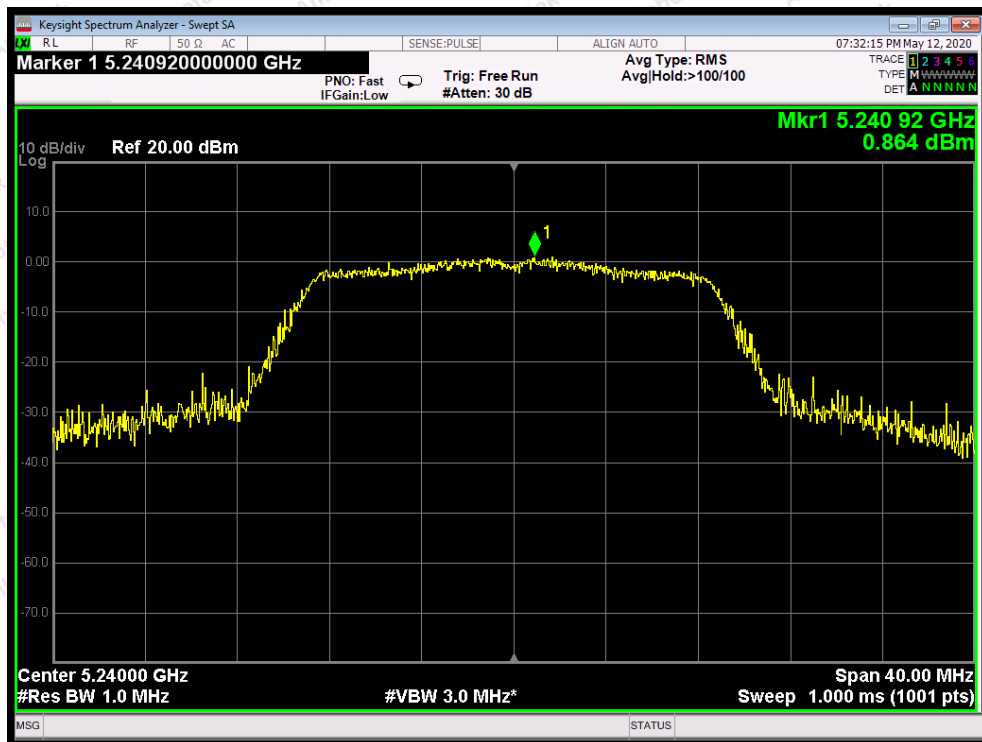


Test Mode: 802.11ac20---High

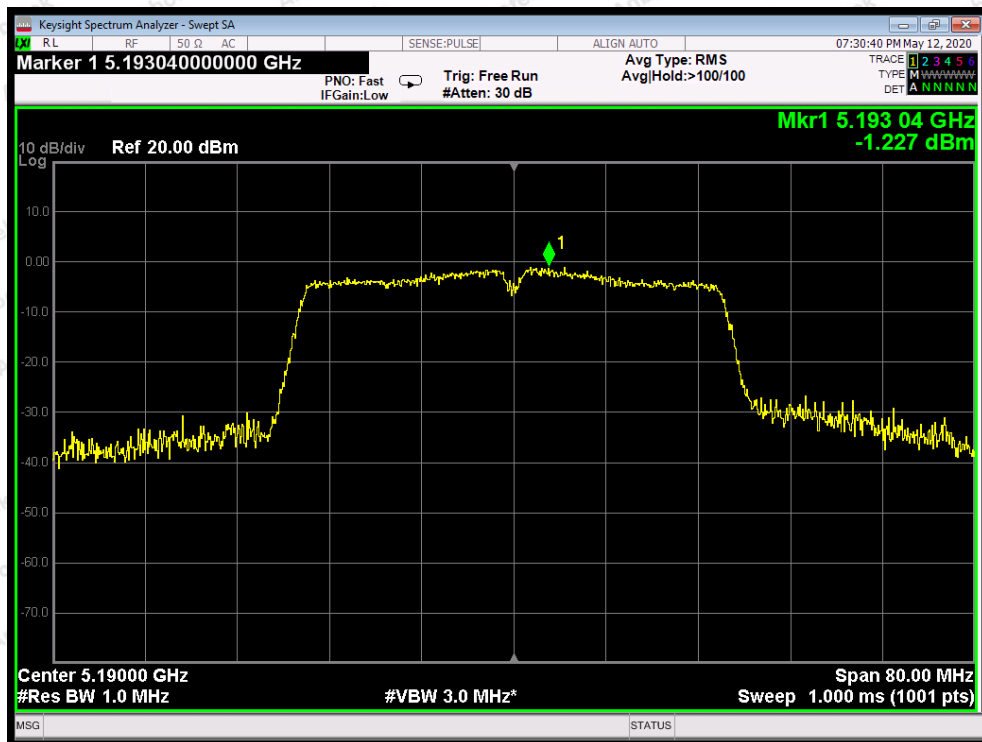

Test Mode: 802.11n40---Low



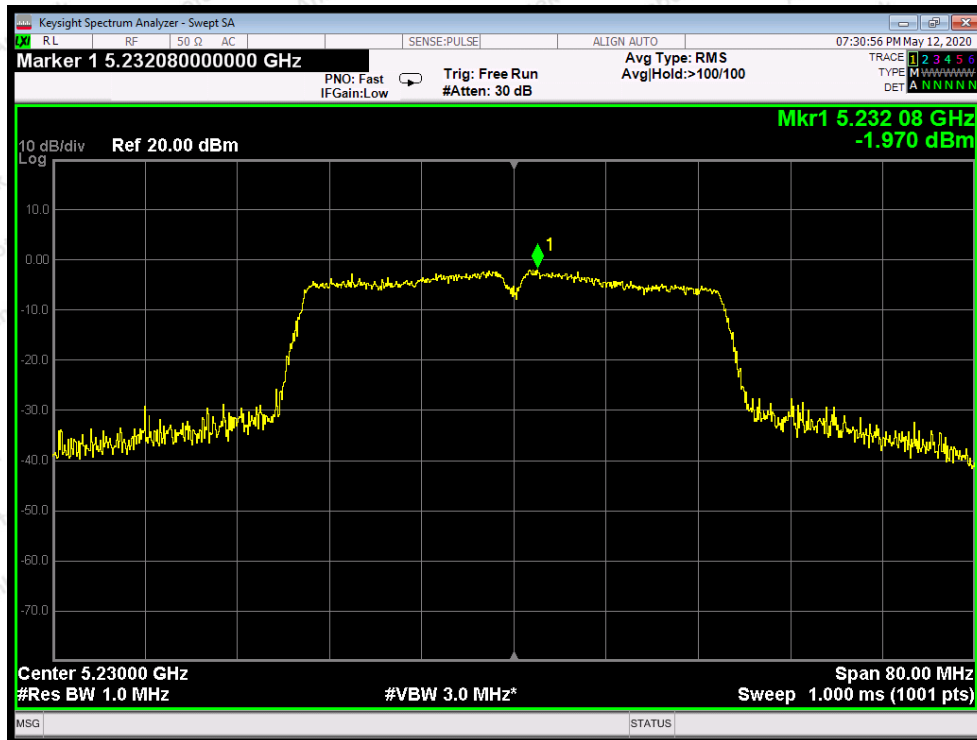

Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: [service@anbotech.com](mailto:service@anbotech.com)


Code:AB-RF-05-a




Hotline

400-003-0500

www.anbotek.com

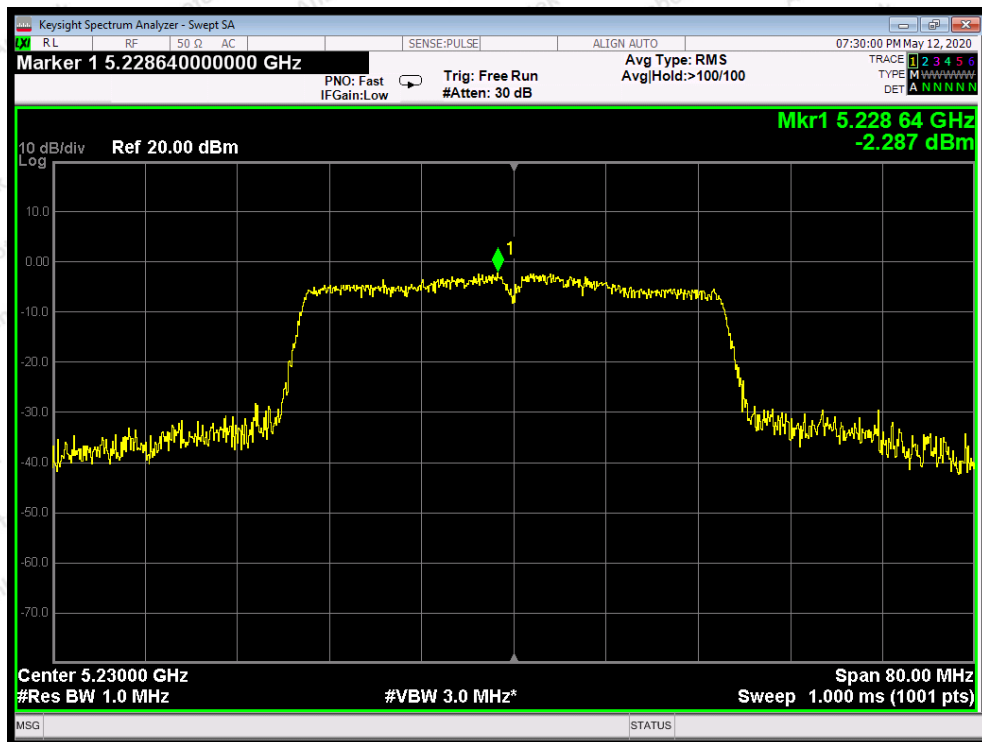


Test Mode: 802.11ac40---High

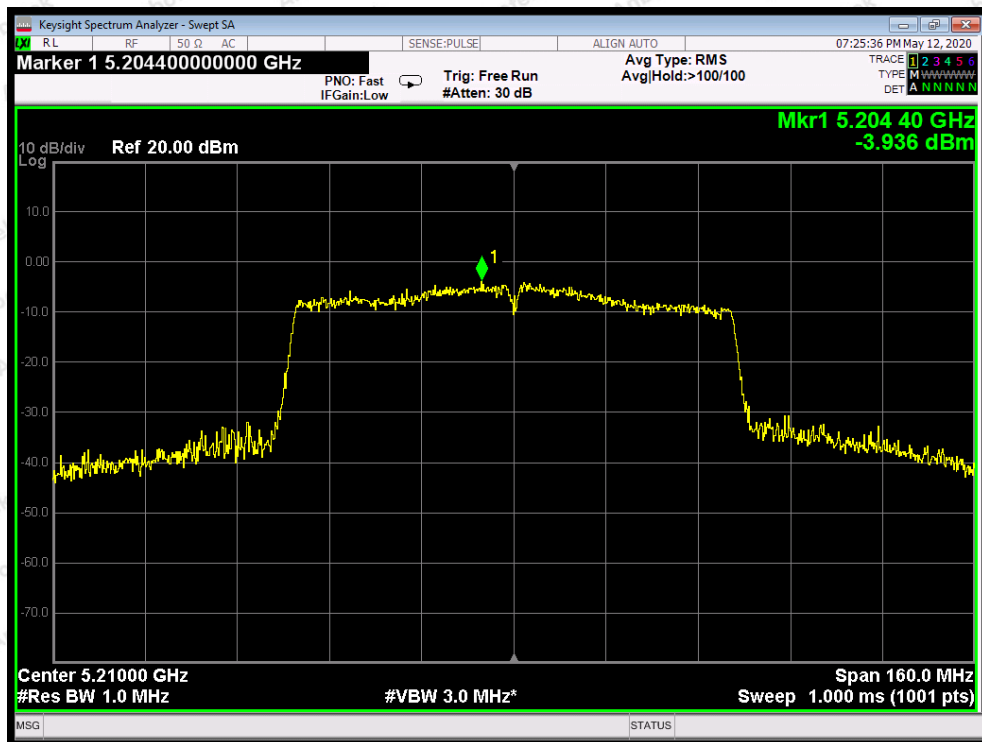


Test Mode: 802.11ac80

## ANT B

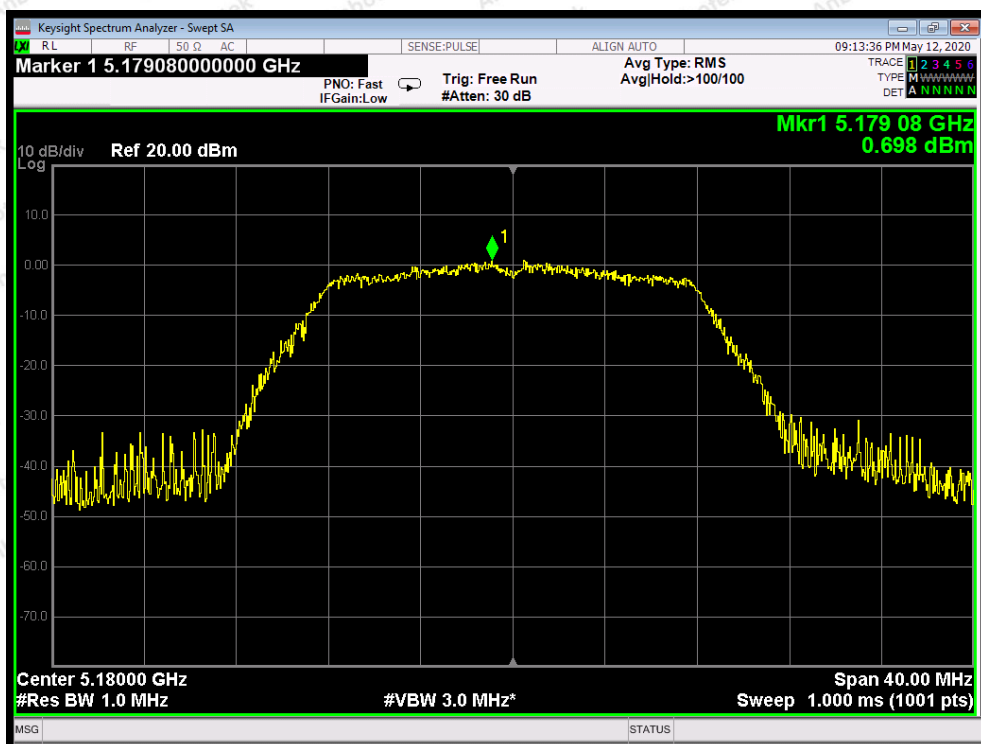


Test Mode: 802.11a--Low

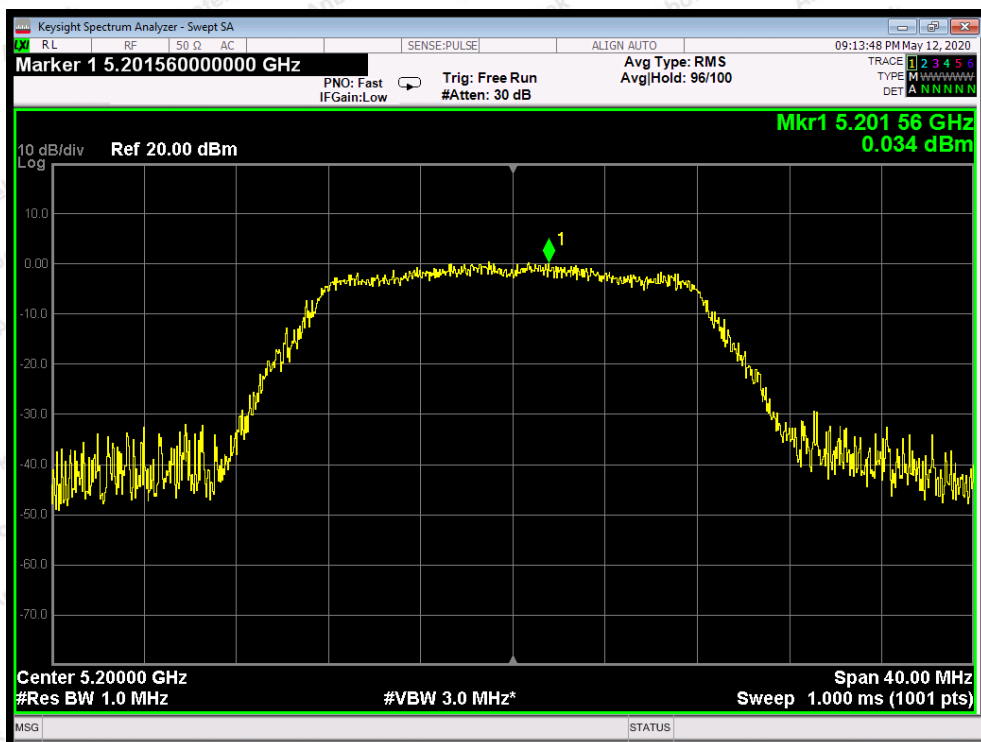


Test Mode: 802.11a---Middle




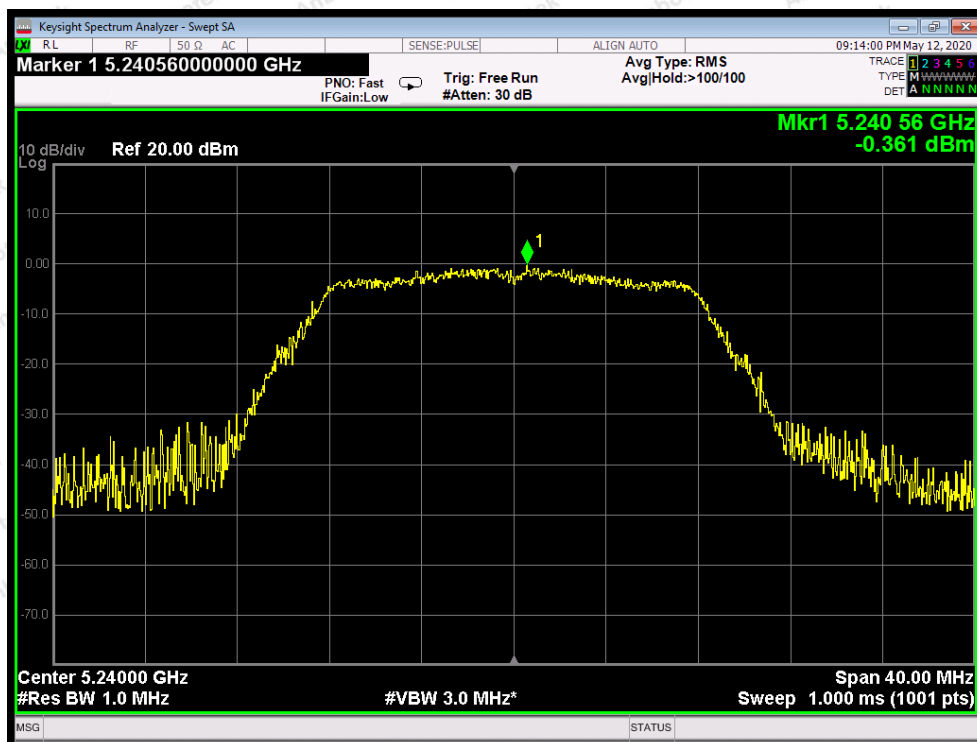


Test Mode: 802.11a---High

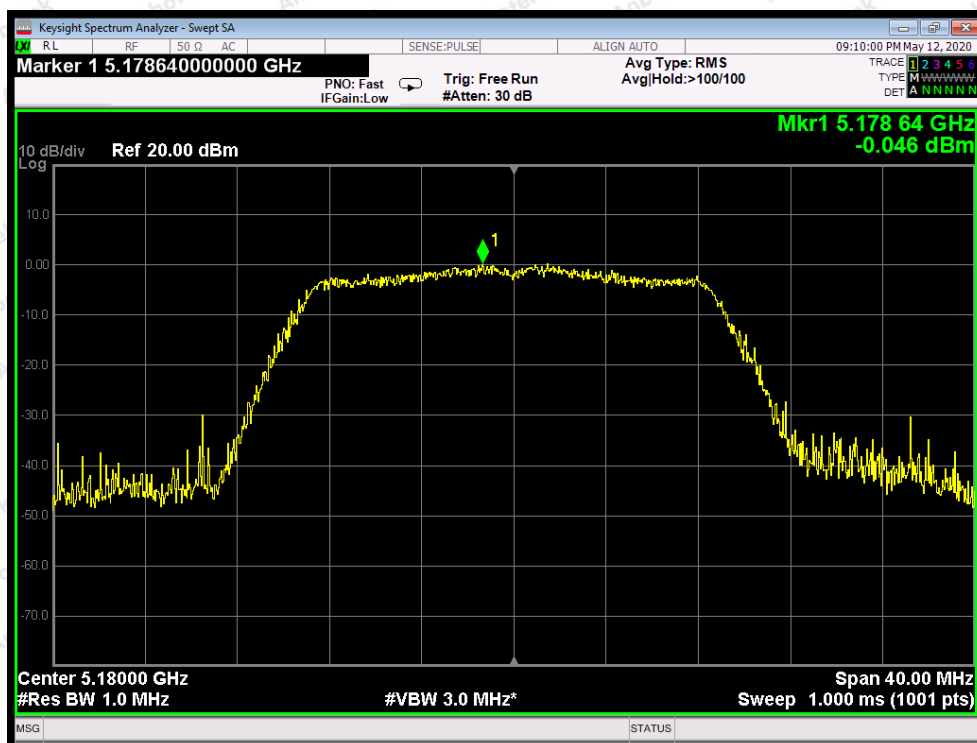


Test Mode: 802.11n20---Low

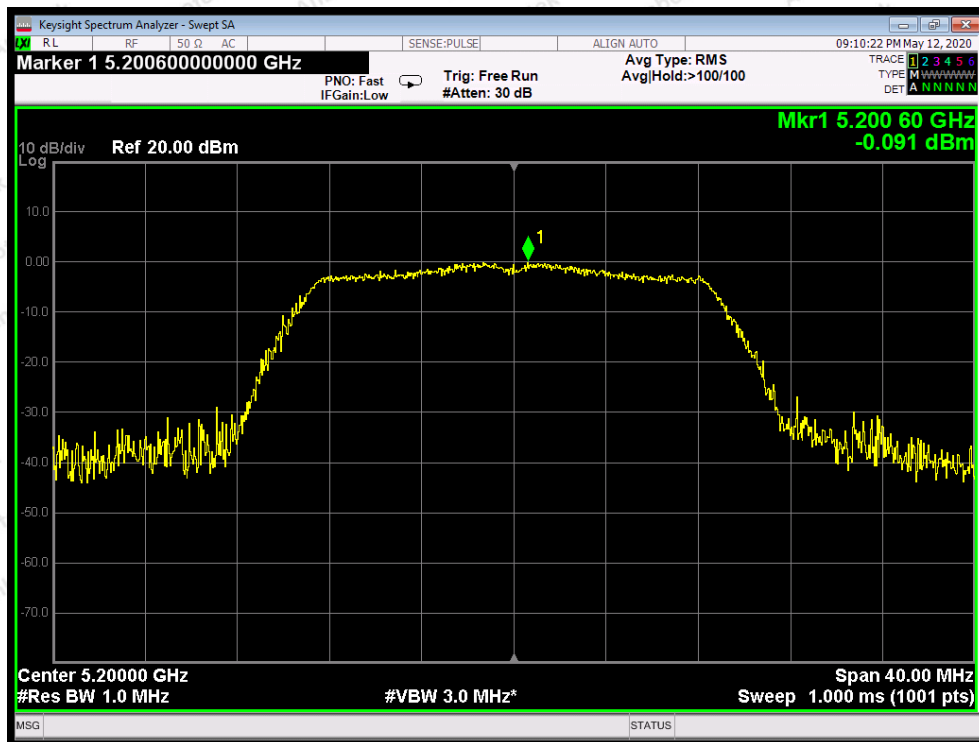


Test Mode: 802.11n20---Middle

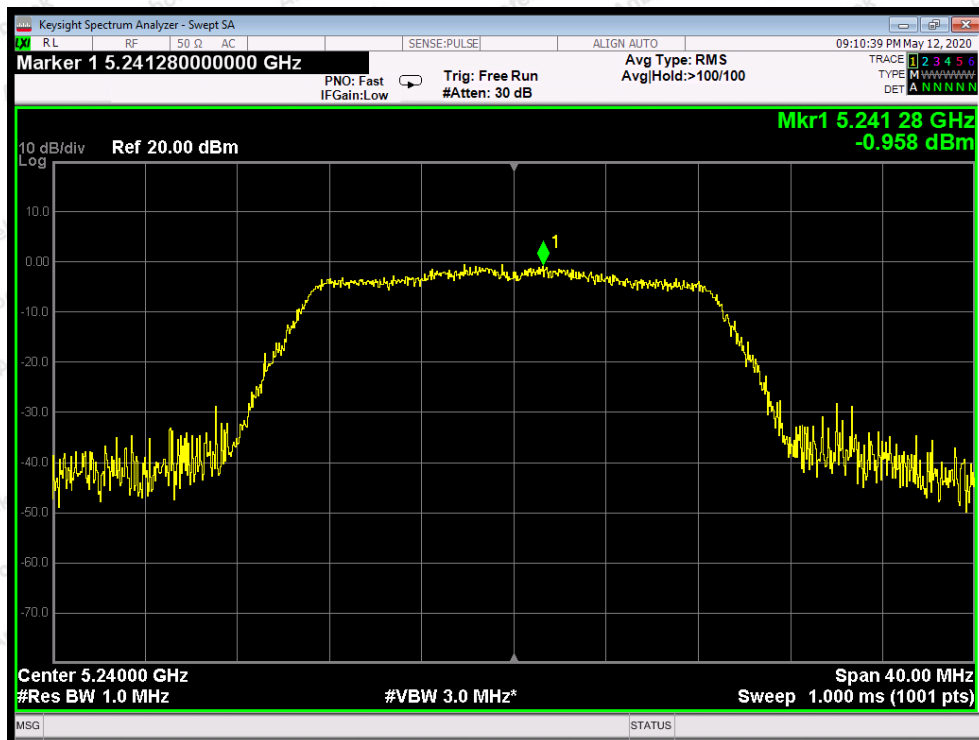

Test Mode: 802.11n20---High

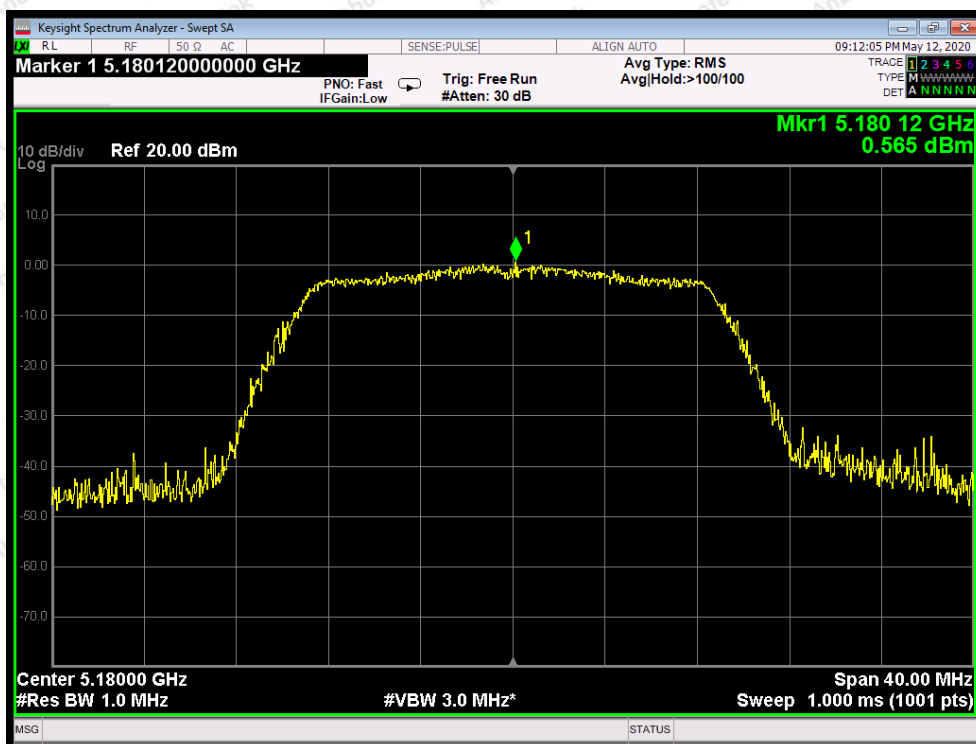

Test Mode: 802.11ac20--Low

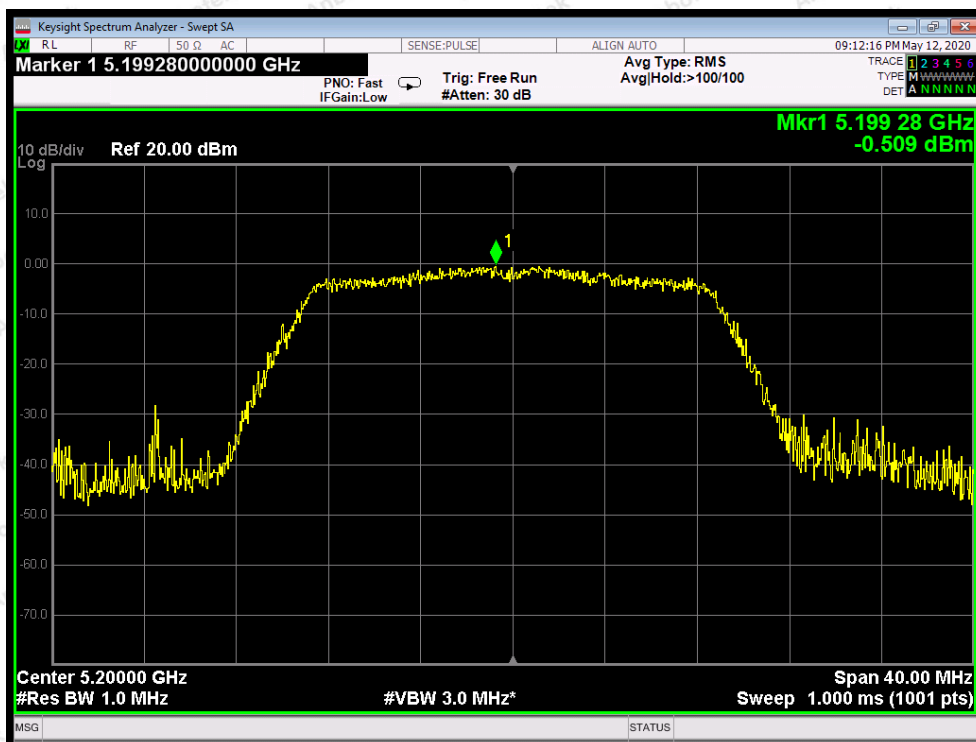


Test Mode: 802.11ac20---Middle







Test Mode: 802.11ac20---High

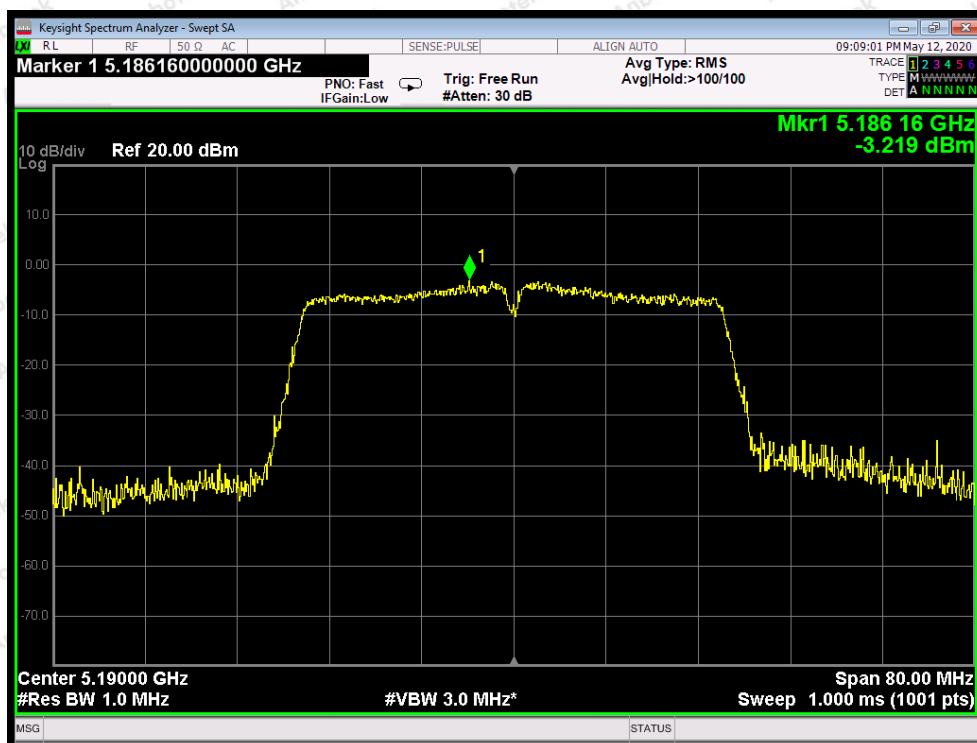


Test Mode: 802.11n40---Low

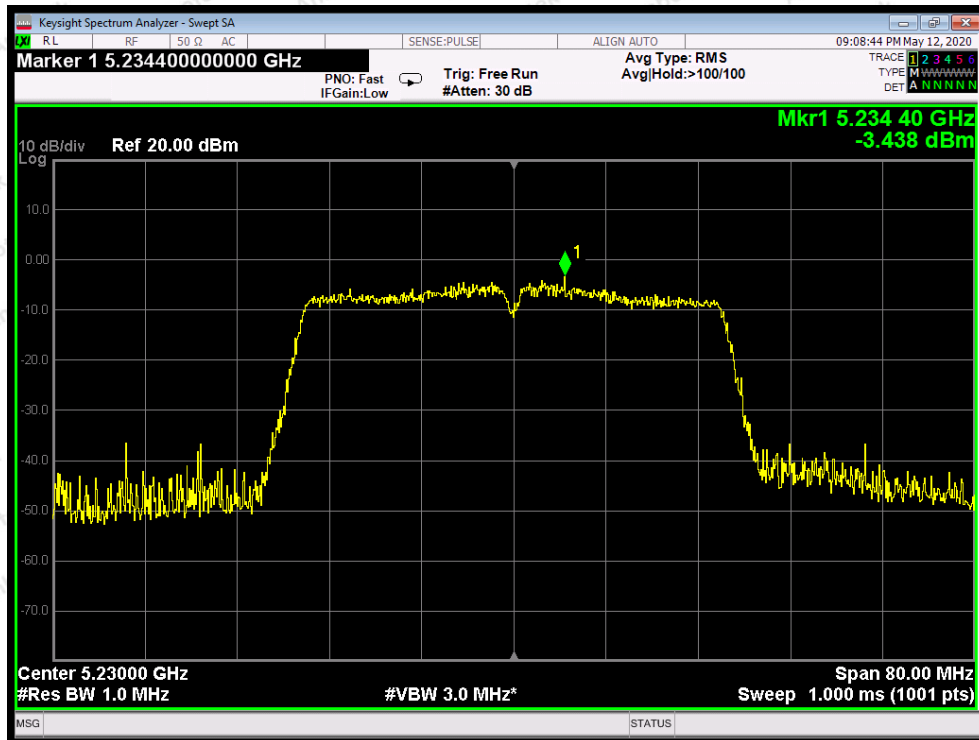


Test Mode: 802.11n40---High

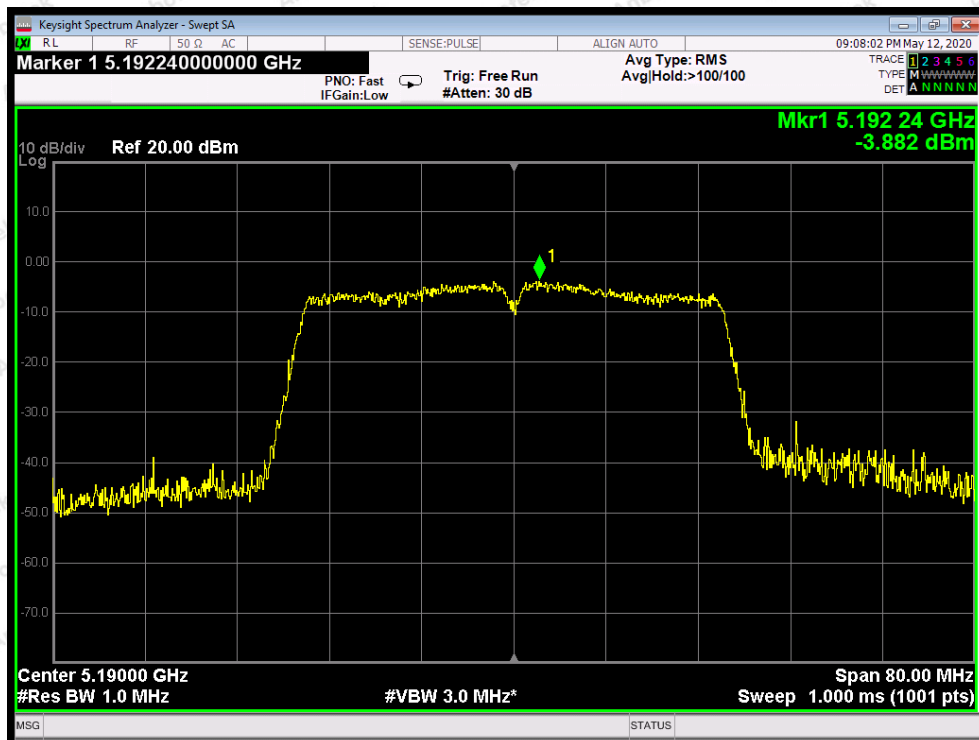

Test Mode: 802.11ac40---Low

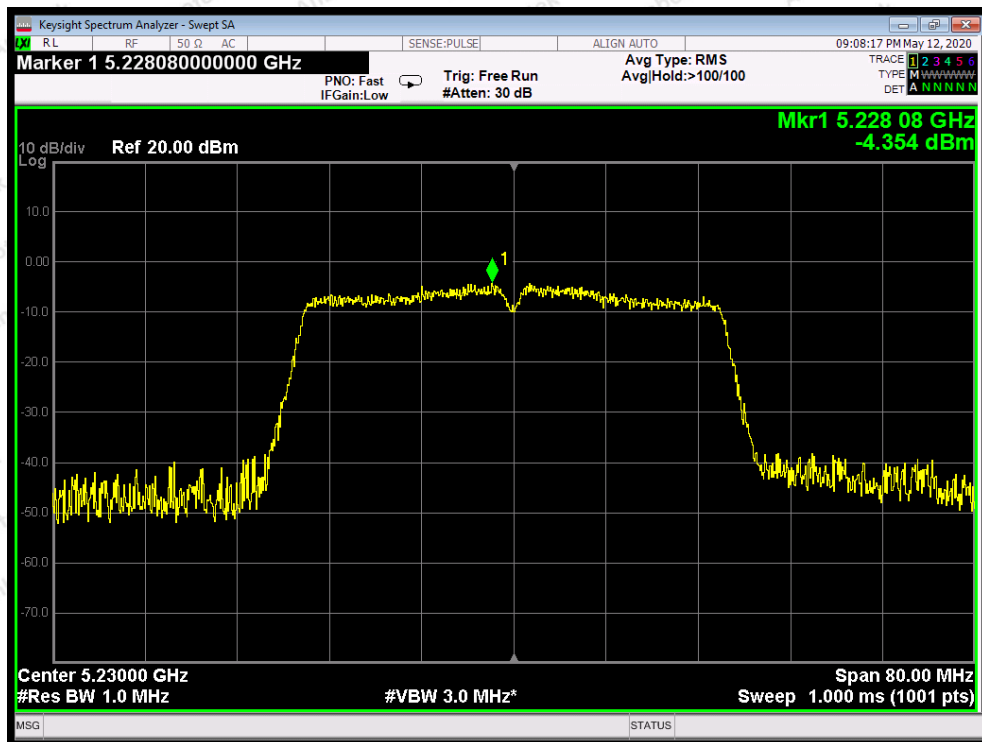

Test Mode: 802.11ac40---High

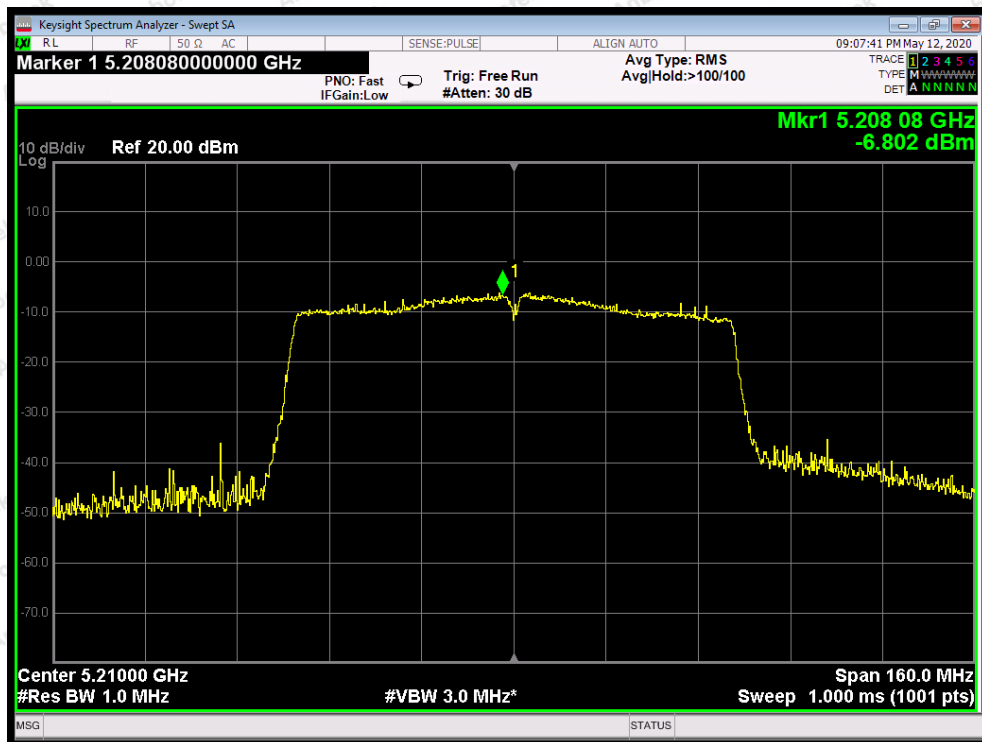

Test Mode: 802.11ac80




## 8. Antenna Requirement

### 8.1. Test Standard and Requirement

| Test Standard | FCC Part15 Section 15.203 /15.407                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Requirement   | <p>1) 15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.407 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p> |

## 8.2. Antenna Connected Construction

The antenna is a Columnar Antenna which permanently attached, and the best case gain of the antenna is 3 dBi. It complies with the standard requirement.

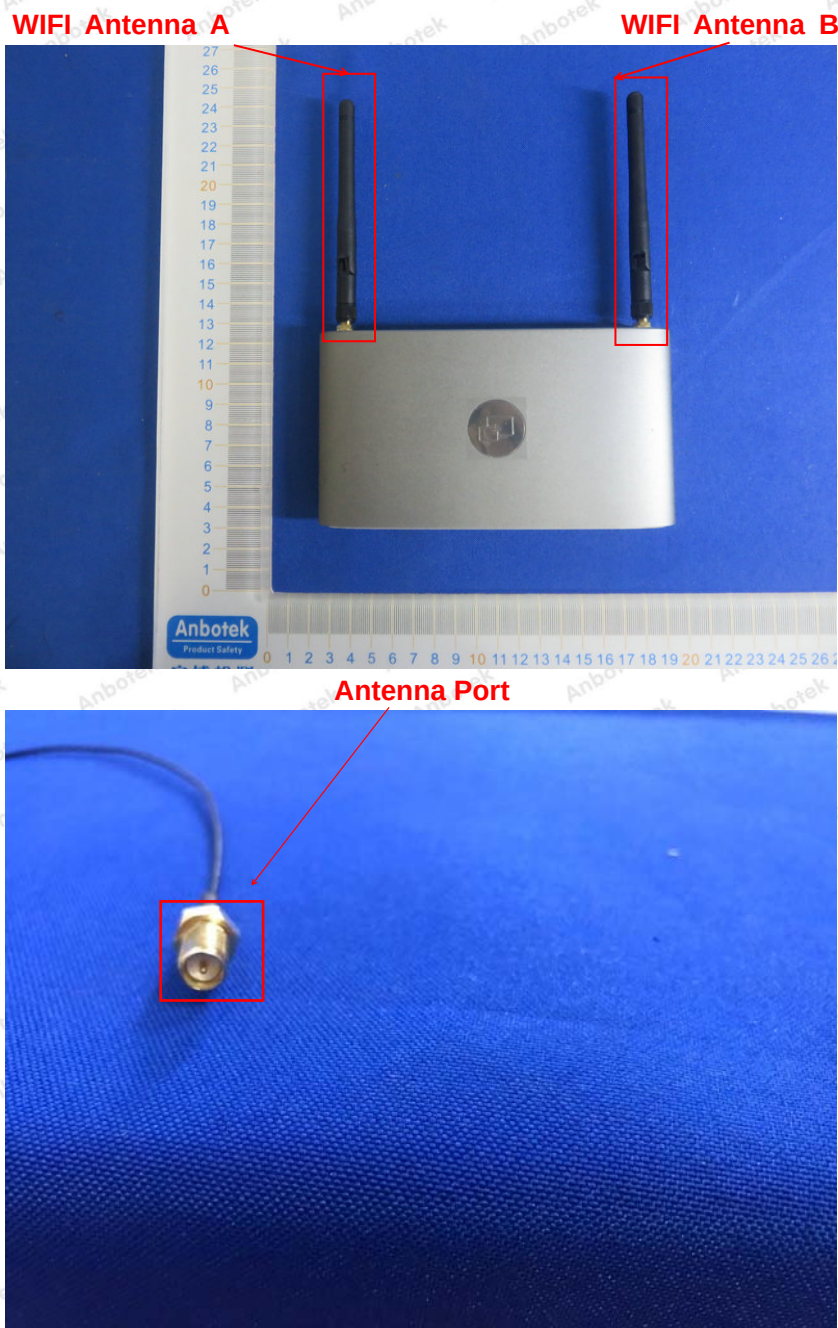



## 9. Frequency Stability

According to the manufacturer, under any normal operating conditions, the working frequency of the product is in the range of 5150-5250MHz.





## APPENDIX I -- PHOTOGRAPH

Reference to the test report 18220WC00044501.

----- End of Report -----

**Shenzhen Anbotech Compliance Laboratory Limited**

**Code:AB-RF-05-a**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com