

Report No.: SZEM150500298802

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 158

FCC REPORT

Application No: SZEM1505002988CR

Applicant: TEAC Corporation **Manufacturer:** TEAC Corporation

Factory: Dongguan TEAC Electronics Co., Ltd.

Product Name: USB DAC / NETWORK PLAYER

Model No.(EUT): NT-503
Trade Mark: TEAC

FCC ID: XEG-NT503

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2015-06-03

Date of Test: 2015-06-29 to 2015-07-10

Date of Issue: 2015-08-03

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150500298802

Page: 2 of 158

2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2015-08-03		Original		

Authorized for issue by:		
Tested By	Eric Fu	2015-07-10
	(Eric Fu) /Project Engineer	Date
Prepared By	Jarole Chen	2015-08-03
	(Jade Chen) /Clerk	Date
Checked By	Owen Zhou	2015-08-03
	(Owen Zhou) /Reviewer	Date



Report No.: SZEM150500298802

Page: 3 of 158

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS



Report No.: SZEM150500298802

Page: 4 of 158

4 Contents

			Page
1	CO	VER PAGE	1
2	۷E	RSION	2
3	TE:	ST SUMMARY	3
4	CO	ONTENTS	4
5		NERAL INFORMATION	
•	5.1	CLIENT INFORMATION	_
	5.1	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8 5.9	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.10	EQUIPMENT LIST	
6		ST RESULTS AND MEASUREMENT DATA	
O			
	6.1	ANTENNA REQUIREMENT	
	6.2 6.3	CONDUCTED EMISSIONS	
	6.4	20DB OCCUPY BANDWIDTH	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	41
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.9 6.10	SPURIOUS RF CONDUCTED EMISSIONS	
	6.11	RADIATED SPURIOUS EMISSION	
	•	1.1 Duty cycle	
	6.1	1.2 Radiated Emission below 1GHz	
	6.1	1.3 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	151
7	PH	OTOGRAPHS - EUT TEST SETUP	157
	7.1	CONDUCTED EMISSION	157
	7.2	RADIATED EMISSION	157
	7.3	RADIATED SPURIOUS EMISSION	158
8	PH	OTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	158



Report No.: SZEM150500298802

Page: 5 of 158

5 General Information

5.1 Client Information

Applicant:	TEAC Corporation	
Address of Applicant:	1-47 Ochiai, Tama-shi, Tokyo, Japan	
Manufacturer:	TEAC Corporation	
Address of Manufacturer:	1-47 Ochiai, Tama-shi, Tokyo, Japan	
Factory:	Dongguan TEAC Electronics Co., Ltd.	
Address of Factory:	Shang-sha, Chang-an District, Dongguan City, Guangdong, P.R.China	

5.2 General Description of EUT

•	
Product Name:	USB DAC / NETWORK PLAYER
Model No.:	NT-503
Trade Mark:	TEAC
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	Class II (manufacturer declare)
Test Software of EUT:	Blue test 3
Antenna Type and Gain	Type :Integral
	Gain: 2.4dBi
Power Supply:	AC 120V 60Hz



Report No.: SZEM150500298802

Page: 6 of 158

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The Lowest channel	2402MHz	
The Middle channel	2441MHz	
The Highest channel	2480MHz	



Report No.: SZEM150500298802

Page: 7 of 158

5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	53 % RH			
Atmospheric Pressure:	1005 mbar			

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM150500298802

Page: 8 of 158

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.





Report No.: SZEM150500298802

Page: 9 of 158

5.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2016-05-13		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2016-05-13		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2016-05-13		
8	Coaxial Cable	SGS	N/A	SEL0025	2016-05-13		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13		



Report No.: SZEM150500298802

Page: 10 of 158

	RE in Chamber					
	RE In Chamber			Inventory	Cal.Due date	
Item	Test Equipment	Manufacturer	Model No.	No.	(yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13	
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24	
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-13	
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-13	
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-13	
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-13	
13	Band filter	Amindeon	82346	SEL0094	2016-05-13	
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13	



Report No.: SZEM150500298802

Page: 11 of 158

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM150500298802

Page: 12 of 158

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

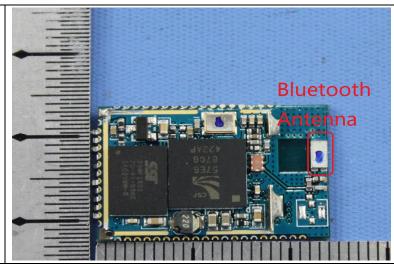

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.4dBi.



Report No.: SZEM150500298802

Page: 13 of 158


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Francisco (MIII-)	Limit (d	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		•
Test Procedure:	The mains terminal disturb room.	oance voltage test was	s conducted in a shie	elded
	1) The mains terminal disturbance voltage test was conducted in a s		is a 50Ω/50μH + 5Ω line is the EUT were do not the ground for the unit being do not the unit being do not the LISN was not do not the LISN was not do not the LISN was not do not the LISN and the boundary of the plane for LISNs has distance was EUT. All other units do not the LISN are positions of	ne was ar ne he of 2.



Report No.: SZEM150500298802

Page: 14 of 158

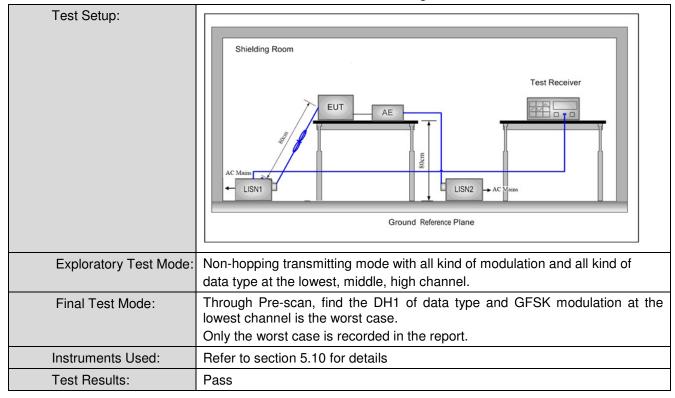



Report No.: SZEM150500298802


Page: 15 of 158

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

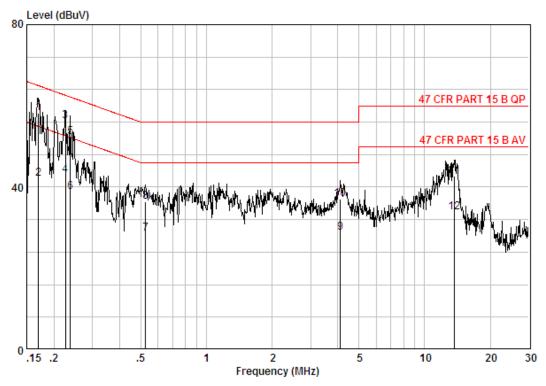

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 2988CR

Test Mode


		Frea	Cable Loss	LISN Factor	Read Level		Limit Line	Over Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBu∀	dB	
1	a	0.16944	0.02	9.82	48.40	58.24	64.99	-6.74	OP
2	G	0.16944	0.02						Average
3	@	0.22556	0.02			56.15			_
4		0.22556	0.02	9.83	33.00	42.85	52.61	-9.76	Average
5		0.23784	0.02	9.84	42.50	52.35	62.17	-9.82	QP
6		0.23784	0.02	9.84	29.00	38.85	52.17	-13.32	Average
7		0.52654	0.01	9.86	18.60	28.48	46.00	-17.52	Average
8		0.52654	0.01	9.86	26.63	36.50	56.00	-19.50	QP
9		4.114	0.01	10.08	18.61	28.71	46.00	-17.29	Average
10		4.114	0.01	10.08	26.89	36.99	56.00	-19.01	QP
11		13.623	0.01	10.16	32.46	42.63	60.00	-17.37	QP
12		13.623	0.01	10.16	23.55	33.72	50.00	-16.28	Average



Report No.: SZEM150500298802

Page: 16 of 158

Neutral line:

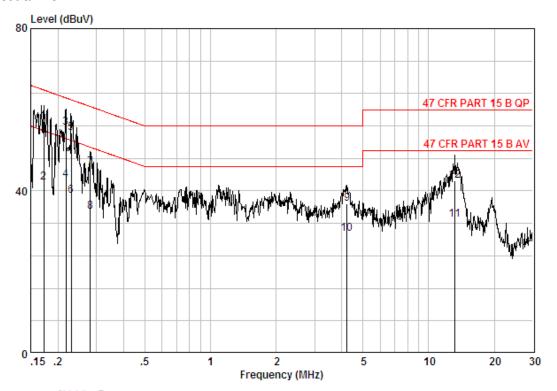

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 2988CR

Test Mode :

		_	Cable	LISN	Read		Limit	Over	_
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.17215	0.02	9.81	47.20	57.03	64.86	-7.82	QP
2		0.17215	0.02	9.81	32.20	42.03	54.86	-12.82	Average
3	@	0.21735	0.02	9.85	45.80	55.67	62.92	-7.25	QP
4		0.21735	0.02	9.85	32.90	42.77	52.92	-10.15	Average
5		0.23040	0.02	9.85	44.40	54.27	62.44	-8.16	QP
6		0.23040	0.02	9.85	29.00	38.87	52.44	-13.56	Average
7		0.28178	0.01	9.86	35.91	45.78	60.76	-14.98	QP
8		0.28178	0.01	9.86	24.90	34.77	50.76	-15.99	Average
9		4.224	0.01	10.13	26.71	36.85	56.00	-19.15	QP
10		4.224	0.01	10.13	19.26	29.41	46.00	-16.59	Average
11		13.197	0.01	10.19	22.70	32.90	50.00	-17.10	Average
12		13.197	0.01	10.19	32.40	42.60	60.00	-17.40	QP

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150500298802

Page: 17 of 158

6.3 Conducted Peak Output Power

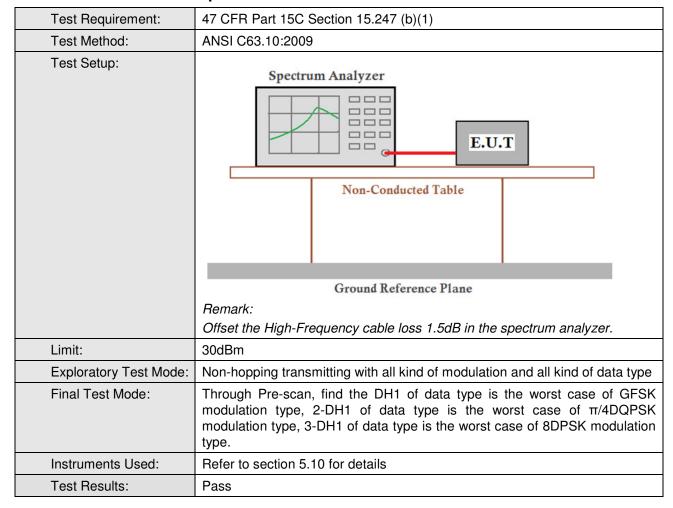



Report No.: SZEM150500298802

Page: 18 of 158

Measurement Data

GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	1.01	30.00	Pass		
Middle	0.18	30.00	Pass		
Highest	0.99	30.00	Pass		
	π/4DQPSK m	node			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-0.22	30.00	Pass		
Middle	-1.29	30.00	Pass		
Highest	-1.54	30.00	Pass		
	8DPSK mod	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	0.05	30.00	Pass		
Middle	-0.88	30.00	Pass		
Highest	-1.24	30.00	Pass		






Report No.: SZEM150500298802


Page: 19 of 158

Test plot as follows:

Test mode: GFSK Test channel: Lowest

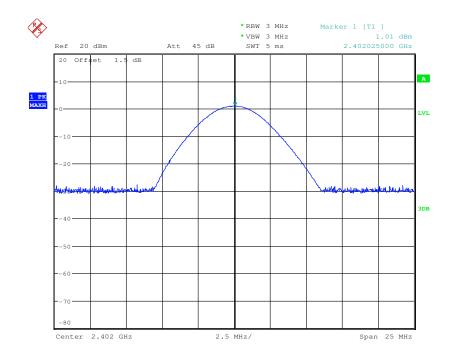



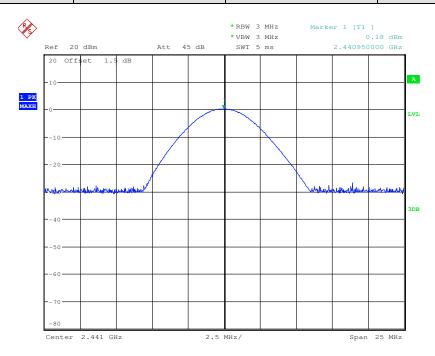





Report No.: SZEM150500298802

Page: 20 of 158

Test mode: GFSK Test channel: Highest

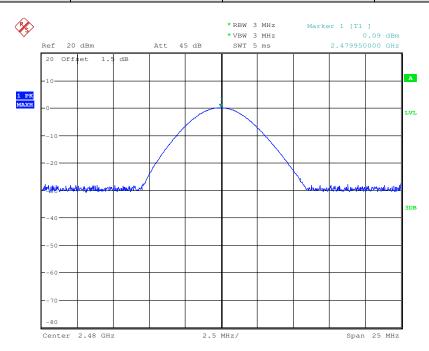



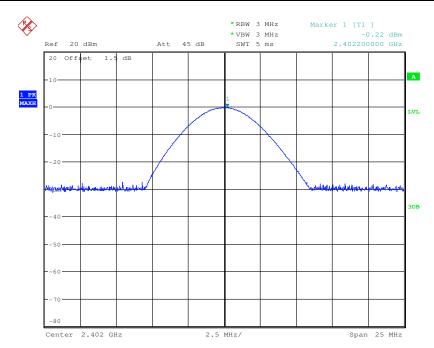





Report No.: SZEM150500298802

Page: 21 of 158

Test mode: π/4DQPSK Test channel: Middle

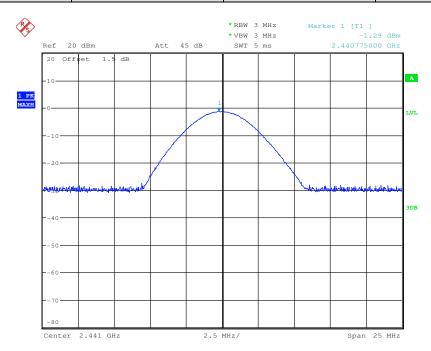



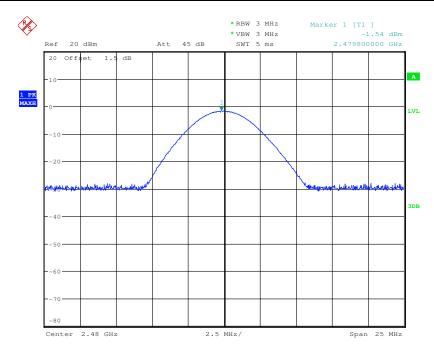





Report No.: SZEM150500298802

Page: 22 of 158

Test mode: 8DPSK Test channel: Lowest

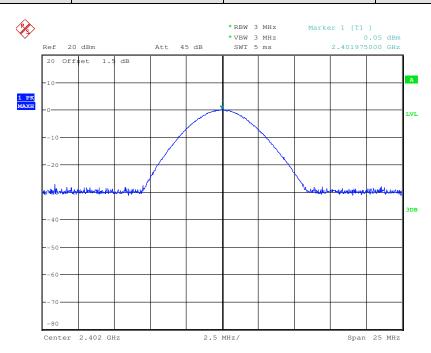



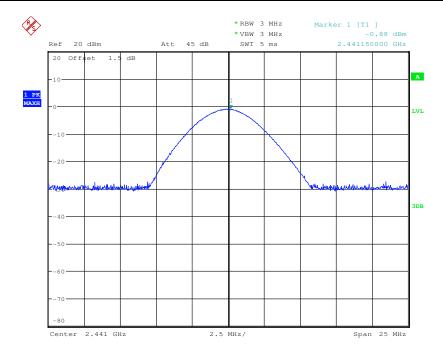




Report No.: SZEM150500298802

Page: 23 of 158



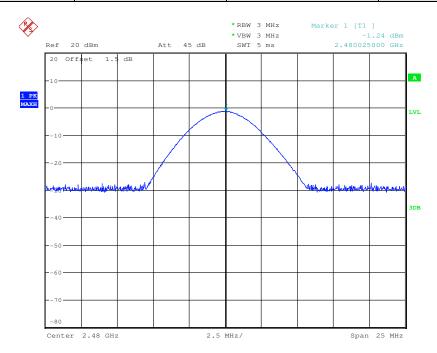




Report No.: SZEM150500298802

Page: 24 of 158

6.4 20dB Occupy Bandwidth

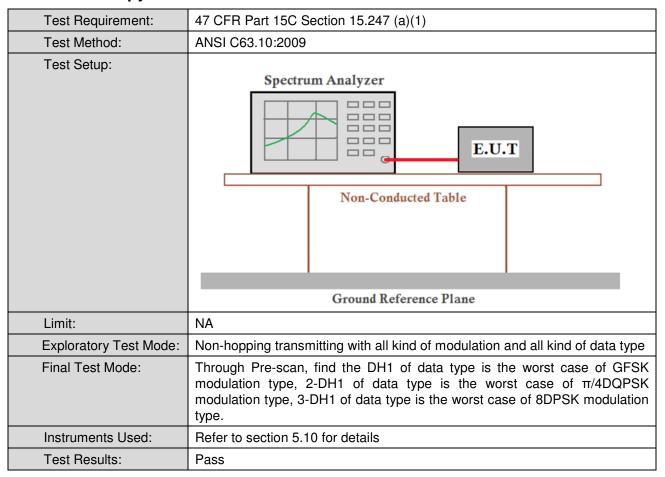

Measurement Data


	20dB Occupy Bandwidth (kHz)				
Test channel	GFSK	π/4DQPSK	8DPSK		
Lowest	897	1224	1218		
Middle	891	1224	1218		
Highest	894	1227	1221		




Report No.: SZEM150500298802

Page: 25 of 158

Test plot as follows:



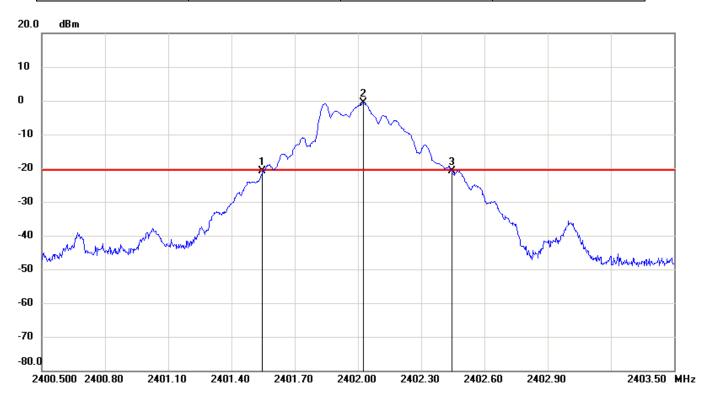

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.5470	-20.88	-20.70	-0.18
2	2402.0240	-0.70	-20.70	20.00
3	2402.4440	-20.86	-20.70	-0.16


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	0.897	0.02



Report No.: SZEM150500298802

Page: 26 of 158

Test mode:	GFSK	Test channel:	Middle

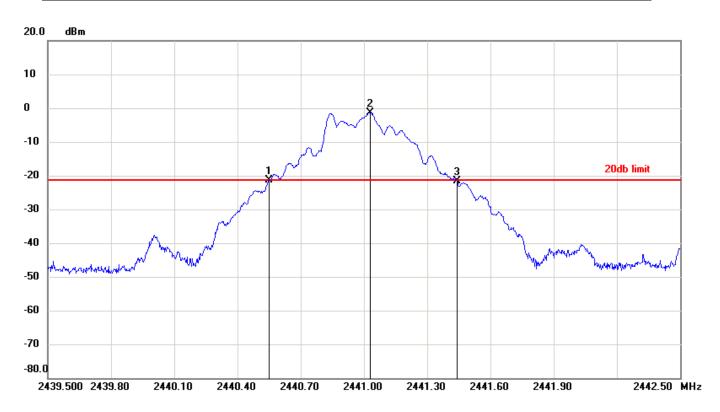


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.5500	-21.32	-21.31	-0.01
2	2441.0300	-1.31	-21.31	20.00
3	2441.4410	-21.56	-21.31	-0.25

No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	0.891	-0.24



Report No.: SZEM150500298802

Page: 27 of 158

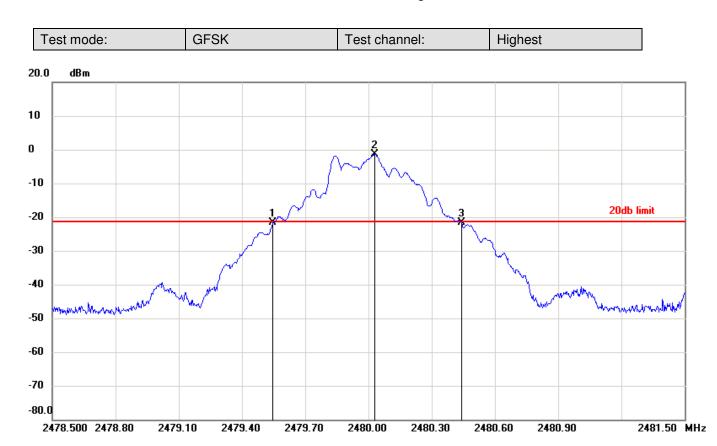

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.5470	-21.64	-21.42	-0.22
2	2480.0300	-1.42	-21.42	20.00
3	2480.4410	-21.63	-21.42	-0.21


No.		> Frequency(MHz)	› Level(dB)
1	mk3-mk1	0.894	0.01



Report No.: SZEM150500298802

Page: 28 of 158

Test mode:	π/4DQPSK	Test channel:	Lowest

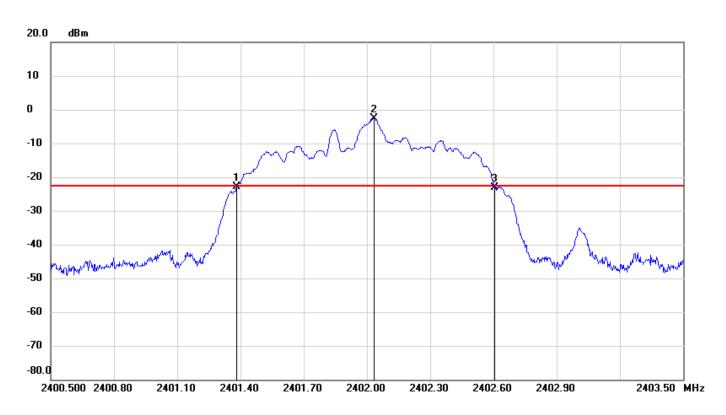

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3820	-22.86	-22.58	-0.28
2	2402.0330	-2.58	-22.58	20.00
3	2402.6060	-23.01	-22.58	-0.43

No.		> Frequency(MHz)	› Level(dB)
1	mk3-mk1	1.224	-0.15






Report No.: SZEM150500298802

Page: 29 of 158

Test mode: $\pi/4DQPSK$ Test channel: Mid	Middle
---	--------

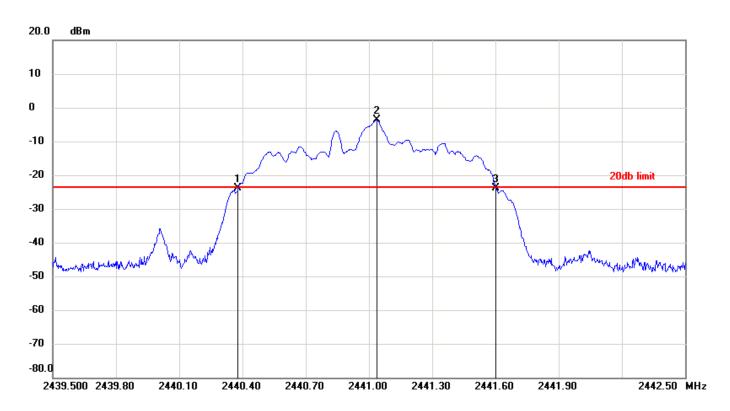


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.3790	-23.80	-23.61	-0.19
2	2441.0360	-3.61	-23.61	20.00
3	2441.6030	-23.77	-23.61	-0.16

No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	1.224	0.03



Report No.: SZEM150500298802

Page: 30 of 158

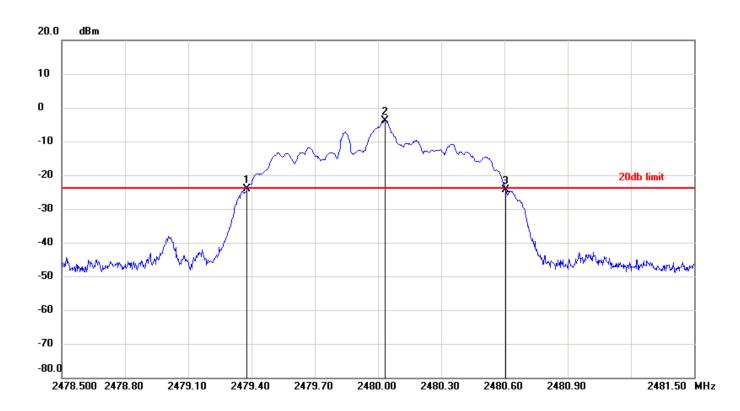

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.3790	-24.09	-23.88	-0.21
2	2480.0330	-3.88	-23.88	20.00
3	2480.6060	-24.44	-23.88	-0.56


No		> Frequency(MHz)	› Level(dB)
1	mk3-mk1	1.227	-0.35



Report No.: SZEM150500298802

Page: 31 of 158



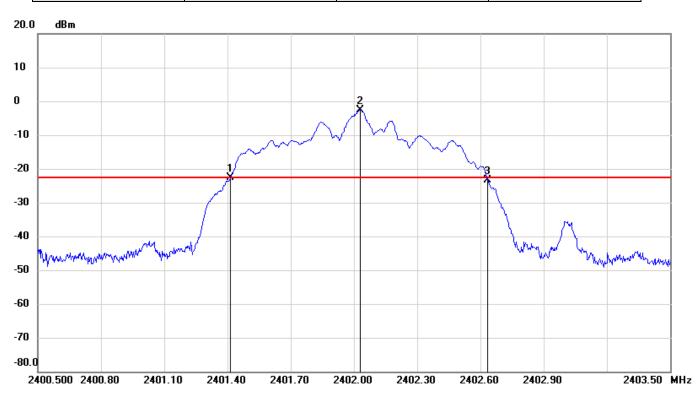

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.4150	-22.59	-22.50	-0.09
2	2402.0300	-2.50	-22.50	20.00
3	2402.6330	-23.30	-22.50	-0.80


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	1.218	-0.71



Report No.: SZEM150500298802

Page: 32 of 158

Test mode: 8DPSK Test channel: Middle	Test mode:	8DPSK	Test channel:	Middle
---	------------	-------	---------------	--------

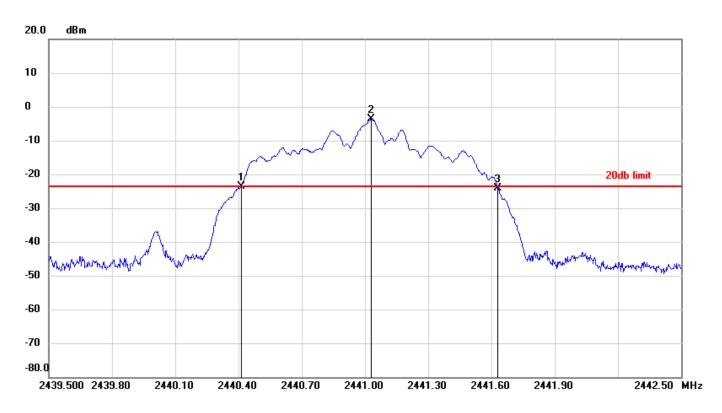

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4120	-23.56	-23.56	0.00
2	2441.0300	-3.56	-23.56	20.00
3	2441.6300	-24.17	-23.56	-0.61


No.		> Frequency(MHz)	› Level(dB)
1	mk3-mk1	1.218	-0.61



Report No.: SZEM150500298802

Page: 33 of 158

Test mode:	8DPSK	Test channel:	Highest
			9

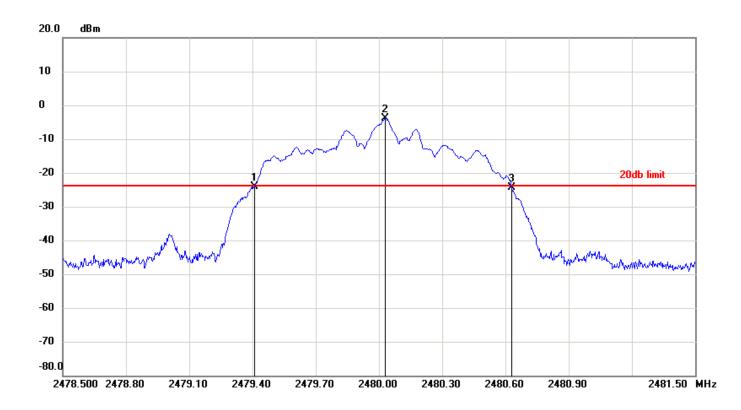

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.4090	-24.24	-23.83	-0.41
2	2480.0300	-3.83	-23.83	20.00
3	2480.6300	-24.33	-23.83	-0.50


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	1.221	-0.09



Report No.: SZEM150500298802

Page: 34 of 158

6.5 Carrier Frequencies Separation

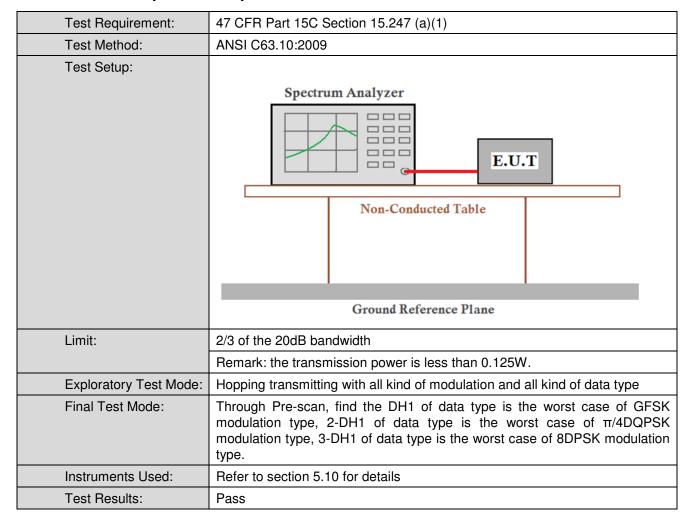



Report No.: SZEM150500298802

Page: 35 of 158

GFSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥859	Pass		
Middle	1006	≥859	Pass		
Highest	1002	≥859	Pass		
	π/4DQPSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥818	Pass		
Middle	1010	≥818	Pass		
Highest	1002	≥818	Pass		
	8DPSK mo	de			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥814	Pass		
Middle	1010	≥814	Pass		
Highest	1002	≥814	Pass		

Note: According to section 6,4

Mode	20dB bandwidth (kHz) Limit (kHz)	
	(worse case)	(Carrier Frequencies Separation)
GFSK	897	598
π/4DQPSK	1227	818
8DPSK	1221	814




Report No.: SZEM150500298802

Page: 36 of 158


Test plot as follows:

Test plot as follows:

Test mode: GFSK Test channel: Lowest	
--------------------------------------	--

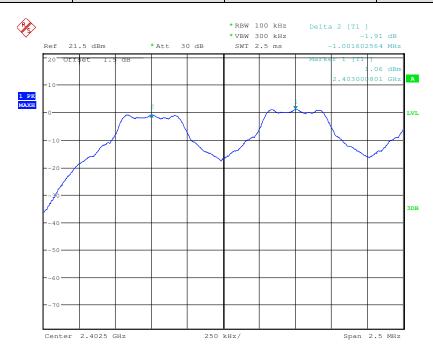



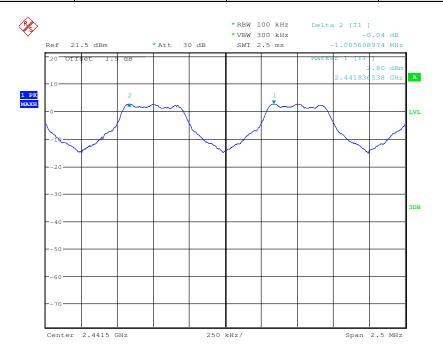





Report No.: SZEM150500298802

Page: 37 of 158

Test mode: GFSK Test channel: Highest

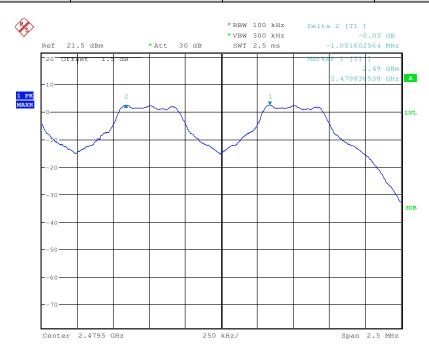



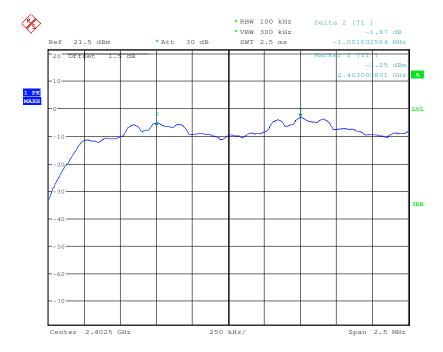





Report No.: SZEM150500298802

Page: 38 of 158

Test mode: π/4DQPSK Test channel: Middle

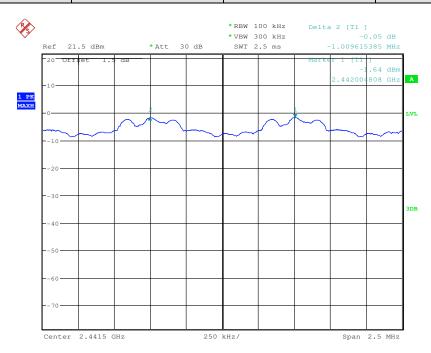

Test mode: π/4DQPSK Test channel: Highest

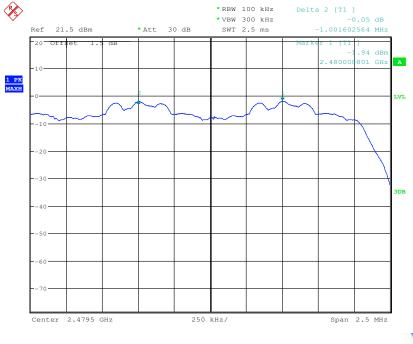








Report No.: SZEM150500298802

Page: 39 of 158



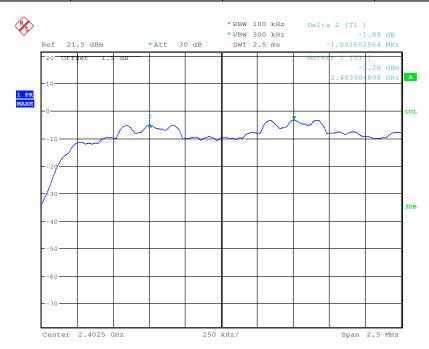



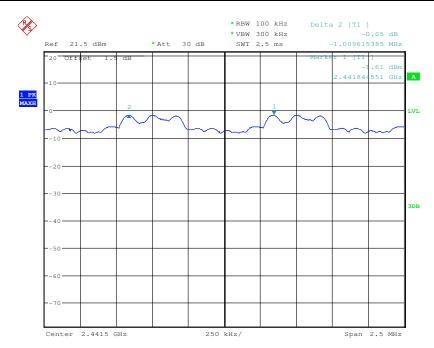




Report No.: SZEM150500298802

Page: 40 of 158



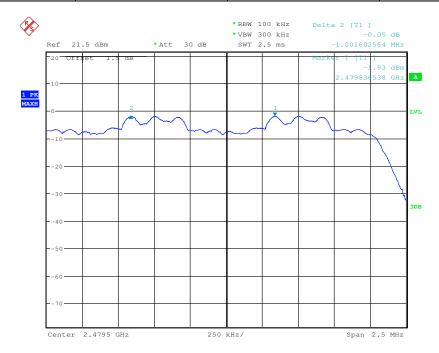




Report No.: SZEM150500298802

Page: 41 of 158

6.6 Hopping Channel Number

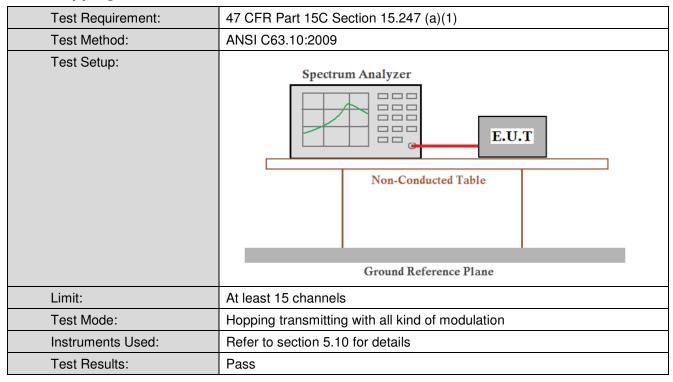

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15




Report No.: SZEM150500298802

Page: 42 of 158

Test plot as follows:



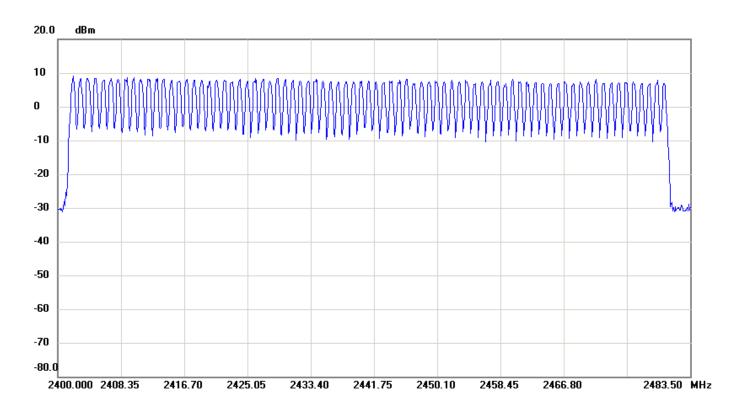




Report No.: SZEM150500298802

Page: 43 of 158



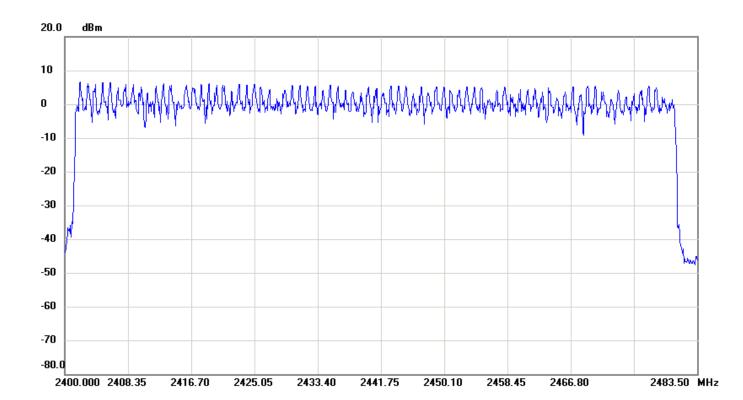




Report No.: SZEM150500298802

Page: 44 of 158



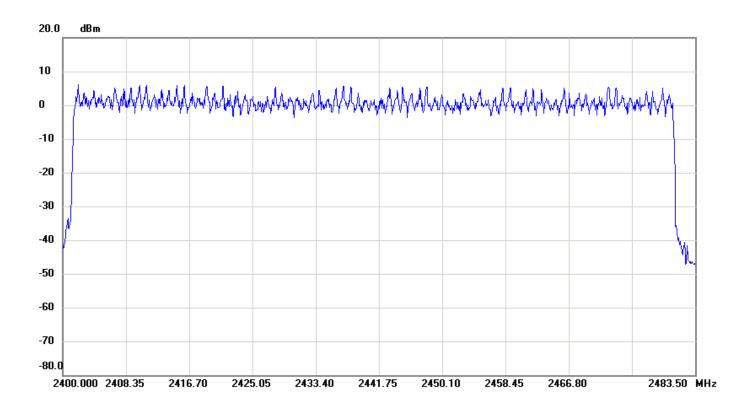




Report No.: SZEM150500298802

Page: 45 of 158

6.7 Dwell Time

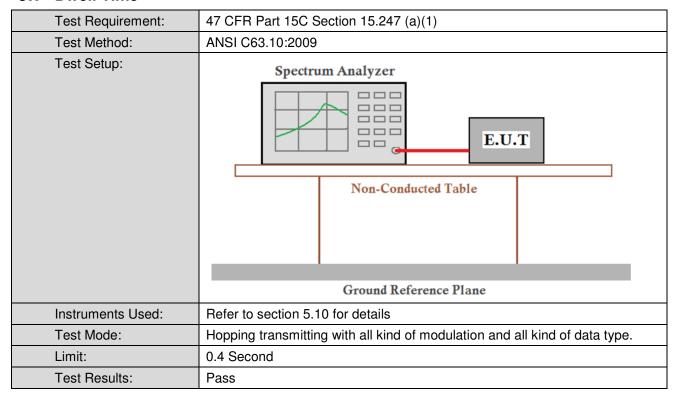

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.131	0.4
GFSK	DH3	0.251	0.4
	DH5	0.293	0.4
	2-DH1	0.135	0.4
π/4DQPSK	2-DH3	0.252	0.4
	2-DH5	0.294	0.4
	3-DH1	0.135	0.4
8DPSK	3-DH3	0.252	0.4
	3-DH5	0.294	0.4



Report No.: SZEM150500298802

Page: 46 of 158

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)*total number=dwell time (ms)

The lowest channel (2402MHz), as below:

DH1 time slot=0.409 (ms)*total number=130.88(ms)

DH3 time slot= 1.671 (ms)^* total number = 250.65 (ms)

DH5 time slot=2.928 (ms)* total number =292.8 (ms)

2-DH1 time slot=0.422 (ms)*total number=135.04 (ms)

2-DH3 time slot=1.683 (ms)* total number =252.45(ms)

2-DH5 time slot=2.936 (ms)* total number =293.60(ms)

3-DH1 time slot=0.422 (ms)*total number=135.04 (ms)

3-DH3 time slot=1.68 (ms)* total number = 252.00(ms)


3-DH5 time slot=2.936 (ms)* total number = 293.6 (ms)




Report No.: SZEM150500298802

Page: 47 of 158

Test plot as follows:




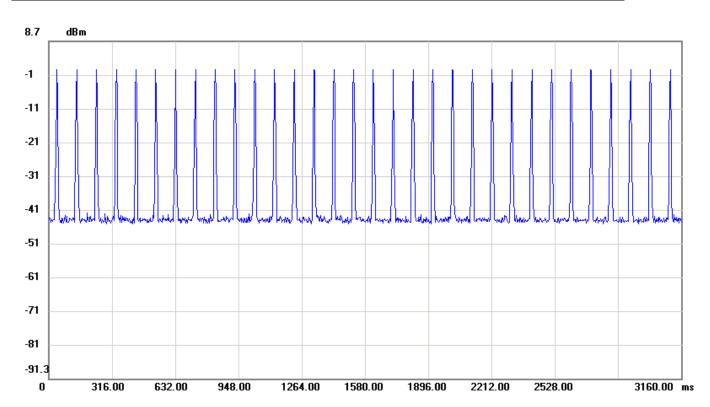



Report No.: SZEM150500298802

Page: 48 of 158

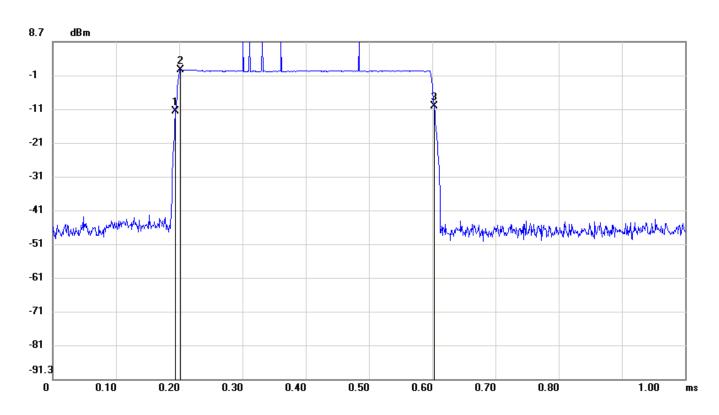

No.	Sweep time(ms)	Result(dBm)
1	0.1940	-12.04
2	0.2020	0.36
3	0.6030	-10.54


No.		〉Time(ms)	› Level(dB)
1	mk3-mk1	0.409	1.5





Report No.: SZEM150500298802


Page: 49 of 158

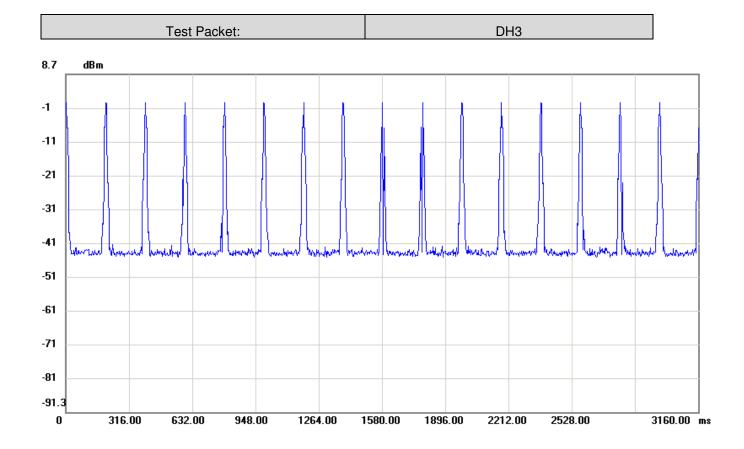



Report No.: SZEM150500298802

Page: 50 of 158

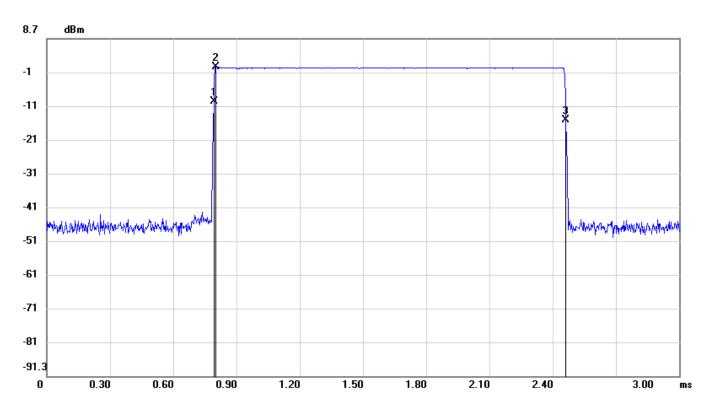


No.	Sweep time(ms)	Result(dBm)
1	0.7920	-9.98
2	0.8010	0.32
3	2.4630	-15.39

No.		〉Time(ms)	〉Level(dB)
1	mk3-mk1	1.671	-5.41



Report No.: SZEM150500298802


Page: 51 of 158

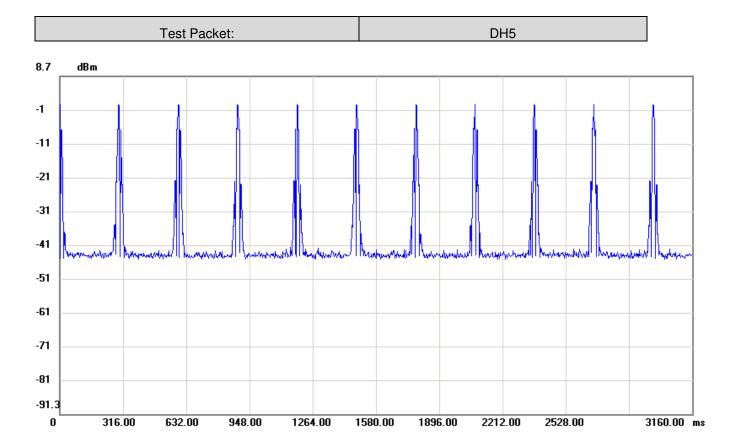



Report No.: SZEM150500298802

Page: 52 of 158

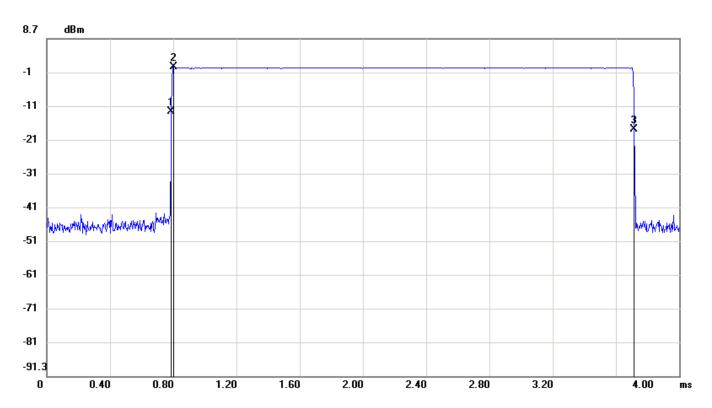

No.	Sweep time(ms)	Result(dBm)
1	0.7880	-12.93
2	0.8000	0.34
3	3.7160	-18.28


No.		〉Time(ms)	› Level(dB)
1	mk3-mk1	2.928	-5.35



Report No.: SZEM150500298802

Page: 53 of 158




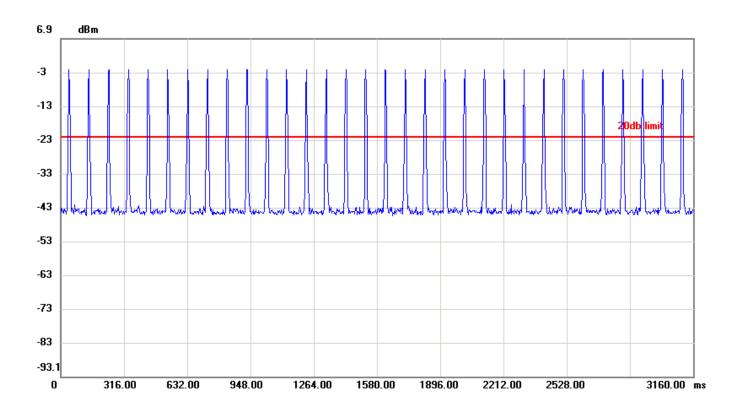



Report No.: SZEM150500298802

Page: 54 of 158

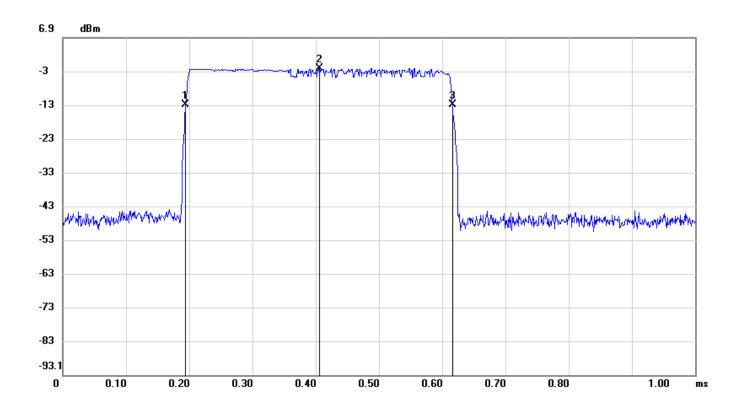

No.	Sweep time(ms)	Result(dBm)
1	0.1940	-12.86
2	0.4060	-2.20
3	0.6160	-12.93


No.		〉Time(ms)	〉Level(dB)
1	mk3-mk1	0.422	-0.07



Report No.: SZEM150500298802

Page: 55 of 158




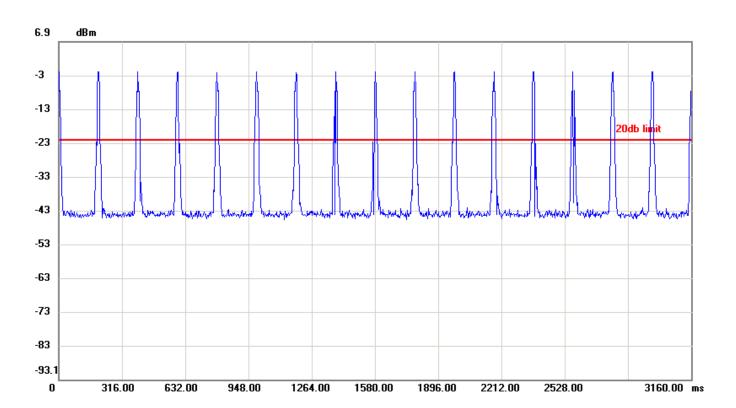



Report No.: SZEM150500298802

Page: 56 of 158

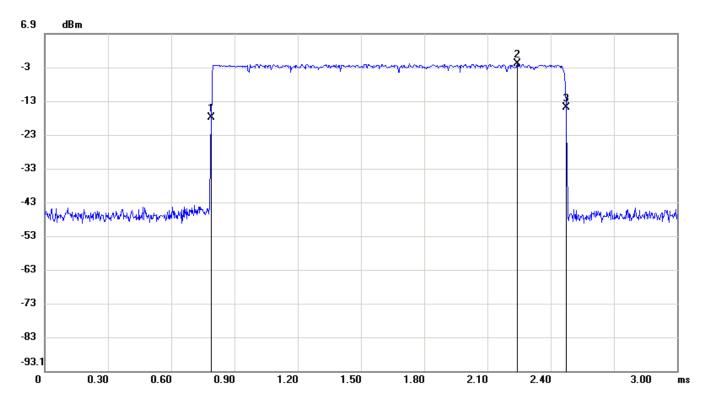

No.	Sweep time(ms)	Result(dBm)
1	0.7890	-17.90
2	2.2410	-2.07
3	2.4720	-15.00


No.		〉Time(ms)	〉Level(dB)
1	mk3-mk1	1.683	2.9



Report No.: SZEM150500298802

Page: 57 of 158


Test Packet:	2-DH5

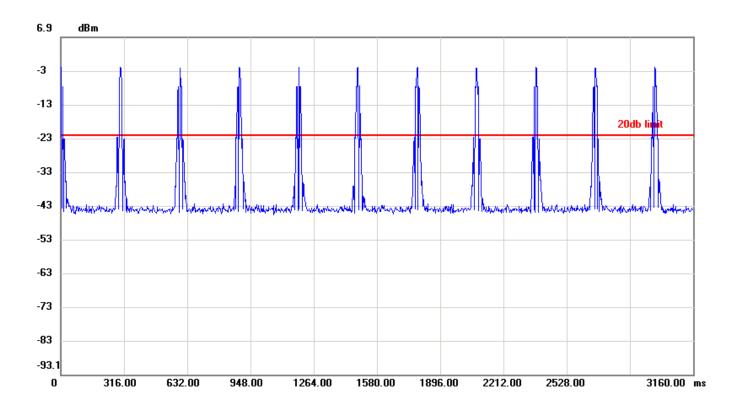



Report No.: SZEM150500298802

Page: 58 of 158

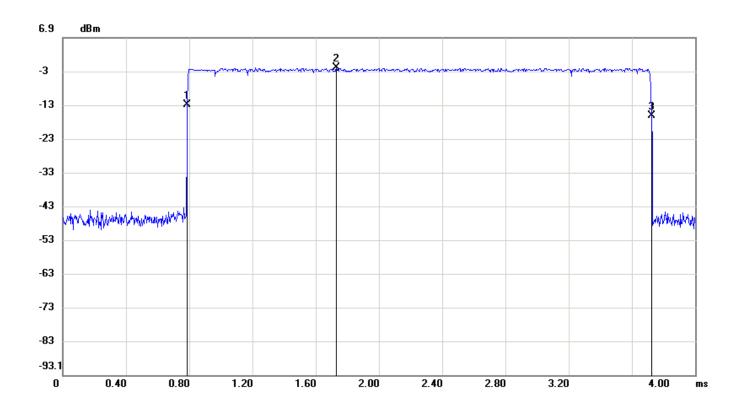

No.	Sweep time(ms)	Result(dBm)
1	0.7880	-13.06
2	1.7320	-2.06
3	3.7240	-16.14

No.		〉Time(ms)	〉Level(dB)	
1	mk3-mk1	2.936	-3.08	






Report No.: SZEM150500298802

Page: 59 of 158


Test Packet:	3-DH1

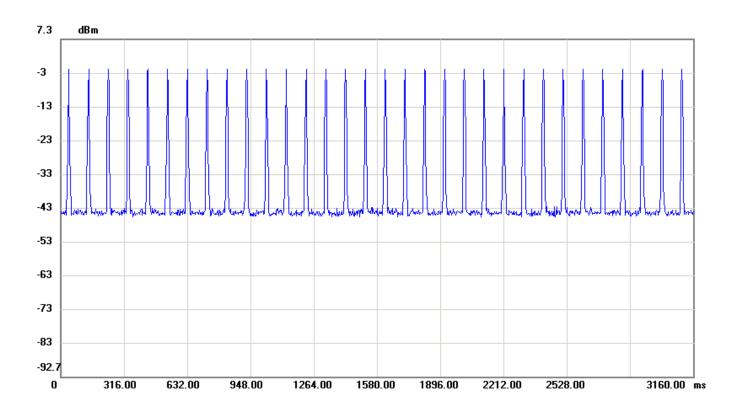



Report No.: SZEM150500298802

Page: 60 of 158

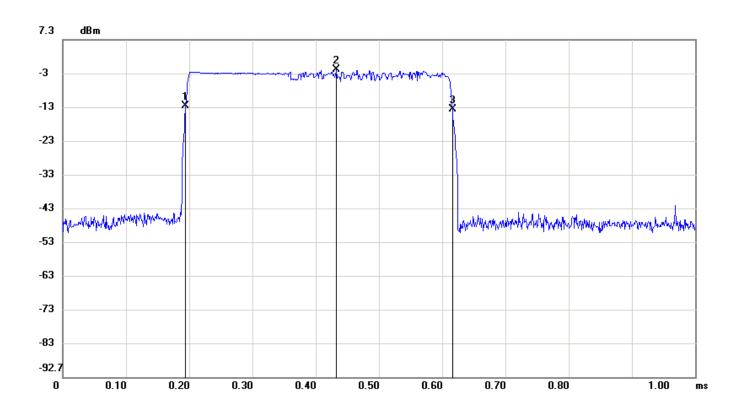

No.	Sweep time(ms)	Result(dBm)
1	0.1940	-12.23
2	0.4320	-1.59
3	0.6160	-13.39


No.		〉Time(ms)	〉Level(dB)
1	mk3-mk1	0.422	-1.16



Report No.: SZEM150500298802

Page: 61 of 158




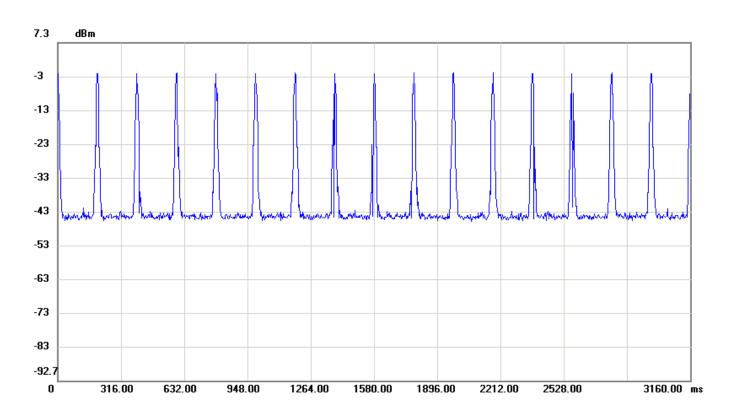



Report No.: SZEM150500298802

Page: 62 of 158

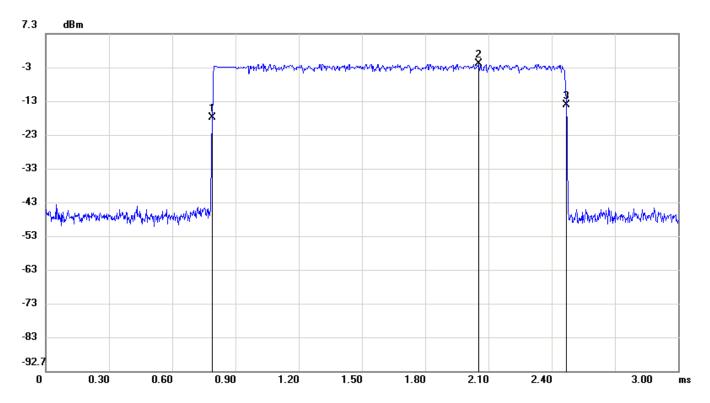


No.	Sweep time(ms)	Result(dBm)
1	0.7890	-17.64
2	2.0520	-1.69
3	2.4690	-13.92

No.		〉Time(ms)	› Level(dB)
1	mk3-mk1	1.68	3.72



Report No.: SZEM150500298802


Page: 63 of 158

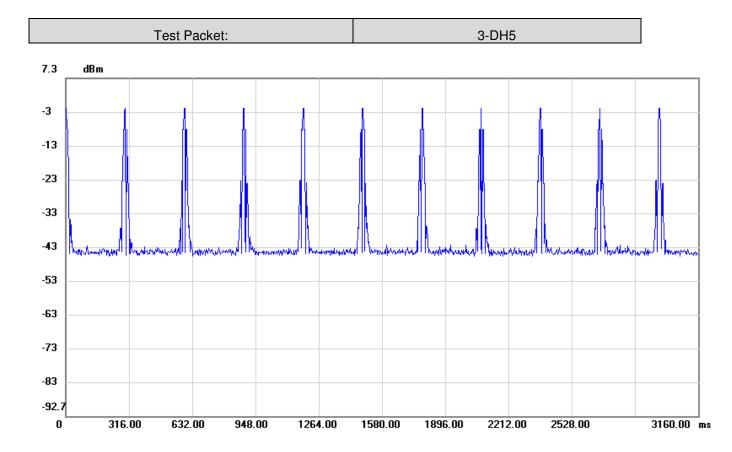



Report No.: SZEM150500298802

Page: 64 of 158

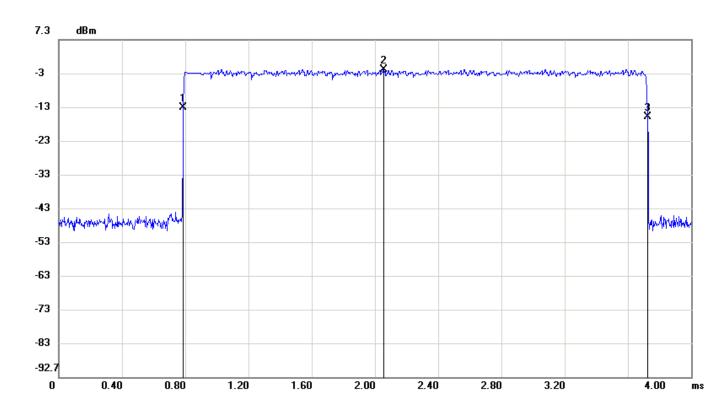

No.	Sweep time(ms)	Result(dBm)
1	0.7880	-12.83
2	2.0560	-1.60
3	3.7240	-15.54

No.		〉Time(ms)	〉Level(dB)
1	mk3-mk1	2.936	-2.71



Report No.: SZEM150500298802

Page: 65 of 158

6.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		




Report No.: SZEM150500298802

Page: 66 of 158

Test plot as follows:



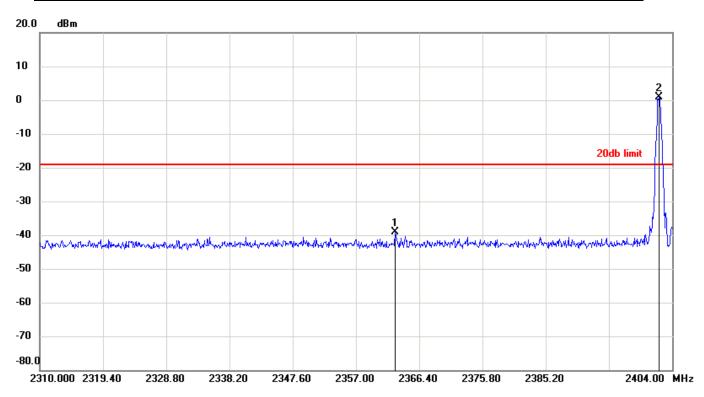


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2362.8280	-39.22	-19.08	-20.14
2	2402.0260	0.92	-19.08	20.00



Report No.: SZEM150500298802

Page: 67 of 158

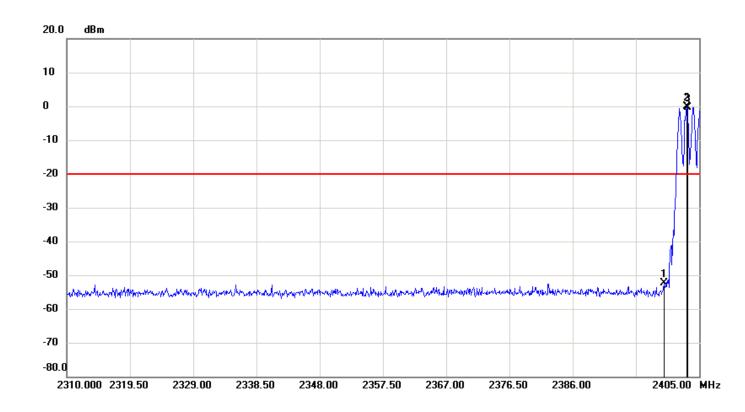


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.6800	-52.41	-20.24	-32.17
2	2403.1000	-0.24	-20.24	20.00
3	2403.2900	-0.26	-20.24	19.98



Report No.: SZEM150500298802

Page: 68 of 158



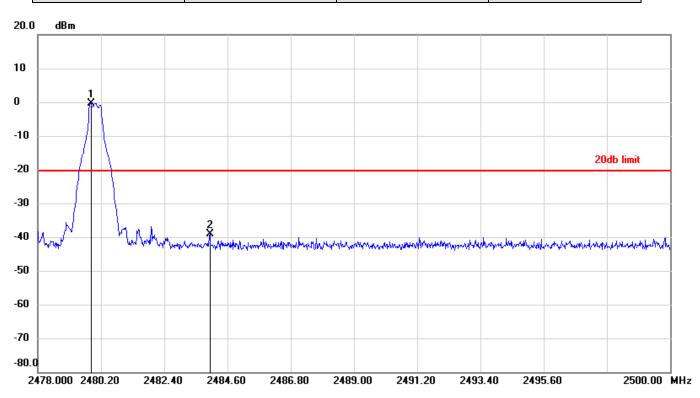


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.8480	-0.41	-20.41	20.00
2	2483.9840	-39.23	-20.41	-18.82





Report No.: SZEM150500298802

Page: 69 of 158

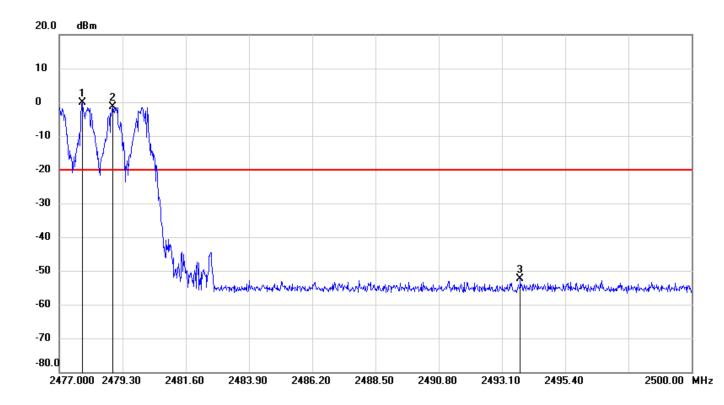



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2477.8280	-0.22	-20.22	20.00
2	2478.9550	-1.29	-20.22	18.93
3	2493.7670	-52.31	-20.22	-32.09



Report No.: SZEM150500298802

Page: 70 of 158



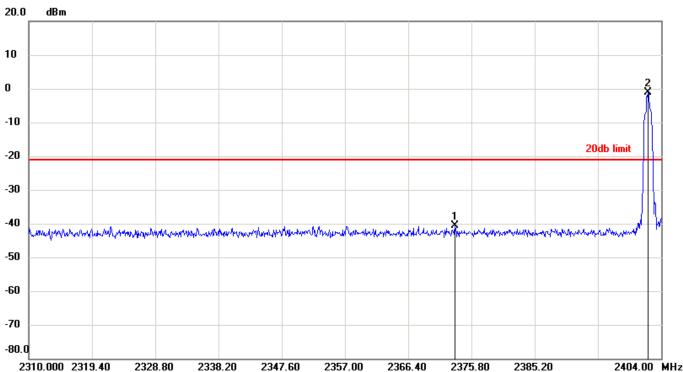


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2373.3560	-40.69	-21.20	-19.49
2	2402.0260	-1.20	-21.20	20.00



Report No.: SZEM150500298802

Page: 71 of 158

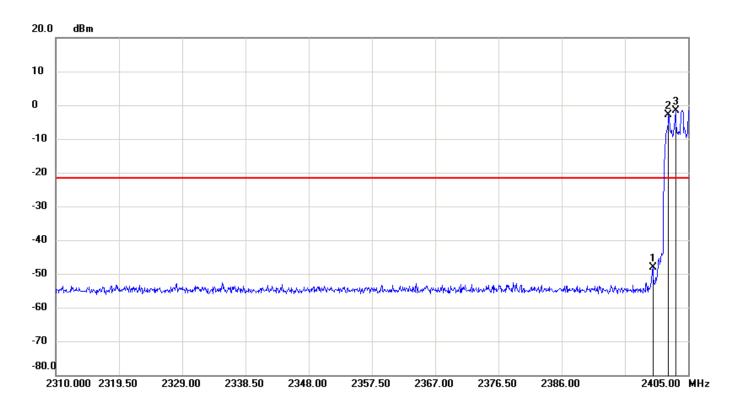


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.6800	-48.04	-21.64	-26.40
2	2402.0550	-2.98	-21.64	18.66
3	2403.1000	-1.64	-21.64	20.00



Report No.: SZEM150500298802

Page: 72 of 158

Test mode:	π/4DQPSK	Test channel:	Highest	

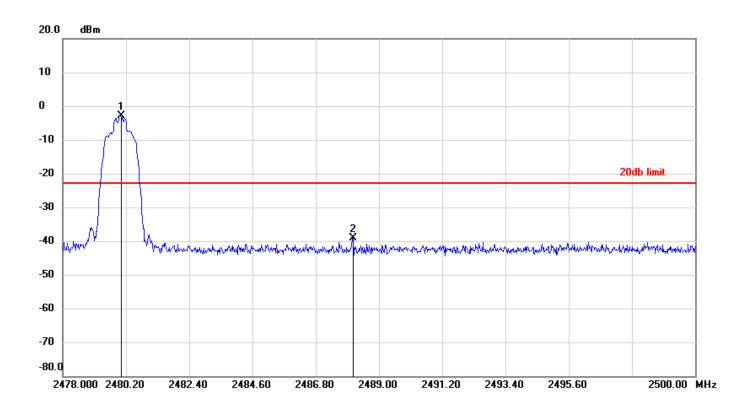


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2480.0240	-2.92	-22.92	20.00
2	2488.0980	-39.23	-22.92	-16.31



Report No.: SZEM150500298802

Page: 73 of 158

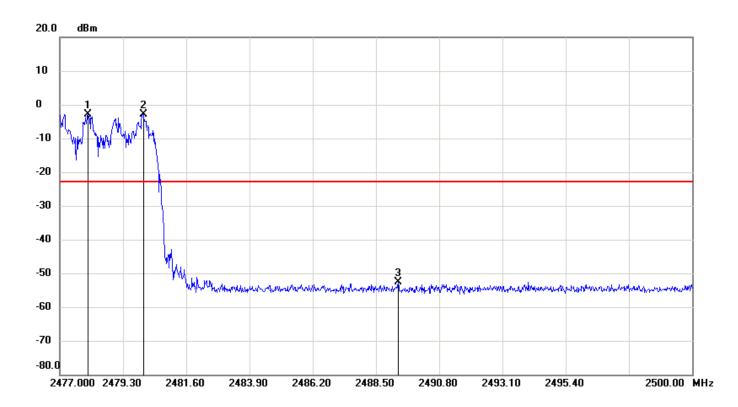


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2478.0350	-2.84	-22.84	20.00
2	2480.0360	-2.88	-22.84	19.96
3	2489.3050	-52.52	-22.84	-29.68



Report No.: SZEM150500298802

Page: 74 of 158



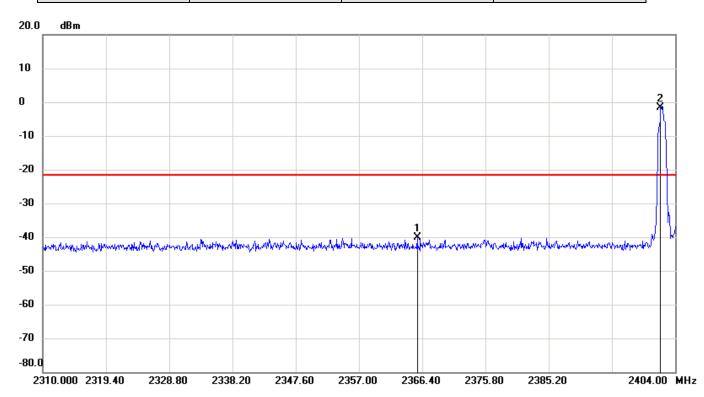


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2365.6480	-40.03	-21.62	-18.41
2	2401.8380	-1.62	-21.62	20.00



Report No.: SZEM150500298802

Page: 75 of 158

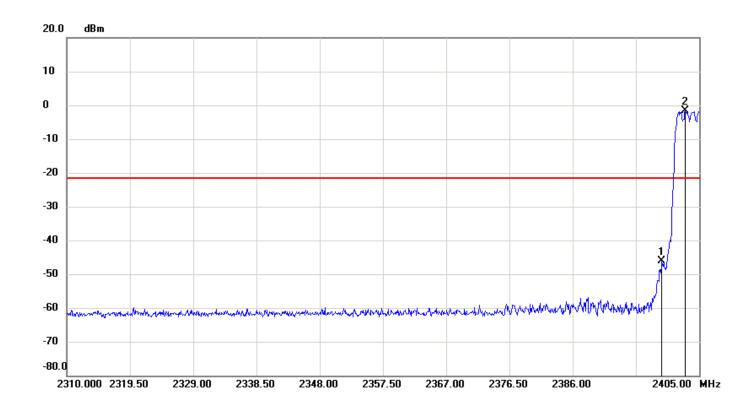


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.3950	-46.01	-21.71	-24.30
2	2402.9100	-1.71	-21.71	20.00



Report No.: SZEM150500298802

Page: 76 of 158



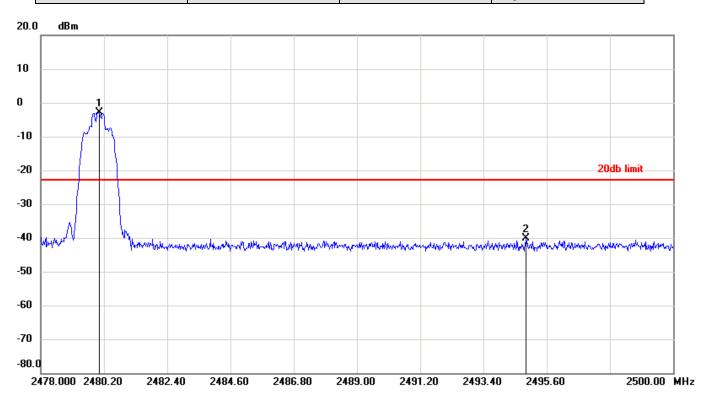


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2480.0240	-2.90	-22.90	20.00
2	2494.8740	-40.22	-22.90	-17.32



Report No.: SZEM150500298802

Page: 77 of 158

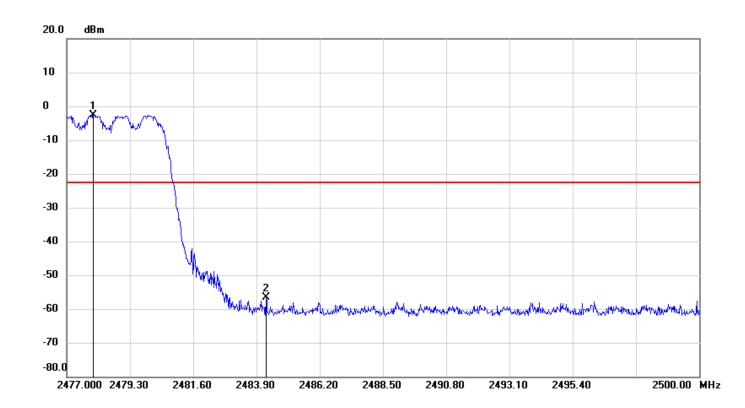

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2477.9660	-2.68	-22.68	20.00
2	2484.2450	-56.61	-22.68	-33.93



Report No.: SZEM150500298802

Page: 78 of 158

6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






Report No.: SZEM150500298802

Page: 79 of 158



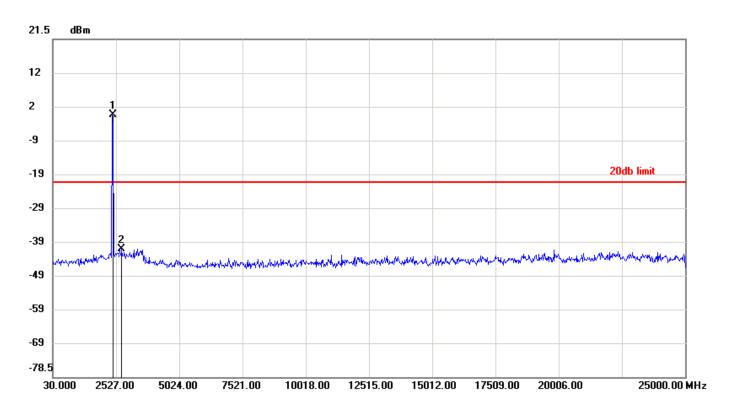


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3177	-0.96	-20.96	20.00
2	2770.0413	-40.70	-20.96	-19.74



Report No.: SZEM150500298802

Page: 80 of 158

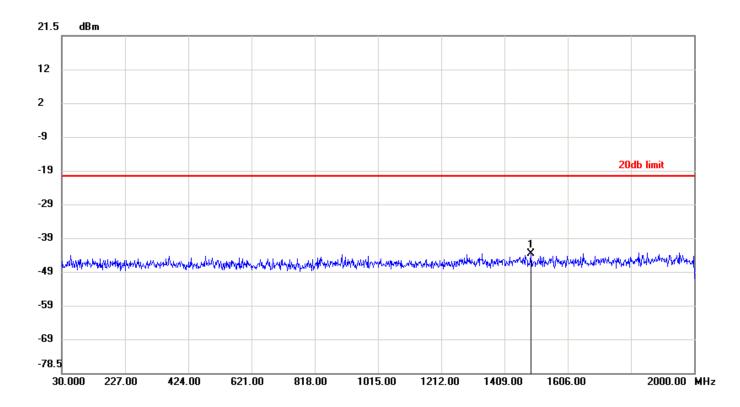


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1492.6593	-43.00	-20.01	-22.99



Report No.: SZEM150500298802

Page: 81 of 158

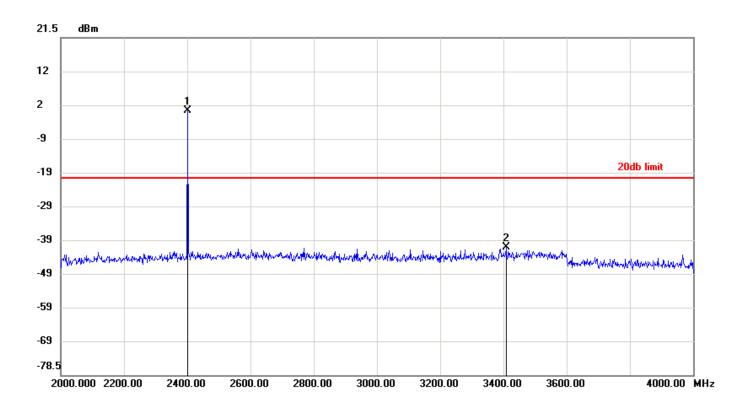


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.8667	-0.01	-20.01	20.00
2	3408.8667	-40.52	-20.01	-20.51



Report No.: SZEM150500298802

Page: 82 of 158

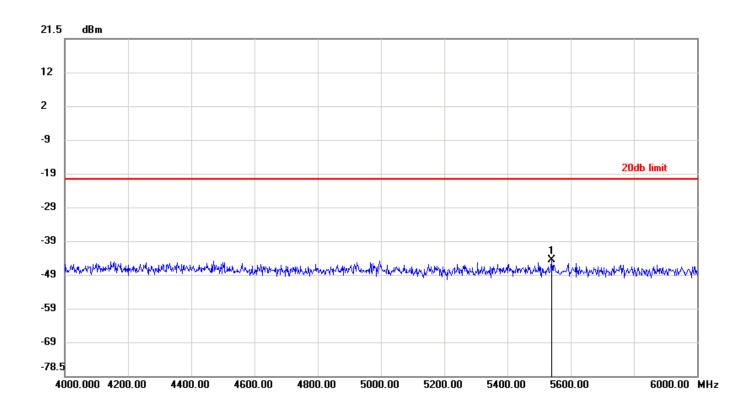


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5541.6000	-44.21	-20.01	-24.20



Report No.: SZEM150500298802

Page: 83 of 158

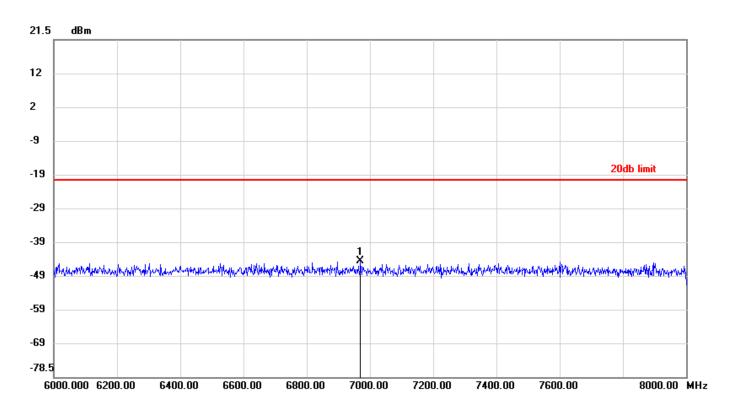


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6970.2000	-44.09	-20.01	-24.08



Report No.: SZEM150500298802

Page: 84 of 158

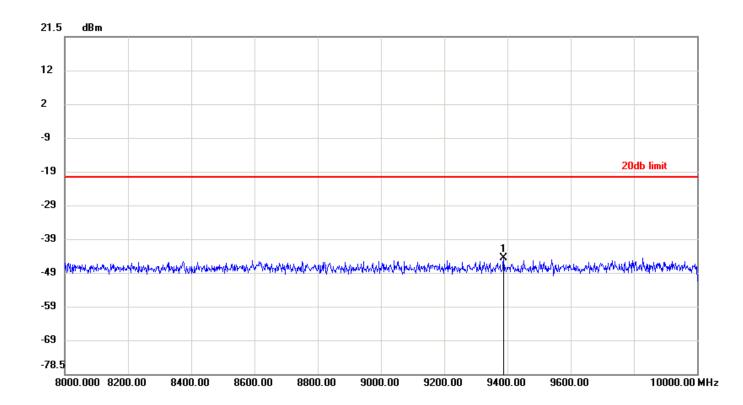


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9389.9333	-44.24	-20.01	-24.23



Report No.: SZEM150500298802

Page: 85 of 158



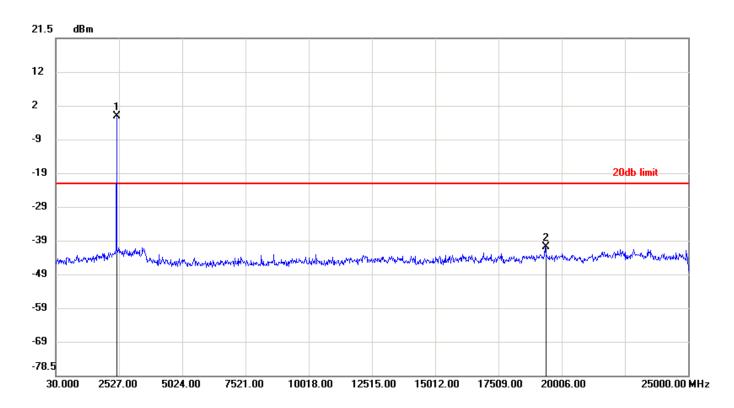


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4373	-1.72	-21.72	20.00
2	19360.9417	-40.35	-21.72	-18.63



Report No.: SZEM150500298802

Page: 86 of 158

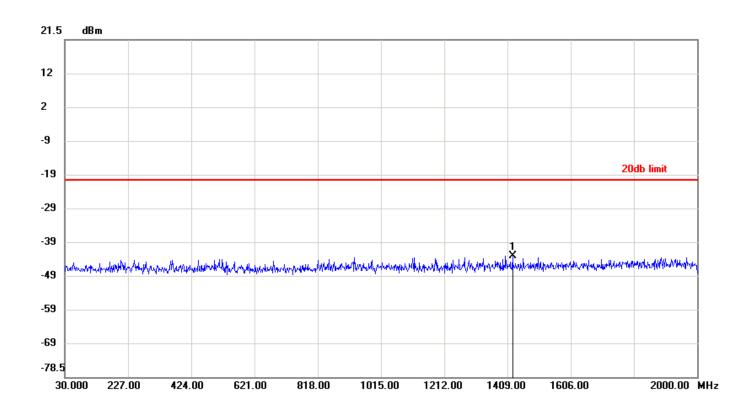


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1426.4673	-42.66	-20.08	-22.58



Report No.: SZEM150500298802

Page: 87 of 158

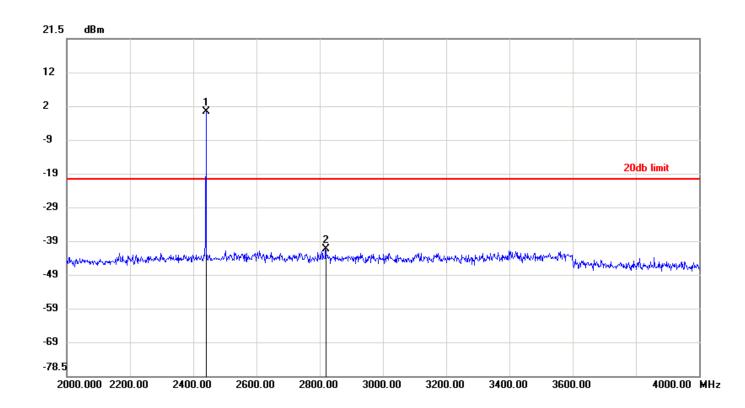


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9333	-0.08	-20.08	20.00
2	2819.6667	-40.97	-20.08	-20.89



Report No.: SZEM150500298802

Page: 88 of 158

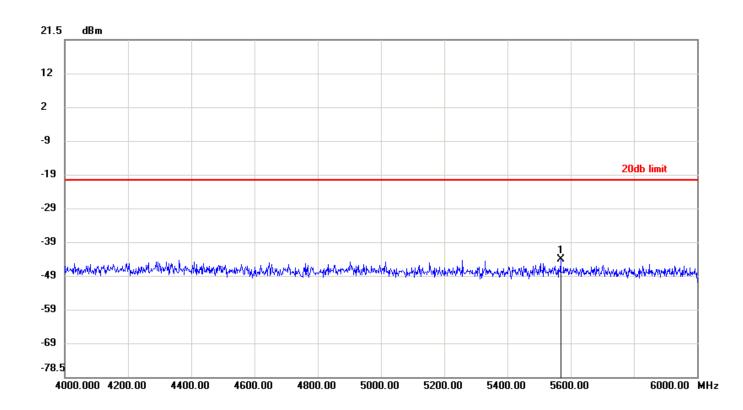


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5568.0000	-43.74	-20.08	-23.66





Report No.: SZEM150500298802

Page: 89 of 158

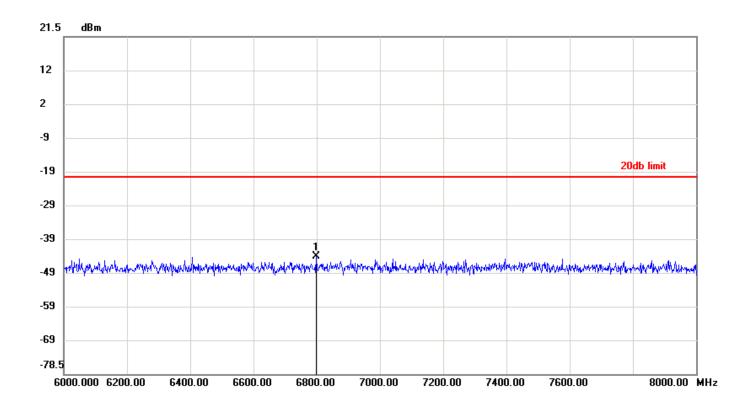


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6798.9333	-43.63	-20.08	-23.55



Report No.: SZEM150500298802

Page: 90 of 158

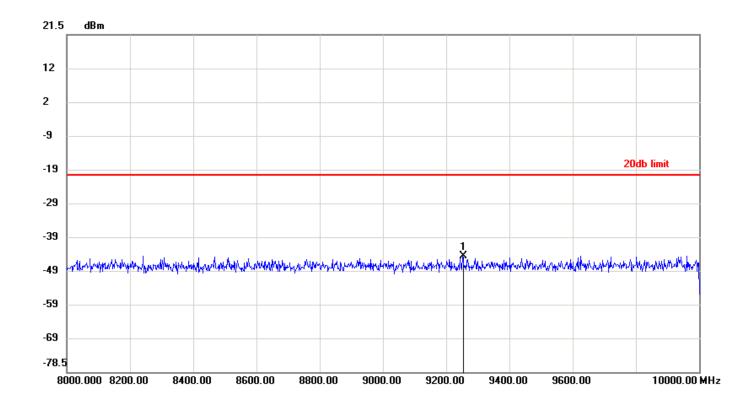


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9252.6667	-44.03	-20.08	-23.95



Report No.: SZEM150500298802

Page: 91 of 158



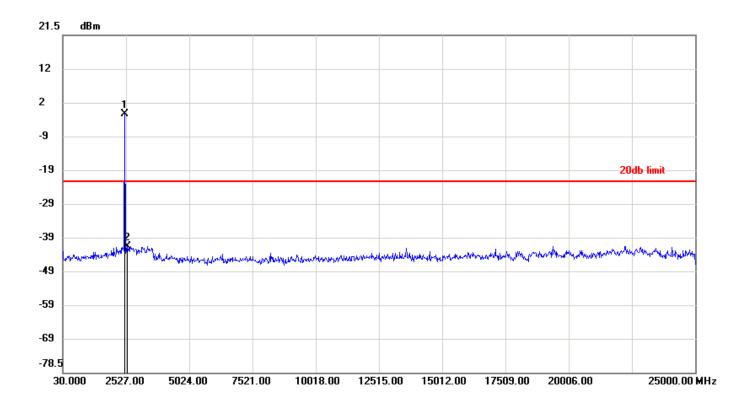


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.5570	-1.83	-21.83	20.00
2	2599.4130	-41.03	-21.83	-19.20



Report No.: SZEM150500298802

Page: 92 of 158

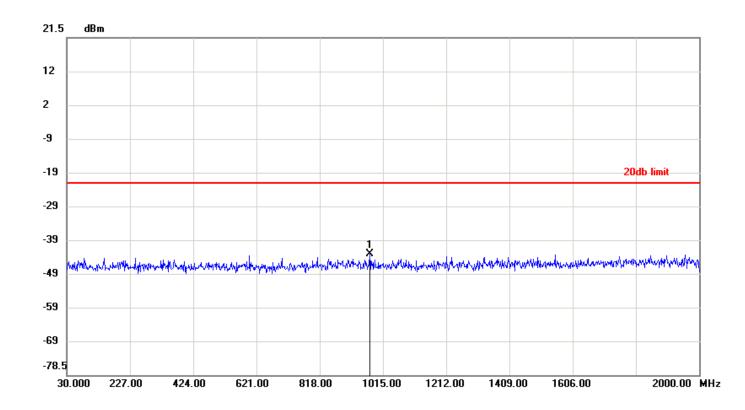


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	975.4030	-42.72	-21.51	-21.21



Report No.: SZEM150500298802

Page: 93 of 158

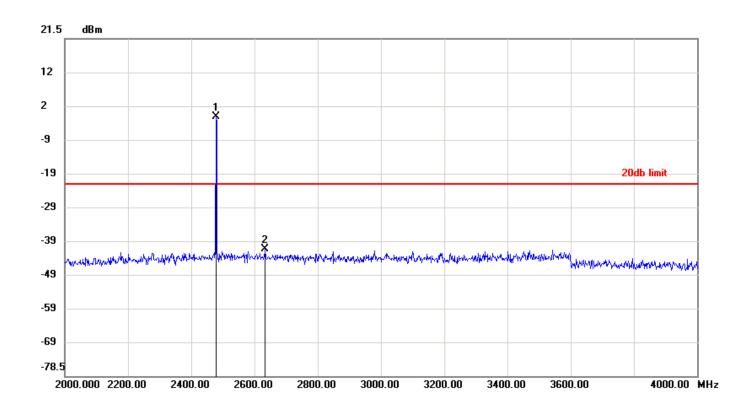


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.8000	-1.51	-21.51	20.00
2	2634.7333	-40.97	-21.51	-19.46



Report No.: SZEM150500298802

Page: 94 of 158

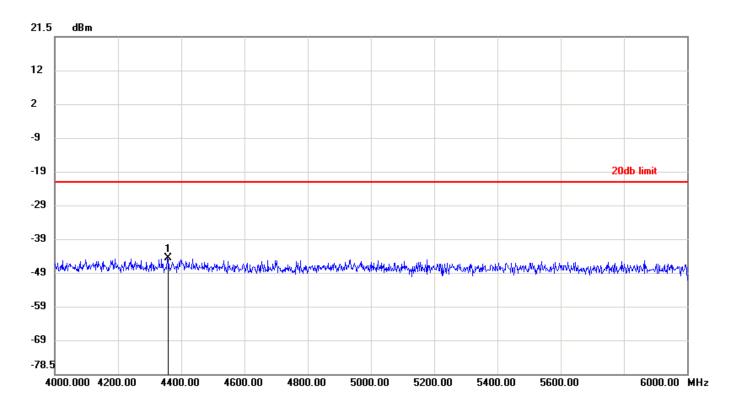


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4356.4667	-44.18	-21.51	-22.67



Report No.: SZEM150500298802

Page: 95 of 158

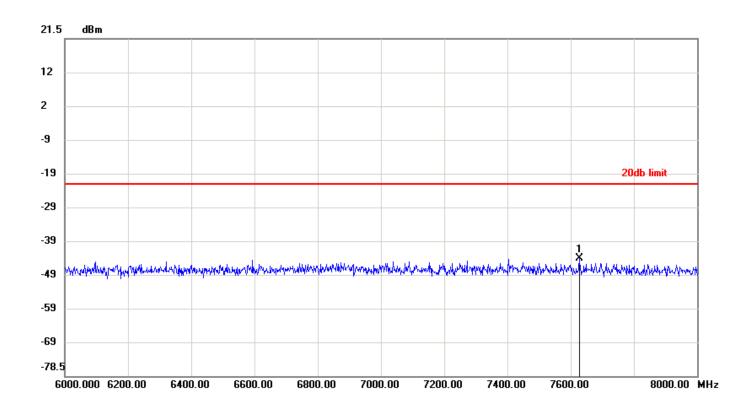


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7628.4000	-43.66	-21.51	-22.15



Report No.: SZEM150500298802

Page: 96 of 158

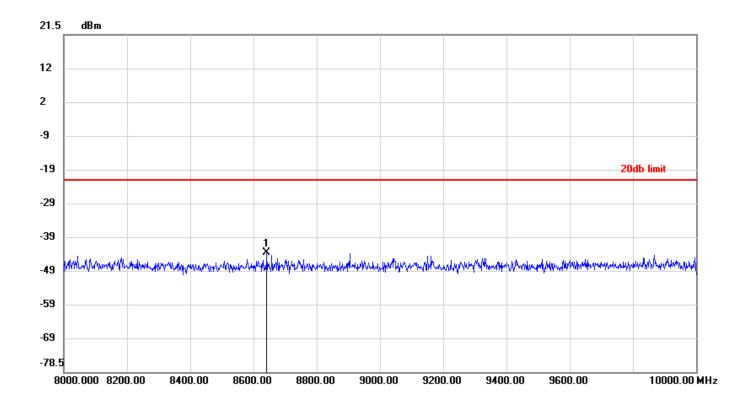


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8642.4000	-43.21	-21.51	-21.70



Report No.: SZEM150500298802

Page: 97 of 158



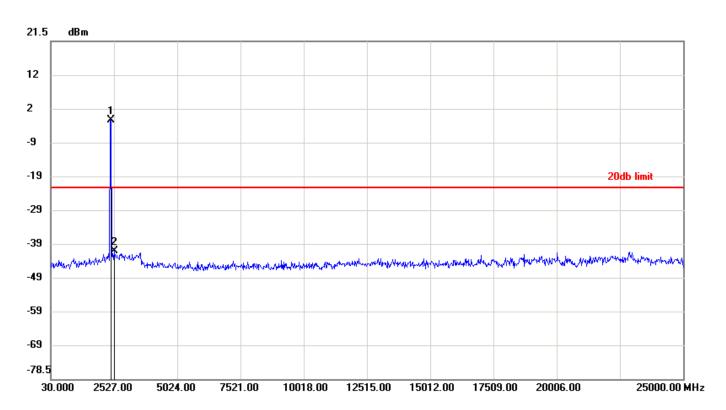


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3177	-1.84	-21.84	20.00
2	2544.4790	-40.64	-21.84	-18.80



Report No.: SZEM150500298802

Page: 98 of 158

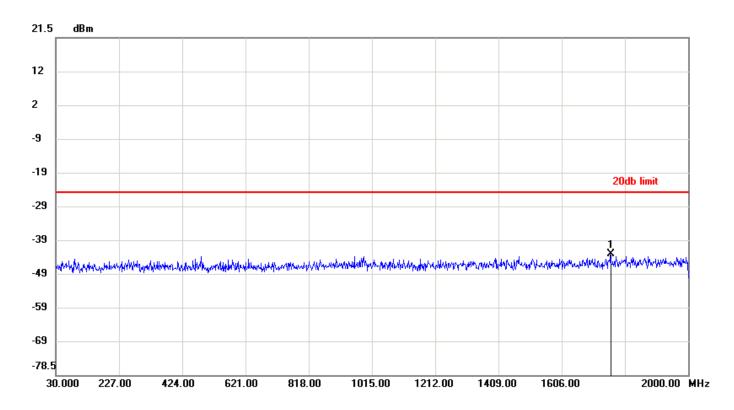


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1758.9377	-42.70	-24.42	-18.28





Report No.: SZEM150500298802

Page: 99 of 158

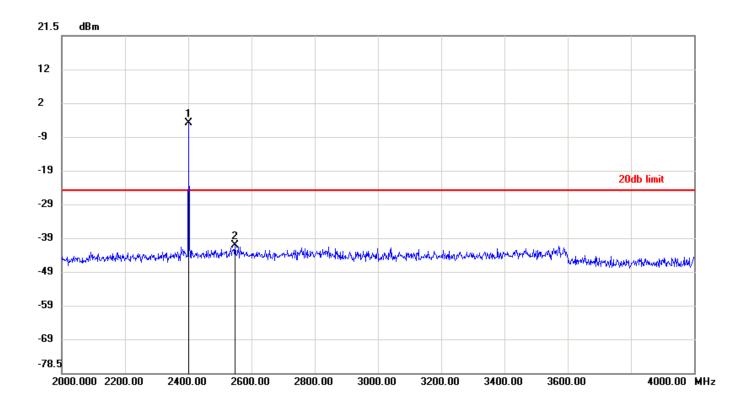


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.8000	-4.42	-24.42	20.00
2	2549.2000	-40.69	-24.42	-16.27



Report No.: SZEM150500298802

Page: 100 of 158

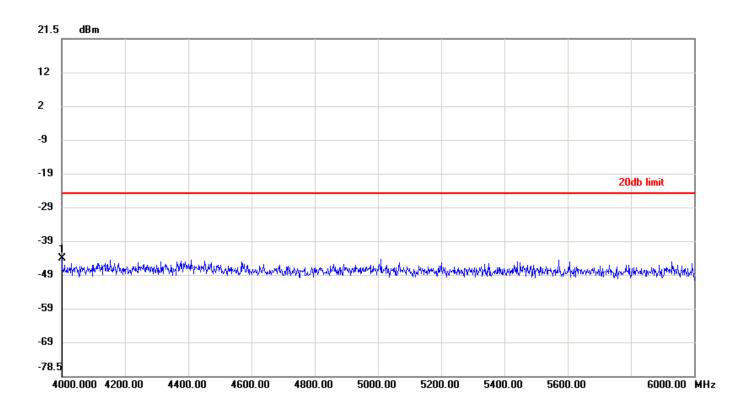


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4000.0000	-43.55	-24.42	-19.13



Report No.: SZEM150500298802

Page: 101 of 158

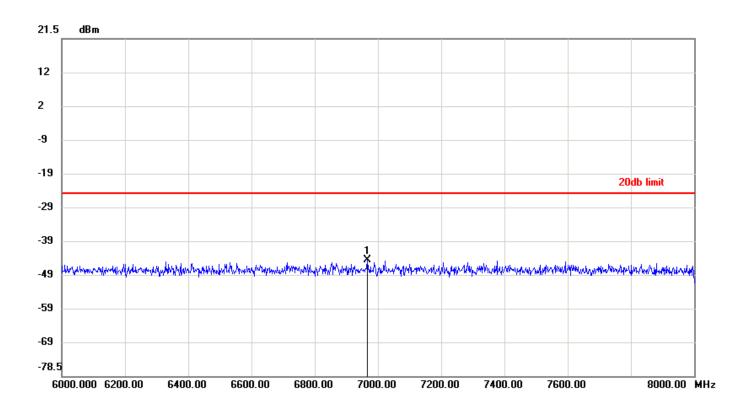


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6966.1333	-44.03	-24.42	-19.61



Report No.: SZEM150500298802

Page: 102 of 158

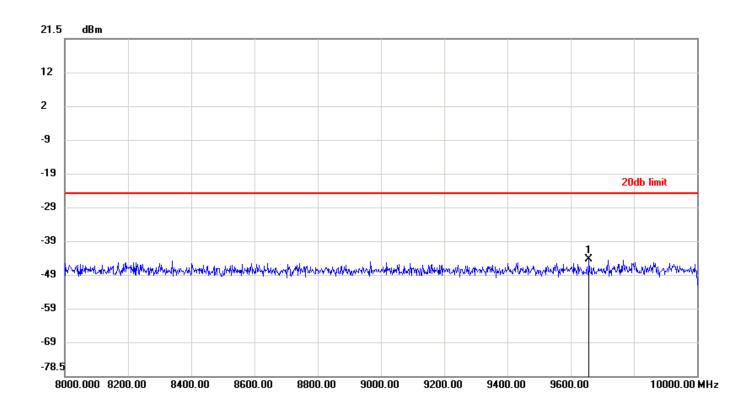


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9659.9333	-43.98	-24.42	-19.56



Report No.: SZEM150500298802

Page: 103 of 158

Test mode: π/4DQPSK Test channel: Middle

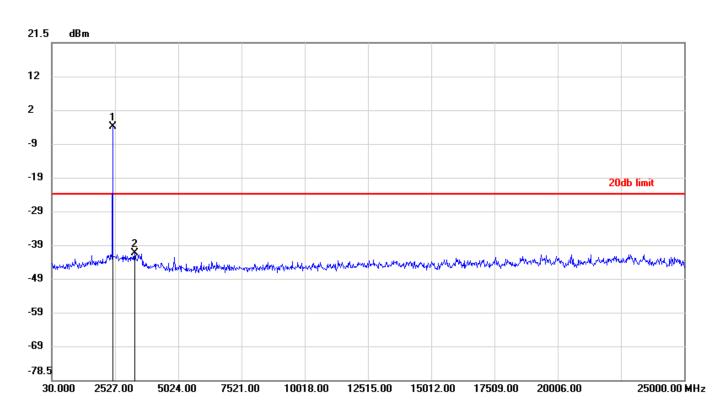


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4373	-3.49	-23.49	20.00
2	3311.8903	-40.95	-23.49	-17.46



Report No.: SZEM150500298802

Page: 104 of 158

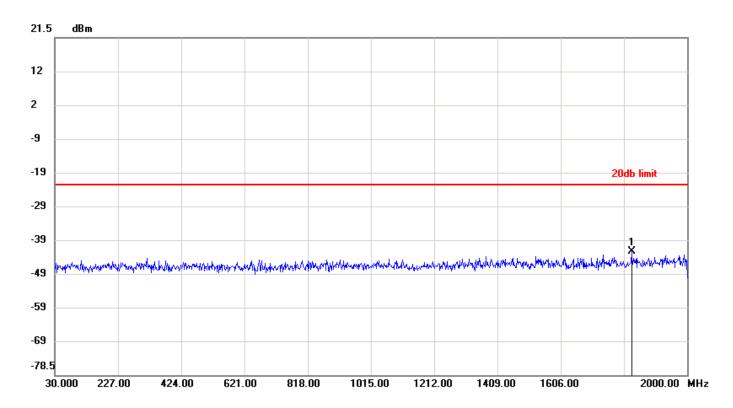


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1828.5443	-41.77	-22.17	-19.60



Report No.: SZEM150500298802

Page: 105 of 158

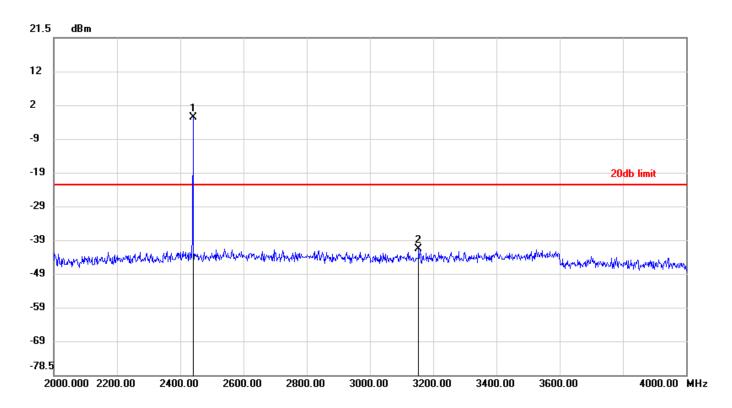


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9333	-2.17	-22.17	20.00
2	3155.1333	-41.06	-22.17	-18.89



Report No.: SZEM150500298802

Page: 106 of 158

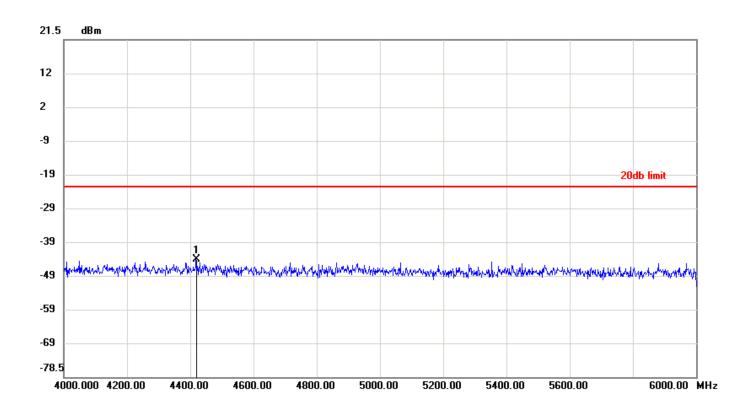


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4418.4667	-43.72	-22.17	-21.55



Report No.: SZEM150500298802

Page: 107 of 158

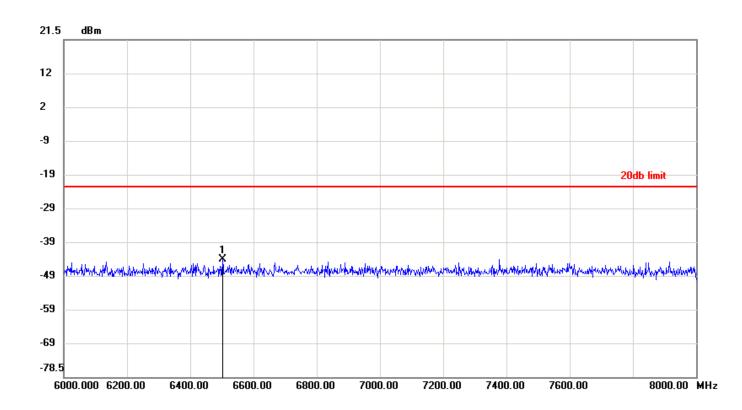


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6502.9333	-43.53	-22.17	-21.36



Report No.: SZEM150500298802

Page: 108 of 158

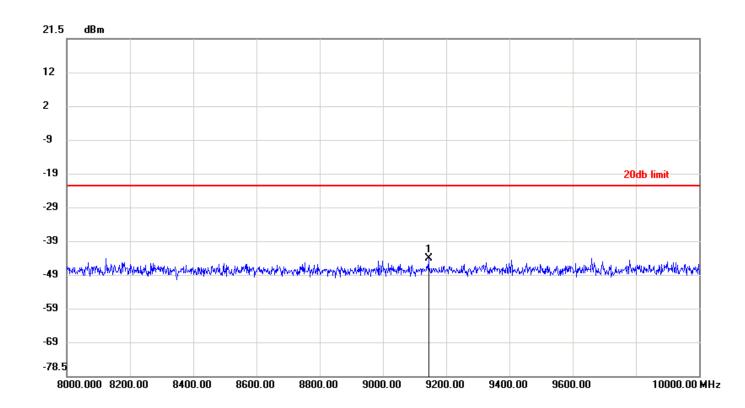

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9144.2000	-43.59	-22.17	-21.42






Report No.: SZEM150500298802

Page: 109 of 158

Test mode:	π/4DQPSK	Test channel:	Highest
------------	----------	---------------	---------

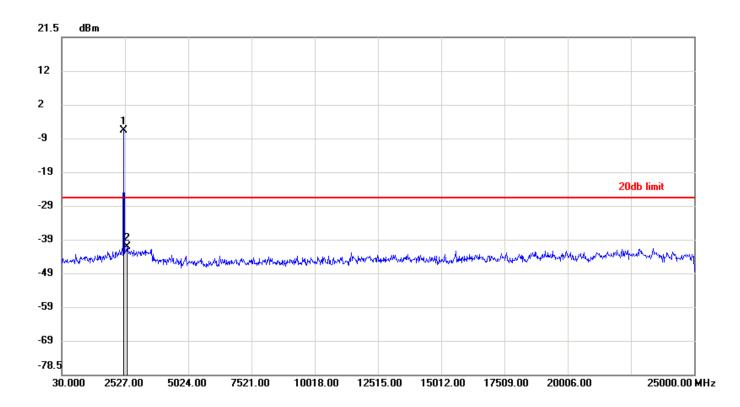


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.5570	-6.03	-26.03	20.00
2	2614.3950	-40.60	-26.03	-14.57



Report No.: SZEM150500298802

Page: 110 of 158

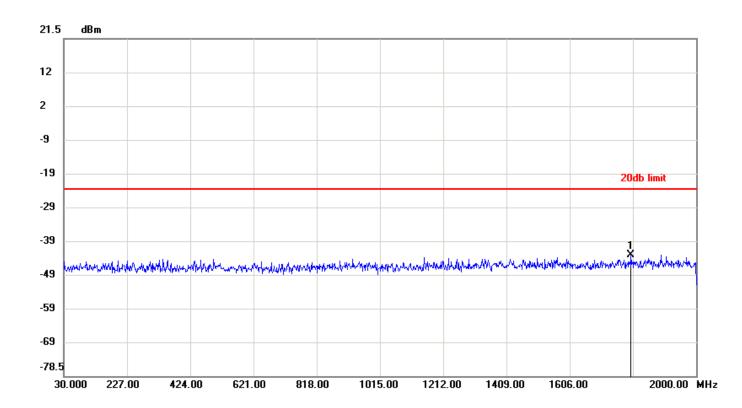


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1797.2213	-42.52	-23.04	-19.48



Report No.: SZEM150500298802

Page: 111 of 158

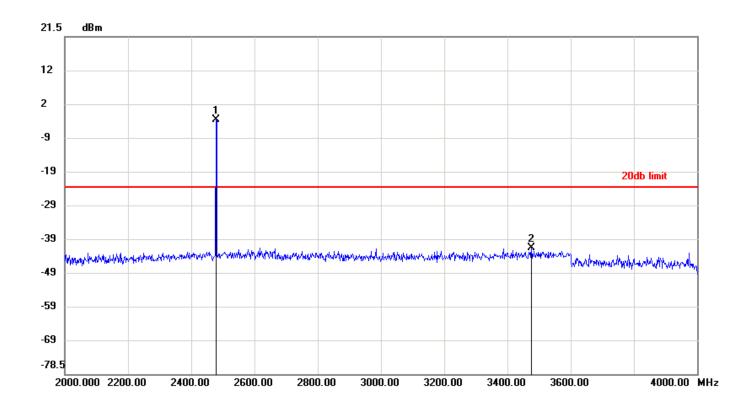


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.9333	-3.04	-23.04	20.00
2	3477.3333	-41.11	-23.04	-18.07



Report No.: SZEM150500298802

Page: 112 of 158

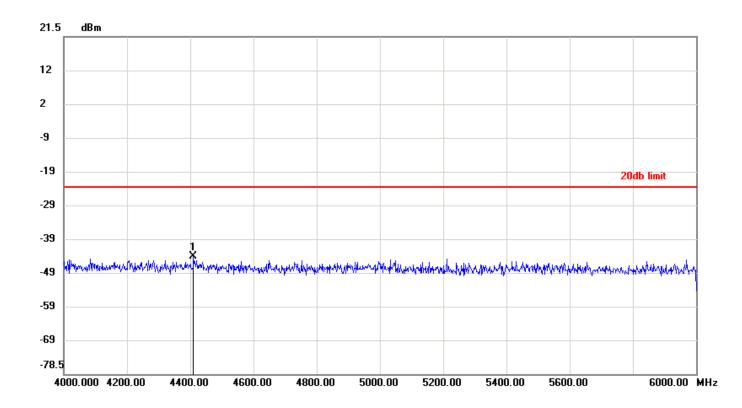


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4411.3333	-43.73	-23.04	-20.69



Report No.: SZEM150500298802

Page: 113 of 158

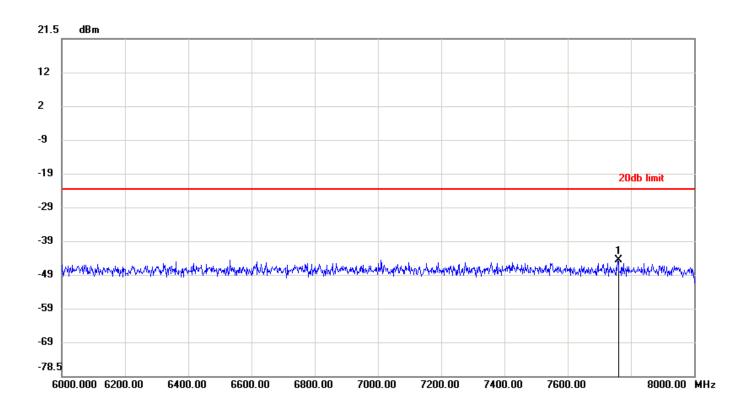


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7759.2667	-44.12	-23.04	-21.08



Report No.: SZEM150500298802

Page: 114 of 158

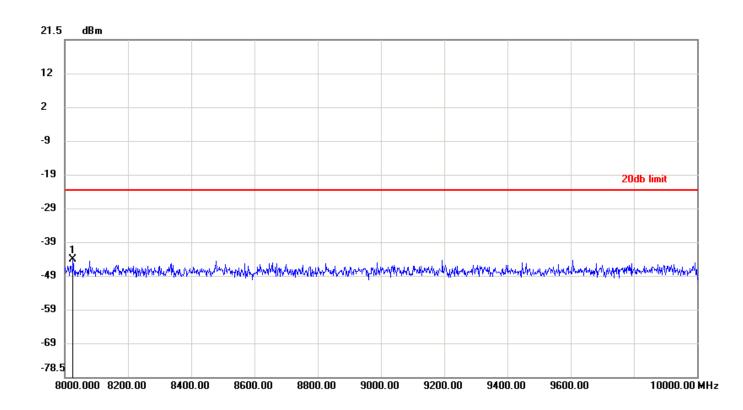


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8026.9333	-43.71	-23.04	-20.67



Report No.: SZEM150500298802

Page: 115 of 158



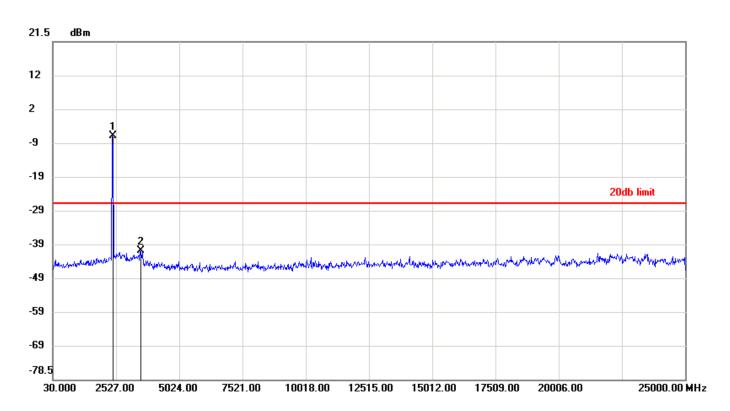


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3177	-6.38	-26.38	20.00
2	3490.0097	-40.45	-26.38	-14.07



Report No.: SZEM150500298802

Page: 116 of 158

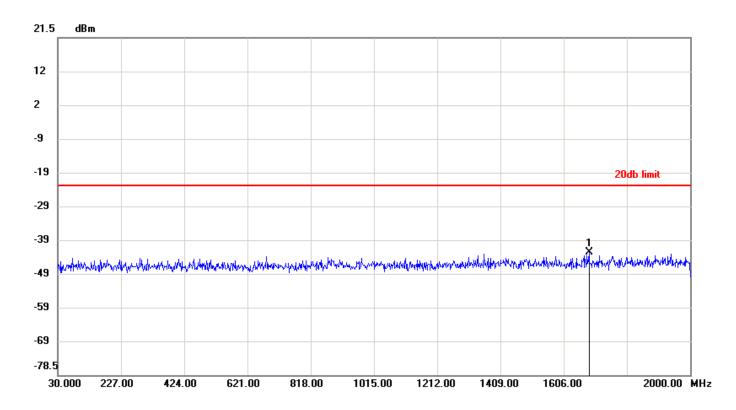


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1685.3253	-42.20	-22.42	-19.78



Report No.: SZEM150500298802

Page: 117 of 158

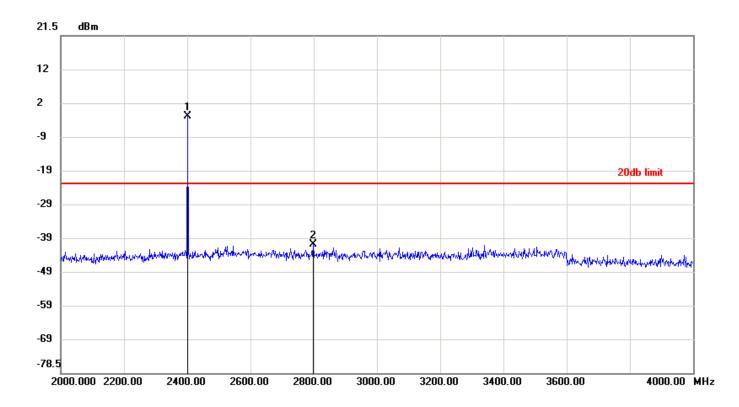


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.9333	-2.42	-22.42	20.00
2	2799.5333	-40.43	-22.42	-18.01



Report No.: SZEM150500298802

Page: 118 of 158

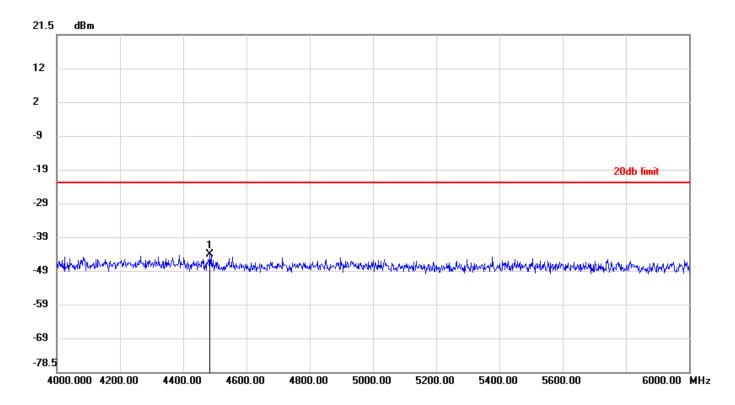


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4485.4000	-43.73	-22.42	-21.31





Report No.: SZEM150500298802

Page: 119 of 158

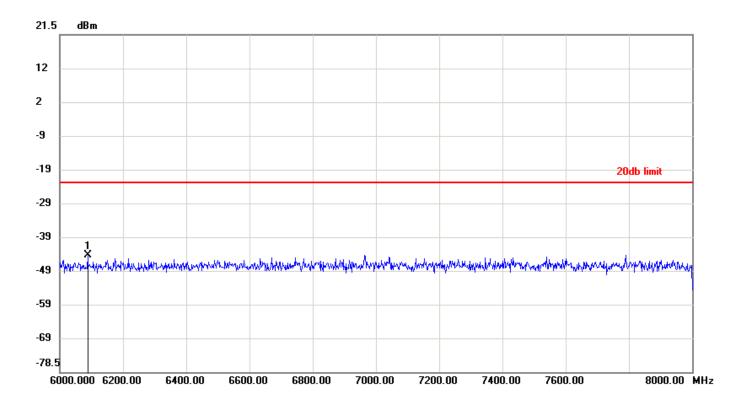


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6088.0000	-43.78	-22.42	-21.36



Report No.: SZEM150500298802

Page: 120 of 158

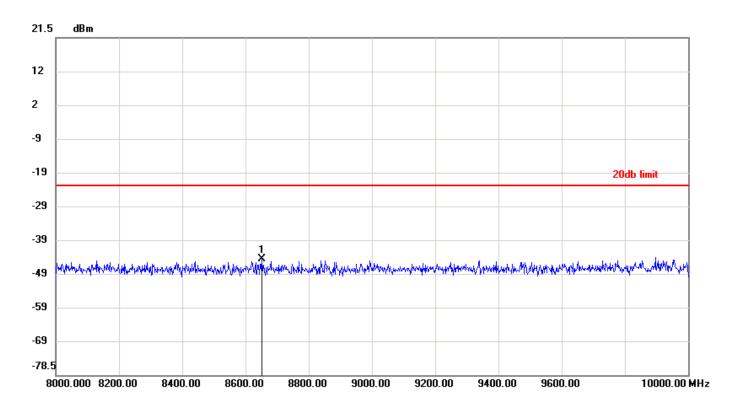



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8653.4000	-44.07	-22.42	-21.65



Report No.: SZEM150500298802

Page: 121 of 158



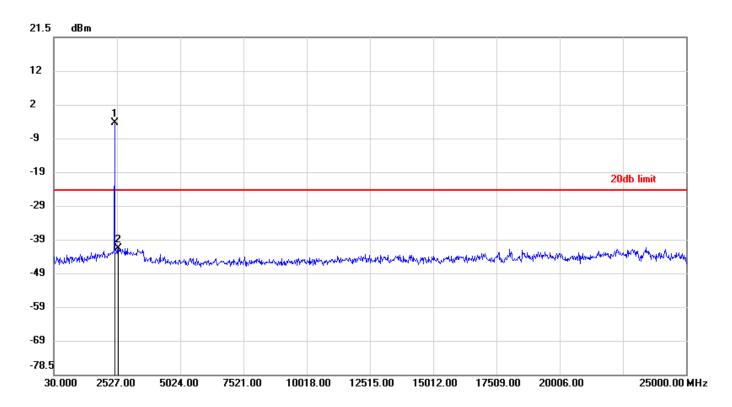


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4373	-3.80	-23.80	20.00
2	2589.4250	-41.15	-23.80	-17.35



Report No.: SZEM150500298802

Page: 122 of 158

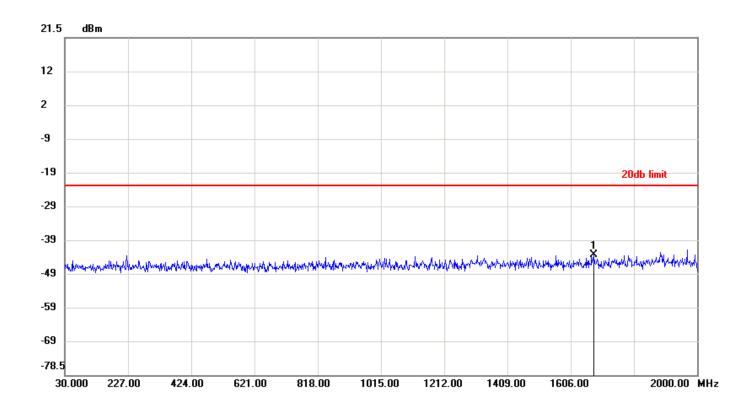


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1679.8093	-42.84	-22.25	-20.59



Report No.: SZEM150500298802

Page: 123 of 158

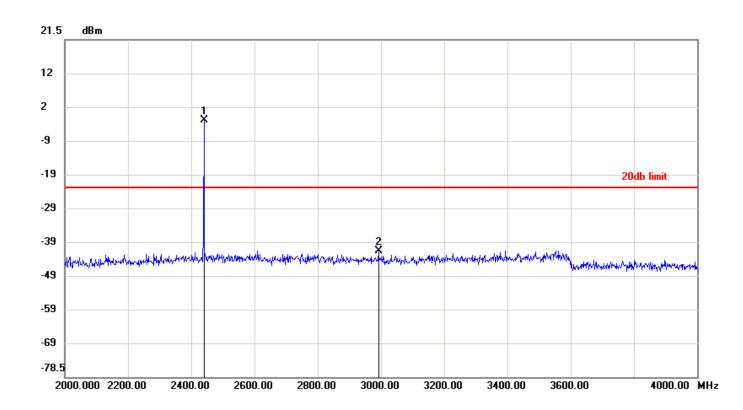


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9333	-2.25	-22.25	20.00
2	2992.0000	-41.10	-22.25	-18.85



Report No.: SZEM150500298802

Page: 124 of 158

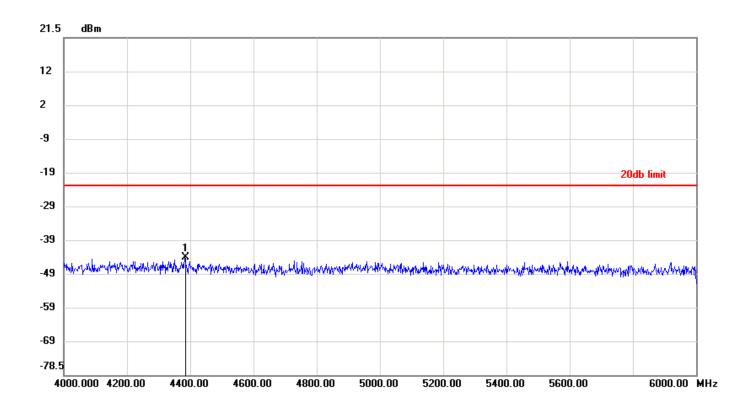


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4383.8667	-43.57	-22.25	-21.32



Report No.: SZEM150500298802

Page: 125 of 158

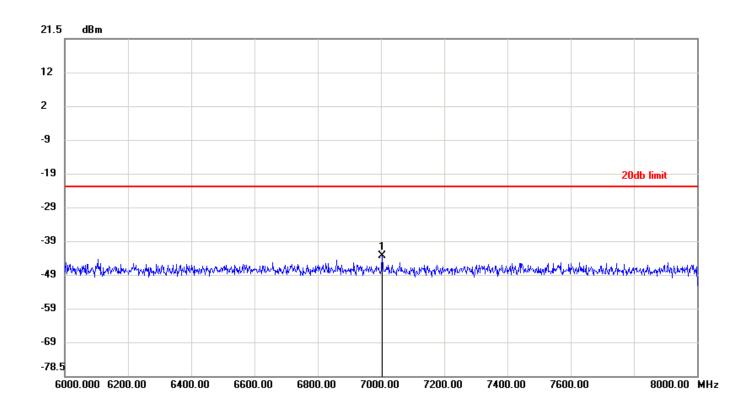


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7005.5333	-42.98	-22.25	-20.73



Report No.: SZEM150500298802

Page: 126 of 158

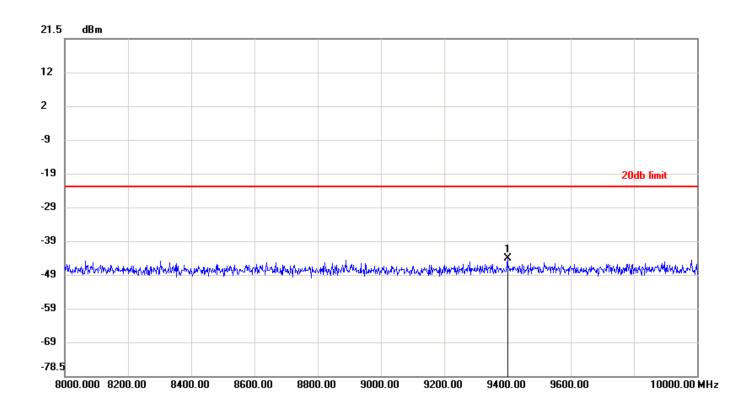


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9401.7333	-43.51	-22.25	-21.26



Report No.: SZEM150500298802

Page: 127 of 158

Test mode:	8DPSK	Test channel:	Highest
			0

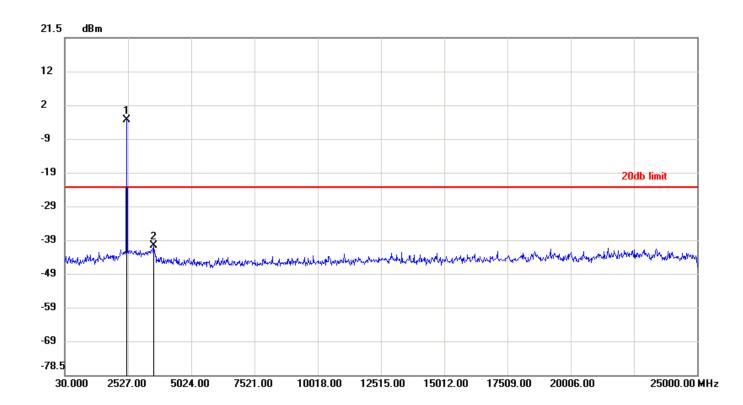


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.5570	-2.81	-22.81	20.00
2	3534.1233	-40.19	-22.81	-17.38



Report No.: SZEM150500298802

Page: 128 of 158

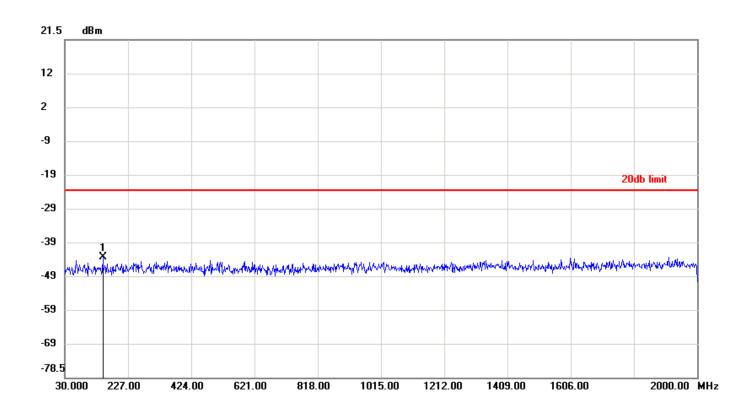


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	148.5940	-42.89	-23.24	-19.65





Report No.: SZEM150500298802

Page: 129 of 158

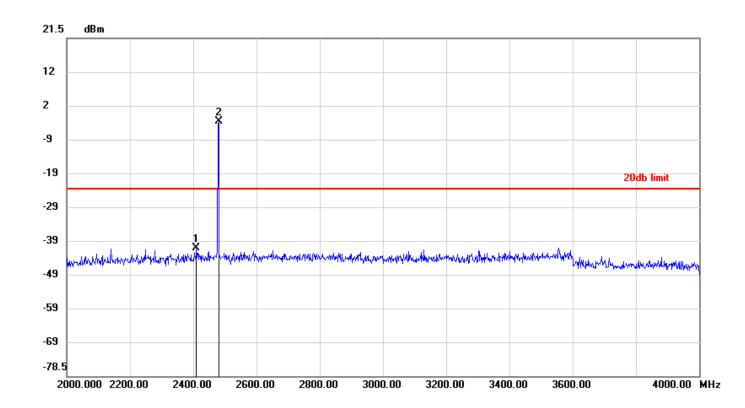


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2411.1333	-40.71	-23.24	-17.47
2	2480.0000	-3.24	-23.24	20.00



Report No.: SZEM150500298802

Page: 130 of 158

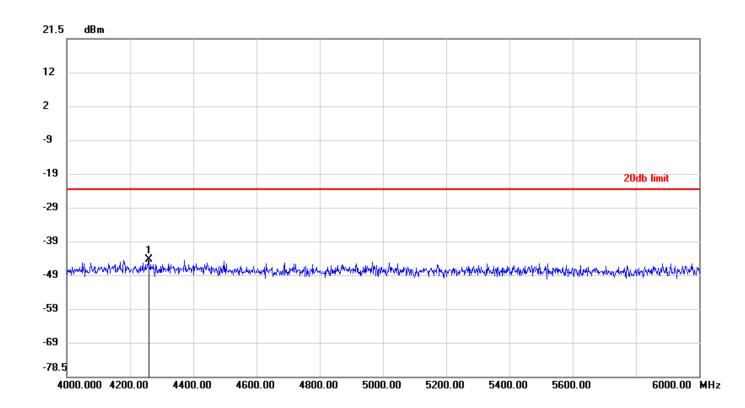


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4258.4667	-43.87	-23.24	-20.63



Report No.: SZEM150500298802

Page: 131 of 158

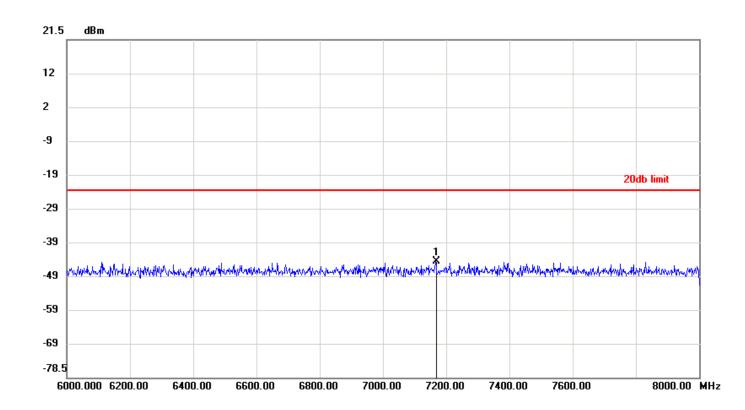


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7167.2667	-44.04	-23.24	-20.80



Report No.: SZEM150500298802

Page: 132 of 158

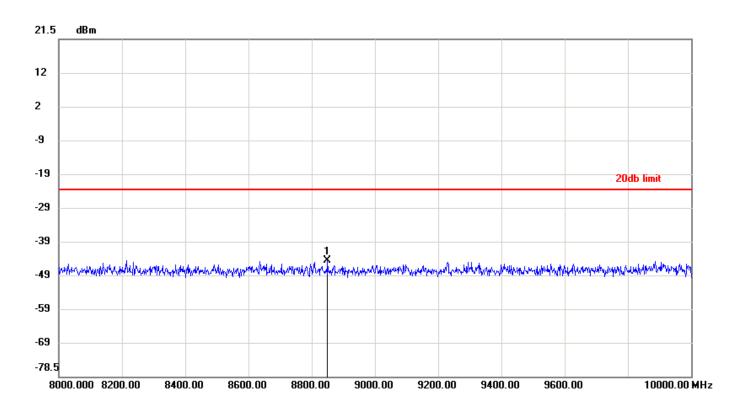

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8851.3333	-44.17	-23.24	-20.93

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150500298802

Page: 133 of 158

6.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage


outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM150500298802

Page: 134 of 158

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM150500298802

Page: 135 of 158

6.11 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Section	7 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009	NSI C63.10: 2009 easurement Distance: 3m (Semi-Anechoic Chamber)								
Test Site:	Measurement Distance	: 3m	ı (Semi-Anech	oic Cham	ber)					
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark				
	0.009MHz-0.090MHz		Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MHz		Average	10kHz	z 30kHz	Average				
	0.090MHz-0.110MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	Peak	10kHz	z 30kHz	Peak					
	0.110MHz-0.490MH	Average	10kHz	z 30kHz	Average					
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	30MHz-1GHz	30MHz-1GHz			Iz 300kHz	Quasi-peak				
	Abovo 1GHz	Ab 4011-		1MHz	3MHz	Peak				
	Above 1GHz		Peak	1MHz	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m	11			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		100	40.0	Quasi-peak	3				
	88MHz-216MHz		150	43.5	Quasi-peak	3				
	216MHz-960MHz		200	46.0	Quasi-peak	3				
	960MHz-1GHz		500	54.0	Quasi-peak	3				
	Above 1GHz	500	54.0	Average	3					
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.									



Report No.: SZEM150500298802

Page: 136 of 158

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB



Report No.: SZEM150500298802

Page: 137 of 158

margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)					
h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.					
i. Repeat above procedures until all frequencies measured was complete.					
Non-hopping transmitting mode with all kind of modulation and all kind of					
data type .Transmitting mode.					
Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.					
For below 1GHz part, through pre-scan, the worst case is the lowest channel.					
Only the worst case is recorded in the report.					
Refer to section 5.10 for details					
Pass					



Report No.: SZEM150500298802

Page: 138 of 158

6.11.1 Duty cycle

Test Requirement:	RSS-Gen Issue 4				
Test Method:	ANSI C63.10:2013				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table				
	Ground Reference Plane				
Instruments Used:	Refer to section 5.10 for details				
Limit:	N/A				
Test Mode:	Transmitter mode				
Test Results:	Pass				

Measurement Data

Measurement Data					
	PDCF=20 log(Duty cycle)				
Calculate Formula:	Duty cycle= T on time / T period				
(DH1)Test data:	Ton time =0.397				
	T period =100				
	PDCF=-48.02				

	Ton time =1.65
(DH3)Test data:	T period =100
	PDCF=-35.65


		SGS IT
	Ton time =2.89	S 添加 AB
(DH5)Test data:	T period =100	10 th 411
	PDCF=-30.78	ENZHE




Report No.: SZEM150500298802

Page: 139 of 158



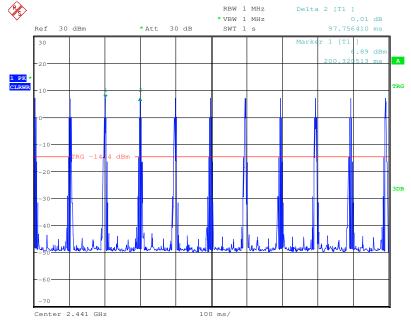

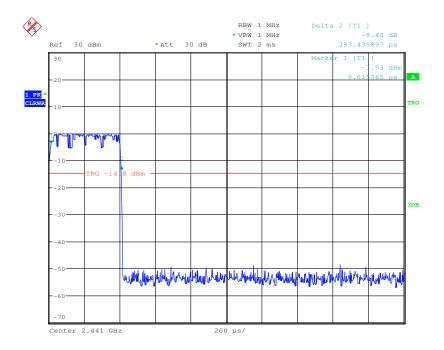





Report No.: SZEM150500298802

Page: 140 of 158

DH-3

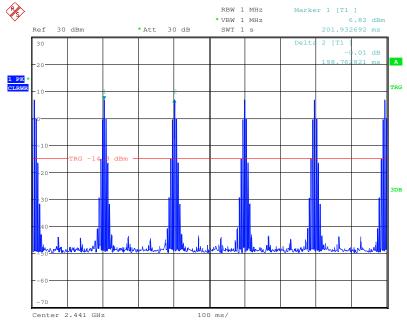

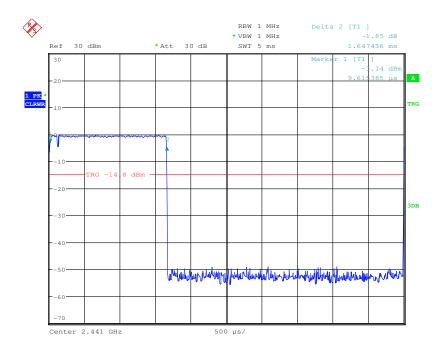





Report No.: SZEM150500298802

Page: 141 of 158

DH-5

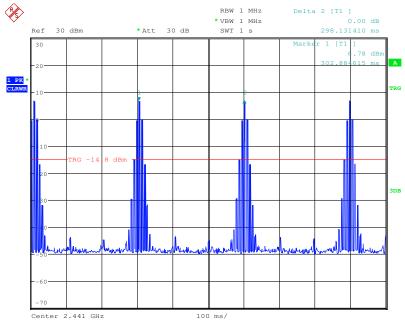

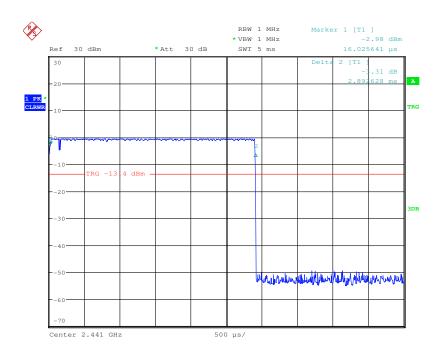




Report No.: SZEM150500298802

Page: 142 of 158

6.11.2 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

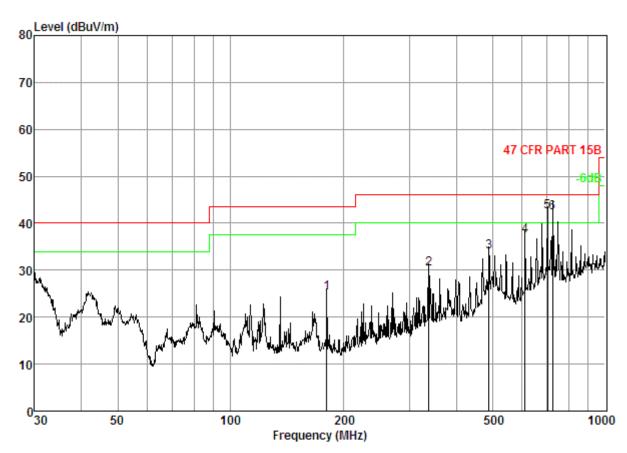

Condition: 47 CFR PART 15B 3m VERTICAL


Job No. : 2988CR Test Mode:


	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
_	MHz	d₿	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	180. 65 338. 40 489. 03 609. 92 701. 76 722. 59	2. 03 2. 97 3. 64 4. 23 4. 58 4. 60	9. 91 15. 18 17. 64 19. 94 21. 69 21. 61	25. 59 24. 50 26. 58 26. 73 26. 33 26. 41	38. 76 36. 62 39. 33 39. 98 42. 61 42. 39	25. 11 30. 27 34. 03 37. 42 42. 55 42. 19	46.00	-18.39 -15.73 -11.97 -8.58 -3.45 -3.81



Report No.: SZEM150500298802

Page: 143 of 158



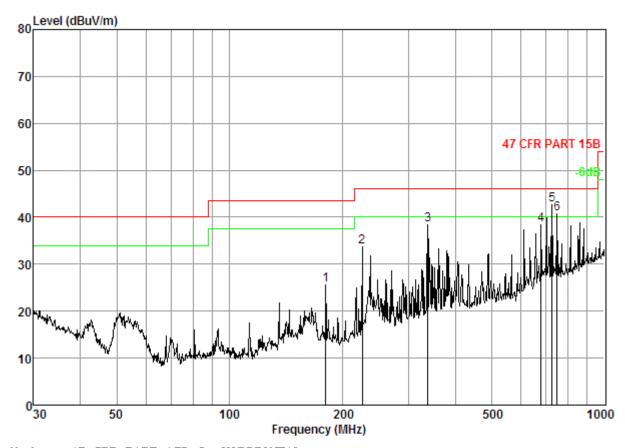

Condition: 47 CFR PART 15B 3m HORIZONTAL

Job No. : 2988CR

Test Mode:

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
,	MHz	d₿	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5 6	180.65 226.10 338.40 677.58 724.26 747.48	2. 03 2. 30 2. 97 4. 44 4. 61 4. 89	9. 91 11. 44 15. 18 21. 34 21. 60 21. 60	25. 59 24. 75 24. 50 26. 38 26. 42 26. 51	39. 22 44. 77 44. 72 38. 97 42. 83 40. 82	25. 57 33. 76 38. 37 38. 37 42. 62 40. 80		-17. 93 -12. 24 -7. 63 -7. 63 -3. 38 -5. 20




Report No.: SZEM150500298802

Page: 144 of 158

6.11.3 Transmitter Emission above 1GHz

2402 Horizontal - Worst case GFSK (DH5)

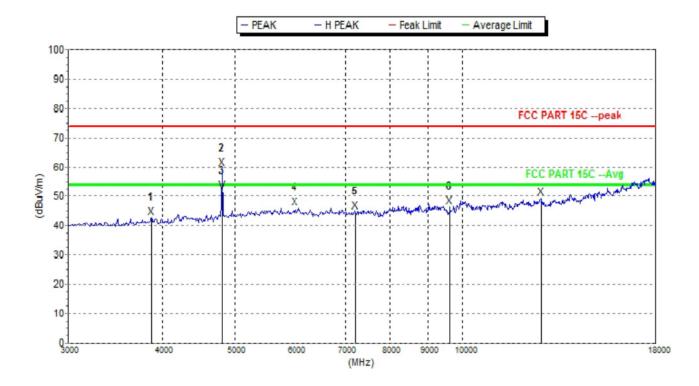

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.	Hi.(cm)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Aux.F.(dB)	Pol.
Peak:)						
1	3870.000	42.8	74.0	31.2	210	0	33.3	0.0	-32.5	0.0	Н
2	4804	59.6	74.0	14.4	357	0	34.3	0.0	-31.8	0.0	Н
3	6000.000	46.1	74.0	27.9	352	0	34.9	0.0	-30.3	0.0	Н
4	7206	44.9	74.0	29.1	63	0	35.8	0.0	-30.2	0.0	Н
5	9608	46.5	74.0	27.5	259	0	37.2	0.0	-27.9	0.0	Н
6	12705.000	49.4	74.0	24.6	140	0	38.1	0.0	-26.7	0.0	Н


4804MHz AV=PK+PDCF=59.6-30.78=28.82<54



Report No.: SZEM150500298802

Page: 145 of 158

2402 Vertical -Worst case GFSK (DH5)

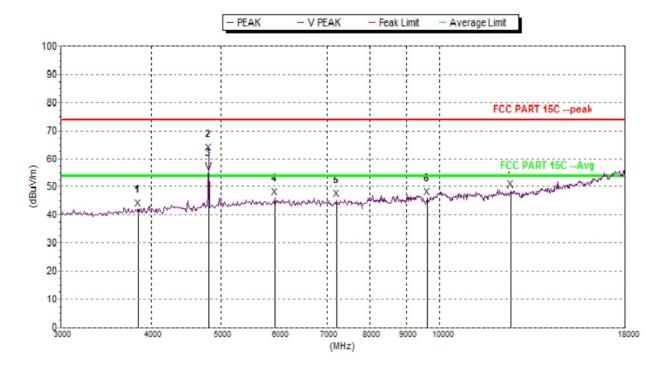

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.	Hi.(cm)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Aux.F.(dB)	Pol.
Peak:)						
1	3840.000	42.1	74.0	31.9	75	-	33.3	0.0	-32.5	0.0	V
2	4804	61.8	74.0	12.2	4		34.3	0.0	-31.8	0.0	V
3	5925.000	46.3	74.0	27.7	21		34.7	0.0	-30.4	0.0	V
4	7206	45.4	74.0	28.6	123		35.8	0.0	-30.2	0.0	V
5	9608	46.3	74.0	27.7	86		37.2	0.0	-27.9	0.0	V
6	12540.000	48.7	74.0	25.3	357		38.0	0.0	-26.4	0.0	V


4804MHz AV=PK+PDCF=61.8-30.78=31.02<54



Report No.: SZEM150500298802

Page: 146 of 158

2441 Horizontal -Worst case GFSK (DH5)

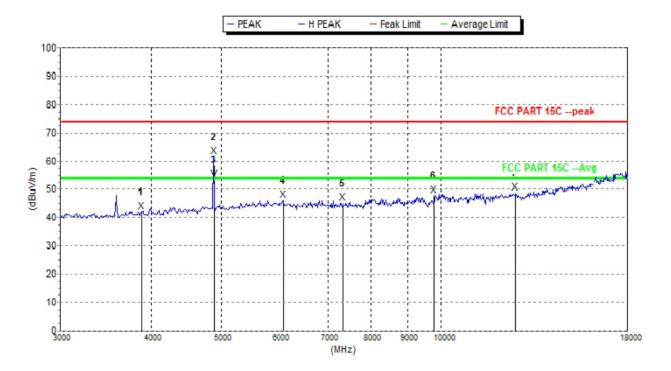

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.	Hi.(cm)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Aux.F.(dB)	Pol.
Peak:)						
1	3885.000	42.3	74.0	31.7	157	0	33.2	0.0	-32.5	0.0	Н
2	4882	61.6	74.0	12.4	353	0	34.6	0.0	-31.8	0.0	Н
3	6075.000	46.0	74.0	28.0	96	0	35.0	0.0	-30.5	0.0	Н
4	7323	45.2	74.0	28.8	75	0	35.7	0.0	-30.1	0.0	Н
5	9764	47.9	74.0	26.1	205	0	37.3	0.0	-27.3	0.0	Н
6	12645.000	48.7	74.0	25.3	15	0	38.1	0.0	-26.5	0.0	Н


4804MHz AV=PK+PDCF=61.6-30.78=30.82<54



Report No.: SZEM150500298802

Page: 147 of 158

2441 Vertical -Worst case GFSK (DH5)

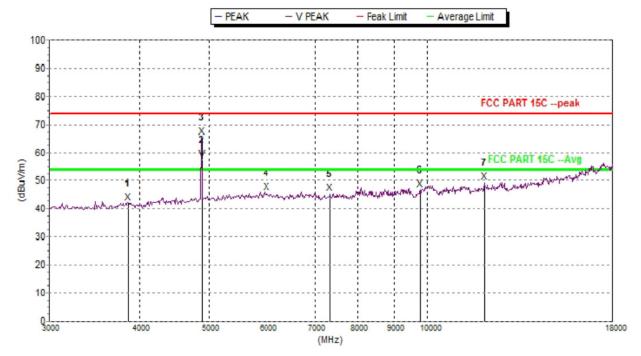

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.	Hi.(cm)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Aux.F.(dB)	Pol.
Peak:)						
1	3855.000	42.2	74.0	31.8	352		33.3	0.0	-32.5	0.0	V
2	4882	65.7	74.0	8.3	359		34.6	0.0	-31.8	0.0	V
3	6000.000	45.9	74.0	28.1	320		34.9	0.0	-30.3	0.0	V
4	7323	45.4	74.0	28.6	180		35.7	0.0	-30.1	0.0	V
5	9764	46.8	74.0	27.2	131	-	37.3	0.0	-27.3	0.0	V
6	11985.000	49.5	74.0	24.5	331		37.7	0.0	-26.5	0.0	V


4804MHz AV=PK+PDCF=65.7-30.78=34.92<54



Report No.: SZEM150500298802

Page: 148 of 158

2480 Horizontal -Worst case GFSK (DH5)

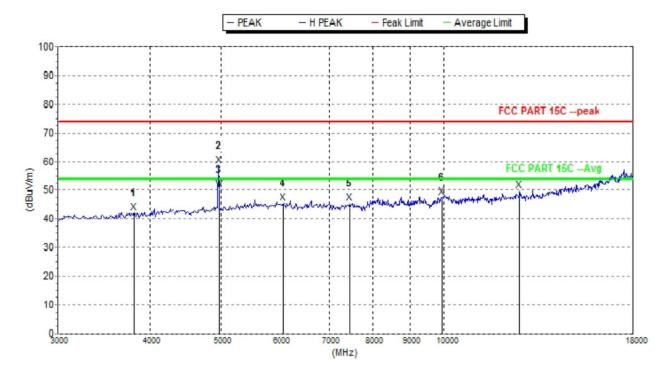

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.	Hi.(cm)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Aux.F.(dB)	Pol.
Peak:)						
1	3810.000	42.1	74.0	31.9	226	0	33.1	0.0	-32.4	0.0	Н
2	4960	58.5	74.0	15.5	351	0	34.6	0.0	-31.7	0.0	Н
3	6060.000	45.6	74.0	28.4	359	0	35.0	0.0	-30.5	0.0	Н
4	7440	45.4	74.0	28.6	57	0	35.8	0.0	-30.0	0.0	Н
5	9920	47.6	74.0	26.4	199	0	37.3	0.0	-26.6	0.0	Н
6	12645.000	49.8	74.0	24.2	3	0	38.1	0.0	-26.5	0.0	Н
		 									

4804MHz AV=PK+PDCF=58.5-30.78=27.72<54






Report No.: SZEM150500298802

Page: 149 of 158

2480 Vertical -Worst case GFSK (DH5)

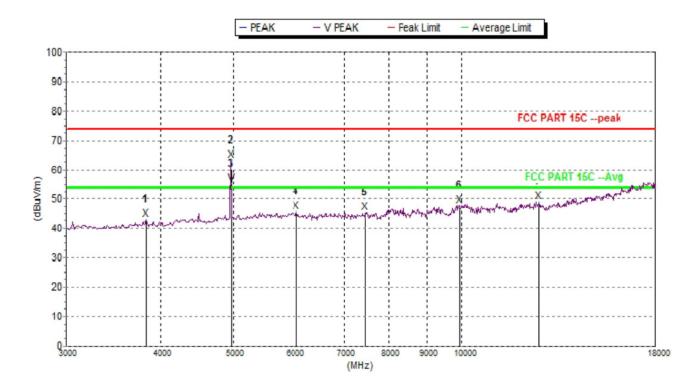

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.	Hi.(cm)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Aux.F.(dB)	Pol.
Peak:)						
1	3825.000	43.0	74.0	31.0	94		33.2	0.0	-32.5	0.0	٧
2	4960	63.3	74.0	10.7	351		34.6	0.0	-31.7	0.0	V
3	6045.000	45.8	74.0	28.2	306		35.0	0.0	-30.4	0.0	V
4	7440	45.5	74.0	28.5	13		35.8	0.0	-30.0	0.0	V
5	9920	47.8	74.0	26.2	359		37.3	0.0	-26.6	0.0	V
6	12645.000	49.0	74.0	25.0	40	0	34.6	0.0	-31.7	0.0	V

4804MHz AV=PK+PDCF=63.3-30.78=32.52<54

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Report No.: SZEM150500298802

Page: 150 of 158

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.




Report No.: SZEM150500298802

Page: 151 of 158

6.12Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	5.209 and 15.205								
Test Method:	ANSI C63.10: 2009	NSI C63.10: 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)									
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	Above IGHZ	74.0	Peak Value							
Test Setup:										






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM150500298802

Page: 152 of 158


Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type. Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass
	·



Report No.: SZEM150500298802

Page: 153 of 158

Test plot as follows:

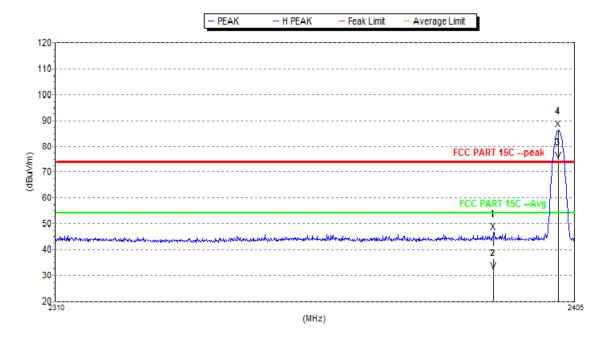


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	46.6	74.0	27.4	32.5	0.0	-20.8	Н
2 F	2402.055	86.4	74.0	-12.4	32.6	0.0	-21.0	Н
Avg								
1	2390	31.8	54.0	22.2	32.5	0.0	-20.9	
2 F	2402.055	74.6	54.0	-20.6	32.6	0.0	-21.1	Н



Report No.: SZEM150500298802

Page: 154 of 158

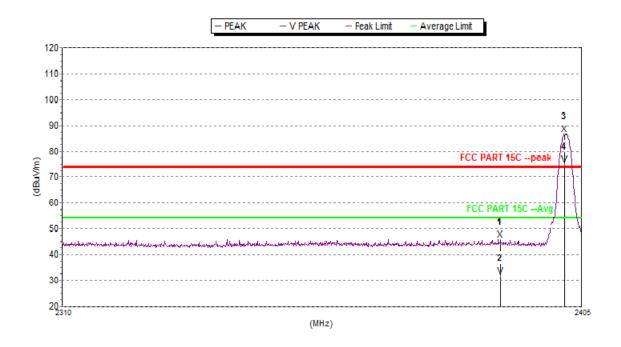


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	45.7	74.0	28.3	32.5	0.0	-20.8	٧
2 F	2401.865	86.5	74.0	-12.5	32.5	0.0	-20.8	V
Avg								
1	2390	31.7	54.0	22.3	32.5	0.0	-20.8	
2 F	2401.865	74.9	54.0	-20.9	32.6	0.0	-21.0	V



Report No.: SZEM150500298802

Page: 155 of 158

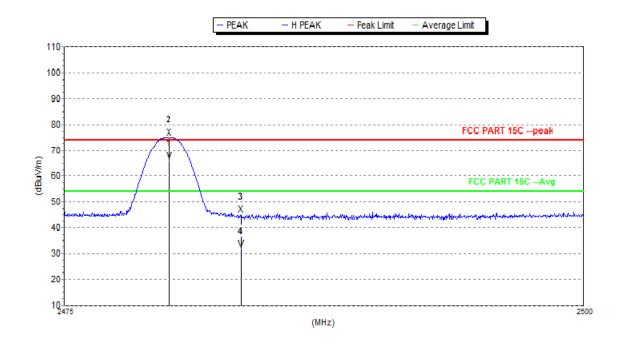


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2480.075	74.9	74.0	-0.9	32.5	0.0	-20.5	Н
2	2483.5	45.1	74.0	28.9	32.5	0.0	-20.5	Н
Avg								
1 F	2480.075	65.7	54.0	-11.7	32.5	0.0	-20.5	
2	2483.5	31.6	54.0	22.4	32.5	0.0	-20.5	Н



Report No.: SZEM150500298802

Page: 156 of 158

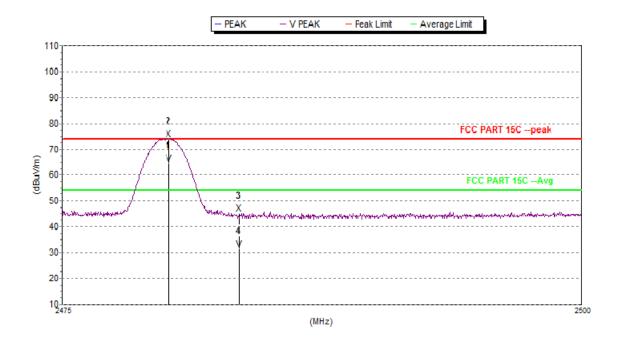

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2480.125	73.9	74.0	0.1	32.5	0.0	-20.5	٧
2	2483.5	45.1	74.0	28.9	32.5	0.0	-20.5	٧
Avg								
1 F	2480.125	64.6	54.0	-10.6	32.5	0.0	-20.5	V
2	2483.5	31.5	54.0	22.5	32.5	0.0	-20.5	V

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150500298802

Page: 157 of 158

7 Photographs - EUT Test Setup

Test model No.:NT-503

7.1 Conducted Emission



7.2 Radiated Emission





Report No.: SZEM150500298802

Page: 158 of 158

7.3 Radiated Spurious Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1505002988CR.

