



TEST REPORT

Report No. : CHTEW20060008 Report Verification: 
Project No. : SHT2005070601EW
FCC ID. : 2AVTH-LO14WA
Applicant's name : Hyundai Technology Group, Inc.
Address : 2601 Walnut Ave. Tustin, CA, USA
Manufacturer : Hyundai Technology Group, Inc.
Address : 2601 Walnut Ave. Tustin, CA, USA
Test item description : Notebook
Trade Mark : HYUNDAI
Model/Type reference : Hyundai Onnyx III
Listed Model(s) : LO14WA1BK, LO14WA1B, LO14WB1B, LO14WA1S, LO14WA1R
G, LO14WB1S, Hyundai Onnyx III Plus
Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample : May 18, 2020
Date of testing : May 19, 2020-Jun.01, 2020
Date of issue : Jun.01, 2020
Result : PASS

Compiled by
(Position+Printed name+Signature): File administrator Fanghui Zhu

Fanghui Zhu

Supervised by
(Position+Printed name+Signature): Project Engineer Kiki Kong

Kiki Kong

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	25
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>33</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>35</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>35</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-06-01	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247(b)(3)	PASS
5.4	Power Spectral Density	15.247(e)	PASS
5.5	6dB Bandwidth	15.247(a)(2)	PASS
5.6	99% Occupied Bandwidth	-	PASS ^{*1}
5.7	Duty cycle	-	PASS ^{*1}
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.9	Radiated Band Edge Emission	15.205/15.209	PASS
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Hyundai Technology Group, Inc.
Address:	2601 Walnut Ave. Tustin, CA, USA
Manufacturer:	Hyundai Technology Group, Inc.
Address:	2601 Walnut Ave. Tustin, CA, USA

3.2. Product Description

Name of EUT:	Notebook
Trade Mark:	HYUNDAI
Model No.:	Hyundai Onnyx III
Listed Model(s):	LO14WA1BK,LO14WA1B,LO14WB1B,LO14WA1S,LO14WA1RG, LO14WB1S,Hyundai Onnyx III Plus
Power supply:	DC 7.6V
Hardware version:	IP3_AN10F MB_V30
Software version:	1909
Adapter Information:	Model: RY-24A120200VU Input: AC 100-240V~ 50/60Hz 0.8A Output: DC 12V 2.0A
Battery Information:	Model: NV-3285128-2S NOM 7.6V 5000mAh 38Wh Max Voltage: 8.7V

3.3. Radio Specification Description

Support type ^{*2} :	802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	1.32 dBi

Note:

*2: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/802.11g/802.11n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
· :	· :	· :	· :
06	2437	06	2437
· :	· :	· :	· :
10	2457	08	2447
11	2462	09	2452

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX 142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2018/04/04	2021/04/03
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/08/21	2020/08/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX 104	501184/4	2020/05/27	2021/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2018/10/11	2021/10/10
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/11
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2020/05/23	2021/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25
●	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25
○	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

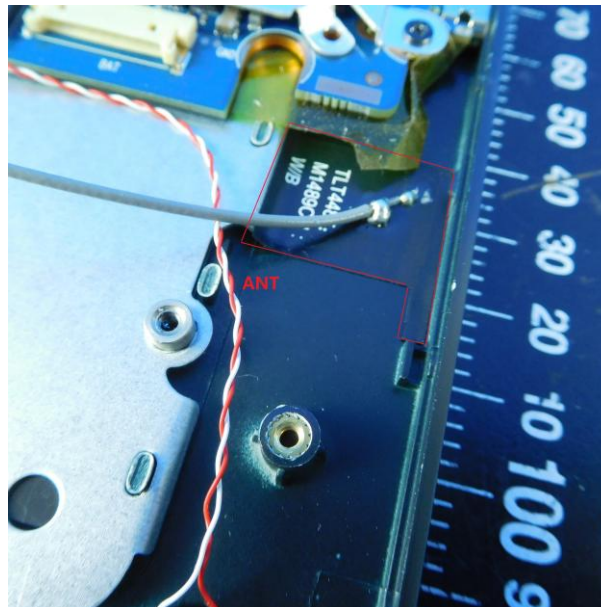
FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

☒ Passed ☐ Not Applicable

The antenna type is a FPC antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. AC Conducted Emission

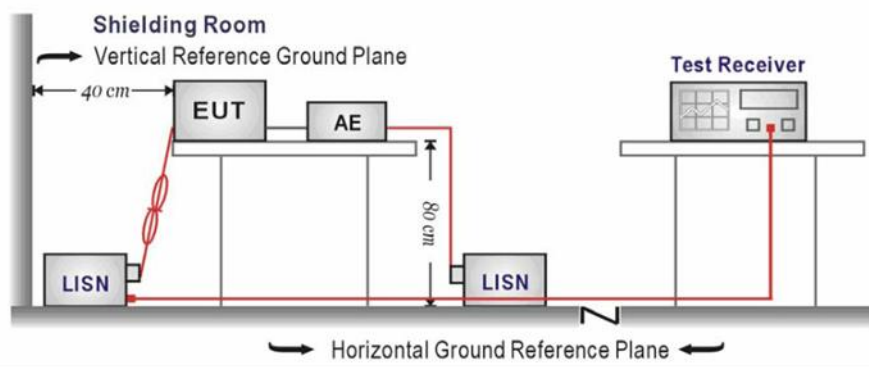
LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

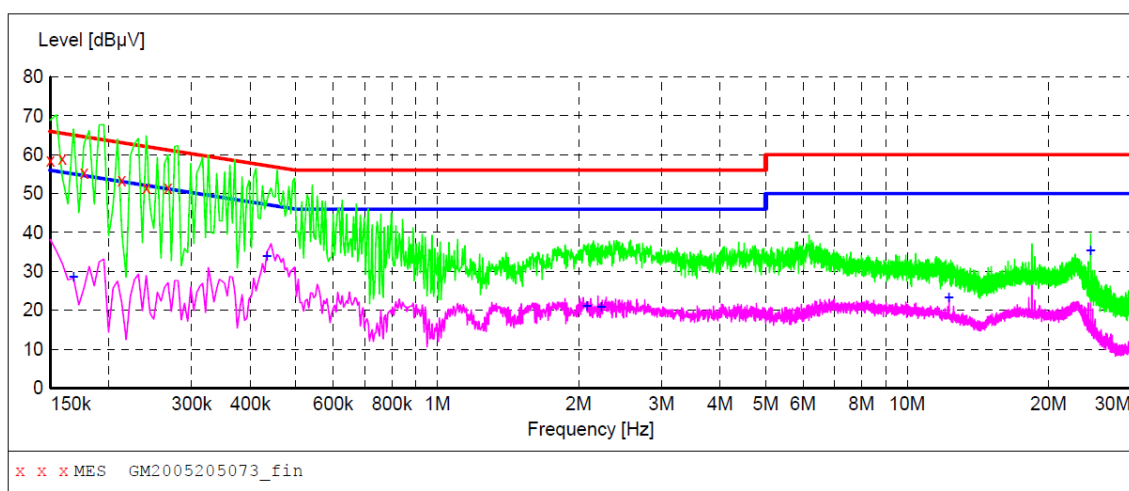
Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

**MEASUREMENT RESULT: "GM2005205073_fin"**

5/20/2020 5:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	58.60	10.0	66	7.4	QP	L1	GND
0.159000	58.90	10.0	66	6.6	QP	L1	GND
0.177000	55.50	10.0	65	9.1	QP	L1	GND
0.213000	53.40	10.0	63	9.7	QP	L1	GND
0.240000	51.60	10.0	62	10.5	QP	L1	GND
0.267000	51.50	10.0	61	9.7	QP	L1	GND

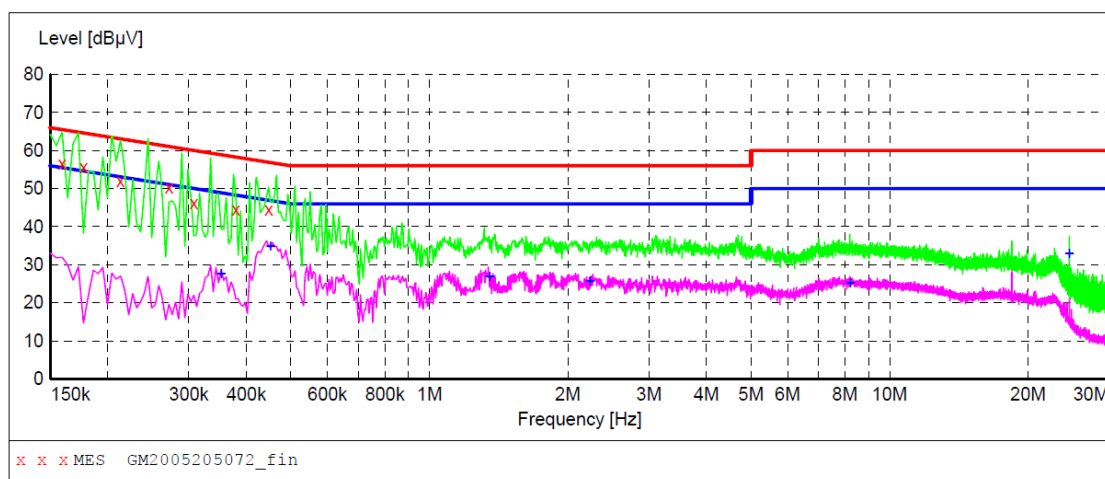
MEASUREMENT RESULT: "GM2005205073_fin2"

5/20/2020 5:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	28.60	10.0	55	26.5	AV	L1	GND
0.433500	33.80	10.1	47	13.4	AV	L1	GND
2.080500	21.10	10.1	46	24.9	AV	L1	GND
2.233500	20.80	10.1	46	25.2	AV	L1	GND
12.286500	23.20	10.4	50	26.8	AV	L1	GND
24.576000	35.30	10.6	50	14.7	AV	L1	GND

Test Line:

N

**MEASUREMENT RESULT: "GM2005205072_fin"**

5/20/2020 5:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	56.50	10.0	66	9.0	QP	N	GND
0.177000	55.60	10.0	65	9.0	QP	N	GND
0.213000	52.00	10.0	63	11.1	QP	N	GND
0.271500	50.20	10.1	61	10.9	QP	N	GND
0.307500	46.30	10.1	60	13.7	QP	N	GND
0.379500	44.50	10.1	58	13.8	QP	N	GND
0.447000	44.50	10.1	57	12.4	QP	N	GND

MEASUREMENT RESULT: "GM2005205072_fin2"

5/20/2020 5:22PM

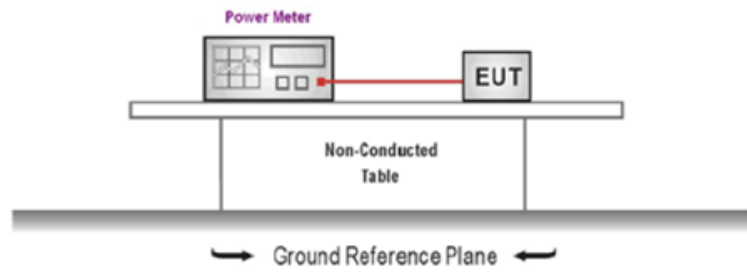
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	27.50	10.1	49	21.4	AV	N	GND
0.451500	34.90	10.1	47	11.9	AV	N	GND
1.351500	26.90	10.1	46	19.1	AV	N	GND
2.233500	25.70	10.1	46	20.3	AV	N	GND
8.209500	25.30	10.3	50	24.7	AV	N	GND
24.576000	32.80	10.6	50	17.2	AV	N	GND

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix A on the appendix report

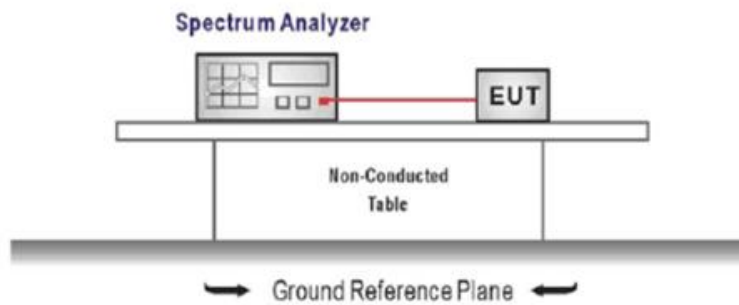
5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix B on the appendix report

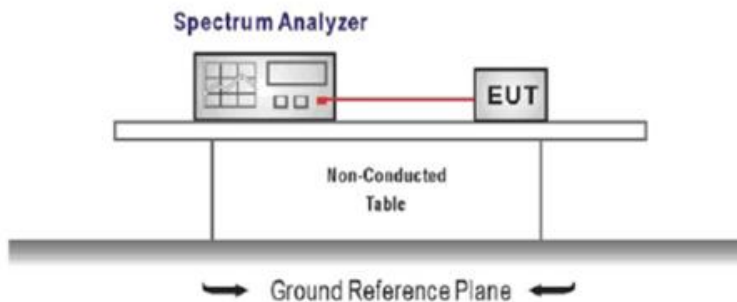
5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

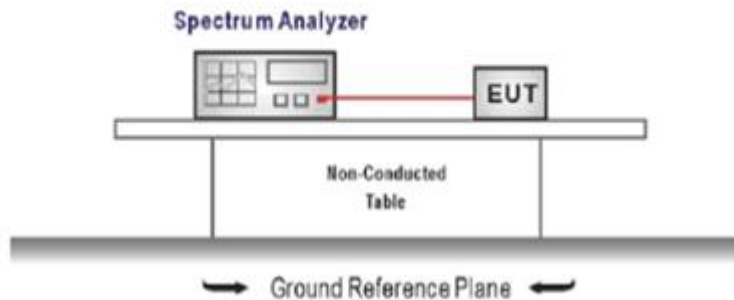
Please refer to appendix C on the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

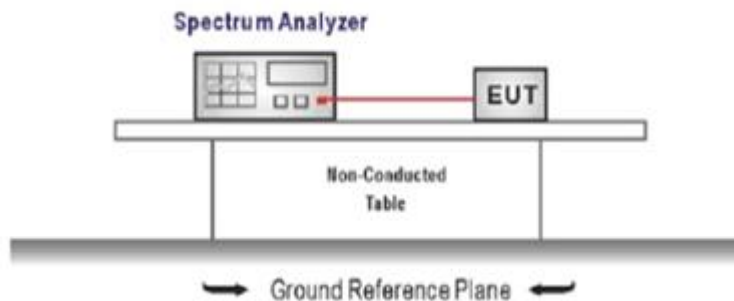
Please refer to appendix D on the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW $\geq$ RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE:

Please refer to the clause 4.2

TEST Data

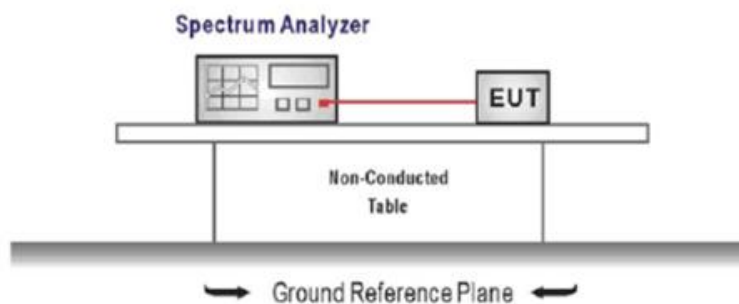
Please refer to appendix E on the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

TEST Data

Please refer to appendix F on the appendix report

5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor+ Aux Factor
- 2) Over Limit = Level - Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

802.11b						CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	33.52	27.96	7.73	38.17	20.00	51.04	74.00	-22.96	Vertical	Peak
2390.03	33.97	27.72	7.84	37.97	20.00	51.56	74.00	-22.44	Vertical	Peak
2310.00	33.89	27.96	7.73	38.17	20.00	51.41	74.00	-22.59	Horizontal	Peak
2390.03	34.36	27.72	7.84	37.97	20.00	51.95	74.00	-22.05	Horizontal	Peak
2310.00	28.01	27.96	7.73	38.17	20.00	45.53	54.00	-8.47	Vertical	Average
2390.03	27.52	27.72	7.84	37.97	20.00	45.11	54.00	-8.89	Vertical	Average
2310.00	27.56	27.96	7.73	38.17	20.00	45.08	54.00	-8.92	Horizontal	Average
2390.03	26.58	27.72	7.84	37.97	20.00	44.17	54.00	-9.83	Horizontal	Average
802.11b						CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	34.43	27.43	8.04	37.59	20.00	52.31	74.00	-21.69	Vertical	Peak
2500.00	35.73	27.40	8.08	37.38	20.00	53.83	74.00	-20.17	Vertical	Peak
2483.49	33.53	27.43	8.04	37.59	20.00	51.41	74.00	-22.59	Horizontal	Peak
2500.00	33.77	27.40	8.08	37.38	20.00	51.87	74.00	-22.13	Horizontal	Peak
2483.49	27.19	27.43	8.04	37.59	20.00	45.07	54.00	-8.93	Vertical	Average
2500.00	27.34	27.40	8.08	37.38	20.00	45.44	54.00	-8.56	Vertical	Average
2483.49	27.55	27.43	8.04	37.59	20.00	45.43	54.00	-8.57	Horizontal	Average
2500.00	28.67	27.40	8.08	37.38	20.00	46.77	54.00	-7.23	Horizontal	Average

802.11g						CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	34.91	27.96	7.73	38.17	20.00	52.43	74.00	-21.57	Vertical	Peak
2390.03	35.23	27.72	7.84	37.97	20.00	52.82	74.00	-21.18	Vertical	Peak
2310.00	35.18	27.96	7.73	38.17	20.00	52.70	74.00	-21.30	Horizontal	Peak
2390.03	33.72	27.72	7.84	37.97	20.00	51.31	74.00	-22.69	Horizontal	Peak
2310.00	28.01	27.96	7.73	38.17	20.00	45.53	54.00	-8.47	Vertical	Average
2390.03	27.05	27.72	7.84	37.97	20.00	44.64	54.00	-9.36	Vertical	Average
2310.00	29.02	27.96	7.73	38.17	20.00	46.54	54.00	-7.46	Horizontal	Average
2390.03	28.53	27.72	7.84	37.97	20.00	46.12	54.00	-7.88	Horizontal	Average
802.11 g						CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	35.10	27.43	8.04	37.59	20.00	52.98	74.00	-21.02	Vertical	Peak
2500.00	35.51	27.40	8.08	37.38	20.00	53.61	74.00	-20.39	Vertical	Peak
2483.49	34.34	27.43	8.04	37.59	20.00	52.22	74.00	-21.78	Horizontal	Peak
2500.00	34.55	27.40	8.08	37.38	20.00	52.65	74.00	-21.35	Horizontal	Peak
2483.49	27.08	27.43	8.04	37.59	20.00	44.96	54.00	-9.04	Vertical	Average
2500.00	27.81	27.40	8.08	37.38	20.00	45.91	54.00	-8.09	Vertical	Average
2483.49	27.88	27.43	8.04	37.59	20.00	45.76	54.00	-8.24	Horizontal	Average
2500.00	26.83	27.40	8.08	37.38	20.00	44.93	54.00	-9.07	Horizontal	Average

802.11n(HT20)					CH01					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	34.66	27.96	7.73	38.17	20.00	52.18	74.00	-21.82	Vertical	Peak
2390.01	35.96	27.72	7.84	37.97	20.00	53.55	74.00	-20.45	Vertical	Peak
2310.00	34.33	27.96	7.73	38.17	20.00	51.85	74.00	-22.15	Horizontal	Peak
2390.01	35.12	27.72	7.84	37.97	20.00	52.71	74.00	-21.29	Horizontal	Peak
2310.00	28.41	27.96	7.73	38.17	20.00	45.93	54.00	-8.07	Vertical	Average
2390.01	27.95	27.72	7.84	37.97	20.00	45.54	54.00	-8.46	Vertical	Average
2310.00	28.25	27.96	7.73	38.17	20.00	45.77	54.00	-8.23	Horizontal	Average
2390.01	26.67	27.72	7.84	37.97	20.00	44.26	54.00	-9.74	Horizontal	Average
802.11n(HT20)					CH11					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	34.62	27.43	8.04	37.59	20.00	52.50	74.00	-21.50	Vertical	Peak
2500.00	34.55	27.40	8.08	37.38	20.00	52.65	74.00	-21.35	Vertical	Peak
2483.49	34.09	27.43	8.04	37.59	20.00	51.97	74.00	-22.03	Horizontal	Peak
2500.00	34.04	27.40	8.08	37.38	20.00	52.14	74.00	-21.86	Horizontal	Peak
2483.49	27.46	27.43	8.04	37.59	20.00	45.34	54.00	-8.66	Vertical	Average
2500.00	28.32	27.40	8.08	37.38	20.00	46.42	54.00	-7.58	Vertical	Average
2483.49	28.69	27.43	8.04	37.59	20.00	46.57	54.00	-7.43	Horizontal	Average
2500.00	27.50	27.40	8.08	37.38	20.00	45.60	54.00	-8.40	Horizontal	Average

802.11n(HT40)					CH03					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	35.57	27.96	7.73	38.17	20.00	53.09	74.00	-20.91	Vertical	Peak
2389.98	34.81	27.72	7.84	37.97	20.00	52.40	74.00	-21.60	Vertical	Peak
2310.00	34.74	27.96	7.73	38.17	20.00	52.26	74.00	-21.74	Horizontal	Peak
2389.98	34.33	27.72	7.84	37.97	20.00	51.92	74.00	-22.08	Horizontal	Peak
2310.00	28.86	27.96	7.73	38.17	20.00	46.38	54.00	-7.62	Vertical	Average
2389.99	28.27	27.72	7.84	37.97	20.00	45.86	54.00	-8.14	Vertical	Average
2310.00	29.06	27.96	7.73	38.17	20.00	46.58	54.00	-7.42	Horizontal	Average
2389.99	28.89	27.72	7.84	37.97	20.00	46.48	54.00	-7.52	Horizontal	Average
802.11n(HT40)					CH09					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	35.02	27.43	8.04	37.59	20.00	52.90	74.00	-21.10	Vertical	Peak
2500.00	34.17	27.40	8.08	37.38	20.00	52.27	74.00	-21.73	Vertical	Peak
2483.50	35.40	27.43	8.04	37.59	20.00	53.28	74.00	-20.72	Horizontal	Peak
2500.00	34.84	27.40	8.08	37.38	20.00	52.94	74.00	-21.06	Horizontal	Peak
2483.50	27.73	27.43	8.04	37.59	20.00	45.61	54.00	-8.39	Vertical	Average
2500.00	27.68	27.40	8.08	37.38	20.00	45.78	54.00	-8.22	Vertical	Average
2483.50	28.68	27.43	8.04	37.59	20.00	46.56	54.00	-7.44	Horizontal	Average
2500.00	28.75	27.40	8.08	37.38	20.00	46.85	54.00	-7.15	Horizontal	Average

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak

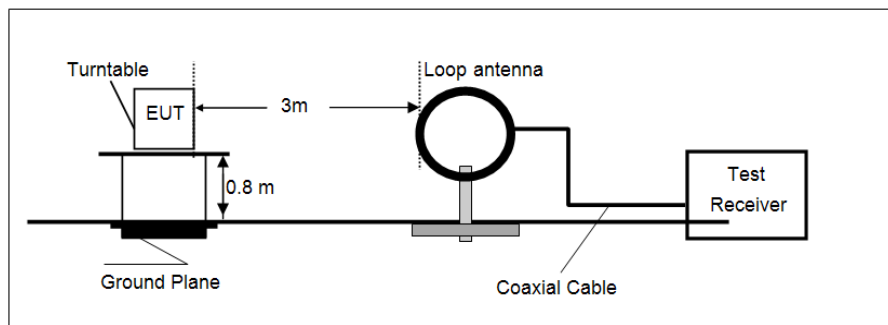
Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.

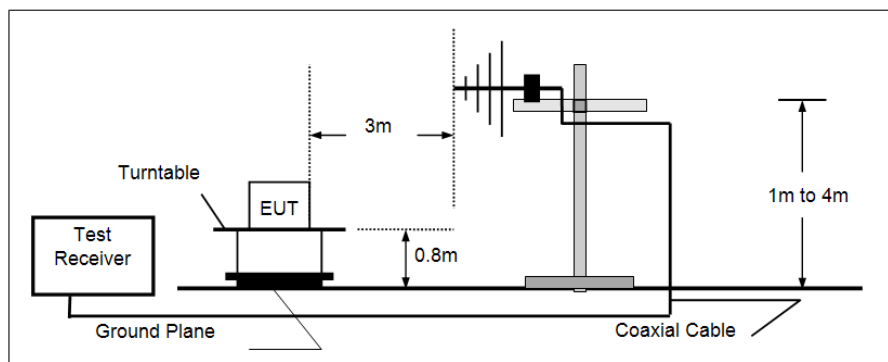
Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

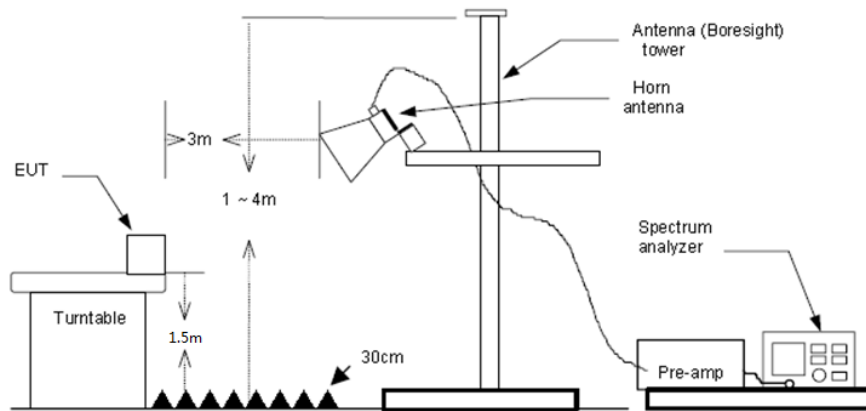
➤ 9 kHz ~ 30 MHz



➤ 30 MHz ~ 1 GHz



➤ Above 1 GHz



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Above 1GHz Final Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) Over Limit = Level - Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

TEST DATA FOR 9 kHz ~ 30 MHz

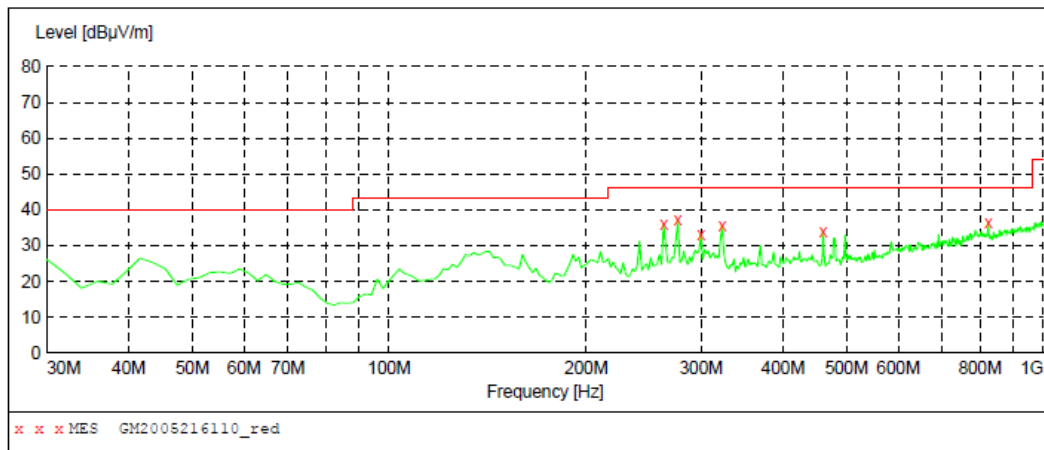
The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

TEST DATA FOR 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH06 of 802.11B which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

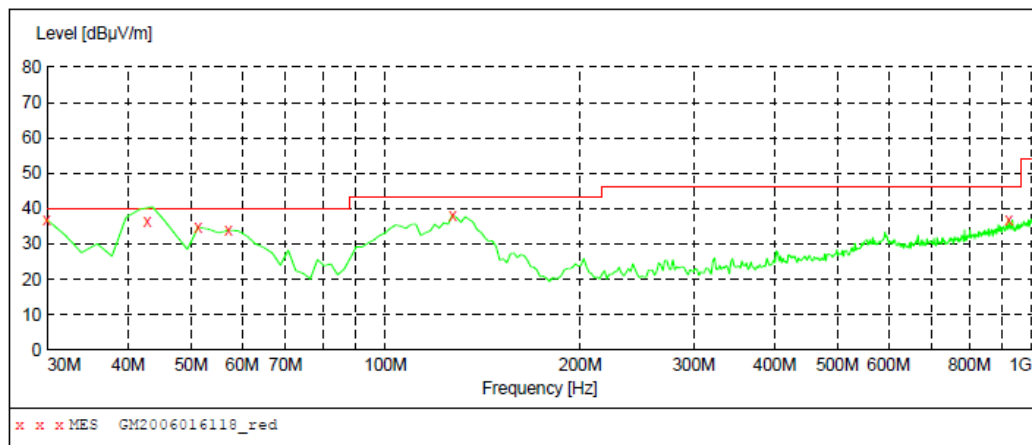
**MEASUREMENT RESULT: "GM2005216110_red"**

5/21/2020 9:20PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
262.800000	35.80	-7.9	46.0	10.2	QP	100.0	356.00	HORIZONTAL
276.380000	37.10	-7.4	46.0	8.9	QP	100.0	58.00	HORIZONTAL
299.660000	33.20	-6.4	46.0	12.8	QP	100.0	71.00	HORIZONTAL
322.940000	35.40	-6.1	46.0	10.6	QP	100.0	10.00	HORIZONTAL
460.680000	34.00	-2.6	46.0	12.0	QP	100.0	275.00	HORIZONTAL
823.460000	36.30	5.7	46.0	9.7	QP	100.0	36.00	HORIZONTAL

Polarization:

Vertical

**MEASUREMENT RESULT: "GM2006016118_red"**

6/1/2020 10:57PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	36.10	-11.8	40.0	3.9	QP	100.0	232.00	VERTICAL
43.580000	36.60	-8.6	40.0	3.4	QP	100.0	318.00	VERTICAL
51.340000	34.80	-8.6	40.0	5.2	QP	100.0	342.00	VERTICAL
57.160000	33.90	-8.5	40.0	6.1	QP	100.0	0.00	VERTICAL
127.000000	38.20	-12.7	43.5	5.3	QP	100.0	155.00	VERTICAL
920.460000	36.80	8.2	46.0	9.2	QP	100.0	179.00	VERTICAL

TEST DATA FOR 1 GHz ~ 25 GHz

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1630.26	36.64	25.22	6.44	37.68	30.62	74.00	-43.38	Vertical	Peak
3192.37	37.64	28.92	9.41	37.45	38.52	74.00	-35.48	Vertical	Peak
4821.76	40.29	31.40	11.73	36.25	47.17	74.00	-26.83	Vertical	Peak
6816.39	31.89	34.57	13.99	34.80	45.65	74.00	-28.35	Vertical	Peak
1642.76	36.77	25.14	6.46	37.73	30.64	74.00	-43.36	Horizontal	Peak
3208.66	36.70	28.87	9.46	37.34	37.69	74.00	-36.31	Horizontal	Peak
4821.76	39.86	31.40	11.73	36.25	46.74	74.00	-27.26	Horizontal	Peak
7376.08	31.44	36.55	14.69	34.70	47.98	74.00	-26.02	Horizontal	Peak

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1659.57	37.14	25.10	6.49	37.79	30.94	74.00	-43.06	Vertical	Peak
3143.98	36.79	29.00	9.28	37.77	37.30	74.00	-36.70	Vertical	Peak
4871.10	43.93	31.40	11.69	36.02	51.00	74.00	-23.00	Vertical	Peak
6903.71	32.23	34.82	14.13	34.71	46.47	74.00	-27.53	Vertical	Peak
1638.59	37.30	25.17	6.46	37.72	31.21	74.00	-42.79	Horizontal	Peak
3184.25	36.05	28.93	9.39	37.50	36.87	74.00	-37.13	Horizontal	Peak
4871.10	44.38	31.40	11.69	36.02	51.45	74.00	-22.55	Horizontal	Peak
7027.82	31.97	35.57	14.49	34.64	47.39	74.00	-26.61	Horizontal	Peak

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1782.18	36.70	25.33	6.70	37.95	30.78	74.00	-43.22	Vertical	Peak
3233.26	36.14	28.77	9.53	37.59	36.85	74.00	-37.15	Vertical	Peak
4920.96	41.62	31.44	11.72	35.82	48.96	74.00	-25.04	Vertical	Peak
7154.17	31.41	36.32	14.52	34.71	47.54	74.00	-26.46	Vertical	Peak
1642.76	36.86	25.14	6.46	37.73	30.73	74.00	-43.27	Horizontal	Peak
3208.66	36.27	28.87	9.46	37.34	37.26	74.00	-36.74	Horizontal	Peak
4920.96	40.78	31.44	11.72	35.82	48.12	74.00	-25.88	Horizontal	Peak
7154.17	31.46	36.32	14.52	34.71	47.59	74.00	-26.41	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit (54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies (test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1782.18	37.13	25.33	6.70	37.95	31.21	74.00	-42.79	Vertical	Peak
3064.96	36.59	28.86	9.09	37.75	36.79	74.00	-37.21	Vertical	Peak
4652.95	33.84	31.21	11.51	36.48	40.08	74.00	-33.92	Vertical	Peak
6678.99	31.71	34.30	14.17	34.96	45.22	74.00	-28.78	Vertical	Peak
1655.35	37.47	25.10	6.48	37.78	31.27	74.00	-42.73	Horizontal	Peak
3151.99	36.29	29.00	9.30	37.71	36.88	74.00	-37.12	Horizontal	Peak
4821.76	33.36	31.40	11.73	36.25	40.24	74.00	-33.76	Horizontal	Peak
6662.01	31.54	34.30	14.14	35.00	44.98	74.00	-29.02	Horizontal	Peak

802.11g					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1702.36	37.22	25.10	6.56	37.86	31.02	74.00	-42.98	Vertical	Peak
3176.16	36.51	28.95	9.37	37.56	37.27	74.00	-36.73	Vertical	Peak
4883.52	37.23	31.40	11.68	35.97	44.34	74.00	-29.66	Vertical	Peak
6628.18	31.72	34.30	14.10	35.06	45.06	74.00	-28.94	Vertical	Peak
1609.65	36.32	25.34	6.41	37.61	30.46	74.00	-43.54	Horizontal	Peak
3216.84	36.71	28.83	9.48	37.38	37.64	74.00	-36.36	Horizontal	Peak
4883.52	35.02	31.40	11.68	35.97	42.13	74.00	-31.87	Horizontal	Peak
7154.17	31.25	36.32	14.52	34.71	47.38	74.00	-26.62	Horizontal	Peak

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1479.96	36.06	25.98	6.18	37.62	30.60	74.00	-43.40	Vertical	Peak
3192.37	36.71	28.92	9.41	37.45	37.59	74.00	-36.41	Vertical	Peak
4920.96	42.18	31.44	11.72	35.82	49.52	74.00	-24.48	Vertical	Peak
7154.17	31.38	36.32	14.52	34.71	47.51	74.00	-26.49	Vertical	Peak
1719.78	37.61	25.14	6.59	37.89	31.45	74.00	-42.55	Horizontal	Peak
3112.13	36.57	29.00	9.19	37.70	37.06	74.00	-36.94	Horizontal	Peak
4920.96	40.25	31.44	11.72	35.82	47.59	74.00	-26.41	Horizontal	Peak
7547.01	31.42	36.51	14.90	34.42	48.41	74.00	-25.59	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11n(HT20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1711.05	37.05	25.12	6.58	37.87	30.88	74.00	-43.12	Vertical	Peak
3208.66	36.08	28.87	9.46	37.34	37.07	74.00	-36.93	Vertical	Peak
5060.69	33.28	32.20	12.02	35.30	42.20	74.00	-31.80	Vertical	Peak
7264.28	31.74	36.40	14.53	34.77	47.90	74.00	-26.10	Vertical	Peak
1741.81	36.82	25.18	6.63	37.93	30.70	74.00	-43.30	Horizontal	Peak
3200.50	36.71	28.90	9.44	37.40	37.65	74.00	-36.35	Horizontal	Peak
5204.40	32.29	31.67	12.07	34.61	41.42	74.00	-32.58	Horizontal	Peak
7135.98	31.20	36.24	14.51	34.70	47.25	74.00	-26.75	Horizontal	Peak

802.11n(HT20)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1685.12	37.13	25.10	6.53	37.86	30.90	74.00	-43.10	Vertical	Peak
3192.37	36.76	28.92	9.41	37.45	37.64	74.00	-36.36	Vertical	Peak
4871.10	39.31	31.40	11.69	36.02	46.38	74.00	-27.62	Vertical	Peak
7045.74	31.50	35.67	14.50	34.65	47.02	74.00	-26.98	Vertical	Peak
1655.35	36.96	25.10	6.48	37.78	30.76	74.00	-43.24	Horizontal	Peak
3104.22	37.06	29.00	9.17	37.66	37.57	74.00	-36.43	Horizontal	Peak
4883.52	38.46	31.40	11.68	35.97	45.57	74.00	-28.43	Horizontal	Peak
7432.62	33.06	36.60	14.81	34.64	49.83	74.00	-24.17	Horizontal	Peak

802.11n(HT20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1621.99	36.64	25.27	6.43	37.65	30.69	74.00	-43.31	Vertical	Peak
3072.77	37.02	28.89	9.10	37.72	37.29	74.00	-36.71	Vertical	Peak
4920.96	38.83	31.44	11.72	35.82	46.17	74.00	-27.83	Vertical	Peak
7470.56	31.66	36.60	14.85	34.59	48.52	74.00	-25.48	Vertical	Peak
1706.70	36.82	25.11	6.57	37.87	30.63	74.00	-43.37	Horizontal	Peak
3041.64	36.92	28.78	9.04	37.82	36.92	74.00	-37.08	Horizontal	Peak
4933.50	40.53	31.47	11.75	35.78	47.97	74.00	-26.03	Horizontal	Peak
7338.62	31.99	36.48	14.62	34.75	48.34	74.00	-25.66	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11n(HT40)					CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1759.64	36.62	25.24	6.66	37.95	30.57	74.00	-43.43	Vertical	Peak
3192.37	36.57	28.92	9.41	37.45	37.45	74.00	-36.55	Vertical	Peak
5164.81	32.52	31.91	12.05	34.79	41.69	74.00	-32.31	Vertical	Peak
7027.82	32.61	35.57	14.49	34.64	48.03	74.00	-25.97	Vertical	Peak
1768.62	37.15	25.28	6.68	37.95	31.16	74.00	-42.84	Horizontal	Peak
3168.08	36.16	28.96	9.35	37.61	36.86	74.00	-37.14	Horizontal	Peak
5164.81	32.48	31.91	12.05	34.79	41.65	74.00	-32.35	Horizontal	Peak
6662.01	31.83	34.30	14.14	35.00	45.27	74.00	-28.73	Horizontal	Peak

802.11n(HT40)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1589.29	36.88	25.42	6.37	37.59	31.08	74.00	-42.92	Vertical	Peak
3216.84	36.07	28.83	9.48	37.38	37.00	74.00	-37.00	Vertical	Peak
4883.52	34.71	31.40	11.68	35.97	41.82	74.00	-32.18	Vertical	Peak
7099.75	31.32	36.10	14.51	34.68	47.25	74.00	-26.75	Vertical	Peak
1715.41	37.59	25.13	6.58	37.88	31.42	74.00	-42.58	Horizontal	Peak
3184.25	36.12	28.93	9.39	37.50	36.94	74.00	-37.06	Horizontal	Peak
4883.52	35.46	31.40	11.68	35.97	42.57	74.00	-31.43	Horizontal	Peak
7357.33	32.20	36.51	14.66	34.72	48.65	74.00	-25.35	Horizontal	Peak

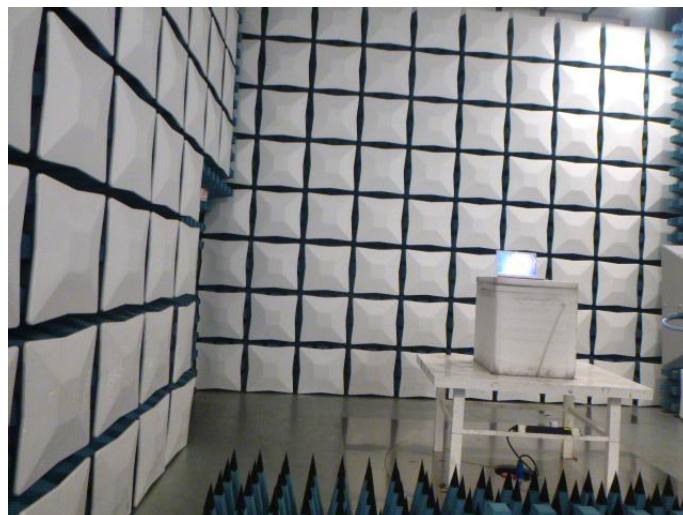
802.11n(HT40)					CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1728.56	36.89	25.16	6.61	37.90	30.76	74.00	-43.24	Vertical	Peak
3184.25	36.90	28.93	9.39	37.50	37.72	74.00	-36.28	Vertical	Peak
5086.52	32.98	32.20	12.03	35.19	42.02	74.00	-31.98	Vertical	Peak
6645.07	32.03	34.30	14.12	35.03	45.42	74.00	-28.58	Vertical	Peak
1782.18	36.38	25.33	6.70	37.95	30.46	74.00	-43.54	Horizontal	Peak
3208.66	35.77	28.87	9.46	37.34	36.76	74.00	-37.24	Horizontal	Peak
4920.96	35.08	31.44	11.72	35.82	42.42	74.00	-31.58	Horizontal	Peak
7227.39	31.00	36.45	14.53	34.75	47.23	74.00	-26.77	Horizontal	Peak

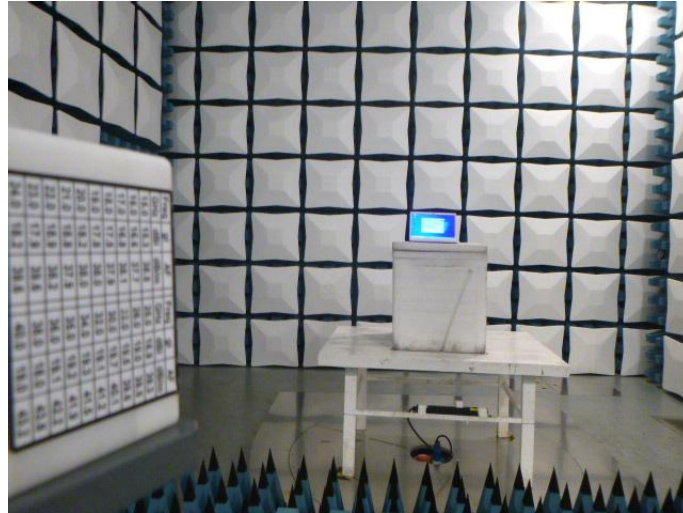
Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

6. TEST SETUP PHOTOS

Radiated Emission





AC Conducted Emission



7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No. : CHTEW20060006.

8. APPENDIX REPORT

APPENDIX REPORT

Project No.	SHT2005070601EW	Radio Specification	WIFI 2.4G
Test sample No.	YPHT20050706004	Model No.	Hyundai Onnyx III
Start test date	2020/5/27	Finish date	2020/5/27
Temperature	25°C	Humidity	50%
Test Engineer	Jinyue.Yan	Auditor	<i>William.wang</i>

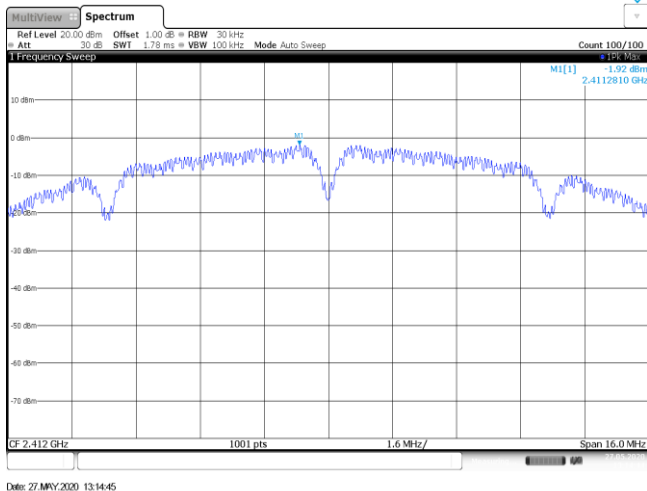
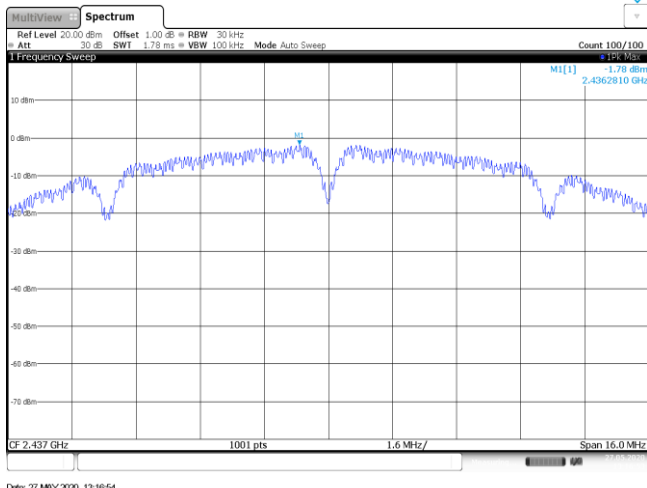
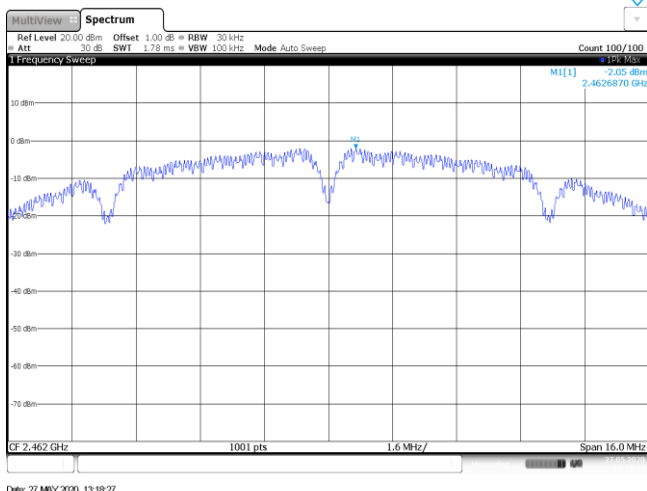
Appendix clause	Test item	Result
A	Conducted Peak Output Power	PASS
B	Power Spectral Density	PASS
C	6 dB Bandwidth	PASS
D	99% Occupied Bandwidth	PASS
E	Duty Cycle	PASS
E	Band edge and Spurious Emissions (conducted)	PASS

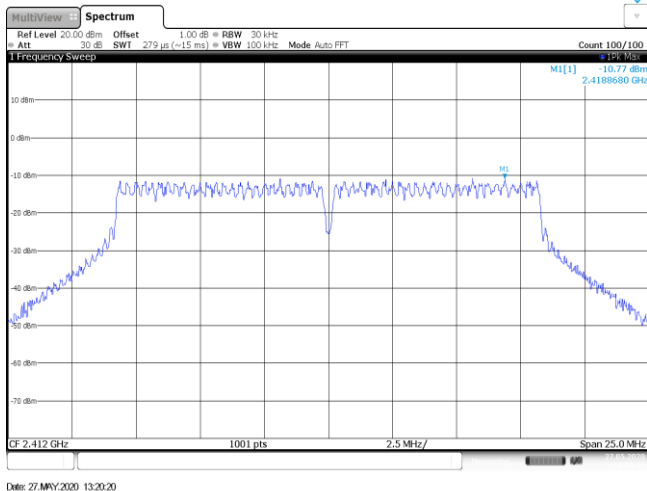
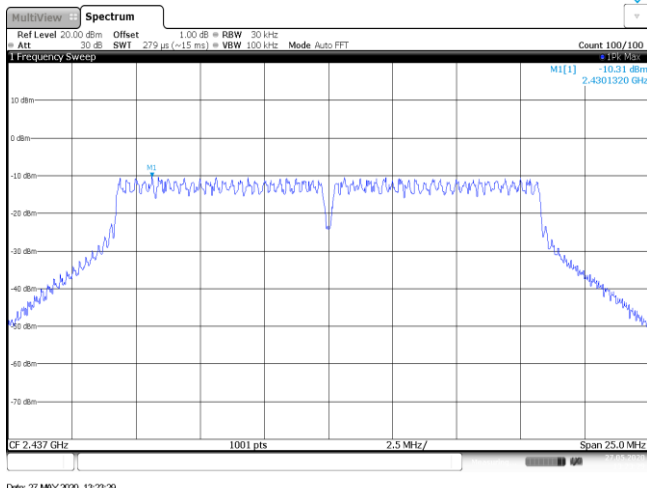
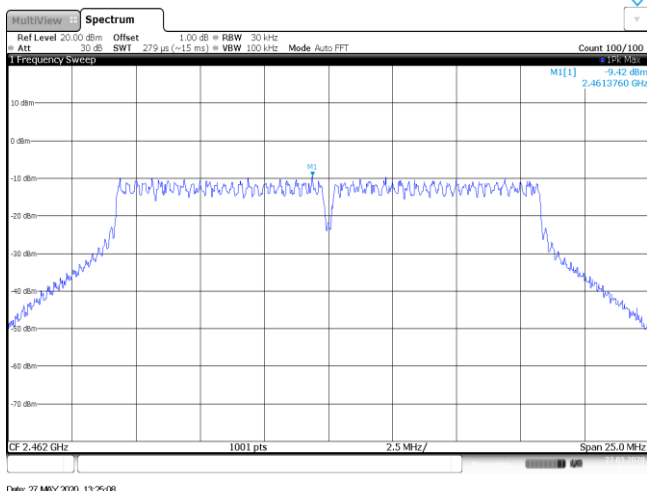
Appendix A: Conducted Peak Output Power

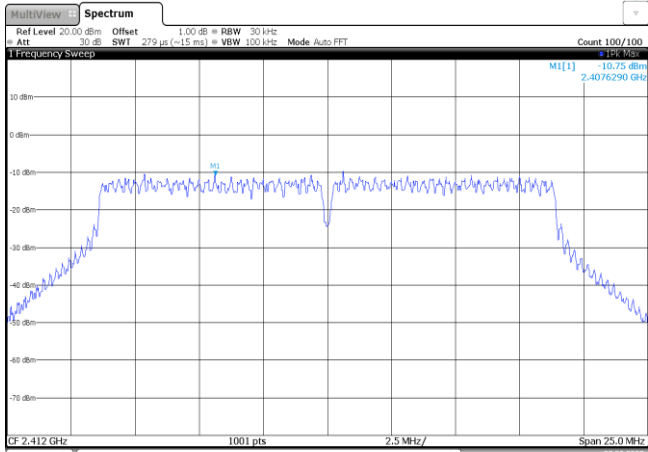
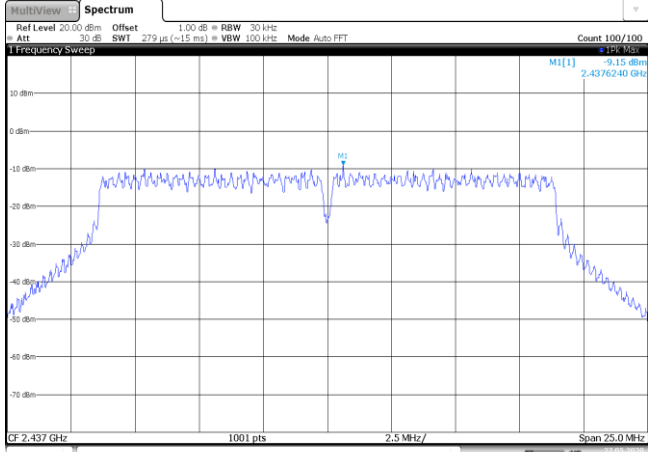
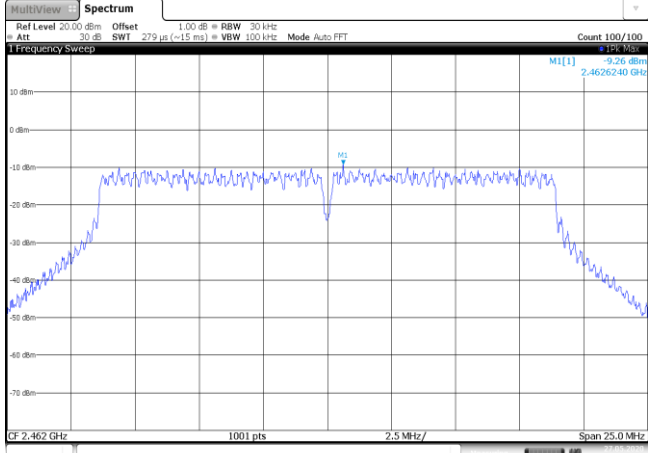
Type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	01	16.14	14.58	≤30.00	Pass
	06	16.03	14.65		
	11	16.15	14.07		
802.11g	01	15.16	13.89	≤30.00	Pass
	06	15.28	13.51		
	11	15.75	14.01		
802.11n(HT20)	01	15.25	13.37	≤30.00	Pass
	06	15.30	13.41		
	11	15.97	14.02		
802.11n(HT40)	03	15.14	13.44	≤30.00	Pass
	06	15.56	13.68		
	09	15.28	13.39		

Appendix B: Power Spectral Density

Type	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-1.92	≤8.00	Pass
	06	-1.78		
	11	-2.05		
802.11g	01	-10.77	≤8.00	Pass
	06	-10.31		
	11	-9.42		
802.11n(HT20)	01	-10.75	≤8.00	Pass
	06	-9.15		
	11	-9.26		
802.11n(HT40)	03	-14.10	≤8.00	Pass
	06	-13.02		
	09	-13.28		

Type:		802.11 b
CH01		
CH06		
CH11		

Type:		802.11 g
CH01		
CH06		
CH11		

Type: 802.11n(HT20)	
CH01	 2.476290 GHz 2.412 GHz 1001 pts 2.5 MHz/ Span 25.0 MHz Date: 27.MAY.2020 13:26:57
CH06	 2.476240 GHz 2.437 GHz 1001 pts 2.5 MHz/ Span 25.0 MHz Date: 27.MAY.2020 13:29:36
CH11	 2.4626240 GHz 2.462 GHz 1001 pts 2.5 MHz/ Span 25.0 MHz Date: 27.MAY.2020 13:32:06

Type:		802.11n(HT40)
CH03	MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWI 558 μs (~27 ms) VBW 100 kHz Mode Auto FFT Count 100/100 1 Frequency Sweep	

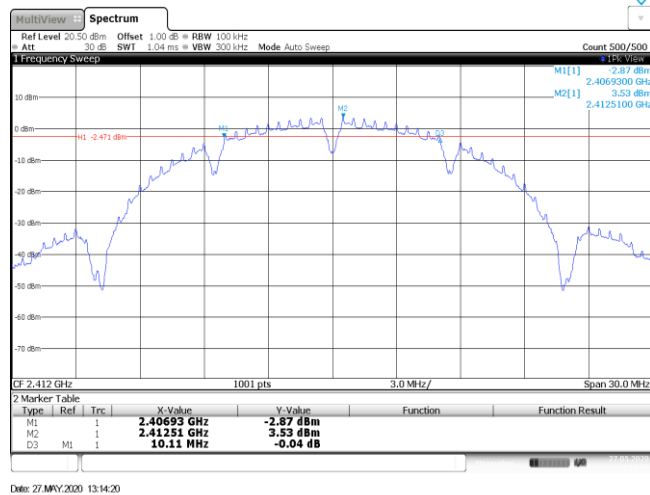
Appendix C: 6dB bandwidth

Type	Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	01	10.11	≥0.5	Pass
	06	10.11		
	11	10.11		
802.11g	01	16.65	≥0.5	Pass
	06	16.65		
	11	16.65		
802.11n(HT20)	01	17.88	≥0.5	Pass
	06	17.88		
	11	17.88		
802.11n(HT40)	03	36.54	≥0.5	Pass
	06	36.54		
	09	36.54		

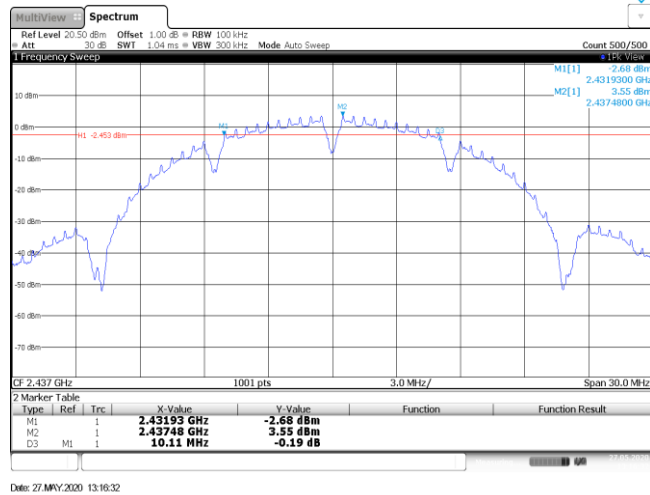
Type:

802.11 b

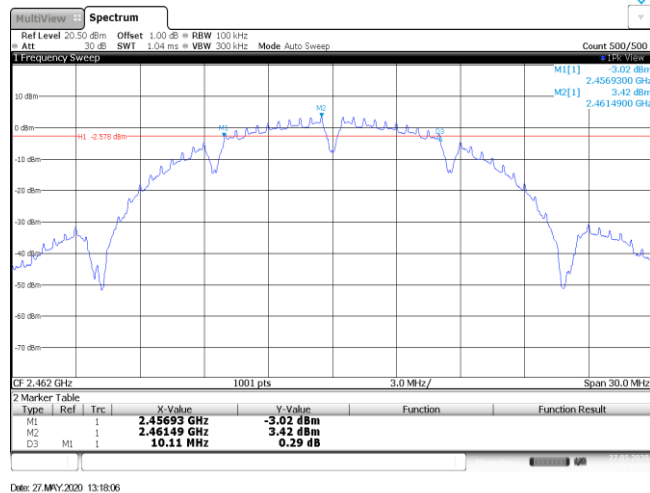
CH01

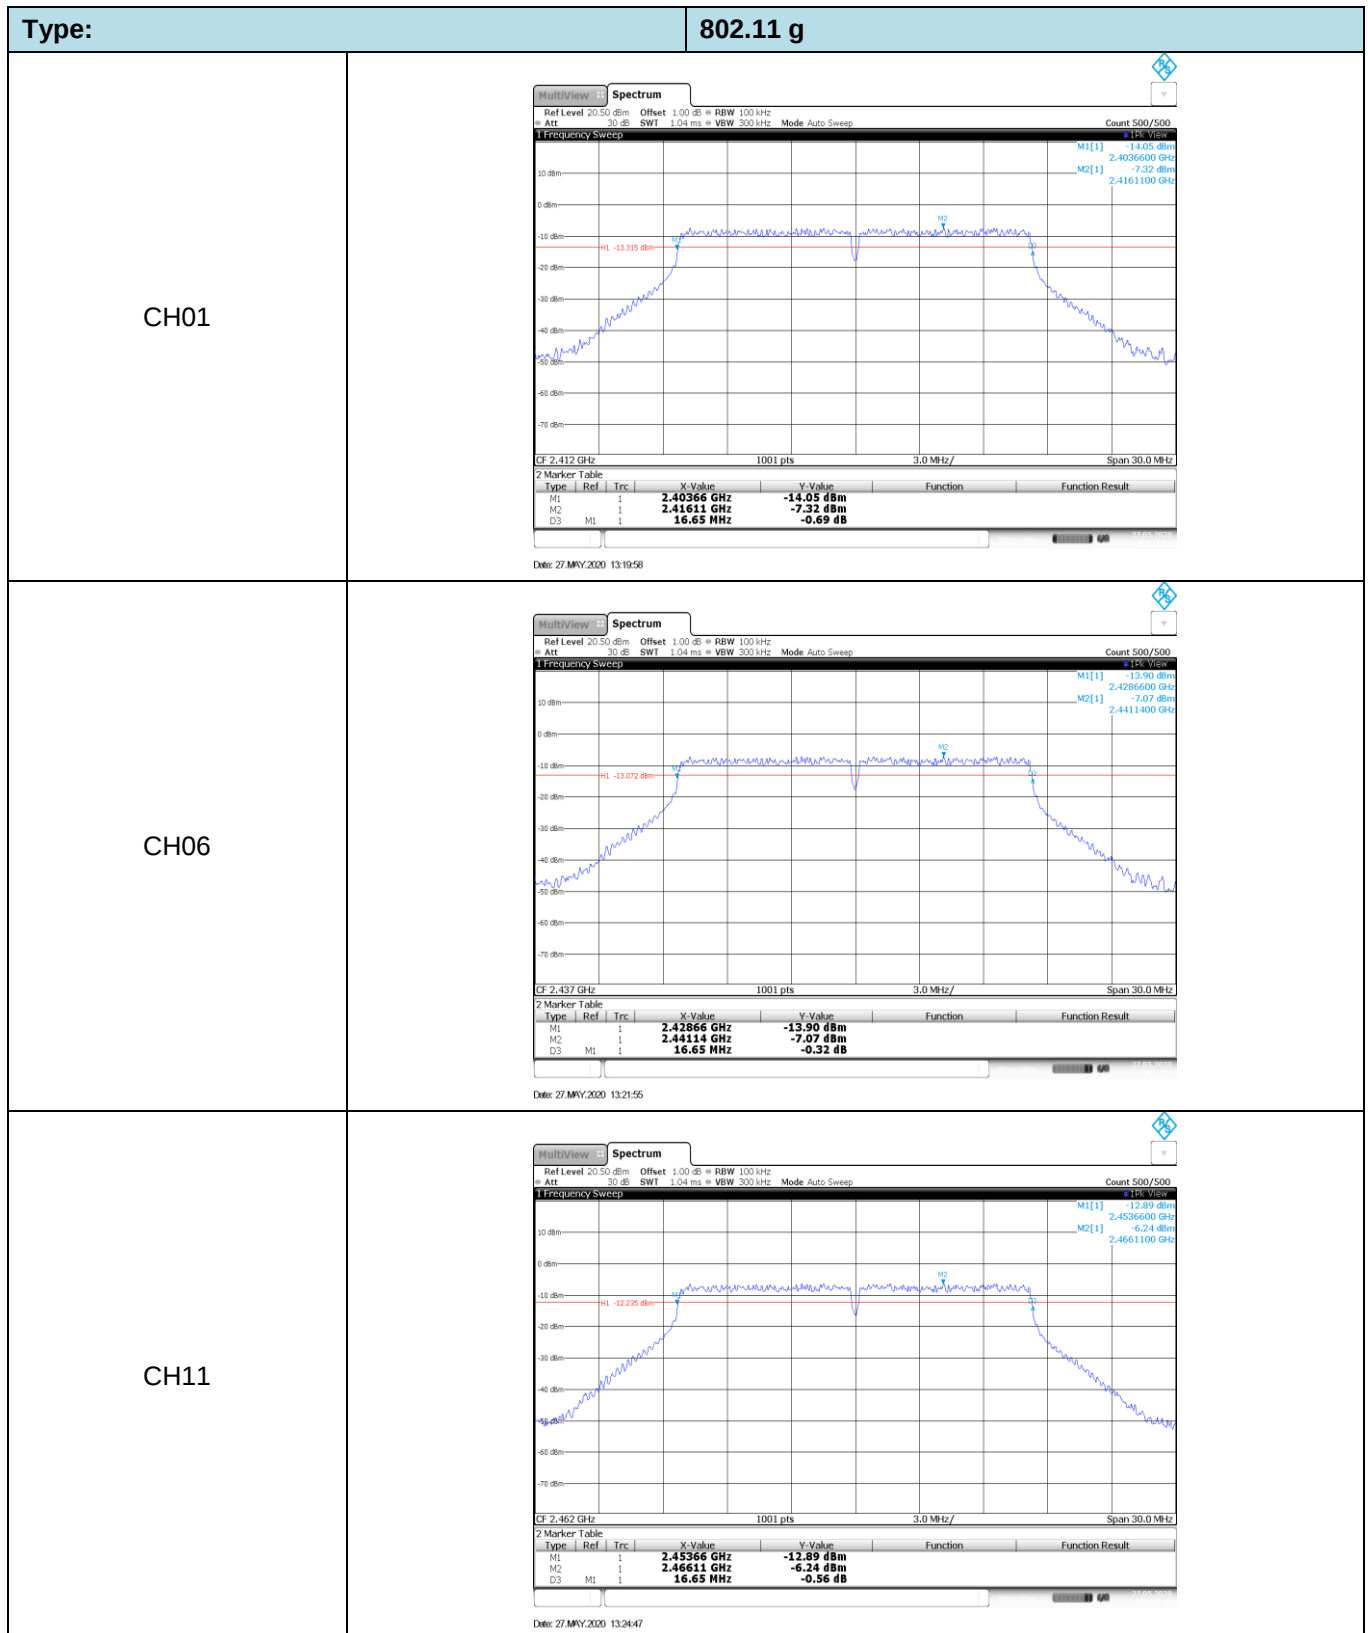


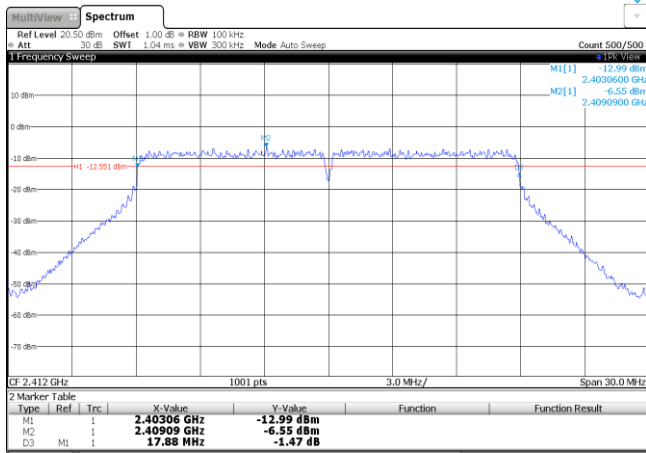
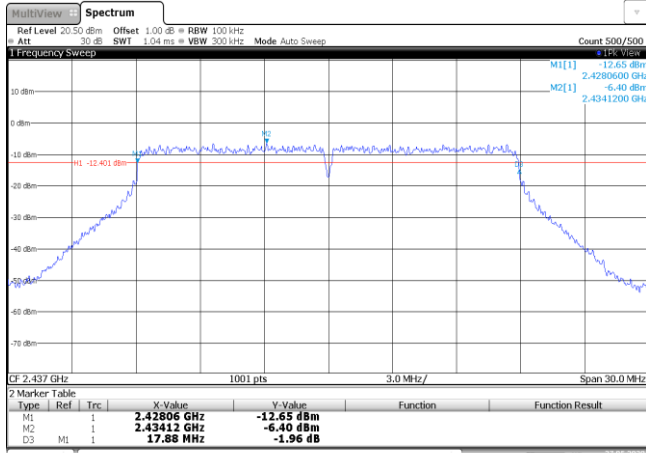
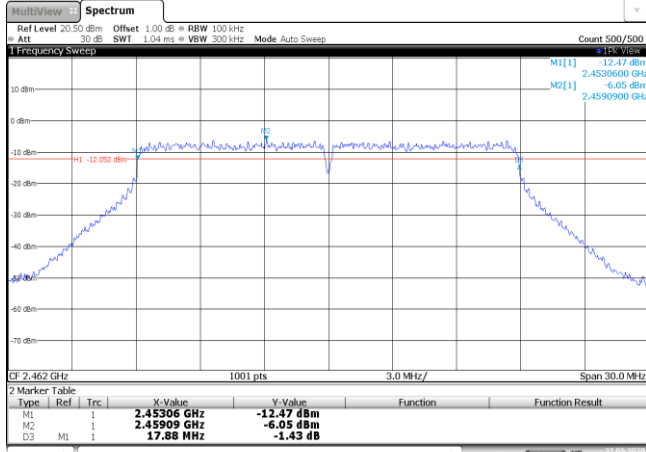
CH06

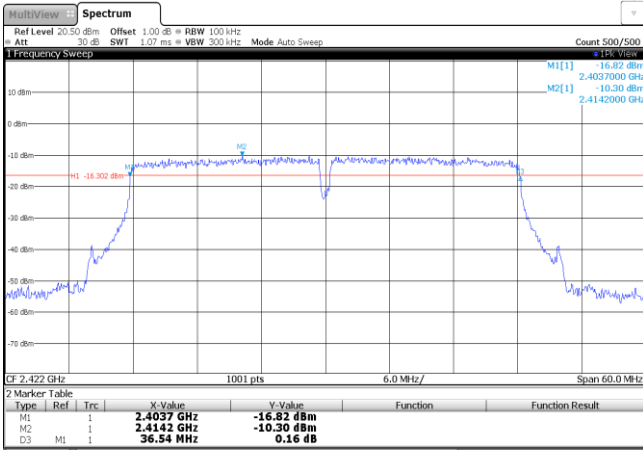
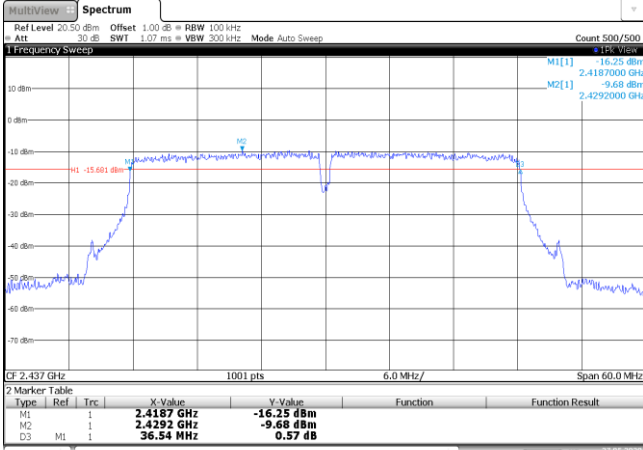
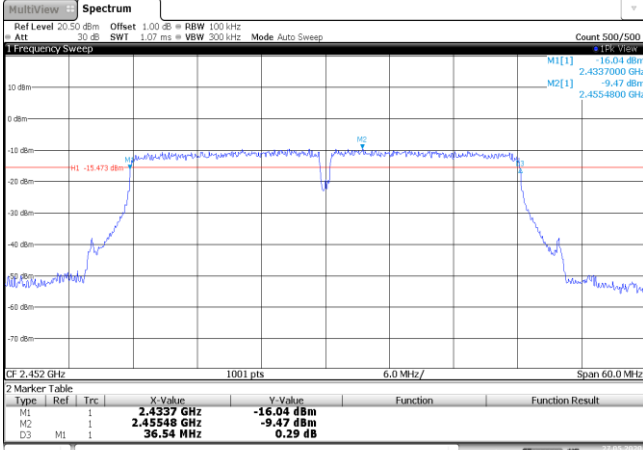


CH11





Type:		802.11n(HT20)																											
CH01	MultiView Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.04 ms VBW 300 kHz Mode Auto Sweep Count 500/500 1 Frequency Sweep 115.4 V/div M1[1] 12.99 dBm 2.4030600 GHz M2[1] -6.55 dBm 2.4090900 GHz  CF 2.412 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz 2 Marker Table <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40306 GHz</td><td>-12.99 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.40909 GHz</td><td>-6.55 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>17.88 MHz</td><td>-1.47 dB</td><td></td><td></td></tr></table> Date: 27.MAY.2020 13:28:31	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.40306 GHz	-12.99 dBm			M2	1		2.40909 GHz	-6.55 dBm			D3	M1	1	17.88 MHz	-1.47 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																							
M1	1		2.40306 GHz	-12.99 dBm																									
M2	1		2.40909 GHz	-6.55 dBm																									
D3	M1	1	17.88 MHz	-1.47 dB																									
CH06	MultiView Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.04 ms VBW 300 kHz Mode Auto Sweep Count 500/500 1 Frequency Sweep 115.4 V/div M1[1] 12.65 dBm 2.4280600 GHz M2[1] -6.40 dBm 2.4341200 GHz  CF 2.437 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz 2 Marker Table <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.42806 GHz</td><td>-12.65 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.43412 GHz</td><td>-6.40 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>17.88 MHz</td><td>-1.96 dB</td><td></td><td></td></tr></table> Date: 27.MAY.2020 13:29:15	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.42806 GHz	-12.65 dBm			M2	1		2.43412 GHz	-6.40 dBm			D3	M1	1	17.88 MHz	-1.96 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																							
M1	1		2.42806 GHz	-12.65 dBm																									
M2	1		2.43412 GHz	-6.40 dBm																									
D3	M1	1	17.88 MHz	-1.96 dB																									
CH11	MultiView Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.04 ms VBW 300 kHz Mode Auto Sweep Count 500/500 1 Frequency Sweep 115.4 V/div M1[1] 12.47 dBm 2.4530600 GHz M2[1] -6.05 dBm 2.4590900 GHz  CF 2.462 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz 2 Marker Table <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.45306 GHz</td><td>-12.47 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.45909 GHz</td><td>-6.05 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>17.88 MHz</td><td>-1.43 dB</td><td></td><td></td></tr></table> Date: 27.MAY.2020 13:30:54	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.45306 GHz	-12.47 dBm			M2	1		2.45909 GHz	-6.05 dBm			D3	M1	1	17.88 MHz	-1.43 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																							
M1	1		2.45306 GHz	-12.47 dBm																									
M2	1		2.45909 GHz	-6.05 dBm																									
D3	M1	1	17.88 MHz	-1.43 dB																									

Type:		802.11n(HT40)																											
CH03	MultiView Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.07 ms VBW 300 kHz Mode Auto Sweep Count 500/500 1 Frequency Sweep 15.42 dBm M1[1] 2.4037000 GHz -10.30 dBm M2[1] 2.4142000 GHz  CF 2.422 GHz 1001 pts 6.0 MHz/ Span 66.0 MHz 2 Marker Table <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.4037 GHz</td><td>-16.82 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4142 GHz</td><td>-10.30 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>36.54 MHz</td><td>0.16 dB</td><td></td><td></td></tr></table> Date: 27.MAY.2020 13:33:41	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4037 GHz	-16.82 dBm			M2	1		2.4142 GHz	-10.30 dBm			D3	M1	1	36.54 MHz	0.16 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																							
M1	1		2.4037 GHz	-16.82 dBm																									
M2	1		2.4142 GHz	-10.30 dBm																									
D3	M1	1	36.54 MHz	0.16 dB																									
CH06	MultiView Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.07 ms VBW 300 kHz Mode Auto Sweep Count 500/500 1 Frequency Sweep 16.25 dBm M1[1] 2.4187000 GHz -9.68 dBm M2[1] 2.4292000 GHz  CF 2.437 GHz 1001 pts 6.0 MHz/ Span 66.0 MHz 2 Marker Table <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.4187 GHz</td><td>-16.25 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4292 GHz</td><td>-9.68 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>36.54 MHz</td><td>0.57 dB</td><td></td><td></td></tr></table> Date: 27.MAY.2020 13:35:36	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4187 GHz	-16.25 dBm			M2	1		2.4292 GHz	-9.68 dBm			D3	M1	1	36.54 MHz	0.57 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																							
M1	1		2.4187 GHz	-16.25 dBm																									
M2	1		2.4292 GHz	-9.68 dBm																									
D3	M1	1	36.54 MHz	0.57 dB																									
CH09	MultiView Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.07 ms VBW 300 kHz Mode Auto Sweep Count 500/500 1 Frequency Sweep 16.04 dBm M1[1] 2.4337000 GHz -9.47 dBm M2[1] 2.4554800 GHz  CF 2.452 GHz 1001 pts 6.0 MHz/ Span 66.0 MHz 2 Marker Table <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.4337 GHz</td><td>-16.04 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.45548 GHz</td><td>-9.47 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>36.54 MHz</td><td>0.29 dB</td><td></td><td></td></tr></table> Date: 27.MAY.2020 13:37:04	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4337 GHz	-16.04 dBm			M2	1		2.45548 GHz	-9.47 dBm			D3	M1	1	36.54 MHz	0.29 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																							
M1	1		2.4337 GHz	-16.04 dBm																									
M2	1		2.45548 GHz	-9.47 dBm																									
D3	M1	1	36.54 MHz	0.29 dB																									

Appendix D: 99% Occupied Bandwidth

Type	Channel	99% Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	15.07	-	Pass
	06	15.10		
	11	15.07		
802.11g	01	17.02	-	Pass
	06	17.02		
	11	17.02		
802.11n(HT20)	01	18.01	-	Pass
	06	18.04		
	11	18.07		
802.11n(HT40)	03	36.32	-	Pass
	06	36.32		
	09	36.32		

Type:	802.11 b
CH01	</

Appendix report page: 15 of 35

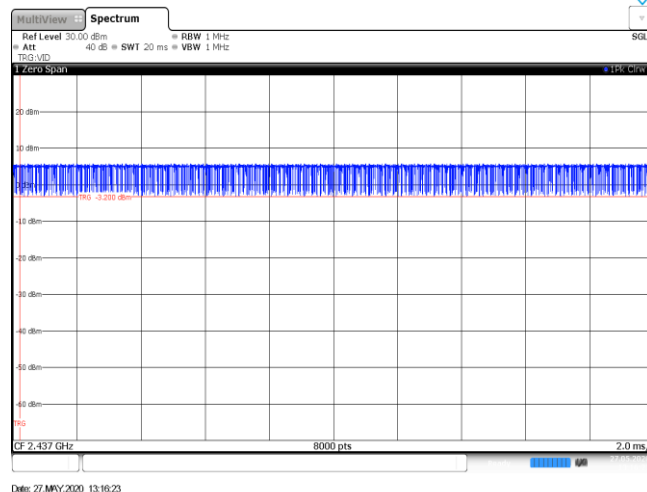
Type:		802.11n(HT20)
CH01		

Appendix report page: 17 of 35

Appendix E: Duty Cycle

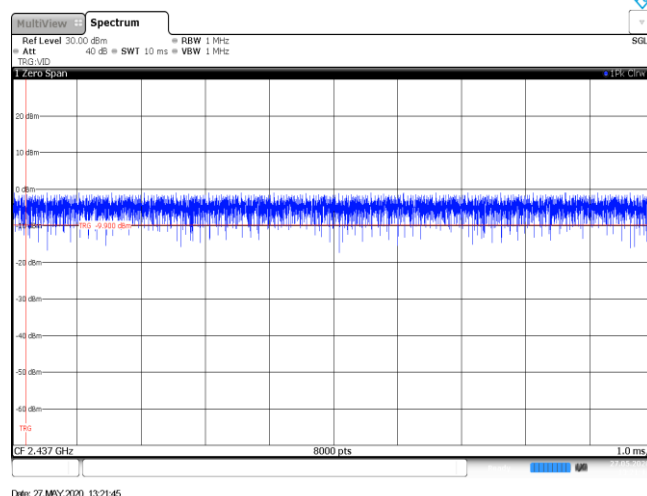
Modulation Type	Test Frequency (MHz)	T _{on time} for single burst (ms)	T _{period} (ms)	Duty cycle	1/T _{on time} (kHz)
11b	2437	1.00	1.00	100%	1.0
11g	2437	1.00	1.00	100%	1.0
11n20	2437	1.00	1.00	100%	1.0
11n40	2437	1.00	1.00	100%	1.0

11b

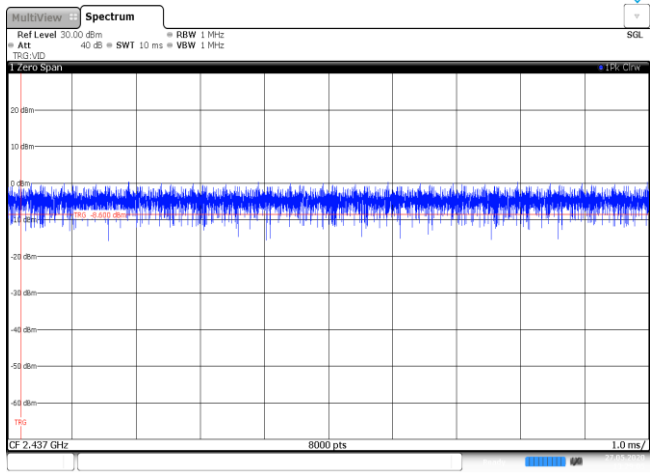
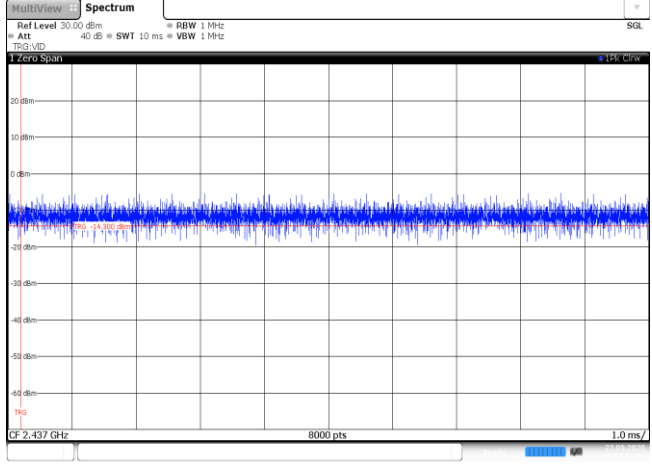


Date: 27.MAY.2020 13:16:23

11g



Date: 27.MAY.2020 13:21:45

11n20	 Ref Level 30.00 dBm Att 40 dB BW 1 MHz SWT 10 ms VBW 1 MHz TPG VID Zero Span 8000 pts 1.0 ms Date: 27.MAY.2020 13:29:05
11n40	 Ref Level 30.00 dBm Att 40 dB BW 1 MHz SWT 10 ms VBW 1 MHz TPG VID Zero Span 8000 pts 1.0 ms Date: 27.MAY.2020 13:35:26

Appendix report page: 21 of 35

Appendix report page: 22 of 35

Test Item:	Bandedge	Type:	802.11 n(HT40)
------------	----------	-------	----------------

CH03

MultiView Spectrum

Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz
Att 30 dB SWF 1.32 ms VBW 300 kHz Mode Auto Sweep Count 300/300

1 Frequency Sweep

2.31 GHz 1001 pts 13.2 MHz/ 2.442 GHz

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.41859 GHz	-10.67 dBm		
M2	1		2.4 GHz	-39.64 dBm		
M3	1		2.39 GHz	-55.31 dBm		
M4	1		2.31 GHz	-61.81 dBm		
M5	1		2.399892 GHz	-43.43 dBm		

Date: 27.MAY.2020 13:34:12

CH09

MultiView Spectrum

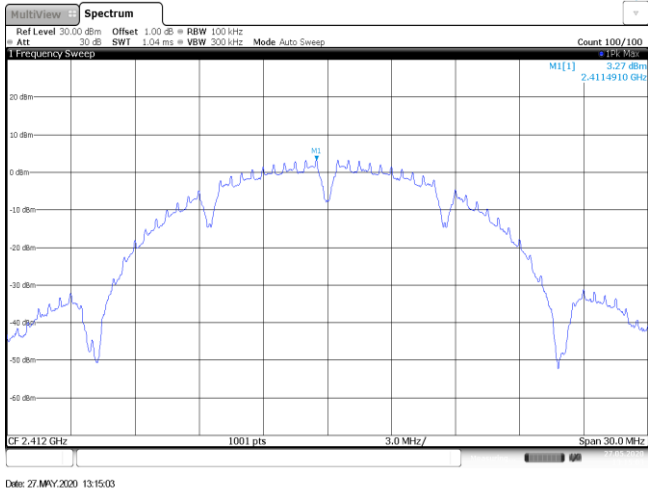
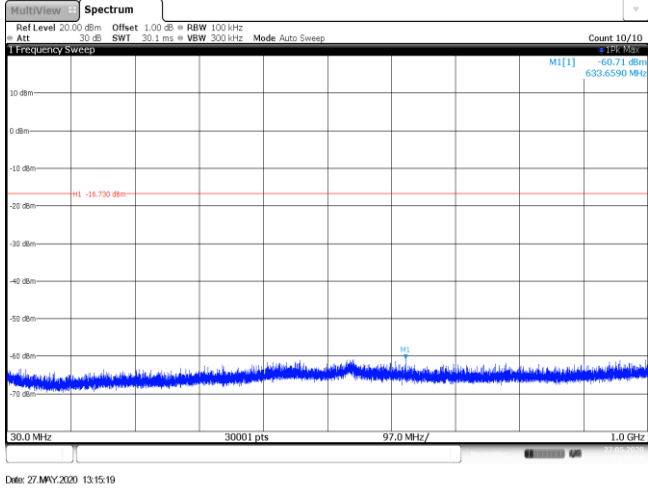
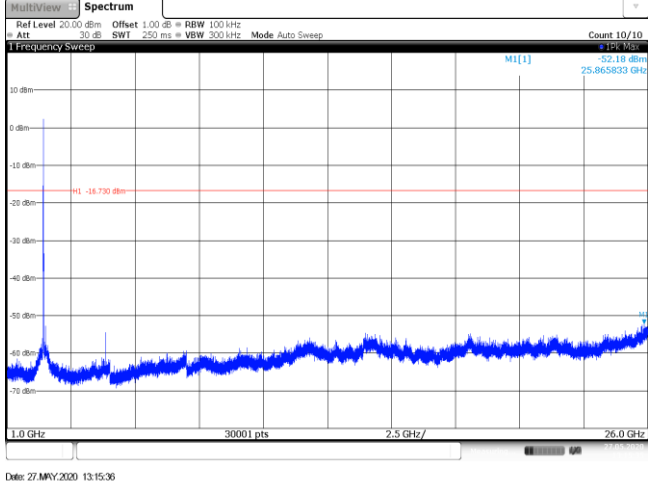
Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz
Att 30 dB SWF 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300

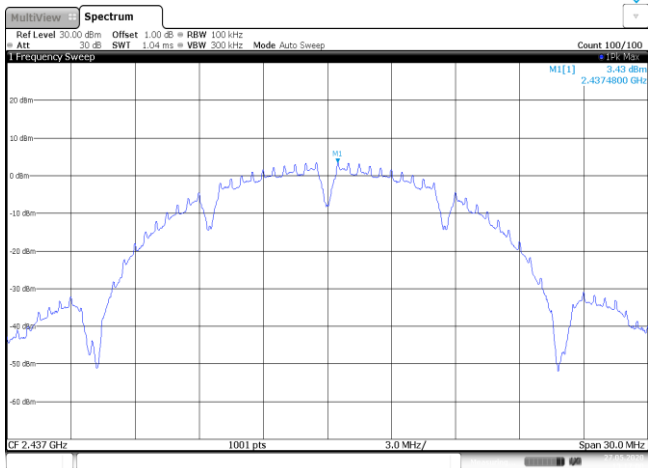
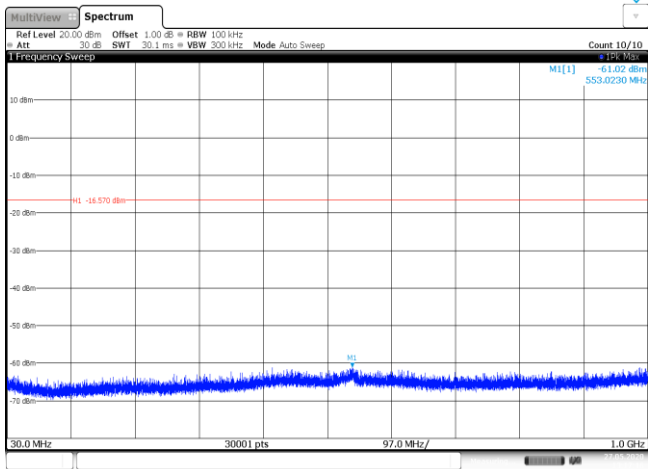
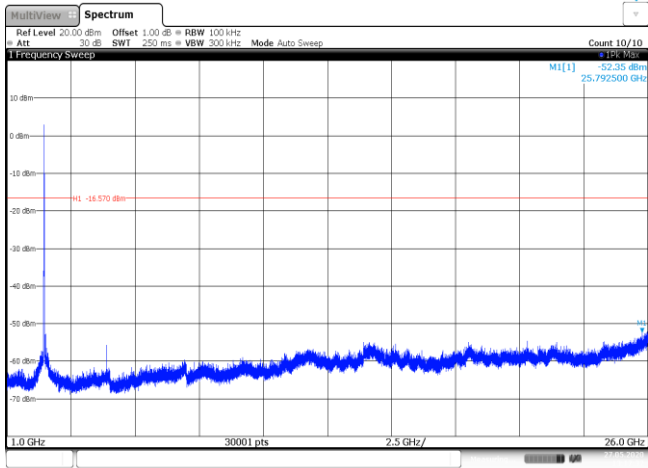
1 Frequency Sweep

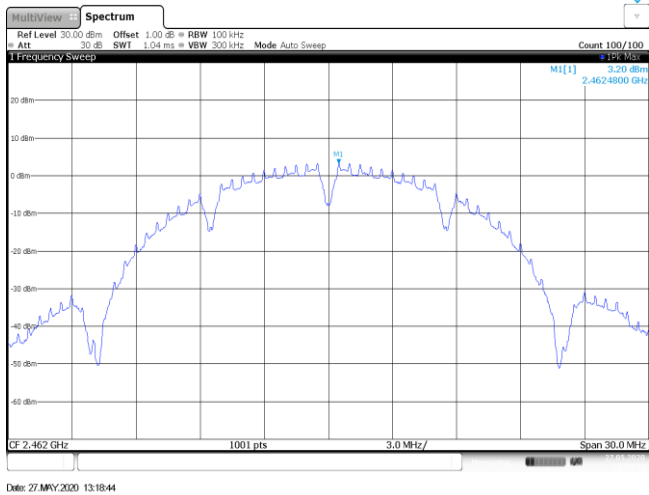
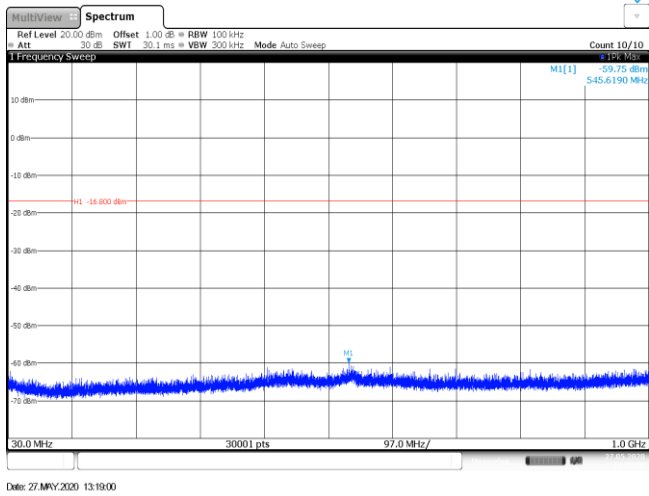
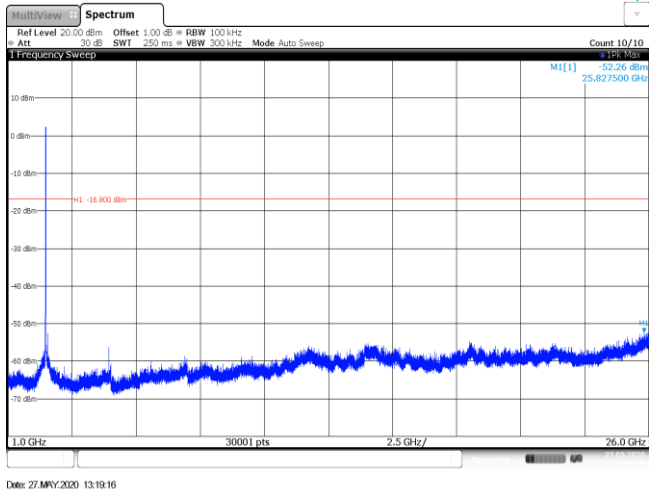
2.432 GHz 1001 pts 6.8 MHz/ 2.5 GHz

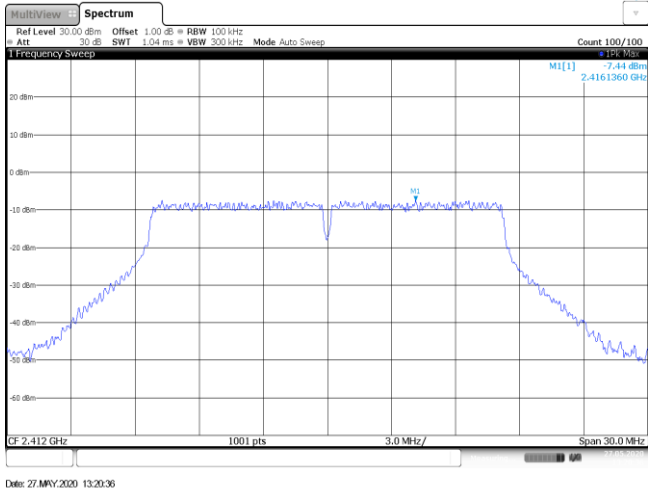
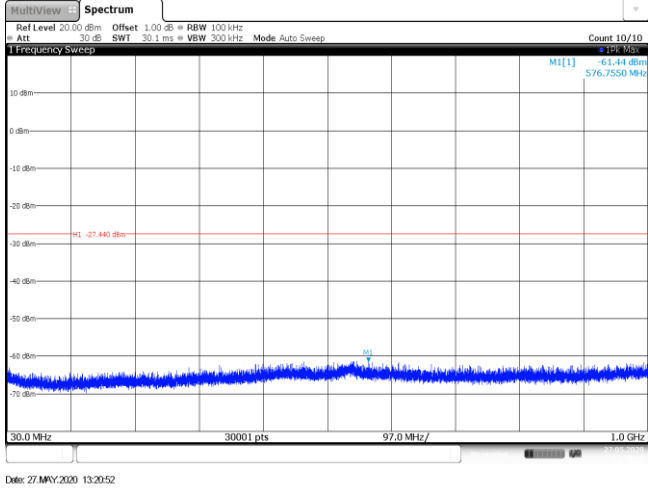
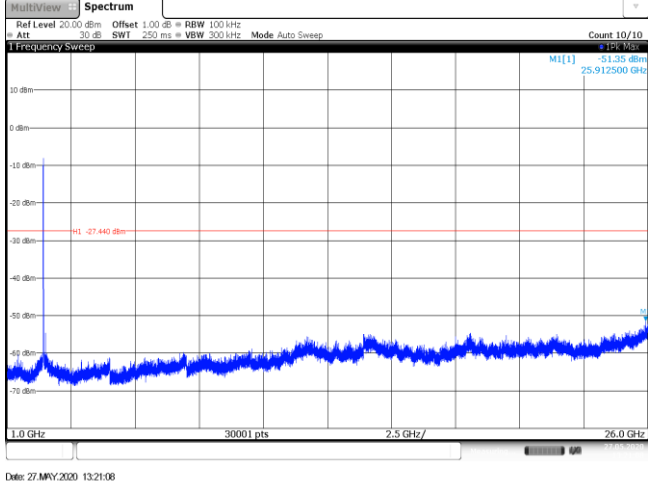
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.455471 GHz	-9.54 dBm		
M2	1		2.4835 GHz	-54.69 dBm		
M3	1		2.5 GHz	-59.45 dBm		
M4	1		2.484564 GHz	-53.85 dBm		

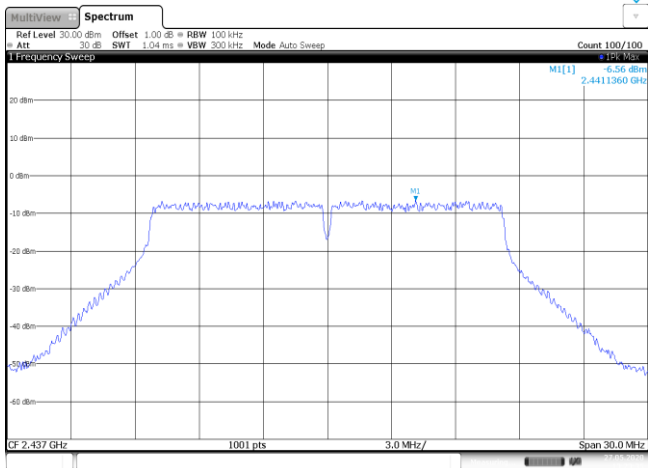
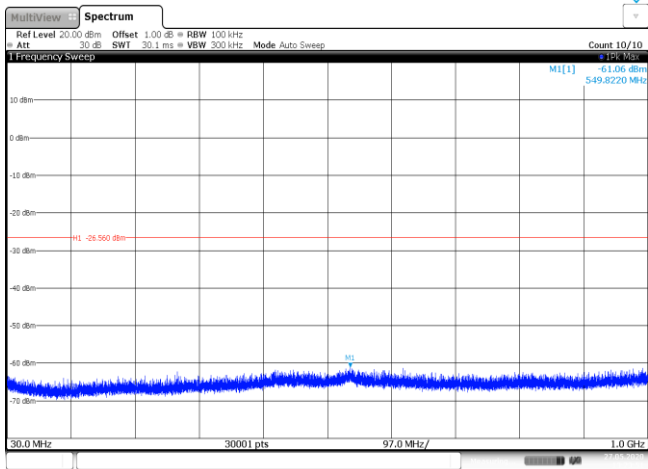
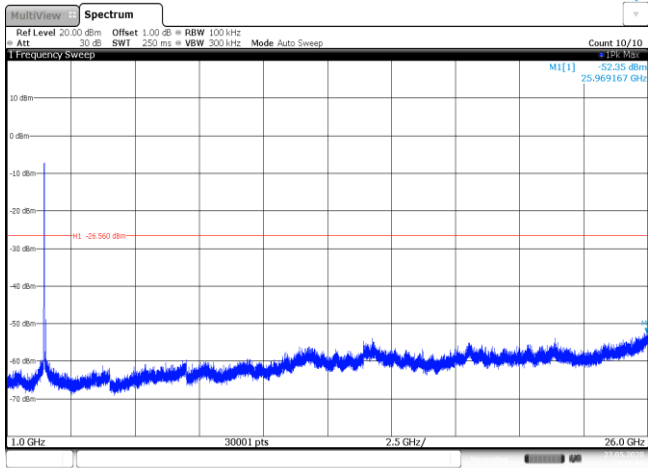
Date: 27.MAY.2020 13:37:36

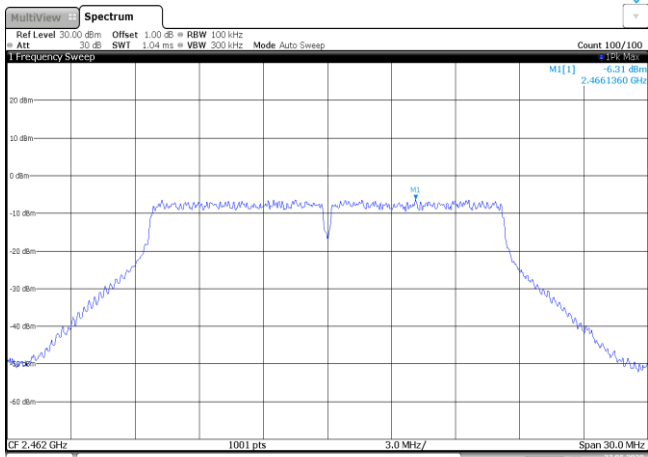
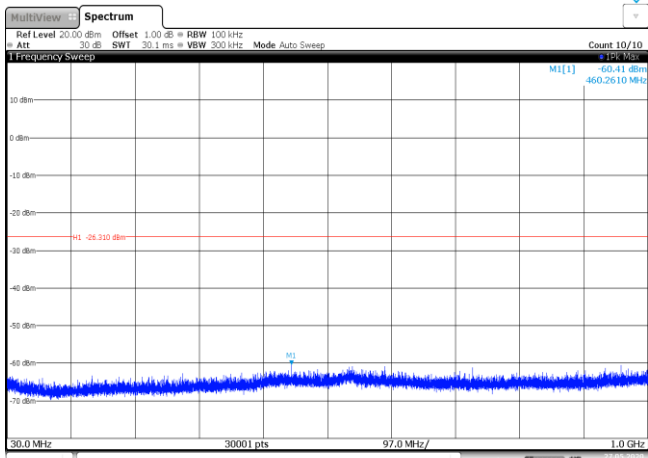
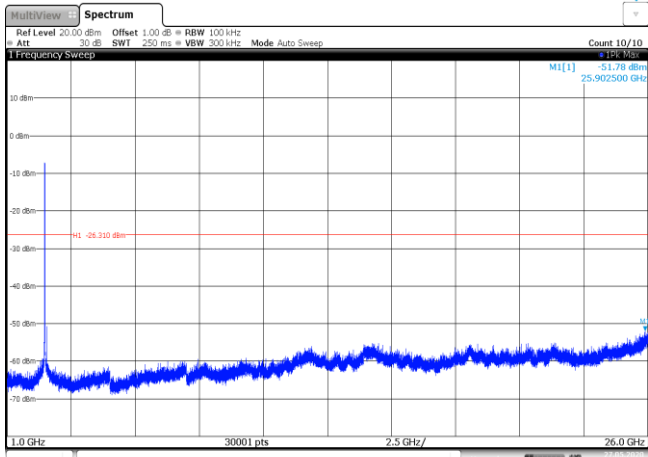
Test Item:	SE	Type:	802.11b
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			

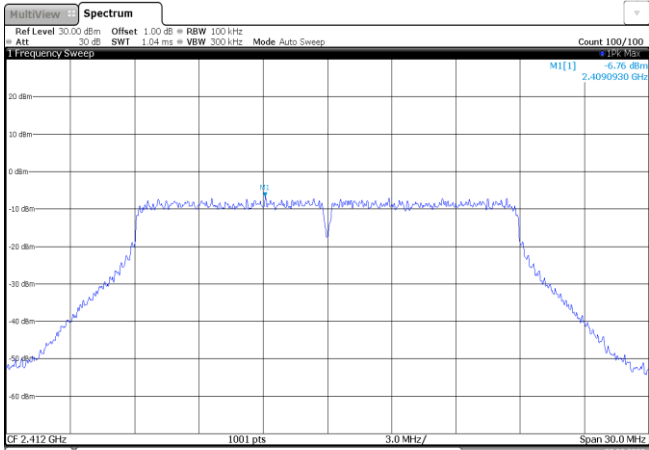
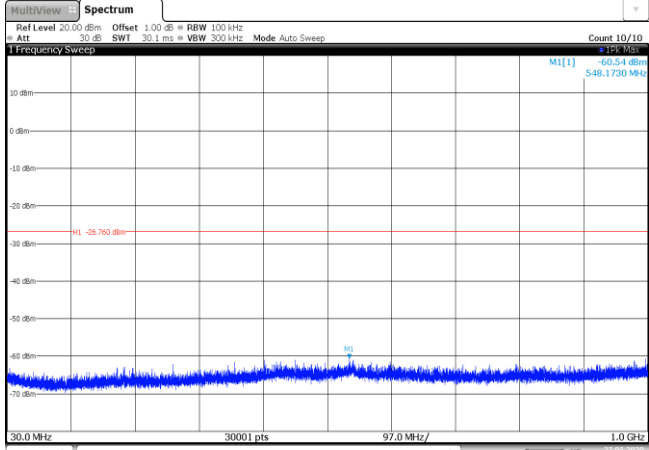
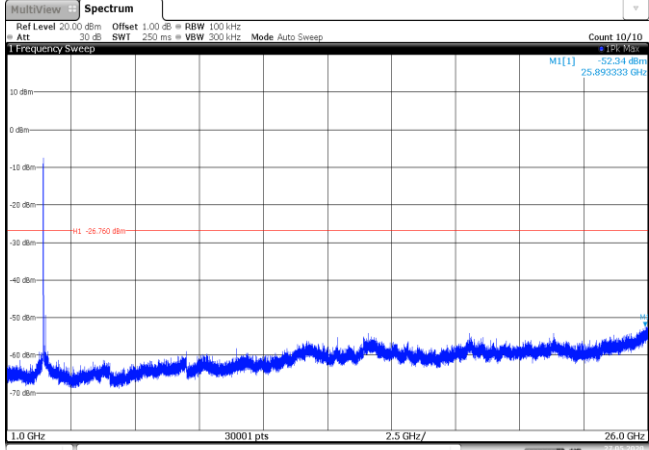
CH06 Reference level	 Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWI 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 M1[1] 3.43 dBm 2.4374800 GHz CF 2.437 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 27.MAY.2020 13:17:00
CH06 30MHz~1000MHz	 Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWI 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] 51.02 dBm 533.02290 MHz 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:17:16
CH06 1GHz~26GHz	 Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWI 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] 52.33 dBm 25.792500 GHz 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:17:32

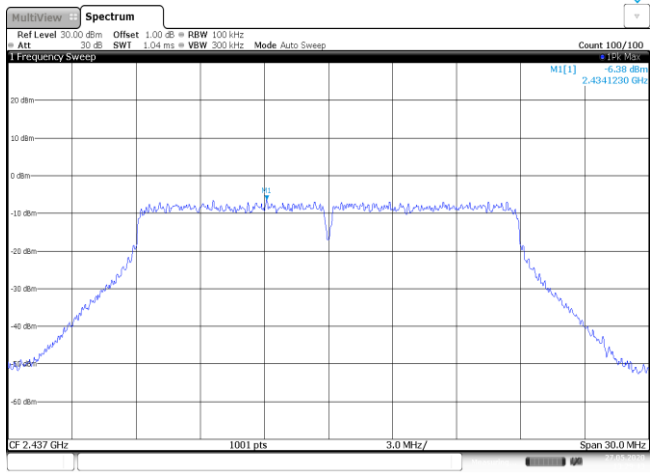
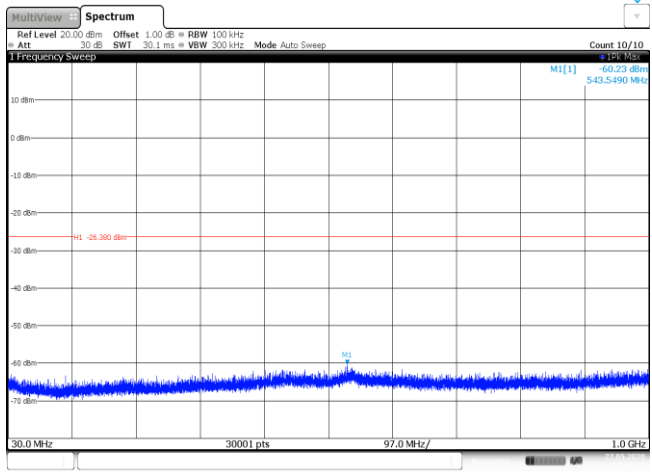
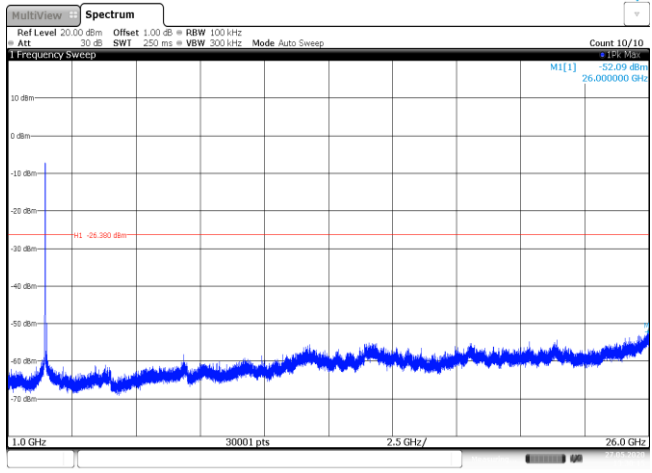
CH11 Reference level	
CH11 30MHz~1000MHz	
CH11 1GHz~26GHz	

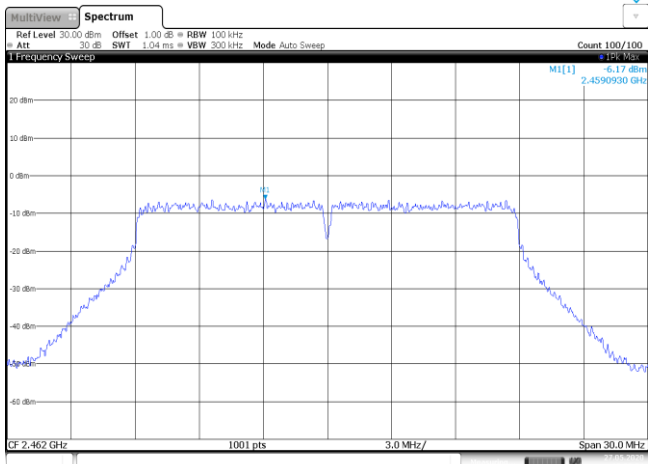
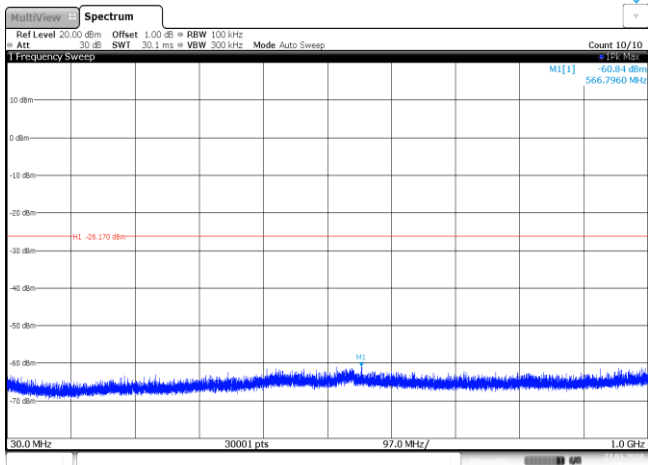
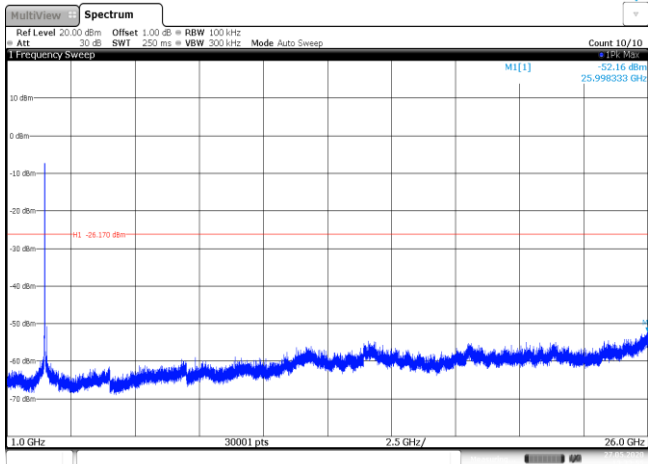
Test Item:	SE	Type:	802.11g
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			

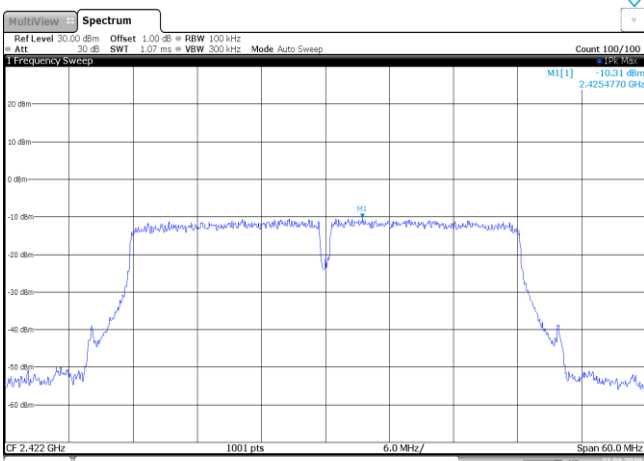
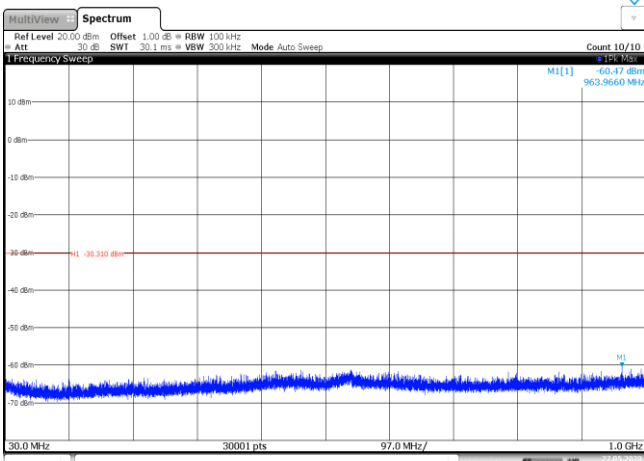
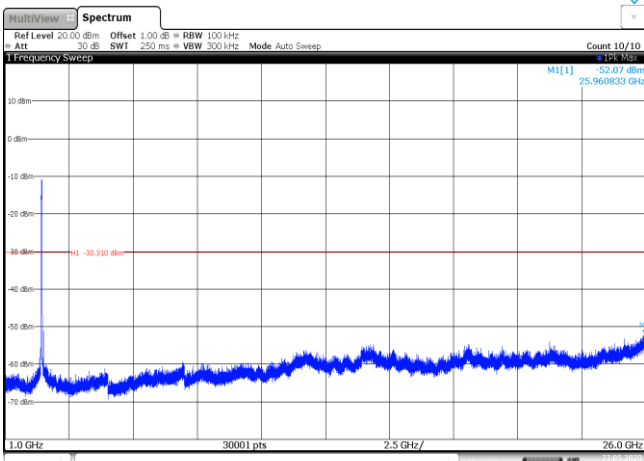
CH06 Reference level	 Ref Level 20.00 dBm Att 30 dB SWI 1.00 ms RBW 100 kHz VSW 300 kHz Mode Auto Sweep Count 100/100 1 Frequency Sweep M1[1] -5.55 dBm 2.4411360 GHz CF 2.437 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 27.MAY.2020 13:23:35
CH06 30MHz~1000MHz	 Ref Level 20.00 dBm Att 30 dB SWI 30.1 ms RBW 100 kHz VSW 300 kHz Mode Auto Sweep Count 10/10 1 Frequency Sweep M1[1] -51.06 dBm 549.8220 MHz 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:23:52
CH06 1GHz~26GHz	 Ref Level 20.00 dBm Att 30 dB SWI 250 ms RBW 100 kHz VSW 300 kHz Mode Auto Sweep Count 10/10 1 Frequency Sweep M1[1] -52.33 dBm 25.969167 GHz 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:24:08

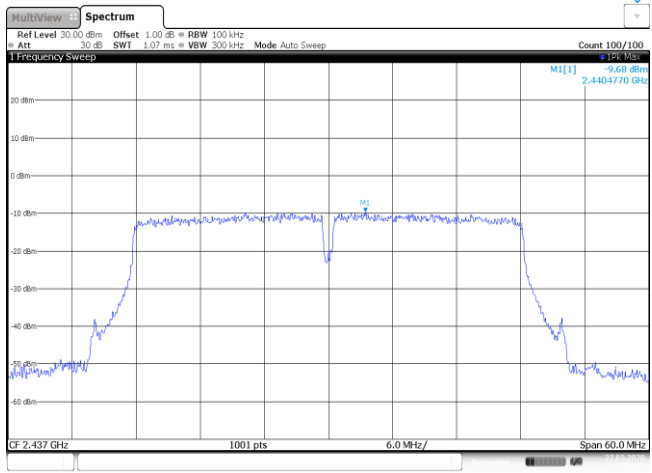
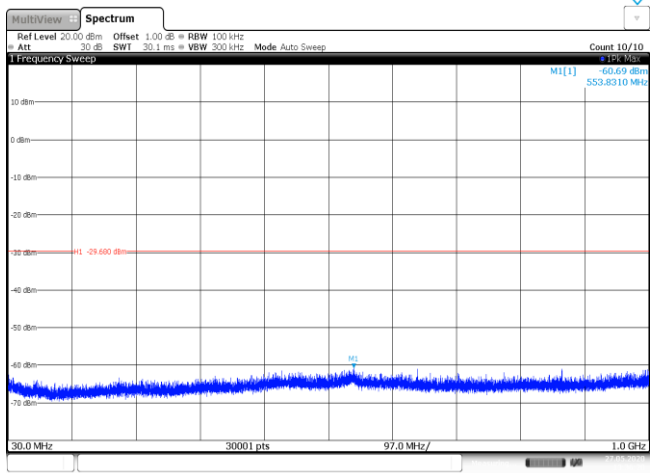
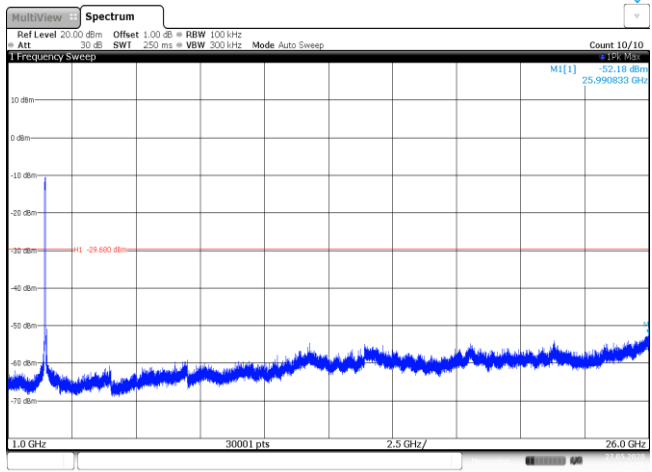
CH11 Reference level	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 M1[1] -5.31 dBm 2.4621360 GHz CF 2.462 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 27.MAY.2020 13:25:25
CH11 30MHz~1000MHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -50.41 dBm 460.2610 MHz 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:25:41
CH11 1GHz~26GHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -51.78 dBm 25.902500 GHz 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:25:57

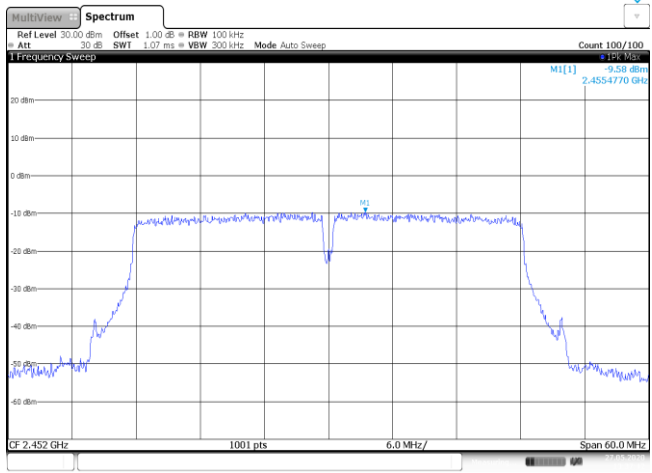
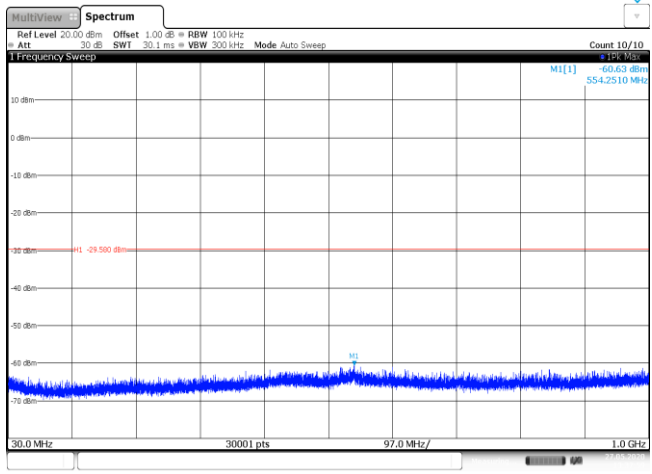
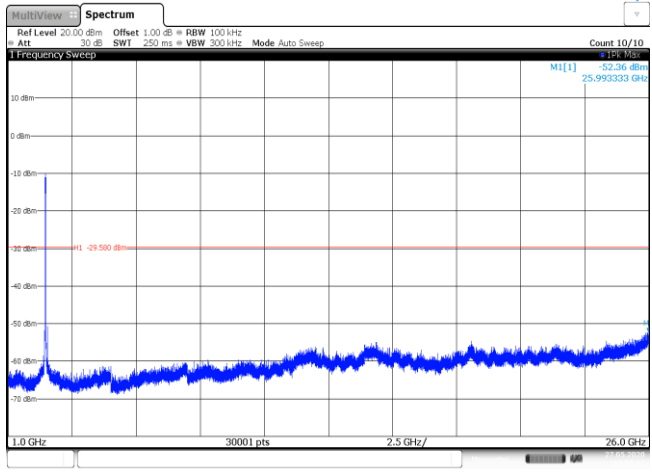
Test Item:	SE	Type:	802.11n(HT20)
CH01 Reference level		 Ref Level 30.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 M1[1] -25.760 dBm 2.4090930 GHz 2.412 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 27.MAY.2020 13:27:14	
CH01 30MHz~1000MHz		 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -60.54 dBm 548.1730 MHz 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:27:30	
CH01 1GHz~26GHz		 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -62.34 dBm 25.893333 GHz 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:27:46	

CH06 Reference level	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 M1[1] -6.38 dBm 2.4341230 GHz CF 2.437 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 27.MAY.2020 13:29:43
CH06 30MHz~1000MHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -63.22 dBm 543.5450 MHz 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:29:59
CH06 1GHz~26GHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -52.09 dBm 26.000000 GHz 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:30:15

CH11 Reference level	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 1 Frequency Sweep M1[1] -6.17 dBm 2.4590930 GHz CF 2.462 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 27.MAY.2020 13:32:23
CH11 30MHz~1000MHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1 Frequency Sweep M1[1] -60.81 dBm 566.7960 MHz 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:32:30
CH11 1GHz~26GHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1 Frequency Sweep M1[1] -52.16 dBm 25.998333 GHz 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:32:55

Test Item:	SE	Type:	802.11n(HT40)
CH03 Reference level		 CF 2.422 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 27.MAY.2020 13:34:19	
CH03 30MHz~1000MHz		 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 27.MAY.2020 13:34:35	
CH03 1GHz~26GHz		 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 27.MAY.2020 13:34:51	

CH06 Reference level	 27.MAY.2020 13:36:04
CH06 30MHz~1000MHz	 27.MAY.2020 13:36:20
CH06 1GHz~26GHz	 27.MAY.2020 13:36:36

CH09 Reference level	
CH09 30MHz~1000MHz	
CH09 1GHz~26GHz	

-----End of Report-----