

# Qwizdom Inc.

## Q5 RF

January 25, 2005

Report No. PROU0011

Report Prepared By



[www.nwemc.com](http://www.nwemc.com)  
1-888-EMI-CERT

© 2005 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

**Certificate of Test**  
**Issue Date: January 25, 2005**  
**Qwizdom Inc**  
**Q5 RF**

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.247(a)(2) Occupied Bandwidth:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(b)(3) Output Power:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Band Edge Compliance:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Out of Band Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Radiated Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(e) Power Spectral Density:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.207 AC Power Line Conducted Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Modifications made to the product**

**See the Modifications section of this report**

**Test Facility**

The measurement facilities used to collect the data is located at:

Northwest EMC, Inc.  
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124  
Phone: (503) 844-4066  
Fax: 844-3826

The sites have been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

**Approved By:**

**Don Facteau, IS Manager**

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
00	None		

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



200629-0  
200630-0  
200676-0

**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

**How important is it to understand performance criteria?**

It is the responsibility of the test laboratory to observe the results of the tests that are performed and to accurately report those results. As the responsible party (manufacturer, importer, etc) it is your responsibility to take those results, compare them against the specifications and standards, then, if appropriate make a declaration of conformity. As the responsible party it makes sense that you are fully aware of the requirements, how your device performs when tested to those requirements, and what information is being used to declare conformity.

To better assist you in making those conformity decisions, Northwest EMC has adopted a very simple, yet very clear performance assessment procedure. The following criteria is used when performing immunity or susceptibility tests:

**Performance Criteria 1:**

- ❑ The EUT exhibited no change in performance when operating as specified by the manufacturer. In this case no changes were observed during the test.
- ❑ In most cases this would be equivalent to Performance Criteria A. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, no changes were observed. Basically nothing happened.

**Performance Criteria 2:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment recovered without any operator intervention, once the test signal was removed. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria B. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT was able to recover from those changes without any operator intervention, once the test signal was removed.

**Performance Criteria 3:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment required some operator intervention in order to recover. This intervention may be in the form of changing EUT settings, or even resetting the system. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria C. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT required some sort of operator intervention to recover. There was no permanent damage and the EUT appeared to function normally after completion test.

**Performance Criteria 4:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment was damaged and would not recover. The data sheets will detail the exact phenomena observed.
- ❑ In most cases there is no specific criterion to compare this to, it typically ends the test. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. There was no recovery; the equipment would no longer function as intended.

Each of the standards and specifications has unique performance criteria. In order to make an accurate assessment, one must compare the test results provided with the specific performance criteria. **To ensure that a responsible party is compliant with the specifications, one must read and understand those specifications. Provided below is a sample performance criteria, taken from EN 61000-6-1.**

**EN 61000-6-1 Performance Criteria**

**Performance Criteria A:** *The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

**Performance Criteria B:** *The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

**Performance Criteria C:** *Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of controls.*

**How should a device perform in order for a declaration of conformity to be made?**

As already stated, it is the responsible party that must interpret and understand the results in such a way that a declaration of conformity is made. Having said that, we are often asked to render our opinion as to how a device should perform. Our recommendation simply follows the standards, as can be referenced below. Most of the standards and specifications offer the same performance criterion shown below as their requirements.

Test	Performance Criteria typically specified by the Standard	Equivalent Northwest EMC Performance Criteria
ESD	Performance Criteria B	Performance Criteria 1 or 2
Radiated RF	Performance Criteria A	Performance Criteria 1
EFT/Burst	Performance Criteria B	Performance Criteria 1 or 2
Surge	Performance Criteria B	Performance Criteria 1 or 2
Conducted RF	Performance Criteria A	Performance Criteria 1
Magnetic Field	Performance Criteria A	Performance Criteria 1
Voltage Dips and Variations	Performance Criteria B & C	Performance Criteria 1, 2, or 3

### What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

### How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

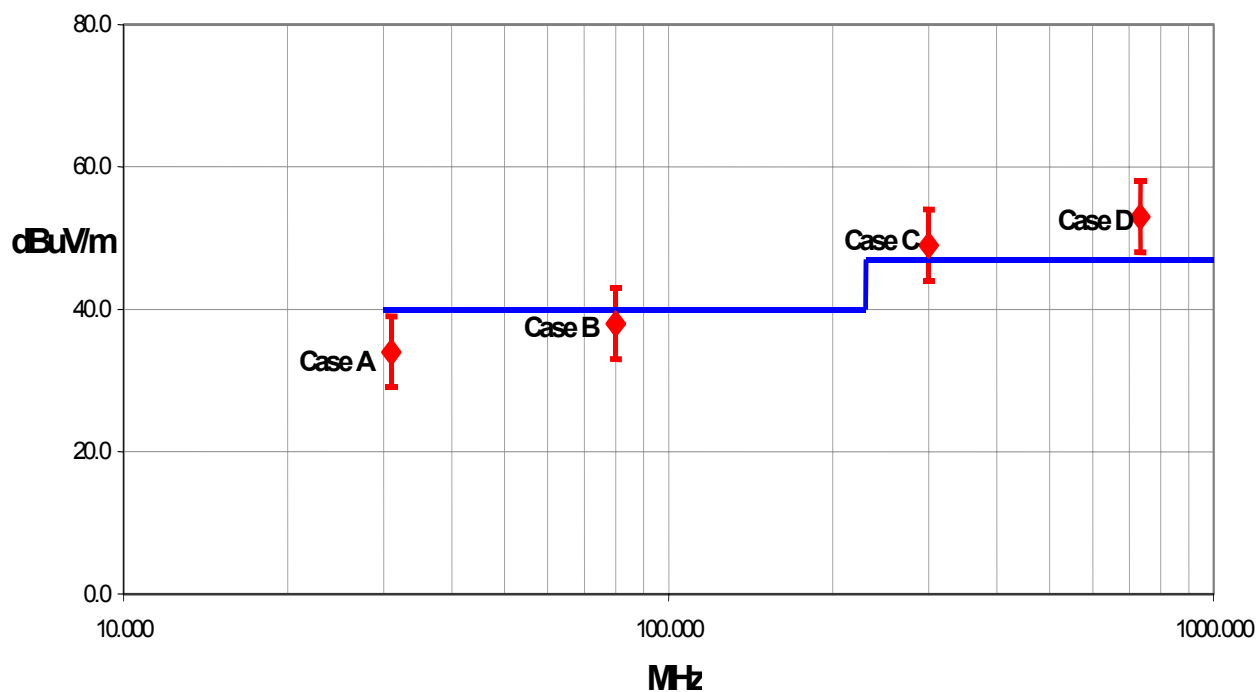

#### Test Result Scenarios:

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.



**Radiated Emissions  $\leq 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

**Radiated Emissions  $> 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.38 - 1.35
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 2.57 - 2.51	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.76 - 2.70

**Conducted Emissions**

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.97

**Radiated Immunity**

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.11

**Conducted Immunity**

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.10

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.

**California****Orange County Facility****Labs OC01 – OC13**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility****Labs EV01 – EV10**

22975 NW Evergreen Pkwy.,  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility****Labs TE01 – TE03**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**Washington****Sultan Facility****Labs SU01 – SU07**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536

**Party Requesting the Test**

<b>Company Name:</b>	Product Creation Studio
<b>Address:</b>	5425 Ballard Ave NW
<b>City, State, Zip:</b>	Seattle, WA 98107
<b>Test Requested By:</b>	Scott Thielman
<b>Model:</b>	Q5 RF
<b>First Date of Test:</b>	December 22, 2004
<b>Last Date of Test:</b>	January 9, 2005
<b>Receipt Date of Samples:</b>	December 21, 2004
<b>Equipment Design Stage:</b>	Pre-Production
<b>Equipment Condition:</b>	No visual damage.

**Information Provided by the Party Requesting the Test**

<b>Clocks/Oscillators:</b>	1 MHz, 6 MHz, 16 MHz, 48 MHz, 65 MHz, 256 MHz, 2.45 GHz
<b>I/O Ports:</b>	none

**Functional Description of the EUT (Equipment Under Test):**

EUT is a 19 button with shuttle remote for an Audience Response System (ARS).

**Client Justification for EUT Selection:**

The product is an engineering sample, representative of the final product.


**Client Justification for Test Selection:**

These test satisfy the requirements for FCC 15.247 Certification.

**EUT Information**

The Audience Response System (ARS) consists of the elements shown in Figure 1. A computer (laptop or desktop) connects to the network host via a USB connection. The host obtains its power from the USB connection and alternately from a regulated 9VDC wall transformer. The network host communicates to multiple audience remotes via an IEEE 802.15.4 compliant RF link. The teacher remote, Q5 RF, has more buttons and a larger graphical display, while the student remote, Q4 RF, has fewer buttons and smaller LCD. The remotes accept user feedback via the keypad and displays information on an LCD. The Q5 remotes are powered by rechargeable batteries and can be powered and recharged via a 9VDC regulated wall transformer. Two AA alkaline batteries power the Q4 remotes.

**Figure 1 – RF Network System Overview**

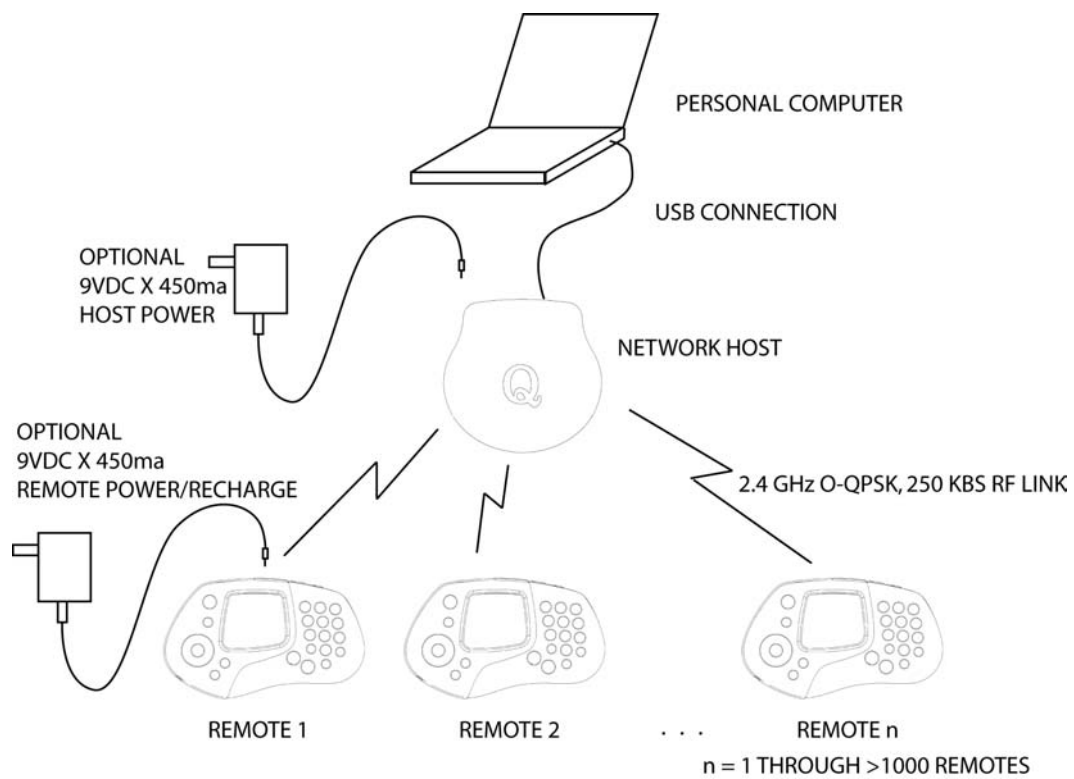

<b>Equipment modifications</b>					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	12/22/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
2	Out of Band Emissions	12/22/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	AC Powerline Conducted Emissions	01/04/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
4	Band Edge Compliance	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
5	Output Power	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
6	Occupied Bandwidth	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
7	Power Spectral Density	01/09/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz
----------------

**Frequency Range Investigated**

<b>Start Frequency</b>	30 MHz	<b>Stop Frequency</b>	26 GHz
------------------------	--------	-----------------------	--------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	Standard Production Software	<b>Version</b>	Unknown
<b>Description</b>			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

**EUT and Peripherals in Test Setup Boundary**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

**Cables**

<b>Cable Type</b>	<b>Shield</b>	<b>Length (m)</b>	<b>Ferrite</b>	<b>Connection 1</b>	<b>Connection 2</b>
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	AR	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo

### Test Description

**Requirement:** Per 47 CFR 15.247(d), in any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The EUT was configured for low, mid, and high transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and suitable attenuation were used for this test in order to provide sufficient measurement sensitivity.

Completed by:



EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	12/22/04
Customer:	Product Creation Studio	Temperature:	23
Attendees:	Scott Thielman	Humidity:	23%
Cust. Ref. No.:		Barometric Pressure:	30.26
Tested by:	Dan Haas	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS			
Specification:	FCC 15.247(d) Spurious Radiated Emissions:2004	Method:	ANSI C63.4:2003

SAMPLE CALCULATIONS
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS
In any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band.

EUT OPERATING MODES
Low channel

DEVIATIONS FROM TEST STANDARD
No deviations.

RESULTS	Run #
Pass	5

Other	<div><div></div><div><div>Tested By:</div></div></div>
-------	--

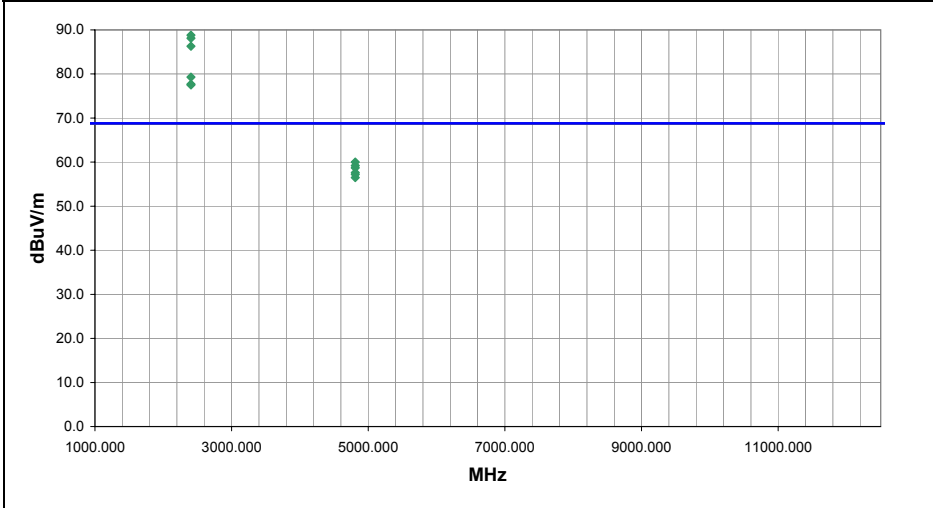

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2405.000	71.2	-2.4	327.0	1.1	3.0	20.0	H-Horn	PK	0.0	88.8	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2405.000	70.5	-2.4	48.0	1.2	3.0	20.0	V-Horn	PK	0.0	88.1	n/a	n/a	Field Strength of Fundamental. EUT on its side.
2405.000	68.7	-2.4	360.0	1.3	3.0	20.0	H-Horn	PK	0.0	86.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2405.000	61.7	-2.4	56.0	1.2	3.0	20.0	V-Horn	PK	0.0	79.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2405.000	60.1	-2.4	232.0	1.2	3.0	20.0	V-Horn	PK	0.0	77.7	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2405.000	59.9	-2.4	334.0	3.0	3.0	20.0	H-Horn	PK	0.0	77.5	n/a	n/a	Field Strength of Fundamental. EUT on its side.
4809.954	56.7	3.3	34.0	1.4	3.0	0.0	H-Horn	PK	0.0	60.0	68.8	-8.8	EUT Vertical
4809.954	55.9	3.3	159.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.2	68.8	-9.6	EUT on its side.
4809.954	55.4	3.3	16.0	1.4	3.0	0.0	V-Horn	PK	0.0	58.7	68.8	-10.1	EUT Vertical
4809.954	54.3	3.3	344.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.6	68.8	-11.2	EUT Horizontal
4809.954	53.9	3.3	11.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.2	68.8	-11.6	EUT on its side.
4809.954	53.2	3.3	201.0	1.2	3.0	0.0	V-Horn	PK	0.0	56.5	68.8	-12.3	EUT Horizontal



NORTHWEST

EMC

Out of Band Radiated Emissions

EUT: Q5 RF

Serial Number: EMC 0x44040F

Customer: Product Creation Studio

Attendees: Scott Thielman

Cust. Ref. No.:

Tested by: Holly Ashkannejhad

Work Order: PROU0011

Date: 12/22/04

Temperature: 23

Humidity: 23%

Barometric Pressure: 30.26

Job Site: EV01

Power: 120VAC/60Hz

Method: ANSI C63.4:2003

Specification: FCC 15.247(d) Spurious Radiated Emissions:2004

Method: ANSI C63.4:2003

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

In any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band.

EUT OPERATING MODES

Mid channel

DEVIATIONS FROM TEST STANDARD

No deviations.

RESULTS

Run #

Pass

6

Other

Holly Ashkannejhad

Tested By:

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0


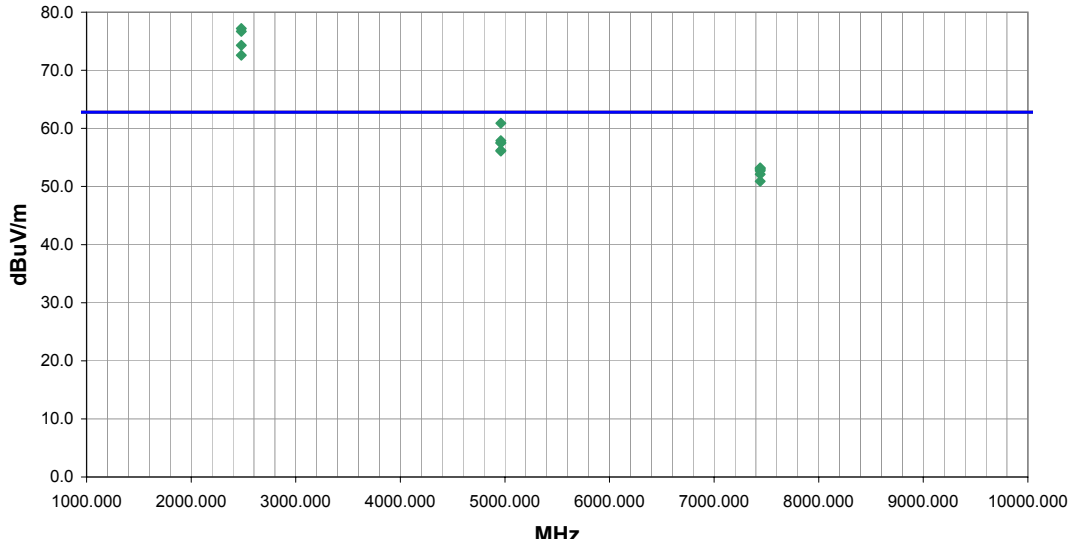
1000.000

10000.000



dBuV/m

MHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2440.000	66.5	-2.2	343.0	1.1	3.0	20.0	H-Horn	PK	0.0	84.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2440.000	65.6	-2.2	110.0	1.2	3.0	20.0	V-Horn	PK	0.0	83.4	n/a	n/a	Field Strength of Fundamental. EUT on its side.
2440.000	58.5	-2.2	261.0	1.2	3.0	20.0	V-Horn	PK	0.0	76.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2440.000	57.4	-2.2	253.0	1.2	3.0	20.0	V-Horn	PK	0.0	75.2	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2440.000	56.1	-2.2	201.0	1.3	3.0	20.0	H-Horn	PK	0.0	73.9	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2440.000	55.1	-2.2	319.0	1.2	3.0	20.0	H-Horn	PK	0.0	72.9	n/a	n/a	Field Strength of Fundamental.. EUT on its side.
4880.079	57.8	3.6	2.0	1.3	3.0	0.0	H-Horn	PK	0.0	61.4	64.3	-2.9	EUT on its side
4880.079	56.7	3.6	22.0	1.1	3.0	0.0	V-Horn	PK	0.0	60.3	64.3	-4.0	EUT Vertical
4880.079	55.0	3.6	343.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.6	64.3	-5.7	EUT Vertical
4880.079	54.8	3.6	186.0	1.7	3.0	0.0	V-Horn	PK	0.0	58.4	64.3	-5.9	EUT Horizontal
4880.079	53.6	3.6	345.0	1.1	3.0	0.0	H-Horn	PK	0.0	57.2	64.3	-7.1	EUT Horizontal
7320.057	44.7	10.5	346.0	1.4	3.0	0.0	V-Horn	PK	0.0	55.2	64.3	-9.1	EUT Vertical
7320.057	44.0	10.5	322.0	1.1	3.0	0.0	H-Horn	PK	0.0	54.5	64.3	-9.8	EUT Vertical
7320.057	43.4	10.5	276.0	1.1	3.0	0.0	H-Horn	PK	0.0	53.9	64.3	-10.4	EUT on its side
7320.057	43.3	10.5	35.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.8	64.3	-10.5	EUT Horizontal
7320.057	41.6	10.5	172.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.1	64.3	-12.2	EUT on its side
4880.079	48.4	3.6	227.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.0	64.3	-12.3	EUT on its side
7320.057	40.5	10.5	-1.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.0	64.3	-13.3	EUT Horizontal

NORTHWEST EMC														Out of Band Radiated Emissions													
EUT: Q5 RF														Work Order: PROU0011													
Serial Number: EMC 0x44040F														Date: 12/22/04													
Customer: Product Creation Studio														Temperature: 22													
Attendees: Scott Thielman														Humidity: 32%													
Cust. Ref. No.:														Barometric Pressure: 30.44													
Tested by: Holly Ashkannejhad														Power: 120VAC/60Hz													
														Job Site: EV01													
TEST SPECIFICATIONS																											
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004														Method: ANSI C63.4:2003													
SAMPLE CALCULATIONS																											
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																											
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																											
COMMENTS																											
In any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band.																											
EUT OPERATING MODES																											
High channel																											
DEVIATIONS FROM TEST STANDARD																											
No deviations.																											
RESULTS																											
Pass																								Run #			
																								7			
Other																											
Tested By:																											
																											
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments														
2480.000	65.0	-2.2	49.0	1.2	3.0	20.0	V-Horn	PK	0.0	82.8	n/a	n/a	Field Strength of														
2480.000	62.9	-2.2	168.0	1.3	3.0	20.0	H-Horn	PK	0.0	80.7	n/a	n/a	Field Strength of														
2480.000	59.4	-2.2	208.0	1.2	3.0	20.0	V-Horn	PK	0.0	77.2	n/a	n/a	Field Strength of														
2480.000	58.9	-2.2	163.0	1.1	3.0	20.0	H-Horn	PK	0.0	76.7	n/a	n/a	Field Strength of														
2480.000	56.5	-2.2	202.0	1.8	3.0	20.0	V-Horn	PK	0.0	74.3	n/a	n/a	Field Strength of														
2480.000	54.8	-2.2	147.0	1.3	3.0	20.0	H-Horn	PK	0.0	72.6	n/a	n/a	Field Strength of														
4959.985	57.3	3.6	27.0	1.3	3.0	0.0	H-Horn	PK	0.0	60.9	62.8	-1.9	EUT on its side														
4959.985	54.3	3.6	186.0	1.6	3.0	0.0	V-Horn	PK	0.0	57.9	62.8	-4.9	EUT Vertical														
4959.985	53.9	3.6	200.0	1.3	3.0	0.0	V-Horn	PK	0.0	57.5	62.8	-5.3	EUT Horizontal														
4959.985	53.9	3.6	216.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.5	62.8	-5.3	EUT Vertical														
4959.985	52.6	3.6	37.0	1.1	3.0	0.0	H-Horn	PK	0.0	56.2	62.8	-6.6	EUT Horizontal														
4959.985	52.5	3.6	82.0	1.7	3.0	0.0	V-Horn	PK	0.0	56.1	62.8	-6.7	EUT on its side														
7440.009	42.1	11.1	264.0	1.5	3.0	0.0	H-Horn	PK	0.0	53.2	62.8	-9.6	EUT on its side														
7440.009	42.0	11.1	220.0	2.4	3.0	0.0	V-Horn	PK	0.0	53.1	62.8	-9.7	EUT Horizontal														
7440.009	41.8	11.1	52.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.9	62.8	-9.9	EUT Vertical														
7440.009	41.6	11.1	31.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.7	62.8	-10.1	EUT on its side														
7440.009	41.0	11.1	145.0	1.8	3.0	0.0	H-Horn	PK	0.0	52.1	62.8	-10.7	EUT Vertical														
7440.009	39.8	11.1	158.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.9	62.8	-11.9	EUT Horizontal														



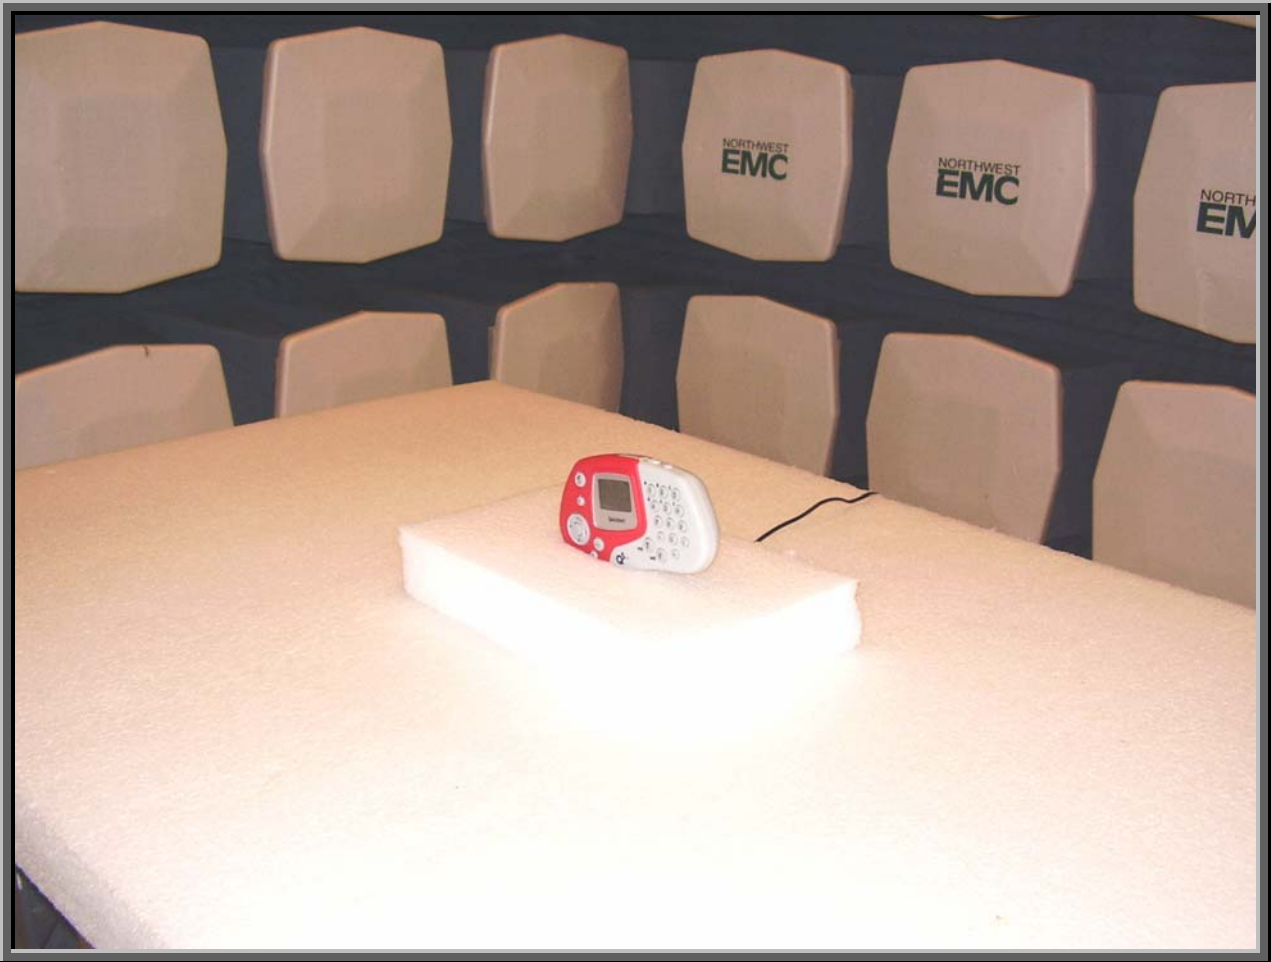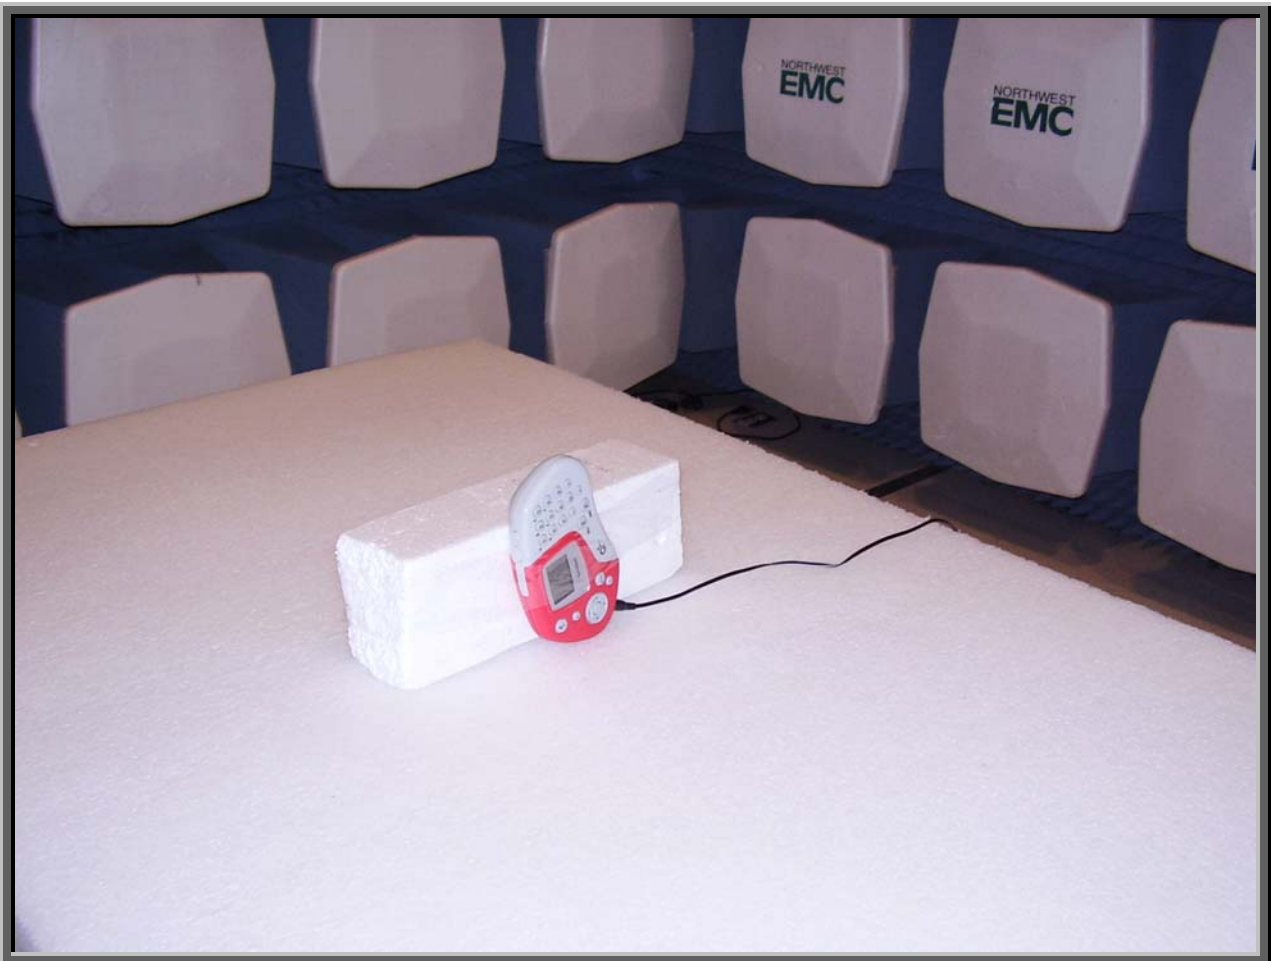

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

Transmit
----------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60Hz
---------------

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	CUI Inc.	41-9-500R	NA
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.5	No	Q5RF	AC Adapter




Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
High Pass Filter	TTE	H97-100k-50-720B	HFC	12/29/2004	13 mo
Attenuator	Tektronix	011-0059-02	ATH	12/29/2004	13 mo
LISN	Solar	9252-50-R-24-BNC	LIO	04/30/2004	12 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo


### Test Description


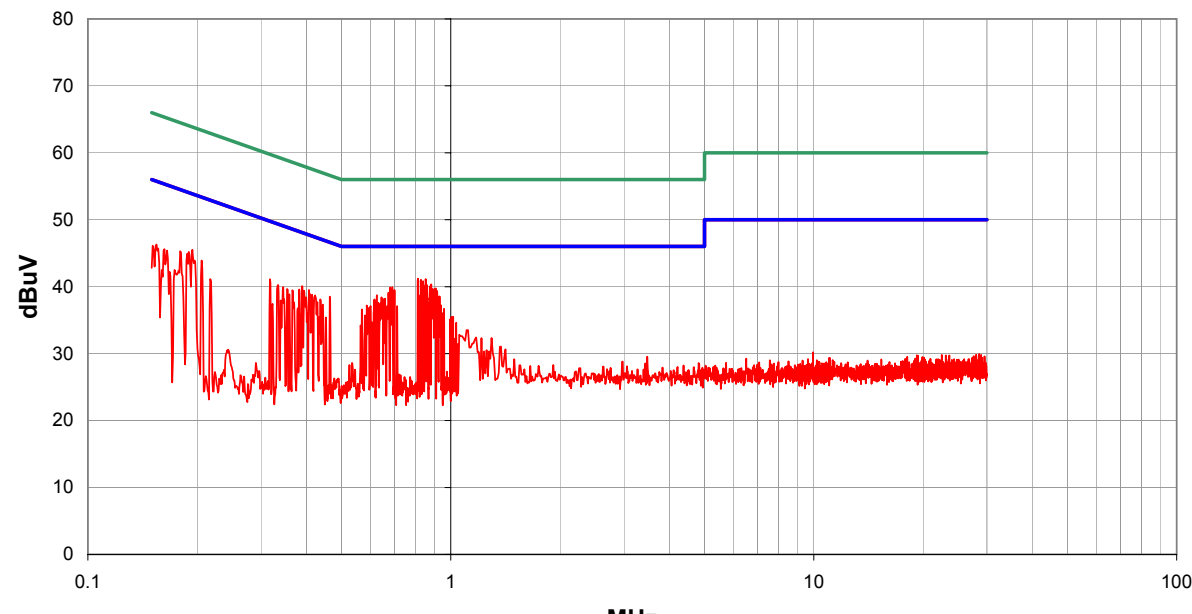
**Requirement:** Per 47 15.207(d), if the EUT is connected to the AC power line indirectly, obtaining its power from another device that is connected to the AC power line, then it should be tested to demonstrate compliance with the conducted limits of 15.207.

**Configuration:** The EUT will be powered from a device that could be connected to the AC power line. Therefore, the measurements were made on the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.4-2003.

Completed by:



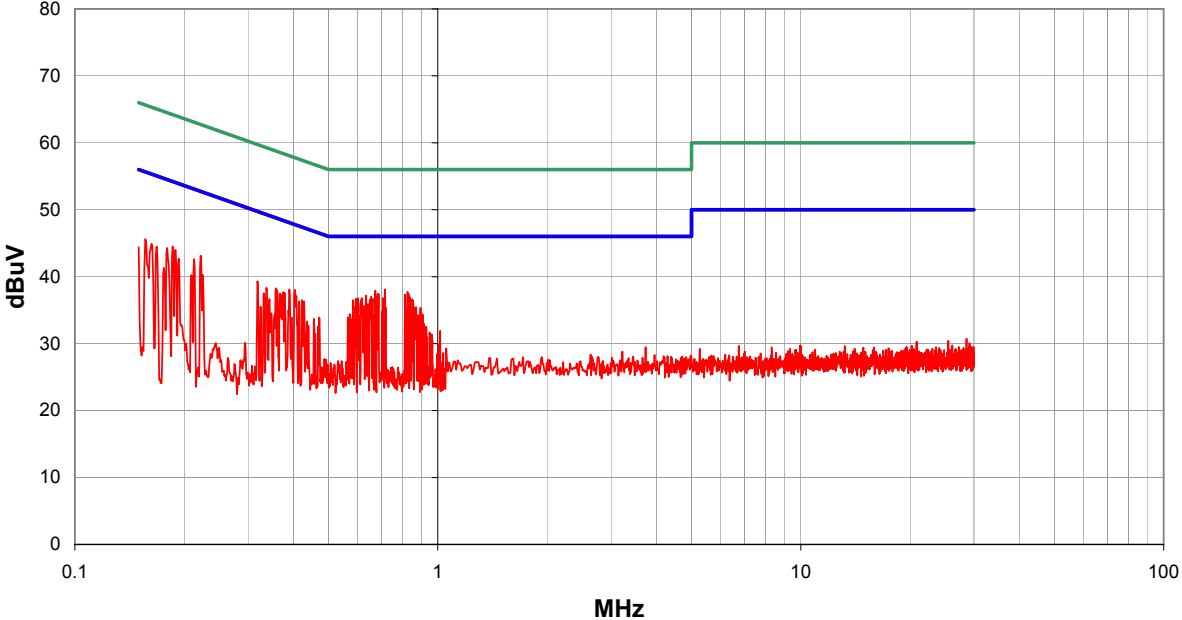NORTHWEST		ACQ 2005.1.3										
EMC		EMI A2.13										
EUT: Q5 RF		Work Order: PROU0011										
Serial Number: EMC 0x44040F		Date: 01/03/05										
Customer: Product Creation Studio		Temperature: 18										
Attendees: None		Humidity: 32%										
Cust. Ref. No.:		Barometric Pressure: 30.09										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz										
		Job Site: EV01										
TEST SPECIFICATIONS												
Specification: FCC 15.207:2004		Method: ANSI C63.4: 2003										
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Transmitting low channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS		Line	Run #									
Pass		N	13									
Other												
		Holly Ashkannejhad Tested By:										
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.715	17.9			0.0	0.2	20.0				38.1	46.0	-7.9
0.673	17.7			0.0	0.2	20.0				37.9	46.0	-8.1
0.825	17.5			0.0	0.2	20.0				37.7	46.0	-8.3
0.831	17.2			0.0	0.2	20.0				37.4	46.0	-8.6
0.683	17.2			0.0	0.2	20.0				37.4	46.0	-8.6
0.686	17.2			0.0	0.2	20.0				37.4	46.0	-8.6
0.811	17.1			0.0	0.2	20.0				37.3	46.0	-8.7
0.634	17.0			0.0	0.2	20.0				37.2	46.0	-8.8
0.655	16.8			0.0	0.2	20.0				37.0	46.0	-9.0
0.679	16.8			0.0	0.2	20.0				37.0	46.0	-9.0
0.837	16.7			0.0	0.2	20.0				36.9	46.0	-9.1
0.602	16.6			0.0	0.2	20.0				36.8	46.0	-9.2
0.617	16.6			0.0	0.2	20.0				36.8	46.0	-9.2
0.706	16.6			0.0	0.2	20.0				36.8	46.0	-9.2
0.595	16.5			0.0	0.2	20.0				36.7	46.0	-9.3
0.661	16.5			0.0	0.2	20.0				36.7	46.0	-9.3
0.851	16.4			0.0	0.2	20.0				36.6	46.0	-9.4
0.650	16.4			0.0	0.2	20.0				36.6	46.0	-9.4
0.584	16.3			0.0	0.2	20.0				36.5	46.0	-9.5

NORTHWEST <b>EMC</b>		<b>CONDUCTED EMISSIONS DATA SHEET</b>				ACQ 2005.1.3 EMI A2.13			
EUT: Q5 RF					Work Order: PROU0011				
Serial Number: EMC 0x44040F					Date: 01/03/05				
Customer: Product Creation Studio					Temperature: 18				
Attendees: None					Humidity: 32%				
Cust. Ref. No.:					Barometric Pressure: 30.09				
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz	Job Site: EV01				
TEST SPECIFICATIONS									
Specification: FCC 15.207:2004					Method: ANSI C63.4: 2003				
SAMPLE CALCULATIONS									
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation									
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator									
COMMENTS									
EUT OPERATING MODES									
Transmitting low channel									
DEVIATIONS FROM TEST STANDARD									
No deviations.									
RESULTS									
Pass					Line	Run #			
					L1	14			
Other									
					 Tested By:				
									
Freq (MHz)	Amplitude (dBuV)		Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector <small>(blank equal peaks [PK] from scan)</small>	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.811	21.0		0.0	0.2	20.0		41.2	46.0	-4.8
0.852	20.9		0.0	0.2	20.0		41.1	46.0	-4.9
0.828	20.8		0.0	0.2	20.0		41.0	46.0	-5.0
0.838	20.6		0.0	0.2	20.0		40.8	46.0	-5.2
0.883	20.1		0.0	0.2	20.0		40.3	46.0	-5.7
0.860	20.0		0.0	0.2	20.0		40.2	46.0	-5.8
0.848	19.9		0.0	0.2	20.0		40.1	46.0	-5.9
0.876	19.8		0.0	0.2	20.0		40.0	46.0	-6.0
0.681	19.7		0.0	0.2	20.0		39.9	46.0	-6.1
0.690	19.7		0.0	0.2	20.0		39.9	46.0	-6.1
0.909	19.5		0.0	0.3	20.0		39.8	46.0	-6.2
0.900	19.4		0.0	0.2	20.0		39.6	46.0	-6.4
0.889	19.4		0.0	0.2	20.0		39.6	46.0	-6.4
0.902	19.3		0.0	0.3	20.0		39.6	46.0	-6.4
0.699	19.3		0.0	0.2	20.0		39.5	46.0	-6.5
0.915	19.1		0.0	0.3	20.0		39.4	46.0	-6.6
0.674	18.9		0.0	0.2	20.0		39.1	46.0	-6.9
0.816	18.5		0.0	0.2	20.0		38.7	46.0	-7.3
0.625	18.5		0.0	0.2	20.0		38.7	46.0	-7.3



NORTHWEST		ACQ 2005.1.3						
EMC		EMI A2.13						
EUT: Q5 RF		Work Order: PROU0011						
Serial Number: EMC 0x44040F		Date: 01/04/05						
Customer: Product Creation Studio		Temperature: 18						
Attendees: None		Humidity: 32%						
Cust. Ref. No.:		Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz						
		Job Site: EV01						
TEST SPECIFICATIONS								
Specification: FCC 15.207:2004		Method: ANSI C63.4: 2003						
SAMPLE CALCULATIONS								
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation								
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator								
COMMENTS								
EUT OPERATING MODES								
Transmitting mid channel								
DEVIATIONS FROM TEST STANDARD								
No deviations.								
RESULTS		Line	Run #					
Pass		L1	15					
Other								
		Holly Ashkannejhad Tested By:						
Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.789	23.1	0.0	0.2	20.0		43.3	46.0	-2.7
0.764	23.0	0.0	0.2	20.0		43.2	46.0	-2.8
0.749	22.9	0.0	0.2	20.0		43.1	46.0	-2.9
0.793	22.9	0.0	0.2	20.0		43.1	46.0	-2.9
0.758	22.7	0.0	0.2	20.0		42.9	46.0	-3.1
0.769	22.7	0.0	0.2	20.0		42.9	46.0	-3.1
0.778	22.7	0.0	0.2	20.0		42.9	46.0	-3.1
0.721	22.6	0.0	0.2	20.0		42.8	46.0	-3.2
0.733	22.5	0.0	0.2	20.0		42.7	46.0	-3.3
0.707	22.4	0.0	0.2	20.0		42.6	46.0	-3.4
0.816	22.3	0.0	0.2	20.0		42.5	46.0	-3.5
0.711	22.2	0.0	0.2	20.0		42.4	46.0	-3.6
0.775	22.2	0.0	0.2	20.0		42.4	46.0	-3.6
0.695	22.0	0.0	0.2	20.0		42.2	46.0	-3.8
0.715	22.0	0.0	0.2	20.0		42.2	46.0	-3.8
0.727	21.9	0.0	0.2	20.0		42.1	46.0	-3.9
0.699	21.1	0.0	0.2	20.0		41.3	46.0	-4.7
0.810	21.0	0.0	0.2	20.0		41.2	46.0	-4.8
0.828	20.9	0.0	0.2	20.0		41.1	46.0	-4.9

EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/04/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

## TEST SPECIFICATIONS

Specification:	FCC 15.207:2004	Method:	ANSI C63.4: 2003
----------------	-----------------	---------	------------------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

## COMMENTS

## EUT OPERATING MODES

Transmitting mid channel

## DEVIATIONS FROM TEST STANDARD

No deviations.


## RESULTS

Line	Run #
Pass	N 16


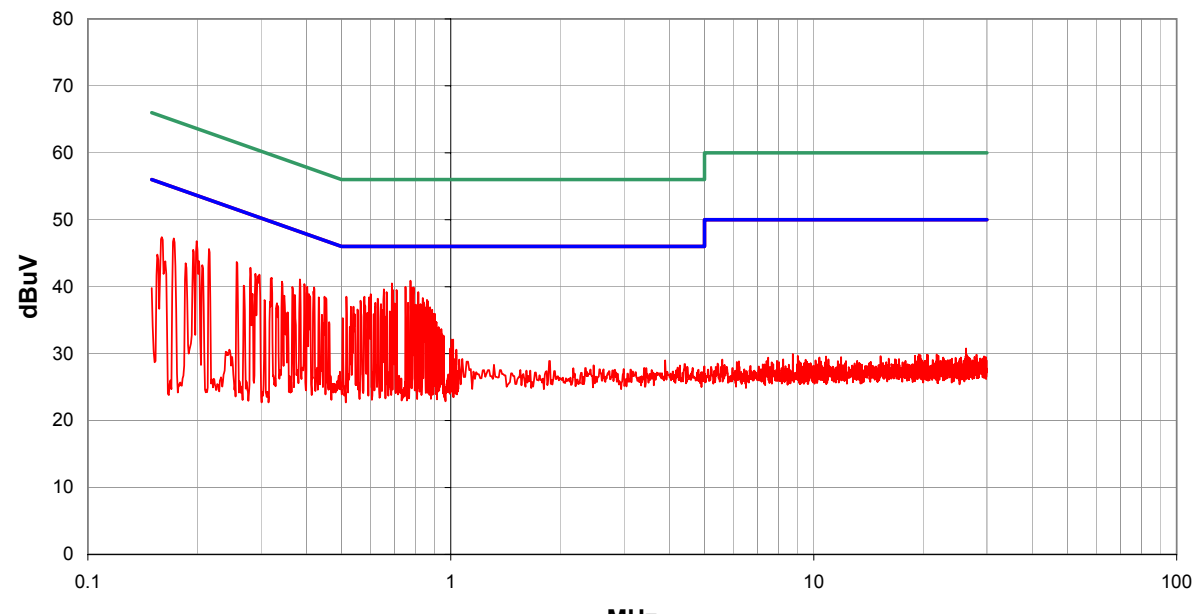
## Other


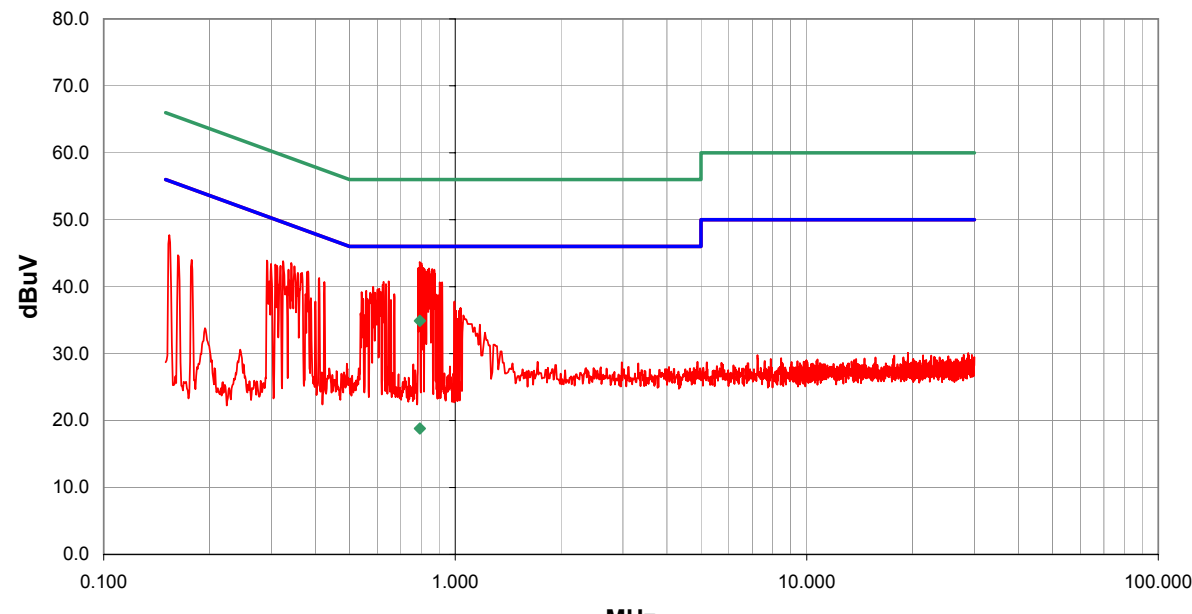
*Holly Ashkannejhad*


Tested By:

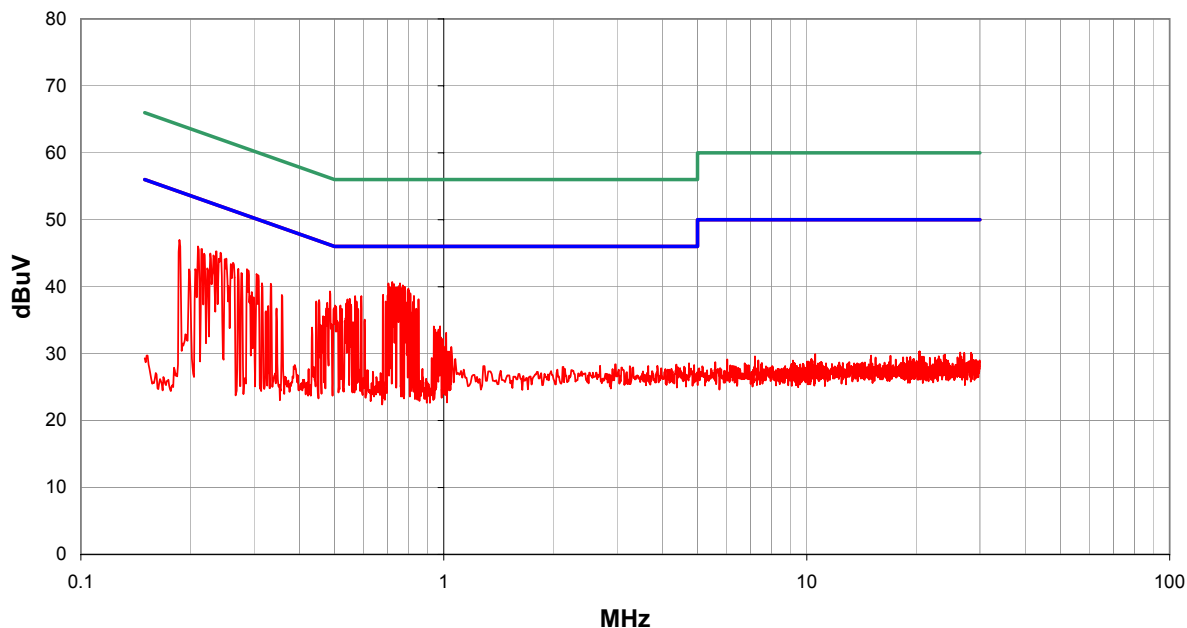

Freq (MHz)	Amplitude (dBuV)		Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.721	20.5		0.0	0.2	20.0				40.7	46.0	-5.3
0.703	20.3		0.0	0.2	20.0				40.5	46.0	-5.5
0.757	20.3		0.0	0.2	20.0				40.5	46.0	-5.5
0.729	20.2		0.0	0.2	20.0				40.4	46.0	-5.6
0.771	20.0		0.0	0.2	20.0				40.2	46.0	-5.8
0.725	19.9		0.0	0.2	20.0				40.1	46.0	-5.9
0.780	19.8		0.0	0.2	20.0				40.0	46.0	-6.0
0.709	19.7		0.0	0.2	20.0				39.9	46.0	-6.1
0.712	19.7		0.0	0.2	20.0				39.9	46.0	-6.1
0.733	19.7		0.0	0.2	20.0				39.9	46.0	-6.1
0.743	19.7		0.0	0.2	20.0				39.9	46.0	-6.1
0.745	19.7		0.0	0.2	20.0				39.9	46.0	-6.1
0.737	19.6		0.0	0.2	20.0				39.8	46.0	-6.2
0.765	19.6		0.0	0.2	20.0				39.8	46.0	-6.2
0.799	19.5		0.0	0.2	20.0				39.7	46.0	-6.3
0.783	19.3		0.0	0.2	20.0				39.5	46.0	-6.5
0.802	19.2		0.0	0.2	20.0				39.4	46.0	-6.6
0.748	19.1		0.0	0.2	20.0				39.3	46.0	-6.7
0.243	24.9		0.0	0.2	20.0				45.1	52.0	-6.9

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				ACQ 2005.1.3 EMI A2.13			
EUT: Q5 RF					Work Order: PROU0011				
Serial Number: EMC 0x44040F					Date: 01/04/05				
Customer: Product Creation Studio					Temperature: 18				
Attendees: None					Humidity: 32%				
Cust. Ref. No.:					Barometric Pressure: 30.09				
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01			
TEST SPECIFICATIONS									
Specification: FCC 15.207:2004				Method: ANSI C63.4: 2003					
SAMPLE CALCULATIONS									
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation									
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator									
COMMENTS									
EUT OPERATING MODES									
Transmitting high channel									
DEVIATIONS FROM TEST STANDARD									
No deviations.									
RESULTS									
Pass					Line N		Run # 17		
Other					 Tested By:				
									
Freq (MHz)	Amplitude (dBuV)		Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.774	20.7		0.0	0.2	20.0		40.9	46.0	-5.1
0.688	20.3		0.0	0.2	20.0		40.5	46.0	-5.5
0.750	19.8		0.0	0.2	20.0		40.0	46.0	-6.0
0.790	19.7		0.0	0.2	20.0		39.9	46.0	-6.1
0.783	19.6		0.0	0.2	20.0		39.8	46.0	-6.2
0.654	19.4		0.0	0.2	20.0		39.6	46.0	-6.4
0.693	19.3		0.0	0.2	20.0		39.5	46.0	-6.5
0.709	19.3		0.0	0.2	20.0		39.5	46.0	-6.5
0.813	19.0		0.0	0.2	20.0		39.2	46.0	-6.8
0.666	19.0		0.0	0.2	20.0		39.2	46.0	-6.8
0.200	26.7		0.0	0.1	20.0		46.8	53.6	-6.8
0.602	18.7		0.0	0.2	20.0		38.9	46.0	-7.1
0.384	20.9		0.0	0.2	20.0		41.1	48.2	-7.1
0.216	25.5		0.0	0.1	20.0		45.6	53.0	-7.4
0.515	18.3		0.0	0.2	20.0		38.5	46.0	-7.5
0.578	18.3		0.0	0.2	20.0		38.5	46.0	-7.5
0.420	19.7		0.0	0.2	20.0		39.9	47.4	-7.5
0.395	20.2		0.0	0.2	20.0		40.4	48.0	-7.6
0.595	18.2		0.0	0.2	20.0		38.4	46.0	-7.6

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				ACQ 2005.1.3 EMI A2.13				
EUT: Q5 RF					Work Order: PROU0011					
Serial Number: EMC 0x44040F					Date: 01/04/05					
Customer: Product Creation Studio					Temperature: 18					
Attendees: None					Humidity: 32%					
Cust. Ref. No.:					Barometric Pressure: 30.09					
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01				
TEST SPECIFICATIONS										
Specification: FCC 15.207:2004					Method: ANSI C63.4: 2003					
SAMPLE CALCULATIONS										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
COMMENTS										
EUT OPERATING MODES										
Transmitting high channel										
DEVIATIONS FROM TEST STANDARD										
No deviations.										
RESULTS										
Pass					Line L1		Run # 18			
Other										
					 Tested By:					
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.793	14.9			0.0	0.0	20.0	QP	34.9	56.0	-21.1
0.793	-1.2			0.0	0.0	20.0	AV	18.8	46.0	-27.2
0.793	23.5			0.0	0.2	20.0		43.7	46.0	-2.3
0.802	23.3			0.0	0.2	20.0		43.5	46.0	-2.5
0.805	22.9			0.0	0.2	20.0		43.1	46.0	-2.9
0.811	22.6			0.0	0.2	20.0		42.8	46.0	-3.2
0.785	22.6			0.0	0.2	20.0		42.8	46.0	-3.2
0.843	22.5			0.0	0.2	20.0		42.7	46.0	-3.3
0.860	22.4			0.0	0.2	20.0		42.6	46.0	-3.4
0.818	22.4			0.0	0.2	20.0		42.6	46.0	-3.4
0.872	22.3			0.0	0.2	20.0		42.5	46.0	-3.5
0.835	22.3			0.0	0.2	20.0		42.5	46.0	-3.5
0.829	22.0			0.0	0.2	20.0		42.2	46.0	-3.8
0.875	21.7			0.0	0.2	20.0		41.9	46.0	-4.1
0.850	21.6			0.0	0.2	20.0		41.8	46.0	-4.2
0.810	20.9			0.0	0.2	20.0		41.1	46.0	-4.9
0.647	20.6			0.0	0.2	20.0		40.8	46.0	-5.2
0.788	20.6			0.0	0.2	20.0		40.8	46.0	-5.2
0.625	20.5			0.0	0.2	20.0		40.7	46.0	-5.3

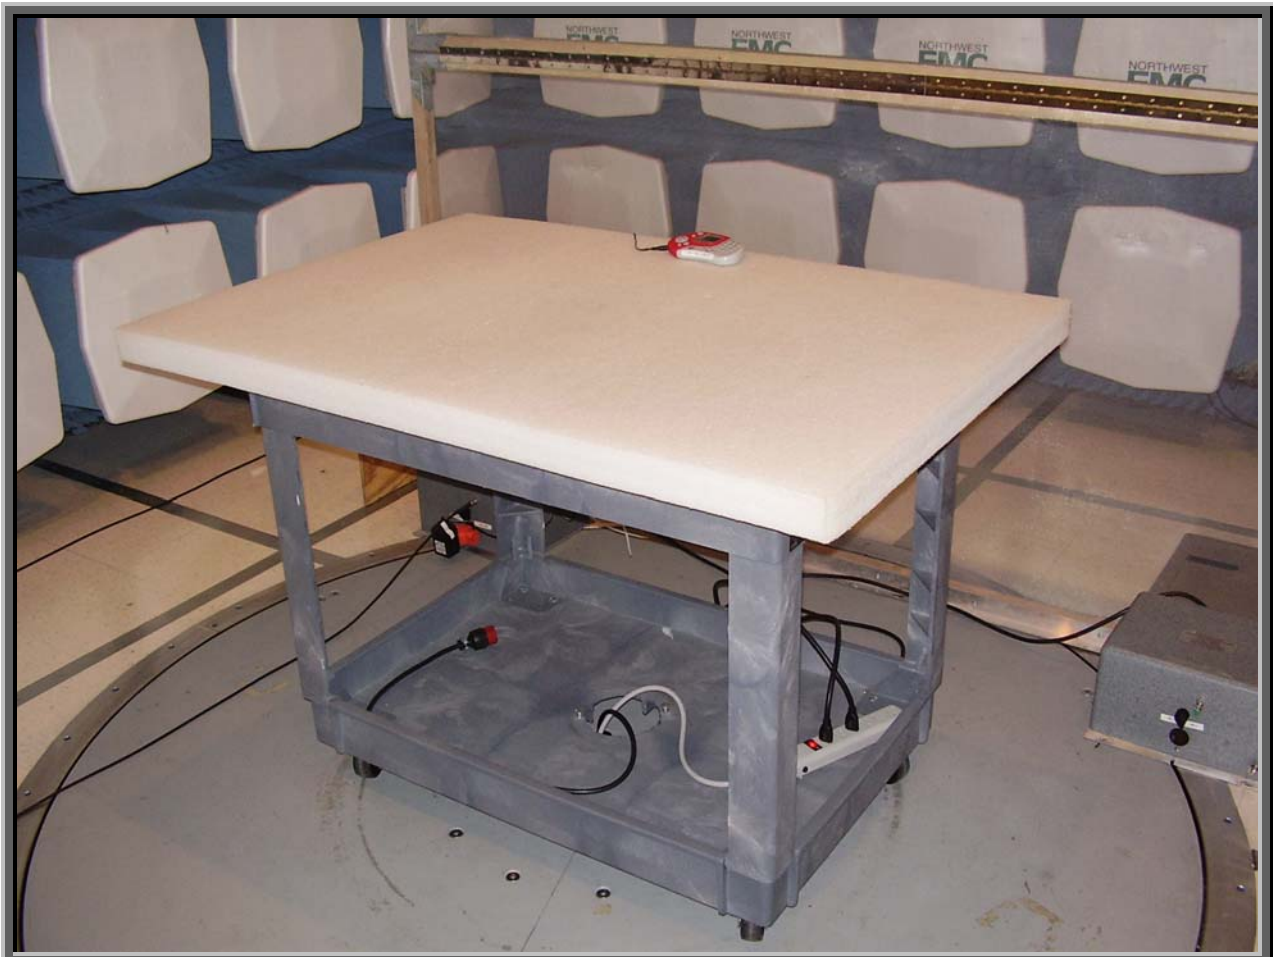





**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120VAC, 60Hz
--------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	Standard Production Software	<b>Version</b>	Unknown
<b>Description</b>			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

**EUT and Peripherals in Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(a)(2), the 6 dB bandwidth of a direct sequence channel must be at least 500kHz. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The occupied bandwidth was measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum output power and data rate.

The measurement was made at a 3 meter test distance. The field strength was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003).

**Completed by:**



NORTHWEST  
**EMC**

## Occupied Bandwidth

Rev BETA  
01/30/01

EUT: Q5 RF			Work Order: PROU0011	
Serial Number: EMC 0x44040F			Date: 01/08/05	
Customer: Product Creation Studio			Temperature: 22°C	
Attendees: None		Tested by: Holly Ashkannejhad	Humidity: 31%	
Customer Ref. No.: N/A		Power: 120VAC/60Hz	Job Site: EV01	

### TEST SPECIFICATIONS

Specification: 47 CFR 15.247(a)(2)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
------------------------------------	------------	--------------------------------	------------

### SAMPLE CALCULATIONS

### COMMENTS

### EUT OPERATING MODES

Modulated by PRBS at maximum data rate

### DEVIATIONS FROM TEST STANDARD

None

### REQUIREMENTS

The minimum 6dB bandwidth is 500KHz

### RESULTS

### BANDWIDTH


Pass 1.555MHz

### SIGNATURE

Tested By: 

### DESCRIPTION OF TEST

## Occupied Bandwidth - Low Channel

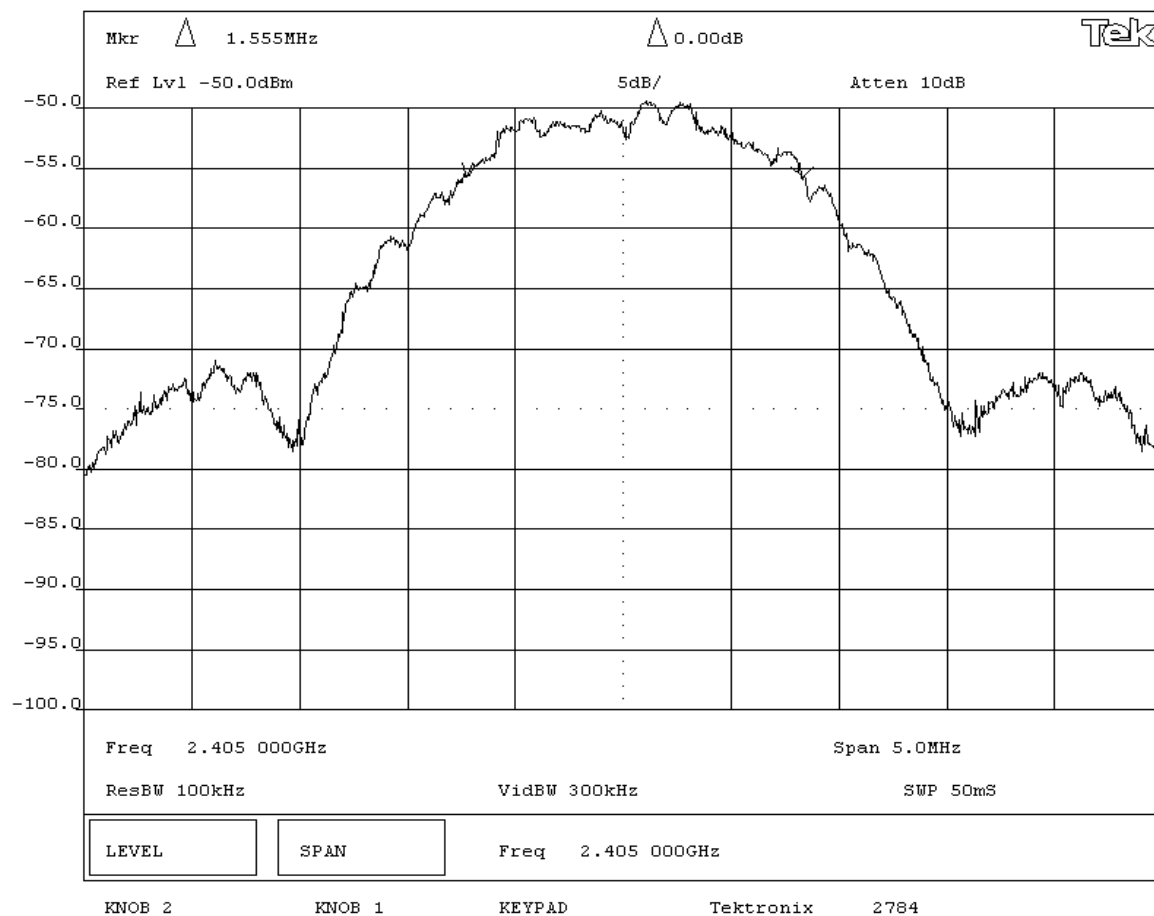

NORTHWEST  
**EMC**

## Occupied Bandwidth

Rev BETA  
01/30/01

EUT: Q5 RF			Work Order: PROU0011	
Serial Number: EMC 0x44040F			Date: 01/08/05	
Customer: Product Creation Studio			Temperature: 22°C	
Attendees: None		Tested by: Holly Ashkannejhad	Humidity: 31%	
Customer Ref. No.: N/A		Power: 120VAC/60Hz	Job Site: EV01	

### TEST SPECIFICATIONS

Specification: 47 CFR 15.247(a)(2)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
------------------------------------	------------	--------------------------------	------------

### SAMPLE CALCULATIONS

### COMMENTS

### EUT OPERATING MODES

Modulated by PRBS at maximum data rate

### DEVIATIONS FROM TEST STANDARD

None

### REQUIREMENTS

The minimum 6dB bandwidth is 500KHz

### RESULTS

### BANDWIDTH


Pass 1.55MHz

### SIGNATURE

Tested By: 

### DESCRIPTION OF TEST

## Occupied Bandwidth - Mid Channel

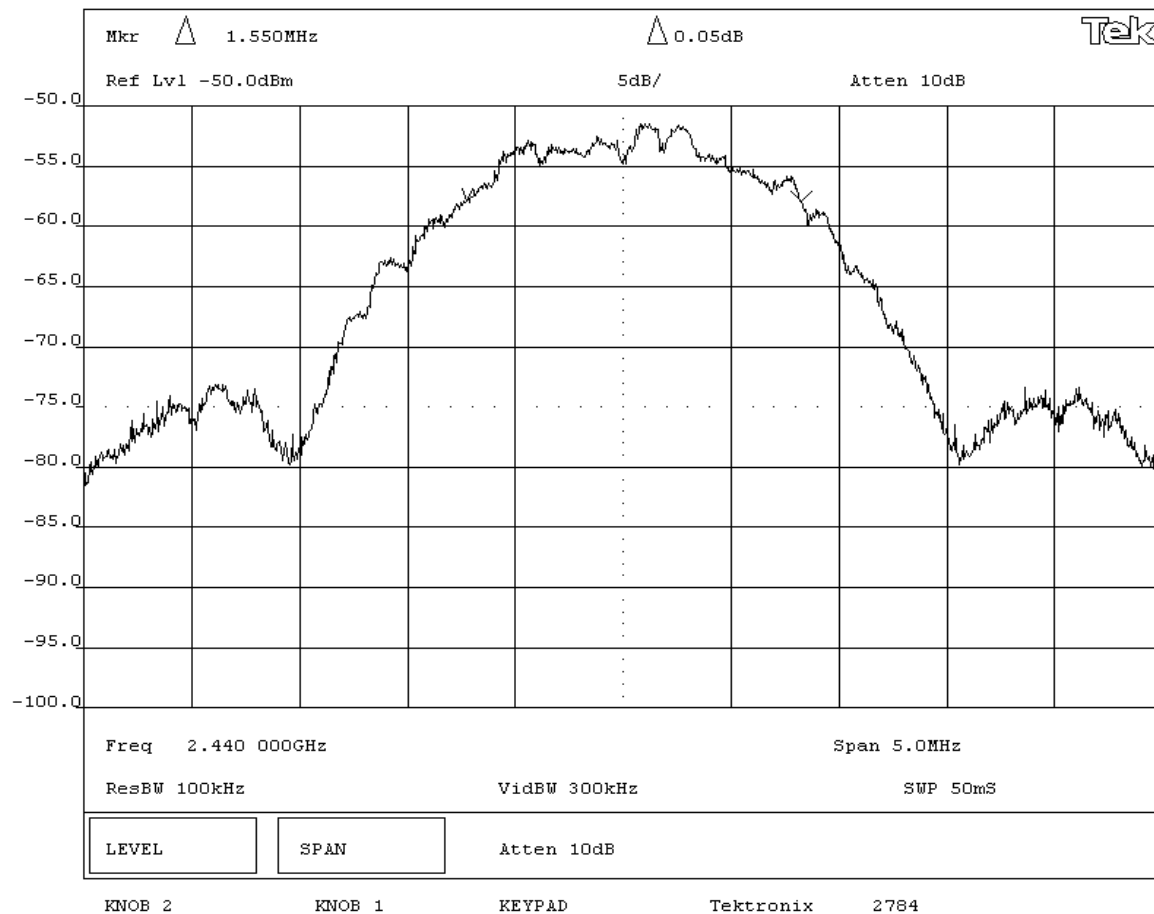

EUT: Q5 RF		Work Order: PROU0011	
Serial Number: EMC 0x44040F		Date: 01/08/05	
Customer: Product Creation Studio		Temperature: 22°C	
Attendees: None		Humidity: 31%	
Customer Ref. No.: N/A		Tested by: Holly Ashkannejhad	Job Site: EV01
		Power: 120VAC/60Hz	

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(a)(2)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
------------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

The minimum 6dB bandwidth is 500KHz

## RESULTS

## BANDWIDTH


Pass 1.56MHz

## SIGNATURE



Tested By: 

## DESCRIPTION OF TEST

## Occupied Bandwidth - High Channel

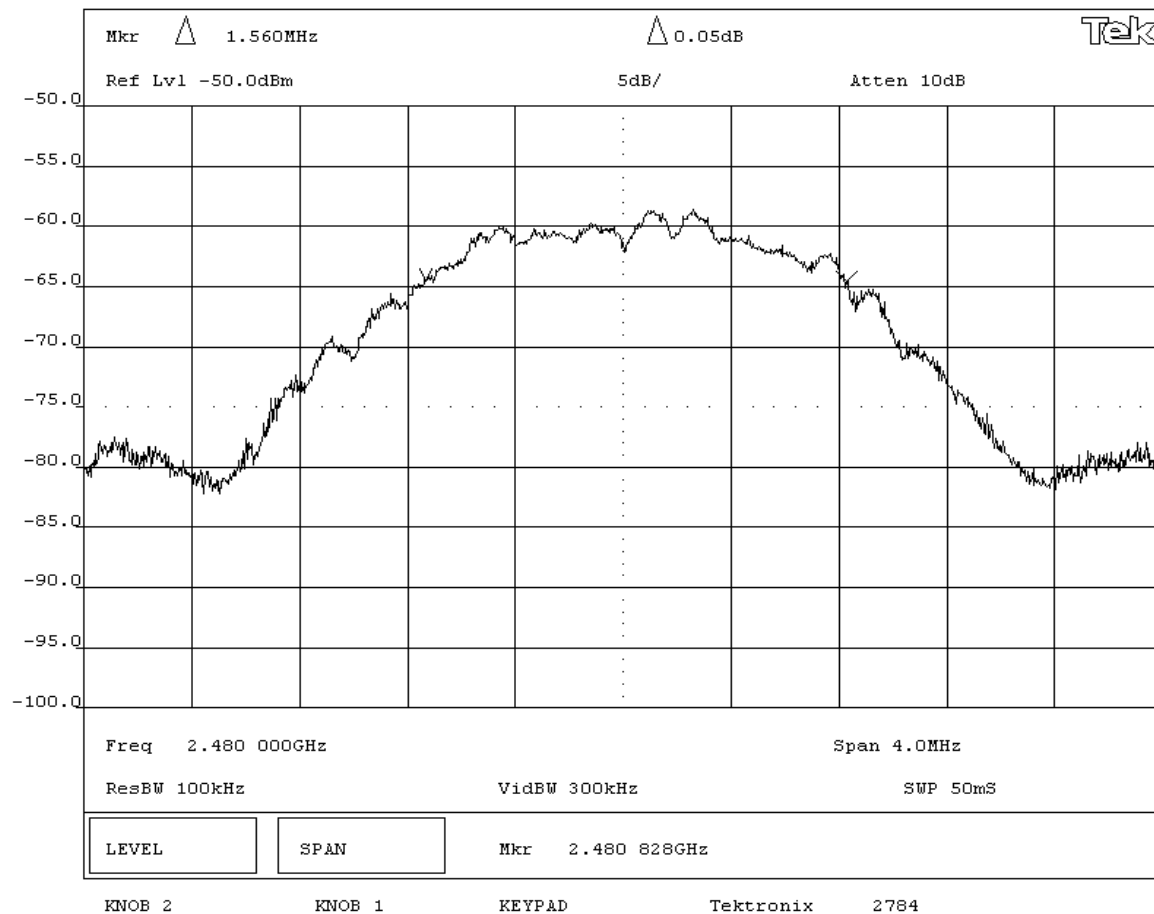



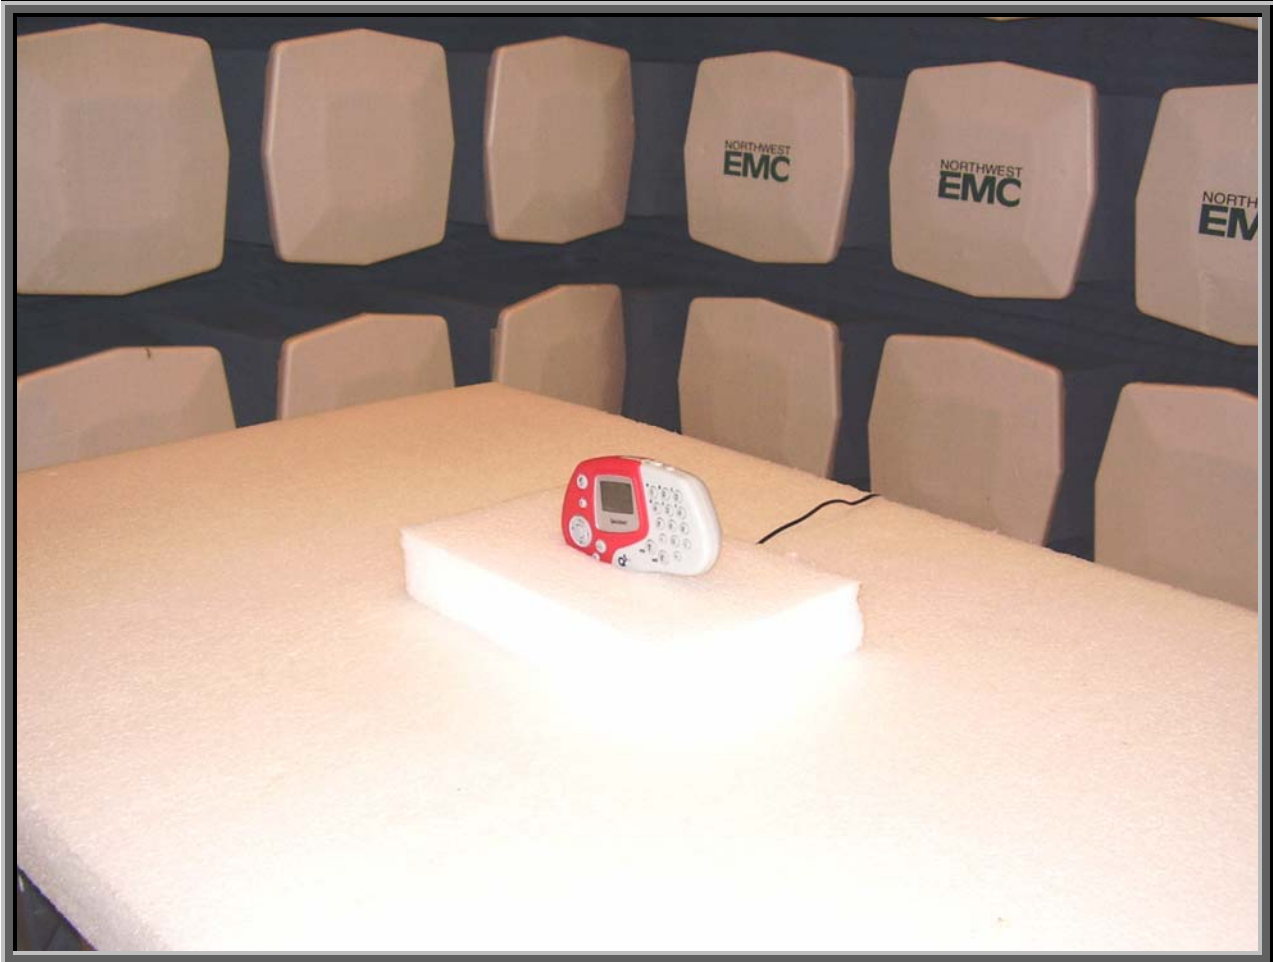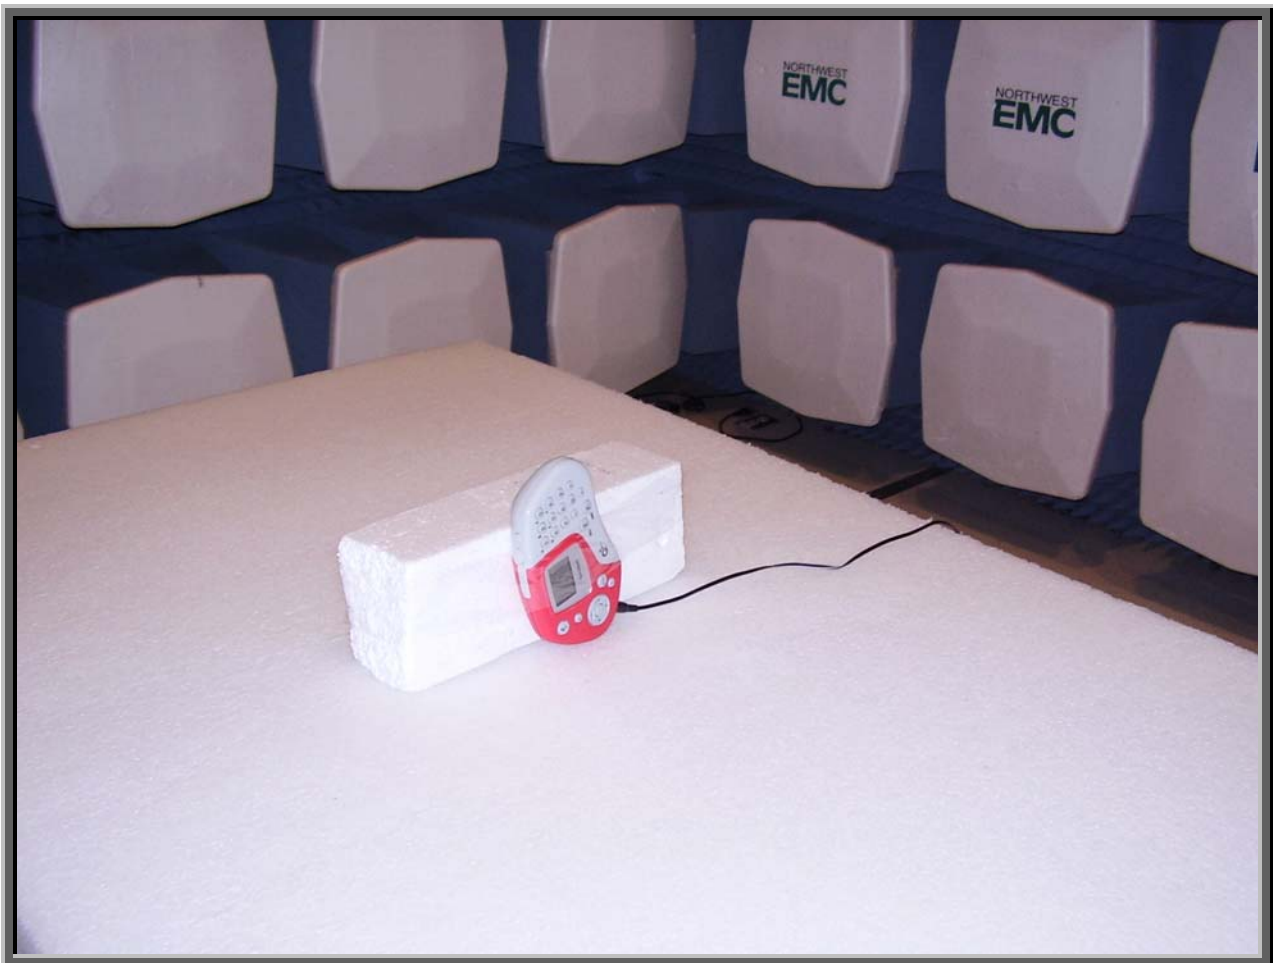

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Channels in Specified Band Investigated:**

Low

High

**Operating Modes Investigated:**

Typical

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

120VAC, 60Hz

**Software\Firmware Applied During Test**

<b>Exercise software</b>	Standard Production Software	<b>Version</b>	Unknown
--------------------------	------------------------------	----------------	---------

**Description**

The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.

**EUT and Peripherals in Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo




**Test Description**

**Requirement:** Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The peak output power was measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum output power and data rate.

The measurement was made at a 3 meter test distance. The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from at least 5 MHz below the band edge to at least 5 MHz above the band edge.

**Completed by:**

NORTHWEST  
**EMC**

## Band Edge Compliance

Rev BETA  
01/30/01

EUT: Q5 RF			Work Order: PROU0011		
Serial Number: EMC 0x44040F			Date: 01/08/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Holly Ashkannejhad		Humidity: 31%	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV01	

### TEST SPECIFICATIONS

Specification: CFR 47 Part 15.247(d)	Year: 2004	Method: 97-114, ANSI C63.4	Year: 2003
--------------------------------------	------------	----------------------------	------------

### SAMPLE CALCULATIONS

### COMMENTS

### EUT OPERATING MODES

Modulated by PRBS at maximum data rate

### DEVIATIONS FROM TEST STANDARD

None

### REQUIREMENTS

The maximum level of the radio frequency power must be at least 20dB down from the highest emission level within the authorized band.

RESULTS	Amplitude
Pass	-30.05dB


### SIGNATURE

Tested By: \_\_\_\_\_

*Holly Ashkannejhad*

### DESCRIPTION OF TEST

#### Low Channel

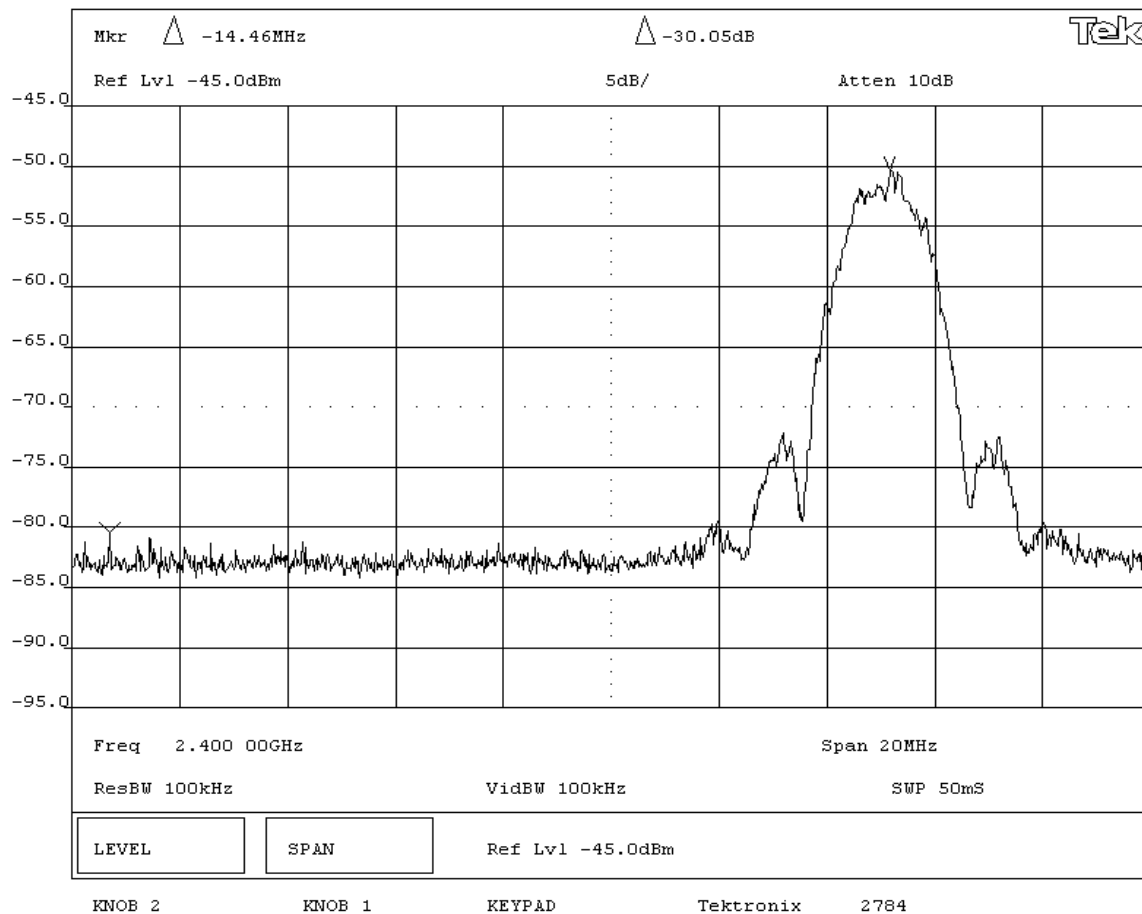



NORTHWEST  
**EMC**

## Band Edge Compliance

Rev BETA  
01/30/01

EUT: Q5 RF			Work Order: PROU0011		
Serial Number: EMC 0x44040F			Date: 01/08/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Holly Ashkannejhad		Humidity: 31%	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV01	

### TEST SPECIFICATIONS

Specification: CFR 47 Part 15.247(d)	Year: 2004	Method: 97-114, ANSI C63.4	Year: 2003
--------------------------------------	------------	----------------------------	------------

### SAMPLE CALCULATIONS

### COMMENTS

### EUT OPERATING MODES

Modulated by PRBS at maximum data rate

### DEVIATIONS FROM TEST STANDARD

None

### REQUIREMENTS

The maximum level of the radio frequency power must be at least 20dB down from the highest emission level within the authorized band.

### RESULTS


	Amplitude
Pass	-23.55dB

### SIGNATURE



Tested By: 

### DESCRIPTION OF TEST

#### High Channel

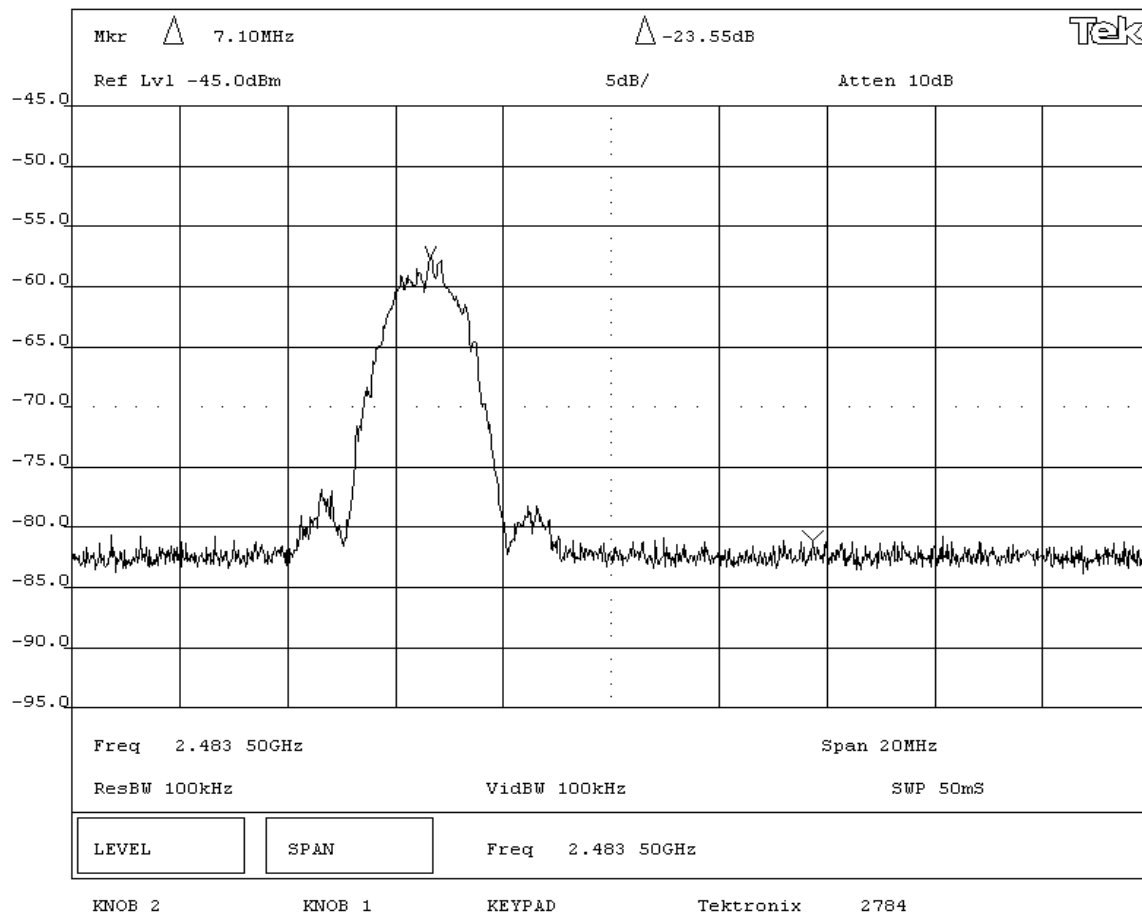



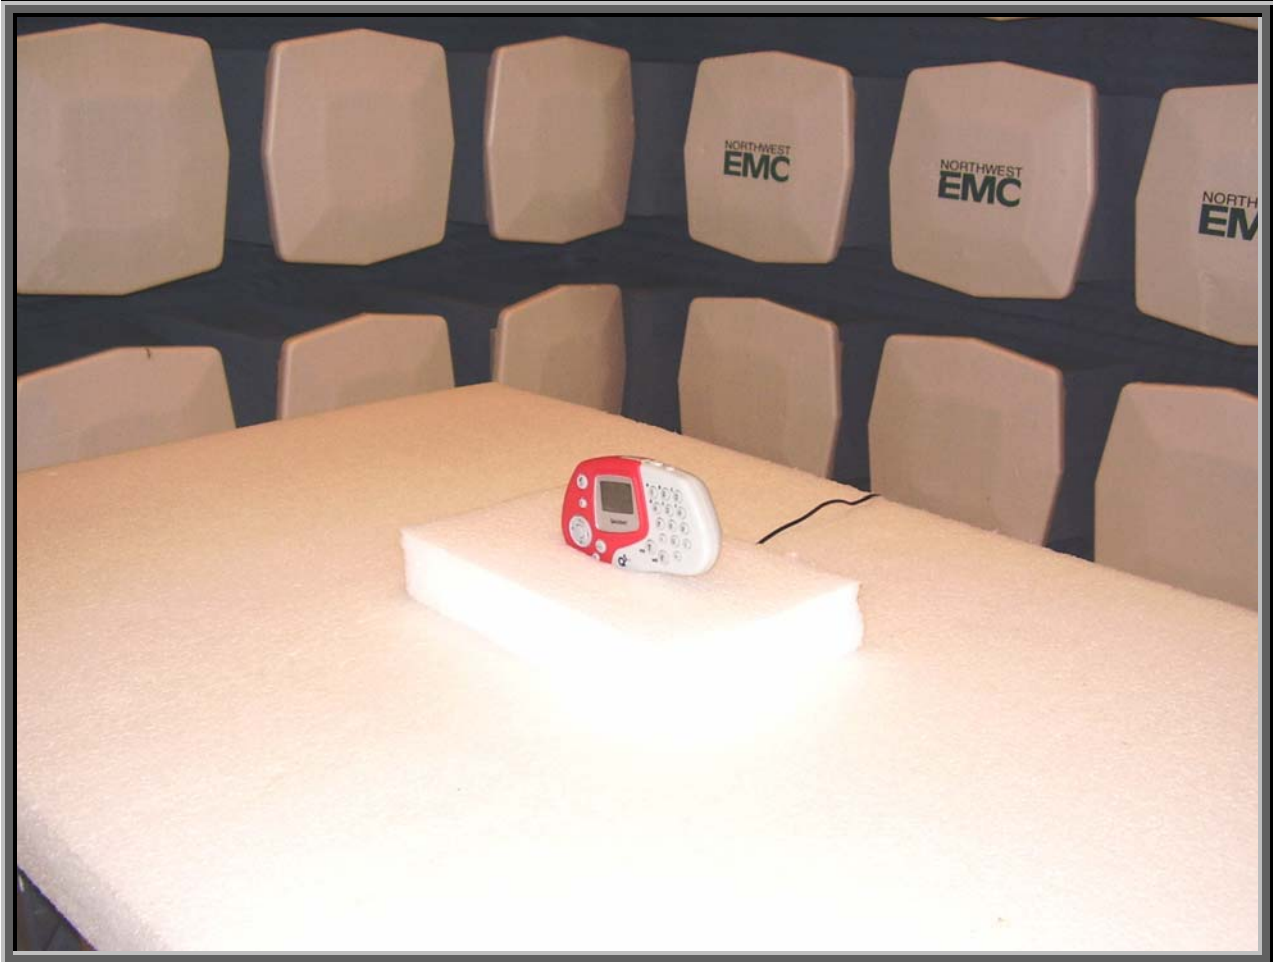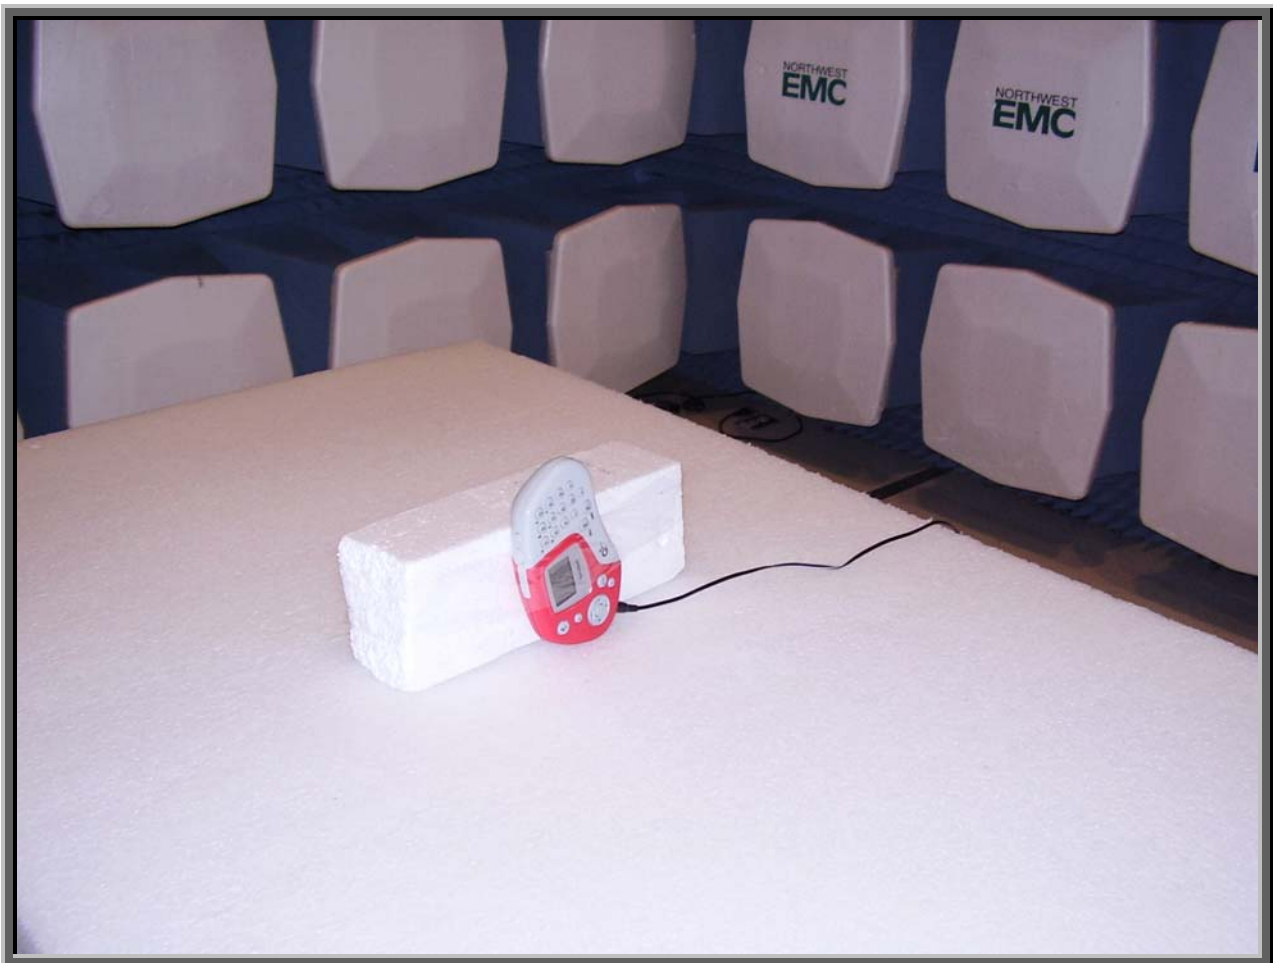

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120VAC, 60Hz
--------------

**Software\Firmware Applied During Test**

Exercise software	Standard Production Software	Version	Unknown
<b>Description</b>			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	CUI Inc.	41-9-500R	NA
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.5	No	Q5RF	AC Adapter

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(b)(3), the maximum peak output power must not exceed 1 Watt.

**Configuration:** The peak output power was measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum output power and data rate.

The measurement was made using the alternative test procedure described in FCC 97-114. The maximum field strength of the fundamental was measured at a 3 meter distance. The field strength was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). The resolution and video bandwidths of the spectrum analyzer were set greater than the 6 dB bandwidth of the measured signal: RBW = VBW = 3 MHz.

The peak EIRP was calculated using the equation:


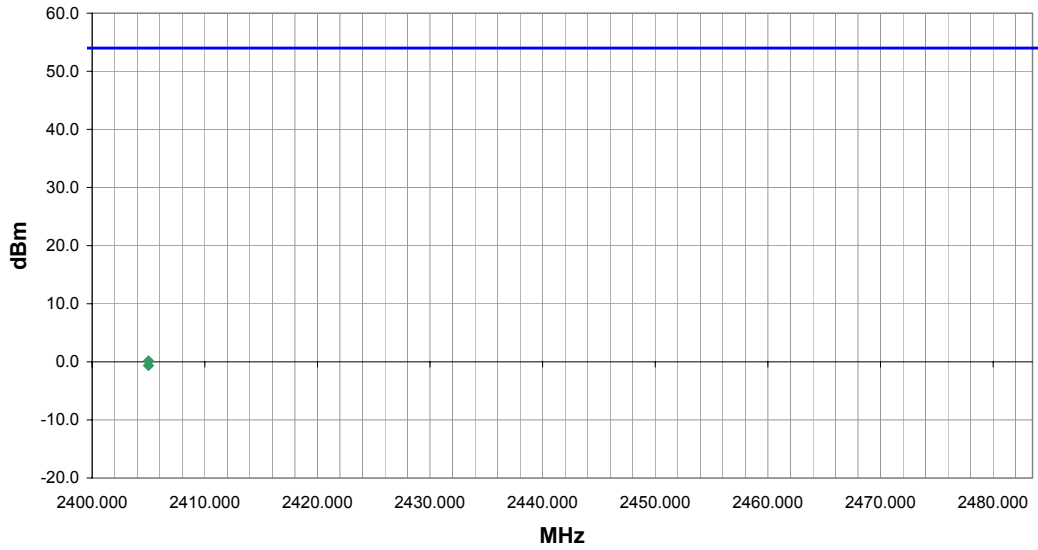
$$\text{EIRP} = (\text{Ed})^2 / 30$$


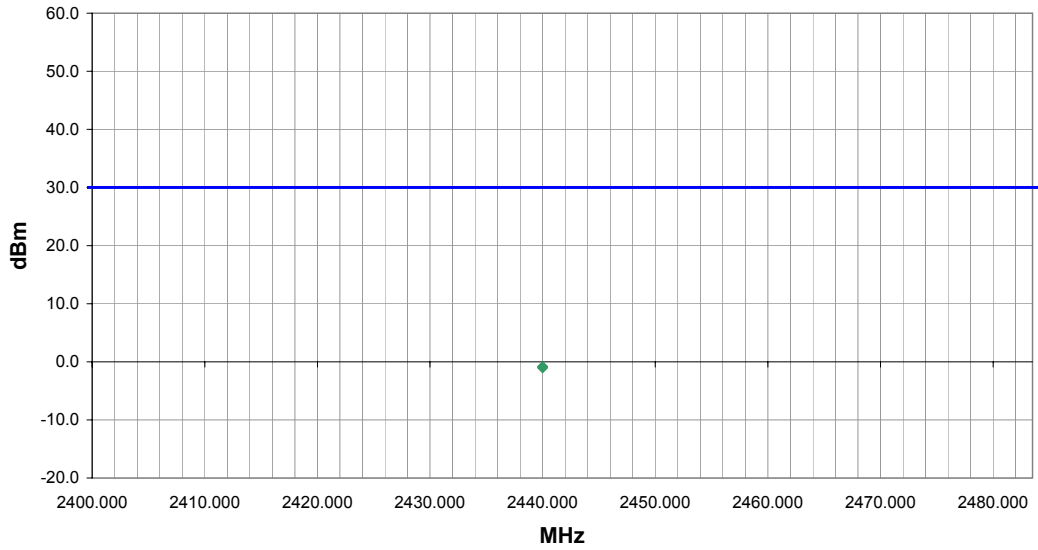
Where: E is the measured maximum field strength in V/m  
D is the distance in meters from which the field strength was measured

**De Facto EIRP Limit:** Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.


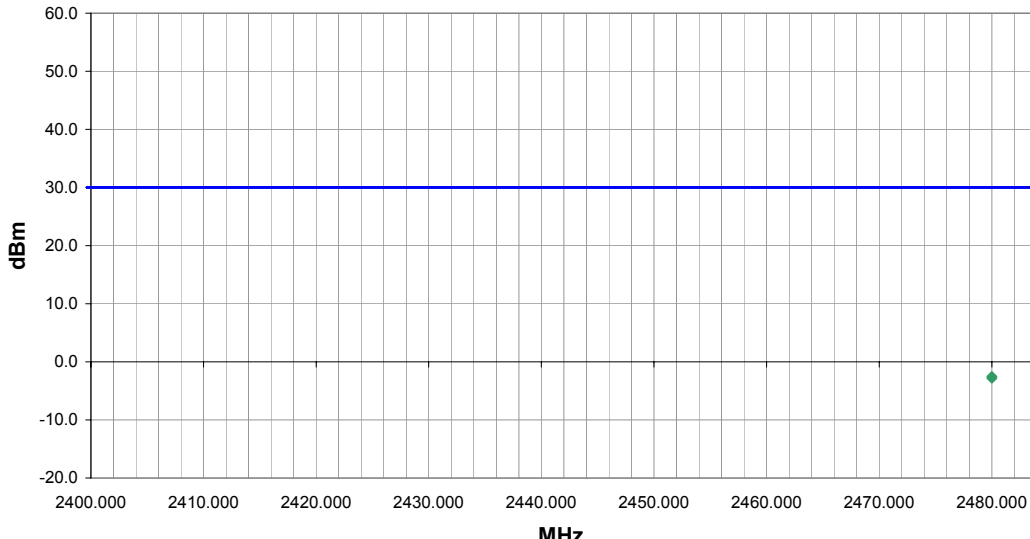
**Completed by:**





NORTHWEST EMC										ACQ 2005.1.3 EMI 2005.1.3			
Output Power - EIRP													
EUT: Q5 RF						Work Order: PROU0011							
Serial Number: 0x44040F						Date: 01/08/05							
Customer: Product Creation Studio						Temperature: 21							
Attendees: Holly Ashkannejhad						Humidity: 32%							
Cust. Ref. No.:						Barometric Pressure: 30.44							
Tested by: Holly Ashkannejhad						Power: 120VAC/60Hz			Job Site: EV01				
TEST SPECIFICATIONS													
Specification: FCC 15.247(b) Output Power:2004						Method: ANSI C63.4:2003							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
low channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										8			
Other													
<div style="text-align: right;">             Tested By:         </div>													
													
Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2405.000			87.0	1.2			V-Horn	PK	0.0010	0.2	30.0	-29.8	EUT on side.
2405.000			200.0	1.3			H-Horn	PK	0.0009	-0.6	30.0	-30.6	EUT horizontal.

NORTHWEST EMC										Output Power - EIRP		ACQ 2005.1.3 EMI 2005.1.3	
EUT: Q5 RF										Work Order: PROU0011			
Serial Number: 0x44040F										Date: 01/08/05			
Customer: Product Creation Studio										Temperature: 21			
Attendees: Holly Ashkannejhad										Humidity: 32%			
Cust. Ref. No.:										Barometric Pressure: 30.44			
Tested by: Holly Ashkannejhad										Power: 120VAC/60Hz		Job Site: EV01	
TEST SPECIFICATIONS													
Specification: FCC 15.247(b) Output Power:2004										Method: ANSI C63.4:2003			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
mid channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Pass												Run #	
												9	
Other													
										 Tested By:			
													
Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2440.000			65.0	1.2			V-Horn	PK	0.0008	-0.8	30.0	-30.8	EUT on side.
2440.000			200.0	1.2			H-Horn	PK	0.0008	-1.0	30.0	-31.0	EUT horizontal.



NORTHWEST EMC										ACQ 2005.1.3 EMI 2005.1.3			
Output Power - EIRP													
EUT: Q5 RF					Work Order: PROU0011								
Serial Number: 0x44040F					Date: 01/08/05								
Customer: Product Creation Studio					Temperature: 21								
Attendees: Holly Ashkannejhad					Humidity: 32%								
Cust. Ref. No.:					Barometric Pressure: 30.44								
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz		Job Site: EV01						
TEST SPECIFICATIONS													
Specification: FCC 15.247(b) Output Power:2004					Method: ANSI C63.4:2003								
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
high channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Pass								Run # 10					
Other					 Tested By:								
													
Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2480.000			165.0	1.1			H-Horn	PK	0.0006	-2.5	30.0	-32.5	EUT Horizontal.
2480.000			127.0	1.2			V-Horn	PK	0.0005	-2.8	30.0	-32.8	EUT on side.



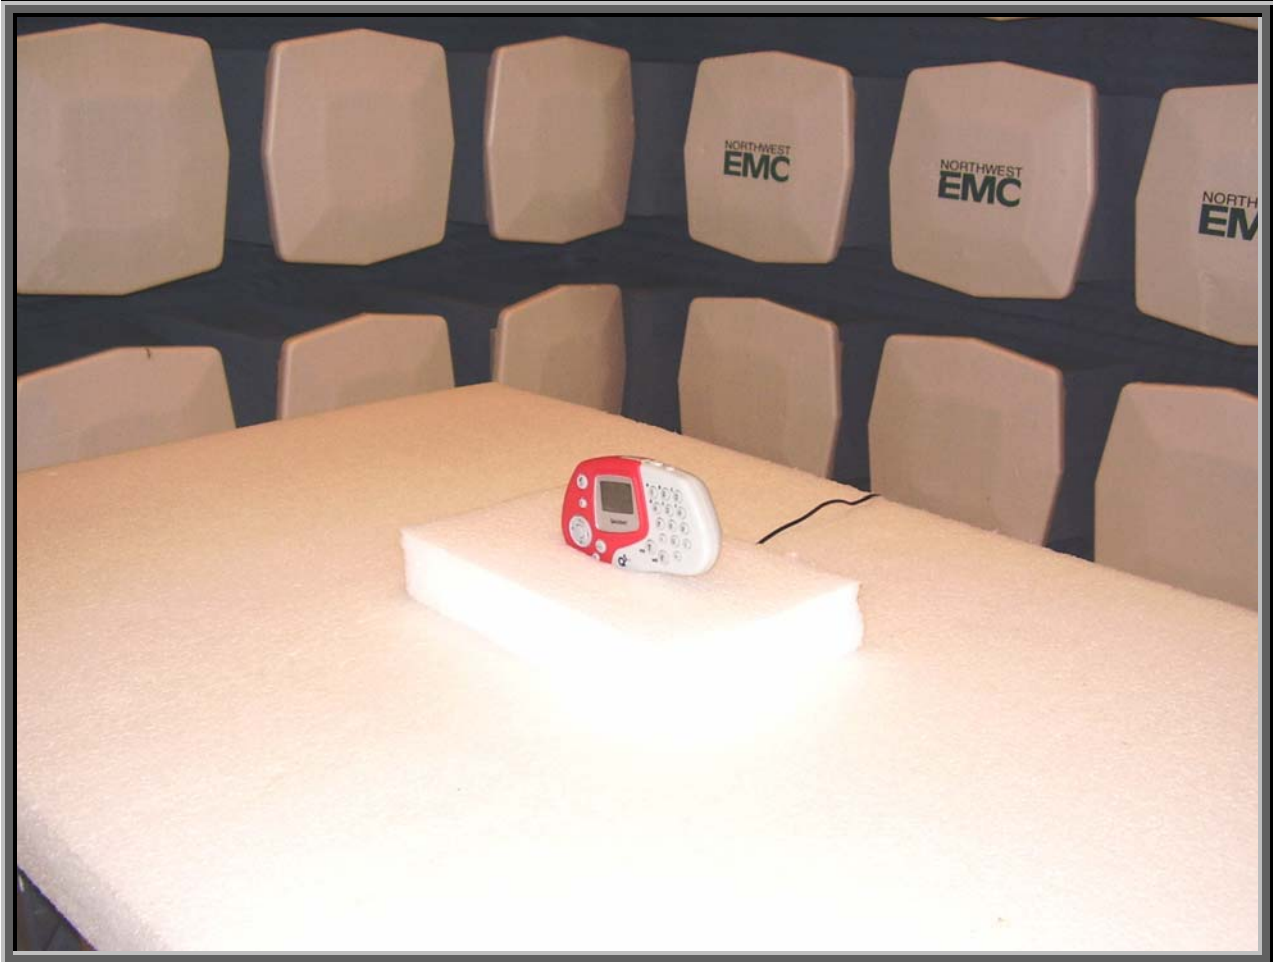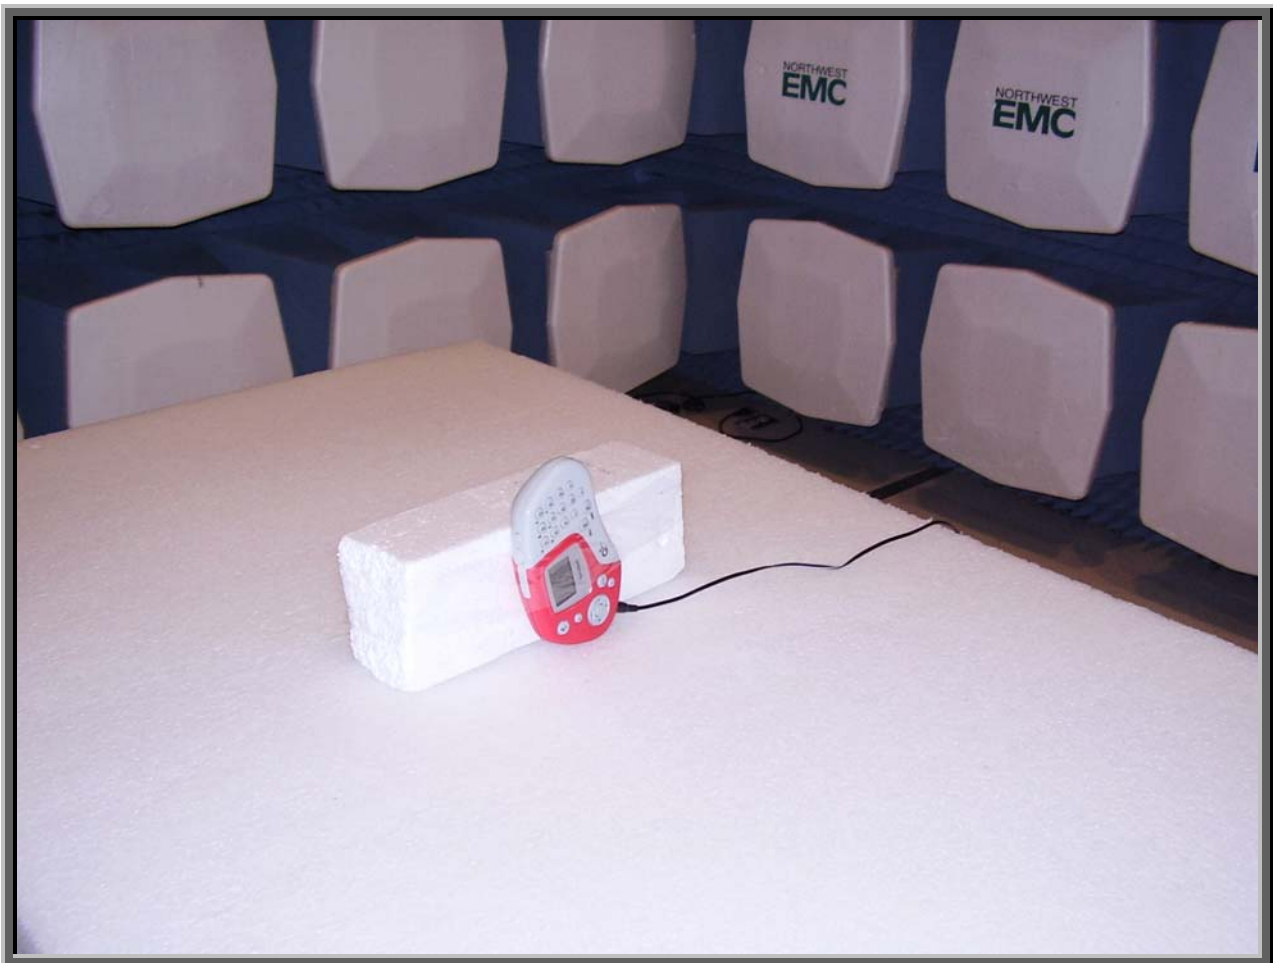

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120VAC, 60Hz
--------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	Standard Production Software	<b>Version</b>	Unknown
<b>Description</b>			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	CUI Inc.	41-9-500R	NA
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.5	No	Q5RF	AC Adapter

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

**Configuration:** The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum data rate.

The measurement was made using the alternative test procedure described in FCC 97-114. The maximum field strength of the fundamental was measured at a 3 meter distance. The field strength was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). Then the analyzer was tuned to the highest point of the maximized fundamental emission and reset per the procedure outline in FCC 97-114.

The emission peak(s) were located and zoomed in on within the passband. The resolution Bandwidth was set to 3kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be 1.5MHz/3kHz = 500 seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements.


*"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3kHz."*

The spectrum analyzer display was internally offset by a correction factor equal to the antenna factor (dB/m) plus the cable loss (dB) plus a field strength (dBm/m) to EIRP (dBm) conversion factor of 11.77dB. The conversion factor of 11.77 dB was derived from the equation:

$$\text{EIRP} = (\text{Ed})^2 / 30$$

Where: E is the measured maximum field strength in V/m  
d is the distance in meters from which the field strength was measured (3 meters)  
EIRP is in W

The bandwidth correction factor of 34.8 dB was added to the marker noise value (dBm/Hz) on the spectrum analyzer display to convert it to dBm/3kHz for comparison with the limit.

**Completed by:**



NORTHWEST  
**EMC**

## Power Spectral Density

Rev BETA  
01/30/01

EUT: Q5 RF		Work Order: PROU0011
Serial Number: EMC 0x44040F		Date: 01/09/05
Customer: Product Creation Studio		Temperature: 22°C
Attendees: None	Tested by: Holly Ashkannejhad	Humidity: 31%
Customer Ref. No.: N/A	Power: 120VAC/60Hz	Job Site: EV01

### TEST SPECIFICATIONS

Specification: 47 CFR Part 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
--------------------------------------	------------	--------------------------------	------------

### SAMPLE CALCULATIONS

Meter reading on spectrum analyzer is internally compensated for cable loss, antenna factor, and field strength (dBm/m) to EIRP (dBm) conversion factor.

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz})$

### COMMENTS

### EUT OPERATING MODES

Modulated by PRBS at maximum data rate

### DEVIATIONS FROM TEST STANDARD

None

### REQUIREMENTS

Maximum peak power spectral density conducted from a hybrid transmitter does not exceed 8 dBm in any 3 kHz band.

### RESULTS

#### AMPLITUDE

Pass


Power Spectral Density = -13.8 dBm / 3kHz

### SIGNATURE


Tested By: Holly Ashkannejhad

### DESCRIPTION OF TEST

## Power Spectral Density - Low Channel

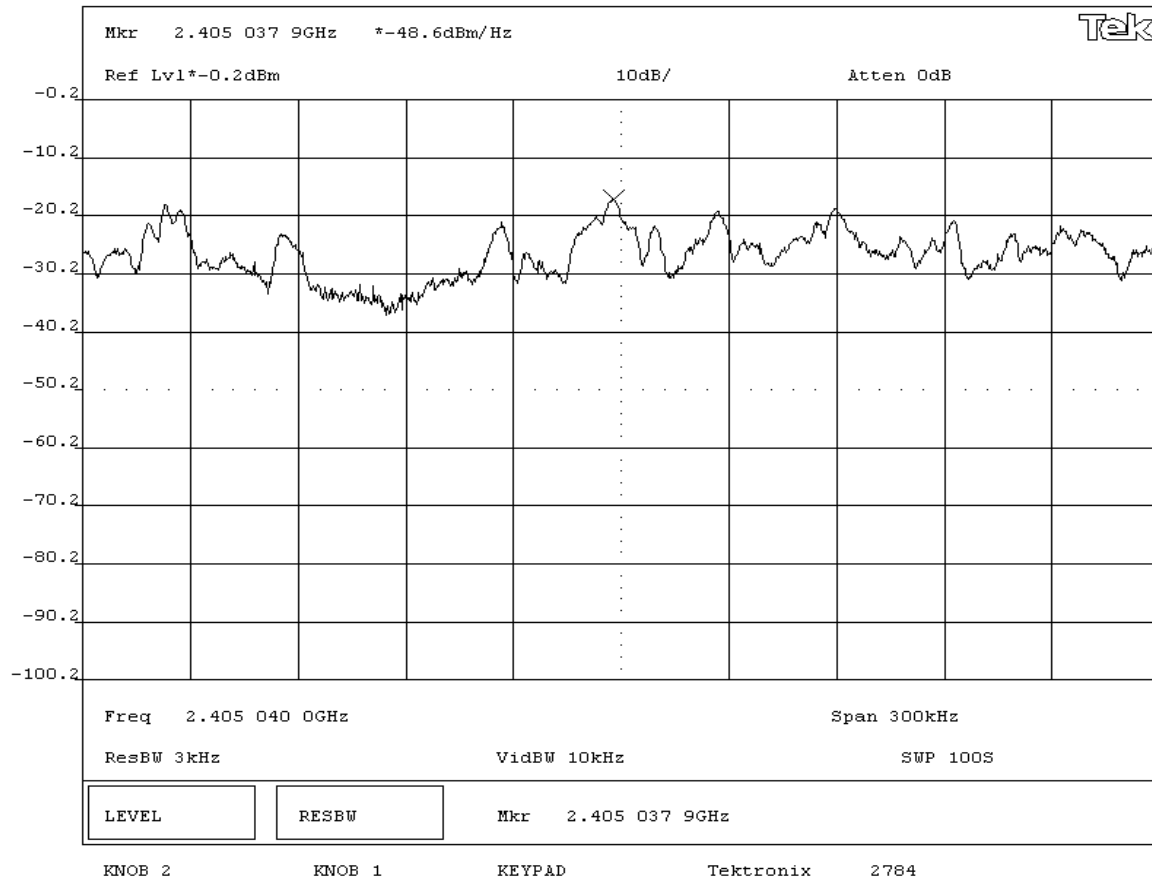

NORTHWEST <b>EMC</b>		<b>Power Spectral Density</b>		Rev BETA 01/30/01	
EUT: Q5 RF			Work Order: PROU0011		
Serial Number: EMC 0x44040F			Date: 01/09/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Holly Ashkannejhad		Humidity: 31%	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV01	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR Part 15.247(e)		Year: 2004		Method: FCC 97-114, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
Meter reading on spectrum analyzer is internally compensated for cable loss, antenna factor, and field strength (dBm/m) to EIRP (dBm) conversion factor.					
Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.					
Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz})$					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum peak power spectral density conducted from a hybrid transmitter does not exceed 8 dBm in any 3 kHz band.					
<b>RESULTS</b>			<b>AMPLITUDE</b>		
Pass			Power Spectral Density = -14.3 dBm / 3kHz		
<b>SIGNATURE</b>					
<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;">Tested By: _____</div> </div>					
<b>DESCRIPTION OF TEST</b>					
<b>Power Spectral Density - Mid Channel</b>					

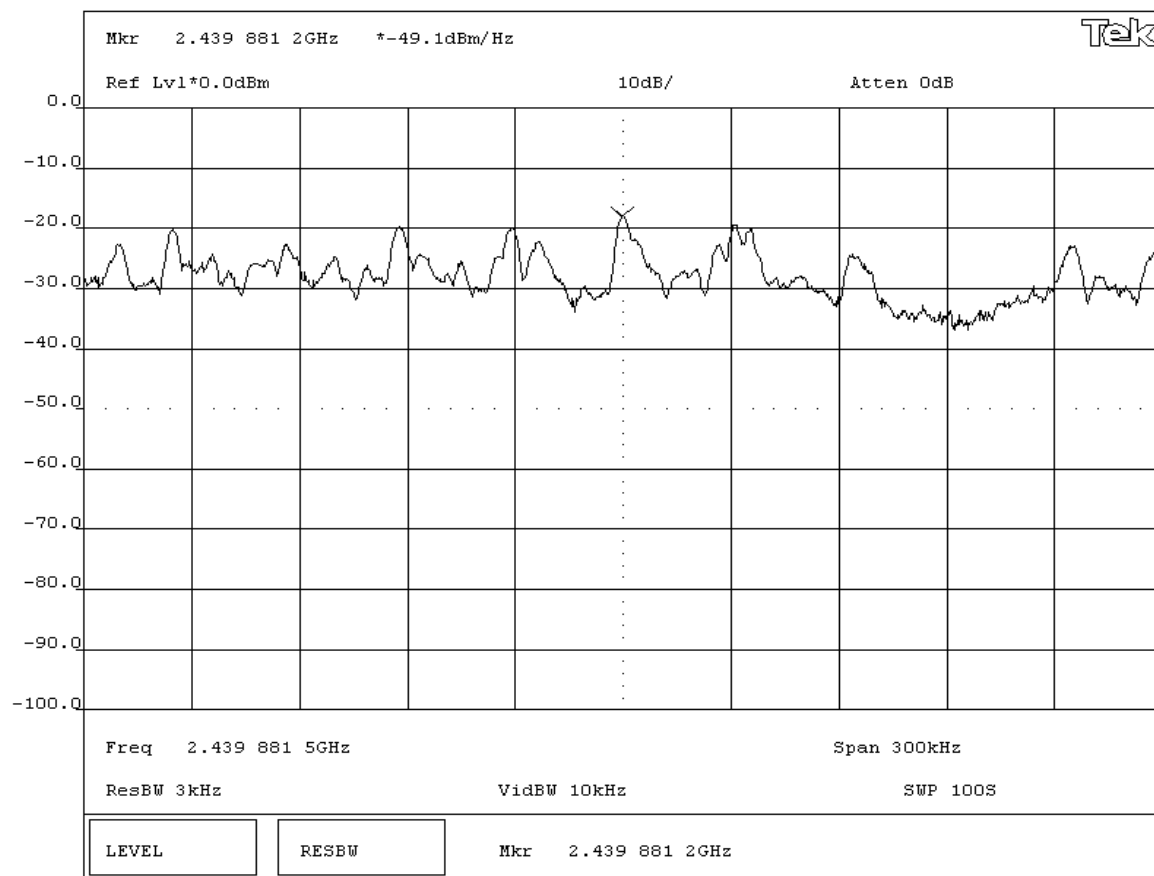



NORTHWEST  
**EMC**

# Power Spectral Density

Rev BETA  
01/30/01

EUT: Q5 RF			Work Order: PROU0011		
Serial Number: EMC 0x44040F			Date: 01/09/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Holly Ashkannejhad		Humidity: 31%	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV01	

**TEST SPECIFICATIONS**

Specification: 47 CFR Part 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
--------------------------------------	------------	--------------------------------	------------

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss, antenna factor, and field strength (dBm/m) to EIRP (dBm) conversion factor.

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz})$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None

**REQUIREMENTS**

Maximum peak power spectral density conducted from a hybrid transmitter does not exceed 8 dBm in any 3 kHz band.


**RESULTS****AMPLITUDE**

Pass



Power Spectral Density = -15.6 dBm / 3kHz

**SIGNATURE**Tested By: **DESCRIPTION OF TEST**

## Power Spectral Density - High Channel

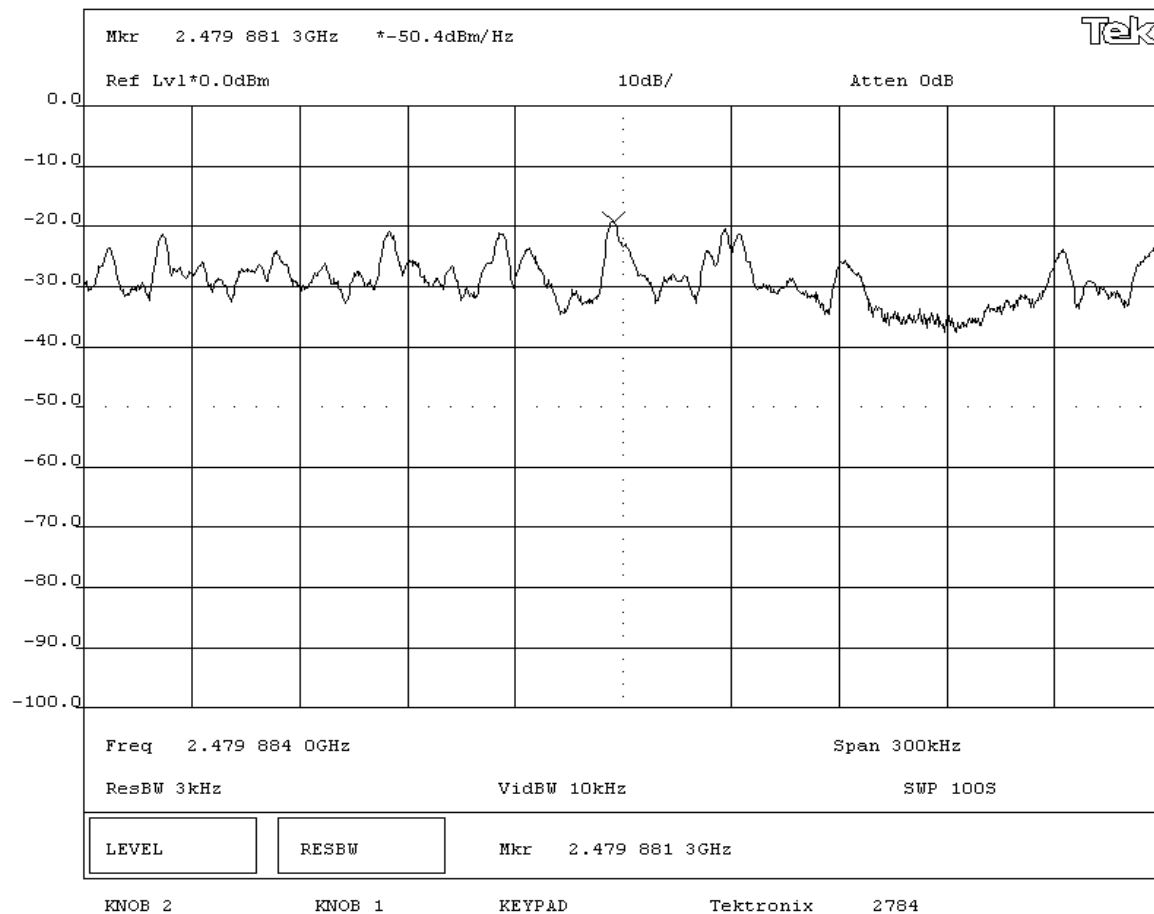



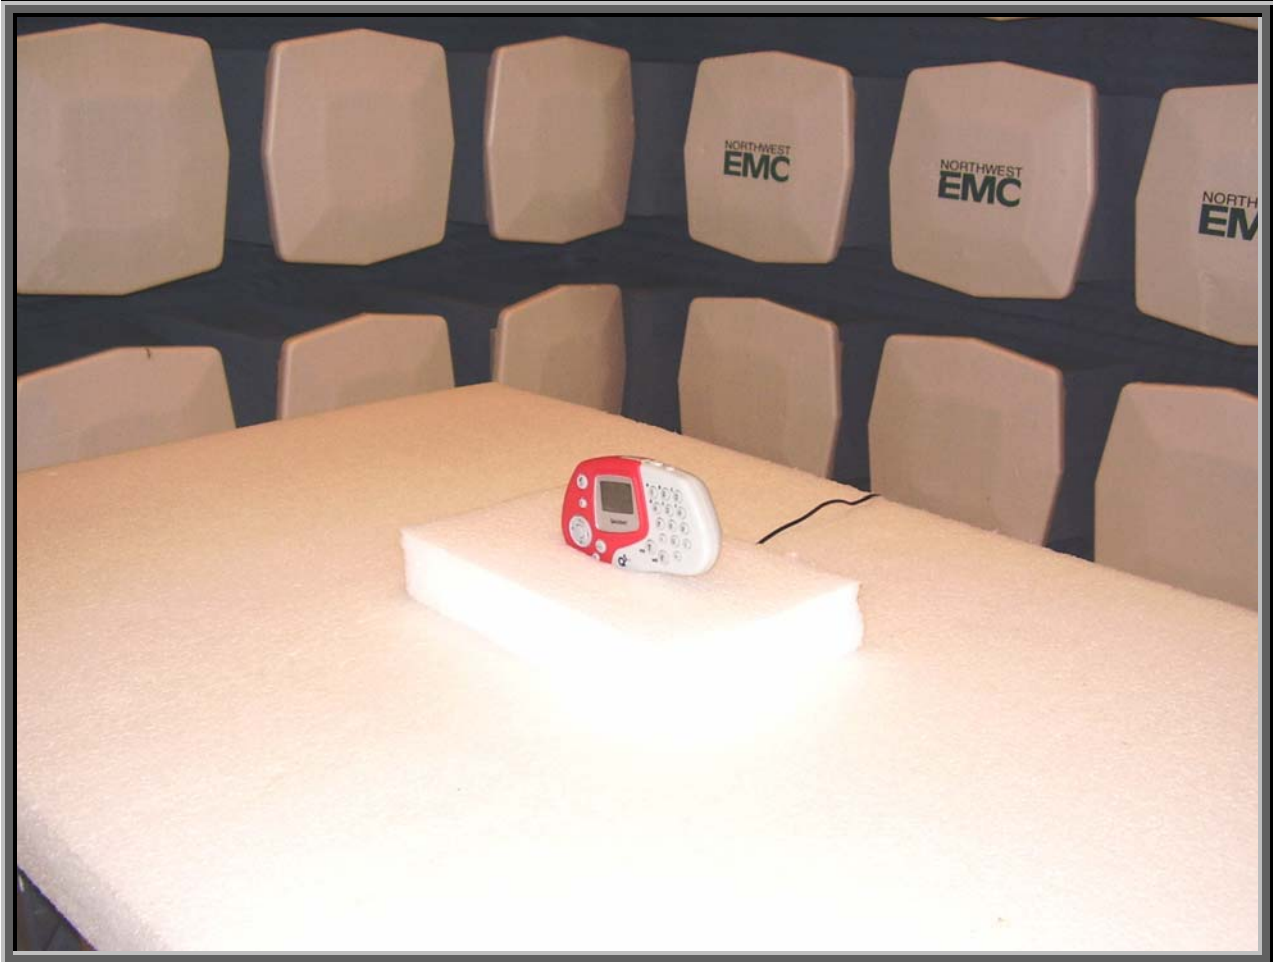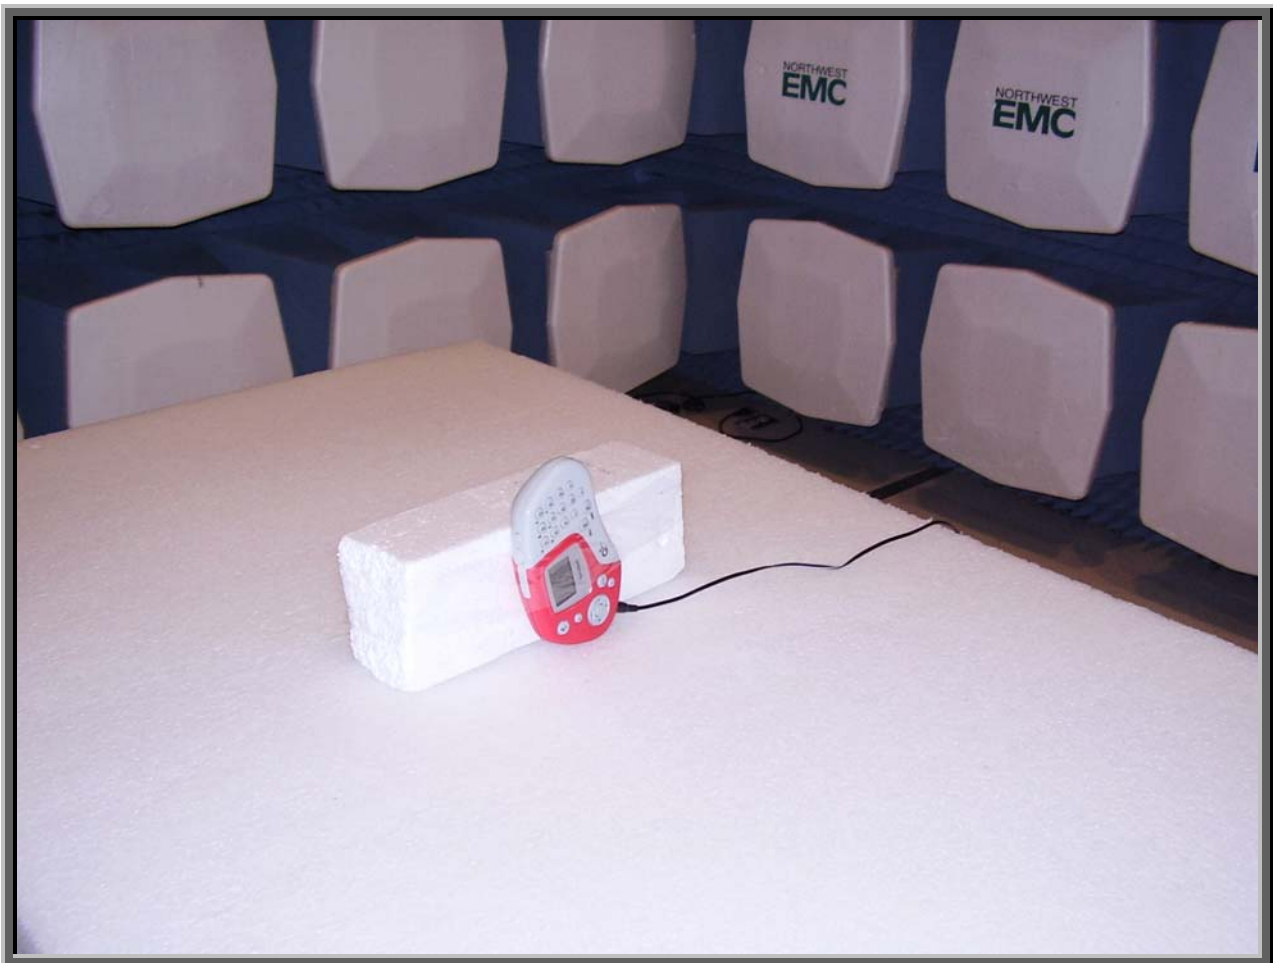

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

Mid

High

**Operating Modes Investigated:**

Transmit

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

Battery

**Frequency Range Investigated****Start Frequency**

30 MHz

**Stop Frequency**

26 GHz

**Software\Firmware Applied During Test****Exercise software**

Standard Production Software

**Version**

Unknown

**Description**

The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.

**EUT and Peripherals in Test Setup Boundary****Description****Manufacturer****Model/Part Number****Serial Number**

EUT- Q5 RF

Quizdom, Inc.

Q5 RF

EMC 0x44040F

AC Power Adapter - 120V

CUI, Inc.

41-9-500R

N/A

## Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

## Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	AR	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo


## Test Description

**Requirement:** The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.


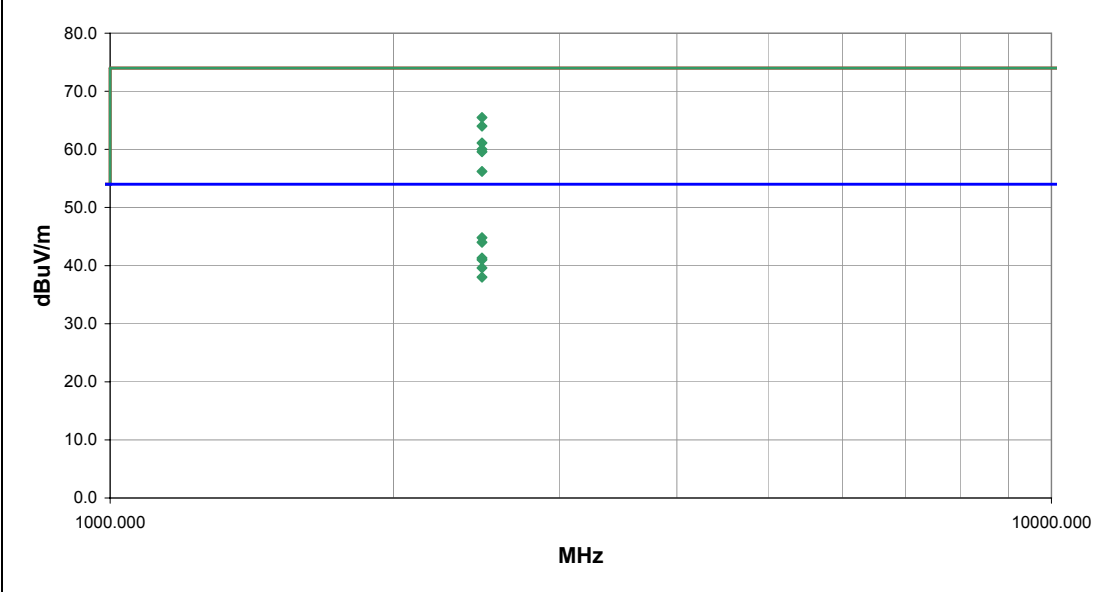
**Configuration:** The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			

Completed by:


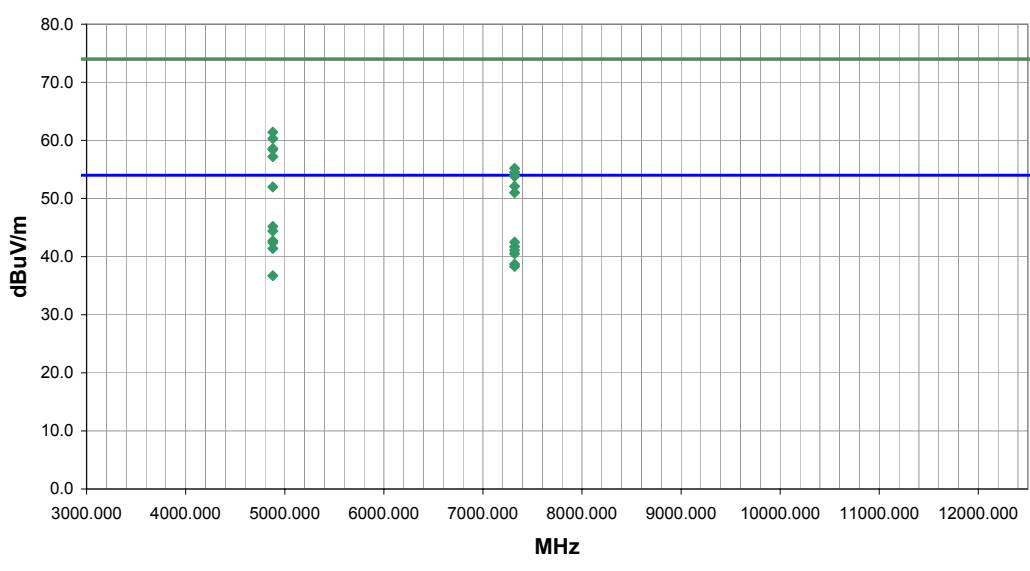



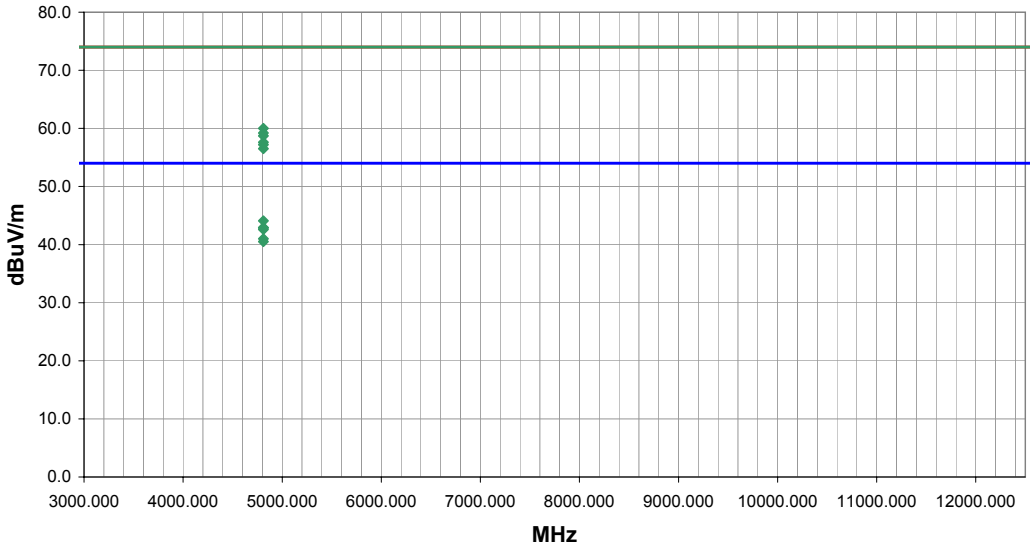


NORTHWEST		RADIATED EMISSIONS DATA SHEET										REV d4.7 12/21/2004	
EMC													
EUT: Q5 RF										Work Order: PROU0011			
Serial Number: EMC 0x44040F										Date: 12/21/04			
Customer: Product Creation Studio										Temperature: 22			
Attendees: None										Humidity: 32%			
Cust. Ref. No.:										Barometric Pressure 30.44			
Tested by: Rod Peloquin					Power: 120VAC/60Hz					Job Site: EV01			
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004										Method: ANSI C63.4:2003			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
No hop, high channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												1	
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2483.500	57.7	-2.2	22.0	1.2	3.0	10.0	V-Horn	PK	0.0	65.5	74.0	-8.5	EUT on side
2483.500	37.0	-2.2	22.0	1.2	3.0	10.0	V-Horn	AV	0.0	44.8	54.0	-9.2	EUT on side
2483.500	36.2	-2.2	357.0	1.3	3.0	10.0	H-Horn	AV	0.0	44.0	54.0	-10.0	EUT vertical
2483.500	56.2	-2.2	357.0	1.3	3.0	10.0	H-Horn	PK	0.0	64.0	74.0	-10.0	EUT vertical
2483.500	33.5	-2.2	270.0	1.1	3.0	10.0	H-Horn	AV	0.0	41.3	54.0	-12.7	EUT horizontal
2483.500	53.3	-2.2	271.0	1.1	3.0	10.0	H-Horn	PK	0.0	61.1	74.0	-12.9	EUT horizontal
2483.500	33.2	-2.2	232.0	1.4	3.0	10.0	V-Horn	AV	0.0	41.0	54.0	-13.0	EUT vertical
2483.500	52.2	-2.2	223.0	1.4	3.0	10.0	V-Horn	PK	0.0	60.0	74.0	-14.0	EUT horizontal
2483.500	31.8	-2.2	223.0	1.4	3.0	10.0	V-Horn	AV	0.0	39.6	54.0	-14.4	EUT horizontal
2483.500	51.8	-2.2	232.0	1.4	3.0	10.0	V-Horn	PK	0.0	59.6	74.0	-14.4	EUT vertical
2483.500	30.2	-2.2	254.0	1.3	3.0	10.0	H-Horn	AV	0.0	38.0	54.0	-16.0	EUT on side
2483.500	48.4	-2.2	254.0	1.3	3.0	10.0	H-Horn	PK	0.0	56.2	74.0	-17.8	EUT on side

NORTHWEST		REV											
EMC		d14.7											
12/21/2004													
RADIATED EMISSIONS DATA SHEET													
EUT: Q5 RF		Work Order: PROU0011											
Serial Number: EMC 0x44040F		Date: 12/22/04											
Customer: Product Creation Studio		Temperature: 21											
Attendees: Scott Thielman		Humidity: 34%											
Cust. Ref. No.:		Barometric Pressure: 30.5											
Tested by: Dan Haas		Power: 120VAC/60Hz											
		Job Site: EV01											
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
No hop, high channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS		Run #											
Pass		2											
Other													
		Tested By:											
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4959.985	41.4	3.6	27.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.0	54.0	-9.0	EUT on its side
4959.985	39.3	3.6	186.0	1.6	3.0	0.0	V-Horn	AV	0.0	42.9	54.0	-11.1	EUT Vertical
4959.985	39.0	3.6	200.0	1.3	3.0	0.0	V-Horn	AV	0.0	42.6	54.0	-11.4	EUT Horizontal
4959.985	38.7	3.6	216.0	1.4	3.0	0.0	H-Horn	AV	0.0	42.3	54.0	-11.7	EUT Vertical
4959.985	38.3	3.6	82.0	1.7	3.0	0.0	V-Horn	AV	0.0	41.9	54.0	-12.1	EUT on its side
4959.985	38.2	3.6	37.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.8	54.0	-12.2	EUT Horizontal
7440.009	30.1	11.1	264.0	1.5	3.0	0.0	H-Horn	AV	0.0	41.2	54.0	-12.8	EUT on its side
4959.985	57.3	3.6	27.0	1.3	3.0	0.0	H-Horn	PK	0.0	60.9	74.0	-13.1	EUT on its side
7440.009	28.6	11.1	52.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.7	54.0	-14.3	EUT Vertical
7440.009	28.2	11.1	220.0	2.4	3.0	0.0	V-Horn	AV	0.0	39.3	54.0	-14.7	EUT Horizontal
7440.009	28.1	11.1	31.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.2	54.0	-14.8	EUT on its side
7440.009	27.8	11.1	145.0	1.8	3.0	0.0	H-Horn	AV	0.0	38.9	54.0	-15.1	EUT Vertical
4959.985	54.3	3.6	186.0	1.6	3.0	0.0	V-Horn	PK	0.0	57.9	74.0	-16.1	EUT Vertical
4959.985	53.9	3.6	200.0	1.3	3.0	0.0	V-Horn	PK	0.0	57.5	74.0	-16.5	EUT Horizontal
4959.985	53.9	3.6	216.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.5	74.0	-16.5	EUT Vertical
7440.009	26.0	11.1	158.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.1	54.0	-16.9	EUT Horizontal
4959.985	52.6	3.6	37.0	1.1	3.0	0.0	H-Horn	PK	0.0	56.2	74.0	-17.8	EUT Horizontal
4959.985	52.5	3.6	82.0	1.7	3.0	0.0	V-Horn	PK	0.0	56.1	74.0	-17.9	EUT on its side
7440.009	42.1	11.1	264.0	1.5	3.0	0.0	H-Horn	PK	0.0	53.2	74.0	-20.8	EUT on its side
7440.009	42.0	11.1	220.0	2.4	3.0	0.0	V-Horn	PK	0.0	53.1	74.0	-20.9	EUT Horizontal



NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET										REV d14.7 12/21/2004	
EUT: Q5 RF										Work Order: PROU0011											
Serial Number: EMC 0x44040F										Date: 12/22/04											
Customer: Product Creation Studio										Temperature: 20											
Attendees: Scott Thielman										Humidity: 35%											
Cust. Ref. No.:										Barometric Pressure 30.5											
Tested by: Dan Haas										Power: 120VAC/60Hz										Job Site: EV01	
TEST SPECIFICATIONS																					
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004										Method: ANSI C63.4:2003											
SAMPLE CALCULATIONS																					
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																					
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																					
COMMENTS																					
EUT OPERATING MODES																					
No hop, Mid channel																					
DEVIATIONS FROM TEST STANDARD																					
No deviations.																					
RESULTS										Run #											
Pass										3											
Other																					
												Tested By:									
																					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments								
4880.079	41.6	3.6	2.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.2	54.0	-8.8	EUT on its side								
4880.079	40.8	3.6	22.0	1.1	3.0	0.0	V-Horn	AV	0.0	44.4	54.0	-9.6	EUT Vertical								
4880.079	39.1	3.6	343.0	1.3	3.0	0.0	H-Horn	AV	0.0	42.7	54.0	-11.3	EUT Vertical								
7320.057	32.0	10.5	346.0	1.4	3.0	0.0	V-Horn	AV	0.0	42.5	54.0	-11.5	EUT Vertical								
4880.079	38.8	3.6	186.0	1.7	3.0	0.0	V-Horn	AV	0.0	42.4	54.0	-11.6	EUT Horizontal								
7320.057	31.2	10.5	322.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.7	54.0	-12.3	EUT Vertical								
4880.079	37.8	3.6	345.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.4	54.0	-12.6	EUT Horizontal								
4880.079	57.8	3.6	2.0	1.3	3.0	0.0	H-Horn	PK	0.0	61.4	74.0	-12.6	EUT on its side								
7320.057	30.6	10.5	276.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.1	54.0	-12.9	EUT on its side								
7320.057	30.0	10.5	35.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5	EUT Horizontal								
4880.079	56.7	3.6	22.0	1.1	3.0	0.0	V-Horn	PK	0.0	60.3	74.0	-13.7	EUT Vertical								
7320.057	28.2	10.5	172.0	1.2	3.0	0.0	V-Horn	AV	0.0	38.7	54.0	-15.3	EUT on its side								
4880.079	55.0	3.6	343.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.6	74.0	-15.4	EUT Vertical								
4880.079	54.8	3.6	186.0	1.7	3.0	0.0	V-Horn	PK	0.0	58.4	74.0	-15.6	EUT Horizontal								
7320.057	27.8	10.5	-1.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.3	54.0	-15.7	EUT Horizontal								
4880.079	53.6	3.6	345.0	1.1	3.0	0.0	H-Horn	PK	0.0	57.2	74.0	-16.8	EUT Horizontal								
4880.079	33.1	3.6	227.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.7	54.0	-17.3	EUT on its side								
7320.057	44.7	10.5	346.0	1.4	3.0	0.0	V-Horn	PK	0.0	55.2	74.0	-18.8	EUT Vertical								
7320.057	44.0	10.5	322.0	1.1	3.0	0.0	H-Horn	PK	0.0	54.5	74.0	-19.5	EUT Vertical								
7320.057	43.4	10.5	276.0	1.1	3.0	0.0	H-Horn	PK	0.0	53.9	74.0	-20.1	EUT on its side								

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV d14.7 12/21/2004	
EUT: Q5 RF		Work Order: PROU0011													
Serial Number: EMC 0x44040F		Date: 12/22/04													
Customer: Product Creation Studio		Temperature: 20													
Attendees: Scott Thielman		Humidity: 35%													
Cust. Ref. No.:		Barometric Pressure: 30.5													
Tested by: Dan Haas		Power: 120VAC/60Hz		Job Site: EV01											
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004						Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
EUT OPERATING MODES															
No hop, Low channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												4			
Other															
 Tested By:															
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments		
4809.954	40.8	3.3	34.0	1.4	3.0	0.0	H-Horn	AV	0.0	44.1	54.0	-9.9	EUT Vertical		
4809.954	39.6	3.3	16.0	1.4	3.0	0.0	V-Horn	AV	0.0	42.9	54.0	-11.1	EUT Vertical		
4809.954	39.6	3.3	159.0	1.3	3.0	0.0	H-Horn	AV	0.0	42.9	54.0	-11.1	EUT on its side.		
4809.954	39.3	3.3	344.0	1.4	3.0	0.0	H-Horn	AV	0.0	42.6	54.0	-11.4	EUT Horizontal		
4809.954	37.7	3.3	11.0	1.2	3.0	0.0	V-Horn	AV	0.0	41.0	54.0	-13.0	EUT on its side.		
4809.954	37.2	3.3	201.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5	EUT Horizontal		
4809.954	56.7	3.3	34.0	1.4	3.0	0.0	H-Horn	PK	0.0	60.0	74.0	-14.0	EUT Vertical		
4809.954	55.9	3.3	159.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.2	74.0	-14.8	EUT on its side.		
4809.954	55.4	3.3	16.0	1.4	3.0	0.0	V-Horn	PK	0.0	58.7	74.0	-15.3	EUT Vertical		
4809.954	54.3	3.3	344.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.6	74.0	-16.4	EUT Horizontal		
4809.954	53.9	3.3	11.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.2	74.0	-16.8	EUT on its side.		
4809.954	53.2	3.3	201.0	1.2	3.0	0.0	V-Horn	PK	0.0	56.5	74.0	-17.5	EUT Horizontal		



