

FCC Test Report

(PART 22)

Report No.: RF181011C15

FCC ID: 2AIBC-ENJOYNOW

Test Model: TLP201

Received Date: Oct. 11, 2018

Test Date: Nov. 20, 2018 ~ Nov. 28, 2018

Issued Date: Apr. 11, 2019

Applicant: The Light Phone Inc

Address: 49 Bogart St #44 Brooklyn New York United States 11206

Manufacturer: The Light Phone Inc

Address: 19 Morris Ave, Brooklyn, NY 11205

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Modulation Characteristics Measurement	19
4.2.1 Limits of Modulation Characteristics	19
4.2.2 Test Setup	19
4.2.3 Test Procedure	19
4.2.4 Test Results	19
4.3 Frequency Stability Measurement	20
4.3.1 Limits of Frequency Stability Measurement	20
4.3.2 Test Procedure	20
4.3.3 Test Setup	20
4.3.4 Test Results	21
4.4 Occupied Bandwidth Measurement	26
4.4.1 Test Procedure	26
4.4.2 Test Setup	26
4.4.3 Test Result	27
4.5 Band Edge Measurement	30
4.5.1 Limits of Band Edge Measurement	30
4.5.2 Test Setup	30
4.5.3 Test Procedures	30
4.5.4 Test Results	31
4.6 Peak to Average Ratio	36
4.6.1 Limits of Peak to Average Ratio Measurement	36
4.6.2 Test Setup	36
4.6.3 Test Procedures	36
4.6.4 Test Results	37
4.7 Conducted Spurious Emissions	40
4.7.1 Limits of Conducted Spurious Emissions Measurement	40
4.7.2 Test Setup	40
4.7.3 Test Procedure	40
4.7.4 Test Results	41
4.8 Radiated Emission Measurement	46
4.8.1 Limits of Radiated Emission Measurement	46
4.8.2 Test Procedure	46
4.8.3 Deviation from Test Standard	46
4.8.4 Test Setup	47
4.8.5 Test Results	48

5 Pictures of Test Arrangements.....	66
Appendix – Information of the Testing Laboratories	67

Release Control Record

Issue No.	Description	Date Issued
RF181011C15	Original Release	Apr. 11, 2019

1 Certificate of Conformity

Product: Light Phone 2

Brand: Light

Test Model: TLP201

Sample Status: Engineering Sample

Applicant: The Light Phone Inc

Test Date: Nov. 20, 2018 ~ Nov. 28, 2018

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Apr. 11, 2019
Ivonne Wu / Supervisor

Approved by :  , **Date:** Apr. 11, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 22.913 (d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.19 dB at 45.52 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY56070348	Sep. 06, 2018	Sep. 05, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 06, 2017	Dec. 05, 2018
Double Ridge Guide Horn Antenna EMCO	3115	5619	Dec. 12, 2017	Dec. 11, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53052282	Dec. 28, 2017	Dec. 27, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is 7450F-10.

3 General Information

3.1 General Description of EUT

Product	Light Phone 2	
Brand	Light	
Test Model	TLP201	
Status of EUT	Engineering Sample	
Power Supply Rating	5.0 Vdc (adapter) 3.8 Vdc (battery)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE 26 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 26 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 26 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 26 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 15 MHz)	831.5 ~ 841.5 MHz
Max. ERP Power	LTE 26 (Channel Bandwidth: 1.4 MHz)	23.39 mW
	LTE 26 (Channel Bandwidth: 3 MHz)	25.23 mW
	LTE 26 (Channel Bandwidth: 5 MHz)	26.85 mW
	LTE 26 (Channel Bandwidth: 10 MHz)	28.58 mW
	LTE 26 (Channel Bandwidth: 15 MHz)	30.06 mW
Emission Designator	LTE 26 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE 26 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE 26 (Channel Bandwidth: 5 MHz)	4M50D7W
	LTE 26 (Channel Bandwidth: 10 MHz)	8M98D7W
	LTE 26 (Channel Bandwidth: 15 MHz)	13M5D7W
Antenna Type	PIFA Antenna with -8 dBi gain (Main) / -25.8 dBi gain (Aux.)	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

- There're 2 colors for EUT listed as below

Brand	Model	Color	Description
Light	TLP201	Black	Different colors are for marketing purpose
		Gray	

- The EUT contains following accessory devices.


Product	Brand	Model	Description
USB Cable 1 (Black)	UDE	LP2	1 m cable P/N.: 410-4102000001
USB Cable 2 (Gray)	UDE	LP2	1 m cable P/N.: 410-4101000001
Battery	ZHENGZHOU BAK Battery Co. Ltd.	V304556P	3.8 Vdc

* The USB cables have the same layout, circuit, and components, but different P/N and color.


- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

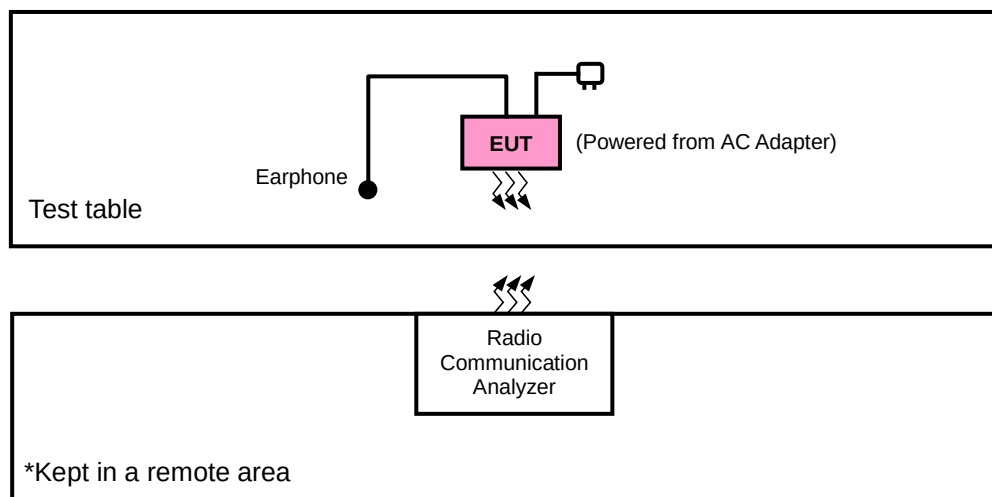

<E.R.P. Test>

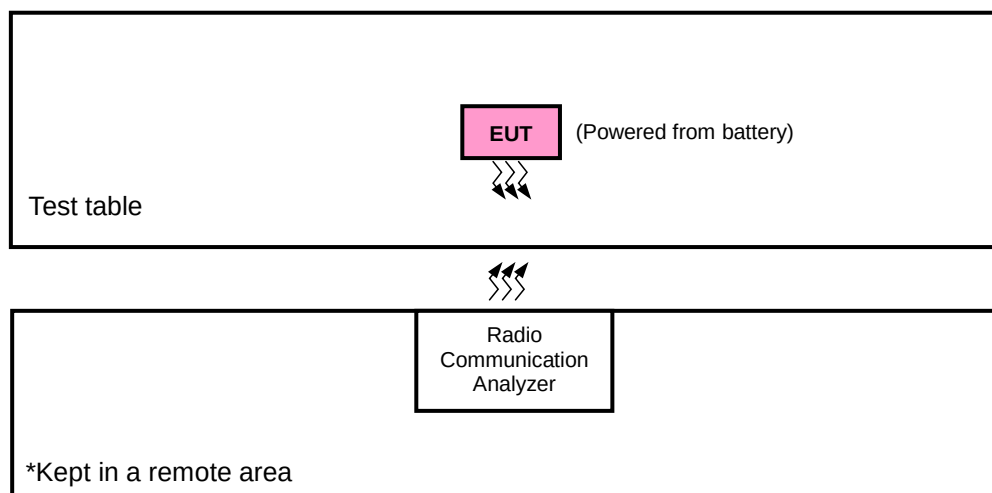

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Adapter	SONY	AC-0060-EU	N/A	N/A
2.	Earphone	N/A	N/A	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 was provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 26	Z-plane	Y-axis

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
-	Modulation Characteristics	26865 to 26965	26865	15 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Frequency Stability	26797 to 27033	26797, 27033	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26805 to 27025	26805, 27025	3 MHz	QPSK	1 RB / 7 RB Offset
		26815 to 27015	26815, 27015	5 MHz	QPSK	1 RB / 12 RB Offset
		26840 to 26990	26840, 26990	10 MHz	QPSK	1 RB / 24 RB Offset
		26865 to 26965	26865, 26965	15 MHz	QPSK	1 RB / 37 RB Offset
-	Occupied Bandwidth	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	26797 to 27033	26797	1.4 MHz	QPSK	1 RB / 0 RB Offset
			27033	1.4 MHz	QPSK	6 RB / 0 RB Offset
		26805 to 27025	26805	3 MHz	QPSK	1 RB / 5 RB Offset
			27025	3 MHz	QPSK	6 RB / 0 RB Offset
		26815 to 27015	26815	5 MHz	QPSK	1 RB / 0 RB Offset
			27015	5 MHz	QPSK	15 RB / 0 RB Offset
		26840 to 26990	26840	10 MHz	QPSK	1 RB / 14 RB Offset
			26990	10 MHz	QPSK	15 RB / 0 RB Offset
		26865 to 26965	26865	15 MHz	QPSK	1 RB / 0 RB Offset
			26965	15 MHz	QPSK	25 RB / 0 RB Offset
		26815 to 27015	26815	5 MHz	QPSK	1 RB / 24 RB Offset
			27015	5 MHz	QPSK	25 RB / 0 RB Offset
		26840 to 26990	26840	10 MHz	QPSK	1 RB / 0 RB Offset
			26990	10 MHz	QPSK	50 RB / 0 RB Offset
-	Peak to Average Ratio	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
-	Conducted Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK	1 RB / 7 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 12 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK	1 RB / 24 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 37 RB Offset
-	Radiated Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 12 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 37 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.8 Vdc	Thomas Wei
Modulation Characteristics	25 deg. C, 65 % RH	3.8 Vdc	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	3.8 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.8 Vdc	Wayne Lin
Band Edge	25 deg. C, 65 % RH	3.8 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.8 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	3.8 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

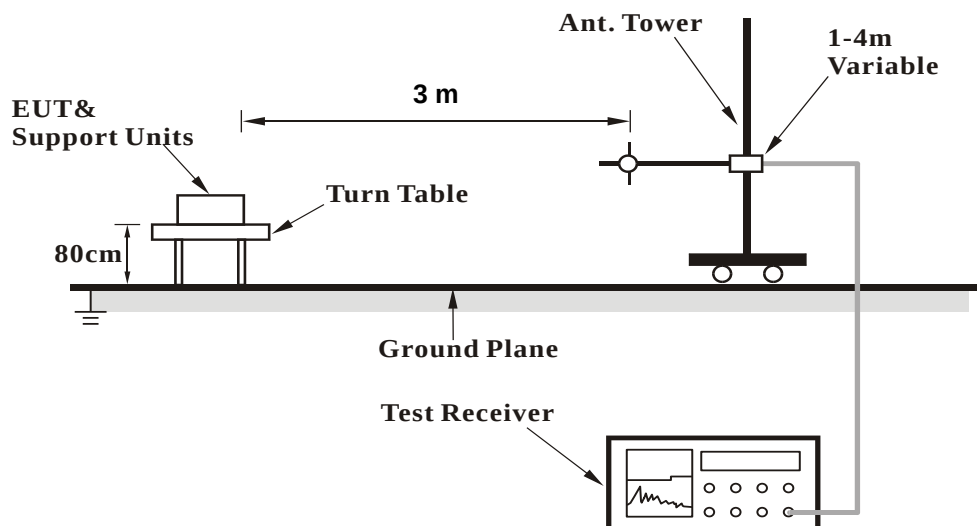


<Radiated Emission above 1 GHz>

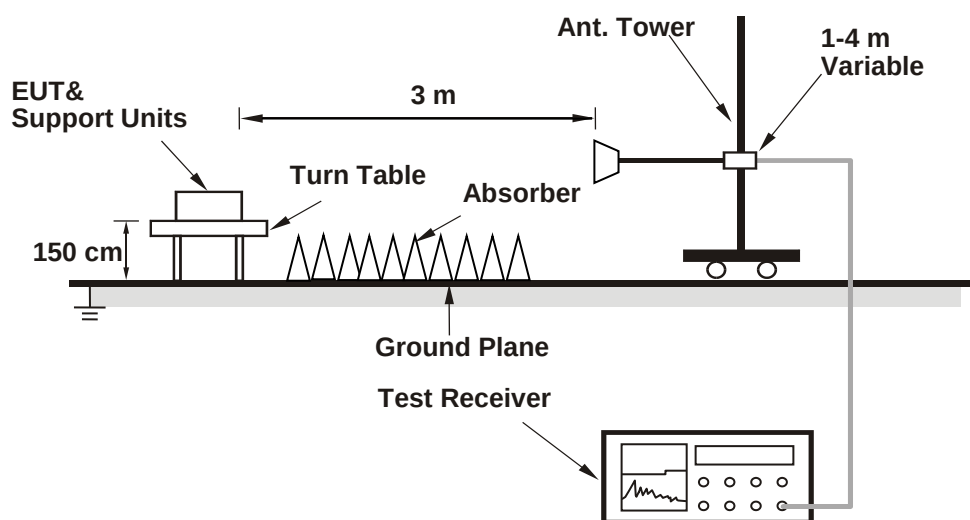

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 26															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26865	26915	26965				Channel		26840	26915	26990	
		Frequency (MHz)		831.5	836.5	841.5				Frequency (MHz)		829.0	836.5	844.0	
15M	QPSK	1	0	23.28	23.22	23.35	0	10M	QPSK	1	0	23.27	23.07	23.28	0
		1	37	23.32	23.22	23.39	0			1	24	23.19	23.08	23.38	0
		1	74	23.17	23.09	23.24	0			1	49	23.14	22.96	23.20	0
		36	0	22.29	22.27	22.36	1			25	0	22.21	22.23	22.33	1
		36	19	22.23	22.20	22.30	1			25	12	22.19	22.06	22.23	1
		36	39	22.25	22.16	22.32	1			25	25	22.12	22.05	22.30	1
		75	0	22.28	22.27	22.35	1			50	0	22.27	22.27	22.26	1
	16QAM	1	0	22.28	22.25	22.29	1		16QAM	1	0	22.22	22.13	22.29	1
		1	37	22.23	22.16	22.32	1			1	24	22.12	22.15	22.20	1
		1	74	22.15	22.12	22.14	1			1	49	22.00	22.07	22.16	1
		36	0	21.25	21.19	21.26	2			25	0	21.24	21.19	21.30	2
		36	19	21.23	21.15	21.29	2			25	12	21.12	21.12	21.16	2
		36	39	21.22	21.14	21.24	2			25	25	21.19	21.03	21.27	2
		75	0	21.24	21.22	21.26	2			50	0	21.23	21.18	21.27	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26815	26915	27015				Channel		26805	26915	27025	
		Frequency (MHz)		826.5	836.5	846.5				Frequency (MHz)		825.5	836.5	847.5	
5M	QPSK	1	0	23.13	23.04	23.20	0	3M	QPSK	1	0	22.99	23.21	23.22	1
		1	12	23.18	22.97	23.34	0			1	7	23.08	23.37	23.10	1
		1	24	23.06	22.88	23.14	0			1	14	22.81	23.17	23.06	1
		12	0	22.17	22.13	22.28	1			8	0	22.19	22.33	22.33	3
		12	6	22.06	22.06	22.20	1			8	3	22.06	22.10	22.10	3
		12	13	22.12	21.90	22.21	1			8	7	21.92	22.21	22.16	3
		25	0	22.14	22.14	22.25	1			15	0	22.18	22.18	22.07	6
	16QAM	1	0	22.15	22.04	22.08	1		16QAM	1	0	22.01	22.28	22.25	1
		1	12	22.12	22.14	22.16	1			1	7	22.07	22.11	22.18	1
		1	24	21.90	21.97	22.08	1			1	14	21.94	22.01	22.03	1
		12	0	21.13	21.12	21.16	2			8	0	21.14	21.29	21.25	2
		12	6	21.05	21.01	21.19	2			8	3	21.07	21.11	21.10	2
		12	13	21.15	20.93	21.10	2			8	7	20.89	21.25	21.00	2
		25	0	21.23	21.11	21.16	2			15	0	21.09	21.27	21.13	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)								
		Channel		26797	26915	27033									
		Frequency (MHz)		824.7	836.5	848.3									
1.4M	QPSK	1	0	23.03	23.27	23.18	0								
		1	2	23.01	23.36	23.28	0								
		1	5	22.93	23.09	23.19	0								
		3	0	23.23	23.18	23.15	0								
		3	1	22.92	23.10	23.15	0								
		3	3	23.05	23.15	23.29	0								
	16QAM	6	0	22.14	22.15	22.27	1								
		1	0	22.12	22.14	22.22	1								
		1	2	22.06	22.12	22.28	1								
		1	5	21.96	22.10	22.04	1								
		3	0	22.09	22.20	22.23	1								
		3	1	22.06	22.04	22.17	1								
16QAM	3	3	22.03	22.22	22.18	1									
	6	0	21.17	21.26	21.10	2									

ERP Power (dBm)

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26797	824.7	-25.52	32.62	4.95	3.13	H
	26915	836.5	-25.37	32.52	5.00	3.16	
	27033	848.3	-25.71	32.65	4.79	3.01	
	26797	824.7	-17.18	32.76	13.43	22.03	V
	26915	836.5	-16.55	32.39	13.69	23.39	
	27033	848.3	-16.80	32.54	13.59	22.86	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	26797	824.7	-26.53	32.62	3.94	2.48	H
	26915	836.5	-26.37	32.52	4.00	2.51	
	27033	848.3	-26.55	32.65	3.95	2.48	
	26797	824.7	-18.35	32.76	12.26	16.83	V
	26915	836.5	-17.55	32.39	12.69	18.58	
	27033	848.3	-18.01	32.54	12.38	17.30	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26805	825.5	-25.22	32.62	5.25	3.35	H
	26915	836.5	-25.06	32.52	5.31	3.40	
	27025	847.5	-25.47	32.65	5.03	3.18	
	26805	825.5	-16.94	32.76	13.67	23.28	V
	26915	836.5	-16.22	32.39	14.02	25.23	
	27025	847.5	-16.53	32.54	13.86	24.32	
Channel Bandwidth: 3 MHz / 16QAM							
Z	26805	825.5	-26.24	32.62	4.23	2.65	H
	26915	836.5	-26.06	32.52	4.31	2.70	
	27025	847.5	-26.34	32.65	4.16	2.61	
	26805	825.5	-18.10	32.76	12.51	17.82	V
	26915	836.5	-17.35	32.39	12.89	19.45	
	27025	847.5	-17.72	32.54	12.67	18.49	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26815	826.5	-24.89	32.62	5.58	3.61	H
	26915	836.5	-24.74	32.52	5.63	3.66	
	27015	846.5	-25.12	32.65	5.38	3.45	
	26815	826.5	-16.65	32.76	13.96	24.89	V
	26919	836.5	-15.95	32.39	14.29	26.85	
	27015	846.5	-16.33	32.54	14.06	25.47	
Channel Bandwidth: 5 MHz / 16QAM							
Z	26815	826.5	-25.98	32.62	4.49	2.81	H
	26915	836.5	-25.77	32.52	4.60	2.88	
	27015	846.5	-26.10	32.65	4.40	2.75	
	26815	826.5	-17.81	32.76	12.80	19.05	V
	26919	836.5	-17.06	32.39	13.18	20.80	
	27015	846.5	-17.39	32.54	13.00	19.95	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26840	829.0	-24.66	32.62	5.81	3.81	H
	26915	836.5	-24.46	32.52	5.91	3.90	
	26990	844.0	-24.82	32.65	5.68	3.70	
	26840	829.0	-16.31	32.76	14.30	26.92	V
	26919	836.5	-15.68	32.39	14.56	28.58	
	26990	844.0	-16.02	32.54	14.37	27.35	
Channel Bandwidth: 10 MHz / 16QAM							
Z	26840	829.0	-25.66	32.62	4.81	3.03	H
	26915	836.5	-25.47	32.52	4.90	3.09	
	26990	844.0	-25.80	32.65	4.70	2.95	
	26840	829.0	-17.50	32.76	13.11	20.46	V
	26919	836.5	-16.75	32.39	13.49	22.34	
	26990	844.0	-17.12	32.54	13.27	21.23	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26865	831.5	-24.45	32.62	6.02	4.00	H
	26915	836.5	-24.24	32.52	6.13	4.10	
	26965	841.5	-24.55	32.65	5.95	3.94	
	26865	831.5	-15.97	32.76	14.64	29.11	V
	26915	836.5	-15.46	32.39	14.78	30.06	
	26965	841.5	-15.68	32.54	14.71	29.58	
Channel Bandwidth: 15 MHz / 16QAM							
Z	26865	831.5	-25.40	32.62	5.07	3.21	H
	26915	836.5	-25.16	32.52	5.21	3.32	
	26965	841.5	-25.51	32.65	4.99	3.16	
	26865	831.5	-17.24	32.76	13.37	21.73	V
	26915	836.5	-16.49	32.39	13.75	23.71	
	26965	841.5	-16.86	32.54	13.53	22.54	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

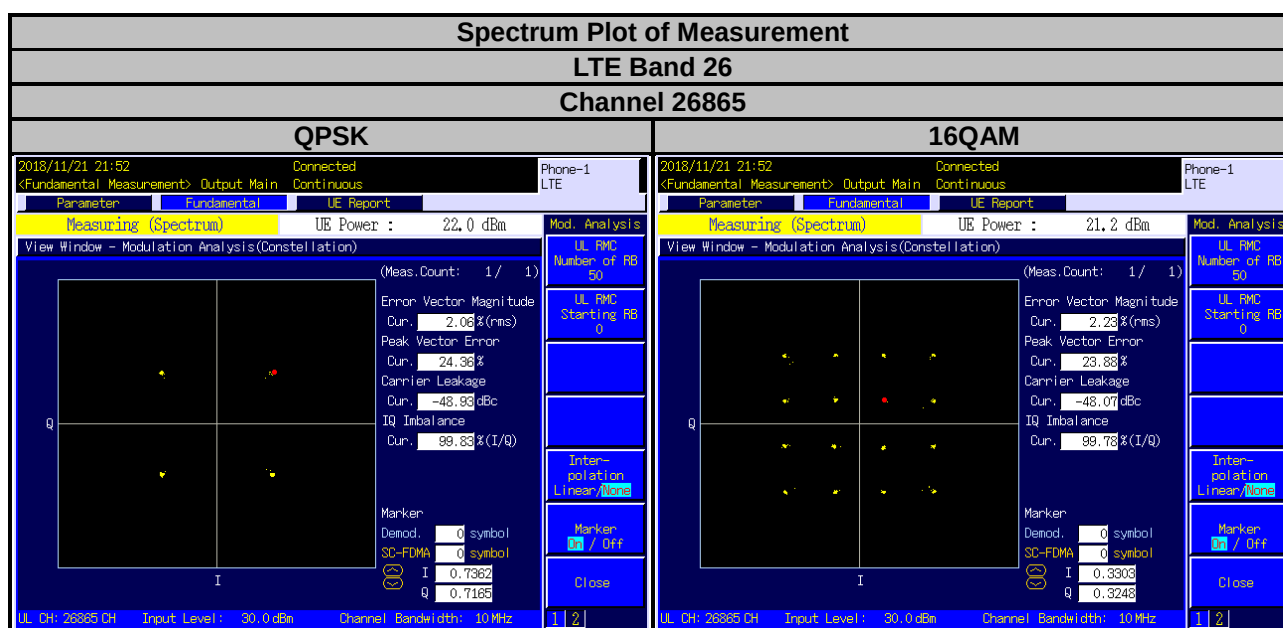

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

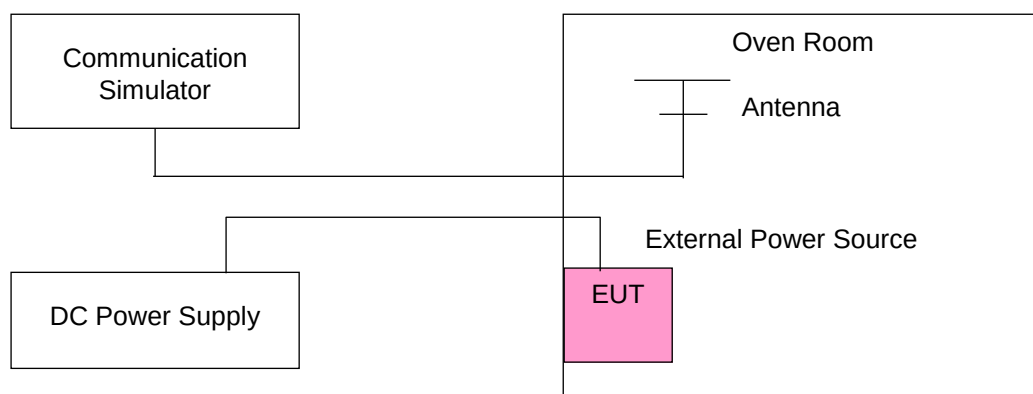

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	824.700004	0.004	848.300000	0.001	2.5
3.23	824.700004	0.004	848.300000	0.004	2.5
4.37	824.700004	0.005	848.300000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	824.700003	0.003	848.300000	0.002	2.5
-20	824.700002	0.003	848.300000	0.002	2.5
-10	824.700003	0.003	848.300000	0.002	2.5
0	824.700004	0.004	848.300000	0.004	2.5
10	824.700004	0.005	848.300000	0.003	2.5
20	824.699997	-0.003	848.300000	-0.004	2.5
30	824.699997	-0.003	848.300000	-0.002	2.5
40	824.699999	-0.001	848.300000	-0.003	2.5
50	824.699997	-0.004	848.300000	-0.002	2.5
55	824.699998	-0.002	848.300000	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	825.500003	0.003	847.500000	0.003	2.5
3.23	825.500002	0.003	847.500000	0.003	2.5
4.37	825.500001	0.001	847.500000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	825.500002	0.002	847.500000	0.004	2.5
-20	825.500002	0.003	847.500000	0.005	2.5
-10	825.500003	0.004	847.500000	0.004	2.5
0	825.500002	0.003	847.500000	0.001	2.5
10	825.500002	0.002	847.500000	0.003	2.5
20	825.499997	-0.003	847.500000	-0.003	2.5
30	825.499997	-0.004	847.500000	-0.002	2.5
40	825.499998	-0.003	847.500000	-0.002	2.5
50	825.499999	-0.002	847.500000	-0.002	2.5
55	825.499998	-0.003	847.500000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	826.500003	0.004	846.500004	0.005	2.5
3.23	826.500002	0.003	846.500003	0.004	2.5
4.37	826.500003	0.004	846.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.500002	0.002	846.500002	0.002	2.5
-20	826.500002	0.003	846.500002	0.003	2.5
-10	826.500002	0.003	846.500003	0.003	2.5
0	826.500004	0.005	846.500004	0.004	2.5
10	826.500004	0.005	846.500001	0.002	2.5
20	826.499996	-0.004	846.499999	-0.001	2.5
30	826.499996	-0.004	846.499996	-0.004	2.5
40	826.499998	-0.003	846.499997	-0.004	2.5
50	826.499998	-0.003	846.499998	-0.002	2.5
55	826.499998	-0.002	846.499997	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	829.000003	0.004	844.000003	0.003	2.5
3.23	829.000003	0.004	844.000001	0.001	2.5
4.37	829.000001	0.002	844.000004	0.005	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	829.000003	0.003	844.000004	0.005	2.5
-20	829.000004	0.005	844.000003	0.003	2.5
-10	829.000001	0.002	844.000002	0.003	2.5
0	829.000002	0.002	844.000004	0.004	2.5
10	829.000001	0.001	844.000001	0.001	2.5
20	828.999999	-0.001	843.999998	-0.003	2.5
30	828.999999	-0.001	843.999998	-0.002	2.5
40	828.999998	-0.003	843.999997	-0.003	2.5
50	828.999998	-0.003	843.999997	-0.003	2.5
55	828.999998	-0.002	843.999998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	831.500002	0.002	841.500002	0.002	2.5
3.23	831.500001	0.001	841.500004	0.005	2.5
4.37	831.500002	0.002	841.500004	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	831.500003	0.004	841.500003	0.004	2.5
-20	831.500002	0.002	841.500003	0.003	2.5
-10	831.500001	0.002	841.500001	0.001	2.5
0	831.500002	0.003	841.500002	0.002	2.5
10	831.500003	0.003	841.500004	0.005	2.5
20	831.499999	-0.002	841.499998	-0.003	2.5
30	831.499997	-0.004	841.499998	-0.002	2.5
40	831.499997	-0.004	841.499999	-0.002	2.5
50	831.499997	-0.004	841.499998	-0.002	2.5
55	831.499998	-0.003	841.499999	-0.002	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

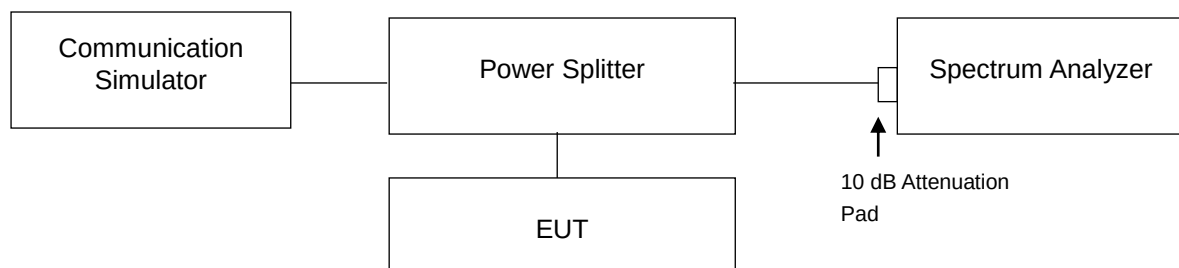

4.4.3 Test Result


LTE Band 26					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26797	824.7	1.0884	1.0878	1.248	1.257
26915	836.5	1.0859	1.0900	1.249	1.262
27033	848.3	1.0871	1.0913	1.251	1.251
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26805	825.5	2.7004	2.6993	2.925	2.931
26915	836.5	2.7039	2.6983	2.924	2.930
27025	847.5	2.7013	2.6986	2.933	2.928



LTE Band 26					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26815	826.5	4.4957	4.4961	4.821	4.838
26915	836.5	4.4922	4.4958	4.814	4.821
27015	846.5	4.4937	4.4963	4.822	4.832
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26840	829.0	8.9784	8.9820	9.508	9.524
26915	836.5	8.9512	8.9591	9.510	9.517
26990	844.0	8.9584	8.9612	9.518	9.523



LTE Band 26					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26865	831.5	13.484	13.489	14.26	14.26
26915	836.5	13.443	13.436	14.24	14.24
26965	841.5	13.431	13.428	14.24	14.24

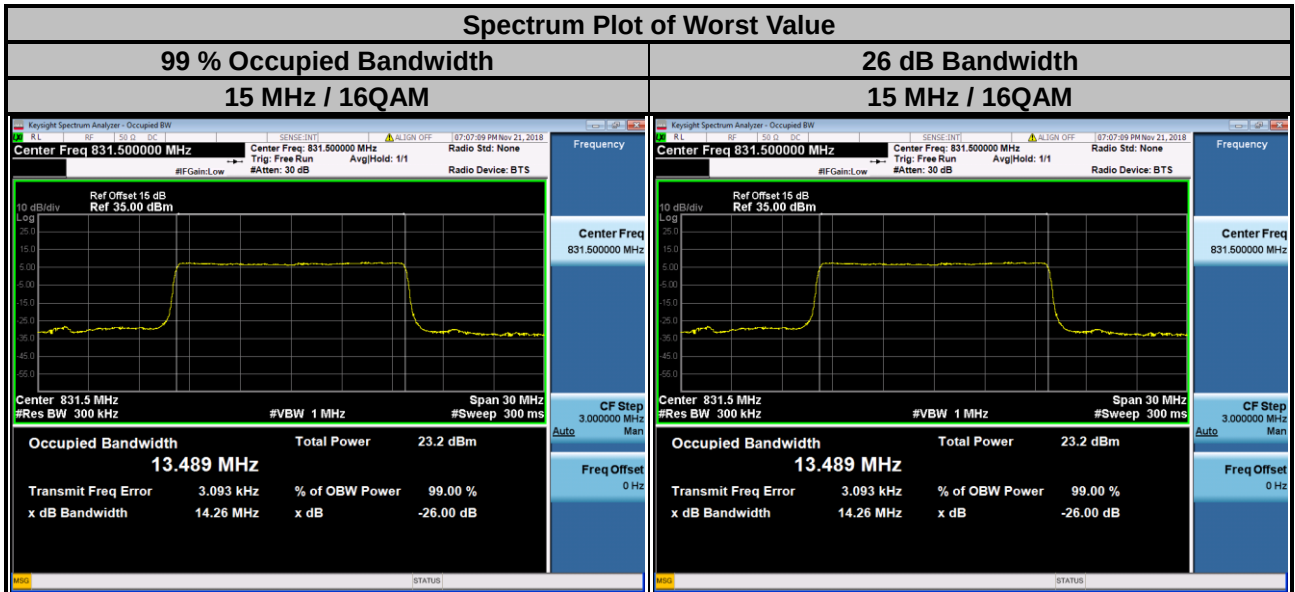


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

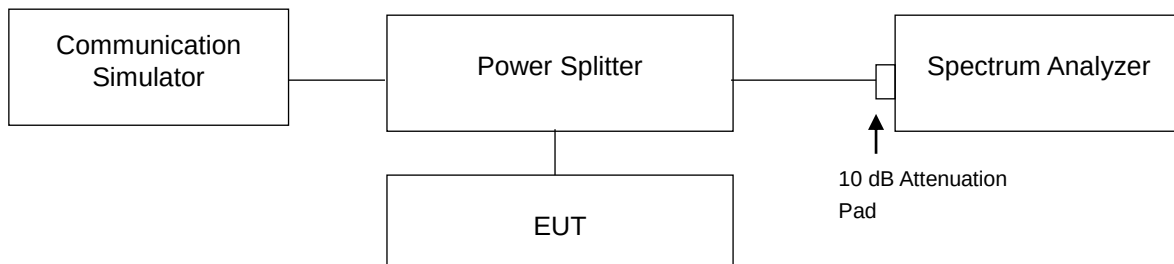

4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- Record the max trace plot into the test report.


4.5.4 Test Results

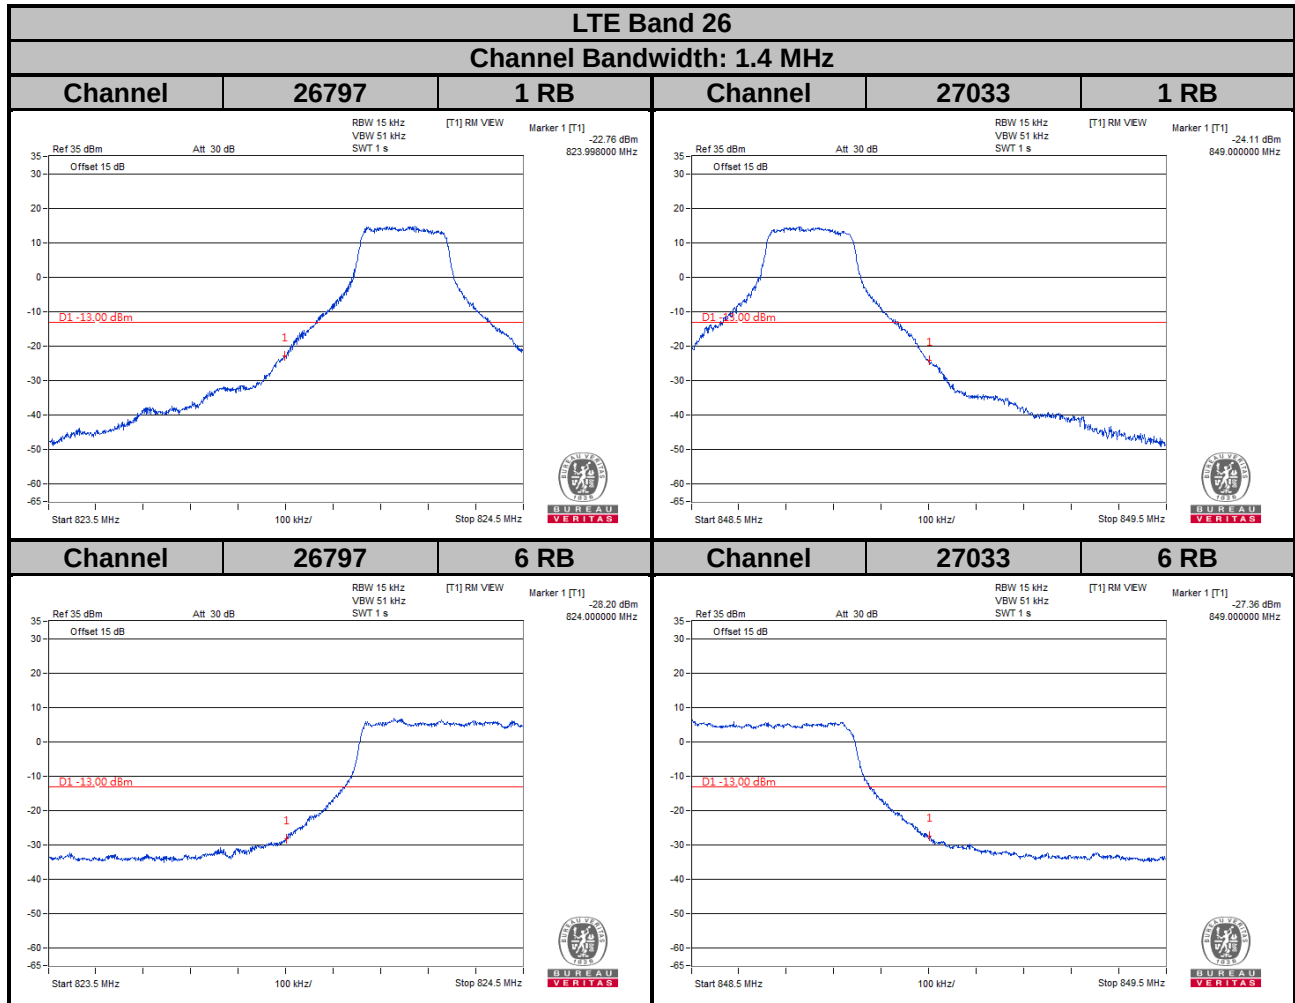


LTE Band 26

Channel Bandwidth: 3 MHz

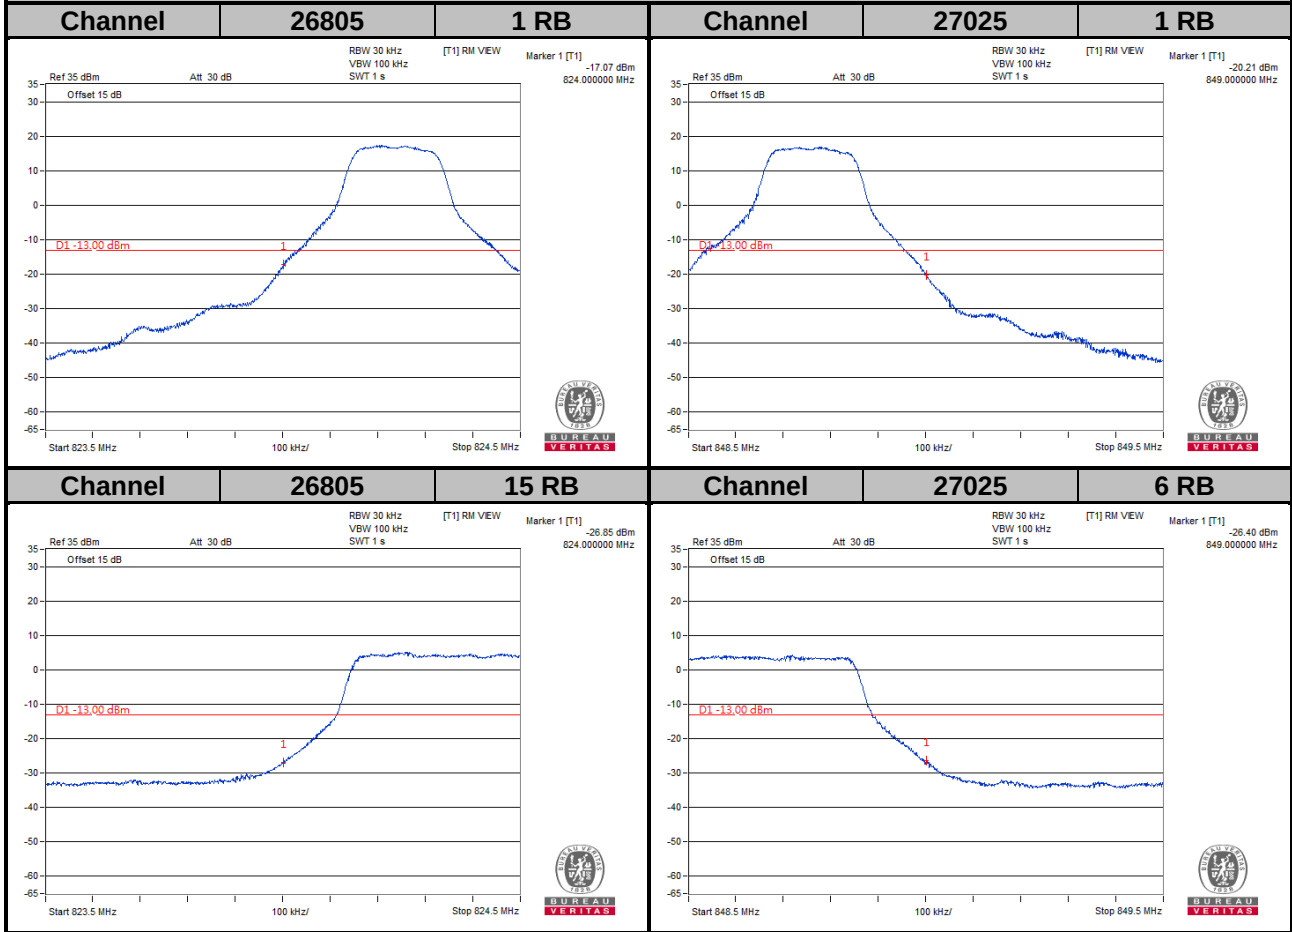


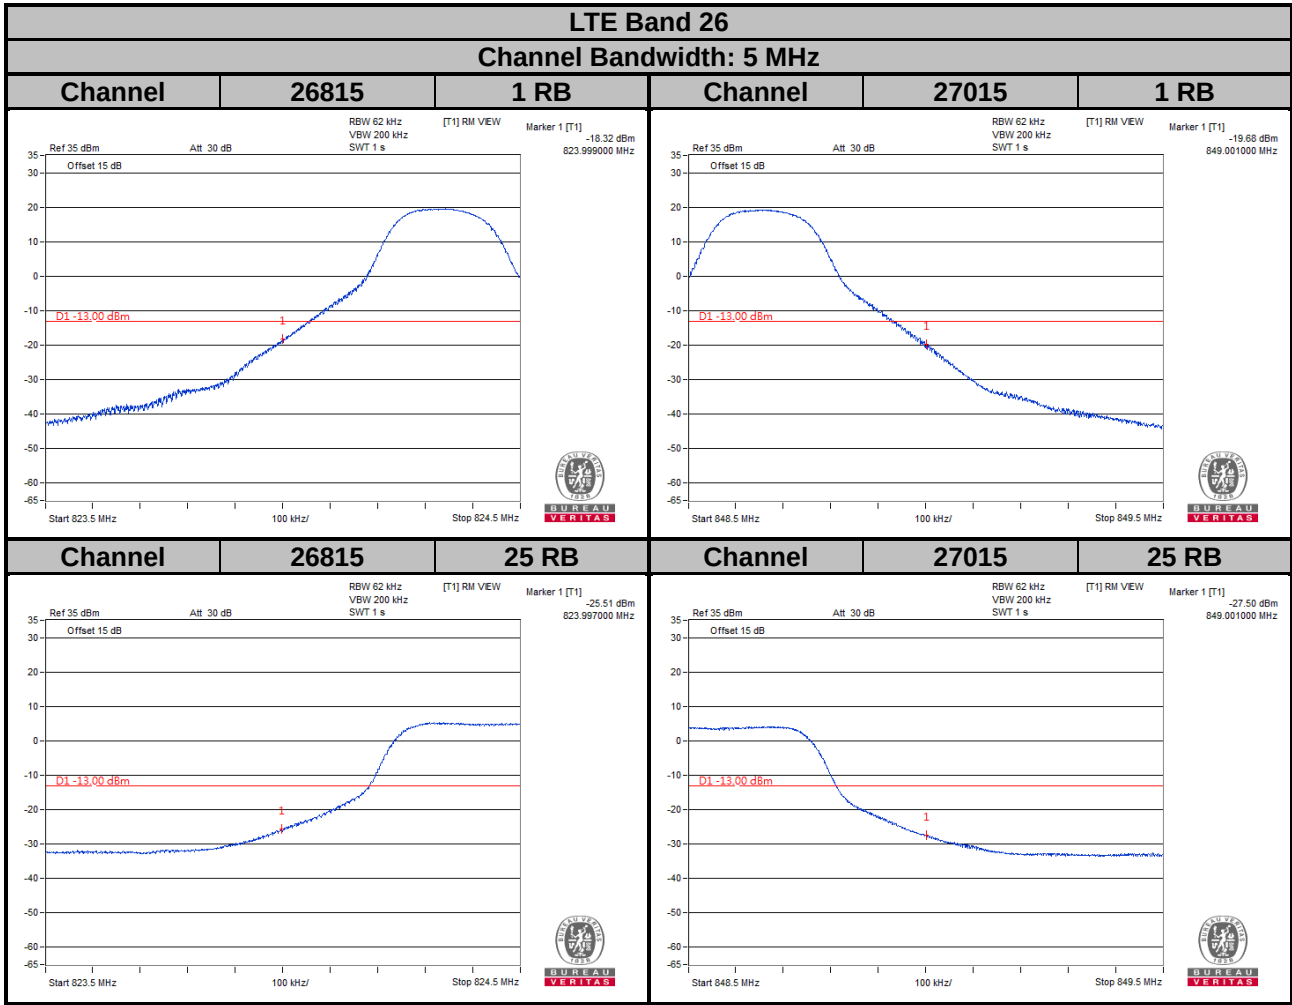

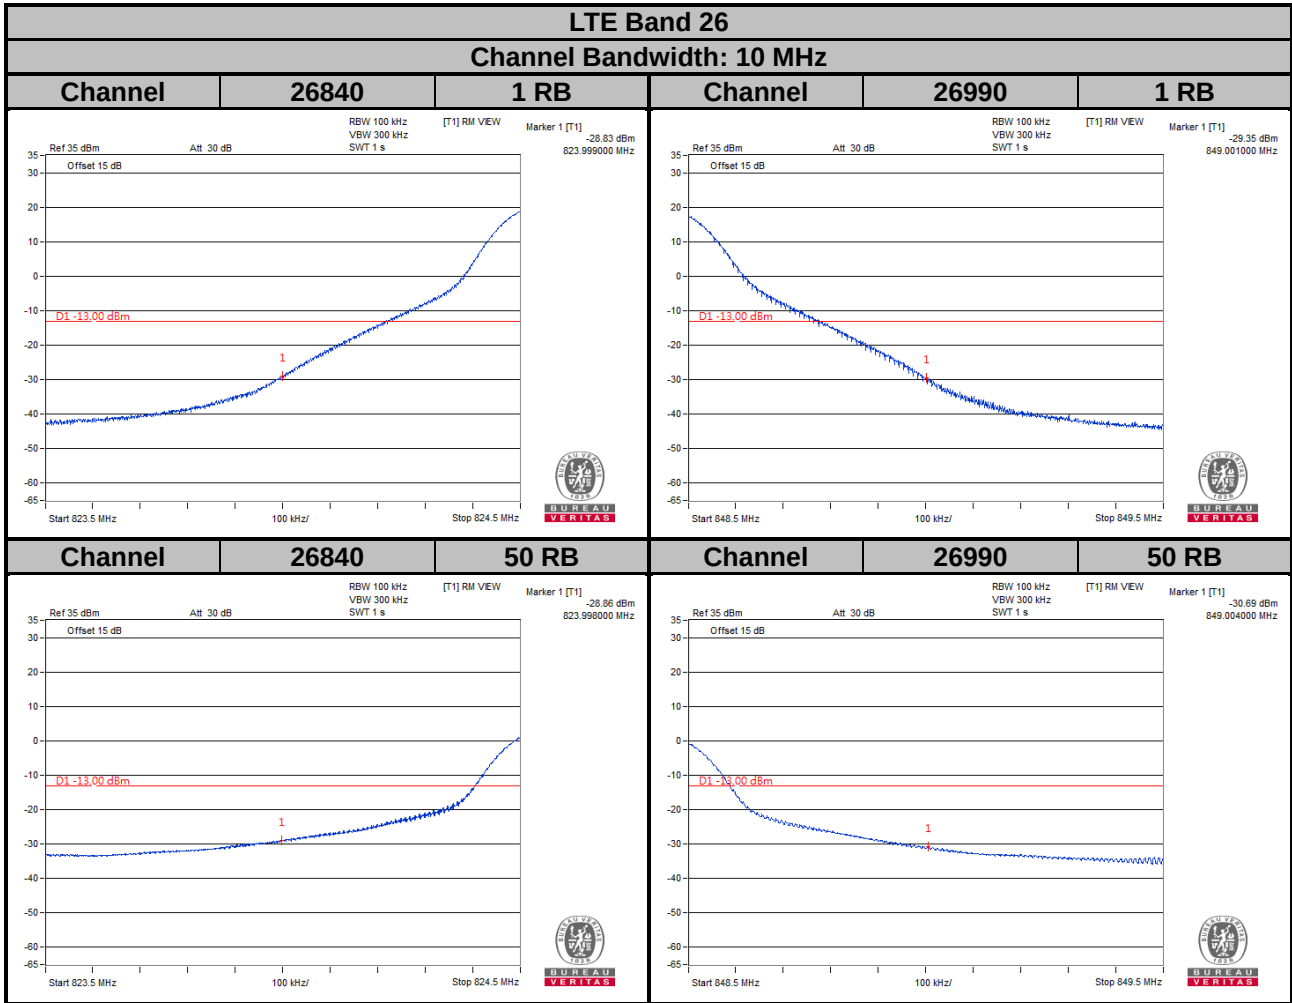

LTE Band 26

Channel Bandwidth: 15 MHz

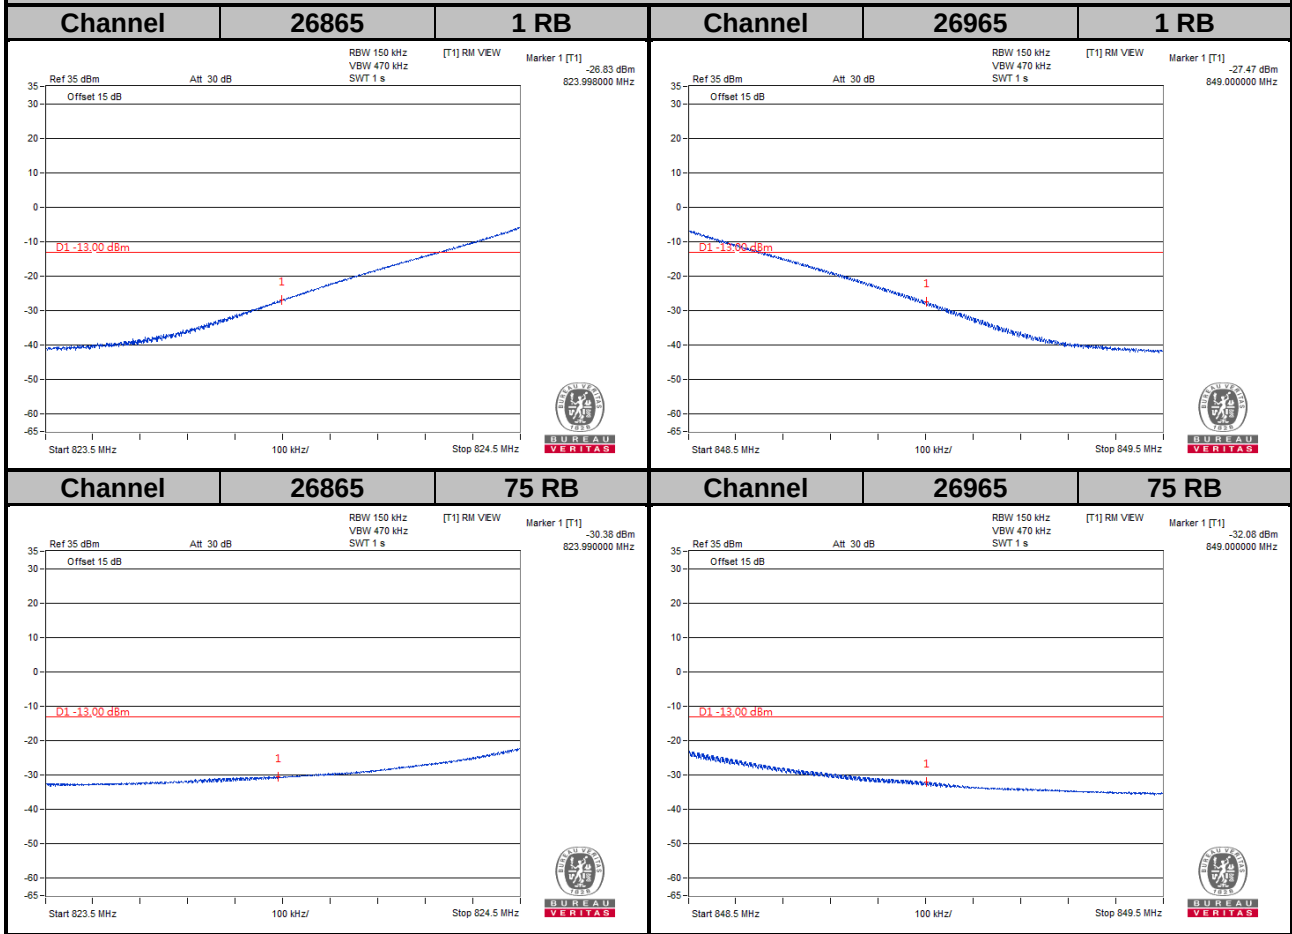


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

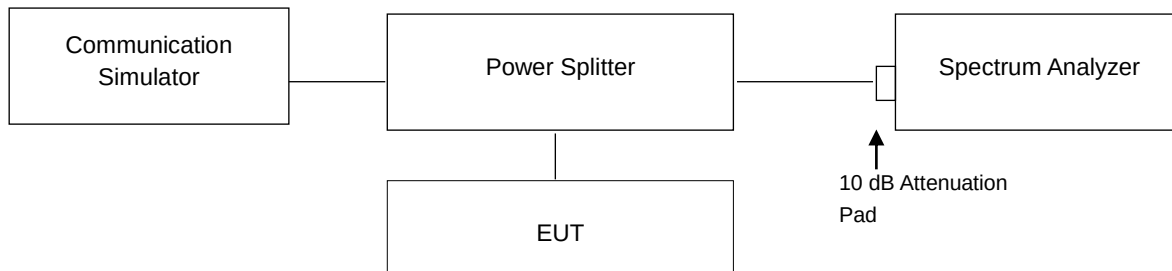


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 26							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26797	824.7	3.56	4.31	26805	825.5	3.57	4.35
26915	836.5	3.51	4.27	26915	836.5	3.55	4.26
27033	848.3	3.40	4.17	27025	847.5	3.42	4.24

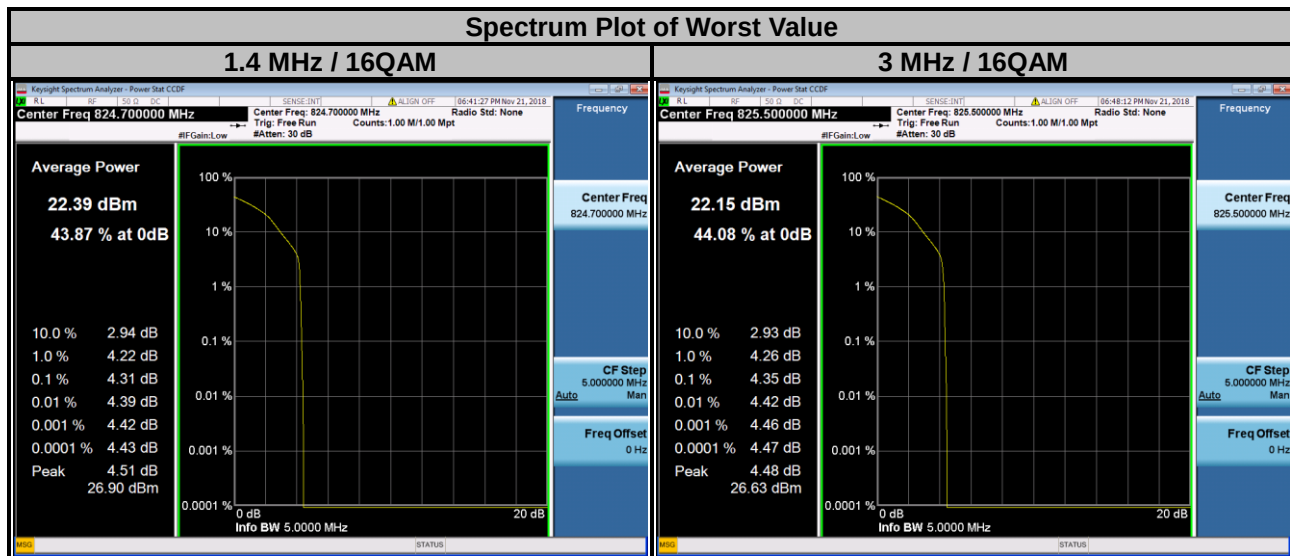

LTE Band 26							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26815	826.5	3.51	4.22	26840	829.0	3.46	4.22
26915	836.5	3.51	4.27	26915	836.5	3.50	4.31
27015	846.5	3.44	4.25	26990	844.0	3.39	4.06

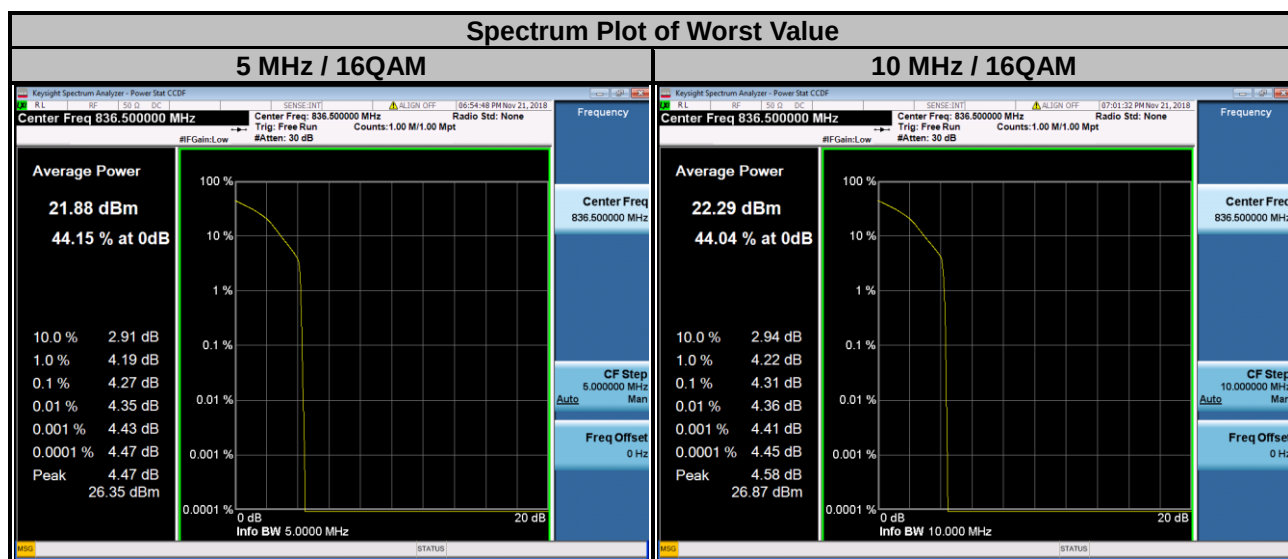

LTE Band 26			
Channel Bandwidth: 15 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM
26865	831.5	3.41	4.16
26915	836.5	3.45	4.22
26965	841.5	3.41	4.16

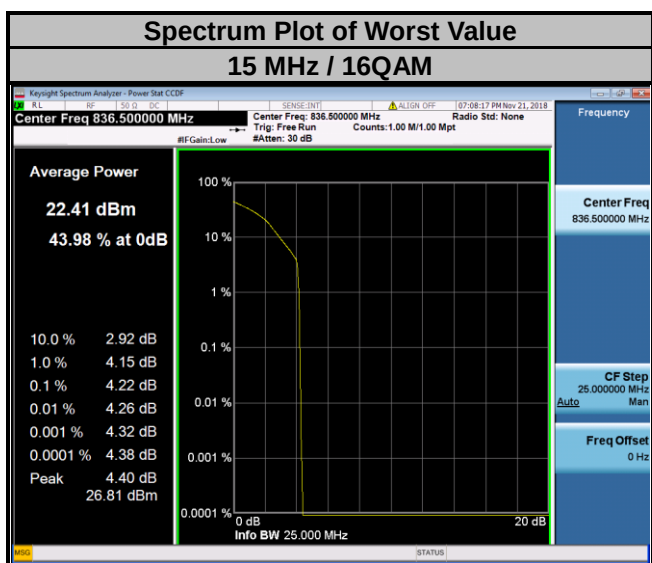


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

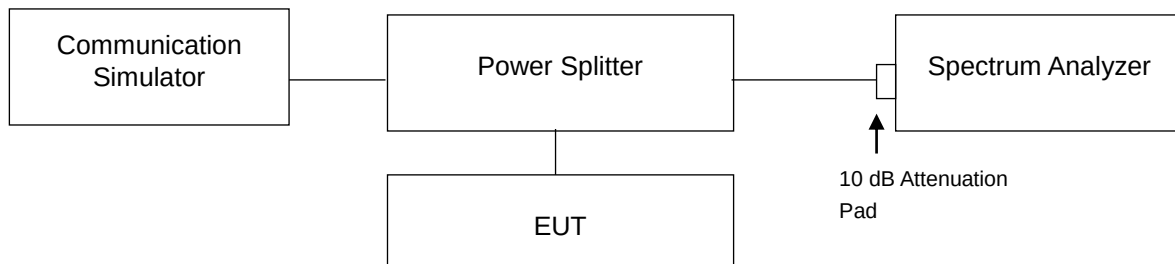


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 10 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

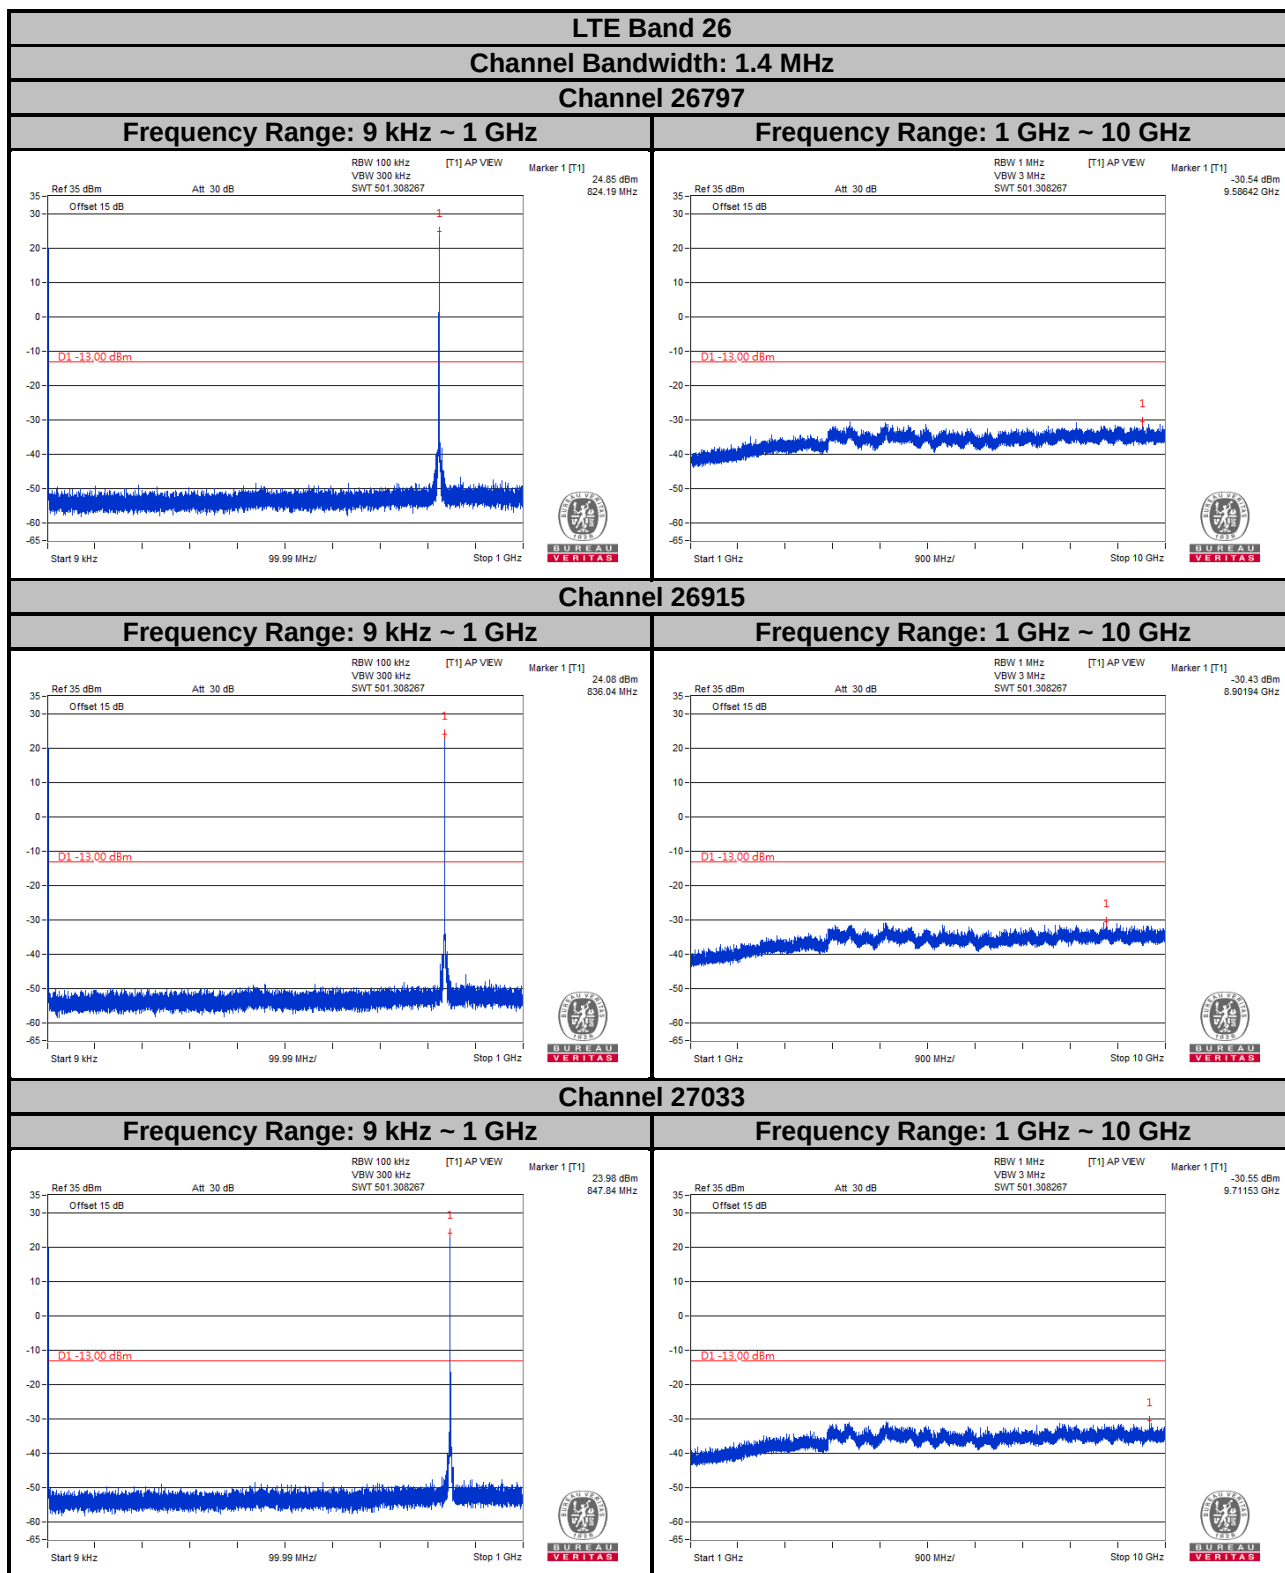

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

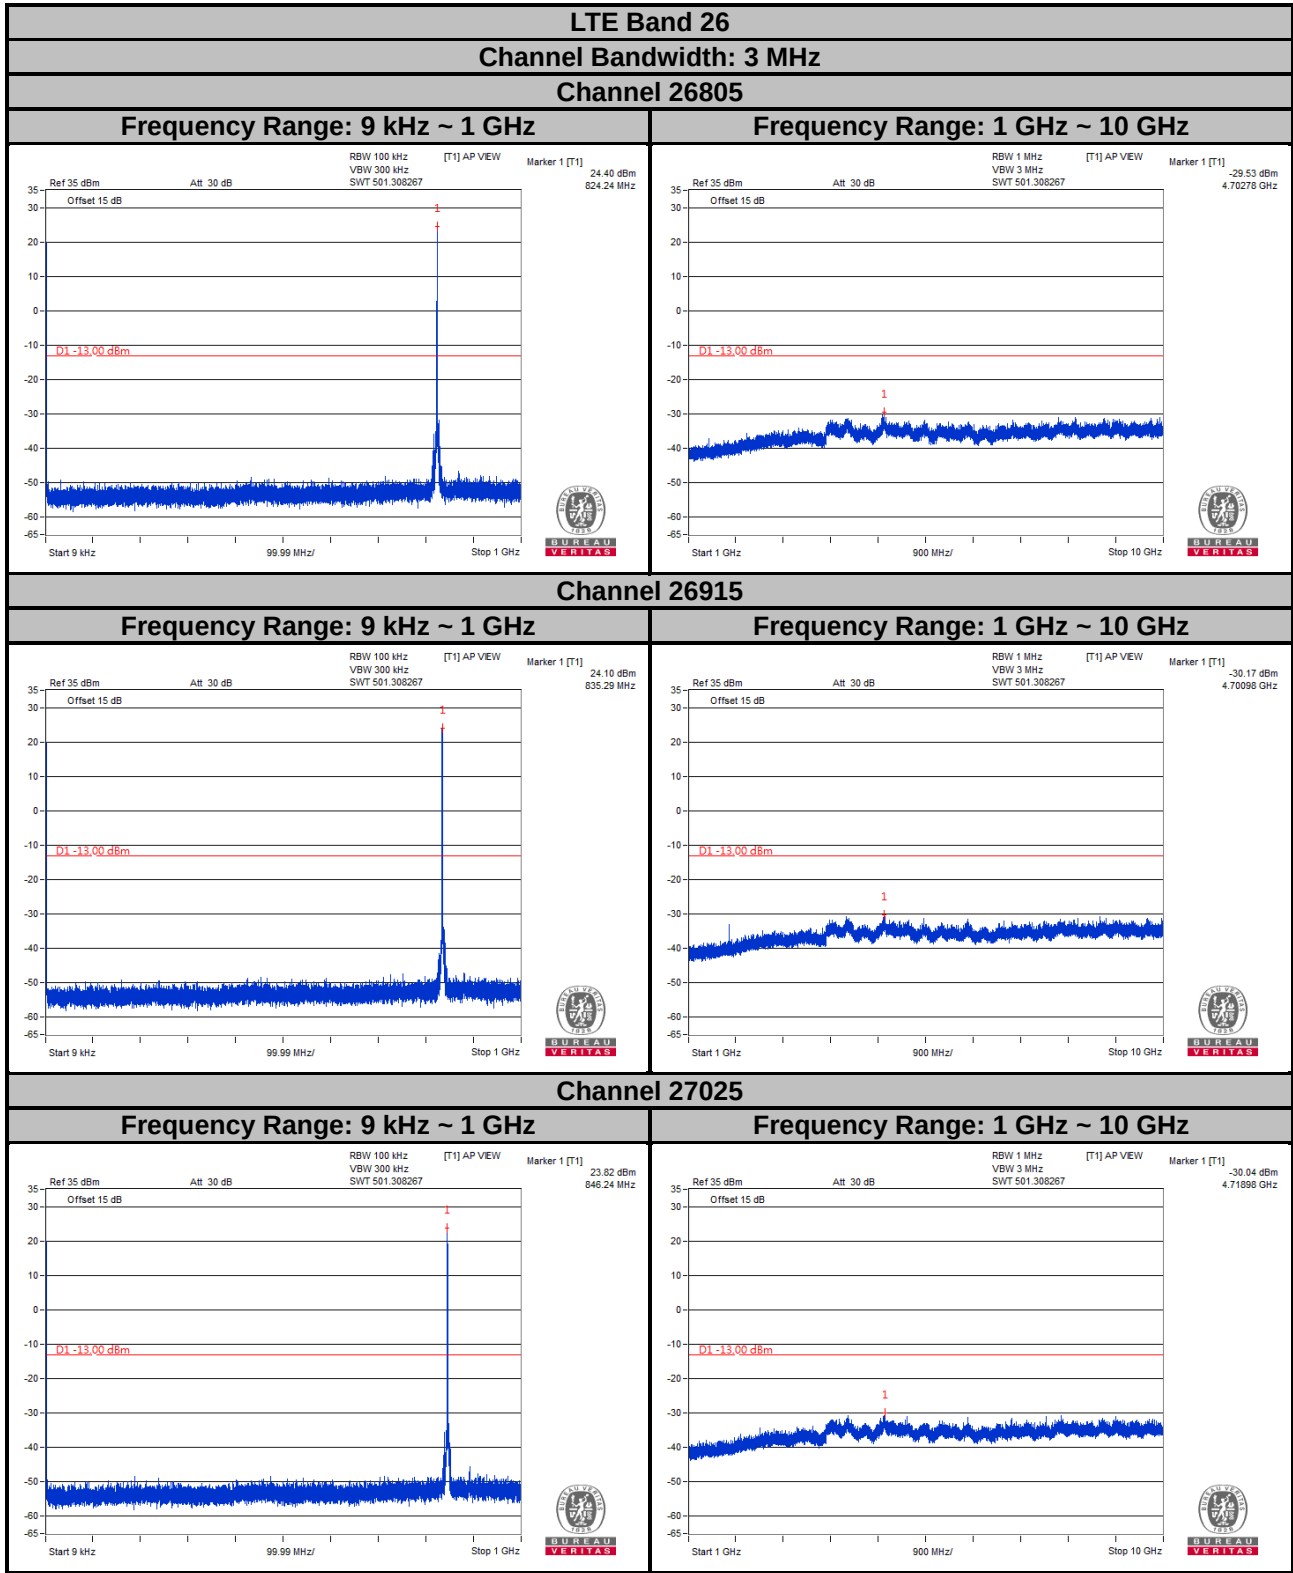


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

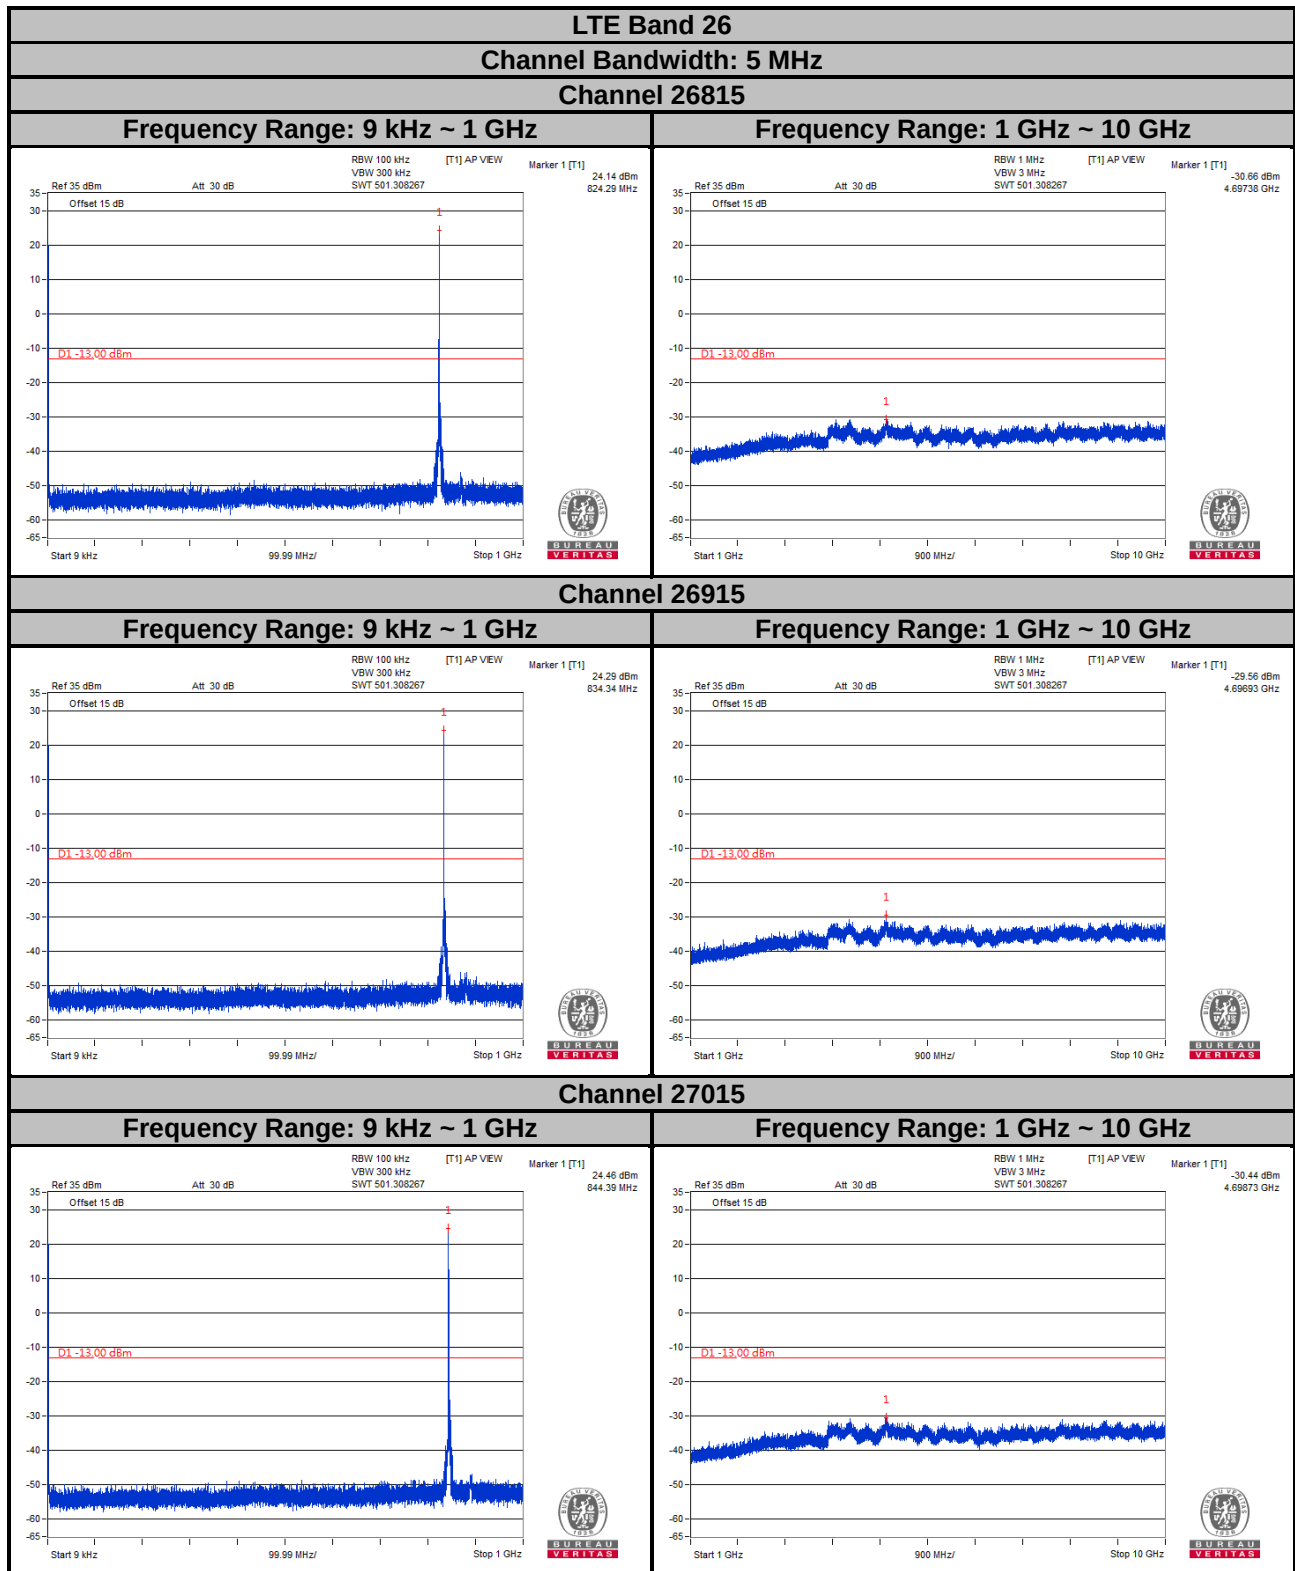


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 26
Channel Bandwidth: 10 MHz
Channel 26840

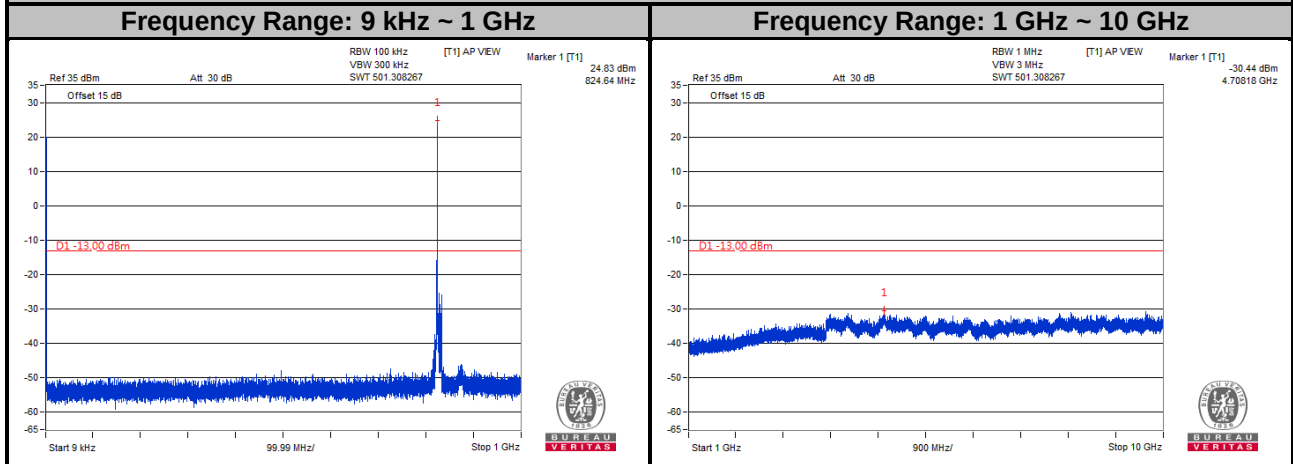


Channel 26915

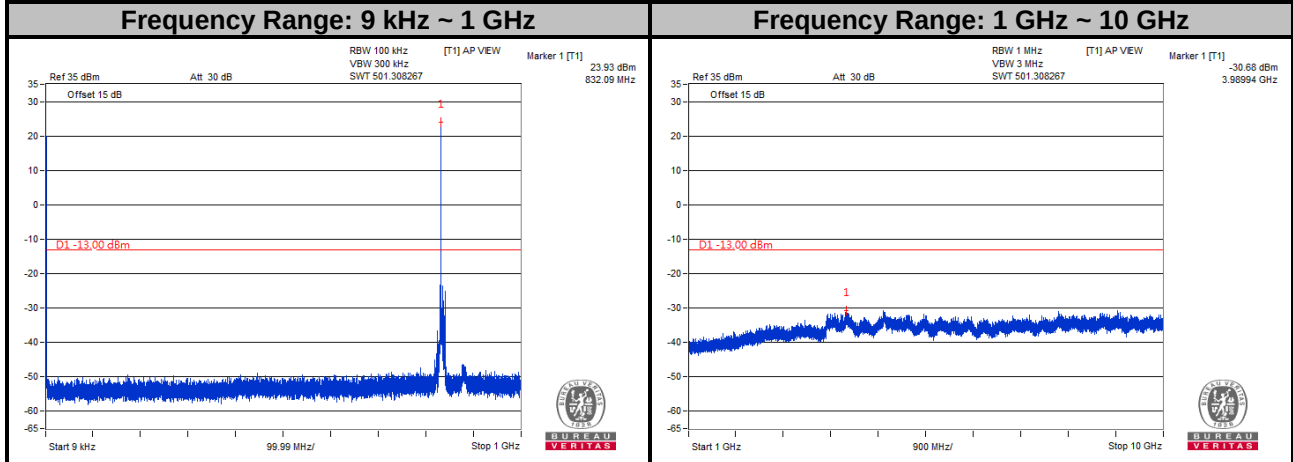

Channel 26990

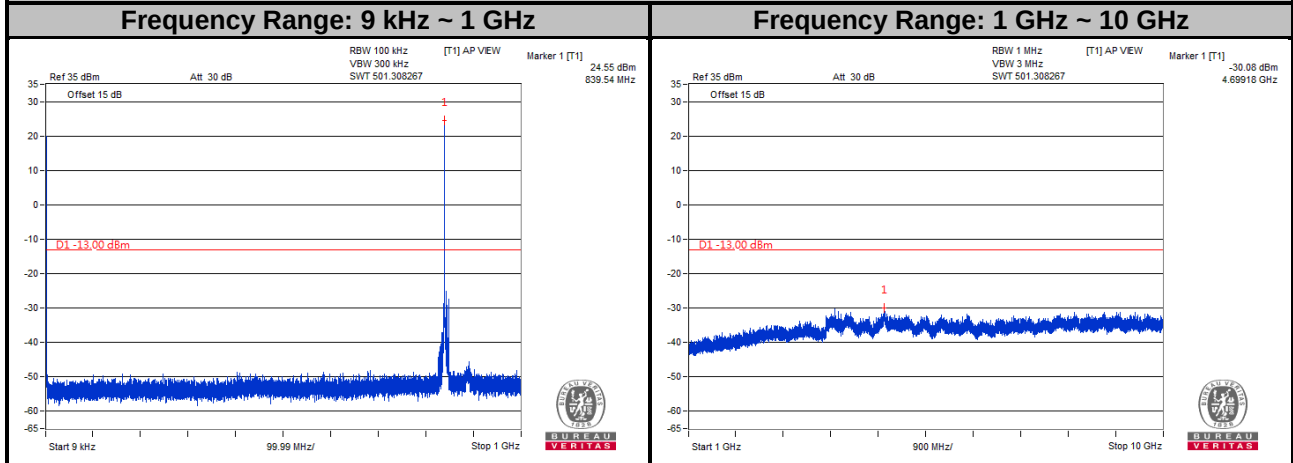

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

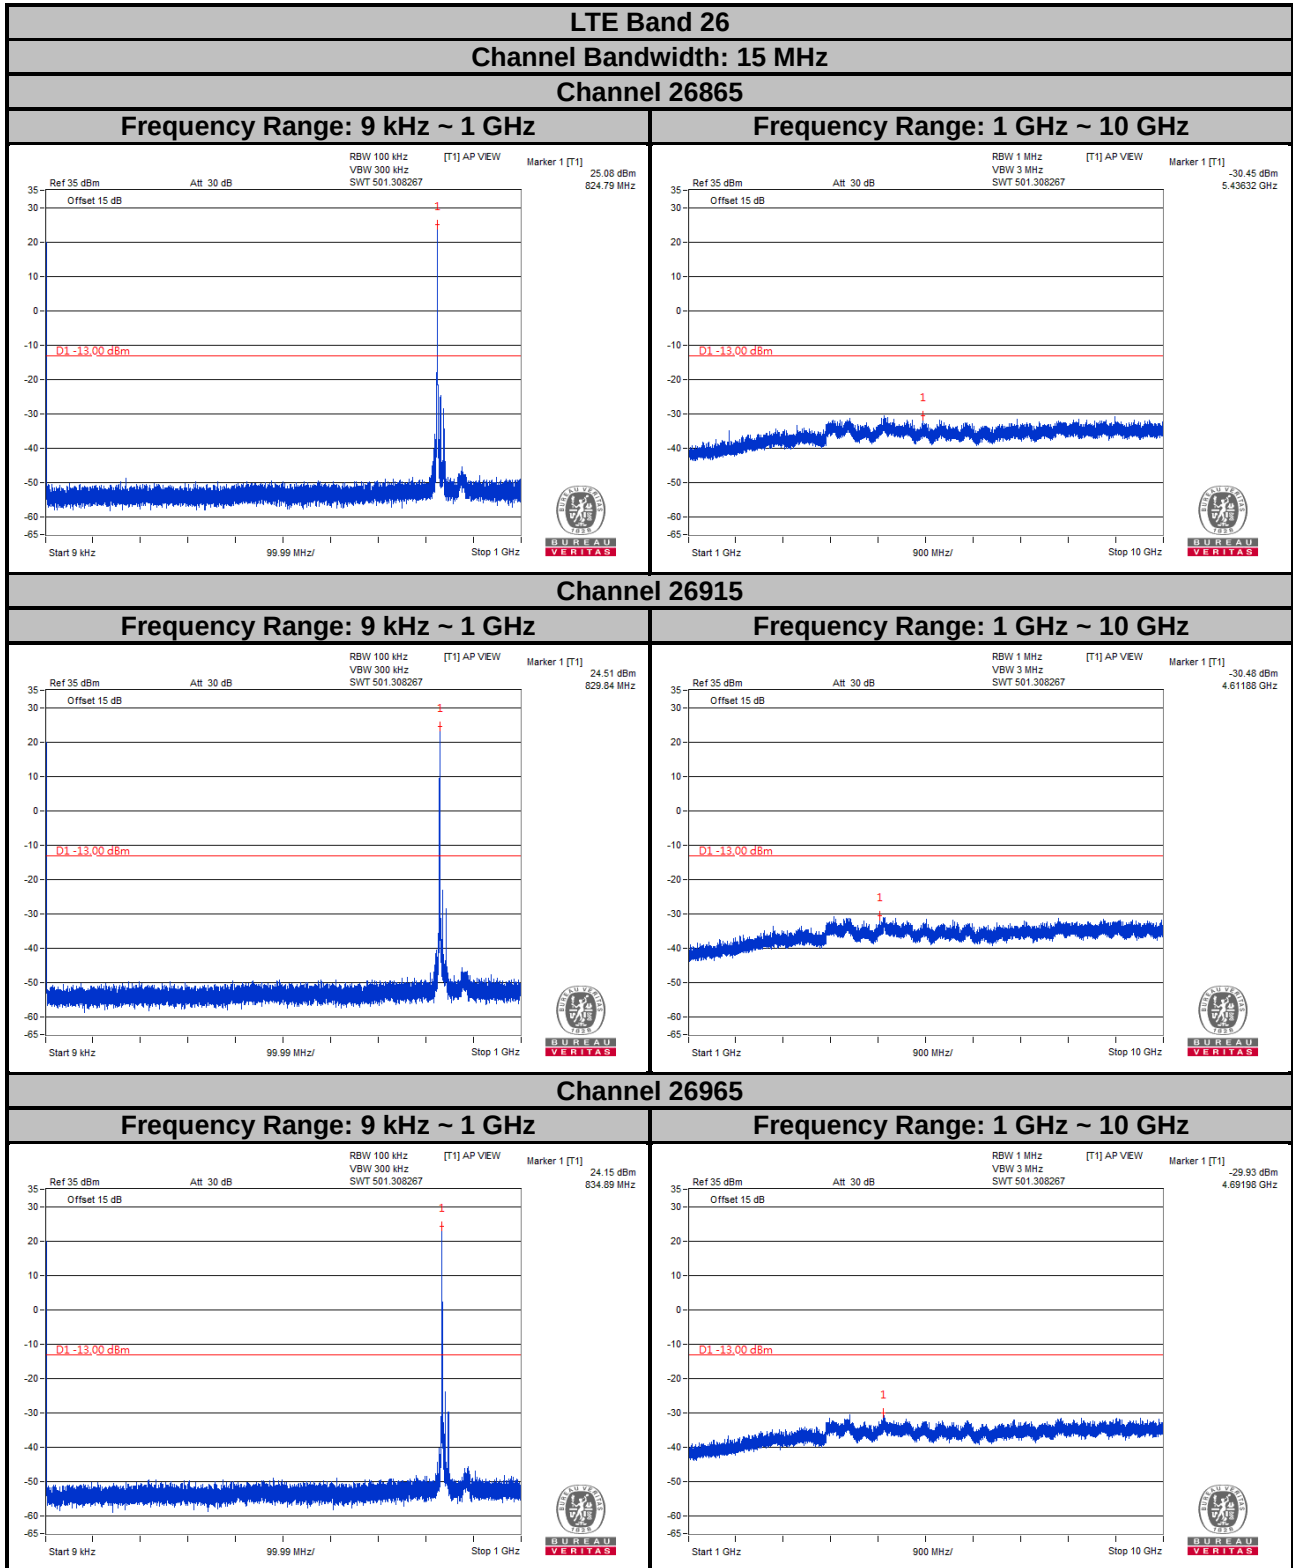

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

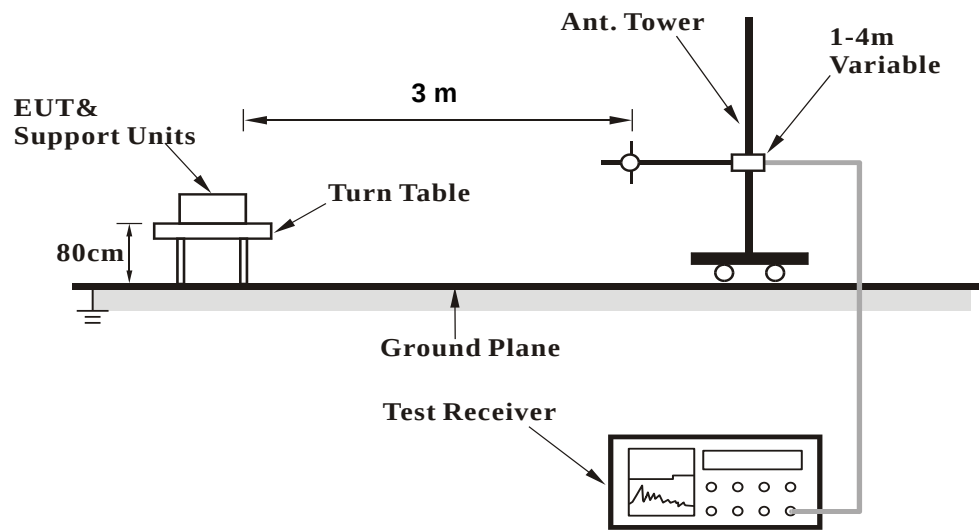

<Radiated Emission above 1 GHz>

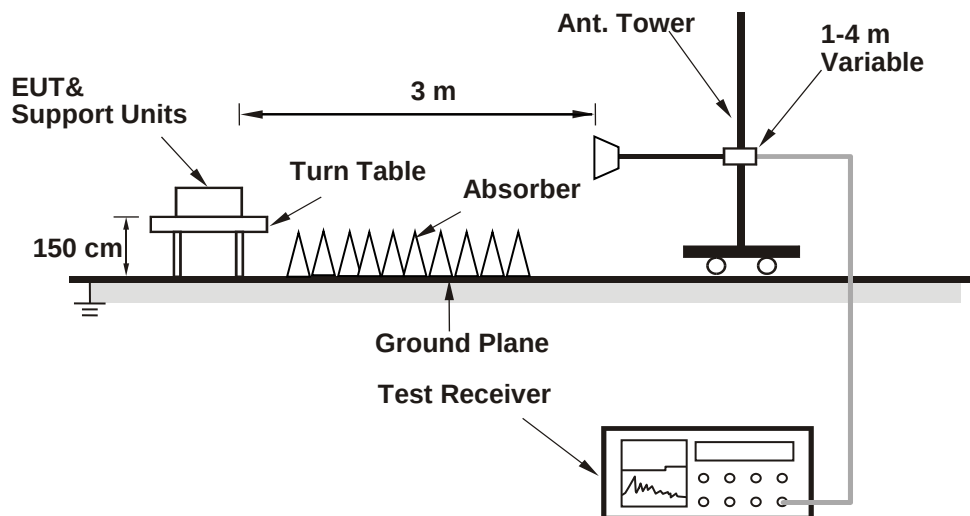

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 26

Channel Bandwidth: 1.4 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

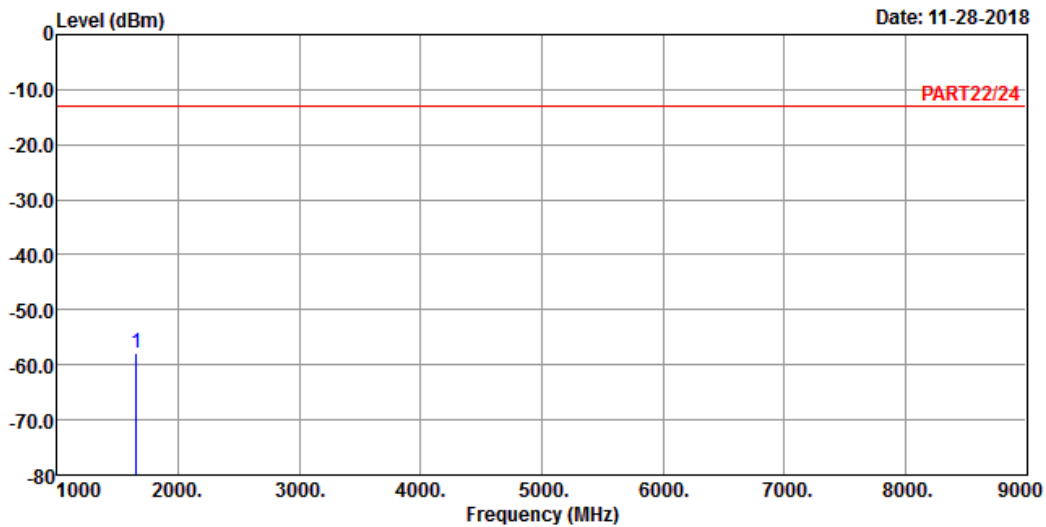

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1649.40 -57.78 -44.04 -13.00 -44.78 -13.74 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-28-2018

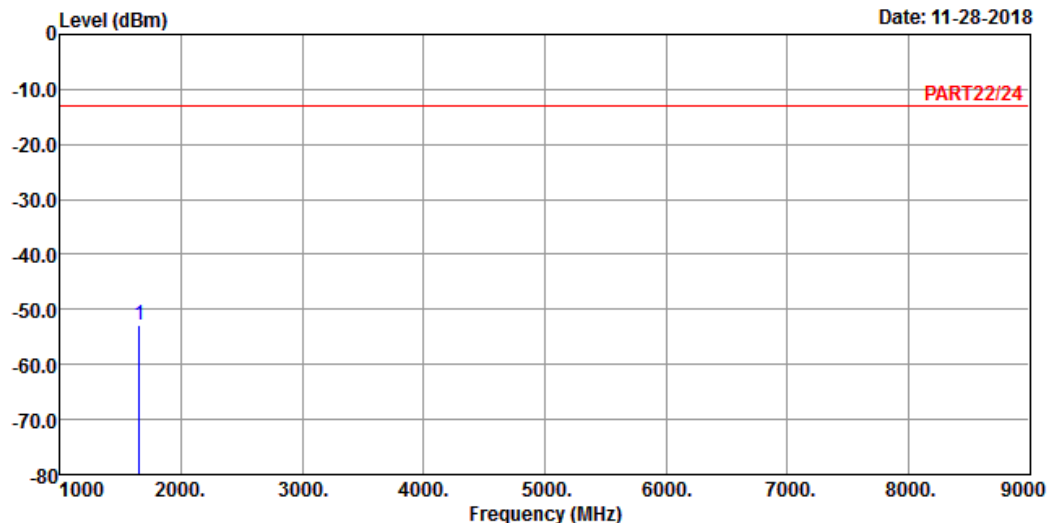

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1649.40 -52.89 -39.15 -13.00 -39.89 -13.74 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

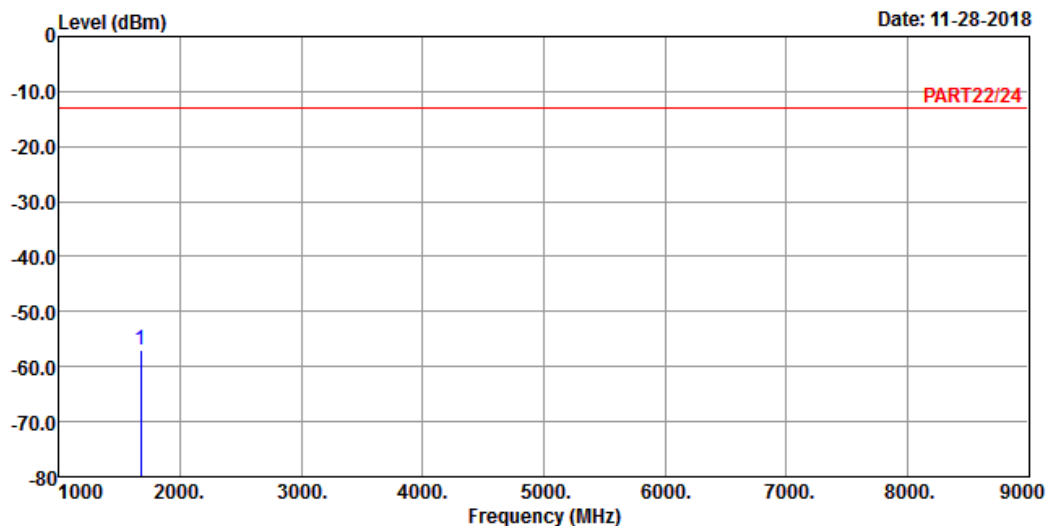

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_1.4M Link_M-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -56.89 -42.99 -13.00 -43.89 -13.90 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-28-2018

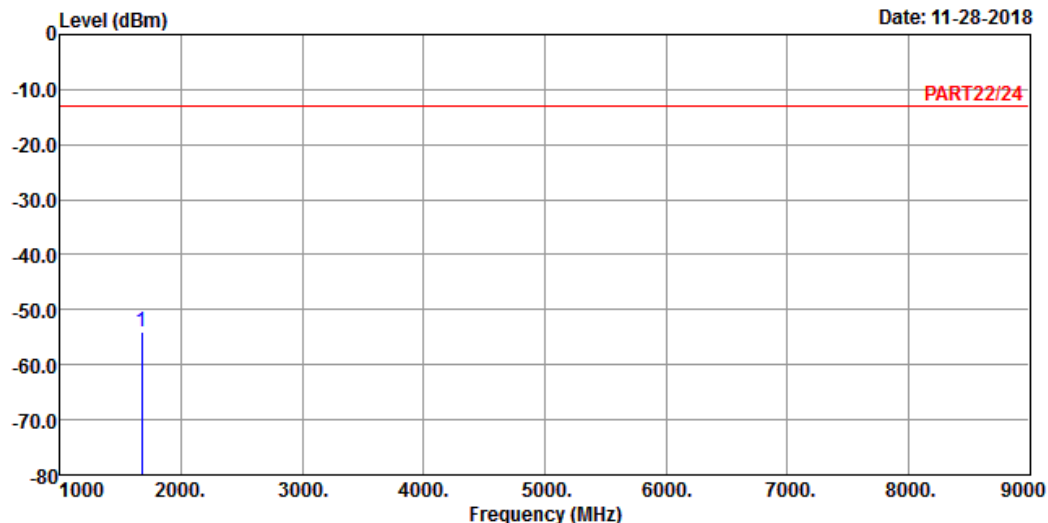

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_M-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -53.99 -40.09 -13.00 -40.99 -13.90 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 11-28-2018

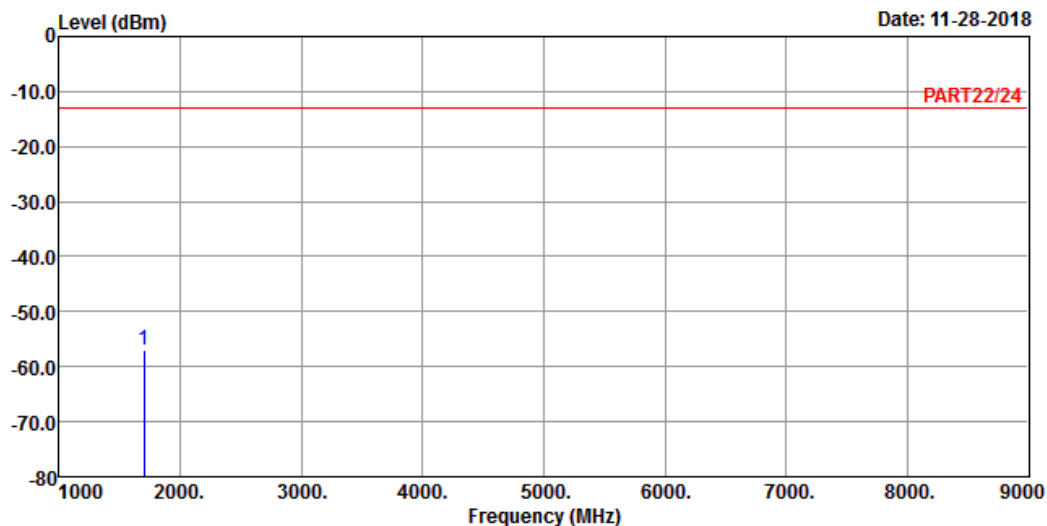

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_1.4M Link_H-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1696.60 -56.99 -42.97 -13.00 -43.99 -14.02 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-28-2018

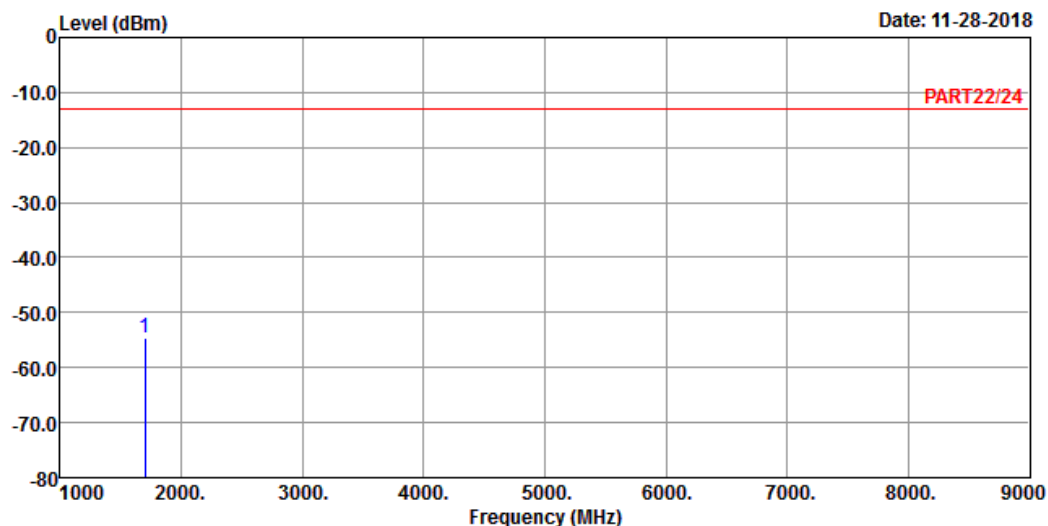

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_H-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1696.60 -54.75 -40.73 -13.00 -41.75 -14.02 Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

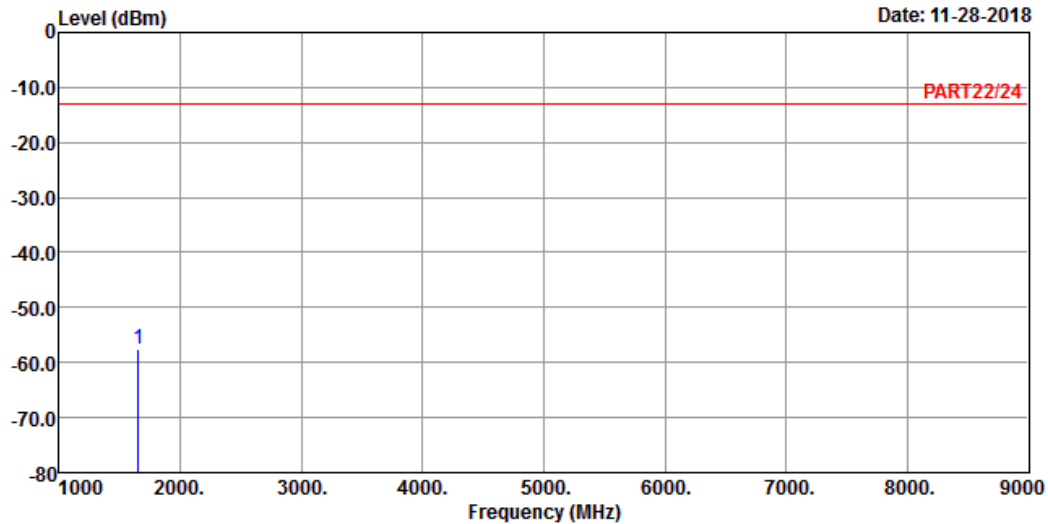

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_5M Link_L-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1653.00 -57.65 -43.88 -13.00 -44.65 -13.77 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-28-2018

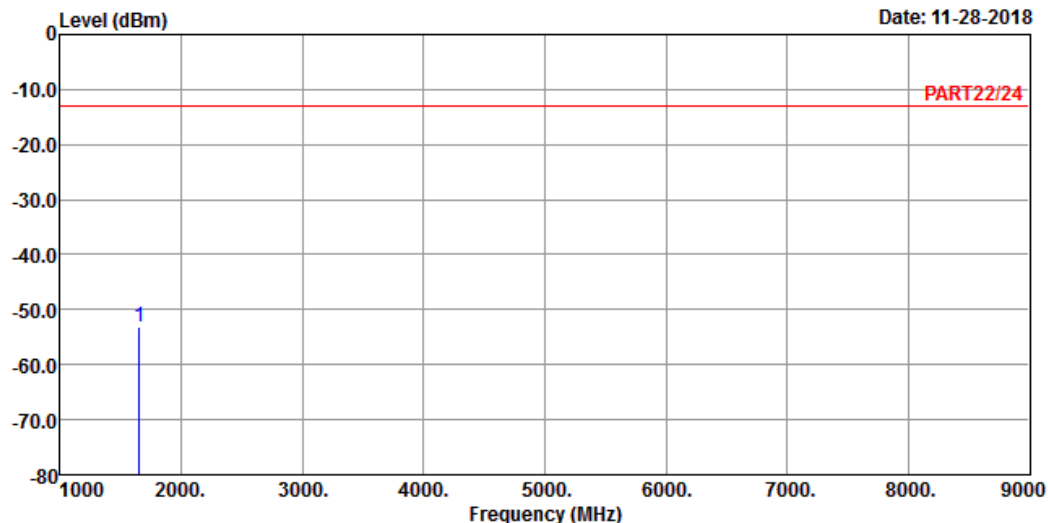

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_L-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1653.00 -53.21 -39.44 -13.00 -40.21 -13.77 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

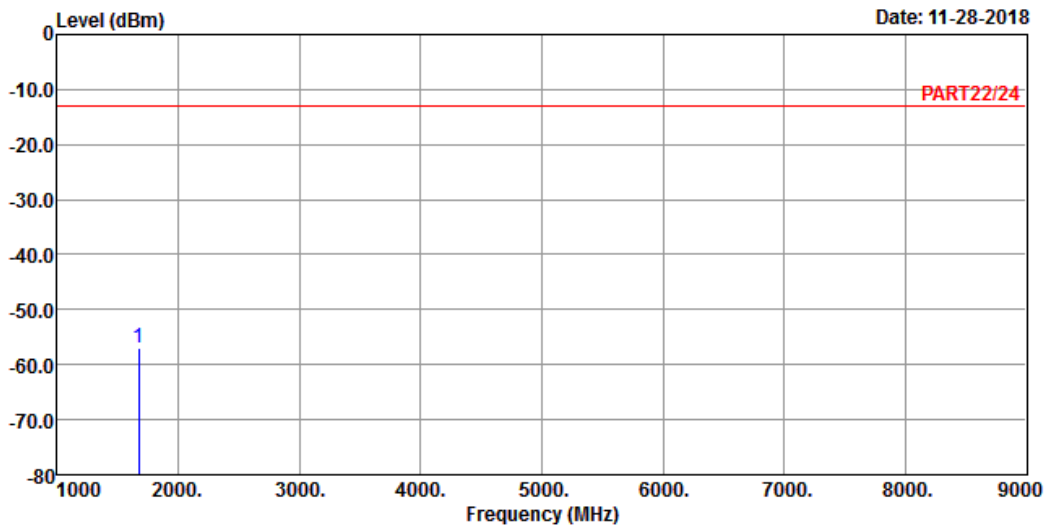

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_5M Link_M-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -56.85 -42.95 -13.00 -43.85 -13.90 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-28-2018

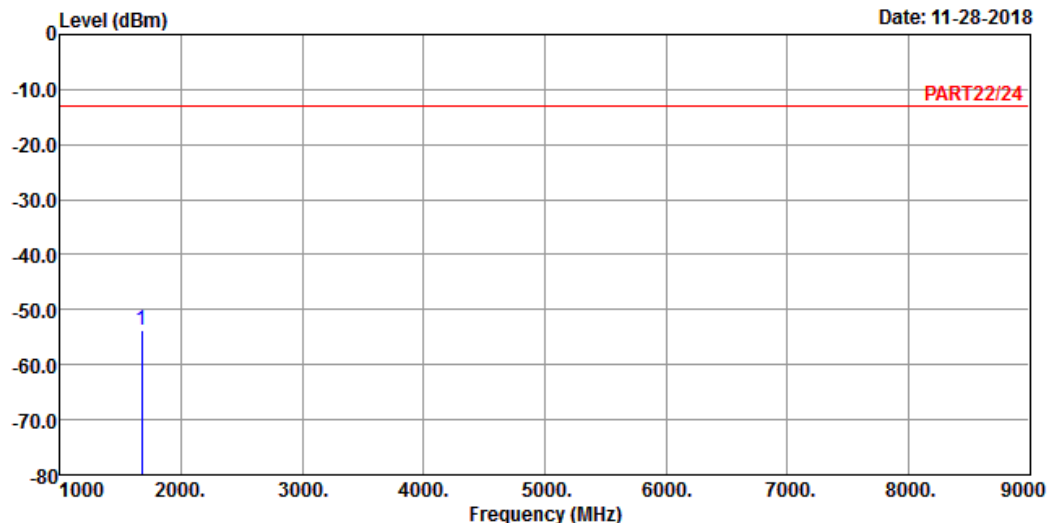

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_M-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -53.69 -39.79 -13.00 -40.69 -13.90 Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

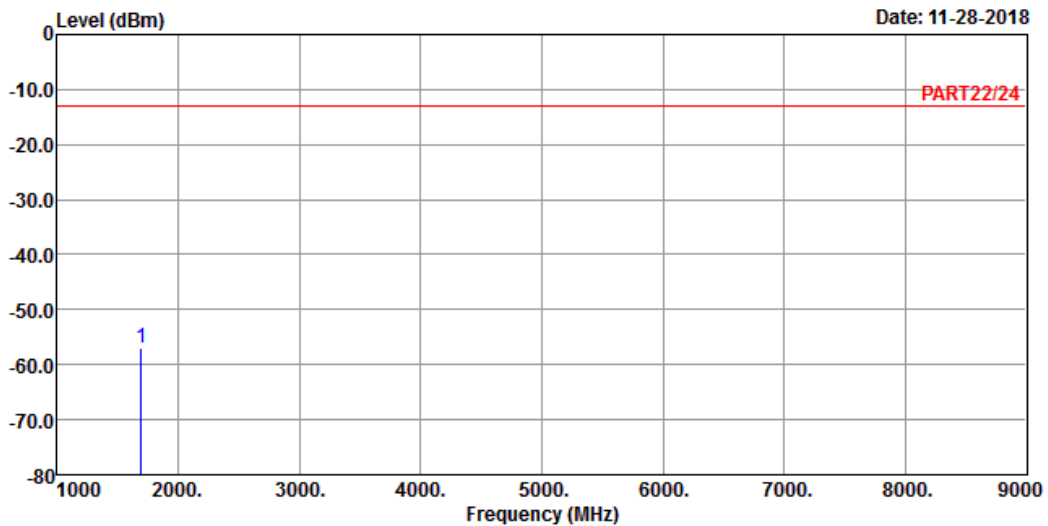

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 26 QPSK_5M Link_H-CH
 Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -56.85 -42.83 -13.00 -43.85 -14.02 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-28-2018

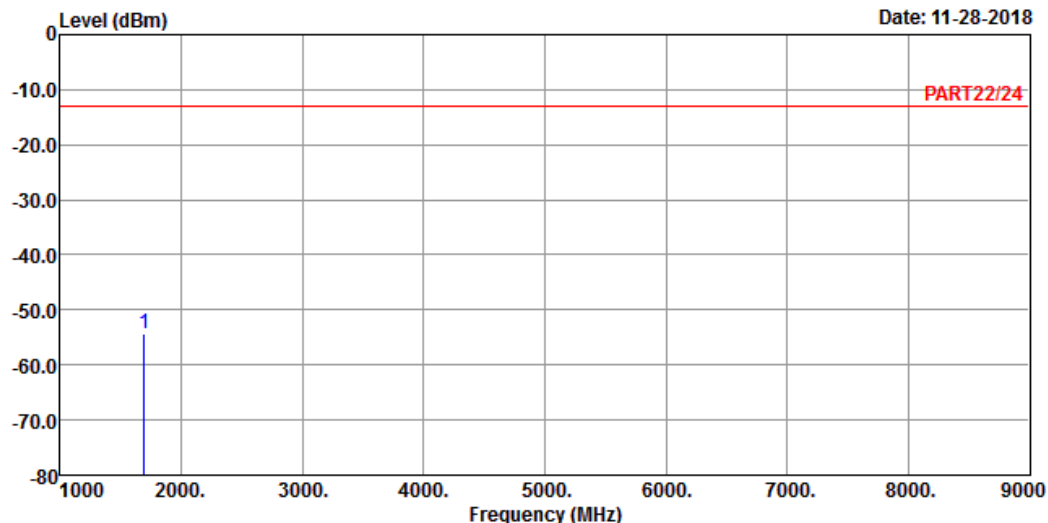

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_H-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -54.35 -40.33 -13.00 -41.35 -14.02 Peak


Channel Bandwidth: 15 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

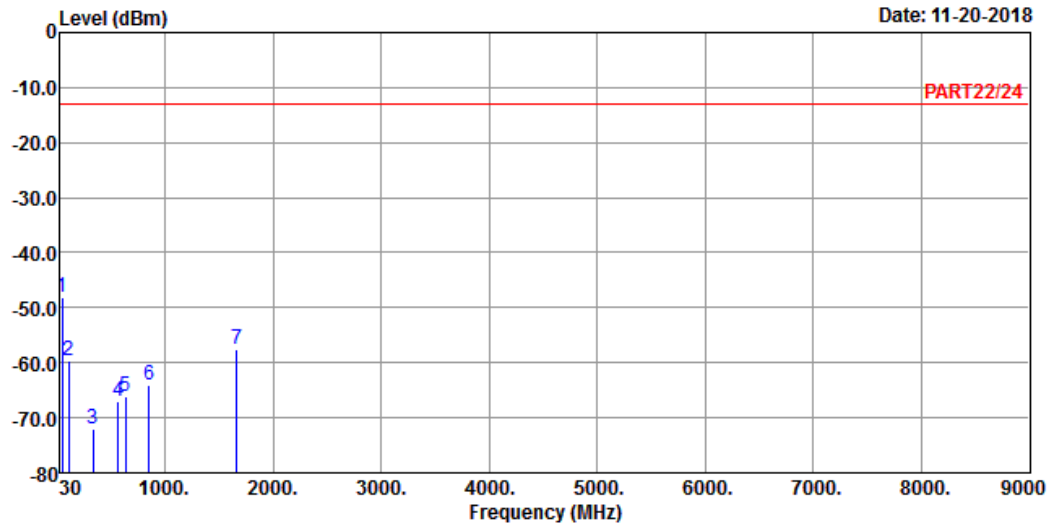

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_15M Link_L-CH
Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	45.52	-48.19	-45.69	-13.00	-35.19	-2.50	Peak
2	104.69	-59.56	-49.12	-13.00	-46.56	-10.44	Peak
3	336.52	-71.98	-65.53	-13.00	-58.98	-6.45	Peak
4	567.38	-66.87	-64.75	-13.00	-53.87	-2.12	Peak
5	631.40	-65.99	-65.15	-13.00	-52.99	-0.84	Peak
6	853.53	-64.00	-64.31	-13.00	-51.00	0.31	Peak
7	1663.00	-57.44	-43.61	-13.00	-44.44	-13.83	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

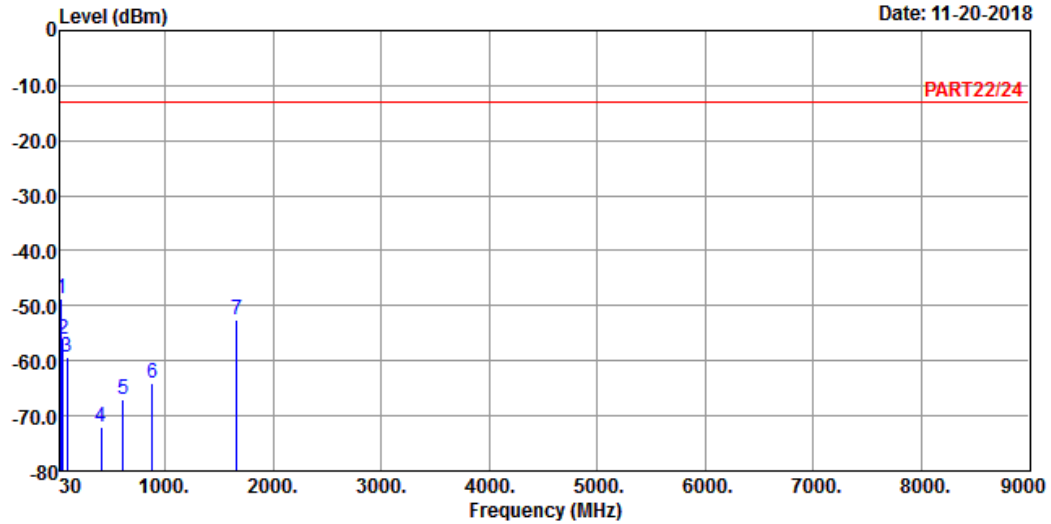

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-48.75	-47.81	-13.00	-35.75	-0.94	Peak
2	51.34	-55.98	-50.70	-13.00	-42.98	-5.28	Peak
3	94.99	-59.29	-48.45	-13.00	-46.29	-10.84	Peak
4	408.30	-72.04	-66.16	-13.00	-59.04	-5.88	Peak
5	611.03	-66.90	-66.12	-13.00	-53.90	-0.78	Peak
6	878.75	-63.94	-64.39	-13.00	-50.94	0.45	Peak
7	1663.00	-52.45	-38.62	-13.00	-39.45	-13.83	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

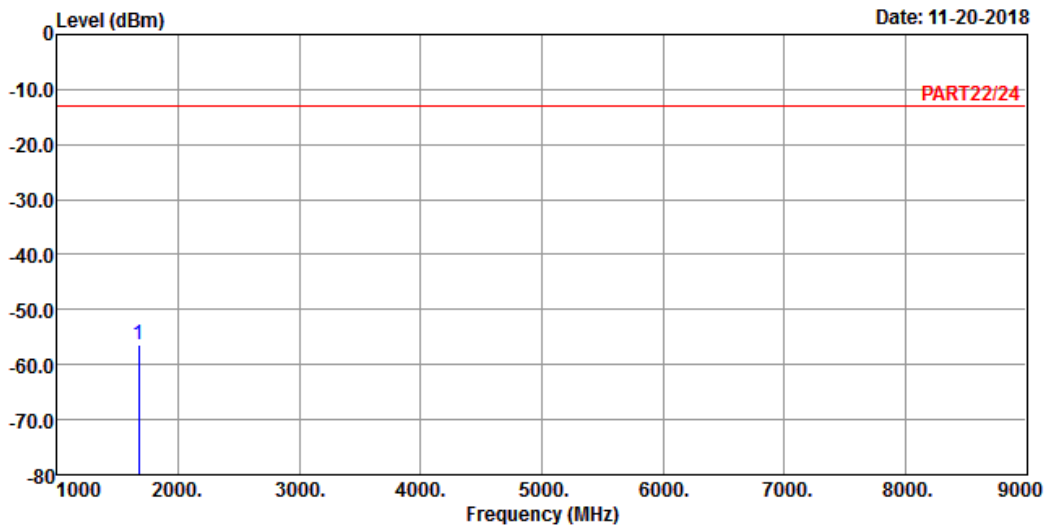

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 26 QPSK_15M Link_M-CH
 Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -56.35 -42.45 -13.00 -43.35 -13.90 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-20-2018

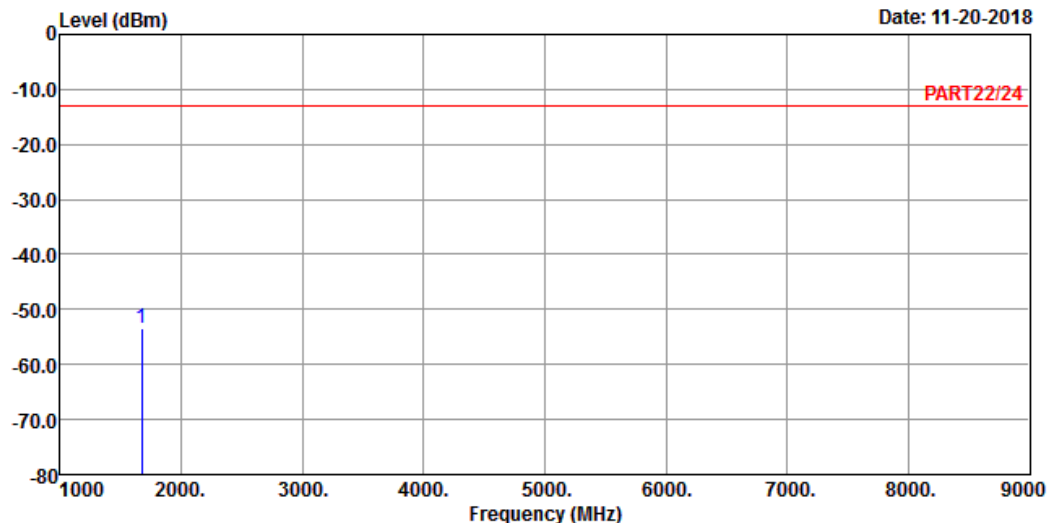

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_M-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -53.56 -39.66 -13.00 -40.56 -13.90 Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

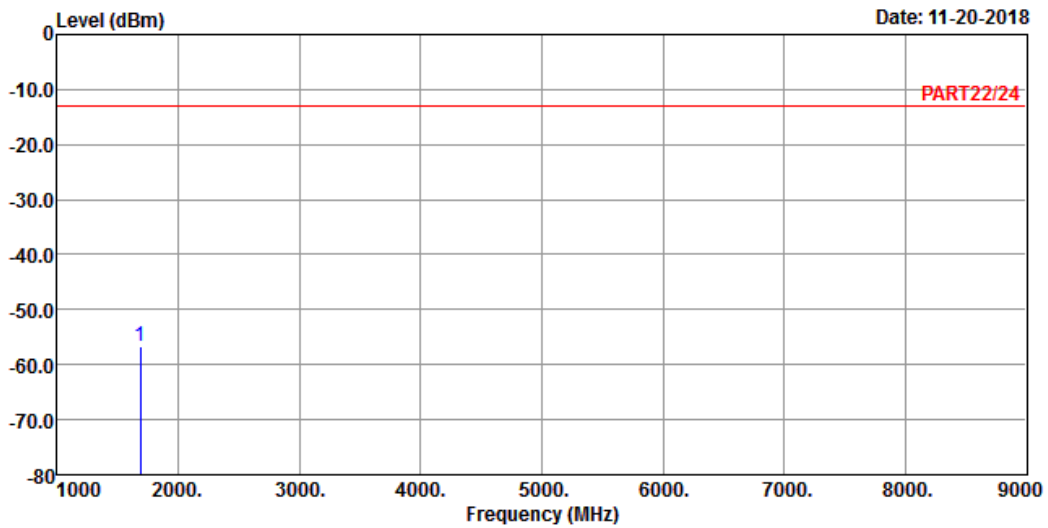

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_15M Link_H-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1683.00 -56.60 -42.64 -13.00 -43.60 -13.96 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 11-20-2018

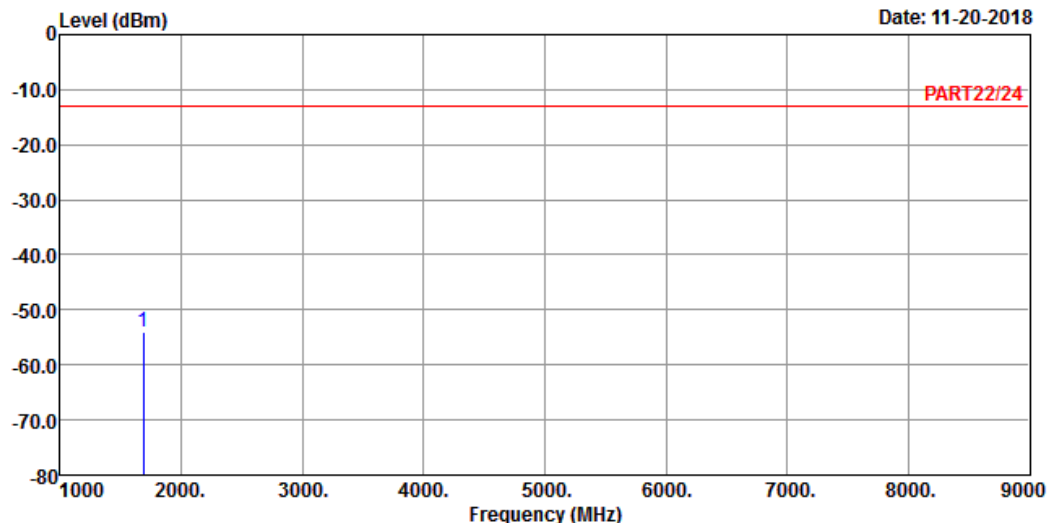

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_H-CH

Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1683.00 -54.01 -40.05 -13.00 -41.01 -13.96 Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---