#01_HAC_E_WLAN2.4GHz_802.11b 1Mbps_Ch1

Communication System: 802.11b; Frequency: 2412 MHz;Duty Cycle: 1:2.29087
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 34.04 V/m; Power Drift = -0.03 dB
Applied MIF = -2.02 dB
RF audio interference level = 29.26 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **23.96 dBV/m**	Grid 2 **M4** **25.85 dBV/m**	Grid 3 **M4** **25.9 dBV/m**
Grid 4 **M4** **26.86 dBV/m**	Grid 5 **M4** **27.43 dBV/m**	Grid 6 **M4** **27.43 dBV/m**
Grid 7 **M4** **29.13 dBV/m**	Grid 8 **M4** **29.26 dBV/m**	Grid 9 **M4** **29.05 dBV/m**

Cursor:
Total = 29.26 dBV/m
E Category: M4
Location: 0.5, 25, 7.7 mm

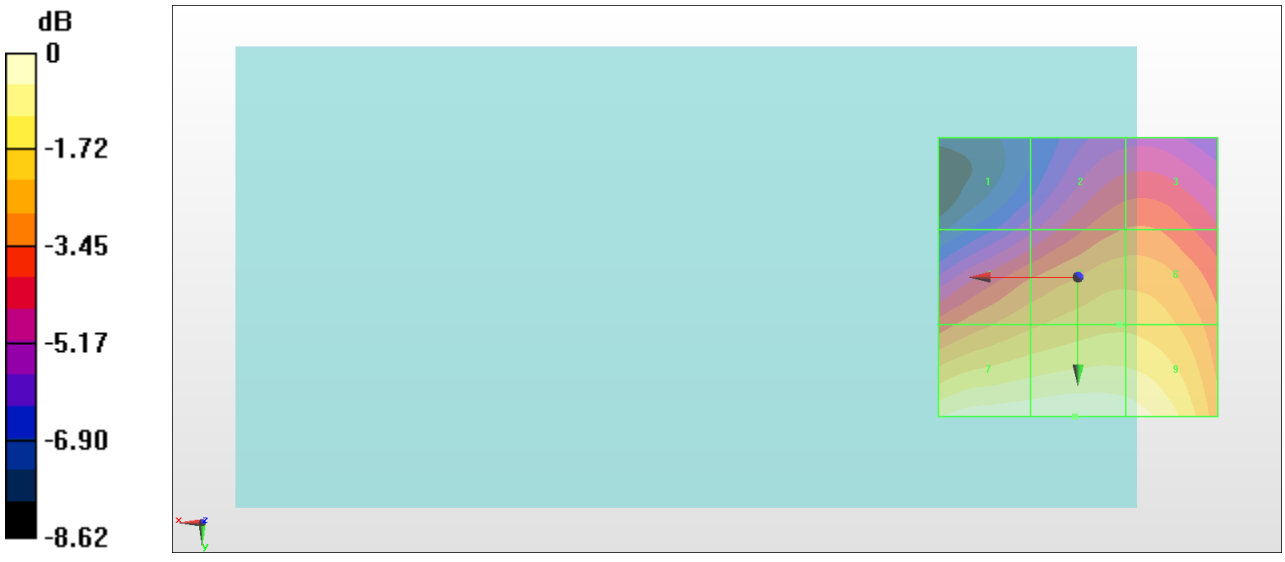

0 dB = 29.03 V/m = 29.26 dBV/m

#02_HAC_E_WLAN2.4GHz_802.11b 1Mbps_Ch6

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:2.29087
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 34.32 V/m; Power Drift = -0.02 dB
Applied MIF = -2.02 dB
RF audio interference level = 29.86 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **24.84 dBV/m**	Grid 2 **M4** **26.02 dBV/m**	Grid 3 **M4** **26.03 dBV/m**
Grid 4 **M4** **27.17 dBV/m**	Grid 5 **M4** **27.58 dBV/m**	Grid 6 **M4** **27.59 dBV/m**
Grid 7 **M4** **29.51 dBV/m**	Grid 8 **M4** **29.86 dBV/m**	Grid 9 **M4** **29.83 dBV/m**

Cursor:
Total = 29.86 dBV/m
E Category: M4
Location: -5, 25, 7.7 mm

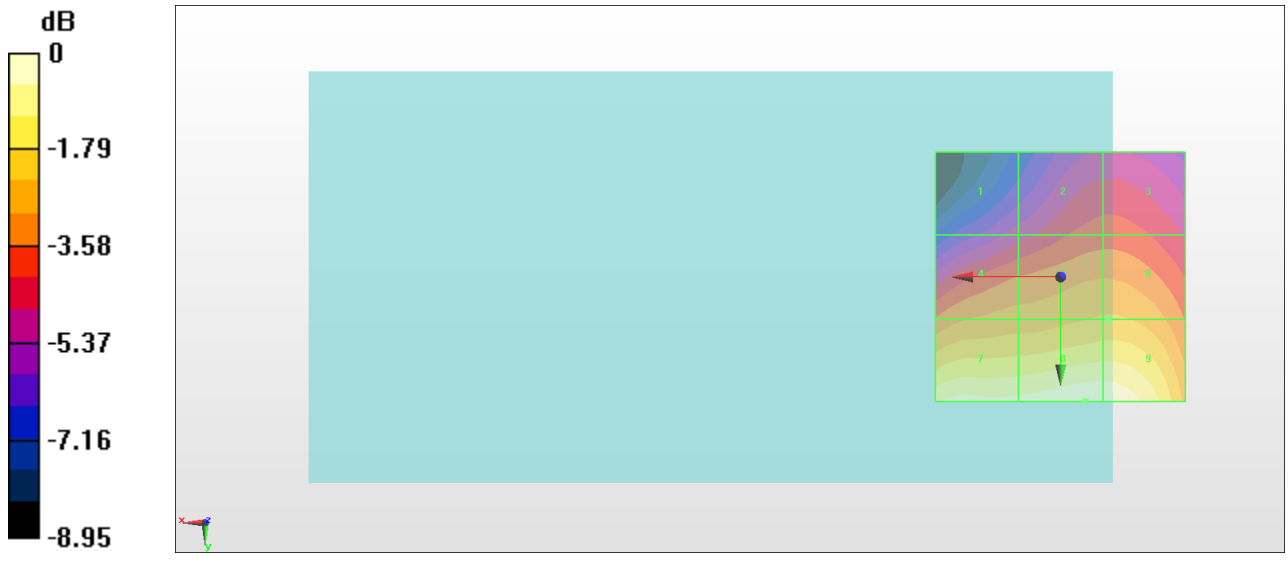

0 dB = 31.13 V/m = 29.86 dBV/m

#03_HAC_E_WLAN2.4GHz_802.11b 1Mbps_Ch11

Communication System:802.11b ; Frequency: 2462 MHz;Duty Cycle: 1:2.29087
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 30.88 V/m; Power Drift = 0.01 dB
Applied MIF = -2.02 dB
RF audio interference level = 29.07 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **23.78 dBV/m**	Grid 2 **M4** **24.83 dBV/m**	Grid 3 **M4** **24.84 dBV/m**
Grid 4 **M4** **26.1 dBV/m**	Grid 5 **M4** **26.82 dBV/m**	Grid 6 **M4** **26.85 dBV/m**
Grid 7 **M4** **28.34 dBV/m**	Grid 8 **M4** **29.07 dBV/m**	Grid 9 **M4** **29.05 dBV/m**

Cursor:
Total = 29.07 dBV/m
E Category: M4
Location: -6.5, 25, 7.7 mm

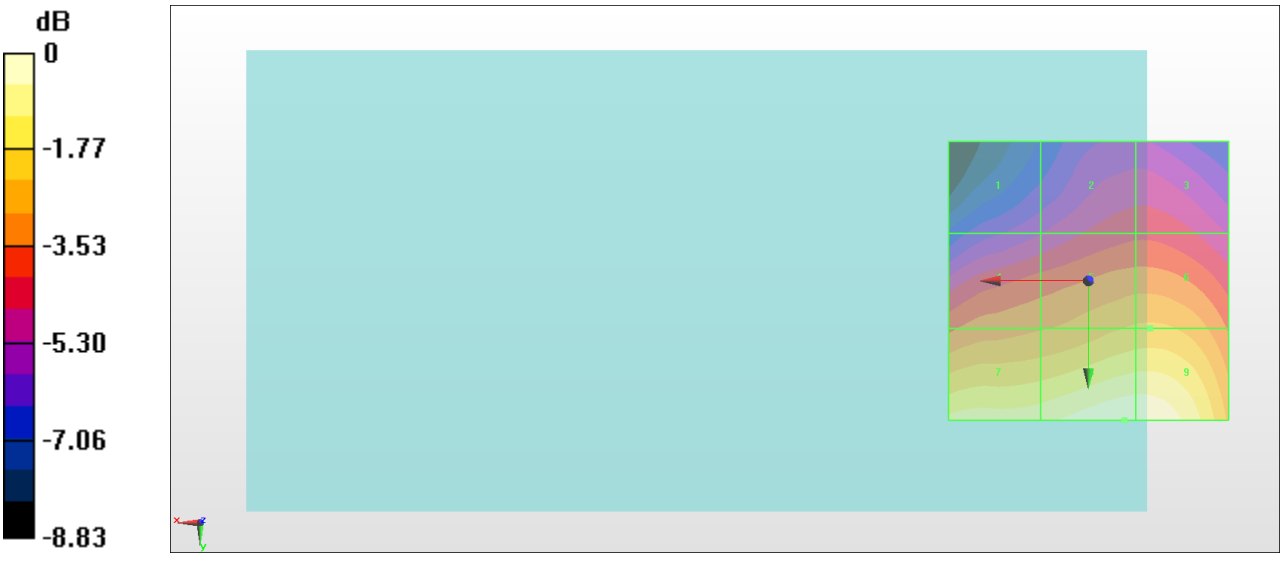

0 dB = 28.42 V/m = 29.07 dBV/m

#04_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch36

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.00 V/m; Power Drift = -0.07 dB
Applied MIF = -3.15 dB
RF audio interference level = 22.18 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **20.11 dBV/m**	Grid 2 **M4** **20.7 dBV/m**	Grid 3 **M4** **20.98 dBV/m**
Grid 4 **M4** **20.34 dBV/m**	Grid 5 **M4** **20.08 dBV/m**	Grid 6 **M4** **21.05 dBV/m**
Grid 7 **M4** **22.18 dBV/m**	Grid 8 **M4** **21.02 dBV/m**	Grid 9 **M4** **22.04 dBV/m**

Cursor:
Total = 22.18 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

0 dB = 12.86 V/m = 22.18 dBV/m

#05_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch44

Communication System: 802.11a; Frequency: 5220 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.35 V/m; Power Drift = 0.07 dB
Applied MIF = -3.15 dB
RF audio interference level = 21.96 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **18.91 dBV/m**	Grid 2 **M4** **20.24 dBV/m**	Grid 3 **M4** **21.26 dBV/m**
Grid 4 **M4** **18.69 dBV/m**	Grid 5 **M4** **20.02 dBV/m**	Grid 6 **M4** **21.43 dBV/m**
Grid 7 **M4** **21.96 dBV/m**	Grid 8 **M4** **20.38 dBV/m**	Grid 9 **M4** **21.54 dBV/m**

Cursor:
Total = 21.96 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

0 dB = 12.53 V/m = 21.96 dBV/m

#06_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch48

Communication System: 802.11a; Frequency: 5240 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.38 V/m; Power Drift = 0.04 dB
Applied MIF = -3.15 dB
RF audio interference level = 21.98 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **19.02 dBV/m**	Grid 2 **M4** **20.5 dBV/m**	Grid 3 **M4** **21.42 dBV/m**
Grid 4 **M4** **18.85 dBV/m**	Grid 5 **M4** **20.34 dBV/m**	Grid 6 **M4** **21.58 dBV/m**
Grid 7 **M4** **21.98 dBV/m**	Grid 8 **M4** **20.69 dBV/m**	Grid 9 **M4** **21.75 dBV/m**

Cursor:
Total = 21.98 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

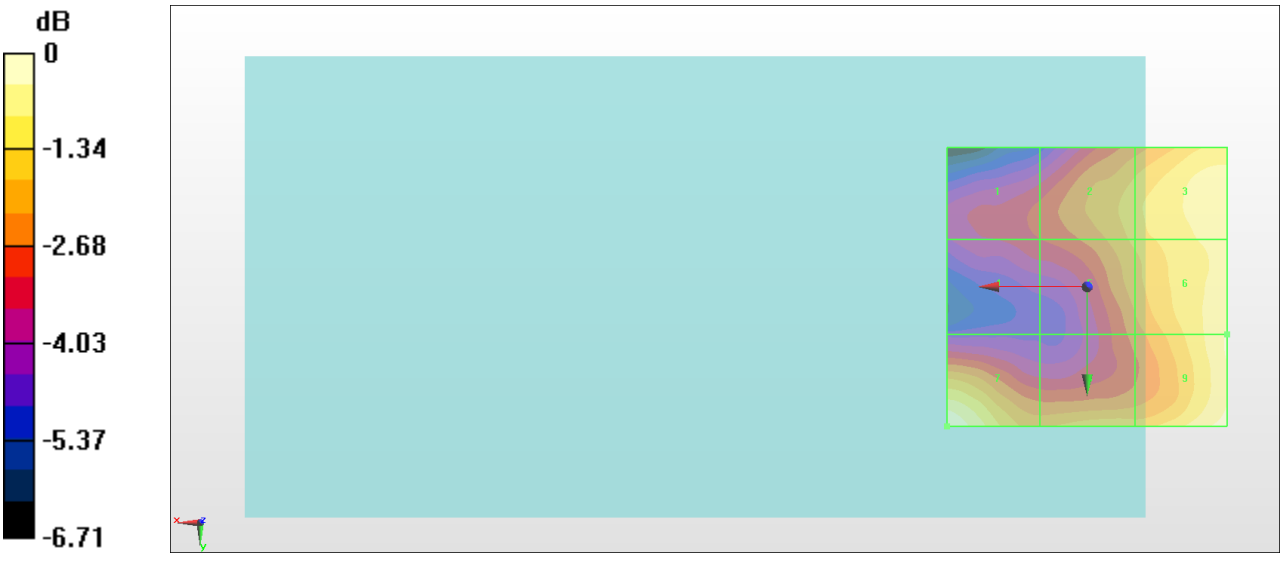

0 dB = 12.56 V/m = 21.98 dBV/m

#07_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch52

Communication System: 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.42 V/m; Power Drift = -0.05 dB
Applied MIF = -3.15 dB
RF audio interference level = 21.91 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **18.19 dBV/m**	Grid 2 **M4** **20.54 dBV/m**	Grid 3 **M4** **21.3 dBV/m**
Grid 4 **M4** **18.63 dBV/m**	Grid 5 **M4** **19.47 dBV/m**	Grid 6 **M4** **20.77 dBV/m**
Grid 7 **M4** **21.91 dBV/m**	Grid 8 **M4** **20.58 dBV/m**	Grid 9 **M4** **20.78 dBV/m**

Cursor:
Total = 21.91 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

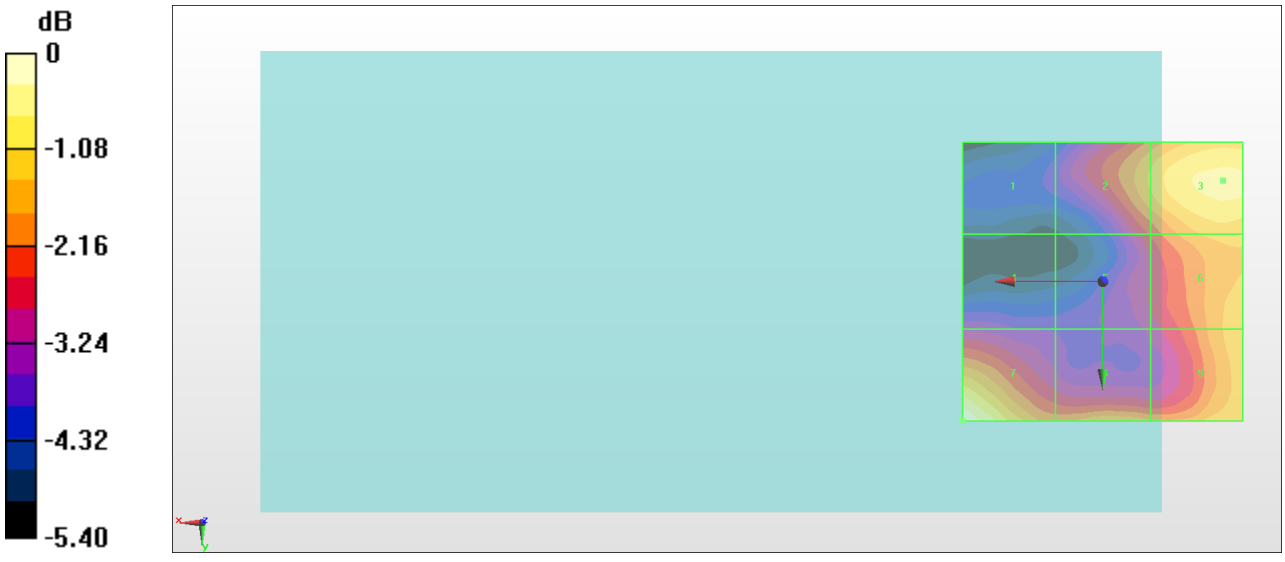

0 dB = 12.46 V/m = 21.91 dBV/m

#08_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch56

Communication System: 802.11a; Frequency: 5280 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.28 V/m; Power Drift = 0.04 dB
Applied MIF = -3.15 dB
RF audio interference level = 21.92 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **18.21 dBV/m**	Grid 2 **M4** **20.64 dBV/m**	Grid 3 **M4** **21.27 dBV/m**
Grid 4 **M4** **18.7 dBV/m**	Grid 5 **M4** **19.58 dBV/m**	Grid 6 **M4** **20.84 dBV/m**
Grid 7 **M4** **21.92 dBV/m**	Grid 8 **M4** **20.71 dBV/m**	Grid 9 **M4** **20.85 dBV/m**

Cursor:
Total = 21.92 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

0 dB = 12.48 V/m = 21.92 dBV/m

#09_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch64

Communication System: 802.11a; Frequency: 5320 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.40 V/m; Power Drift = -0.02 dB
Applied MIF = -3.15 dB
RF audio interference level = 21.95 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **18 dBV/m**	Grid 2 **M4** **20.65 dBV/m**	Grid 3 **M4** **21.31 dBV/m**
Grid 4 **M4** **18.64 dBV/m**	Grid 5 **M4** **19.56 dBV/m**	Grid 6 **M4** **20.83 dBV/m**
Grid 7 **M4** **21.95 dBV/m**	Grid 8 **M4** **20.58 dBV/m**	Grid 9 **M4** **20.83 dBV/m**

Cursor:
Total = 21.95 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

0 dB = 12.52 V/m = 21.95 dBV/m

#10_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch100

Communication System: 802.11a; Frequency: 5500 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 13.19 V/m; Power Drift = 0.01 dB
Applied MIF = -3.15 dB
RF audio interference level = 20.76 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **17.44 dBV/m**	Grid 2 **M4** **18.4 dBV/m**	Grid 3 **M4** **19.37 dBV/m**
Grid 4 **M4** **19.13 dBV/m**	Grid 5 **M4** **17.94 dBV/m**	Grid 6 **M4** **18.02 dBV/m**
Grid 7 **M4** **20.69 dBV/m**	Grid 8 **M4** **20.76 dBV/m**	Grid 9 **M4** **19.98 dBV/m**

Cursor:
Total = 20.76 dBV/m
E Category: M4
Location: -1.5, 25, 7.7 mm

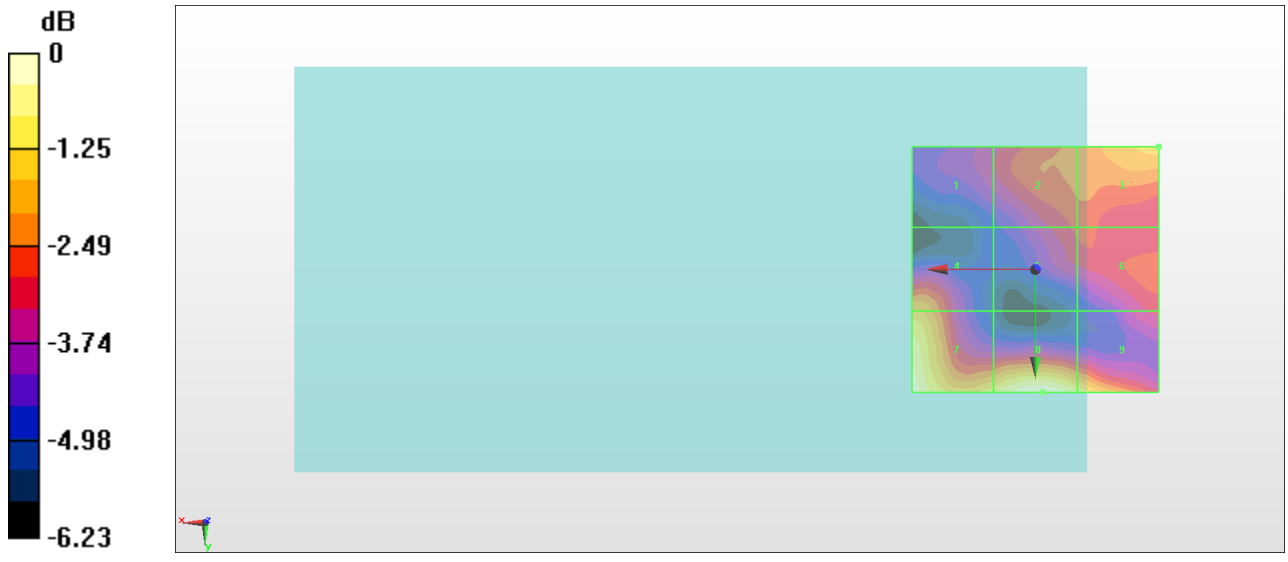

0 dB = 10.92 V/m = 20.76 dBV/m

#11_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch116

Communication System: 802.11a; Frequency: 5580 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 9.981 V/m; Power Drift = -0.12 dB
Applied MIF = -3.15 dB
RF audio interference level = 20.72 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **18.01 dBV/m**	Grid 2 **M4** **18.47 dBV/m**	Grid 3 **M4** **18.33 dBV/m**
Grid 4 **M4** **19.73 dBV/m**	Grid 5 **M4** **16.85 dBV/m**	Grid 6 **M4** **18.49 dBV/m**
Grid 7 **M4** **20.66 dBV/m**	Grid 8 **M4** **20.72 dBV/m**	Grid 9 **M4** **18.98 dBV/m**

Cursor:
Total = 20.72 dBV/m
E Category: M4
Location: 2.5, 25, 7.7 mm

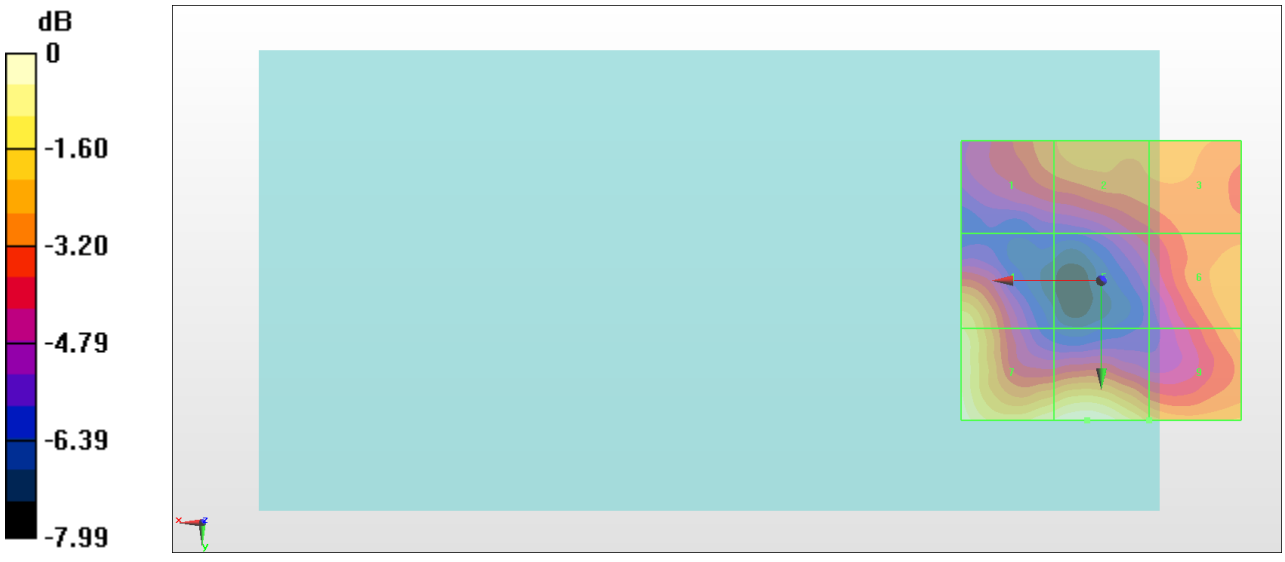

0 dB = 10.86 V/m = 20.72 dBV/m

#12_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch140

Communication System: 802.11a; Frequency: 5700 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 8.473 V/m; Power Drift = 0.14 dB
Applied MIF = -3.15 dB
RF audio interference level = 18.68 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **15.09 dBV/m**	Grid 2 **M4** **17.12 dBV/m**	Grid 3 **M4** **18.34 dBV/m**
Grid 4 **M4** **16.54 dBV/m**	Grid 5 **M4** **15.13 dBV/m**	Grid 6 **M4** **18.06 dBV/m**
Grid 7 **M4** **18.48 dBV/m**	Grid 8 **M4** **18.68 dBV/m**	Grid 9 **M4** **18.38 dBV/m**

Cursor:
Total = 18.68 dBV/m
E Category: M4
Location: 0, 25, 7.7 mm

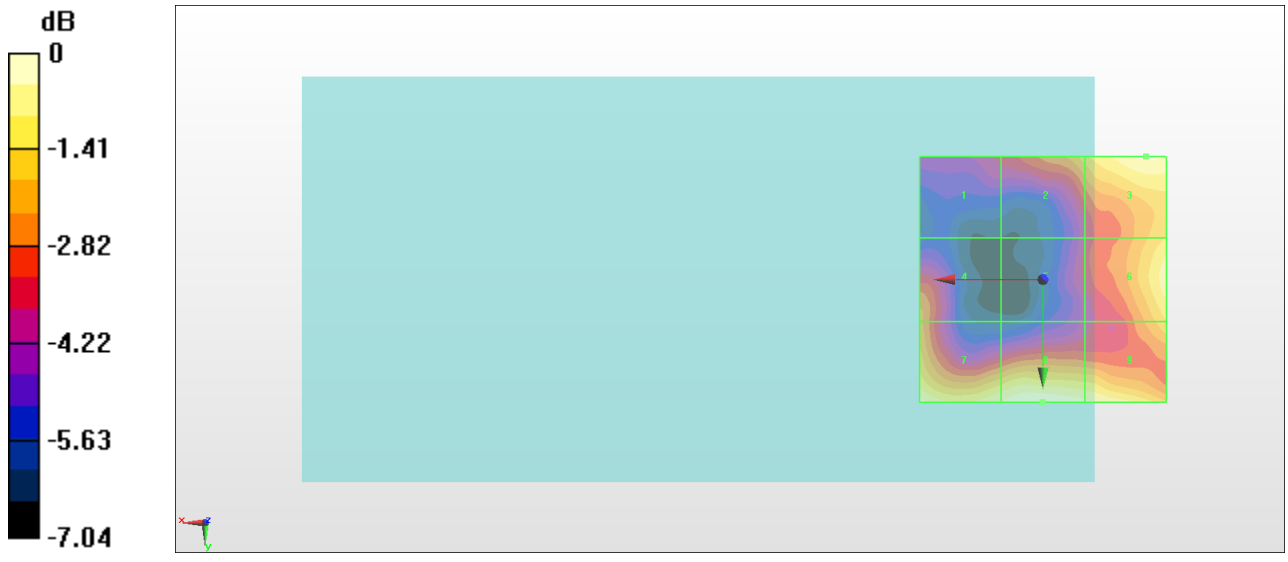

0 dB = 8.588 V/m = 18.68 dBV/m

#13_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch149

Communication System: 802.11a; Frequency: 5745 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 9.300 V/m; Power Drift = -0.08 dB
Applied MIF = -3.15 dB
RF audio interference level = 18.76 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **15.57 dBV/m**	Grid 2 **M4** **16.2 dBV/m**	Grid 3 **M4** **17.47 dBV/m**
Grid 4 **M4** **16.23 dBV/m**	Grid 5 **M4** **15.83 dBV/m**	Grid 6 **M4** **17.3 dBV/m**
Grid 7 **M4** **18.76 dBV/m**	Grid 8 **M4** **18.61 dBV/m**	Grid 9 **M4** **17.75 dBV/m**

Cursor:
Total = 18.76 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

0 dB = 8.669 V/m = 18.76 dBV/m

#14_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch157

Communication System: 802.11a; Frequency: 5785 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 9.271 V/m; Power Drift = 0.01 dB
Applied MIF = -3.15 dB
RF audio interference level = 18.82 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **15.92 dBV/m**	Grid 2 **M4** **15.94 dBV/m**	Grid 3 **M4** **17.52 dBV/m**
Grid 4 **M4** **16.41 dBV/m**	Grid 5 **M4** **15.57 dBV/m**	Grid 6 **M4** **17.4 dBV/m**
Grid 7 **M4** **18.82 dBV/m**	Grid 8 **M4** **18.65 dBV/m**	Grid 9 **M4** **17.75 dBV/m**

Cursor:
Total = 18.82 dBV/m
E Category: M4
Location: 25, 25, 7.7 mm

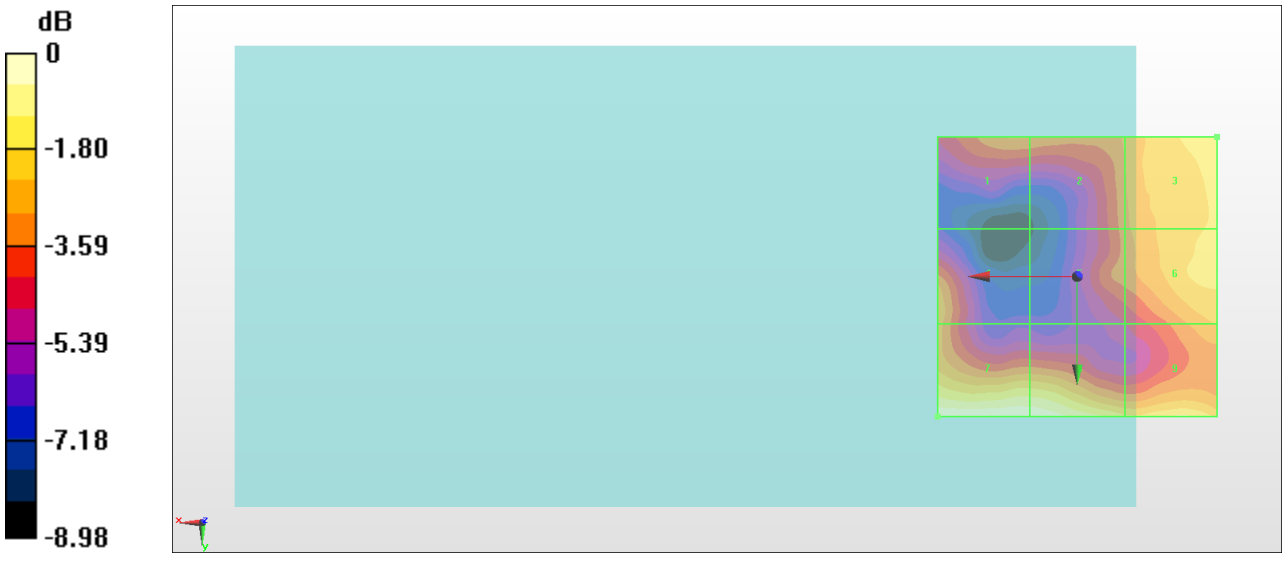

0 dB = 8.728 V/m = 18.82 dBV/m

#15_HAC_E_WLAN5GHz_802.11a 6Mbps_Ch165

Communication System: 802.11a; Frequency: 5825 MHz;Duty Cycle: 1:11.3763
Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 0$ kg/m^3
Ambient Temperature：23.4 ℃

DASY5 Configuration
- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1); Calibrated: 2018/1/8;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 9.725 V/m; Power Drift = 0.04 dB
Applied MIF = -3.15 dB
RF audio interference level = 18.70 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **14.02 dBV/m**	Grid 2 **M4** **16.18 dBV/m**	Grid 3 **M4** **16.95 dBV/m**
Grid 4 **M4** **14.43 dBV/m**	Grid 5 **M4** **16.13 dBV/m**	Grid 6 **M4** **17.44 dBV/m**
Grid 7 **M4** **18.7 dBV/m**	Grid 8 **M4** **18.48 dBV/m**	Grid 9 **M4** **17.93 dBV/m**

Cursor:
Total = 18.70 dBV/m
E Category: M4
Location: 18, 25, 7.7 mm

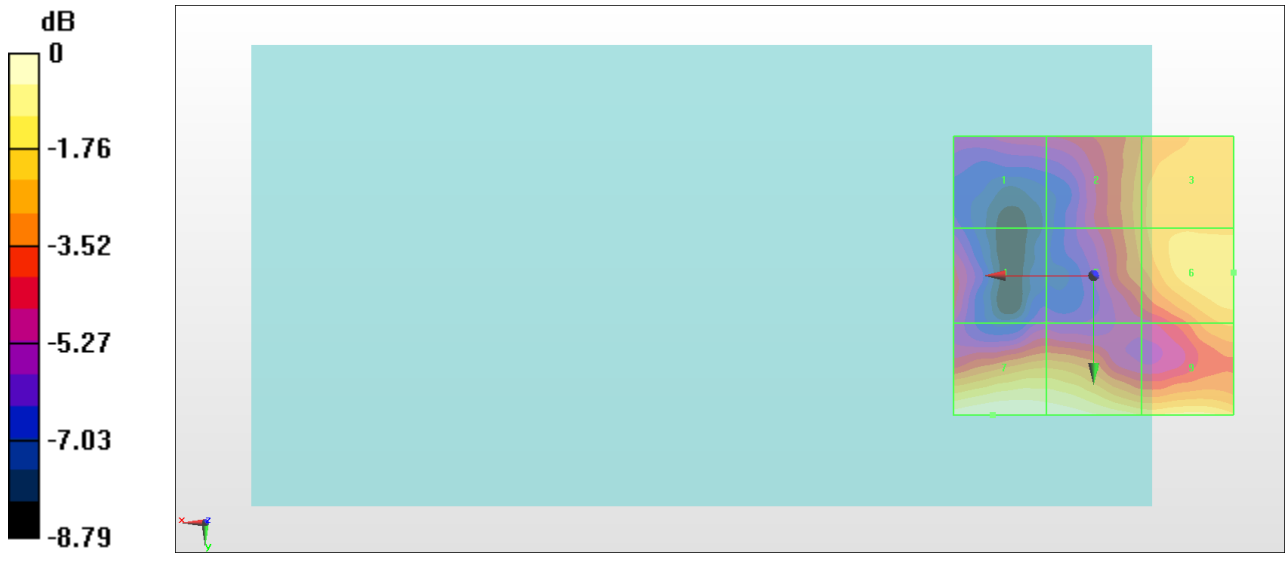

0 dB = 8.614 V/m = 18.70 dBV/m