

Test Plot 53#: 5.2G WiFi Mid Head Left Cheek Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 36.947$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5200; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (12x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.356 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.771 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

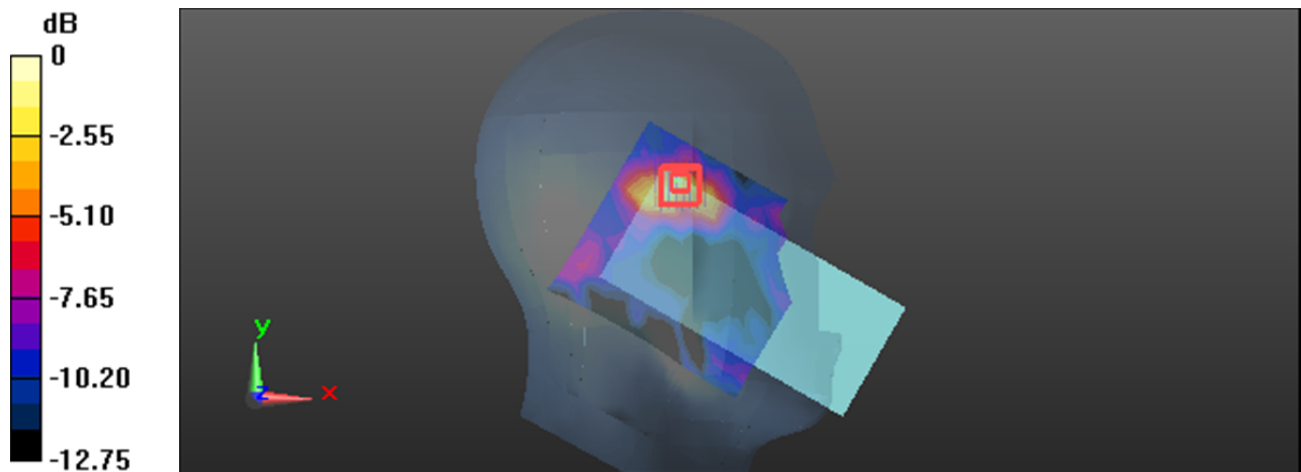

0 dB = 0.403 W/kg = -3.95 dBW/kg

Test Plot 54#: 5.2G WiFi Mid Body Right Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 36.947$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5200; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.158 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.223 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 0.468 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

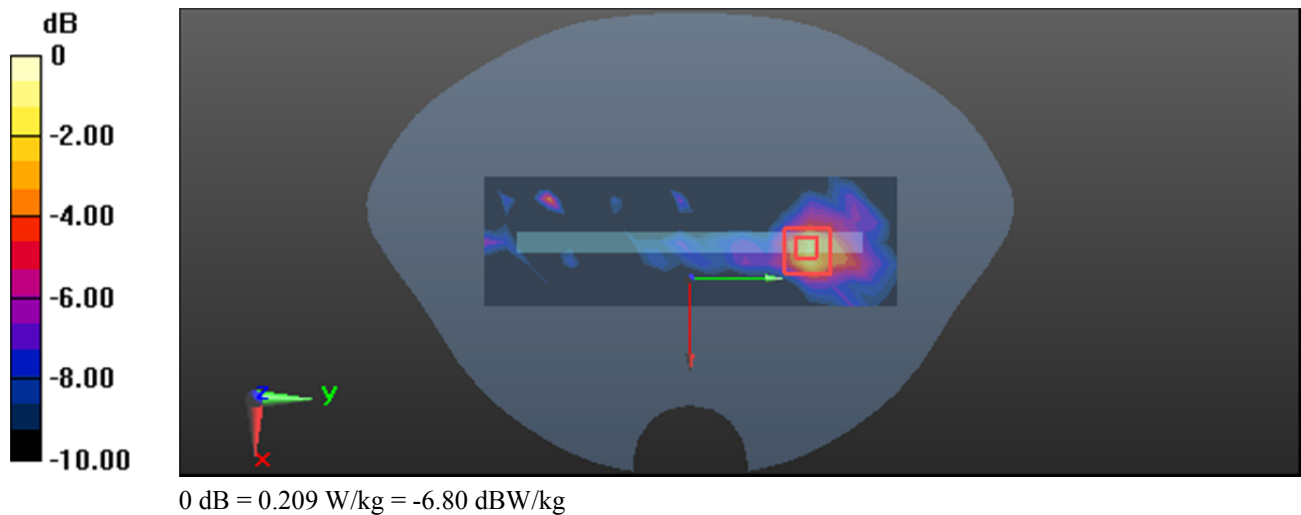

Test Plot 55#: 5.2G WiFi Mid Head Left Cheek Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 36.947$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5200; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (12x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.311 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.813 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.212 W/kg

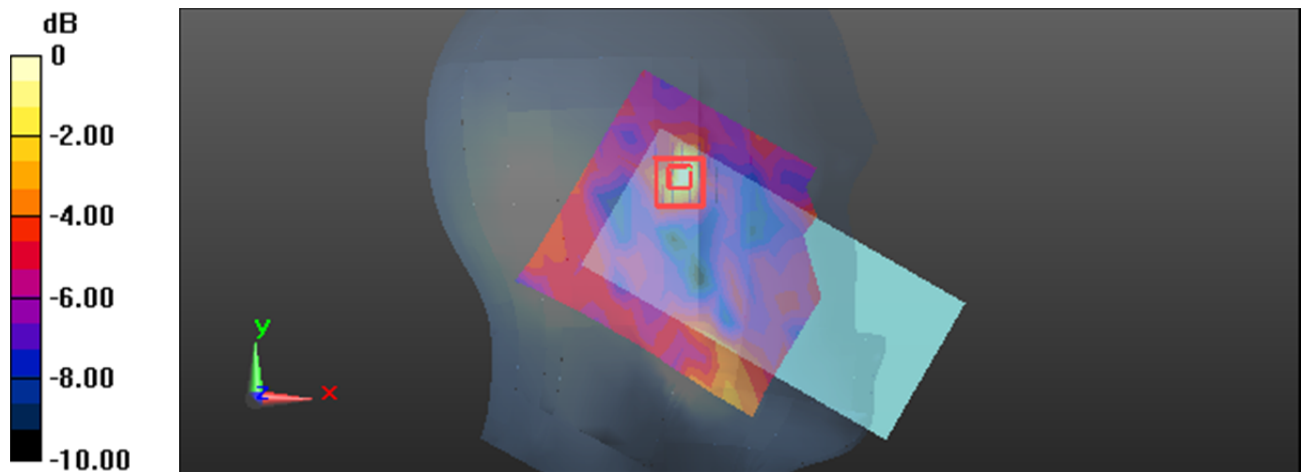

0 dB = 0.212 W/kg = -6.74 dBW/kg

Test Plot 56#: 5.2G WiFi Mid Body Front Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 36.947$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5200; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x19x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.214 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.445 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

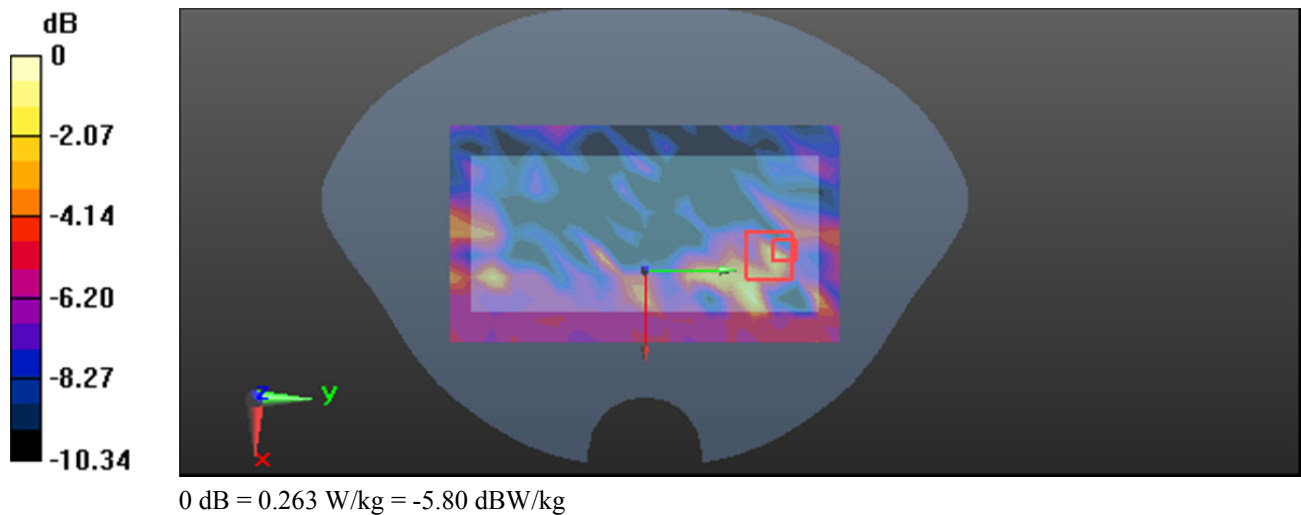

Test Plot 57#: 5.3G WiFi Mid Head Right Cheek Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.808$ S/m; $\epsilon_r = 36.386$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.445 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

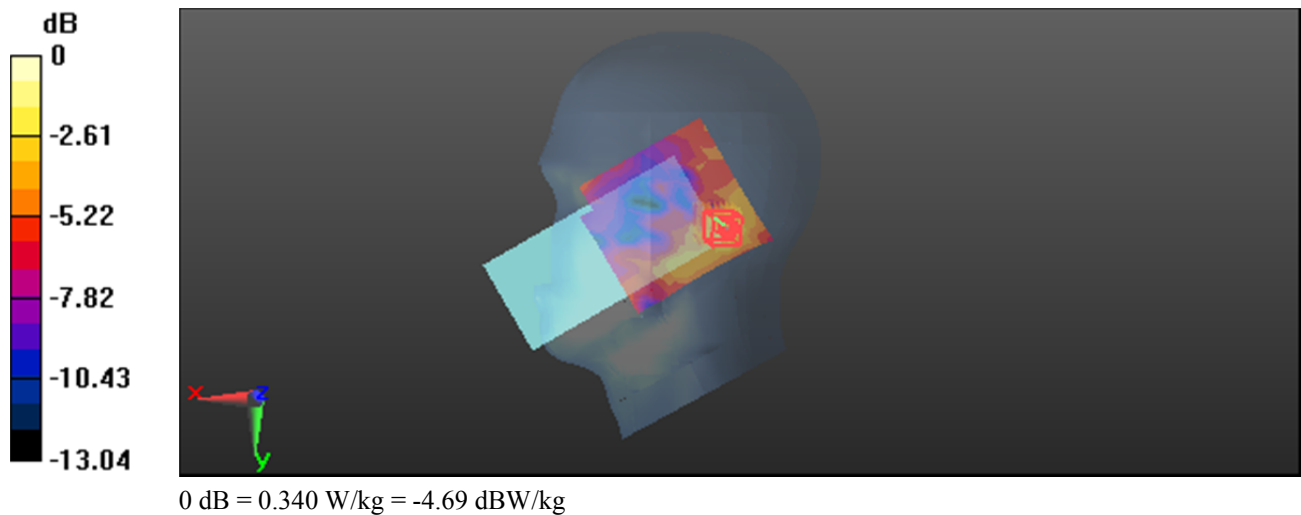

Test Plot 58#: 5.3G WiFi Mid Body Back Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.808$ S/m; $\epsilon_r = 36.386$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x19x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.183 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.278 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

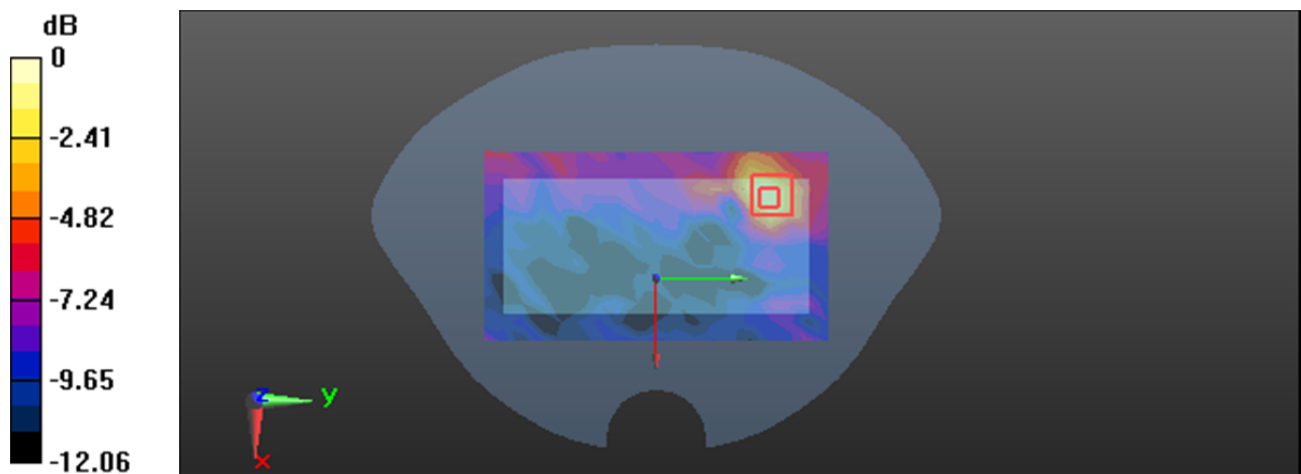

0 dB = 0.217 W/kg = -6.64 dBW/kg

Plot 59#: 5.3G WiFi Mid_ Head Left Cheek Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.808$ S/m; $\epsilon_r = 36.386$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5280 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.421 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.927 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

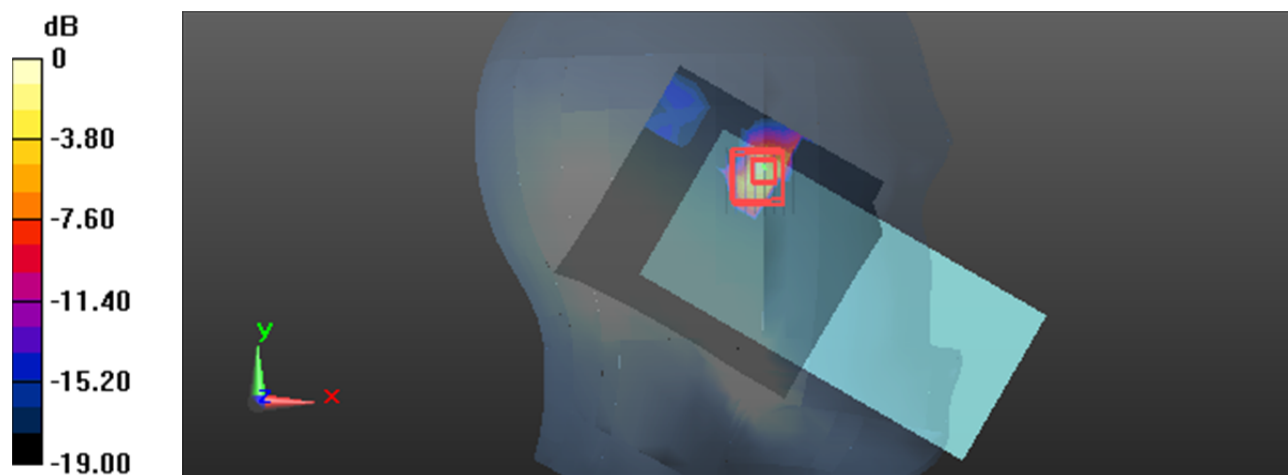

0 dB = 0.542 W/kg = -2.66 dBW/kg

Test Plot 60#: 5.3G WiFi Mid Body Back Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.808$ S/m; $\epsilon_r = 36.386$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.143 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9130 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

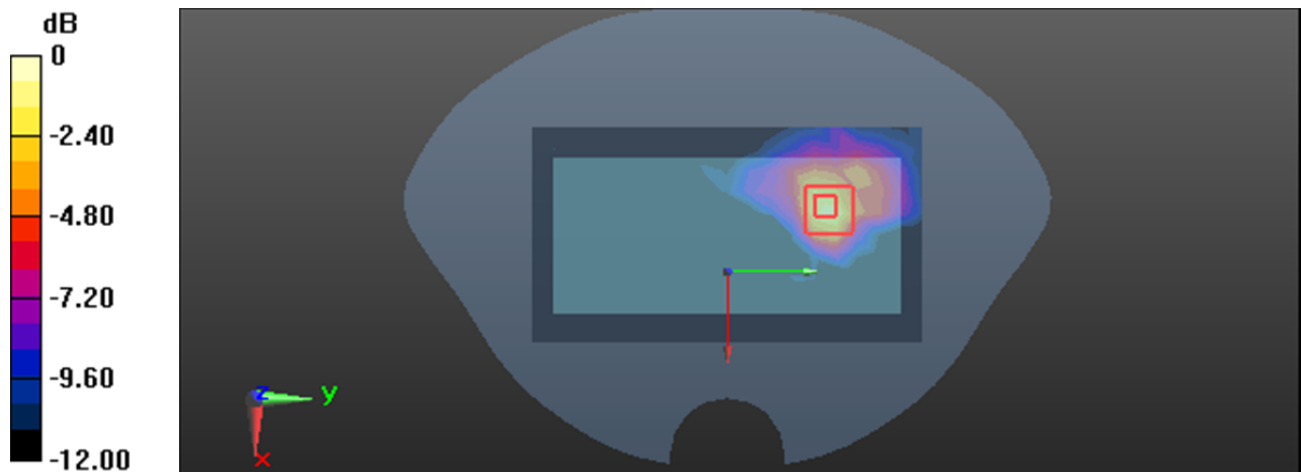

Test Plot 61#: 5.6G WiFi Mid Head Left Tilt Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 36.666$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.436 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.850 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.548 W/kg

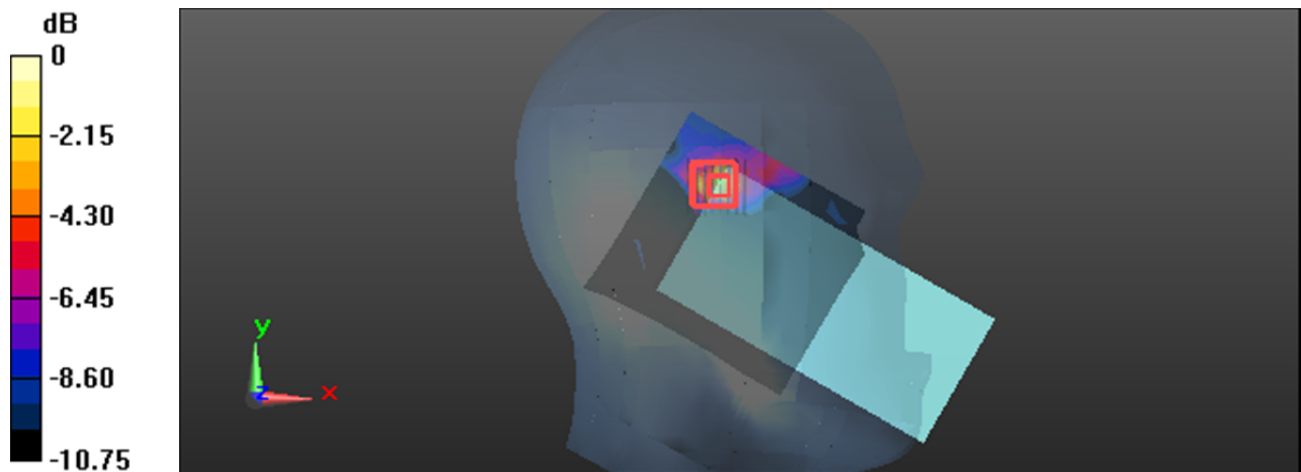

0 dB = 0.548 W/kg = -2.61 dBW/kg

Test Plot 62#: 5.6G WiFi Mid Body Right Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 36.666$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x20x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.383 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.469 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

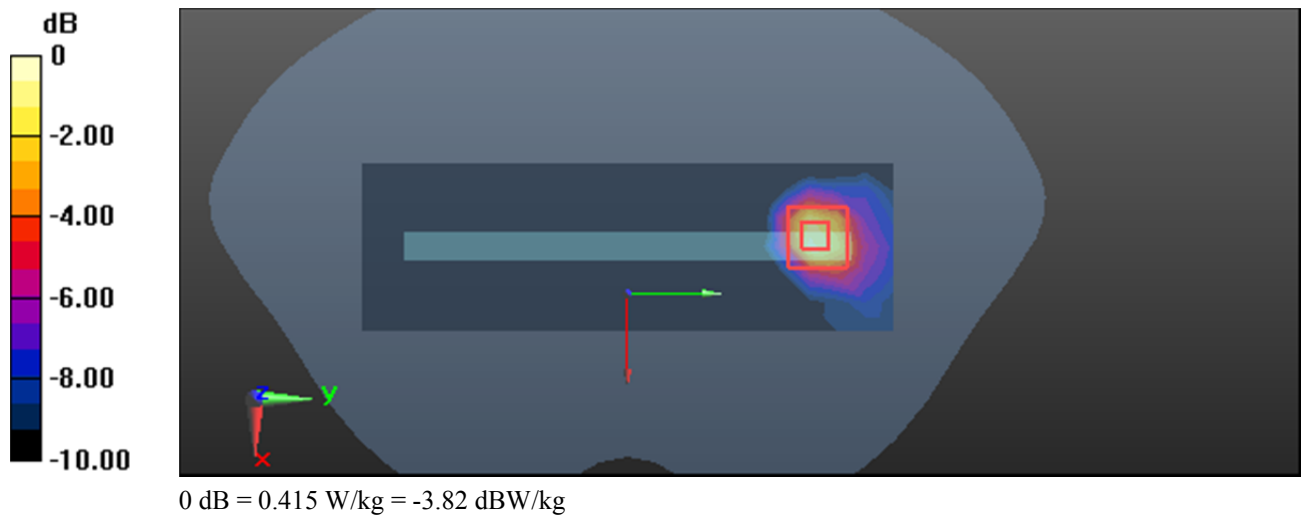

Plot 63#: 5.6G WiFi Mid_ Head Left Cheek Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.13 \text{ S/m}$; $\epsilon_r = 36.666$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5580 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.613 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

 $0 \text{ dB} = 0.595 \text{ W/kg} = -2.25 \text{ dBW/kg}$

Test Plot 64#: 5.6G WiFi Mid Body Back Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 36.666$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x19x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.242 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4150 V/m; Power Drift = 0.09dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

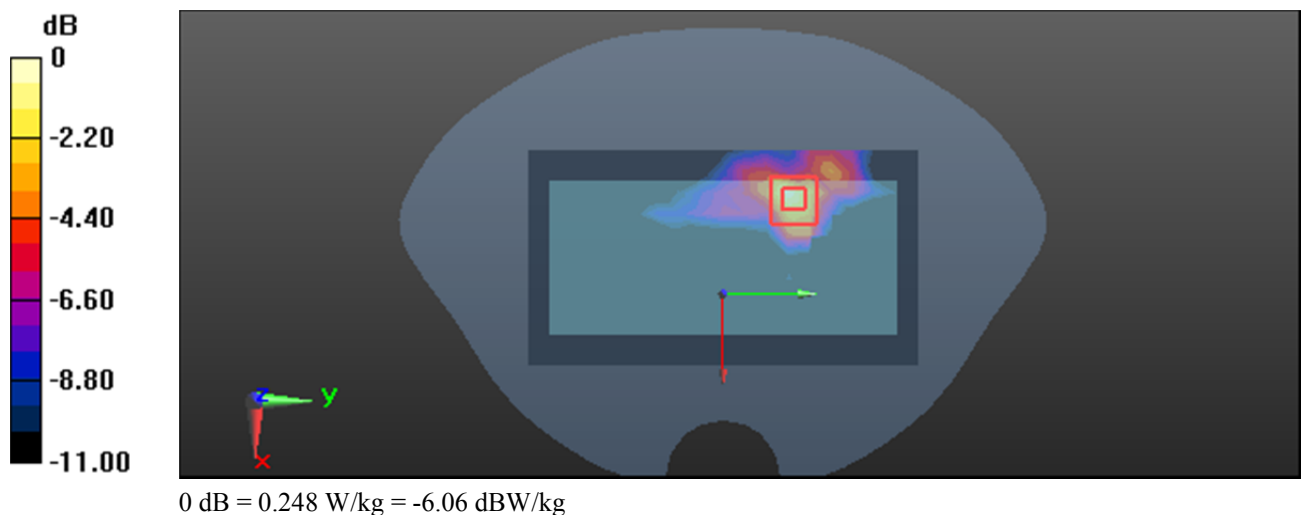

Test Plot 65#: 5.8G WiFi Mid Head Left Cheek Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785$ MHz; $\sigma = 5.374$ S/m; $\epsilon_r = 35.799$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @5785; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.590 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.954 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.615 W/kg

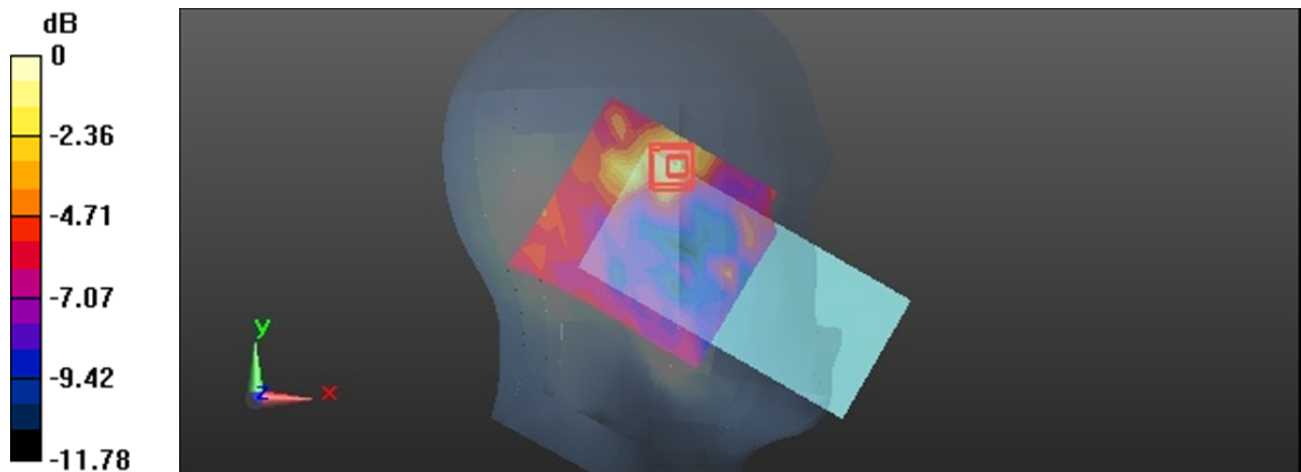

Test Plot 66#: 5.8G WiFi Mid Body Front Chain 0**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785$ MHz; $\sigma = 5.374$ S/m; $\epsilon_r = 35.799$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @5785; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x19x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.198 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.014 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

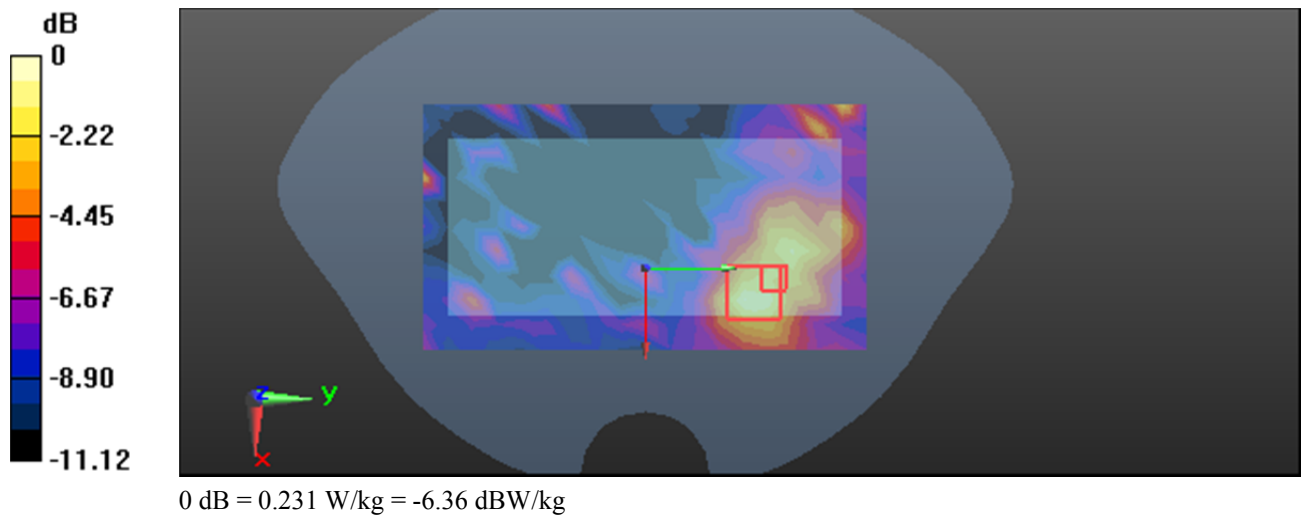

Plot 67#: 5.8G WiFi Mid _ Head Left Cheek Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.374 \text{ S/m}$; $\epsilon_r = 35.799$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5785 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.520 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.929 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

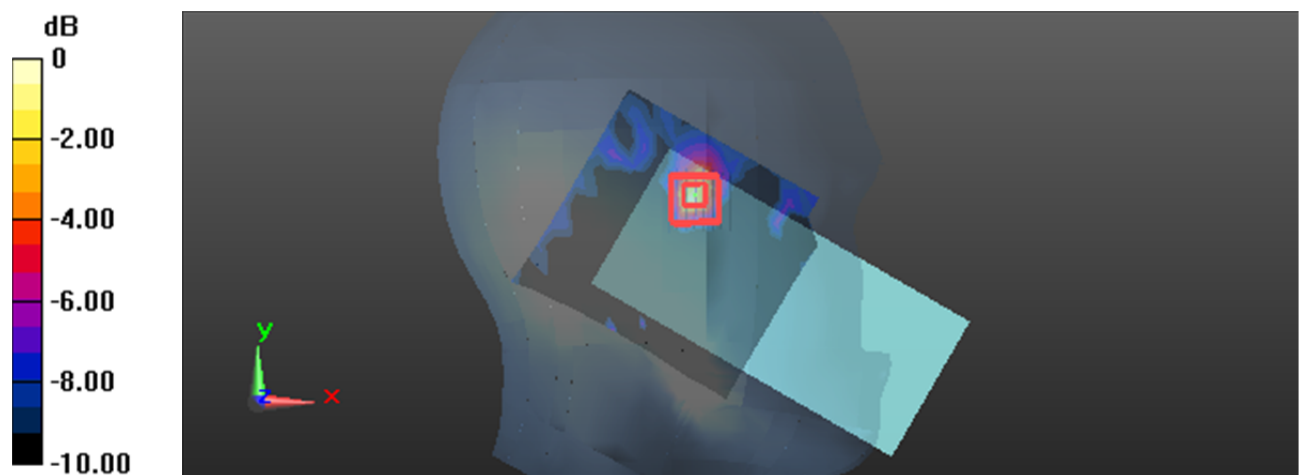 $0 \text{ dB} = 0.547 \text{ W/kg} = -2.62 \text{ dBW/kg}$

Plot 68#: 5.8G WiFi Mid_ Body Front Chain 1**DUT: Mobile Phone; Type: CM8; Serial: 2UGO-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.374 \text{ S/m}$; $\epsilon_r = 35.799$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5785 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2024/3/27
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.170 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.834 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

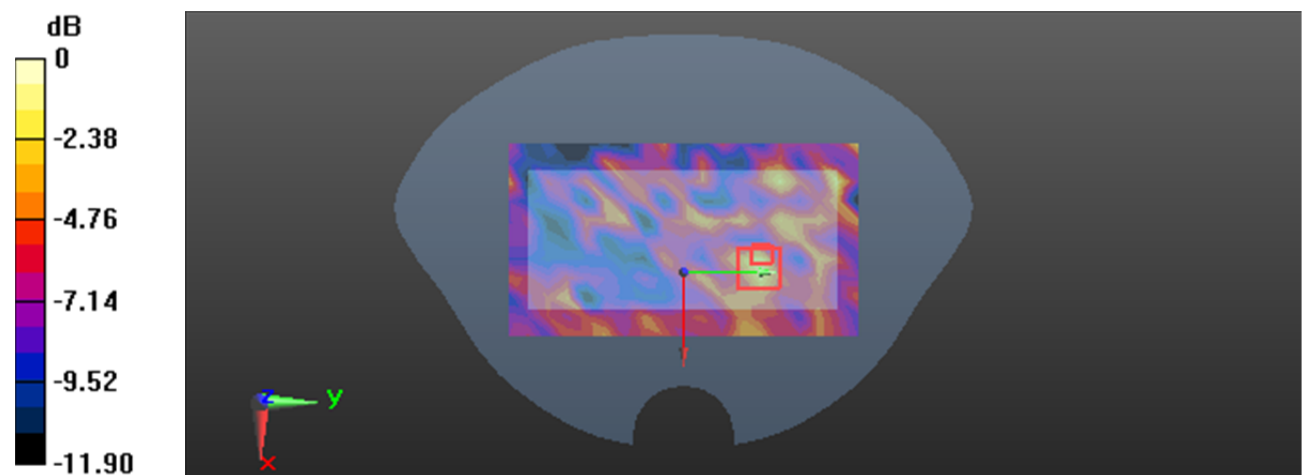

0 dB = 0.233 W/kg = -6.33 dBW/kg