



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2173-1
FCC ID : IHDT56ZV3
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jul. 08, 2021 ~ Aug. 13, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International (ShenZhen) Inc.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Specification of Accessory.....	7
1.7 Testing Location	8
1.8 Test Software.....	8
1.9 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system	15
2.5 EUT Operation Test Setup	15
2.6 Measurement Results Explanation Example.....	15
3 TEST RESULT	16
3.1 26dB & 99% Occupied Bandwidth Measurement	16
3.2 Maximum Conducted Output Power Measurement	18
3.3 Power Spectral Density Measurement	20
3.4 Unwanted Emissions Measurement	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Antenna Requirements	29
4 LIST OF MEASURING EQUIPMENT	30
5 UNCERTAINTY OF EVALUATION	31
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR162325D	Rev. 01	Initial issue of report	Aug. 24, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.02 dB at 5468.40 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.86 dB at 0.152 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2173-1
FCC ID	IHDT56ZV3
IMEI Code	Conducted: 355302640012671/355302640012689 Conduction: 354943970012434/354943970012442 Radiation: 354943970012673/354943970012681
HW Version	DVT2
SW Version	RRWB31.Q3-25
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 17.66 dBm / 0.0583 W 802.11n HT20 : 17.58 dBm / 0.0573 W 802.11n HT40 : 17.53 dBm / 0.0566 W 802.11ac VHT20 : 17.54 dBm / 0.0568 W 802.11ac VHT40 : 17.47 dBm / 0.0558 W 802.11ac VHT80 : 13.99 dBm / 0.0251 W <5260 MHz ~ 5320 MHz> 802.11a : 17.60 dBm / 0.0575 W 802.11n HT20 : 17.57 dBm / 0.0571 W 802.11n HT40 : 17.55 dBm / 0.0569 W 802.11ac VHT20 : 17.52 dBm / 0.0565 W 802.11ac VHT40 : 17.49 dBm / 0.0561 W 802.11ac VHT80 : 14.03 dBm / 0.0253 W <5500 MHz ~ 5720 MHz > 802.11a : 17.70 dBm / 0.0589 W 802.11n HT20 : 17.53 dBm / 0.0566 W 802.11n HT40 : 17.61 dBm / 0.0577 W 802.11ac VHT20 : 17.47 dBm / 0.0558 W 802.11ac VHT40 : 17.55 dBm / 0.0569 W 802.11ac VHT80 : 17.54 dBm / 0.0568 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 18.28 MHz 802.11n HT20 : 19.43 MHz 802.11n HT40 : 37.16 MHz 802.11ac VHT80 : 75.28 MHz <5260 MHz ~ 5320 MHz> 802.11a : 18.28 MHz 802.11n HT20 : 19.28 MHz 802.11n HT40 : 37.26 MHz 802.11ac VHT80 : 75.40 MHz <5500 MHz ~ 5720 MHz > 802.11a : 18.68 MHz 802.11n HT20 : 19.33 MHz 802.11n HT40 : 37.36 MHz 802.11ac VHT80 : 75.40 MHz
Antenna Type / Gain	<5150 MHz ~ 5250 MHz> PIFA Antenna with gain -5.6 dBi <5250 MHz ~ 5350 MHz> PIFA Antenna with gain -4.7 dBi <5470 MHz ~ 5725 MHz> PIFA Antenna with gain -5.1 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-106
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-109
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-107
AC Adapter 3(US)	Brand Name	Motorola(Aohai)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Aohai)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Aohai)	Model Name	MC-103
AC Adapter 3(AR)	Brand Name	Motorola(Aohai)	Model Name	MC-106
AC Adapter 4(BR)	Brand Name	Motorola(Flex)	Model Name	MC-107
AC Adapter 5(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-107
AC Adapter 6(IN)	Brand Name	Motorola(Aohai)	Model Name	MC-204
AC Adapter 7(IN)	Brand Name	Motorola(Chenyang)	Model Name	MC-204
Battery 1	Brand Name	Motorola(Sunwoda)	Model Name	JK50
Battery 2	Brand Name	Motorola(SCUD)	Model Name	JK50
Battery 3	Brand Name	Motorola(ATL)	Model Name	JK50
Earphone 1	Brand Name	Motorola (NEW LEADER)	Model Name	MH202(S928D09678)
Earphone 2	Brand Name	Motorola(Lyand)	Model Name	MH191(SH38C81577)
Earphone 3	Brand Name	Motorola(LCHSE)	Model Name	MH191(SH38C81576)
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SLQ-A167A
USB Cable 2	Brand Name	Motorola (Jieye)	Model Name	JY-C03-272

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH04-KS	CN1257	314309

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered VHT20)	MCS0
802.11n HT40 (Covered VHT40)	MCS0
802.11ac VHT80	MCS0

Co-location
LTE Band4 + 802.11n HT20 CH100

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 2(Charging from Adapter 3)+ Battery 1+ Earphone 3
Remark: Test accessories are the worst accessories from Part 15B.	



Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144


Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142


Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

2.3 Connection Diagram of Test System

For Conducted Emission:

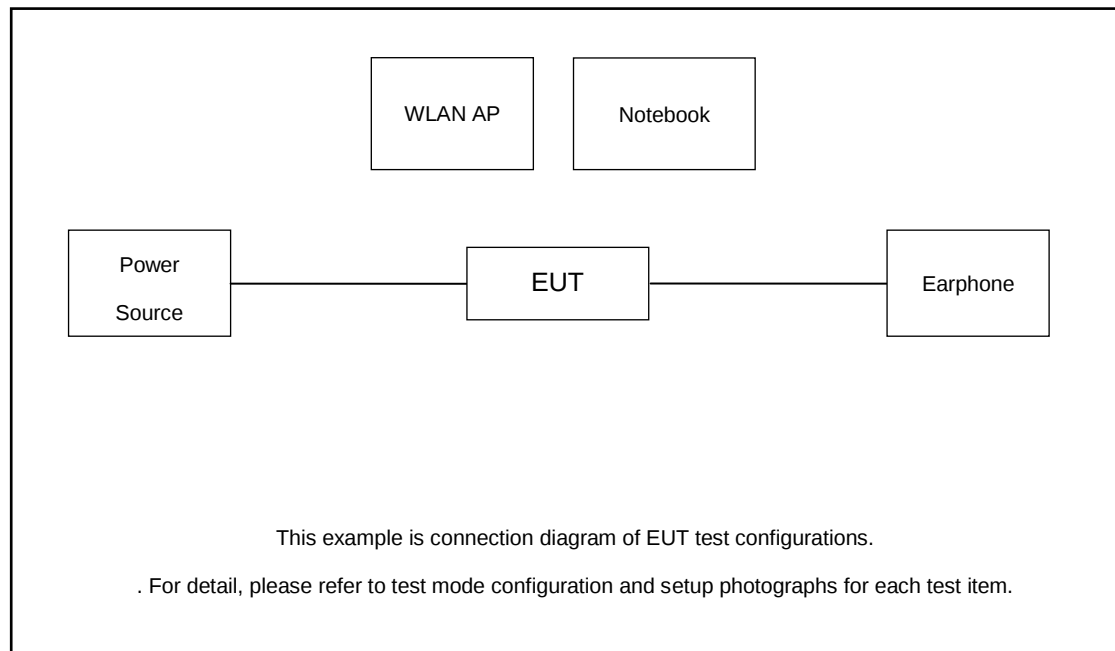

For Radiated Emission:

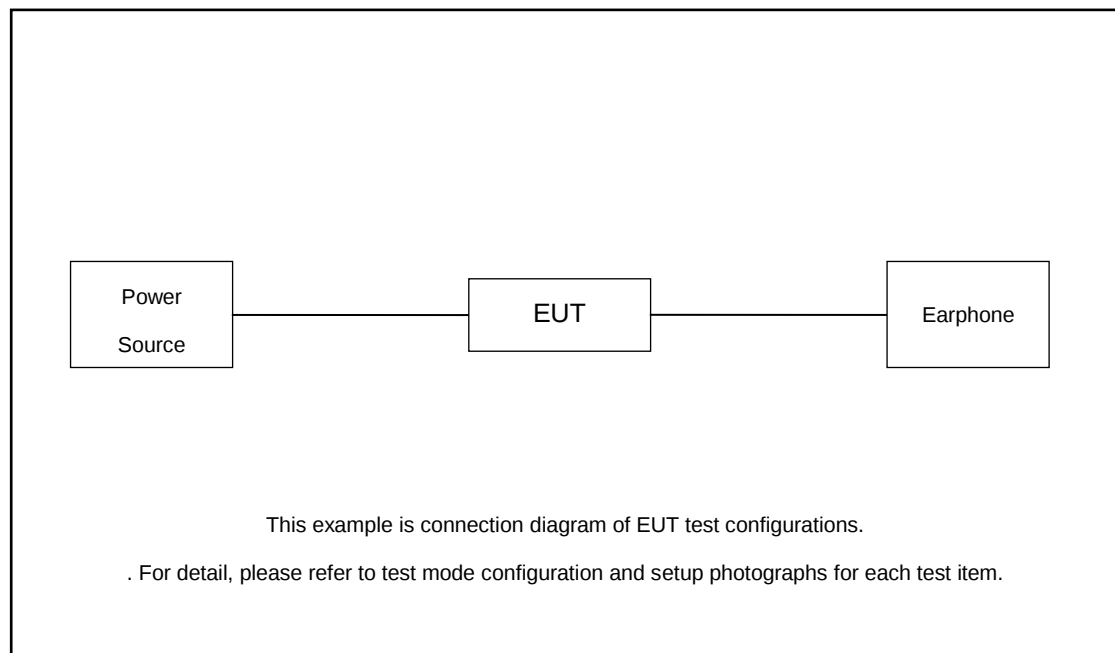

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 3.3 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 3.3 + 10 = 13.3 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

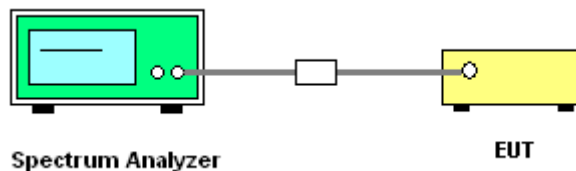

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

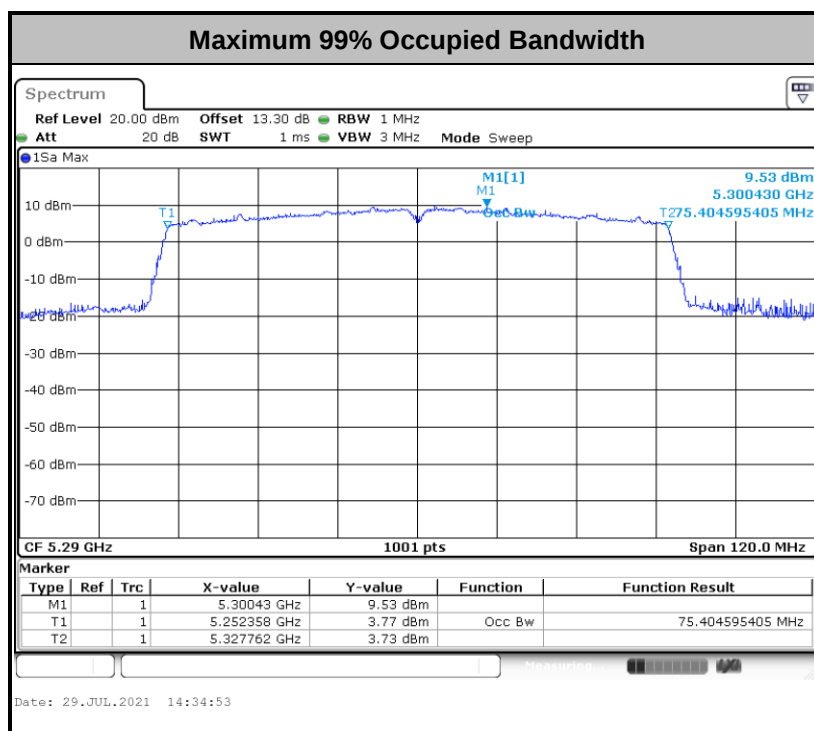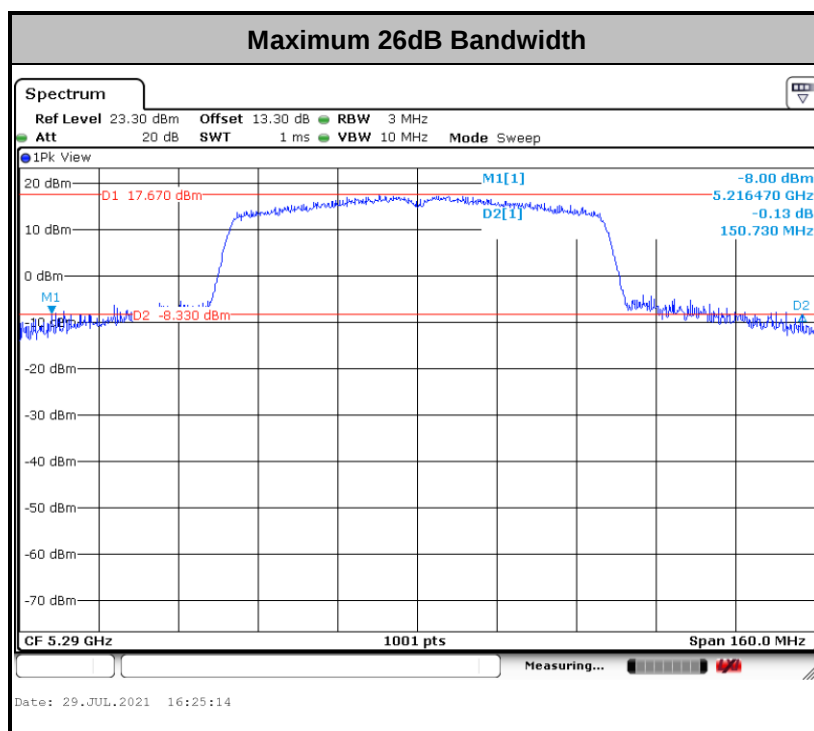

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

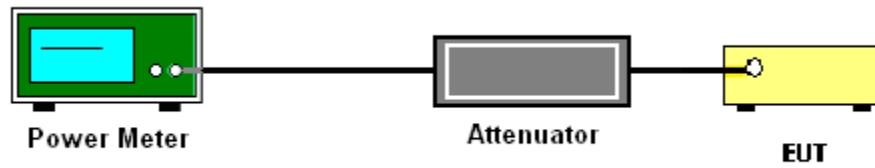

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

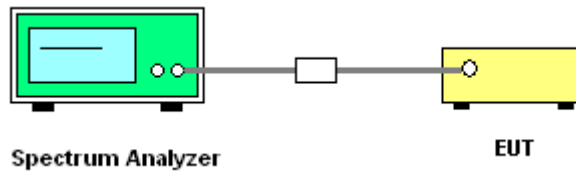

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

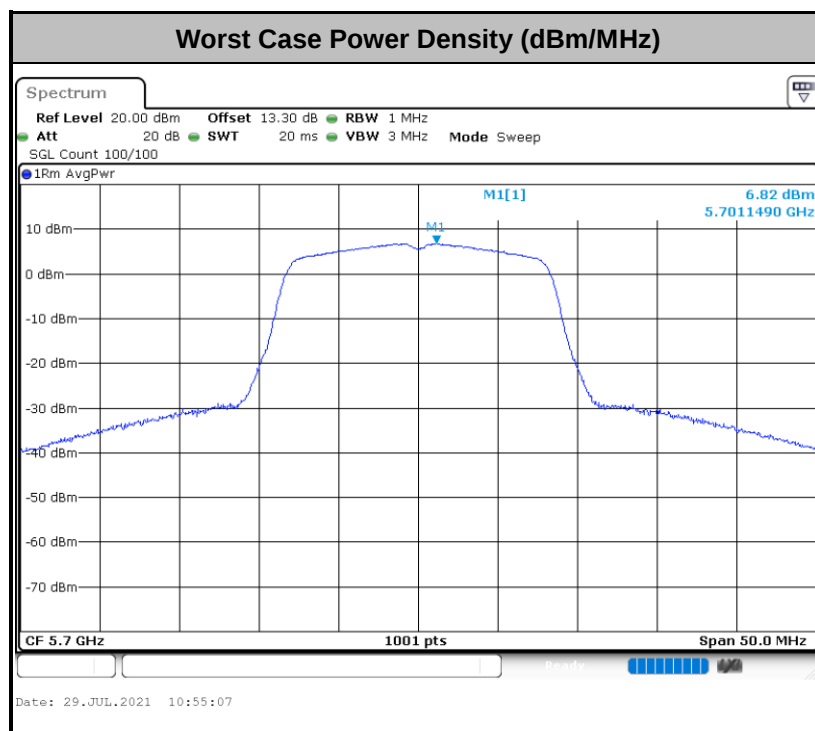

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

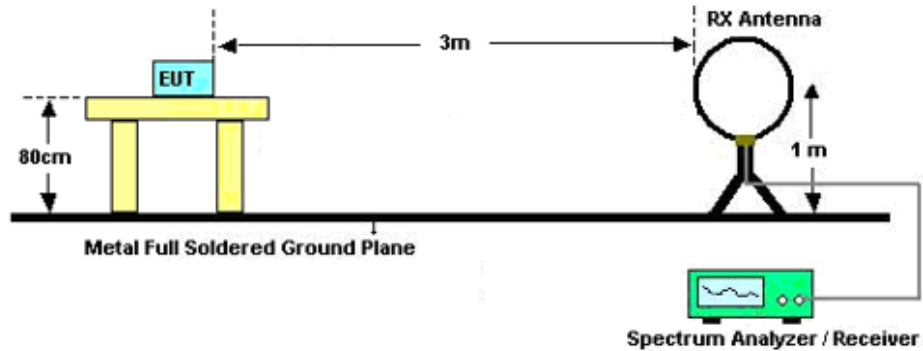

For radiated emissions from 30MHz to 1GHz

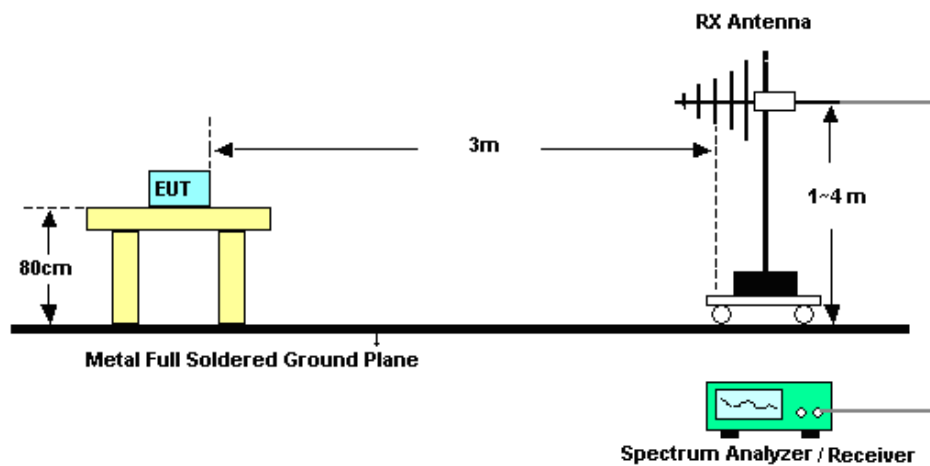

For radiated emissions above 1GHz

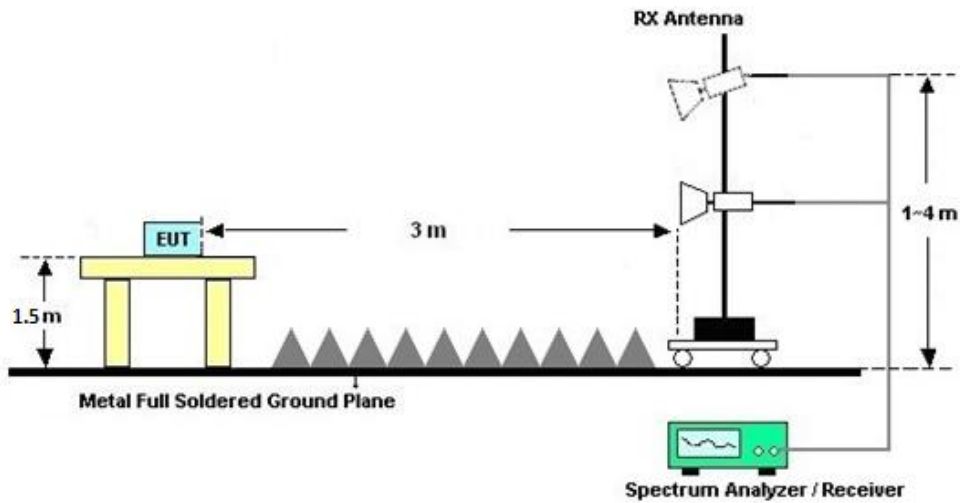

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

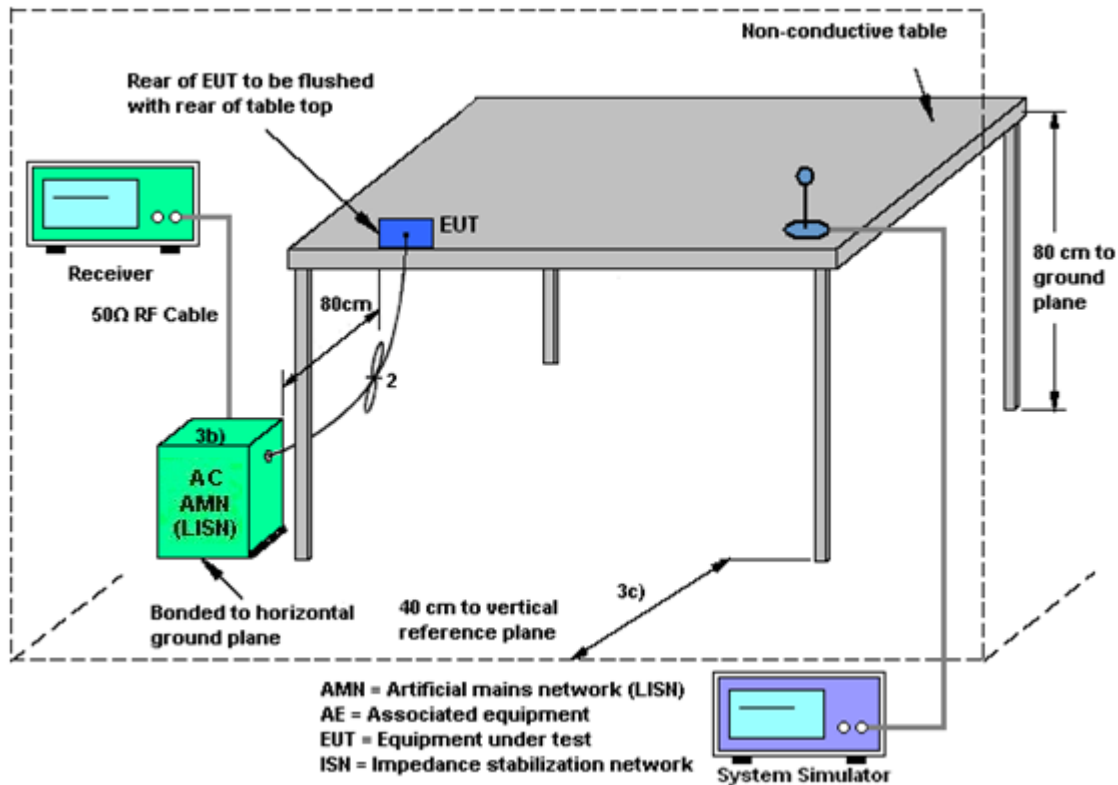

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Jul. 29, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Jul. 29, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Jul. 29, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 12, 2021	Aug. 13, 2021	Jul. 11, 2022	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Apr.13, 2021	Aug. 13, 2021	Apr. 12, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Aug. 13, 2021	Oct. 31, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May. 30, 2021	Aug. 13, 2021	May. 29, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 18, 2021	Aug. 13, 2021	Apr. 17, 2022	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Aug. 13, 2021	Nov. 09, 2021	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 02, 2020	Aug. 13, 2021	Nov. 01, 2021	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 07, 2021	Aug. 13, 2021	Jan. 06, 2022	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1GHz~18GHz	Jan. 06, 2021	Aug. 13, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 14, 2020	Aug. 13, 2021	Oct. 13, 2021	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 13, 2021	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 13, 2021	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 13, 2021	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Jul. 08, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jul. 08, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 17, 2020	Jul. 08, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jul. 08, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2021/7/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.18	33.30	-	22.60		
11a	6Mbps	1	44	5220	18.18	36.90	-	22.60		
11a	6Mbps	1	48	5240	18.28	34.10	-	22.62		
HT20	MCS0	1	36	5180	19.08	34.45	-	22.81		
HT20	MCS0	1	44	5220	19.03	31.85	-	22.79		
HT20	MCS0	1	48	5240	19.43	35.40	-	22.88		
HT40	MCS0	1	38	5190	36.96	69.21	-	23.01		
HT40	MCS0	1	46	5230	37.16	68.04	-	23.01		
VHT80	MCS0	1	42	5210	75.28	127.71	-	23.01		

TEST RESULTS DATA
Average Power Table

U-NII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.14	16.62	24.00	-5.60		Pass
11a	6Mbps	1	44	5220	0.14	17.63	24.00	-5.60		Pass
11a	6Mbps	1	48	5240	0.14	17.66	24.00	-5.60		Pass
HT20	MCS0	1	36	5180	0.15	16.55	24.00	-5.60		Pass
HT20	MCS0	1	44	5220	0.15	17.50	24.00	-5.60		Pass
HT20	MCS0	1	48	5240	0.15	17.58	24.00	-5.60		Pass
HT40	MCS0	1	38	5190	0.29	13.90	24.00	-5.60		Pass
HT40	MCS0	1	46	5230	0.29	17.53	24.00	-5.60		Pass
VHT20	MCS0	1	36	5180	0.15	16.50	24.00	-5.60		Pass
VHT20	MCS0	1	44	5220	0.15	17.46	24.00	-5.60		Pass
VHT20	MCS0	1	48	5240	0.15	17.54	24.00	-5.60		Pass
VHT40	MCS0	1	38	5190	0.30	13.82	24.00	-5.60		Pass
VHT40	MCS0	1	46	5230	0.30	17.47	24.00	-5.60		Pass
VHT80	MCS0	1	42	5210	0.57	13.99	24.00	-5.60		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.14	6.70	11.00	-5.60		Pass
11a	6Mbps	1	44	5220	0.14	6.74	11.00	-5.60		Pass
11a	6Mbps	1	48	5240	0.14	6.54	11.00	-5.60		Pass
HT20	MCS0	1	36	5180	0.15	6.27	11.00	-5.60		Pass
HT20	MCS0	1	44	5220	0.15	6.39	11.00	-5.60		Pass
HT20	MCS0	1	48	5240	0.15	6.54	11.00	-5.60		Pass
HT40	MCS0	1	38	5190	0.29	3.80	11.00	-5.60		Pass
HT40	MCS0	1	46	5230	0.29	3.91	11.00	-5.60		Pass
VHT80	MCS0	1	42	5210	0.57	1.07	11.00	-5.60		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	18.28	32.80	23.62	29.62	23.98	
11a	6M bps	1	60	5300	18.18	33.10	23.60	29.60	23.98	
11a	6M bps	1	64	5320	18.23	35.75	23.61	29.61	23.98	
HT20	MCS 0	1	52	5260	19.08	33.75	23.81	29.81	23.98	
HT20	MCS 0	1	60	5300	19.28	33.65	23.85	29.85	23.98	
HT20	MCS 0	1	64	5320	19.18	35.00	23.83	29.83	23.98	
HT40	MCS 0	1	54	5270	37.26	69.48	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	37.06	69.03	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.40	150.73	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.14	17.60	23.98	-4.70	26.99	Pass
11a	6M bps	1	60	5300	0.14	17.58	23.98	-4.70	26.99	Pass
11a	6M bps	1	64	5320	0.14	14.78	23.98	-4.70	26.99	Pass
HT20	MCS 0	1	52	5260	0.15	17.48	23.98	-4.70	26.99	Pass
HT20	MCS 0	1	60	5300	0.15	17.57	23.98	-4.70	26.99	Pass
HT20	MCS 0	1	64	5320	0.15	15.52	23.98	-4.70	26.99	Pass
HT40	MCS 0	1	54	5270	0.29	17.55	23.98	-4.70	26.99	Pass
HT40	MCS 0	1	62	5310	0.29	14.33	23.98	-4.70	26.99	Pass
VHT20	MCS 0	1	52	5260	0.15	17.43	23.98	-4.70	26.99	Pass
VHT20	MCS 0	1	60	5300	0.15	17.52	23.98	-4.70	26.99	Pass
VHT20	MCS 0	1	64	5320	0.15	15.42	23.98	-4.70	26.99	Pass
VHT40	MCS 0	1	54	5270	0.30	17.49	23.98	-4.70	26.99	Pass
VHT40	MCS 0	1	62	5310	0.30	14.30	23.98	-4.70	26.99	Pass
VHT80	MCS 0	1	58	5290	0.57	14.03	23.98	-4.70	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.14	6.75	11.00	-4.70		Pass
11a	6M bps	1	60	5300	0.14	6.81	11.00	-4.70		Pass
11a	6M bps	1	64	5320	0.14	6.81	11.00	-4.70		Pass
HT20	MCS 0	1	52	5260	0.15	6.31	11.00	-4.70		Pass
HT20	MCS 0	1	60	5300	0.15	6.52	11.00	-4.70		Pass
HT20	MCS 0	1	64	5320	0.15	6.50	11.00	-4.70		Pass
HT40	MCS 0	1	54	5270	0.29	3.89	11.00	-4.70		Pass
HT40	MCS 0	1	62	5310	0.29	3.90	11.00	-4.70		Pass
VHT80	MCS 0	1	58	5290	0.57	1.16	11.00	-4.70		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	18.68	36.25	23.71	29.71	23.98	
11a	6M bps	1	116	5580	18.23	35.80	23.61	29.61	23.98	
11a	6M bps	1	140	5700	18.23	36.35	23.61	29.61	23.98	
11a	6Mbps	1	144	5720	18.23	33.90	23.61	29.61	23.98	
HT20	MCS 0	1	100	5500	19.23	32.50	23.84	29.84	23.98	
HT20	MCS 0	1	116	5580	19.23	33.75	23.84	29.84	23.98	
HT20	MCS 0	1	140	5700	19.33	35.90	23.86	29.86	23.98	
HT20	MCS0	1	144	5720	19.23	33.15	23.84	29.84	23.98	
HT40	MCS 0	1	102	5510	37.06	69.39	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	37.06	68.13	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	37.36	68.40	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	37.26	68.49	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.28	124.41	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.28	131.55	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	75.40	134.64	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table


U-NII-2C										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.14	17.28	23.98	-5.10	26.99	Pass
11a	6M bps	1	116	5580	0.14	17.66	23.98	-5.10	26.99	Pass
11a	6M bps	1	140	5700	0.14	16.21	23.98	-5.10	26.99	Pass
11a	6M bps	1	144	5720	0.14	17.70	23.98	-5.10	26.99	Pass
HT20	MCS 0	1	100	5500	0.15	15.55	23.98	-5.10	26.99	Pass
HT20	MCS 0	1	116	5580	0.15	17.53	23.98	-5.10	26.99	Pass
HT20	MCS 0	1	140	5700	0.15	15.44	23.98	-5.10	26.99	Pass
HT20	MCS 0	1	144	5720	0.15	17.51	23.98	-5.10	26.99	Pass
HT40	MCS 0	1	102	5510	0.29	14.96	23.98	-5.10	26.99	Pass
HT40	MCS 0	1	110	5550	0.29	17.61	23.98	-5.10	26.99	Pass
HT40	MCS 0	1	134	5670	0.29	16.68	23.98	-5.10	26.99	Pass
HT40	MCS 0	1	142	5710	0.29	17.60	23.98	-5.10	26.99	Pass
VHT20	MCS 0	1	100	5500	0.15	15.45	23.98	-5.10	26.99	Pass
VHT20	MCS 0	1	116	5580	0.15	17.47	23.98	-5.10	26.99	Pass
VHT20	MCS 0	1	140	5700	0.15	15.25	23.98	-5.10	26.99	Pass
VHT20	MCS 0	1	144	5720	0.15	17.45	23.98	-5.10	26.99	Pass
VHT40	MCS 0	1	102	5510	0.30	14.92	23.98	-5.10	26.99	Pass
VHT40	MCS 0	1	110	5550	0.30	17.55	23.98	-5.10	26.99	Pass
VHT40	MCS 0	1	134	5670	0.30	16.65	23.98	-5.10	26.99	Pass
VHT40	MCS 0	1	142	5710	0.30	17.54	23.98	-5.10	26.99	Pass
VHT80	MCS 0	1	106	5530	0.57	14.47	23.98	-5.10	26.99	Pass
VHT80	MCS 0	1	122	5610	0.57	17.43	23.98	-5.10	26.99	Pass
VHT80	MCS 0	1	138	5690	0.57	17.54	23.98	-5.10	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.14	6.94	11.00	-5.10		Pass
11a	6M bps	1	116	5580	0.14	6.88	11.00	-5.10		Pass
11a	6M bps	1	140	5700	0.14	6.96	11.00	-5.10		Pass
11a	6Mbps	1	144	5720	0.14	6.92	11.00	-5.10		Pass
HT20	MCS 0	1	100	5500	0.15	6.60	11.00	-5.10		Pass
HT20	MCS 0	1	116	5580	0.15	6.48	11.00	-5.10		Pass
HT20	MCS 0	1	140	5700	0.15	6.61	11.00	-5.10		Pass
HT20	MCS0	1	144	5720	0.15	6.69	11.00	-5.10		Pass
HT40	MCS 0	1	102	5510	0.29	3.97	11.00	-5.10		Pass
HT40	MCS 0	1	110	5550	0.29	4.05	11.00	-5.10		Pass
HT40	MCS 0	1	134	5670	0.29	4.07	11.00	-5.10		Pass
HT40	MCS0	1	142	5710	0.29	4.11	11.00	-5.10		Pass
VHT80	MCS 0	1	106	5530	0.57	1.17	11.00	-5.10		Pass
VHT80	MCS 0	1	122	5610	0.57	0.99	11.00	-5.10		Pass
VHT80	MCS0	1	138	5690	0.57	1.19	11.00	-5.10		Pass




Appendix B. AC Conducted Emission Test Results

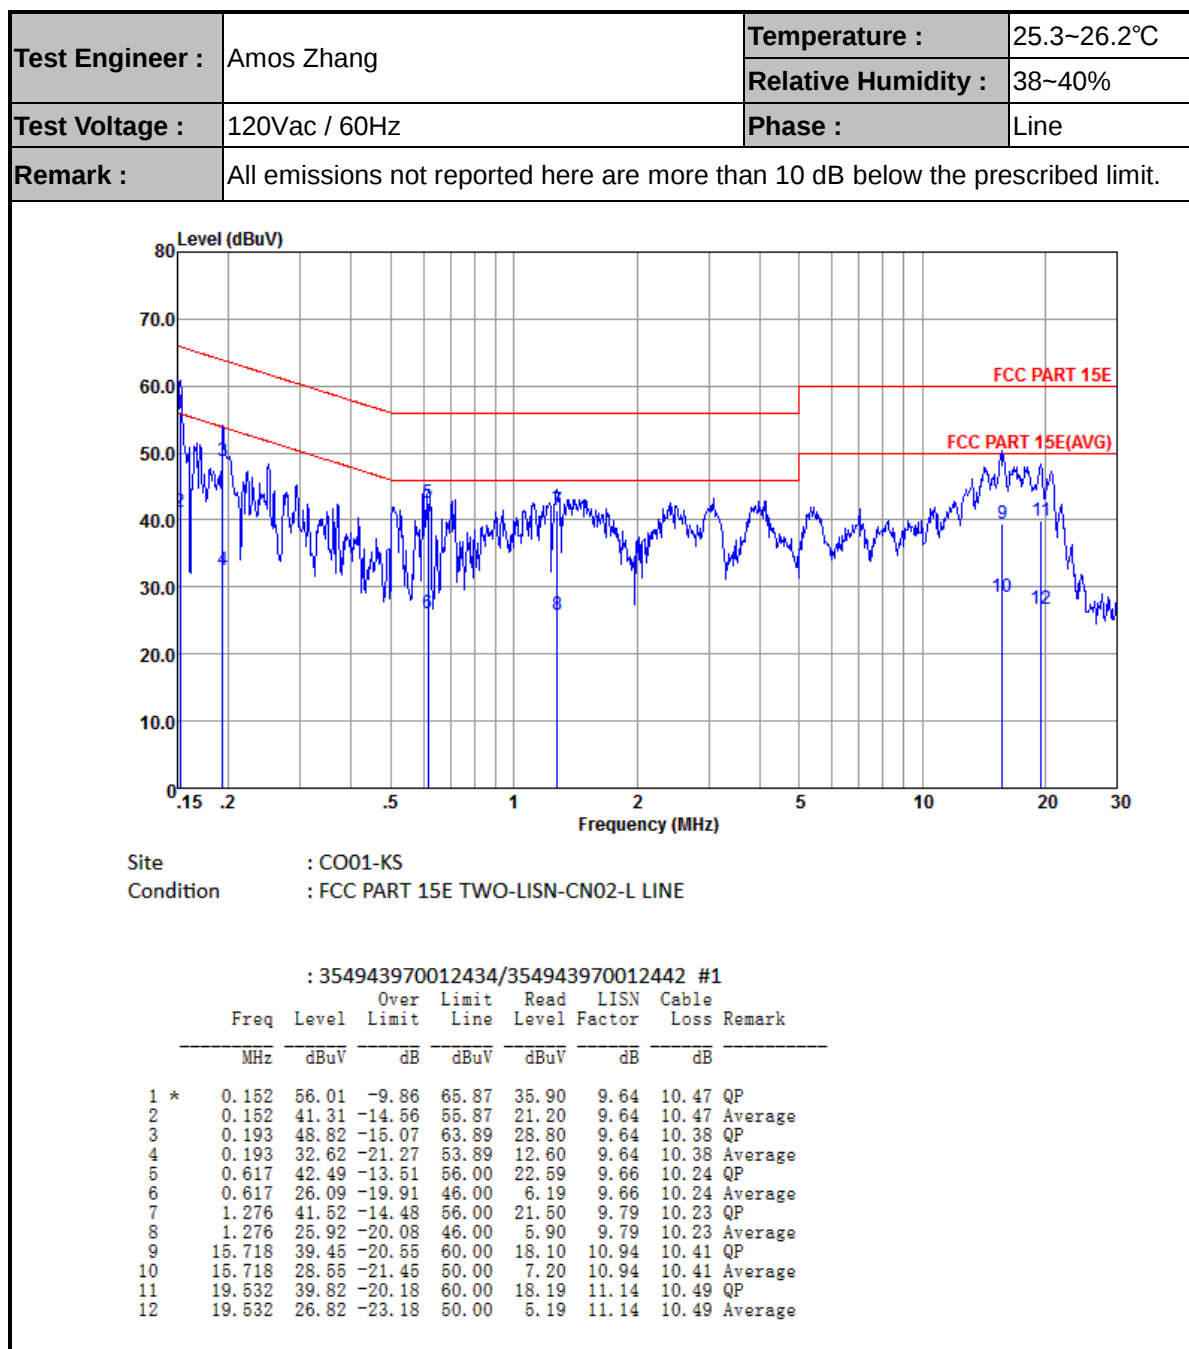



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

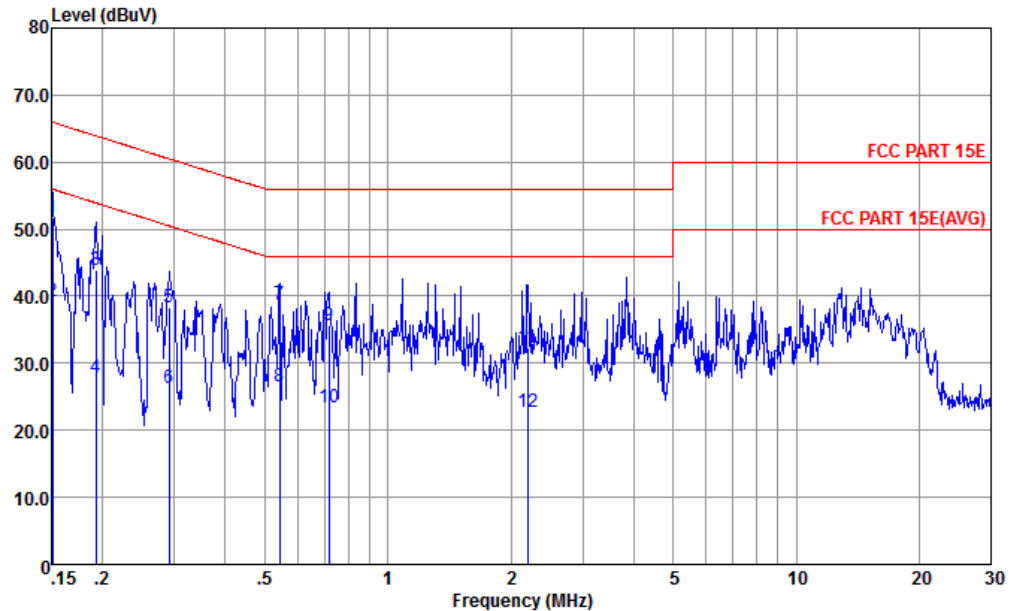

Site : CO01-KS
Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

: 354943970012434/354943970012442 #1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.151	51.78	-14.18	65.96	31.50	9.80	10.48	QP
2	0.151	39.18	-16.78	55.96	18.90	9.80	10.48	Average
3	0.192	43.86	-20.07	63.93	23.60	9.88	10.38	QP
4	0.192	27.76	-26.17	53.93	7.60	9.88	10.38	Average
5	0.291	38.31	-22.19	60.50	18.20	9.80	10.31	QP
6	0.291	26.21	-24.29	50.50	6.10	9.80	10.31	Average
7	0.544	38.86	-17.14	56.00	18.89	9.73	10.24	QP
8	0.544	26.56	-19.44	46.00	6.59	9.73	10.24	Average
9	0.716	35.76	-20.24	56.00	15.80	9.72	10.24	QP
10	0.716	23.46	-22.54	46.00	3.50	9.72	10.24	Average
11	2.201	32.29	-23.71	56.00	12.10	9.96	10.23	QP
12	2.201	22.79	-23.21	46.00	2.60	9.96	10.23	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

UNII-1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5147.52	68.75	-5.25	74	59.15	34.93	10.69	36.02	100	58	P	H
		5149.98	50.95	-3.05	54	41.35	34.93	10.69	36.02	100	58	A	H
	*	5182	109.59	-	-	99.9	34.96	10.73	36	100	58	P	H
		5182	101.69	-	-	92	34.96	10.73	36	100	58	A	H
		5149.76	63.03	-10.97	74	53.43	34.93	10.69	36.02	100	19	P	V
		5149.6	46.53	-7.47	54	36.93	34.93	10.69	36.02	100	19	A	V
	*	5176	102.48	-	-	92.79	34.96	10.73	36	100	19	P	V
		5176	95.37	-	-	85.68	34.96	10.73	36	100	19	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10358.36	42.05	-26.25	68.3	55.89	37.94	12.27	64.05	100	360	P	H
		10358.36	42.44	-25.86	68.3	56.28	37.94	12.27	64.05	100	360	P	V
802.11a CH 44 5220MHz		10443	43.13	-25.17	68.3	56.82	37.98	12.35	64.02	100	360	P	H
		10443	42.85	-25.45	68.3	56.54	37.98	12.35	64.02	100	360	P	V
802.11a CH 48 5240MHz		10478.47	43.26	-25.04	68.3	56.86	38	12.4	64	100	360	P	H
		10478.47	43.84	-24.46	68.3	57.44	38	12.4	64	100	360	P	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



UNII-1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5147.36	70.41	-3.59	74	60.81	34.93	10.69	36.02	100	56	P	H
		5148.48	50.9	-3.1	54	41.3	34.93	10.69	36.02	100	56	A	H
	*	5182	109.1	-	-	99.41	34.96	10.73	36	100	56	P	H
		5182	102.12	-	-	92.43	34.96	10.73	36	100	56	A	H
		5148.96	63.33	-10.67	74	53.73	34.93	10.69	36.02	327	233	P	V
		5149.12	46.02	-7.98	54	36.42	34.93	10.69	36.02	327	233	A	V
	*	5182	103.55	-	-	93.86	34.96	10.73	36	327	233	P	V
		5182	96.71	-	-	87.02	34.96	10.73	36	327	233	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10358.36	41.52	-26.78	68.3	55.36	37.94	12.27	64.05	100	360	P	H
		10358.36	42.16	-26.14	68.3	56	37.94	12.27	64.05	100	360	P	V
802.11n HT20 CH 44 5220MHz		10438.44	42.78	-25.52	68.3	56.47	37.98	12.35	64.02	100	360	P	H
		10438.44	42.8	-25.5	68.3	56.49	37.98	12.35	64.02	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	42.67	-25.63	68.3	56.27	38	12.4	64	100	360	P	H
		10480	43.79	-24.51	68.3	57.39	38	12.4	64	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5149.6	65.05	-8.95	74	55.45	34.93	10.69	36.02	100	68	P	H
		5149.76	50.71	-3.29	54	41.11	34.93	10.69	36.02	100	68	A	H
	*	5188	102.57	-	-	92.88	34.96	10.73	36	100	68	P	H
		5188	95.17	-	-	85.48	34.96	10.73	36	100	68	A	H
		5360.94	52.87	-21.13	74	42.6	35.14	11.01	35.88	100	68	P	H
		5363.46	43.8	-10.2	54	33.53	35.14	11.01	35.88	100	68	A	H
		5149.6	59.98	-14.02	74	50.38	34.93	10.69	36.02	100	38	P	V
		5149.92	45.77	-8.23	54	36.17	34.93	10.69	36.02	100	38	A	V
	*	5188	100.39	-	-	90.7	34.96	10.73	36	100	38	P	V
		5188	92.78	-	-	83.09	34.96	10.73	36	100	38	A	V
		5367.6	51.85	-22.15	74	41.58	35.14	11.01	35.88	100	38	P	V
		5363.28	43.19	-10.81	54	32.92	35.14	11.01	35.88	100	38	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10378.38	43.78	-24.52	68.3	57.55	37.96	12.3	64.03	100	360	P	H
		10378.38	43.41	-24.89	68.3	57.18	37.96	12.3	64.03	100	360	P	V
802.11n HT40 CH 46 5230MHz		10458.46	44.56	-23.74	68.3	58.22	37.98	12.37	64.01	100	360	P	H
		10458.46	43.01	-25.29	68.3	56.67	37.98	12.37	64.01	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5124.16	60.25	-13.75	74	50.7	34.91	10.67	36.03	103	60	P	H
		5150	50.66	-3.34	54	41.06	34.93	10.69	36.02	103	60	A	H
	*	5206	101.22	-	-	91.48	34.98	10.75	35.99	103	60	P	H
		5206	93.53	-	-	83.79	34.98	10.75	35.99	103	60	A	H
		5379.12	53.68	-20.32	74	43.35	35.16	11.04	35.87	103	60	P	H
		5352.66	44.89	-9.11	54	34.68	35.12	10.98	35.89	103	60	A	H
		5142.24	56.25	-17.75	74	46.65	34.93	10.69	36.02	100	299	P	V
		5149.6	46.53	-7.47	54	36.93	34.93	10.69	36.02	100	299	A	V
	*	5218	95.07	-	-	85.28	34.99	10.78	35.98	100	299	P	V
		5218	87.37	-	-	77.58	34.99	10.78	35.98	100	299	A	V
		5354.46	52.69	-21.31	74	42.48	35.12	10.98	35.89	100	299	P	V
		5350.32	44.24	-9.76	54	34.03	35.12	10.98	35.89	100	299	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10418.42	42.16	-26.14	68.3	55.87	37.97	12.34	64.02	100	360	P	H
CH 42 5210MHz		10418.42	41.64	-26.66	68.3	55.35	37.97	12.34	64.02	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A - 5250~5350MHz

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 64 5320MHz		5352.5	61.35	-12.65	74	51.14	35.12	10.98	35.89	100	72	P	H
		5350	49.98	-4.02	54	39.77	35.12	10.98	35.89	100	72	A	H
	*	5320	107.5	-	-	97.4	35.09	10.93	35.92	100	72	P	H
		5320	100.09	-	-	89.99	35.09	10.93	35.92	100	72	A	H
		5350.8	58.25	-15.75	74	48.04	35.12	10.98	35.89	102	293	P	V
		5350	45.39	-8.61	54	35.18	35.12	10.98	35.89	102	293	A	V
	*	5320	99.66	-	-	89.56	35.09	10.93	35.92	102	293	P	V
		5320	92.09	-	-	81.99	35.09	10.93	35.92	102	293	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10518.52	43.07	-25.23	68.3	56.62	38.01	12.43	63.99	100	360	P	H
		10518.52	43.93	-24.37	68.3	57.48	38.01	12.43	63.99	100	360	P	V
802.11a CH 60 5300MHz		10600.1	45.24	-28.76	74	58.64	38.04	12.52	63.96	100	360	P	H
		10600.1	44.55	-29.45	74	57.95	38.04	12.52	63.96	100	360	P	V
802.11a CH 64 5320MHz		10638.63	42.84	-31.16	74	56.18	38.06	12.55	63.95	100	360	P	H
		10638.63	43.25	-30.75	74	56.59	38.06	12.55	63.95	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz		5353.5	66.6	-7.4	74	56.39	35.12	10.98	35.89	100	69	P	H
		5350	50.12	-3.88	54	39.91	35.12	10.98	35.89	100	69	A	H
	*	5320	109.58	-	-	99.48	35.09	10.93	35.92	100	69	P	H
		5320	102.85	-	-	92.75	35.09	10.93	35.92	100	69	A	H
		5351.2	60.3	-13.7	74	50.09	35.12	10.98	35.89	100	346	P	V
		5350.1	45.25	-8.75	54	35.04	35.12	10.98	35.89	100	346	A	V
	*	5320	101.69	-	-	91.59	35.09	10.93	35.92	100	346	P	V
		5320	94.62	-	-	84.52	35.09	10.93	35.92	100	346	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10518.52	44.26	-24.04	68.3	57.81	38.01	12.43	63.99	100	360	P	H
CH 52 5260MHz		10518.52	43.96	-24.34	68.3	57.51	38.01	12.43	63.99	100	360	P	V
802.11n HT20		10600.1	44.26	-29.74	74	66.85	38.04	0	60.63	100	360	P	H
CH 60 5300MHz		10600.1	43.91	-30.09	74	66.5	38.04	0	60.63	100	360	P	V
802.11n HT20		10640	43.21	-30.79	74	56.55	38.06	12.55	63.95	100	360	P	H
CH 64 5320MHz		10640	43.65	-30.35	74	56.99	38.06	12.55	63.95	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5149.98	54.21	-19.79	74	44.61	34.93	10.69	36.02	113	73	P	H
		5136.16	44.73	-9.27	54	35.18	34.91	10.67	36.03	113	73	A	H
	*	5314	104	-	-	93.9	35.09	10.93	35.92	113	73	P	H
		5314	96.92	-	-	86.82	35.09	10.93	35.92	113	73	A	H
		5351.1	67.28	-6.72	74	57.07	35.12	10.98	35.89	113	73	P	H
		5350.1	49.77	-4.23	54	39.56	35.12	10.98	35.89	113	73	A	H
		5118.24	54.96	-19.04	74	45.45	34.9	10.65	36.04	100	32	P	V
		5116.48	44.37	-9.63	54	34.86	34.9	10.65	36.04	100	32	A	V
	*	5314	95.76	-	-	85.66	35.09	10.93	35.92	100	32	P	V
		5314	88.67	-	-	78.57	35.09	10.93	35.92	100	32	A	V
		5352.3	59.6	-14.4	74	49.39	35.12	10.98	35.89	100	32	P	V
		5353.2	45.06	-8.94	54	34.85	35.12	10.98	35.89	100	32	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10538.54	44.53	-23.77	68.3	58.04	38.02	12.45	63.98	100	360	P	H
		10538.54	43.48	-24.82	68.3	56.99	38.02	12.45	63.98	100	360	P	V
802.11n HT40 CH 62 5310MHz		10618.62	43.6	-30.4	74	56.97	38.05	12.53	63.95	100	360	P	H
		10618.62	43.81	-30.19	74	57.18	38.05	12.53	63.95	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5145.92	55.95	-18.05	74	46.35	34.93	10.69	36.02	112	53	P	H
		5128	45.84	-8.16	54	36.29	34.91	10.67	36.03	112	53	A	H
	*	5284	100.93	-	-	90.93	35.06	10.88	35.94	112	53	P	H
		5284	93.16	-	-	83.16	35.06	10.88	35.94	112	53	A	H
		5386.32	59.9	-14.1	74	49.57	35.16	11.04	35.87	112	53	P	H
		5350	50.64	-3.36	54	40.43	35.12	10.98	35.89	112	53	A	H
		5126.56	54.68	-19.32	74	45.13	34.91	10.67	36.03	335	257	P	V
		5147.52	45.1	-8.9	54	35.5	34.93	10.69	36.02	335	257	A	V
	*	5290	95.8	-	-	85.8	35.06	10.88	35.94	335	257	P	V
		5290	88.85	-	-	78.85	35.06	10.88	35.94	335	257	A	V
		5386.86	56	-18	74	45.67	35.16	11.04	35.87	335	257	P	V
		5350.5	47.2	-6.8	54	36.99	35.12	10.98	35.89	335	257	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**UNII-2A 5250~5350MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10578.58	42.84	-25.46	68.3	56.3	38.03	12.48	63.97	100	360	P	H
CH 58 5290MHz		10578.58	43.21	-25.09	68.3	56.67	38.03	12.48	63.97	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		5458.8	58.85	-15.15	74	48.38	35.22	11.08	35.83	103	59	P	H
		5469.68	64.68	-3.62	68.3	54.17	35.24	11.09	35.82	103	59	P	H
		5459.92	48.6	-5.4	54	38.13	35.22	11.08	35.83	103	59	A	H
	*	5500	111.46	-	-	100.89	35.27	11.1	35.8	103	59	P	H
		5500	104.12	-	-	93.55	35.27	11.1	35.8	103	59	A	H
		5455.6	54.73	-19.27	74	44.26	35.22	11.08	35.83	326	255	P	V
		5467.44	60.27	-8.03	68.3	49.76	35.24	11.09	35.82	326	255	P	V
		5460	45.17	-8.83	54	34.7	35.22	11.08	35.83	326	255	A	V
	*	5500	107.66	-	-	97.09	35.27	11.1	35.8	326	255	P	V
		5500	100.81	-	-	90.24	35.27	11.1	35.8	326	255	A	V
802.11a CH 140 5700MHz		5725.48	64.57	-3.73	68.3	53.67	35.4	11.27	35.77	126	61	P	H
	*	5704	110.42	-	-	99.53	35.4	11.25	35.76	126	61	P	H
		5704	103.52	-	-	92.63	35.4	11.25	35.76	126	61	A	H
		5725.4	63.6	-4.7	68.3	52.7	35.4	11.27	35.77	335	254	P	V
	*	5704	107.28	-	-	96.39	35.4	11.25	35.76	335	254	P	V
		5704	99.75	-	-	88.86	35.4	11.25	35.76	335	254	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11004	44.66	-29.34	74	57.4	38.2	12.89	63.83	100	360	P	H
		11004	43.71	-30.29	74	56.45	38.2	12.89	63.83	100	360	P	V
802.11a CH 116 5580MHz		11159.16	44.39	-29.61	74	56.84	38.27	13.05	63.77	100	360	P	H
		11158	44.03	-29.97	74	56.48	38.27	13.05	63.77	100	360	P	V
802.11a CH 140 5700MHz		11399.39	42.67	-31.33	74	54.72	38.36	13.28	63.69	100	360	P	H
		11399.39	45.43	-28.57	74	57.48	38.36	13.28	63.69	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5459.12	56.72	-17.28	74	46.25	35.22	11.08	35.83	116	72	P	H
		5468.4	65.28	-3.02	68.3	54.77	35.24	11.09	35.82	116	72	P	H
		5458.8	47.18	-6.82	54	36.71	35.22	11.08	35.83	116	72	A	H
	*	5500	109.39	-	-	98.82	35.27	11.1	35.8	116	72	P	H
		5500	101.9	-	-	91.33	35.27	11.1	35.8	116	72	A	H
		5455.12	53.46	-20.54	74	42.99	35.22	11.08	35.83	276	256	P	V
		5466.32	60.67	-7.63	68.3	50.16	35.24	11.09	35.82	276	256	P	V
		5459.76	44.66	-9.34	54	34.19	35.22	11.08	35.83	276	256	A	V
	*	5500	105.1	-	-	94.53	35.27	11.1	35.8	276	256	P	V
		5500	97.99	-	-	87.42	35.27	11.1	35.8	276	256	A	V
802.11n HT20 CH 140 5700MHz		5731.88	64.59	-3.71	68.3	53.69	35.4	11.27	35.77	127	59	P	H
	*	5704	108.77	-	-	97.88	35.4	11.25	35.76	127	59	P	H
		5704	101.5	-	-	90.61	35.4	11.25	35.76	127	59	A	H
		5733.4	61.7	-6.6	68.3	50.8	35.4	11.27	35.77	333	253	P	V
	*	5698	105.48	-	-	94.6	35.4	11.23	35.75	333	253	P	V
		5698	97.85	-	-	86.97	35.4	11.23	35.75	333	253	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		10999	43.89	-30.11	74	56.63	38.2	12.89	63.83	100	360	P	H
		10999	44.92	-29.08	74	57.66	38.2	12.89	63.83	100	360	P	V
802.11n HT20 CH 116 5580MHz		11159.16	43.46	-30.54	74	55.91	38.27	13.05	63.77	100	360	P	H
		11159.16	43.97	-30.03	74	56.42	38.27	13.05	63.77	100	360	P	V
802.11n HT20 CH 140 5700MHz		11399.39	43.72	-30.28	74	55.77	38.36	13.28	63.69	100	360	P	H
		11399.39	43.8	-30.2	74	55.85	38.36	13.28	63.69	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5457.36	62.01	-11.99	74	51.54	35.22	11.08	35.83	102	79	P	H
		5464.08	64.39	-3.91	68.3	53.88	35.24	11.09	35.82	102	79	P	H
		5457.04	47.81	-6.19	54	37.34	35.22	11.08	35.83	102	79	A	H
	*	5512	104.93	-	-	94.36	35.27	11.1	35.8	102	79	P	H
		5512	98.25	-	-	87.68	35.27	11.1	35.8	102	79	A	H
		5764.12	54.8	-13.5	68.3	43.88	35.4	11.32	35.8	102	79	P	H
		5455.6	55.41	-18.59	74	44.94	35.22	11.08	35.83	322	230	P	V
		5468.4	61.74	-6.56	68.3	51.23	35.24	11.09	35.82	322	230	P	V
		5460	44.55	-9.45	54	34.08	35.22	11.08	35.83	322	230	A	V
	*	5512	102.71	-	-	92.14	35.27	11.1	35.8	322	230	P	V
		5512	95.17	-	-	84.6	35.27	11.1	35.8	322	230	A	V
		5743.24	54.76	-13.54	68.3	43.84	35.4	11.3	35.78	322	230	P	V
802.11n HT40 CH 134 5670MHz		5382.96	52.96	-21.04	74	42.63	35.16	11.04	35.87	100	68	P	H
		5469.2	53.42	-14.88	68.3	42.91	35.24	11.09	35.82	100	68	P	H
		5459.12	44.23	-9.77	54	33.76	35.22	11.08	35.83	100	68	A	H
	*	5668	107.55	-	-	96.68	35.4	11.21	35.74	100	68	P	H
		5668	100.28	-	-	89.41	35.4	11.21	35.74	100	68	A	H
		5731.48	65.05	-3.25	68.3	54.15	35.4	11.27	35.77	100	68	P	H
		5391.12	53.04	-20.96	74	42.71	35.16	11.04	35.87	305	244	P	V
		5465.68	51.55	-16.75	68.3	41.04	35.24	11.09	35.82	305	244	P	V
		5422.48	43.79	-10.21	54	33.38	35.19	11.07	35.85	305	244	A	V
	*	5668	102.47	-	-	91.6	35.4	11.21	35.74	305	244	P	V
		5668	95.07	-	-	84.2	35.4	11.21	35.74	305	244	A	V
		5734.52	58.35	-9.95	68.3	47.43	35.4	11.3	35.78	305	244	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11019.02	43.09	-30.91	74	55.8	38.2	12.91	63.82	100	360	P	H
		11019.02	42.78	-31.22	74	55.49	38.2	12.91	63.82	100	360	P	V
802.11n HT40 CH 110 5550MHz		11099.1	43.22	-30.78	74	55.78	38.24	12.99	63.79	100	360	P	H
		11099.1	42.62	-31.38	74	55.18	38.24	12.99	63.79	100	360	P	V
802.11n HT40 CH 134 5670MHz		11339.33	43.36	-30.64	74	55.53	38.33	13.21	63.71	100	360	P	H
		11339.33	43.69	-30.31	74	55.86	38.33	13.21	63.71	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5455.44	62.03	-11.97	74	51.56	35.22	11.08	35.83	116	75	P	H
		5465.68	63.65	-4.65	68.3	53.14	35.24	11.09	35.82	116	75	P	H
		5457.52	50.96	-3.04	54	40.49	35.22	11.08	35.83	116	75	A	H
	*	5536	100.8	-	-	90.17	35.3	11.11	35.78	116	75	P	H
		5536	92.23	-	-	81.6	35.3	11.11	35.78	116	75	A	H
		5727.16	53.79	-14.51	68.3	42.89	35.4	11.27	35.77	116	75	P	H
		5459.6	58.51	-15.49	74	48.04	35.22	11.08	35.83	100	296	P	V
		5463.12	61.24	-7.06	68.3	50.73	35.24	11.09	35.82	100	296	P	V
		5455.6	47.69	-6.31	54	37.22	35.22	11.08	35.83	100	296	A	V
	*	5524	94.66	-	-	84.06	35.29	11.1	35.79	100	296	P	V
		5524	87.66	-	-	77.06	35.29	11.1	35.79	100	296	A	V
		5751.64	54.73	-13.57	68.3	43.81	35.4	11.32	35.8	100	296	P	V
802.11ac VHT80 CH 122 5610MHz		5456.72	56.65	-17.35	74	46.18	35.22	11.08	35.83	104	71	P	H
		5470	56.92	-11.38	68.3	46.41	35.24	11.09	35.82	104	71	P	H
		5457.68	47.95	-6.05	54	37.48	35.22	11.08	35.83	104	71	A	H
	*	5608	105.18	-	-	94.42	35.37	11.13	35.74	104	71	P	H
		5608	97.95	-	-	87.19	35.37	11.13	35.74	104	71	A	H
		5741.56	60.03	-8.27	68.3	49.11	35.4	11.3	35.78	104	71	P	H
		5414.48	52.92	-21.08	74	42.51	35.19	11.07	35.85	100	351	P	V
		5467.28	52.6	-15.7	68.3	42.09	35.24	11.09	35.82	100	351	P	V
		5456.4	44.83	-9.17	54	34.36	35.22	11.08	35.83	100	351	A	V
	*	5614	97.61	-	-	86.85	35.37	11.13	35.74	100	351	P	V
		5614	89.85	-	-	79.09	35.37	11.13	35.74	100	351	A	V
		5726.28	57.35	-10.95	68.3	46.45	35.4	11.27	35.77	100	351	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11059.05	43.62	-30.38	74	56.25	38.22	12.95	63.8	100	360	P	H
CH 106 5530MHz		11059.05	42.91	-31.09	74	55.54	38.22	12.95	63.8	100	360	P	V
802.11ac VHT80		11219.21	43.37	-30.63	74	55.73	38.29	13.1	63.75	100	360	P	H
CH 122 5610MHz		11219.21	43.98	-30.02	74	56.34	38.29	13.1	63.75	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz	*	5722	114.59	-	-	97.65	35.4	9.01	27.47	300	0	P	H
	*	5722	107.41	-	-	90.47	35.4	9.01	27.47	300	0	A	H
	*	5722	111.64	-	-	94.7	35.4	9.01	27.47	100	0	P	V
	*	5722	104.53	-	-	87.59	35.4	9.01	27.47	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144		11439.44	43.57	-30.43	74	55.57	38.37	13.31	63.68	100	360	P	H
5720MHz		11439.44	43.18	-30.82	74	55.18	38.37	13.31	63.68	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n	*	5716	114.6	-	-	97.67	35.4	9	27.47	300	0	P	H
HT20	*	5716	106.69	-	-	89.76	35.4	9	27.47	300	0	A	H
CH 144	*	5722	111.41	-	-	94.47	35.4	9.01	27.47	100	0	P	V
5720MHz	*	5722	103.5	-	-	86.56	35.4	9.01	27.47	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11439.44	42.92	-31.08	74	54.92	38.37	13.31	63.68	100	360	P	H
CH 144 5720MHz		11439.44	43.62	-30.38	74	55.62	38.37	13.31	63.68	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n	*	5704	112.29	-	-	95.37	35.4	9	27.48	300	0	P	H
HT40	*	5704	104.48	-	-	87.56	35.4	9	27.48	300	0	A	H
CH 142	*	5710	108.27	-	-	91.35	35.4	9	27.48	100	0	P	V
5710MHz	*	5710	100.48	-	-	83.56	35.4	9	27.48	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11419.42	43.97	-30.03	74	55.99	38.37	13.29	63.68	100	360	P	H
CH 142 5710MHz		11419.42	44.61	-29.39	74	56.63	38.37	13.29	63.68	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac	*	5698	109.4	-	-	92.5	35.4	8.98	27.48	300	0	P	H
VHT80	*	5698	101.85	-	-	84.95	35.4	8.98	27.48	300	0	A	H
CH 138	*	5692	105.96	-	-	89.06	35.4	8.98	27.48	100	0	P	V
5690MHz	*	5692	98.41	-	-	81.51	35.4	8.98	27.48	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**UNII-2C - Straddle Channel****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11379.38	42.44	-31.56	74	54.52	38.35	13.26	63.69	100	360	P	H
CH 138 5690MHz		11379.38	43.57	-30.43	74	55.65	38.35	13.26	63.69	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 LF		112.45	21.09	-22.41	43.5	41.3	17.03	1.54	38.78	-	-	P	H
		170.65	22.03	-21.47	43.5	42.53	16.09	1.9	38.49	-	-	P	H
		214.3	21.38	-22.12	43.5	41.18	16.37	2.14	38.31	-	-	P	H
		354.95	20.65	-25.35	46	34.82	20.64	2.76	37.57	-	-	P	H
		768.17	27.76	-18.24	46	33.48	25.97	4.06	35.75	-	-	P	H
		869.05	28.03	-17.97	46	30.3	26.58	4.31	33.16	100	0	P	H
		37.76	22.2	-17.8	40	39.86	20.4	0.84	38.9	-	-	P	V
		109.54	22.98	-20.52	43.5	43.16	17.07	1.53	38.78	-	-	P	V
		170.65	18.81	-24.69	43.5	39.31	16.09	1.9	38.49	-	-	P	V
		211.39	20.48	-23.02	43.5	40.46	16.19	2.12	38.29	-	-	P	V
		473.29	21.53	-24.47	46	31.63	23.22	3.2	36.52	-	-	P	V
		829.28	27.84	-18.16	46	30.86	26.34	4.22	33.58	145	252	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location

UNII-2C - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz & Part 27L Band 4 BW=20M		5452.88	56.63	-17.37	74	46.16	35.22	11.08	35.83	100	85	P	H
		5466	64.43	-3.87	68.3	53.92	35.24	11.09	35.82	100	85	P	H
		5458.64	46.81	-7.19	54	36.34	35.22	11.08	35.83	100	85	A	H
		5500	107.77	-	-	97.2	35.27	11.1	35.8	100	85	P	H
		5500	101.22	-	-	90.65	35.27	11.1	35.8	100	85	A	H
		5368.4	54.4	-19.6	74	44.13	35.14	11.01	35.88	400	207	P	V
		5469.52	63.6	-4.7	68.3	53.09	35.24	11.09	35.82	400	207	P	V
		5458.48	45.05	-8.95	54	34.58	35.22	11.08	35.83	400	207	A	V
		5500	105.81	-	-	95.24	35.27	11.1	35.8	400	207	P	V
		5500	98.58	-	-	88.01	35.27	11.1	35.8	400	207	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz & Part 27L Band 4 BW=20M		10999	44	-30	74	56.74	38.2	12.89	63.83	100	360	P	H
		10999	42.98	-31.02	74	55.72	38.2	12.89	63.83	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	96.88	1.396	0.717	0.75KHz
802.11n HT20	96.68	1.309	0.764	0.82KHz
802.11n HT40	93.52	0.648	1.544	1.6KHz
802.11ac VHT80	87.79	0.323	3.094	3.3KHz

802.11a

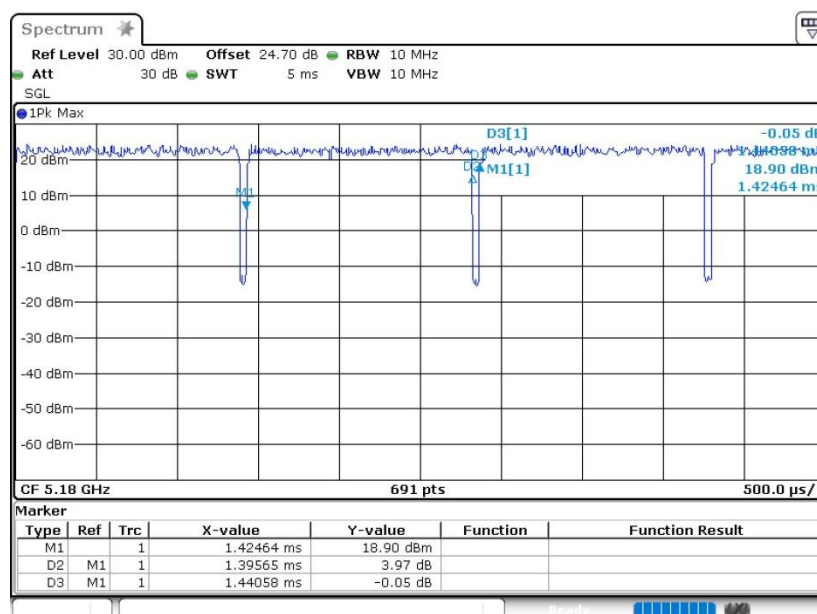




802.11n HT20

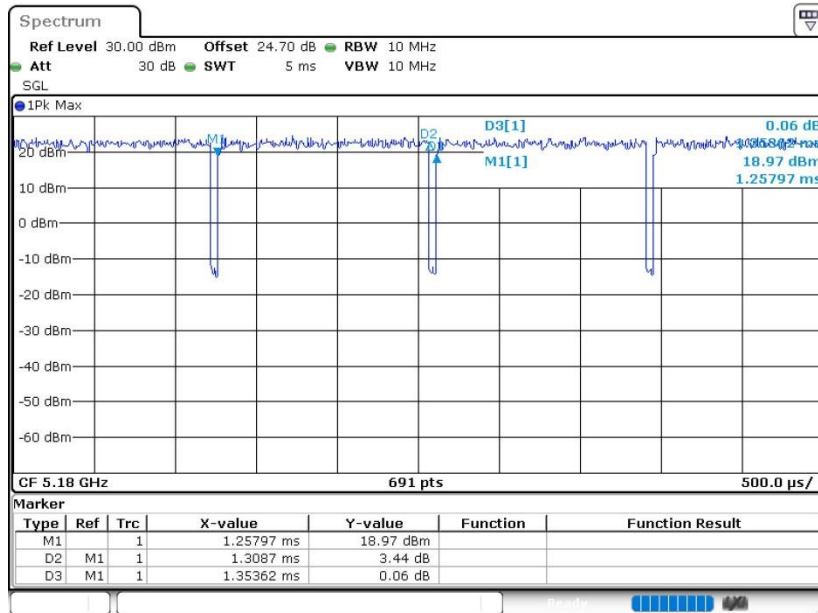

802.11n HT40

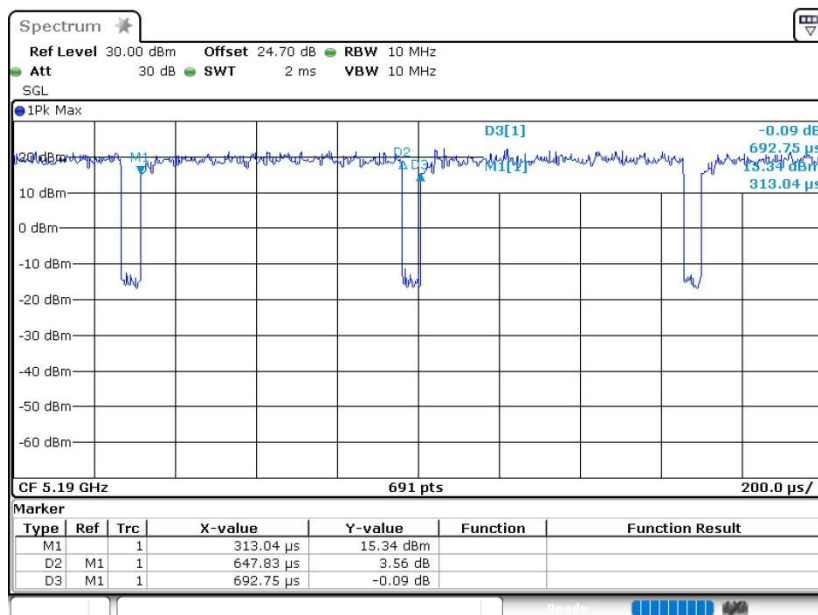



802.11ac VHT80

