

# RF Exposure Evaluation

## Client Information:

Applicant: Shenzhen Romoss Technology Co.,Ltd  
Room1601, BLOCK B, Building 7,Shenzhen International Innovation Valley,  
Applicant add.: Dashi 1st Road Xili community, Xili Street, Nanshan , Shenzhen › Guangdong,  
P.R.China  
Manufacturer: Jiangmen Romoss Technology Co., Ltd.  
Manufacturer add.: Room 01-2, First floor, Building 8, No. 80, Renhe Road, Tangxia Town,  
Pengjiang District, Jiangmen City

## Product Information:

Product Name: Wireless Power Bank

Model No.: WSC05-131

Brand Name: ROMOSS

FCC ID: 2A6QM-WSC05-131

Applicable standards: FCC CFR 47 PART 1, § 1.1310  
KDB 680106 D01 Wireless Power Transfer v04

## Prepared By:

### Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District,  
Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Date of Receipt: Apr. 24, 2024

Date of Test: Apr. 24, 2024 ~ Apr. 30, 2024

Date of Issue: Apr. 30, 2024

Test Result: Pass

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:



Sean She

Approved by:



Eder Zhan



## TABLE OF CONTENTS

|     |                                                         |    |
|-----|---------------------------------------------------------|----|
| 1   | TEST FACILITY                                           | 4  |
| 1.1 | Deviation from standard                                 | 4  |
| 1.2 | Abnormalities from standard conditions                  | 4  |
| 1.3 | Test Location                                           | 4  |
| 2   | GENERAL INFORMATION                                     | 5  |
| 2.1 | Measuring Standard                                      | 6  |
| 2.2 | Requirements                                            | 6  |
| 2.3 | Test Setup                                              | 7  |
| 2.4 | Test Procedure                                          | 7  |
| 3   | Equipment Approval Considerations                       | 8  |
| 3.1 | Description of the test mode                            | 9  |
| 3.2 | Peripheral List                                         | 9  |
| 3.3 | Test Instruments list                                   | 9  |
| 3.4 | Compliance Location: Center vs Tip-Surface of the Probe | 10 |
| 3.5 | Test Result                                             | 12 |
| 4   | Test Setup photo                                        | 24 |



**Revision History**

| Revision | Issue Date    | Revisions     | Revised By |
|----------|---------------|---------------|------------|
| 00       | Apr. 30, 2024 | Initial Issue | Eder Zhan  |
|          |               |               |            |
|          |               |               |            |

## 1 TEST FACILITY

**The test facility is recognized, certified or accredited by the following organizations:**

**FCC-Registration No.: 251906 Designation Number: CN1376**

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**IC —Registration No.: 31737 CAB identifier: CN0165**

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

**A2LA-Lab Cert. No.: 7133.01**

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 1.1 Deviation from standard

None

### 1.2 Abnormalities from standard conditions

None

### 1.3 Test Location

**Guangdong Asia Hongke Test Technology Limited**

Address: B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

## 2 GENERAL INFORMATION

|                        |                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------|
| EUT Name:              | Wireless Power Bank                                                                                               |
| Model No:              | WSC05-131                                                                                                         |
| Serial Model:          | N/A                                                                                                               |
| Test sample(s) ID:     | AITSZ24042404001                                                                                                  |
| Sample(s) Status:      | Engineer sample                                                                                                   |
| Operation frequency:   | 110kHz-205kHz                                                                                                     |
| Modulation Technology: | ASK                                                                                                               |
| Antenna Type:          | loop coil Antenna                                                                                                 |
| Antenna gain:          | 0dBi                                                                                                              |
| Hardware version.:     | N/A                                                                                                               |
| Software version.:     | N/A                                                                                                               |
| Power supply:          | Input: 5V=2A/9V=2A(Type-C)<br>Output: 5V=3A/9V=2.22A/12V=1.67A(Type-C)<br>Wireless Output: 5W, 7.5W,10W, 15W      |
| Model different:       | N/A                                                                                                               |
| Note:                  | For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |

## 2.1 Measuring Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

## 2.2 Requirements

According to the item 3 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Mobile Device and Portable Device Configurations
- (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz
- (3) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the top surface.

### Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz)                                          | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                               |                               |                                     |                          |
| 0.3-3.0                                                        | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0-30                                                         | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1500                                                       | /                             | /                             | f/300                               | 6                        |
| 1500-100,000                                                   | /                             | /                             | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                       | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30                                                        | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                                       | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000                                                   | /                             | /                             | 1.0                                 | 30                       |


F=frequency in MHz  
 \*=Plane-wave equivalent power density  
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

Note 1: f = frequency in MHz; \*Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

## 2.3 Test Setup

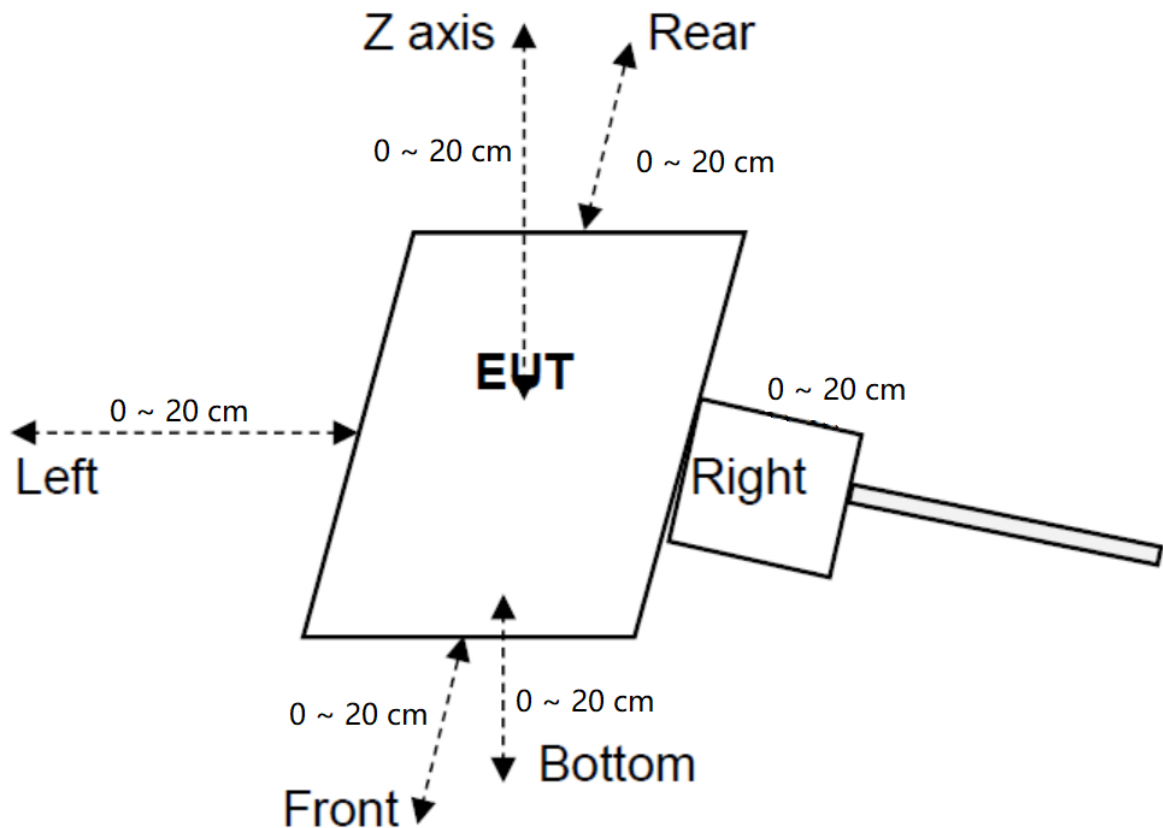

## 2.4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (2cm increments from 0 ~ 20 cm for all sides) which is between the edge of the charger and the geometric edge of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

Remark:

1. The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.
2. When using the testing instrument MAGPy for testing, when selecting compliance location as probe tip in the settings, the measured value is extrapolated to 0mm.

### 3 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

| Requirements of section 3 of KDB 680106 D01                                                                                                                                          | Yes / No | Description                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------|
| Mobile Device and Portable Device Configurations                                                                                                                                     | Yes      | Portable Device                                                       |
| Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz                                                                                                  | Yes      | The device operate in the frequency range 110kHz-205kHz               |
| RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely. | No       | The EUT H-field and E-field strengths at 0 cm surrounding the device. |



### 3.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

| Test Mode                                                                                 | Description                                      |            |
|-------------------------------------------------------------------------------------------|--------------------------------------------------|------------|
| Mode 1                                                                                    | Adapter + EUT + Wireless charger receiver+ phone | Record     |
| Mode 2                                                                                    | Test the EUT in idle mode.                       | Pre-tested |
| Note: All test modes were pre-tested, but we only recorded the worst case in this report. |                                                  |            |

### 3.2 Peripheral List

| No. | Equipment   | Manufacturer | Model No.         | Serial No. | Power cord | signal cable |
|-----|-------------|--------------|-------------------|------------|------------|--------------|
| 1   | Smart phone | Apple        | iphone 14 pro max | N/A        | N/A        | N/A          |

### 3.3 Test Instruments list

| Test Equipment                               | Manufacturer | Model No.                        | SN.         | Cal. Date (cm-dd-yy) | Cal. Due date (cm-dd-yy) |
|----------------------------------------------|--------------|----------------------------------|-------------|----------------------|--------------------------|
| Magnetic Amplitude and Gradient Probe System | SPEAG        | MAGPy-8H3D+E3D V2 & MAGPy-DAS V2 | 3107 & 3097 | 03.15.2024           | 03.14.2025               |

| Parameter                           | Specs                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------------|
| PROBE DESIGN                        |                                                                                             |
| Diameter                            | 60 mm                                                                                       |
| 8 isotropic <i>H</i> -field sensors | concentric loops of 1 cm <sup>2</sup> arranged at the corner of a cube of 22 mm side length |
| 1 isotropic <i>E</i> -field sensor  | orthogonal dipole/monopole (arm length: 50 mm)                                              |
| Measurement center                  | 18.5 mm from the probe tip                                                                  |
| Temperature range                   | 0–40 °C                                                                                     |
| Dimensions                          | 110 × 635 × 35 mm<br>(MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)                                     |
| <i>H</i> -FIELD SPECIFICATION       |                                                                                             |
| Frequency range                     | 3 kHz–10 MHz                                                                                |
| Measurement range                   | 0.1–3200 A/m, 0.12 μT–4 mT                                                                  |
| Gradient range                      | 0–80 T/m/T                                                                                  |
| <i>E</i> -FIELD SPECIFICATION       |                                                                                             |
| Frequency range                     | 3 kHz–10 MHz                                                                                |
| Measurement range                   | 0.08–2000 V/m                                                                               |

### 3.4 Compliance Location: Center vs Tip-Surface of the Probe

The following information is from the equipment manual:

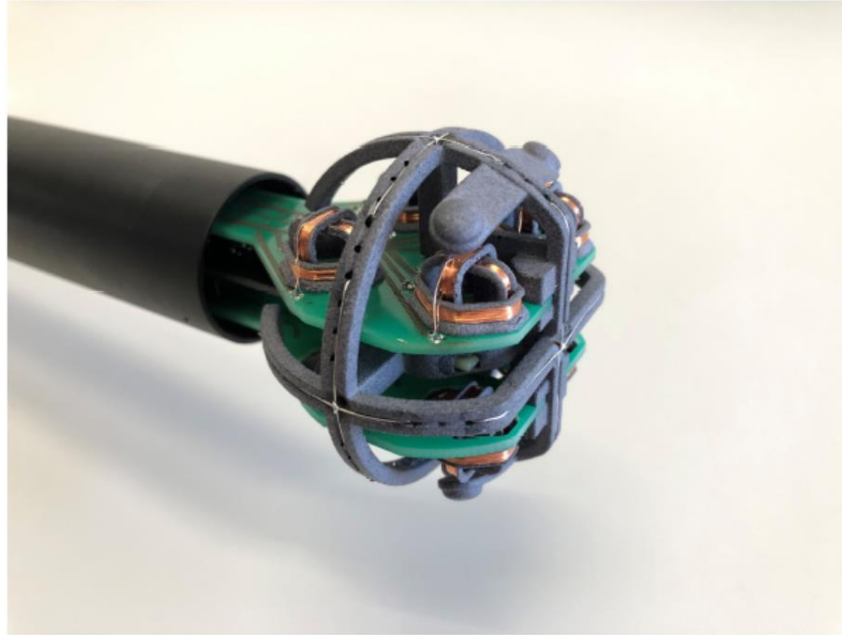


Figure 2.1: MAGPy-8H3D+E3D V2 probe, without the casing

In the MAGPy V2.0 implementation, the  $H$ -field is evaluated at the center of the probe (which is 18.5mm above the surface of its tip) and also at the surface of its tip.

In the MAGPy V2.0 implementation, the  $H$ -field is evaluated at the center of the probe (which is 18.5 mm above the surface of its tip) and also at the surface of its tip.

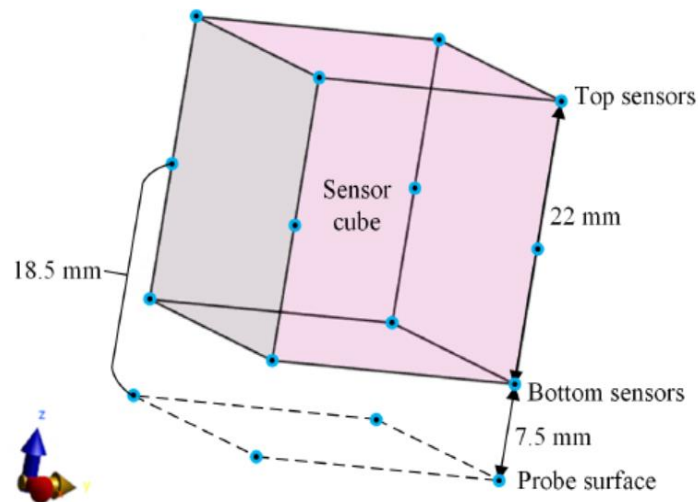


Figure 2.5: Extrapolation of the total  $H$ -field at the probe surface is made at each pair of sensors (i.e., bottom and top sensors) around the sensor cube

The total  $H$ -field at the tip-surface  $H_{tip-surface}$  can be extrapolated using the total  $H$ -field measured at the top and bottom sensors (Figure 2.5),  $H_{top}$  and  $H_{bottom}$ , as well as the normalized  $H$ -field gradient  $G_n$ . The field extrapolation formula is a polynomial function of  $G_n$  ( $\Delta d = 18.5$  mm) [7].

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i \quad (1.6)$$

The polynomial coefficients  $c_i$  are given in Table 2.2. They have been determined from simulations of 70 coils covering normalized gradients up to 80 for the 97.5<sup>th</sup> percentile (Figure 2.6). This provides a conservative estimate of the total  $H$ -field at the tip-surface without large overestimation.

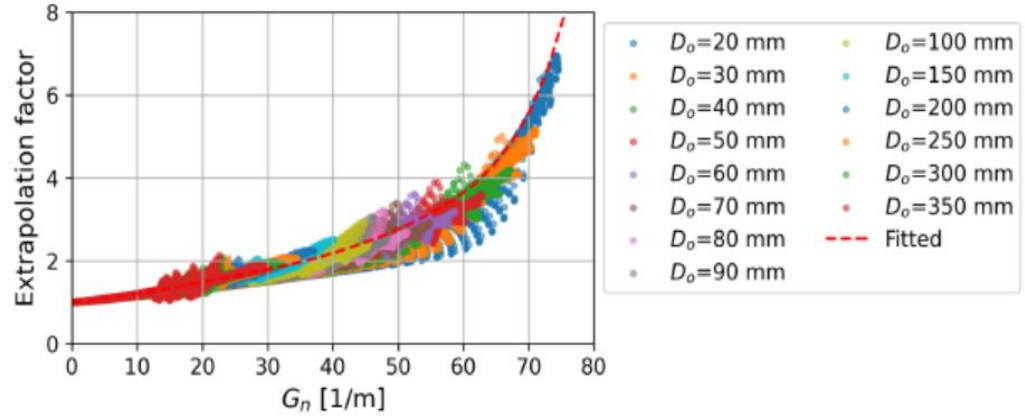


Figure 2.6: Extrapolation factors (i.e., ratios between the simulated results of  $H_{tip-surface}$  and  $\frac{H_{bottom} + H_{top}}{2}$ ) plotted as a function of the normalized  $H$ -field gradient. The data are from simulations of 70 coils with varying outer diameters  $D_o$  and filling ratios (0.1–0.9). The predication of the polynomial function  $\sum_{i=0}^7 c_i (G_n \Delta d)^i$  with coefficients fitted for 97.5<sup>th</sup> percentile (i.e., the red dashed line) is also shown.

| Coefficient | Value |
|-------------|-------|
| $c_0$       | 1.00  |
| $c_1$       | 1.00  |
| $c_2$       | -1.01 |
| $c_3$       | 15.9  |
| $c_4$       | -50.8 |
| $c_5$       | 74.7  |
| $c_6$       | -51.4 |
| $c_7$       | 13.7  |

Table 2.2: Coefficients of the polynomial function for the H-field extrapolation to the tip-surface of the probe, determined with 0.975 quantile regression (i.e., the 97.5<sup>th</sup> percentile)

### 3.5 Test Result

| MPE               |                |                     |               |               |
|-------------------|----------------|---------------------|---------------|---------------|
| Evaluate distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 0cm               | < 1%           | Top                 | 12.66         | 1.34          |
| 0cm               | < 1%           | Bottom              | 12.87         | 1.45          |
| 0cm               | < 1%           | Left                | 13.04         | 1.34          |
| 0cm               | < 1%           | Right               | 12.99         | 1.42          |
| 0cm               | < 1%           | Front               | 12.83         | 1.45          |
| 0cm               | < 1%           | Rear                | 12.76         | 1.54          |
| Limit             |                |                     | 614           | 1.63          |
| Margin Limit (%)  |                |                     | 2.12%         | 94.60%        |

| MPE               |                |                     |               |               |
|-------------------|----------------|---------------------|---------------|---------------|
| Evaluate distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 0cm               | < 50%          | Top                 | 12.67         | 1.39          |
| 0cm               | < 50%          | Bottom              | 12.50         | 1.30          |
| 0cm               | < 50%          | Left                | 12.65         | 1.36          |
| 0cm               | < 50%          | Right               | 12.63         | 1.07          |
| 0cm               | < 50%          | Front               | 12.70         | 1.34          |
| 0cm               | < 50%          | Rear                | 12.64         | 1.32          |
| Limit             |                |                     | 614           | 1.63          |
| Margin Limit (%)  |                |                     | 2.07%         | 85.00%        |

| MPE               |                |                     |               |               |
|-------------------|----------------|---------------------|---------------|---------------|
| Evaluate distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 0cm               | < 99%          | Top                 | 12.62         | 1.40          |
| 0cm               | < 99%          | Bottom              | 12.49         | 1.37          |
| 0cm               | < 99%          | Left                | 12.61         | 1.49          |
| 0cm               | < 99%          | Right               | 12.54         | 0.77          |
| 0cm               | < 99%          | Front               | 12.71         | 1.61          |
| 0cm               | < 99%          | Rear                | 12.69         | 1.13          |
| Limit             |                |                     | 614           | 1.63          |
| Margin Limit (%)  |                |                     | 2.07%         | 98.98%        |

Note: The distance at 0mm cannot be measured directly and is derived from the following extrapolation formula:

Estimated value (0cm) = Measured value(2cm)\*Measured value(4cm) / Measured value(6cm)

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 2cm              | < 1%           | Top                 | 12.53         | 1.27          |
| 2cm              | < 1%           | Bottom              | 12.53         | 1.28          |
| 2cm              | < 1%           | Left                | 12.56         | 1.30          |
| 2cm              | < 1%           | Right               | 12.66         | 1.33          |
| 2cm              | < 1%           | Front               | 12.75         | 1.32          |
| 2cm              | < 1%           | Rear                | 12.93         | 1.33          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.11%         | 81.71%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 2cm              | < 50%          | Top                 | 12.60         | 1.32          |
| 2cm              | < 50%          | Bottom              | 12.53         | 1.08          |
| 2cm              | < 50%          | Left                | 12.51         | 1.23          |
| 2cm              | < 50%          | Right               | 12.42         | 1.01          |
| 2cm              | < 50%          | Front               | 12.37         | 1.15          |
| 2cm              | < 50%          | Rear                | 12.41         | 1.22          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.05%         | 80.98%        |

614 1.63

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 2cm              | < 99%          | Top                 | 12.46         | 1.49          |
| 2cm              | < 99%          | Bottom              | 12.39         | 1.09          |
| 2cm              | < 99%          | Left                | 12.51         | 1.29          |
| 2cm              | < 99%          | Right               | 12.35         | 0.89          |
| 2cm              | < 99%          | Front               | 12.37         | 1.10          |
| 2cm              | < 99%          | Rear                | 12.41         | 1.14          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.04%         | 91.41%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 4cm              | < 1%           | Top                 | 12.31         | 1.21          |
| 4cm              | < 1%           | Bottom              | 12.33         | 1.27          |
| 4cm              | < 1%           | Left                | 12.35         | 1.28          |
| 4cm              | < 1%           | Right               | 12.35         | 1.27          |
| 4cm              | < 1%           | Front               | 12.30         | 1.25          |
| 4cm              | < 1%           | Rear                | 12.38         | 1.19          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.02%         | 78.53%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 4cm              | < 50%          | Top                 | 12.25         | 1.27          |
| 4cm              | < 50%          | Bottom              | 12.16         | 1.30          |
| 4cm              | < 50%          | Left                | 12.27         | 1.22          |
| 4cm              | < 50%          | Right               | 12.22         | 1.16          |
| 4cm              | < 50%          | Front               | 12.39         | 1.25          |
| 4cm              | < 50%          | Rear                | 12.39         | 1.24          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.02%         | 79.75%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 4cm              | < 99%          | Top                 | 12.32         | 1.15          |
| 4cm              | < 99%          | Bottom              | 12.21         | 1.33          |
| 4cm              | < 99%          | Left                | 12.28         | 1.33          |
| 4cm              | < 99%          | Right               | 12.18         | 0.99          |
| 4cm              | < 99%          | Front               | 12.54         | 1.32          |
| 4cm              | < 99%          | Rear                | 12.37         | 1.21          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.04%         | 81.60%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 6cm              | < 1%           | Top                 | 12.18         | 1.15          |
| 6cm              | < 1%           | Bottom              | 12.14         | 1.17          |
| 6cm              | < 1%           | Left                | 12.08         | 1.21          |
| 6cm              | < 1%           | Right               | 12.04         | 1.18          |
| 6cm              | < 1%           | Front               | 12.03         | 1.17          |
| 6cm              | < 1%           | Rear                | 12.02         | 1.10          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.98%         | 74.23%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 6cm              | < 50%          | Top                 | 12.18         | 1.21          |
| 6cm              | < 50%          | Bottom              | 12.19         | 1.08          |
| 6cm              | < 50%          | Left                | 12.13         | 1.10          |
| 6cm              | < 50%          | Right               | 12.02         | 1.09          |
| 6cm              | < 50%          | Front               | 12.07         | 1.07          |
| 6cm              | < 50%          | Rear                | 12.16         | 1.15          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.99%         | 74.23%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 6cm              | < 99%          | Top                 | 12.16         | 1.22          |
| 6cm              | < 99%          | Bottom              | 12.11         | 1.06          |
| 6cm              | < 99%          | Left                | 12.18         | 1.15          |
| 6cm              | < 99%          | Right               | 12.00         | 1.14          |
| 6cm              | < 99%          | Front               | 12.20         | 0.90          |
| 6cm              | < 99%          | Rear                | 12.10         | 1.22          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.99%         | 74.85%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 8cm              | < 1%           | Top                 | 12.31         | 0.93          |
| 8cm              | < 1%           | Bottom              | 12.37         | 0.93          |
| 8cm              | < 1%           | Left                | 12.36         | 0.90          |
| 8cm              | < 1%           | Right               | 12.33         | 0.96          |
| 8cm              | < 1%           | Front               | 12.40         | 0.91          |
| 8cm              | < 1%           | Rear                | 12.37         | 0.90          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.02%         | 58.90%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 8cm              | < 50%          | Top                 | 12.32         | 0.89          |
| 8cm              | < 50%          | Bottom              | 12.28         | 0.87          |
| 8cm              | < 50%          | Left                | 12.27         | 0.89          |
| 8cm              | < 50%          | Right               | 12.26         | 0.86          |
| 8cm              | < 50%          | Front               | 12.42         | 0.96          |
| 8cm              | < 50%          | Rear                | 12.40         | 0.79          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.02%         | 58.90%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 8cm              | < 99%          | Top                 | 12.35         | 0.79          |
| 8cm              | < 99%          | Bottom              | 12.23         | 0.94          |
| 8cm              | < 99%          | Left                | 12.24         | 0.80          |
| 8cm              | < 99%          | Right               | 12.36         | 0.97          |
| 8cm              | < 99%          | Front               | 12.46         | 0.92          |
| 8cm              | < 99%          | Rear                | 12.46         | 0.74          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.03%         | 59.51%        |



| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 10cm             | < 1%           | Top                 | 12.02         | 1.05          |
| 10cm             | < 1%           | Bottom              | 12.15         | 1.06          |
| 10cm             | < 1%           | Left                | 12.19         | 1.06          |
| 10cm             | < 1%           | Right               | 12.08         | 1.05          |
| 10cm             | < 1%           | Front               | 12.26         | 0.98          |
| 10cm             | < 1%           | Rear                | 12.20         | 0.93          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.00%         | 65.03%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 10cm             | < 50%          | Top                 | 12.06         | 1.05          |
| 10cm             | < 50%          | Bottom              | 12.31         | 0.97          |
| 10cm             | < 50%          | Left                | 12.19         | 1.08          |
| 10cm             | < 50%          | Right               | 12.12         | 0.87          |
| 10cm             | < 50%          | Front               | 12.15         | 0.92          |
| 10cm             | < 50%          | Rear                | 12.22         | 0.92          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.00%         | 66.26%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 10cm             | < 99%          | Top                 | 12.04         | 1.04          |
| 10cm             | < 99%          | Bottom              | 12.28         | 0.90          |
| 10cm             | < 99%          | Left                | 12.24         | 1.03          |
| 10cm             | < 99%          | Right               | 12.07         | 0.95          |
| 10cm             | < 99%          | Front               | 12.25         | 0.99          |
| 10cm             | < 99%          | Rear                | 12.12         | 1.02          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.00%         | 63.80%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 12cm             | < 1%           | Top                 | 11.81         | 0.91          |
| 12cm             | < 1%           | Bottom              | 11.78         | 0.87          |
| 12cm             | < 1%           | Left                | 11.81         | 0.89          |
| 12cm             | < 1%           | Right               | 11.73         | 0.95          |
| 12cm             | < 1%           | Front               | 11.71         | 0.95          |
| 12cm             | < 1%           | Rear                | 11.60         | 0.95          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.92%         | 58.28%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 12cm             | < 50%          | Top                 | 11.87         | 0.92          |
| 12cm             | < 50%          | Bottom              | 11.86         | 0.90          |
| 12cm             | < 50%          | Left                | 11.96         | 0.92          |
| 12cm             | < 50%          | Right               | 11.78         | 0.97          |
| 12cm             | < 50%          | Front               | 11.68         | 0.88          |
| 12cm             | < 50%          | Rear                | 11.69         | 0.97          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.95%         | 59.51%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 12cm             | < 99%          | Top                 | 11.87         | 0.75          |
| 12cm             | < 99%          | Bottom              | 11.82         | 0.87          |
| 12cm             | < 99%          | Left                | 12.01         | 0.77          |
| 12cm             | < 99%          | Right               | 11.65         | 0.91          |
| 12cm             | < 99%          | Front               | 11.74         | 0.93          |
| 12cm             | < 99%          | Rear                | 11.77         | 0.96          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.96%         | 58.90%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 14cm             | < 1%           | Top                 | 11.57         | 0.79          |
| 14cm             | < 1%           | Bottom              | 11.55         | 0.72          |
| 14cm             | < 1%           | Left                | 11.46         | 0.67          |
| 14cm             | < 1%           | Right               | 11.53         | 0.67          |
| 14cm             | < 1%           | Front               | 11.42         | 0.72          |
| 14cm             | < 1%           | Rear                | 11.44         | 0.71          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.88%         | 48.47%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 14cm             | < 50%          | Top                 | 11.65         | 0.75          |
| 14cm             | < 50%          | Bottom              | 11.44         | 0.74          |
| 14cm             | < 50%          | Left                | 11.45         | 0.72          |
| 14cm             | < 50%          | Right               | 11.52         | 0.60          |
| 14cm             | < 50%          | Front               | 11.49         | 0.70          |
| 14cm             | < 50%          | Rear                | 11.54         | 0.73          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.90%         | 46.01%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 14cm             | < 99%          | Top                 | 11.63         | 0.69          |
| 14cm             | < 99%          | Bottom              | 11.35         | 0.73          |
| 14cm             | < 99%          | Left                | 11.46         | 0.81          |
| 14cm             | < 99%          | Right               | 11.49         | 0.58          |
| 14cm             | < 99%          | Front               | 11.52         | 0.70          |
| 14cm             | < 99%          | Rear                | 11.56         | 0.77          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.89%         | 49.69%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 16cm             | < 1%           | Top                 | 10.58         | 0.62          |
| 16cm             | < 1%           | Bottom              | 10.56         | 0.60          |
| 16cm             | < 1%           | Left                | 10.62         | 0.63          |
| 16cm             | < 1%           | Right               | 10.73         | 0.66          |
| 16cm             | < 1%           | Front               | 10.71         | 0.67          |
| 16cm             | < 1%           | Rear                | 10.84         | 0.69          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.77%         | 42.33%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 16cm             | < 50%          | Top                 | 10.59         | 0.68          |
| 16cm             | < 50%          | Bottom              | 10.65         | 0.66          |
| 16cm             | < 50%          | Left                | 10.63         | 0.59          |
| 16cm             | < 50%          | Right               | 10.89         | 0.61          |
| 16cm             | < 50%          | Front               | 10.79         | 0.65          |
| 16cm             | < 50%          | Rear                | 10.88         | 0.56          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.77%         | 41.72%        |

614

1.63

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 16cm             | < 99%          | Top                 | 10.53         | 0.66          |
| 16cm             | < 99%          | Bottom              | 10.73         | 0.68          |
| 16cm             | < 99%          | Left                | 10.63         | 0.71          |
| 16cm             | < 99%          | Right               | 10.95         | 0.68          |
| 16cm             | < 99%          | Front               | 10.74         | 0.52          |
| 16cm             | < 99%          | Rear                | 10.89         | 0.57          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.78%         | 43.56%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 18cm             | < 1%           | Top                 | 9.83          | 0.44          |
| 18cm             | < 1%           | Bottom              | 9.89          | 0.40          |
| 18cm             | < 1%           | Left                | 9.88          | 0.47          |
| 18cm             | < 1%           | Right               | 9.73          | 0.40          |
| 18cm             | < 1%           | Front               | 9.67          | 0.48          |
| 18cm             | < 1%           | Rear                | 9.73          | 0.43          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.61%         | 29.45%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 18cm             | < 50%          | Top                 | 9.85          | 0.46          |
| 18cm             | < 50%          | Bottom              | 9.73          | 0.54          |
| 18cm             | < 50%          | Left                | 9.93          | 0.47          |
| 18cm             | < 50%          | Right               | 9.66          | 0.29          |
| 18cm             | < 50%          | Front               | 9.65          | 0.51          |
| 18cm             | < 50%          | Rear                | 9.73          | 0.26          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.62%         | 33.13%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 18cm             | < 99%          | Top                 | 9.97          | 0.46          |
| 18cm             | < 99%          | Bottom              | 9.79          | 0.51          |
| 18cm             | < 99%          | Left                | 10.01         | 0.36          |
| 18cm             | < 99%          | Right               | 9.64          | 0.20          |
| 18cm             | < 99%          | Front               | 9.65          | 0.54          |
| 18cm             | < 99%          | Rear                | 9.79          | 0.40          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.63%         | 33.13%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 1%           | Top                 | 9.47          | 0.31          |
| 20cm             | < 1%           | Bottom              | 9.46          | 0.32          |
| 20cm             | < 1%           | Left                | 9.43          | 0.31          |
| 20cm             | < 1%           | Right               | 9.47          | 0.26          |
| 20cm             | < 1%           | Front               | 9.60          | 0.20          |
| 20cm             | < 1%           | Rear                | 9.69          | 0.25          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.58%         | 19.63%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 50%          | Top                 | 9.49          | 0.28          |
| 20cm             | < 50%          | Bottom              | 9.56          | 0.32          |
| 20cm             | < 50%          | Left                | 9.58          | 0.31          |
| 20cm             | < 50%          | Right               | 9.52          | 0.25          |
| 20cm             | < 50%          | Front               | 9.67          | 0.15          |
| 20cm             | < 50%          | Rear                | 9.86          | 0.07          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.61%         | 19.63%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 99%          | Top                 | 9.51          | 0.16          |
| 20cm             | < 99%          | Bottom              | 9.59          | 0.23          |
| 20cm             | < 99%          | Left                | 9.59          | 0.22          |
| 20cm             | < 99%          | Right               | 9.52          | 0.32          |
| 20cm             | < 99%          | Front               | 9.64          | 0.15          |
| 20cm             | < 99%          | Rear                | 9.75          | 0.18          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 1.59%         | 19.63%        |

E-field (V/m):

According to the following table, when we backward derivation 0cm, it should be 12.54(V/m), with a deviation from the actual test value of 5.18%.

| E-field (V/m) |       |       |     |
|---------------|-------|-------|-----|
| 0cm           | 2cm   | 4cm   | 6cm |
| 13.22         | 12.35 | 12.18 | 12  |

Note:

1. Estimated value (0cm) / Measured value(4cm) = Measured value(2cm) / Measured value(6cm)
2. Deviation = [Measured value(0cm) - Estimated value (0cm)] / Measured value(0cm)
3. Estimated value (0cm) =  $12.35 \times 12.18 / 12 = 12.54(\text{V/m})$
4. Deviation =  $(13.22 - 12.54) / 13.22 = 5.18\%$

H-field (A/m):

According to the following table, when we backward derivation 0cm, it should be 1.49(A/m), with a deviation from the actual test value of 9.70%.


| H-field (A/m) |      |      |      |
|---------------|------|------|------|
| 0cm           | 2cm  | 4cm  | 6cm  |
| 1.36          | 1.29 | 1.33 | 1.15 |

Note:

1. Estimated value (0cm) / Measured value(4cm) = Measured value(2cm) / Measured value(6cm)
2. Deviation = [Measured value(0cm) - Estimated value (0cm)] / Measured value(0cm)
3. Estimated value (0cm) =  $1.29 \times 1.33 / 1.15 = 1.49(\text{A/m})$
4. Deviation =  $(1.36 - 1.49) / 1.36 = 9.70\%$

## 4 Test Setup photo

Bottom

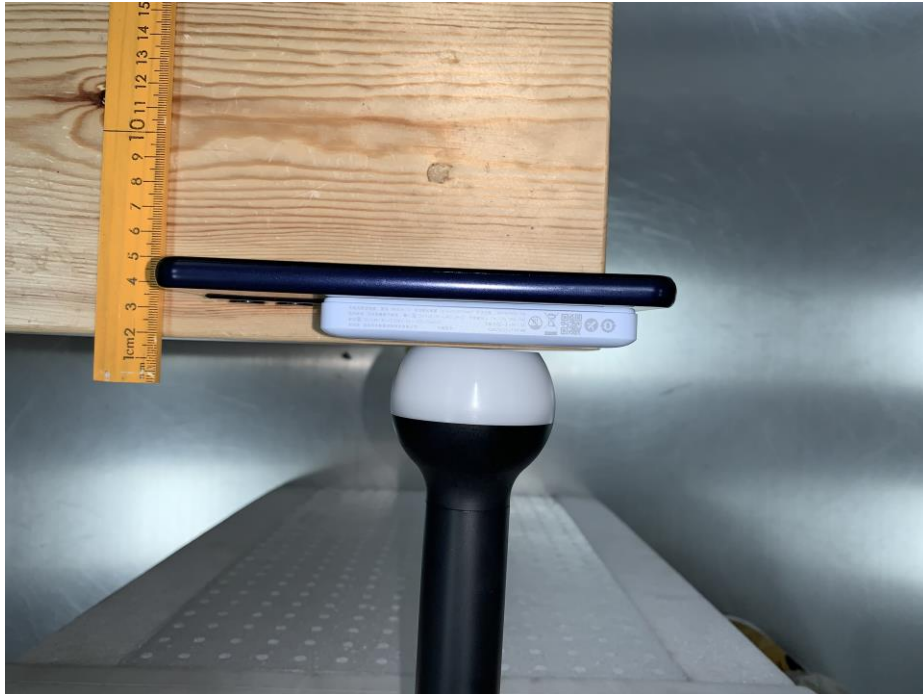

Front





Left



Rear



Right



Top



\*\*\*End of report\*\*\*