

FCC Test Report

Report No.: RF200420E01-1

FCC ID: I88EX3510-B0

Test Model: EX3510-B0

Received Date: Apr. 20, 2020

Test Date: Apr. 28 to May 27, 2020

Issued Date: June 11, 2020

Applicant: Zyxel Communications Corporation

Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwa.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Duty Cycle of Test Signal	15
3.4 Description of Support Units	16
3.4.1 Configuration of System under Test	17
3.5 General Description of Applied Standard and references	18
4 Test Types and Results	19
4.1 Radiated Emission and Bandedge Measurement.....	19
4.1.1 Limits of Radiated Emission and Bandedge Measurement	19
4.1.2 Test Instruments	20
4.1.3 Test Procedure	23
4.1.4 Deviation from Test Standard	24
4.1.5 Test Setup.....	24
4.1.6 EUT Operating Condition	25
4.1.7 Test Results	26
4.2 Conducted Emission Measurement	46
4.2.1 Limits of Conducted Emission Measurement	46
4.2.2 Test Instruments	46
4.2.3 Test Procedure	47
4.2.4 Deviation from Test Standard	47
4.2.5 Test Setup.....	47
4.2.6 EUT Operating Condition	47
4.2.7 Test Results	48
4.3 Transmit Power Measurement	50
4.3.1 Limits of Transmit Power Measurement	50
4.3.2 Test Setup.....	50
4.3.3 Test Instruments	50
4.3.4 Test Procedure	50
4.3.5 Deviation from Test Standard	50
4.3.6 EUT Operating Condition	50
4.3.7 Test Results	51
4.4 Occupied Bandwidth Measurement	55
4.4.1 Test Setup.....	55
4.4.2 Test Instruments	55
4.4.3 Test Procedure	55
4.4.4 Test Results	56
4.5 Peak Power Spectral Density Measurement	62
4.5.1 Limits of Peak Power Spectral Density Measurement	62
4.5.2 Test Setup.....	62
4.5.3 Test Instruments	62
4.5.4 Test Procedure	62
4.5.5 Deviation from Test Standard	63
4.5.6 EUT Operating Condition	63
4.5.7 Test Results	64
4.6 Frequency Stability Measurement.....	68
4.6.1 Limits of Frequency Stability Measurement	68

4.6.2 Test Setup.....	68
4.6.3 Test Instruments	68
4.6.4 Test Procedure	68
4.6.5 Deviation from Test Standard	68
4.6.6 EUT Operating Condition	68
4.6.7 Test Results	69
4.7 6dB Bandwidth Measurement	70
4.7.1 Limits of 6dB Bandwidth Measurement	70
4.7.2 Test Setup.....	70
4.7.3 Test Instruments	70
4.7.4 Test Procedure	70
4.7.5 Deviation from Test Standard	70
4.7.6 EUT Operating Condition	70
4.7.7 Test Results	71
5 Pictures of Test Arrangements.....	73
Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	74
Annex B- Band-edge measurement (For U-NII-1 band)	77
Appendix – Information of the Testing Laboratories	81

Release Control Record

Issue No.	Description	Date Issued
RF200420E01-1	Original release.	June 11, 2020

1 Certificate of Conformity

Product: AX5700 WiFi6 Gigabit Ethernet Gateway

Brand: ZYXEL

Test Model: EX3510-B0

Sample Status: ENGINEERING SAMPLE

Applicant: Zyxel Communications Corporation

Test Date: Apr. 28 to May 27, 2020

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** June 11, 2020
Vivian Hunag / Specialist

Approved by : Clark Lin , **Date:** June 11, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -13.03dB at 0.36484MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.5dB at 5147.21MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note:

1. For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OBE test plots were recorded in Annex A.
2. For U-NII-1 band compliance with rule 15.407(b) of the band-edge items, the test plots were recorded in Annex B. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX5700 WiFi6 Gigabit Ethernet Gateway
Brand	ZYXEL
Test Model	EX3510-B0
CPU Model No.	BCM4906
RF Chip Model No.	BCM43684
FW	V5.17(ABUP.0)b4
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 3466.7 Mbps 802.11ax: up to 4803.9 Mbps
Operating Frequency	2.4GHz: 2.412GHz ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 686.935 mW 5.18 ~ 5.24 GHz: 777.956 mW 5.745 ~ 5.825 GHz: 887.947 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 641.958 mW 5.18 ~ 5.24 GHz: 549.242 mW 5.745 ~ 5.825 GHz: 553.281 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	-Adapter x1 (Brand: MNC, Model: MAUS-1202503000) -Ethernet Cable x1 (Unshielded, 1m)

Note:

1. The EUT has two radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz	WLAN 5GHz

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
MNC	MAUS-1202503000	AC Input: 100-240V 50/60Hz, 1.2A DC Output: 12V / 2.5A DC Cable: 1.5m, Unshielded

4. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Antenna Connector
2.4~2.4835	5.27	Dipole	None
5.15 ~ 5.25	8.09		i-pex(MHF)
5.25 ~ 5.35	7.66		
5.47 ~ 5.725	7.86		
5.725 ~ 5.85	7.98		

Note: More detailed information, please refer to antenna specification.

5. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	3TX	3RX
802.11g	3TX	3RX
802.11n (HT20)	3TX	3RX
802.11n (HT40)	3TX	3RX
VHT20	3TX	3RX
VHT40	3TX	3RX
802.11ax (HE20)	3TX	3RX
802.11ax (HE40)	3TX	3RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4TX
802.11n (HT20)	4TX	4TX
802.11n (HT40)	4TX	4TX
802.11ac (VHT20)	4TX	4TX
802.11ac (VHT40)	4TX	4TX
802.11ac (VHT80)	4TX	4TX
802.11ax (HE20)	4TX	4TX
802.11ax (HE40)	4TX	4TX
802.11ax (HE80)	4TX	4TX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz, 80MHz) and 802.11ax mode for 20MHz (40MHz, 80MHz), therefore the manufacturer will control the power for 802.11ac mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

6. The power setting are list as below:

CDD Mode													
802.11a		802.11ac (VHT20)		802.11ac (VHT40)		802.11ac (VHT80)		802.11ax (HE20)		802.11ax (HE40)		802.11ax (HE80)	
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
5180	86	5180	83	5190	71	5210	66	5180	83	5190	71	5210	66
5200	90	5200	88	5230	96	5775	91	5200	88	5230	96	5775	91
5240	90	5240	88	5755	94			5240	88	5755	94		
5745	96	5745	94	5795	94			5745	94	5795	94		
5785	96	5785	94					5785	94				
5825	96	5825	94					5825	94				
Beamforming Mode													
802.11ac (VHT20)		802.11ac (VHT40)		802.11ac (VHT80)		802.11ax (HE20)		802.11ax (HE40)		802.11ax (HE80)			
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
5180	83	5190	71	5210	66	5180	83	5190	71	5210	66		
5200	87	5230	90	5775	84	5200	87	5230	90	5775	84		
5240	87	5755	88			5240	87	5755	88				
5745	86	5795	88			5745	86	5795	88				
5785	86					5785	86						
5825	86					5825	86						

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80) , 802.11ax (HE80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission
RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6Mb/s
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6Mb/s
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240 5745-5825	38 to 46 151 to 159	151	OFDMA	BPSK	MCS0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240 5745-5825	38 to 46 151 to 159	151	OFDMA	BPSK	MCS0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6Mb/s
802.11ac (VHT20) (for output power)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
802.11ac (VHT40) (for output power)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11ac (VHT80) (for output power)		42	42	OFDM	BPSK	MCS0
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6Mb/s
802.11ac (VHT20) (for output power)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
802.11ac (VHT40) (for output power)		151 to 159	151, 159	OFDM	BPSK	MCS0
802.11ac (VHT80) (for output power)		155	155	OFDM	BPSK	MCS0
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Beamforming Mode (output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	MCS0
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11ac (VHT80)		42	42	OFDM	BPSK	MCS0
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	MCS0
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	MCS0
802.11ac (VHT80)		155	155	OFDM	BPSK	MCS0
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	25deg. C, 75%RH	120Vac, 60Hz	Ryan Du
RE $<$ 1G	19deg. C, 69%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Eagle Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 1.47 ms / 1.517 ms = 0.969, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.14 \text{ dB}$

802.11ax (HE20): Duty cycle = 1.145 ms / 1.194 ms = 0.959, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.18 \text{ dB}$

802.11ax (HE40): Duty cycle = 1.186 ms / 1.218 ms = 0.974, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$

802.11ax (HE80): Duty cycle = 1.225 ms / 1.258 ms = 0.974, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$

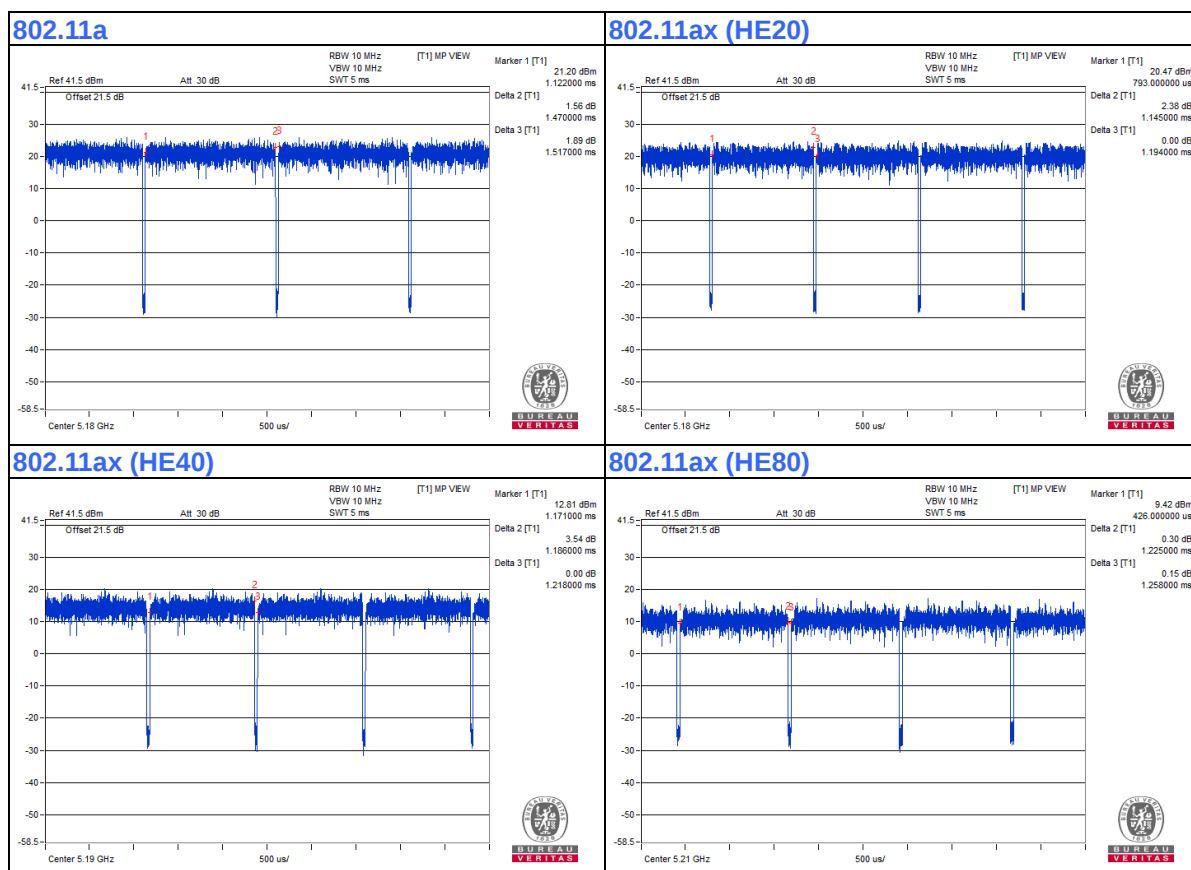

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	HUB	ZyXEL	GS1100-16	S150H44000046	FCC DoC	Provided by Lab
C.	Laptop	DELL	PP27L	8SNZ12S	FCC DoC Approved	Provided by Lab
D.	iPod	Apple	MD778TA/A	CC4JMH7LF4T1	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client
2.	RJ-45 Cable	1	1	No	0	Supplied by client
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	3	10	No	0	Provided by Lab
5.	RJ-45 Cable	1	10	No	0	Provided by Lab
6.	USB Cable	1	0.1	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

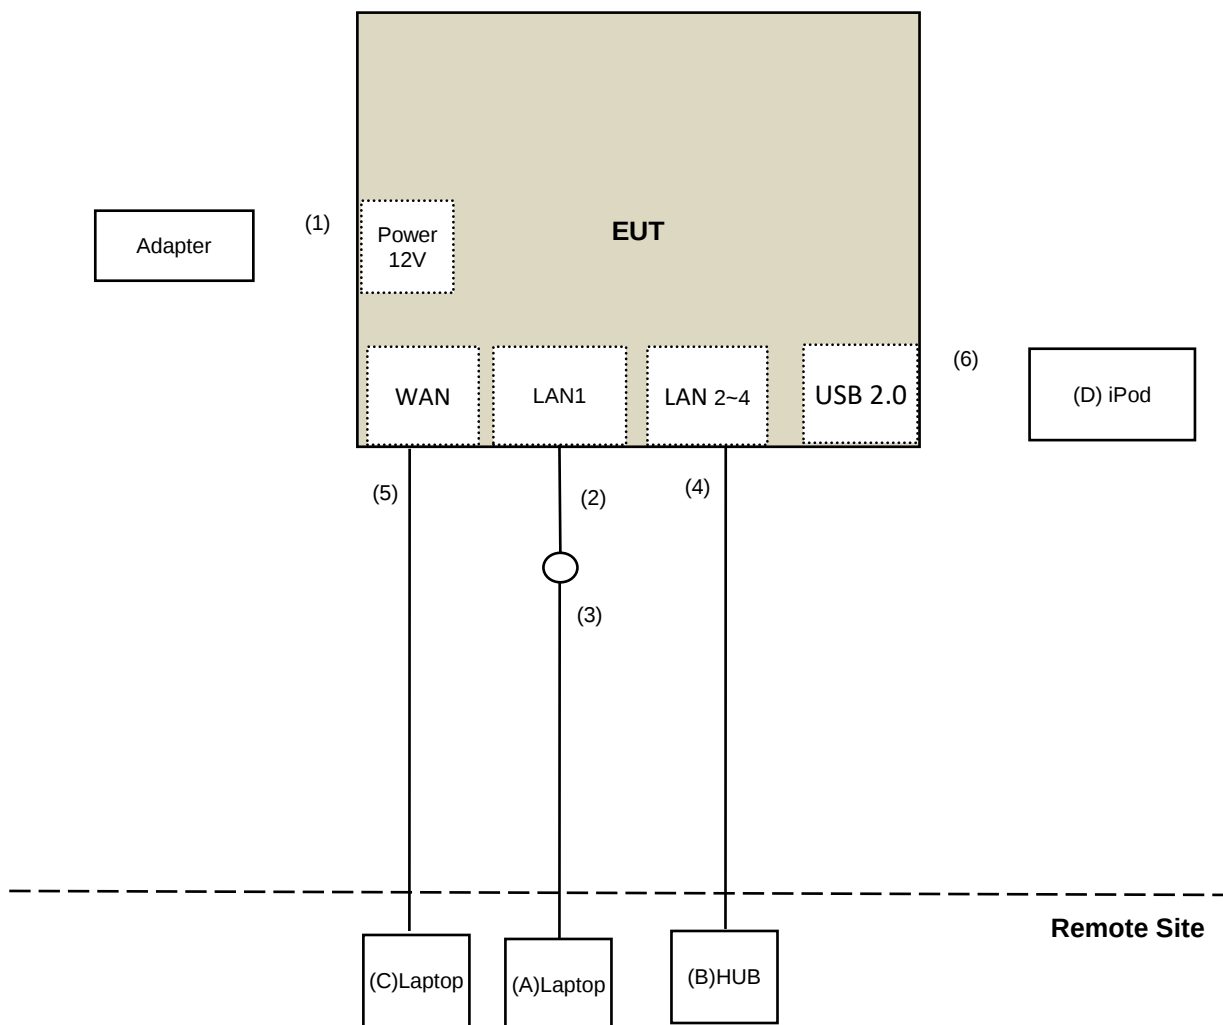

3.5 General Description of Applied Standard and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart E (15.407)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
^{*1} beyond 75 MHz or more above of the band edge. ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For Radiated emission test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESR7	102026	Apr. 22, 2020	Apr. 21, 2021
Spectrum Analyzer Keysight	N9030B	MY57141948	May 25, 2019	May 24, 2020
Pre-Amplifier EMCi	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier EMCi	EMC330N	980538	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB9168	9168-0842	Nov. 08, 2019	Nov. 07, 2020
RF Cable	8D	966-5-1	Apr. 29, 2020	Apr. 28, 2021
RF Cable	8D	966-5-2	Apr. 29, 2020	Apr. 28, 2021
RF Cable	8D	966-5-3	Apr. 29, 2020	Apr. 28, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	Jan. 14, 2020	Jan. 13, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-1819	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCi	EMC12630SE	980509	Apr. 29, 2020	Apr. 28, 2021
RF Cable EMCi	EMC104-SM-SM-1500	180503	Apr. 29, 2020	Apr. 28, 2021
RF Cable EMCi	EMC104-SM-SM-2000	180501	Apr. 29, 2020	Apr. 28, 2021
RF Cable EMCi	EMC104-SM-SM-6000	180506	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCi	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: May 13 to 22, 2020

For Bandedge test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESR7	102026	Apr. 22, 2020	Apr. 21, 2021
Spectrum Analyzer Keysight	N9030B	MY57141948	May 25, 2019	May 24, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-1819	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980509	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-1500	180503	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-2000	180501	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-6000	180506	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Apr. 28, 2020

For other test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 16, 2020	Jan. 15, 2021
True RMS Clamp Meter FLUKE	179	89610322	Sep. 25, 2019	Sep. 24, 2020

Note:

1. The test was performed in Oven room 2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: May 21 to 27, 2020

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

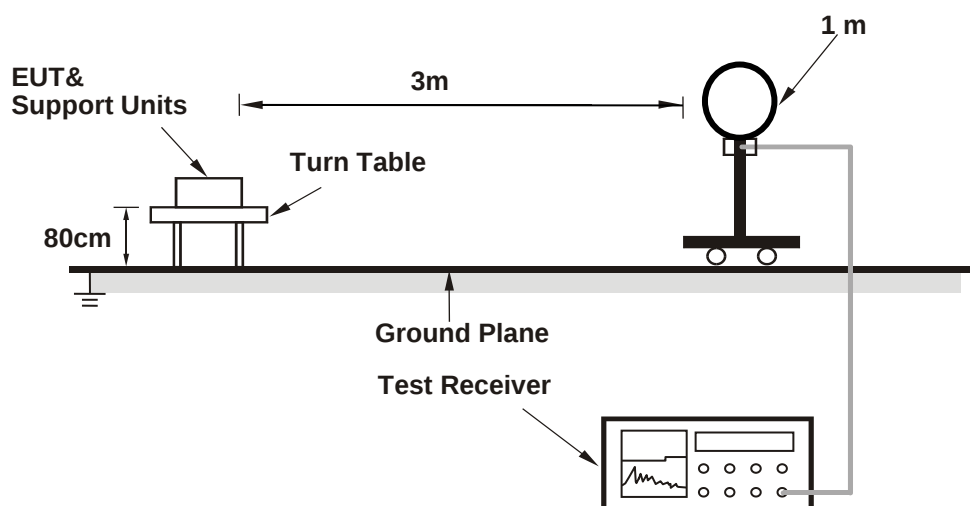

For Radiated emission 30MHz to 1GHz

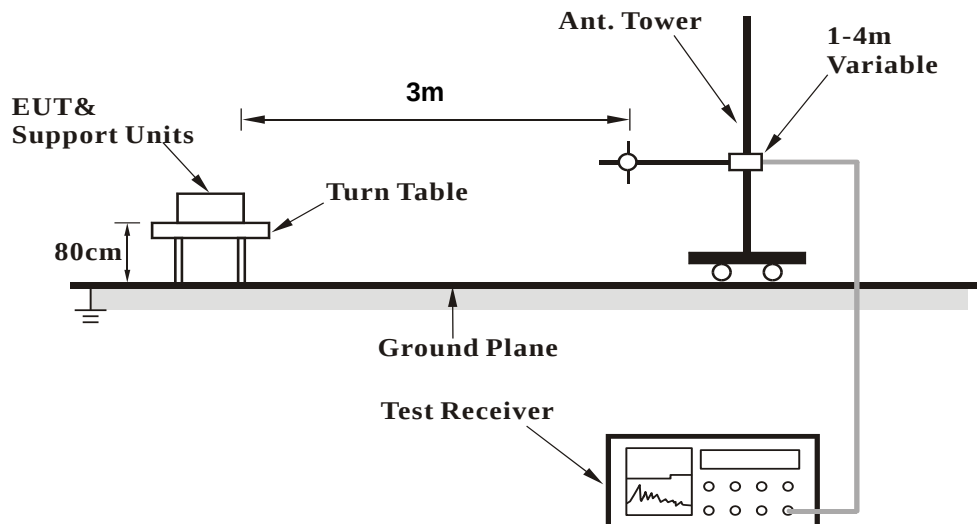

For Radiated emission above 1GHz

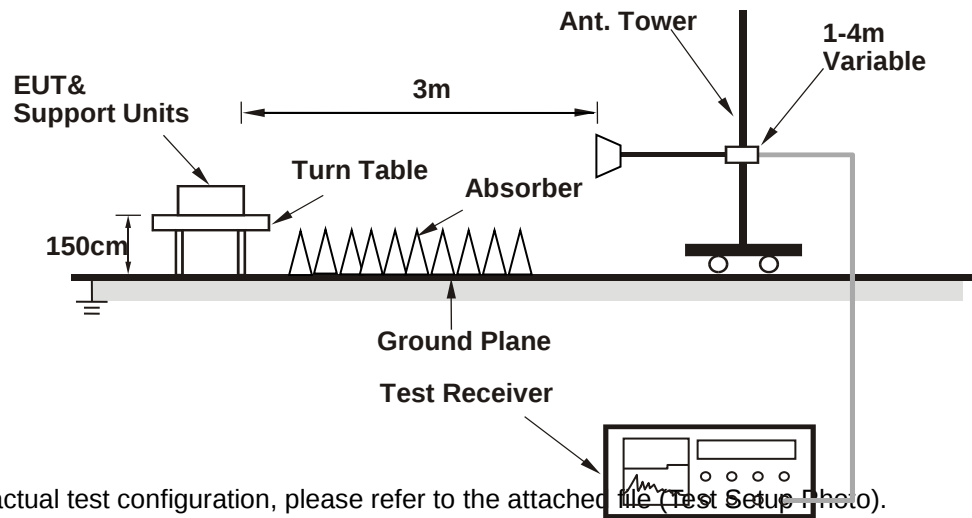

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the Laptop Computer which is placed on remote site.
- Controlling software (accessMTool_REL_3_1_0_3) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.59	70.8 PK	74.0	-3.2	1.30 H	295	69.1	1.7
2	5147.59	46.5 AV	54.0	-7.5	1.30 H	295	44.8	1.7
3	*5180.00	117.8 PK			1.30 H	295	116.3	1.5
4	*5180.00	106.6 AV			1.30 H	295	105.1	1.5
5	#10360.00	51.4 PK	68.2	-16.8	1.55 H	312	40.2	11.2
6	15540.00	57.9 PK	74.0	-16.1	1.25 H	28	46.2	11.7
7	15540.00	44.6 AV	54.0	-9.4	1.25 H	28	32.9	11.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5148.72	71.9 PK	74.0	-2.1	1.34 V	64	70.2	1.7
2	5148.72	53.3 AV	54.0	-0.7	1.34 V	64	51.6	1.7
3	*5180.00	122.1 PK			1.34 V	64	120.6	1.5
4	*5180.00	111.6 AV			1.34 V	64	110.1	1.5
5	#10360.00	52.5 PK	68.2	-15.7	1.50 V	281	41.3	11.2
6	15540.00	52.6 PK	74.0	-21.4	1.81 V	133	40.9	11.7
7	15540.00	40.8 AV	54.0	-13.2	1.81 V	133	29.1	11.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.8 PK	74.0	-13.2	1.44 H	295	59.1	1.7
2	5150.00	46.4 AV	54.0	-7.6	1.44 H	295	44.7	1.7
3	*5200.00	120.7 PK			1.44 H	295	119.3	1.4
4	*5200.00	110.0 AV			1.44 H	295	108.6	1.4
5	5350.00	55.4 PK	74.0	-18.6	1.44 H	295	54.0	1.4
6	5350.00	43.0 AV	54.0	-11.0	1.44 H	295	41.6	1.4
7	#10400.00	52.3 PK	68.2	-15.9	1.56 H	312	40.8	11.5
8	15600.00	59.6 PK	74.0	-14.4	1.26 H	31	48.1	11.5
9	15600.00	46.2 AV	54.0	-7.8	1.26 H	31	34.7	11.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.3 PK	74.0	-4.7	1.50 V	55	67.6	1.7
2	5150.00	53.3 AV	54.0	-0.7	1.50 V	55	51.6	1.7
3	*5200.00	123.3 PK			1.50 V	55	121.9	1.4
4	*5200.00	112.6 AV			1.50 V	55	111.2	1.4
5	5350.00	58.4 PK	74.0	-15.6	1.50 V	55	57.0	1.4
6	5350.00	45.9 AV	54.0	-8.1	1.50 V	55	44.5	1.4
7	#10400.00	54.1 PK	68.2	-14.1	1.51 V	279	42.6	11.5
8	15600.00	54.6 PK	74.0	-19.4	1.80 V	129	43.1	11.5
9	15600.00	42.6 AV	54.0	-11.4	1.80 V	129	31.1	11.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5029.03	55.6 PK	74.0	-18.4	1.56 H	90	54.0	1.6
2	5029.03	44.5 AV	54.0	-9.5	1.56 H	90	42.9	1.6
3	*5240.00	120.5 PK			1.56 H	90	119.3	1.2
4	*5240.00	109.5 AV			1.56 H	90	108.3	1.2
5	5450.98	55.5 PK	74.0	-18.5	1.56 H	90	53.9	1.6
6	5450.98	44.4 AV	54.0	-9.6	1.56 H	90	42.8	1.6
7	#10480.00	50.3 PK	68.2	-17.9	1.53 H	315	38.8	11.5
8	15720.00	58.5 PK	74.0	-15.5	1.22 H	26	47.4	11.1
9	15720.00	45.3 AV	54.0	-8.7	1.22 H	26	34.2	11.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5130.36	57.2 PK	74.0	-16.8	1.64 V	84	55.5	1.7
2	5130.36	46.1 AV	54.0	-7.9	1.64 V	84	44.4	1.7
3	*5240.00	123.9 PK			1.64 V	84	122.7	1.2
4	*5240.00	113.5 AV			1.64 V	84	112.3	1.2
5	5353.68	60.1 PK	74.0	-13.9	1.64 V	84	58.7	1.4
6	5353.68	47.1 AV	54.0	-6.9	1.64 V	84	45.7	1.4
7	#10480.00	52.2 PK	68.2	-16.0	1.50 V	280	40.7	11.5
8	15720.00	53.8 PK	74.0	-20.2	1.78 V	128	42.7	11.1
9	15720.00	41.8 AV	54.0	-12.2	1.78 V	128	30.7	11.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5564.42	55.4 PK	68.2	-12.8	1.62 H	98	53.6	1.8
2	*5745.00	119.2 PK			1.50 H	106	117.3	1.9
3	*5745.00	111.4 AV			1.50 H	106	109.5	1.9
4	#5950.99	57.8 PK	68.2	-10.4	1.62 H	98	55.2	2.6
5	11490.00	54.8 PK	74.0	-19.2	1.58 H	321	42.3	12.5
6	11490.00	41.8 AV	54.0	-12.2	1.58 H	321	29.3	12.5
7	#17235.00	55.6 PK	68.2	-12.6	1.75 H	204	39.8	15.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.99	58.9 PK	68.2	-9.3	1.53 V	74	57.1	1.8
2	*5745.00	123.4 PK			1.46 V	80	121.5	1.9
3	*5745.00	115.5 AV			1.46 V	80	113.6	1.9
4	#6003.42	62.2 PK	68.2	-6.0	1.53 V	74	59.5	2.7
5	11490.00	59.1 PK	74.0	-14.9	1.30 V	251	46.6	12.5
6	11490.00	47.2 AV	54.0	-6.8	1.30 V	251	34.7	12.5
7	#17235.00	51.6 PK	68.2	-16.6	1.31 V	325	35.8	15.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5598.39	54.7 PK	68.2	-13.5	1.50 H	106	53.1	1.6
2	*5785.00	123.5 PK			1.62 H	98	121.5	2.0
3	*5785.00	112.3 AV			1.62 H	98	110.3	2.0
4	#5982.93	56.7 PK	68.2	-11.5	1.50 H	106	54.2	2.5
5	11570.00	55.2 PK	74.0	-18.8	1.60 H	322	42.3	12.9
6	11570.00	42.6 AV	54.0	-11.4	1.60 H	322	29.7	12.9
7	#17355.00	56.8 PK	68.2	-11.4	1.74 H	202	40.0	16.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.93	55.9 PK	68.2	-12.3	1.46 V	80	54.2	1.7
2	*5785.00	126.9 PK			1.53 V	74	124.9	2.0
3	*5785.00	115.7 AV			1.53 V	74	113.7	2.0
4	#5937.88	58.7 PK	68.2	-9.5	1.46 V	80	56.3	2.4
5	11570.00	60.2 PK	74.0	-13.8	1.29 V	250	47.3	12.9
6	11570.00	48.3 AV	54.0	-5.7	1.29 V	250	35.4	12.9
7	#17355.00	52.5 PK	68.2	-15.7	1.29 V	323	35.7	16.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.84	52.4 PK	68.2	-15.8	1.74 H	102	50.7	1.7
2	*5825.00	120.7 PK			1.74 H	102	118.5	2.2
3	*5825.00	112.8 AV			1.74 H	102	110.6	2.2
4	#5990.86	56.0 PK	68.2	-12.2	1.74 H	102	53.5	2.5
5	11650.00	55.5 PK	74.0	-18.5	1.59 H	325	42.6	12.9
6	11650.00	42.4 AV	54.0	-11.6	1.59 H	325	29.5	12.9
7	#17475.00	56.9 PK	68.2	-11.3	1.79 H	217	38.2	18.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.22	54.6 PK	68.2	-13.6	1.50 V	80	53.0	1.6
2	*5825.00	123.5 PK			1.50 V	80	121.3	2.2
3	*5825.00	115.6 AV			1.50 V	80	113.4	2.2
4	#5977.62	58.8 PK	68.2	-9.4	1.50 V	80	56.3	2.5
5	11650.00	60.2 PK	74.0	-13.8	1.29 V	250	47.3	12.9
6	11650.00	47.8 AV	54.0	-6.2	1.29 V	250	34.9	12.9
7	#17475.00	52.4 PK	68.2	-15.8	1.30 V	338	33.7	18.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5146.61	60.3 PK	74.0	-13.7	1.38 H	254	58.6	1.7
2	5146.61	47.7 AV	54.0	-6.3	1.38 H	254	46.0	1.7
3	*5180.00	114.4 PK			1.38 H	254	112.9	1.5
4	*5180.00	104.8 AV			1.38 H	254	103.3	1.5
5	#10360.00	51.0 PK	68.2	-17.2	1.56 H	302	39.8	11.2
6	15540.00	58.0 PK	74.0	-16.0	1.21 H	17	46.3	11.7
7	15540.00	45.0 AV	54.0	-9.0	1.21 H	17	33.3	11.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5149.65	64.1 PK	74.0	-9.9	1.46 V	46	62.4	1.7
2	5149.65	53.3 AV	54.0	-0.7	1.46 V	46	51.6	1.7
3	*5180.00	118.3 PK			1.46 V	46	116.8	1.5
4	*5180.00	109.1 AV			1.46 V	46	107.6	1.5
5	#10360.00	52.2 PK	68.2	-16.0	1.52 V	279	41.0	11.2
6	15540.00	52.7 PK	74.0	-21.3	1.78 V	129	41.0	11.7
7	15540.00	40.7 AV	54.0	-13.3	1.78 V	129	29.0	11.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.8 PK	74.0	-13.2	2.61 H	94	59.1	1.7
2	5150.00	50.2 AV	54.0	-3.8	2.61 H	94	48.5	1.7
3	*5200.00	120.0 PK			2.61 H	94	118.6	1.4
4	*5200.00	108.9 AV			2.61 H	94	107.5	1.4
5	5350.00	54.6 PK	74.0	-19.4	2.61 H	94	53.2	1.4
6	5350.00	44.1 AV	54.0	-9.9	2.61 H	94	42.7	1.4
7	#10400.00	50.8 PK	68.2	-17.4	1.54 H	303	39.3	11.5
8	15600.00	58.4 PK	74.0	-15.6	1.15 H	3	46.9	11.5
9	15600.00	45.2 AV	54.0	-8.8	1.15 H	3	33.7	11.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.8 PK	74.0	-12.2	1.50 V	52	60.1	1.7
2	5150.00	51.1 AV	54.0	-2.9	1.50 V	52	49.4	1.7
3	*5200.00	122.0 PK			1.50 V	52	120.6	1.4
4	*5200.00	112.0 AV			1.50 V	52	110.6	1.4
5	5350.00	56.7 PK	74.0	-17.3	1.50 V	52	55.3	1.4
6	5350.00	45.6 AV	54.0	-8.4	1.50 V	52	44.2	1.4
7	#10400.00	52.3 PK	68.2	-15.9	1.58 V	266	40.8	11.5
8	15600.00	53.0 PK	74.0	-21.0	1.80 V	144	41.5	11.5
9	15600.00	40.9 AV	54.0	-13.1	1.80 V	144	29.4	11.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5143.27	54.8 PK	74.0	-19.2	1.89 H	72	53.1	1.7
2	5143.27	43.4 AV	54.0	-10.6	1.89 H	72	41.7	1.7
3	*5240.00	119.0 PK			1.89 H	72	117.8	1.2
4	*5240.00	107.2 AV			1.89 H	72	106.0	1.2
5	5385.41	53.6 PK	74.0	-20.4	1.89 H	72	52.2	1.4
6	5385.41	41.3 AV	54.0	-12.7	1.89 H	72	39.9	1.4
7	#10480.00	50.0 PK	68.2	-18.2	1.54 H	315	38.5	11.5
8	15720.00	58.3 PK	74.0	-15.7	1.19 H	4	47.2	11.1
9	15720.00	44.9 AV	54.0	-9.1	1.19 H	4	33.8	11.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5014.30	56.1 PK	74.0	-17.9	1.78 V	85	54.6	1.5
2	5014.30	44.9 AV	54.0	-9.1	1.78 V	85	43.4	1.5
3	*5240.00	121.1 PK			1.78 V	85	119.9	1.2
4	*5240.00	111.2 AV			1.78 V	85	110.0	1.2
5	5456.42	55.5 PK	74.0	-18.5	1.78 V	85	53.9	1.6
6	5456.42	45.7 AV	54.0	-8.3	1.78 V	85	44.1	1.6
7	#10480.00	52.8 PK	68.2	-15.4	1.63 V	265	41.3	11.5
8	15720.00	52.3 PK	74.0	-21.7	1.86 V	153	41.2	11.1
9	15720.00	40.6 AV	54.0	-13.4	1.86 V	153	29.5	11.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.15	53.3 PK	68.2	-14.9	1.50 H	107	51.6	1.7
2	*5745.00	120.5 PK			1.50 H	107	118.6	1.9
3	*5745.00	108.5 AV			1.50 H	107	106.6	1.9
4	#5975.11	56.2 PK	68.2	-12.0	1.50 H	107	53.7	2.5
5	11490.00	54.7 PK	74.0	-19.3	1.54 H	325	42.2	12.5
6	11490.00	42.0 AV	54.0	-12.0	1.54 H	325	29.5	12.5
7	#17235.00	55.6 PK	68.2	-12.6	1.73 H	200	39.8	15.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5597.75	56.8 PK	68.2	-11.4	1.50 V	100	55.2	1.6
2	*5745.00	124.2 PK			1.50 V	100	122.3	1.9
3	*5745.00	112.1 AV			1.50 V	100	110.2	1.9
4	#5991.94	60.7 PK	68.2	-7.5	1.50 V	100	58.1	2.6
5	11490.00	58.9 PK	74.0	-15.1	1.31 V	250	46.4	12.5
6	11490.00	47.6 AV	54.0	-6.4	1.31 V	250	35.1	12.5
7	#17235.00	51.4 PK	68.2	-16.8	1.35 V	324	35.6	15.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5615.54	52.3 PK	68.2	-15.9	1.54 H	107	50.7	1.6
2	*5785.00	121.1 PK			1.54 H	107	119.1	2.0
3	*5785.00	109.1 AV			1.54 H	107	107.1	2.0
4	#5953.76	54.7 PK	68.2	-13.5	1.54 H	107	52.2	2.5
5	11570.00	54.8 PK	74.0	-19.2	1.52 H	328	41.9	12.9
6	11570.00	42.1 AV	54.0	-11.9	1.52 H	328	29.2	12.9
7	#17355.00	55.3 PK	68.2	-12.9	1.73 H	214	38.5	16.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5551.50	57.7 PK	68.2	-10.5	1.50 V	98	56.0	1.7
2	*5785.00	124.0 PK			1.50 V	98	122.0	2.0
3	*5785.00	112.4 AV			1.50 V	98	110.4	2.0
4	#5979.27	59.2 PK	68.2	-9.0	1.50 V	98	56.7	2.5
5	11570.00	58.7 PK	74.0	-15.3	1.22 V	249	45.8	12.9
6	11570.00	45.8 AV	54.0	-8.2	1.22 V	249	32.9	12.9
7	#17355.00	52.0 PK	68.2	-16.2	1.50 V	328	35.2	16.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.69	53.0 PK	68.2	-15.2	1.74 H	102	51.3	1.7
2	*5825.00	122.0 PK			1.74 H	102	119.8	2.2
3	*5825.00	109.7 AV			1.74 H	102	107.5	2.2
4	#5973.23	55.4 PK	68.2	-12.8	1.74 H	102	52.9	2.5
5	11650.00	55.7 PK	74.0	-18.3	1.63 H	313	42.8	12.9
6	11650.00	42.4 AV	54.0	-11.6	1.63 H	313	29.5	12.9
7	#17475.00	57.1 PK	68.2	-11.1	1.78 H	218	38.4	18.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.79	54.7 PK	68.2	-13.5	1.27 V	96	53.0	1.7
2	*5825.00	125.6 PK			1.27 V	96	123.4	2.2
3	*5825.00	112.8 AV			1.27 V	96	110.6	2.2
4	#6024.60	58.8 PK	68.2	-9.4	1.27 V	96	56.3	2.5
5	11650.00	60.3 PK	74.0	-13.7	1.30 V	248	47.4	12.9
6	11650.00	47.4 AV	54.0	-6.6	1.30 V	248	34.5	12.9
7	#17475.00	52.1 PK	68.2	-16.1	1.35 V	336	33.4	18.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5146.13	60.7 PK	74.0	-13.3	1.68 H	75	59.0	1.7
2	5146.13	49.9 AV	54.0	-4.1	1.68 H	75	48.2	1.7
3	*5190.00	110.6 PK			1.68 H	75	109.1	1.5
4	*5190.00	98.0 AV			1.68 H	75	96.5	1.5
5	#10380.00	51.0 PK	68.2	-17.2	1.57 H	307	39.7	11.3
6	15570.00	58.5 PK	74.0	-15.5	1.19 H	17	46.9	11.6
7	15570.00	45.2 AV	54.0	-8.8	1.19 H	17	33.6	11.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5148.10	66.4 PK	74.0	-7.6	1.73 V	49	64.7	1.7
2	5148.10	53.1 AV	54.0	-0.9	1.73 V	49	51.4	1.7
3	*5190.00	115.4 PK			1.73 V	49	113.9	1.5
4	*5190.00	101.6 AV			1.73 V	49	100.1	1.5
5	#10380.00	52.0 PK	68.2	-16.2	1.53 V	264	40.7	11.3
6	15570.00	52.9 PK	74.0	-21.1	1.80 V	122	41.3	11.6
7	15570.00	41.1 AV	54.0	-12.9	1.80 V	122	29.5	11.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5142.43	61.5 PK	74.0	-12.5	1.08 H	92	59.8	1.7
2	5142.43	47.6 AV	54.0	-6.4	1.08 H	92	45.9	1.7
3	*5230.00	115.1 PK			1.08 H	92	113.8	1.3
4	*5230.00	102.2 AV			1.08 H	92	100.9	1.3
5	5381.62	52.2 PK	74.0	-21.8	1.08 H	92	50.8	1.4
6	5381.62	41.2 AV	54.0	-12.8	1.08 H	92	39.8	1.4
7	#10460.00	51.3 PK	68.2	-16.9	1.57 H	306	40.0	11.3
8	15690.00	58.3 PK	74.0	-15.7	1.18 H	11	47.1	11.2
9	15690.00	44.8 AV	54.0	-9.2	1.18 H	11	33.6	11.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5148.74	66.4 PK	74.0	-7.6	1.79 V	84	64.7	1.7
2	5148.74	53.2 AV	54.0	-0.8	1.79 V	84	51.5	1.7
3	*5230.00	118.4 PK			1.79 V	84	117.1	1.3
4	*5230.00	107.4 AV			1.79 V	84	106.1	1.3
5	5378.69	57.0 PK	74.0	-17.0	1.79 V	84	55.6	1.4
6	5378.69	45.1 AV	54.0	-8.9	1.79 V	84	43.7	1.4
7	#10460.00	52.0 PK	68.2	-16.2	1.56 V	279	40.7	11.3
8	15690.00	52.2 PK	74.0	-21.8	1.84 V	112	41.0	11.2
9	15690.00	40.7 AV	54.0	-13.3	1.84 V	112	29.5	11.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.85	58.9 PK	68.2	-9.3	1.46 H	109	57.2	1.7
2	*5755.00	117.5 PK			1.46 H	109	115.6	1.9
3	*5755.00	105.5 AV			1.46 H	109	103.6	1.9
4	#5930.28	55.9 PK	68.2	-12.3	1.46 H	109	53.5	2.4
5	11510.00	54.5 PK	74.0	-19.5	1.50 H	326	42.0	12.5
6	11510.00	42.3 AV	54.0	-11.7	1.50 H	326	29.8	12.5
7	#17265.00	56.1 PK	68.2	-12.1	1.76 H	188	40.1	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.71	61.2 PK	68.2	-7.0	1.54 V	94	59.5	1.7
2	*5755.00	122.2 PK			1.54 V	94	120.3	1.9
3	*5755.00	109.3 AV			1.54 V	94	107.4	1.9
4	#5925.20	59.8 PK	68.2	-8.4	1.54 V	94	57.4	2.4
5	11510.00	59.2 PK	74.0	-14.8	1.35 V	244	46.7	12.5
6	11510.00	47.7 AV	54.0	-6.3	1.35 V	244	35.2	12.5
7	#17265.00	51.1 PK	68.2	-17.1	1.37 V	333	35.1	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.47	54.2 PK	68.2	-14.0	1.72 H	103	52.5	1.7
2	*5795.00	118.6 PK			1.72 H	103	116.5	2.1
3	*5795.00	106.4 AV			1.72 H	103	104.3	2.1
4	#5929.13	59.3 PK	68.2	-8.9	1.72 H	103	56.9	2.4
5	11590.00	54.5 PK	74.0	-19.5	1.46 H	328	41.7	12.8
6	11590.00	42.3 AV	54.0	-11.7	1.46 H	328	29.5	12.8
7	#17385.00	56.8 PK	68.2	-11.4	1.72 H	183	39.5	17.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.80	55.1 PK	68.2	-13.1	1.48 V	94	53.4	1.7
2	*5795.00	122.1 PK			1.48 V	94	120.0	2.1
3	*5795.00	109.7 AV			1.48 V	94	107.6	2.1
4	#5930.07	58.5 PK	68.2	-9.7	1.48 V	94	56.1	2.4
5	11590.00	59.9 PK	74.0	-14.1	1.38 V	258	47.1	12.8
6	11590.00	47.6 AV	54.0	-6.4	1.38 V	258	34.8	12.8
7	#17385.00	51.6 PK	68.2	-16.6	1.39 V	320	34.3	17.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5149.18	59.6 PK	74.0	-14.4	2.61 H	70	57.9	1.7
2	5149.18	50.8 AV	54.0	-3.2	2.61 H	70	49.1	1.7
3	*5210.00	105.6 PK			2.61 H	70	104.2	1.4
4	*5210.00	94.3 AV			2.61 H	70	92.9	1.4
5	5352.24	51.2 PK	74.0	-22.8	2.61 H	70	49.8	1.4
6	5352.24	40.6 AV	54.0	-13.4	2.61 H	70	39.2	1.4
7	#10420.00	50.9 PK	68.2	-17.3	1.56 H	320	39.5	11.4
8	15630.00	58.3 PK	74.0	-15.7	1.20 H	24	46.9	11.4
9	15630.00	45.3 AV	54.0	-8.7	1.20 H	24	33.9	11.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.21	63.1 PK	74.0	-10.9	1.50 V	42	61.4	1.7
2	5147.21	53.5 AV	54.0	-0.5	1.50 V	42	51.8	1.7
3	*5210.00	109.0 PK			1.50 V	42	107.6	1.4
4	*5210.00	97.7 AV			1.50 V	42	96.3	1.4
5	5355.29	53.7 PK	74.0	-20.3	1.50 V	42	52.3	1.4
6	5355.29	42.5 AV	54.0	-11.5	1.50 V	42	41.1	1.4
7	#10420.00	52.7 PK	68.2	-15.5	1.56 V	266	41.3	11.4
8	15630.00	52.9 PK	74.0	-21.1	1.84 V	148	41.5	11.4
9	15630.00	41.2 AV	54.0	-12.8	1.84 V	148	29.8	11.4

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.56	61.5 PK	68.2	-6.7	1.74 H	102	59.8	1.7
2	*5775.00	113.5 PK			1.74 H	102	111.5	2.0
3	*5775.00	101.8 AV			1.74 H	102	99.8	2.0
4	#5933.04	60.5 PK	68.2	-7.7	1.74 H	102	58.1	2.4
5	11550.00	55.2 PK	74.0	-18.8	1.44 H	311	42.5	12.7
6	11550.00	42.4 AV	54.0	-11.6	1.44 H	311	29.7	12.7
7	#17325.00	56.6 PK	68.2	-11.6	1.78 H	186	40.2	16.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5640.91	67.3 PK	68.2	-0.9	1.50 V	95	65.6	1.7
2	*5775.00	118.4 PK			1.50 V	95	116.4	2.0
3	*5775.00	106.6 AV			1.50 V	95	104.6	2.0
4	#5935.66	64.9 PK	68.2	-3.3	1.50 V	95	62.5	2.4
5	11550.00	58.5 PK	74.0	-15.5	1.23 V	247	45.8	12.7
6	11550.00	46.2 AV	54.0	-7.8	1.23 V	247	33.5	12.7
7	#17325.00	51.3 PK	68.2	-16.9	1.53 V	339	34.9	16.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:


802.11ax (HE40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.16	31.7 QP	40.0	-8.3	1.50 H	266	46.0	-14.3
2	78.26	29.3 QP	40.0	-10.7	2.00 H	261	46.4	-17.1
3	139.81	25.6 QP	43.5	-17.9	3.00 H	86	38.7	-13.1
4	228.52	22.0 QP	46.0	-24.0	1.00 H	258	37.6	-15.6
5	546.21	33.3 QP	46.0	-12.7	1.50 H	230	40.0	-6.7
6	999.78	39.2 QP	54.0	-14.8	1.50 H	70	39.2	0.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

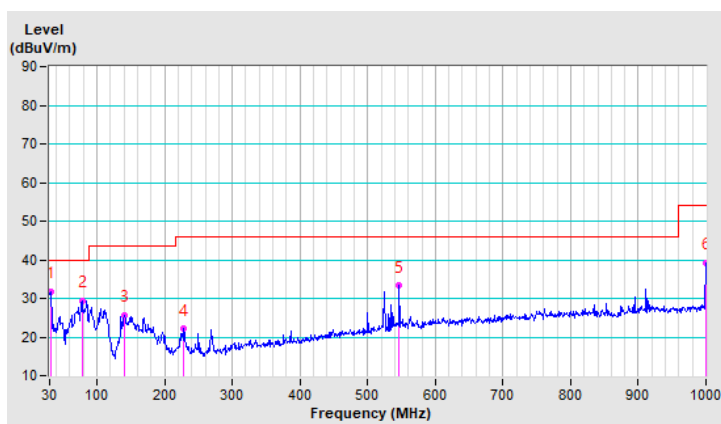


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.52	34.8 QP	40.0	-5.2	1.00 V	91	47.5	-12.7
2	68.66	35.3 QP	40.0	-4.7	1.00 V	150	50.0	-14.7
3	135.44	26.2 QP	43.5	-17.3	1.50 V	149	39.6	-13.4
4	546.26	32.0 QP	46.0	-14.0	1.00 V	175	38.7	-6.7
5	721.69	34.1 QP	46.0	-11.9	1.50 V	360	37.6	-3.5
6	999.80	37.8 QP	54.0	-16.2	3.00 V	168	37.8	0.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

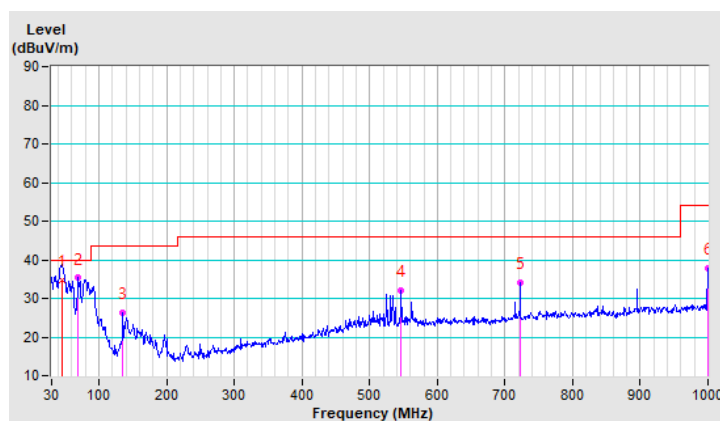

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: May 11, 2020

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

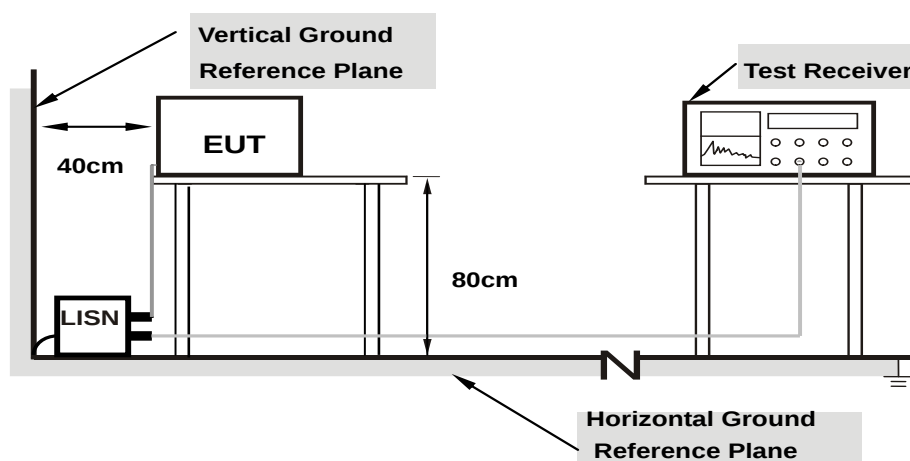

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.96	37.71	23.25	47.67	33.21	65.79	55.79	-18.12	-22.58
2	0.15391	9.96	37.97	23.43	47.93	33.39	65.79	55.79	-17.86	-22.40
3	0.19297	9.98	28.95	13.23	38.93	23.21	63.91	53.91	-24.98	-30.70
4	0.25938	9.99	23.21	6.92	33.20	16.91	61.45	51.45	-28.25	-34.54
5	0.33750	9.99	23.15	18.77	33.14	28.76	59.26	49.26	-26.12	-20.50
6	9.37109	10.33	22.83	15.54	33.16	25.87	60.00	50.00	-26.84	-24.13

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

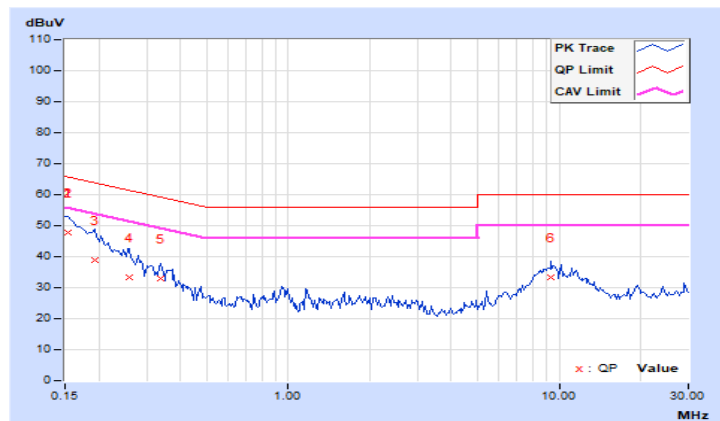


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.98	36.15	23.76	46.13	33.74	65.58	55.58	-19.45	-21.84
2	0.18516	9.99	32.04	19.15	42.03	29.14	64.25	54.25	-22.22	-25.11
3	0.20469	10.00	28.24	15.15	38.24	25.15	63.42	53.42	-25.18	-28.27
4	0.27891	10.00	27.90	21.74	37.90	31.74	60.85	50.85	-22.95	-19.11
5	0.36484	10.01	29.36	25.58	39.37	35.59	58.62	48.62	-19.25	-13.03
6	9.23828	10.31	18.06	11.34	28.37	21.65	60.00	50.00	-31.63	-28.35

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

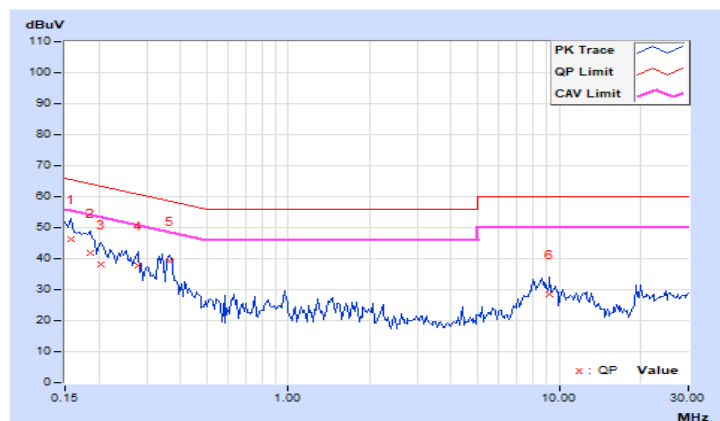

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	21.40	21.56	20.72	20.24	504.971	27.03	30	Pass
40	5200	21.53	21.49	20.33	21.59	535.268	27.29	30	Pass
48	5240	21.63	21.60	20.27	21.37	533.592	27.27	30	Pass
149	5745	23.45	23.51	23.03	23.46	868.427	29.39	30	Pass
157	5785	23.37	23.47	23.16	23.51	871.003	29.40	30	Pass
165	5825	23.48	23.37	23.08	23.54	869.293	29.39	30	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.78	19.75	19.89	20.32	394.612	25.96	30	Pass
40	5200	21.59	21.28	21.48	21.16	549.71	27.40	30	Pass
48	5240	21.52	21.24	21.52	21.11	545.979	27.37	30	Pass
149	5745	23.24	23.41	22.98	23.29	842.057	29.25	30	Pass
157	5785	23.35	23.52	23.02	23.24	852.487	29.31	30	Pass
165	5825	23.27	23.46	22.96	23.37	849.111	29.29	30	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	16.58	16.91	16.85	16.93	192.324	22.84	30	Pass
46	5230	22.63	22.86	22.91	22.79	761.97	28.82	30	Pass
151	5755	23.35	23.42	23.29	23.25	860.711	29.35	30	Pass
159	5795	23.31	23.57	23.14	23.32	862.645	29.36	30	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	15.98	15.77	15.69	15.62	150.928	21.79	30	Pass
155	5775	22.92	23.06	22.76	22.67	771.912	28.88	30	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.85	19.81	20.03	20.43	403.426	26.06	30	Pass
40	5200	21.72	21.41	21.88	21.53	583.353	27.66	30	Pass
48	5240	21.65	21.37	21.93	21.48	579.866	27.63	30	Pass
149	5745	23.37	23.57	23.14	23.42	870.629	29.40	30	Pass
157	5785	23.48	23.65	23.23	23.37	882.231	29.46	30	Pass
165	5825	23.41	23.58	23.06	23.47	871.948	29.40	30	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	16.63	17.04	16.96	17.01	196.502	22.93	30	Pass
46	5230	22.72	22.93	23.03	22.87	777.956	28.91	30	Pass
151	5755	23.47	23.59	23.42	23.37	887.947	29.48	30	Pass
159	5795	23.42	23.65	23.27	23.41	883.13	29.46	30	Pass

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	16.04	15.81	15.74	15.68	152.766	21.84	30	Pass
155	5775	22.97	23.19	22.84	22.78	788.582	28.97	30	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.78	19.75	19.89	20.32	394.612	25.96	27.91	Pass
40	5200	21.33	21.07	21.52	21.19	537.198	27.30	27.91	Pass
48	5240	21.29	20.98	21.51	21.17	532.398	27.26	27.91	Pass
149	5745	21.19	21.44	21.06	21.18	529.702	27.24	28.02	Pass
157	5785	21.22	21.42	21.15	21.37	538.515	27.31	28.02	Pass
165	5825	21.18	21.32	20.89	21.43	528.478	27.23	28.02	Pass

Note: 1. For U-NII-1: The directional gain= 8.09 dBi > 6 dBi, so the power limit shall be reduced to 30-(8.09-6) = 27.91 dBm.
2. For U-NII-3: The directional gain= 7.98 dBi > 6 dBi, so the power limit shall be reduced to 30-(7.98-6) = 28.02 dBm.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	16.58	16.91	16.85	16.93	192.324	22.84	27.91	Pass
46	5230	21.02	21.15	21.39	21.22	526.945	27.22	27.91	Pass
151	5755	21.29	21.38	21.19	21.15	533.829	27.27	28.02	Pass
159	5795	21.09	21.21	21.14	21.22	523.109	27.19	28.02	Pass

Note: 1. For U-NII-1: The directional gain= 8.09 dBi > 6 dBi, so the power limit shall be reduced to 30-(8.09-6) = 27.91 dBm.
2. For U-NII-3: The directional gain= 7.98 dBi > 6 dBi, so the power limit shall be reduced to 30-(7.98-6) = 28.02 dBm.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	15.98	15.77	15.69	15.62	150.928	21.79	27.91	Pass
155	5775	21.08	21.65	21.32	21.19	541.492	27.34	28.02	Pass

Note: 1. For U-NII-1: The directional gain= 8.09 dBi > 6 dBi, so the power limit shall be reduced to 30-(8.09-6) = 27.91 dBm.
2. For U-NII-3: The directional gain= 7.98 dBi > 6 dBi, so the power limit shall be reduced to 30-(7.98-6) = 28.02 dBm.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.85	19.81	20.03	20.43	403.426	26.06	27.91	Pass
40	5200	21.45	21.21	21.55	21.29	549.242	27.40	27.91	Pass
48	5240	21.41	21.10	21.62	21.30	547.289	27.38	27.91	Pass
149	5745	21.32	21.54	21.19	21.33	545.434	27.37	28.02	Pass
157	5785	21.35	21.58	21.29	21.41	553.281	27.43	28.02	Pass
165	5825	21.26	21.46	21.02	21.52	541.998	27.34	28.02	Pass

Note: 1. For U-NII-1: The directional gain= 8.09 dBi > 6 dBi, so the power limit shall be reduced to 30-(8.09-6) = 27.91 dBm.
 2. For U-NII-3: The directional gain= 7.98 dBi > 6 dBi, so the power limit shall be reduced to 30-(7.98-6) = 28.02 dBm.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	16.63	17.04	16.96	17.01	196.502	22.93	27.91	Pass
46	5230	21.12	21.29	21.52	21.33	541.743	27.34	27.91	Pass
151	5755	21.42	21.52	21.34	21.26	550.385	27.41	28.02	Pass
159	5795	21.22	21.34	21.26	21.33	538.07	27.31	28.02	Pass

Note: 1. For U-NII-1: The directional gain= 8.09 dBi > 6 dBi, so the power limit shall be reduced to 30-(8.09-6) = 27.91 dBm.
 2. For U-NII-3: The directional gain= 7.98 dBi > 6 dBi, so the power limit shall be reduced to 30-(7.98-6) = 28.02 dBm.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	16.04	15.81	15.74	15.68	152.766	21.84	27.91	Pass
155	5775	21.21	21.78	21.45	21.32	557.946	27.47	28.02	Pass

Note: 1. For U-NII-1: The directional gain= 8.09 dBi > 6 dBi, so the power limit shall be reduced to 30-(8.09-6) = 27.91 dBm.
 2. For U-NII-3: The directional gain= 7.98 dBi > 6 dBi, so the power limit shall be reduced to 30-(7.98-6) = 28.02 dBm.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Test Results

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	16.92	16.92	17.04	16.92
40	5200	16.92	16.92	17.16	16.92
48	5240	17.04	16.92	17.04	16.92
149	5745	17.16	17.16	17.16	17.28
157	5785	17.28	17.16	17.04	17.16
165	5825	17.04	17.04	17.16	17.04

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	19.08	19.08	19.08	19.08
40	5200	19.08	19.08	19.08	19.2
48	5240	19.2	19.2	19.08	19.08
149	5745	19.2	19.2	19.08	19.2
157	5785	19.2	19.2	19.32	19.08
165	5825	19.32	19.2	19.08	19.08

802.11ax (HE40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
38	5190	37.68	37.92	38.16	38.16
46	5230	37.92	38.16	38.16	38.16
151	5755	37.92	38.16	38.16	38.16
159	5795	38.16	38.16	38.16	37.92

802.11ax (HE80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
42	5210	77.28	77.76	77.28	77.28
155	5775	77.28	77.76	77.76	77.76

Spectrum Plot of Max. Value


802.11a_Chain 0 / CH157

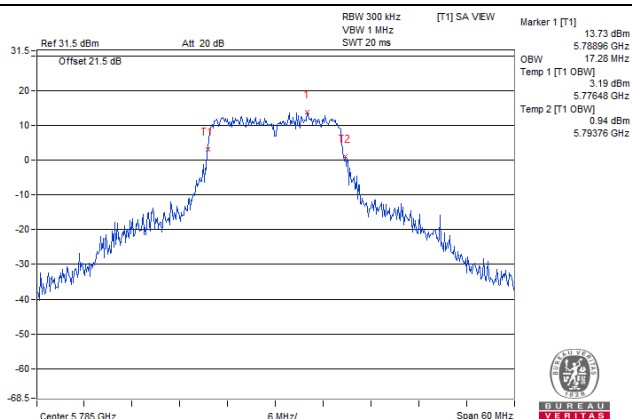


802.11ax (HE20)_Chain 0 / CH165

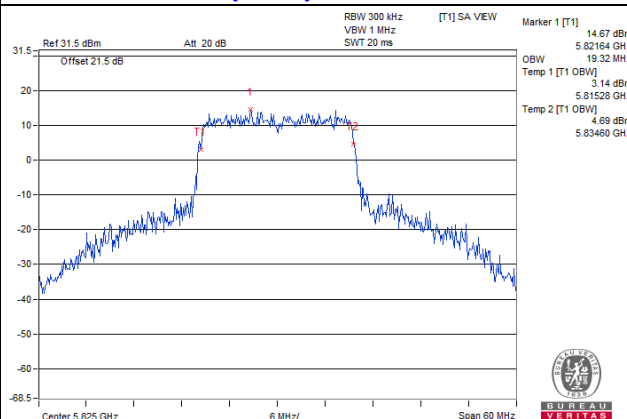

802.11ax (HE40)_Chain 0 / CH159

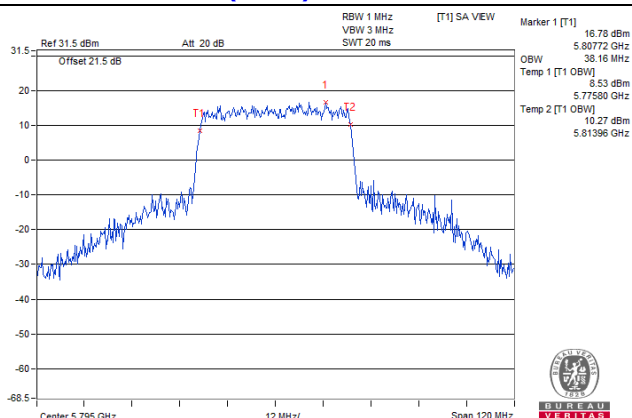


802.11ax (HE80)_Chain 1 / CH42

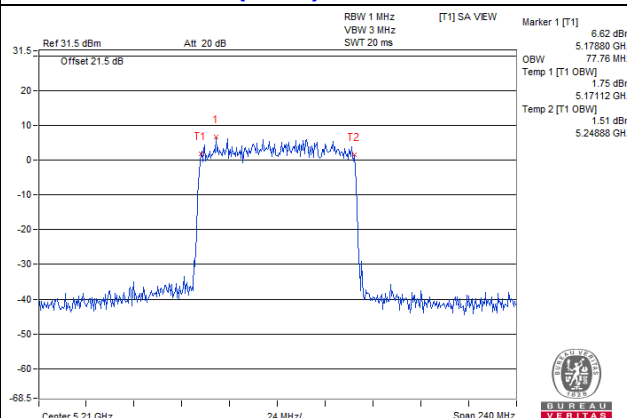


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain 0 / CH48

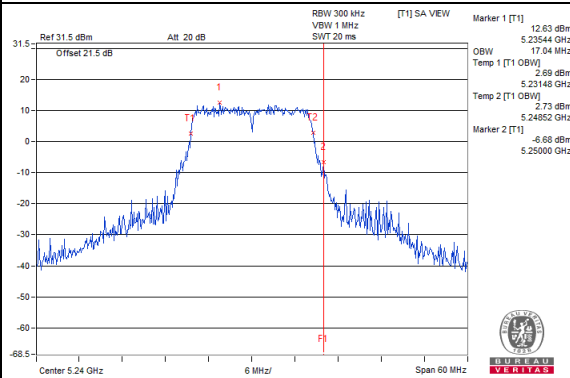


802.11a_Chain 1 / CH48

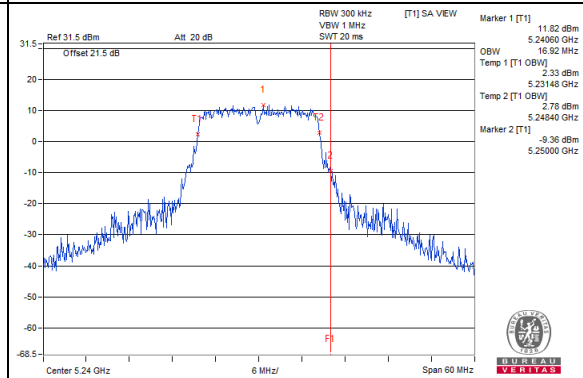


802.11a_Chain 2 / CH48

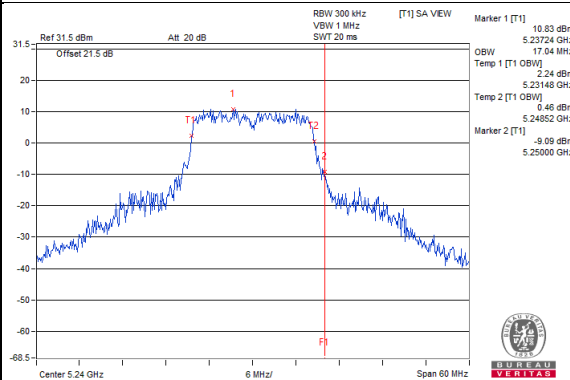


802.11a_Chain 3 / CH48

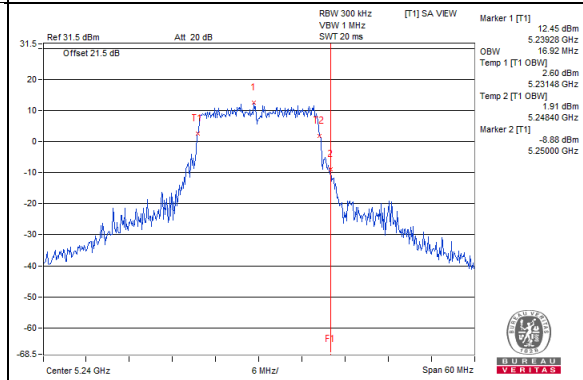


802.11ax (HE20)_Chain 0 / CH48

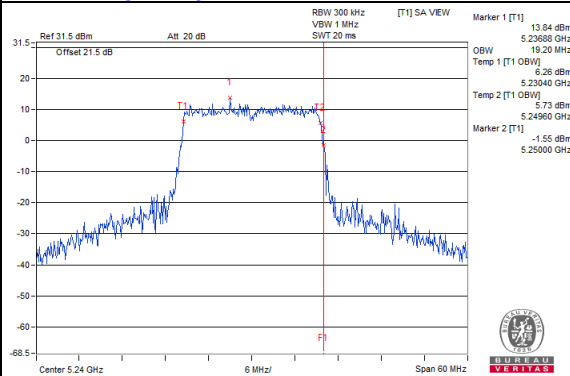


802.11ax (HE20)_Chain 1 / CH48

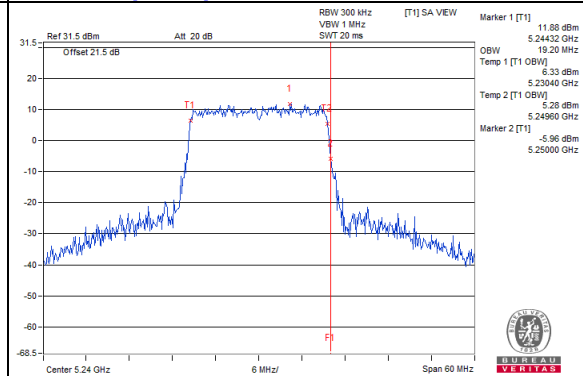

802.11ax (HE20)_Chain 2 / CH48

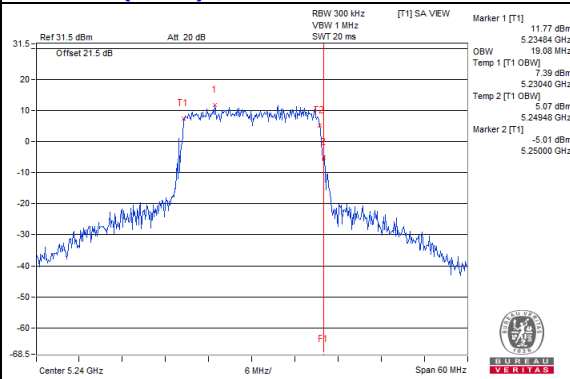


802.11ax (HE20)_Chain 3 / CH48

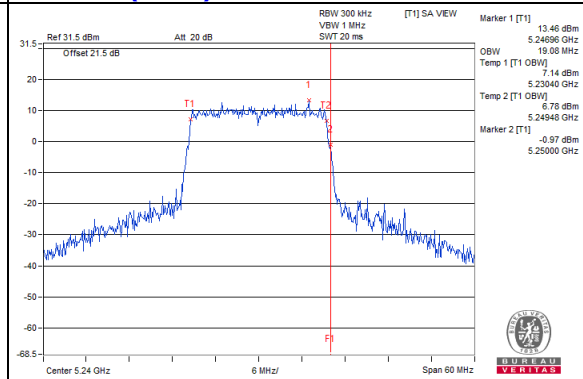


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11ax (HE40)_Chain 0 / CH46

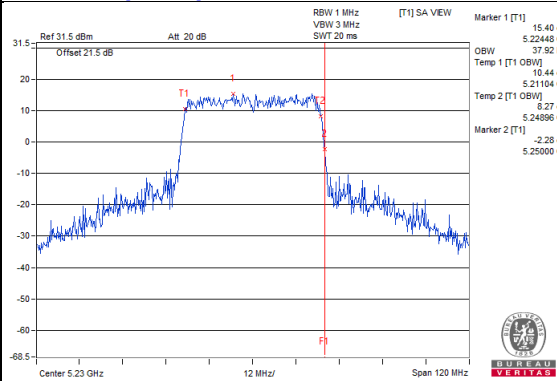


802.11ax (HE40)_Chain 1 / CH46

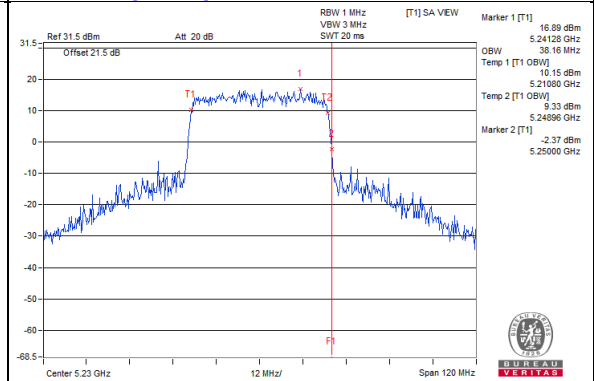


802.11ax (HE40)_Chain 2 / CH46

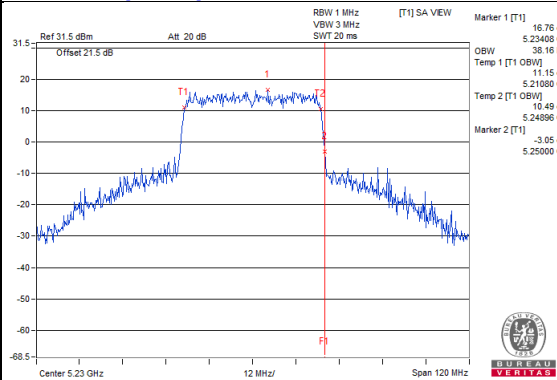


802.11ax (HE40)_Chain 3 / CH46

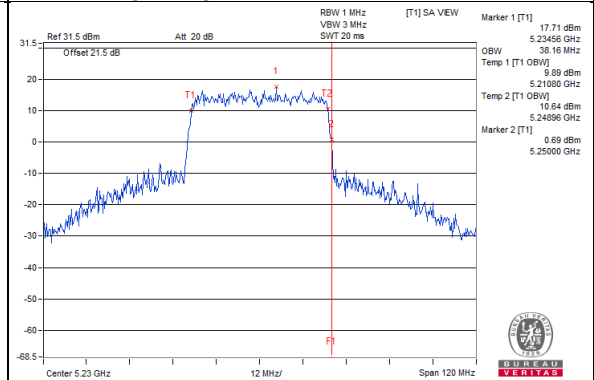


802.11ax (HE80)_Chain 0 / CH42

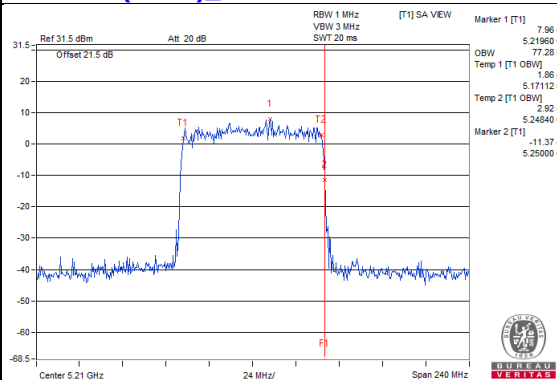


802.11ax (HE80)_Chain 1 / CH42

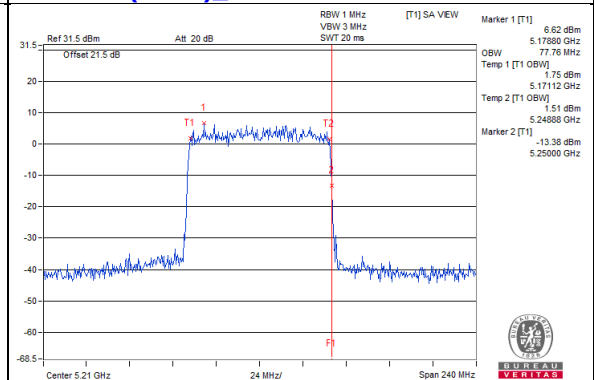

802.11ax (HE80)_Chain 2 / CH42

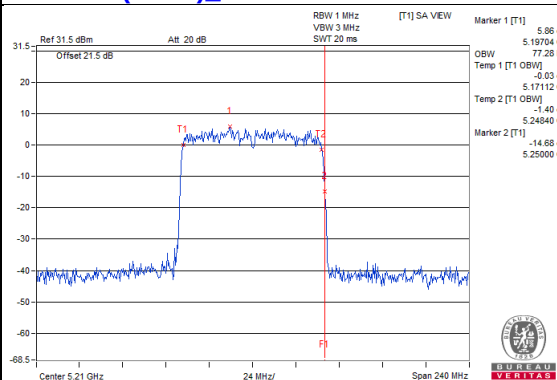


802.11ax (HE80)_Chain 3 / CH42

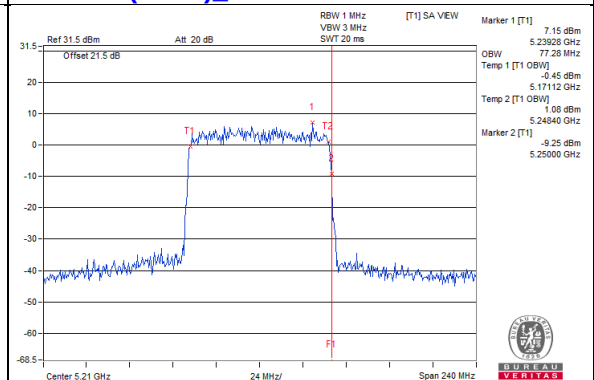


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11a_Chain 0 / CH149

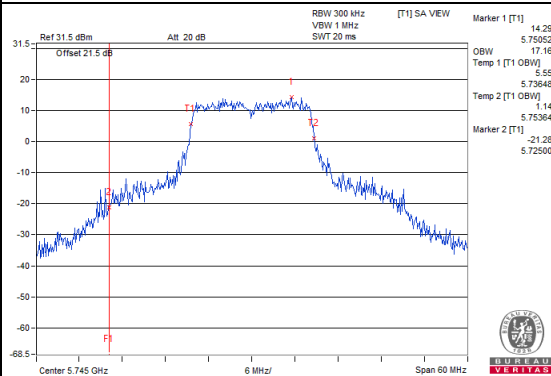


802.11a_Chain 1 / CH149

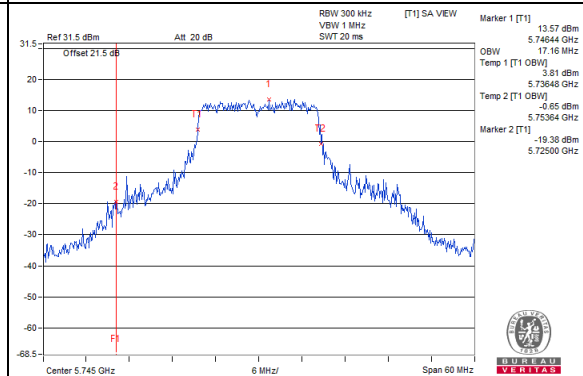


802.11a_Chain 2 / CH149

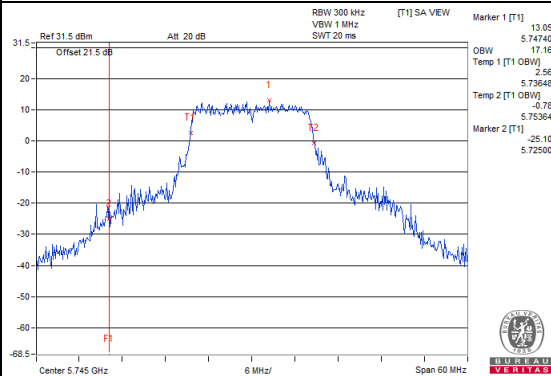


802.11a_Chain 3 / CH149

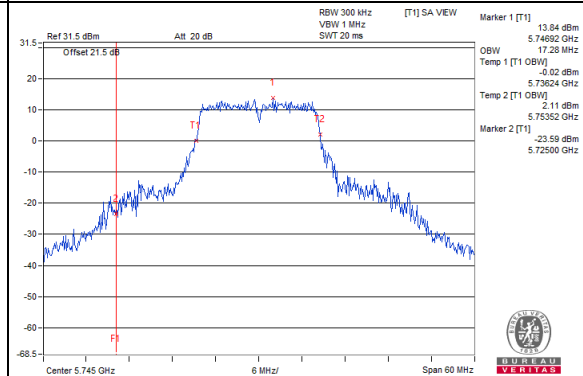


802.11ax (HE20)_Chain 0 / CH149

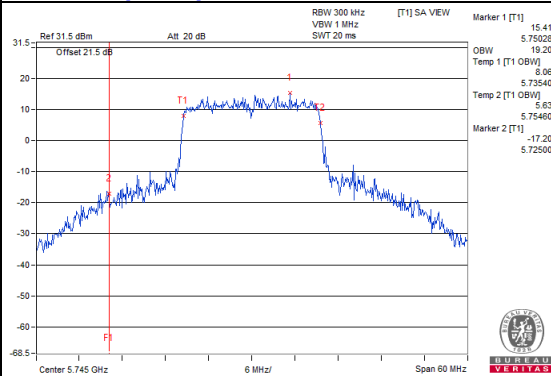


802.11ax (HE20)_Chain 1 / CH149

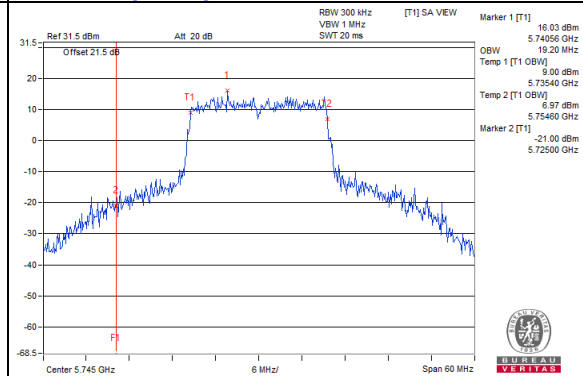

802.11ax (HE20)_Chain 2 / CH149

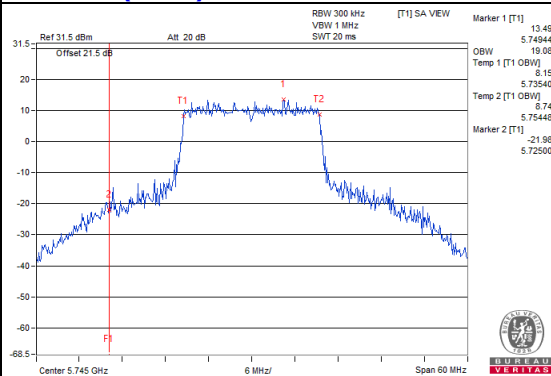


802.11ax (HE20)_Chain 3 / CH149

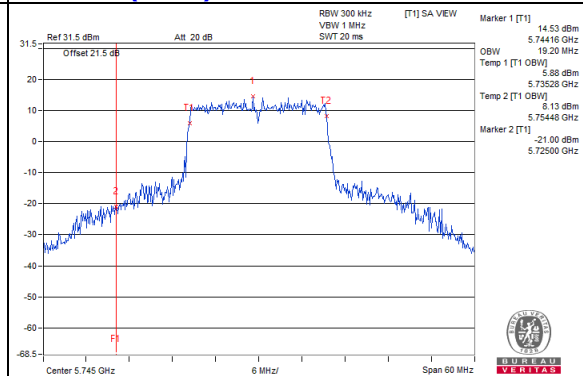


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11ax (HE40)_Chain 0 / CH151

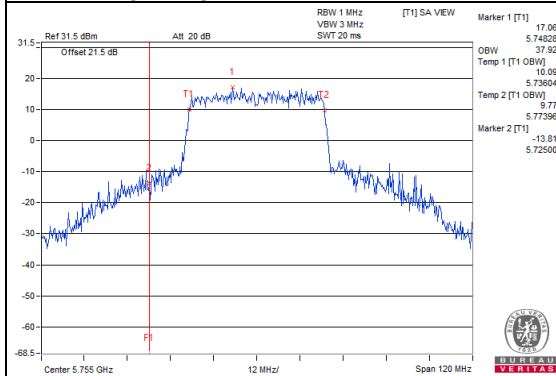


802.11ax (HE40)_Chain 1 / CH151

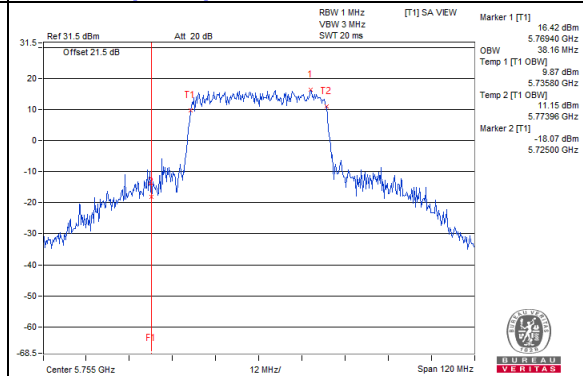


802.11ax (HE40)_Chain 2 / CH151

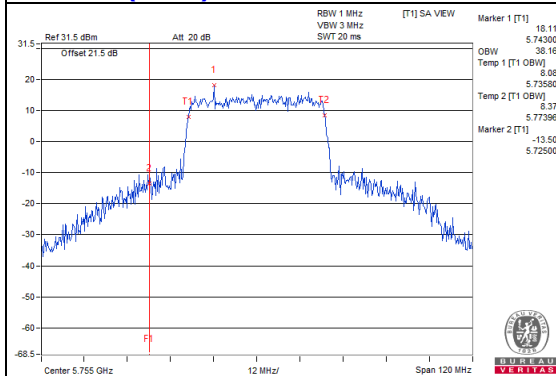


802.11ax (HE40)_Chain 3 / CH151

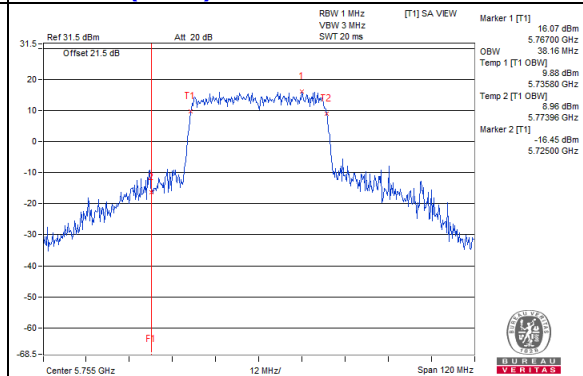


802.11ax (HE80)_Chain 0 / CH155

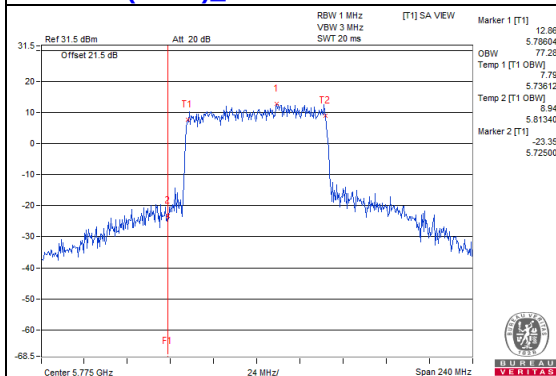


802.11ax (HE80)_Chain 1 / CH155

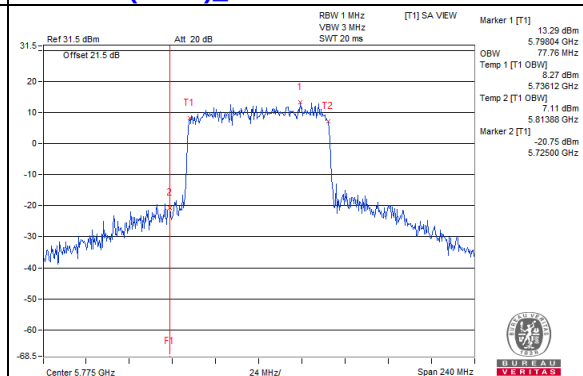

802.11ax (HE80)_Chain 2 / CH155

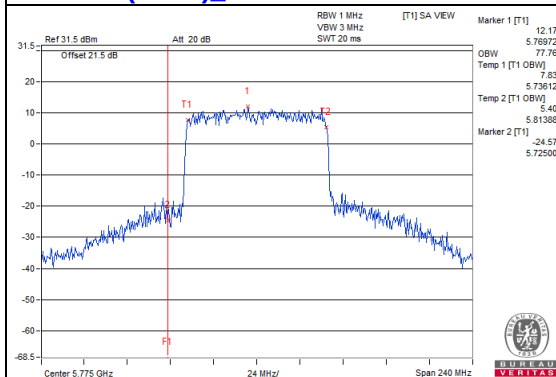

802.11ax (HE80)_Chain 3 / CH155

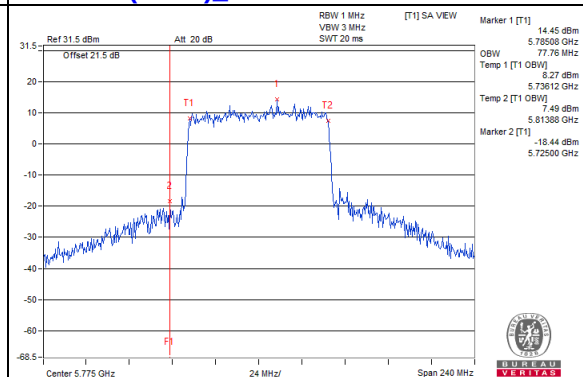


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For U-NII-1:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to “free run”.
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{ kHz})$
5. Sweep time = auto, trigger set to “free run”.
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add 10 log (1/duty cycle)

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

For U-NII-1:

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Duty Factor (dB)	Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	6.55	6.73	6.36	6.65	0.14	12.74	14.91	Pass
40	5200	7.70	7.92	7.23	7.61	0.14	13.78	14.91	Pass
48	5240	7.78	7.97	6.49	7.81	0.14	13.71	14.91	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 8.09 dBi > 6dBi, so the power density limit shall be reduced to $17-(8.09-6) = 14.91$ dBm.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Duty Factor (dB)	Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	5.07	5.28	5.21	5.45	0.18	11.46	14.91	Pass
40	5200	7.50	7.07	7.33	7.65	0.18	13.59	14.91	Pass
48	5240	7.30	7.29	7.56	7.79	0.18	13.69	14.91	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 8.09 dBi > 6dBi, so the power density limit shall be reduced to $17-(8.09-6) = 14.91$ dBm.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Duty Factor (dB)	Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	-0.28	-0.21	-0.44	-0.08	0.12	5.89	14.91	Pass
46	5230	5.36	6.35	6.08	6.42	0.12	12.21	14.91	Pass


- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 8.09 dBi > 6dBi, so the power density limit shall be reduced to $17-(8.09-6) = 14.91$ dBm.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Duty Factor (dB)	Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	-3.57	-3.98	-4.41	-4.05	0.12	2.15	14.91	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 8.09 dBi > 6dBi, so the power density limit shall be reduced to $17 - (8.09 - 6) = 14.91$ dBm.

Spectrum Plot of Worst Value

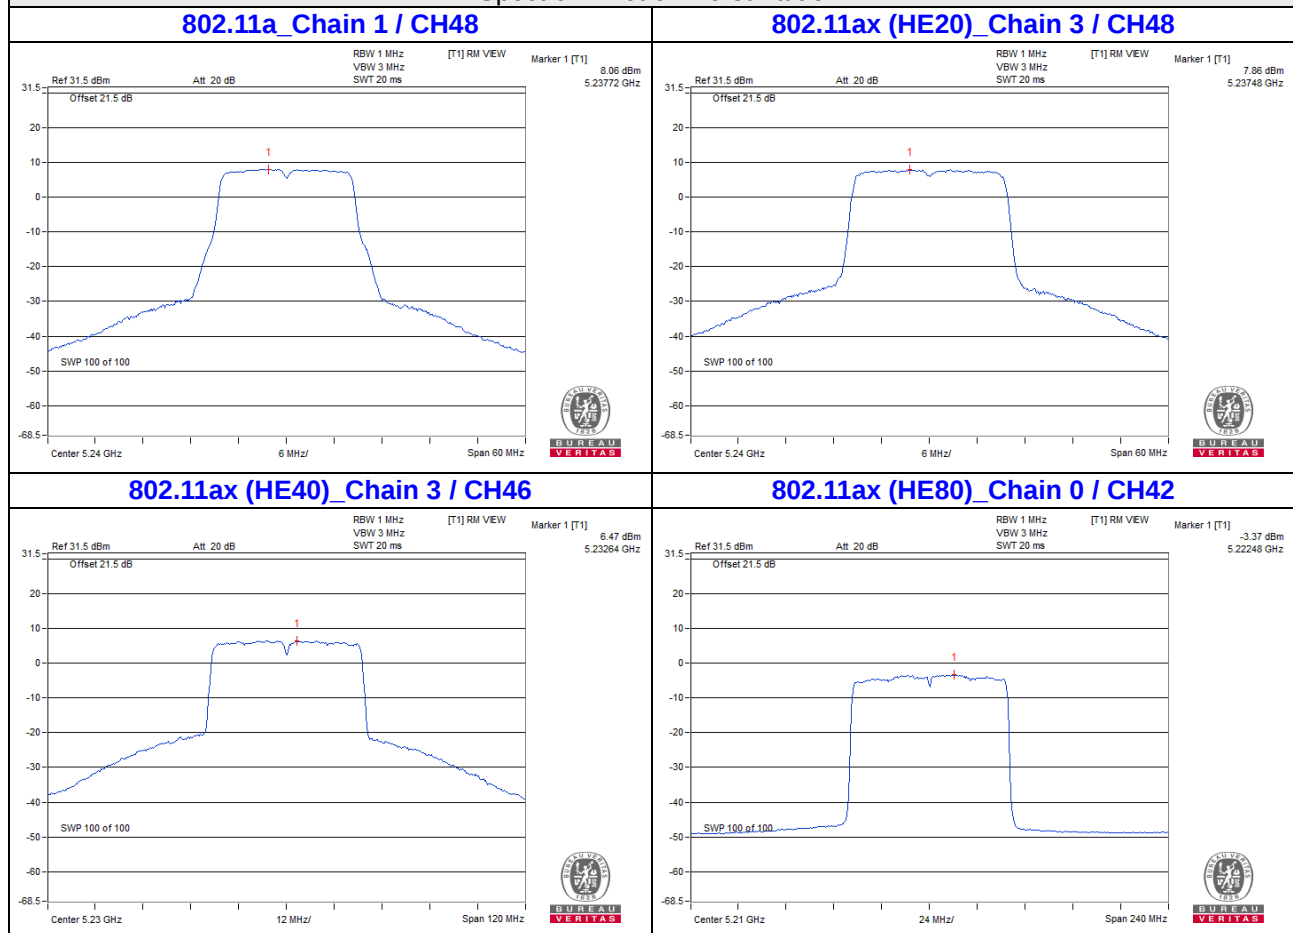

For U-NII-3:

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3						
149	5745	1.65	0.14	0.94	1.63	0.14	5.834	7.66	9.88	28.02	PASS
157	5785	1.63	0.14	0.80	1.59	0.14	5.675	7.54	9.76	28.02	PASS
165	5825	1.52	0.14	0.85	1.44	0.14	5.559	7.45	9.67	28.02	PASS

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = 7.98 dBi > 6dBi, so the power density limit shall be reduced to $17 - (7.98 - 6) = 28.02$ dBm.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3						
149	5745	0.29	0.20	-0.52	0.15	0.18	4.2073	6.24	8.46	28.02	PASS
157	5785	0.51	-0.08	0.15	0.62	0.18	4.4771	6.51	8.73	28.02	PASS
165	5825	0.35	-0.07	-0.58	0.00	0.18	4.1115	6.14	8.36	28.02	PASS

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = 7.98 dBi > 6dBi, so the power density limit shall be reduced to $17 - (7.98 - 6) = 28.02$ dBm.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3						
151	5755	-2.39	-2.35	-3.00	-2.39	0.12	2.3014	3.62	5.84	28.02	PASS
159	5795	-2.50	-2.58	-2.91	-2.52	0.12	2.2491	3.52	5.74	28.02	PASS


Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = 7.98 dBi > 6dBi, so the power density limit shall be reduced to $17 - (7.98 - 6) = 28.02$ dBm.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3						
155	5775	-5.90	-5.88	-6.63	-6.24	0.12	0.9977	-0.01	2.21	28.02	PASS

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = 7.98 dBi > 6dBi, so the power density limit shall be reduced to $17 - (7.98 - 6) = 28.02$ dBm.

Spectrum Plot of Worst Value

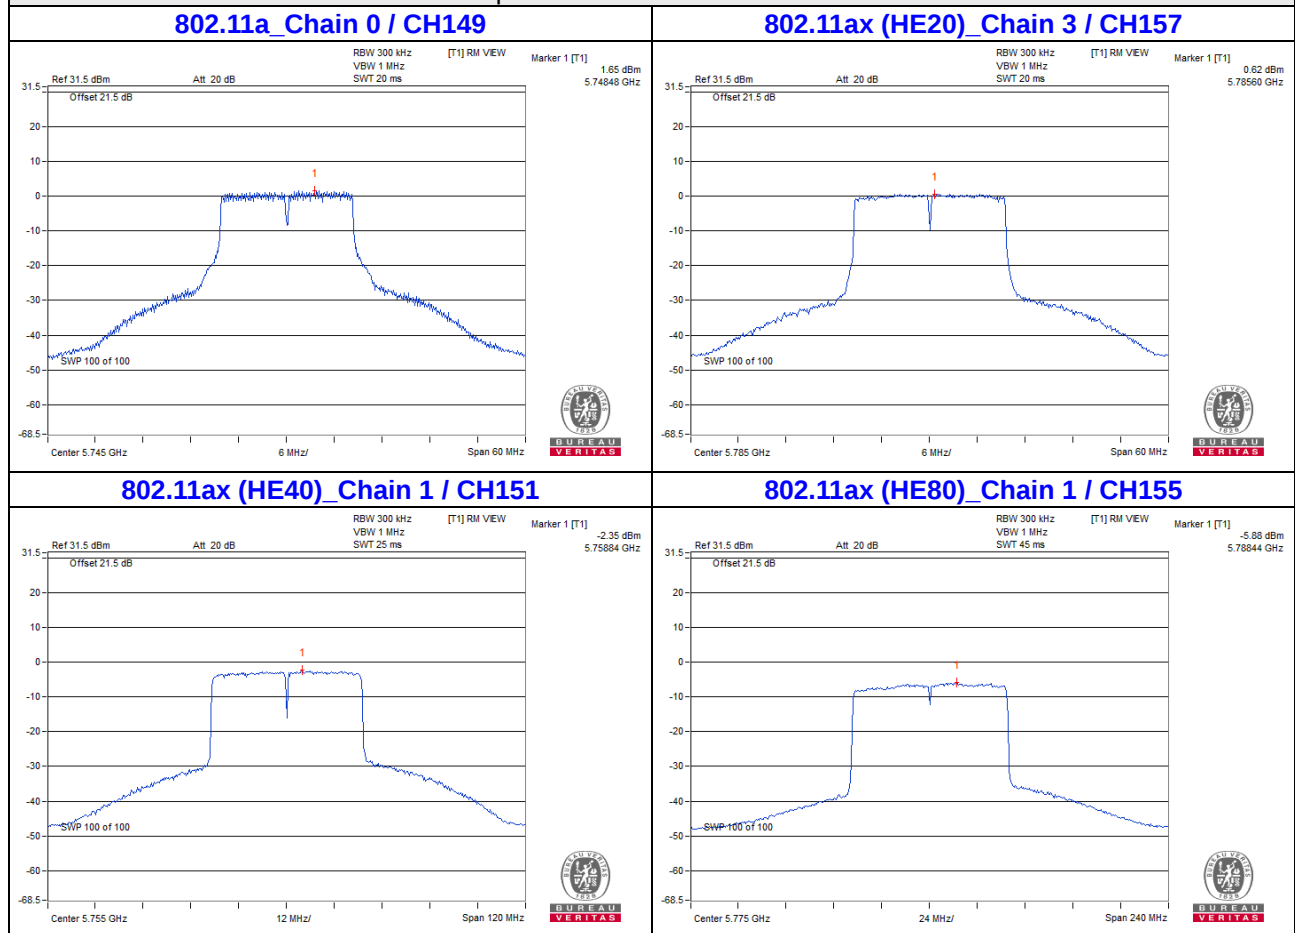


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

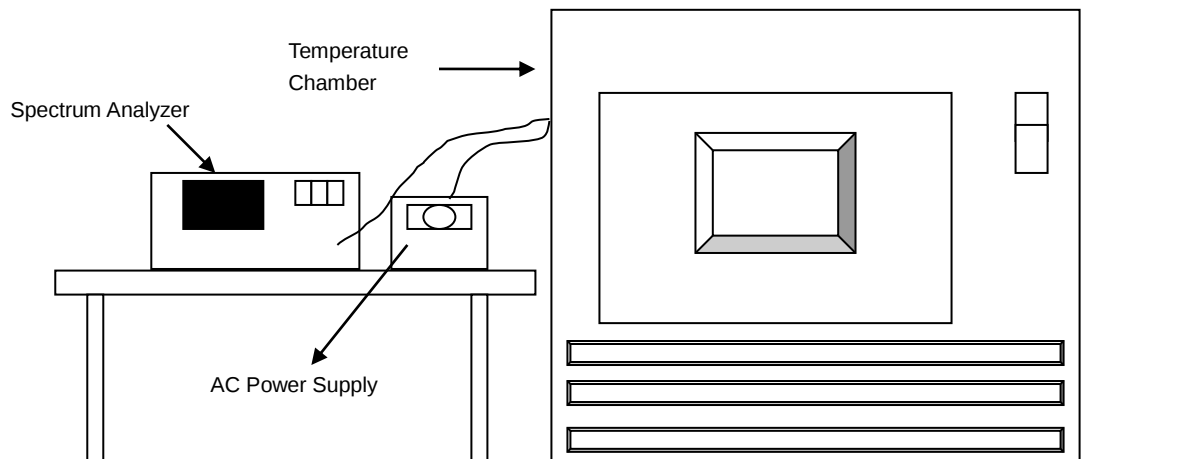

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
40	120	5179.9841	Pass	5179.9818	Pass	5179.986	Pass	5179.9851	Pass
30	120	5179.9934	Pass	5179.9963	Pass	5179.9949	Pass	5179.9922	Pass
20	120	5180.0116	Pass	5180.0111	Pass	5180.0122	Pass	5180.0114	Pass
10	120	5179.9752	Pass	5179.975	Pass	5179.9735	Pass	5179.9764	Pass
0	120	5180.0065	Pass	5180.0056	Pass	5180.0083	Pass	5180.0087	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5180.012	Pass	5180.0118	Pass	5180.0131	Pass	5180.0108	Pass
	120	5180.0116	Pass	5180.0111	Pass	5180.0122	Pass	5180.0114	Pass
	102	5180.0126	Pass	5180.0101	Pass	5180.0131	Pass	5180.0111	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.37	16.43	16.39	16.41	0.5	Pass
157	5785	16.4	16.43	16.39	16.43	0.5	Pass
165	5825	16.42	16.41	16.39	16.44	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	19.03	19.02	18.95	19.02	0.5	Pass
157	5785	19.03	18.98	19	19.03	0.5	Pass
165	5825	19.02	18.97	18.93	19.01	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	37.84	37.46	37.62	37.65	0.5	Pass
159	5795	37.79	37.19	37.58	37.68	0.5	Pass

802.11ax (HE80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	77.48	76.58	77.07	76.45	0.5	Pass

Spectrum Plot of Worst Value


802.11a_Chain 0 / CH149

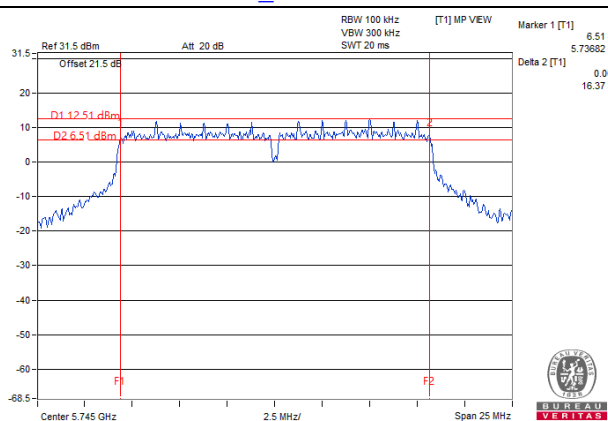


802.11ax (HE20)_Chain 2 / CH165

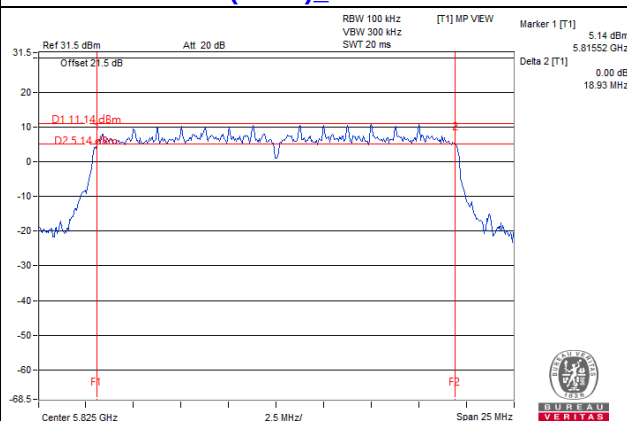

802.11ax (HE40)_Chain 1 / CH159

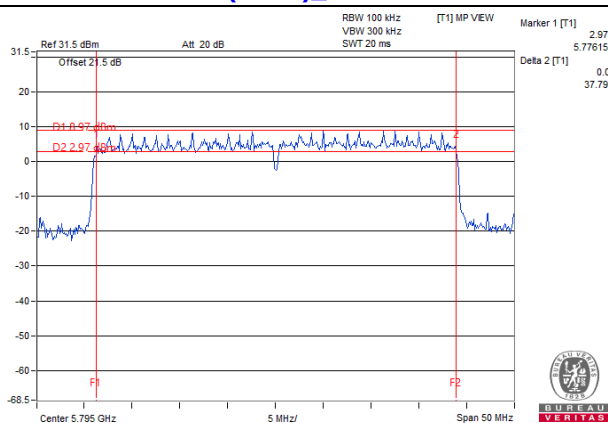

802.11ax (HE80)_Chain 3 / CH155

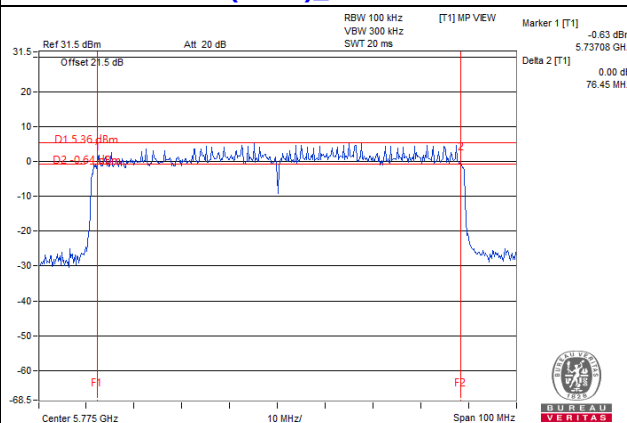

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

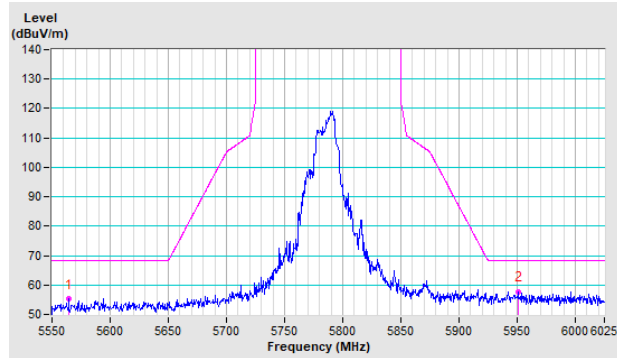


Vertical

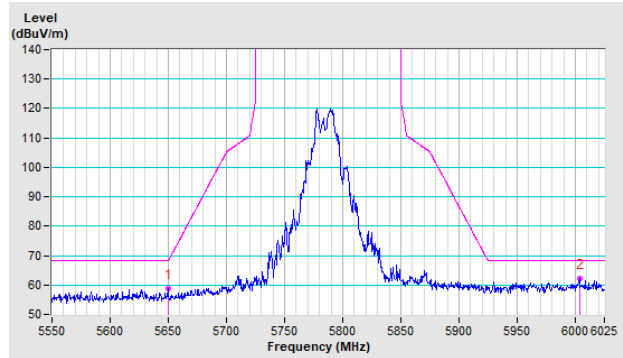


CH 157 5785 MHz

Horizontal

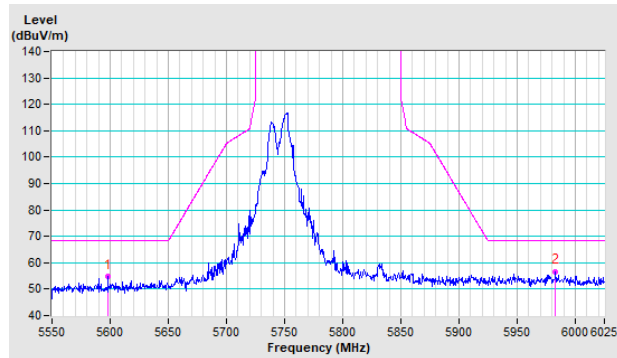


Vertical

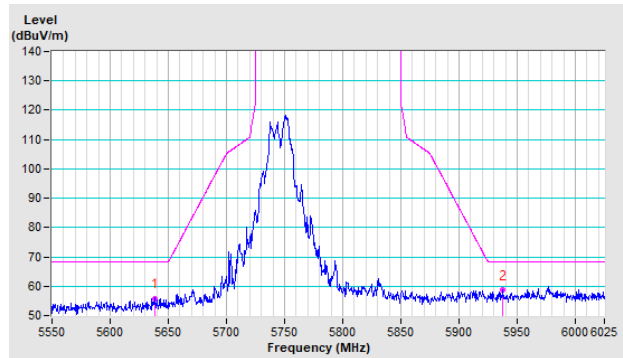


CH 165 5825 MHz

Horizontal

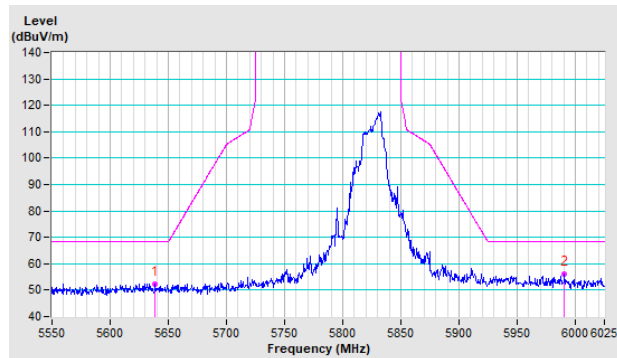


Vertical

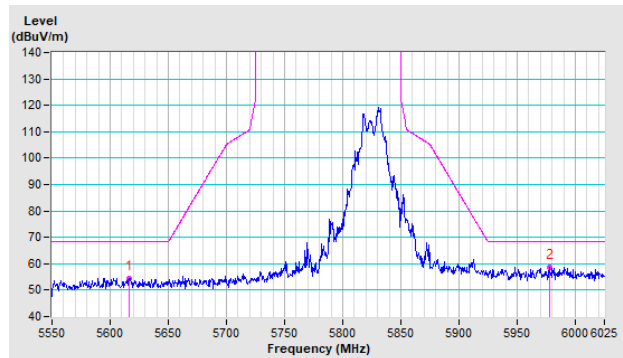


802.11ax (HE20)

CH 149 5745 MHz

Horizontal

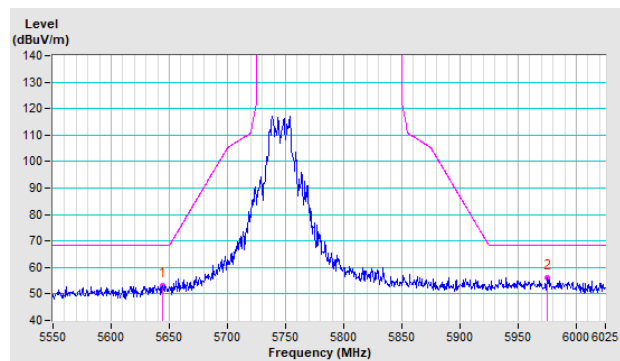


Vertical

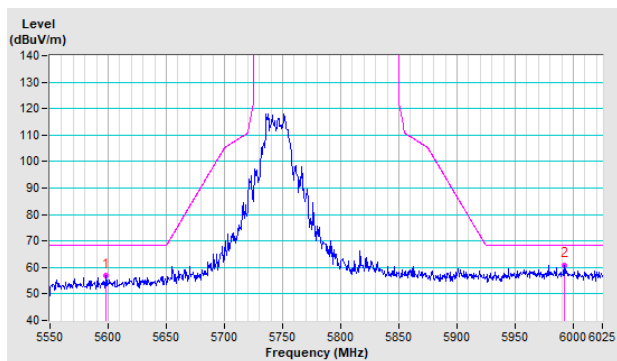


CH 157 5785 MHz

Horizontal

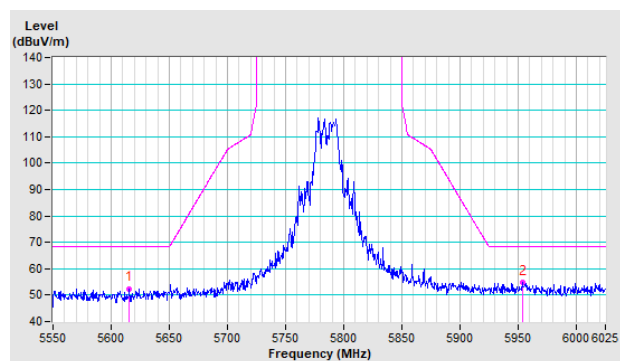


Vertical

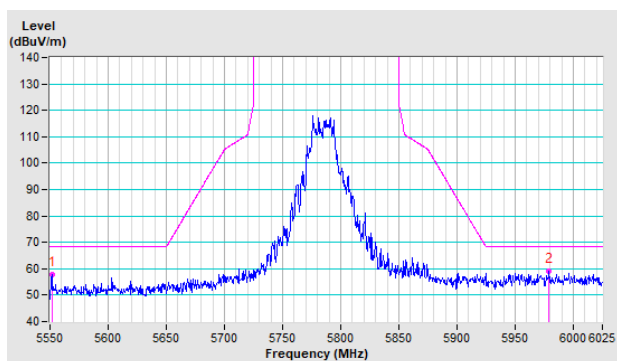


CH 165 5825 MHz

Horizontal

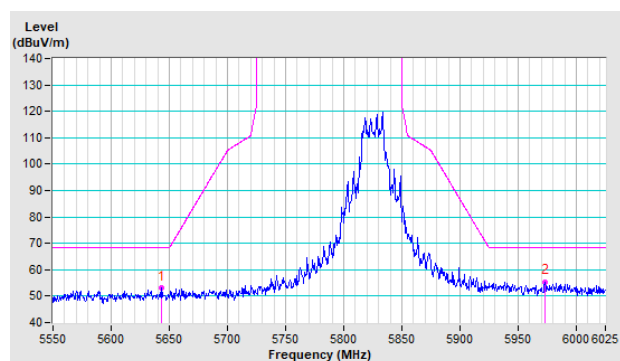


Vertical

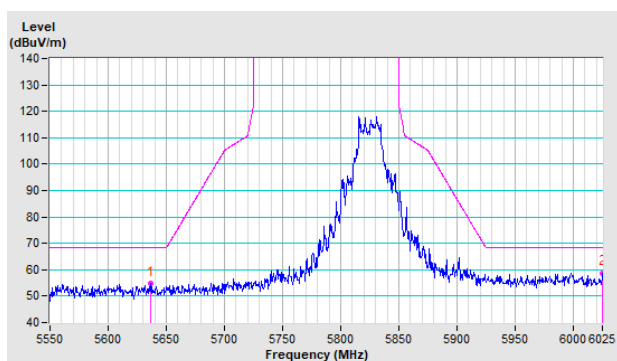


802.11ax (HE40)

CH 151 5755 MHz

Horizontal

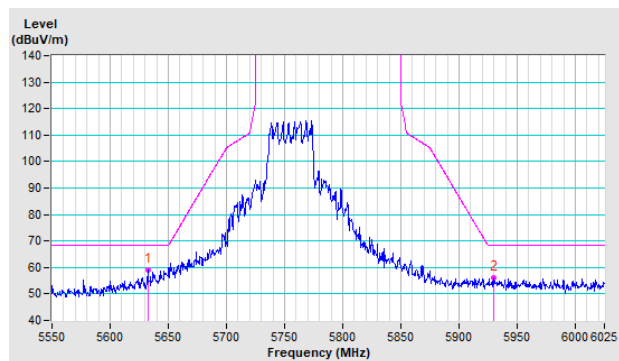


Vertical

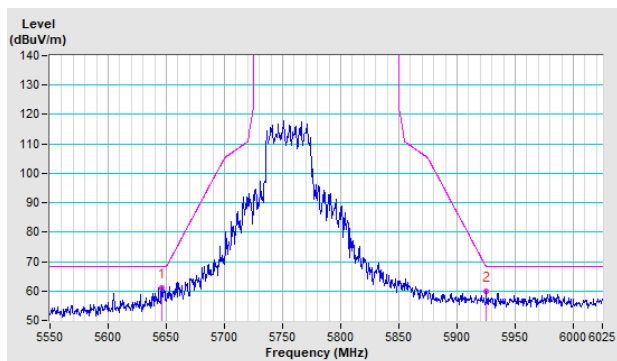


CH 159 5795 MHz

Horizontal

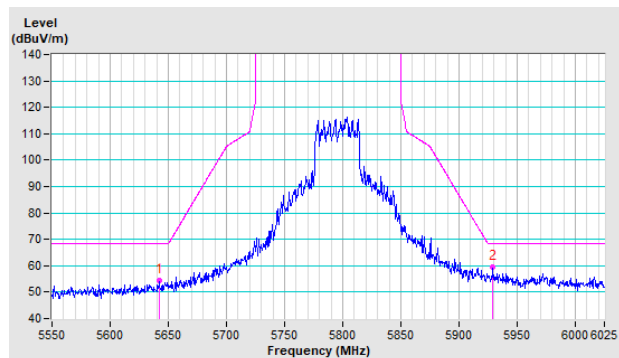


Vertical

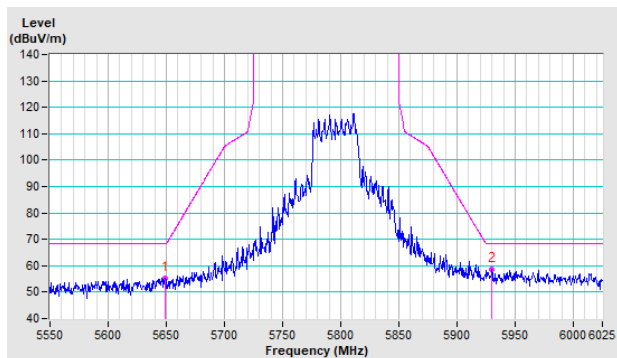


802.11ax (HE80)

CH 155 5775 MHz

Horizontal

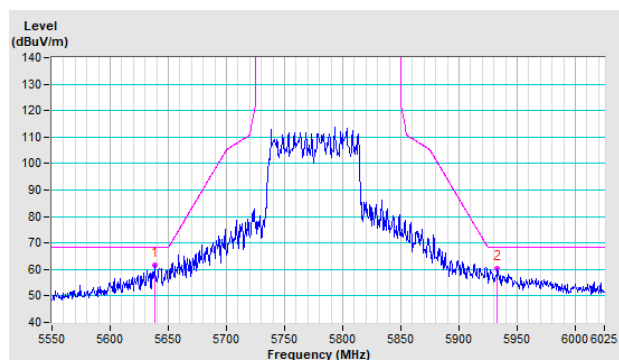


Vertical

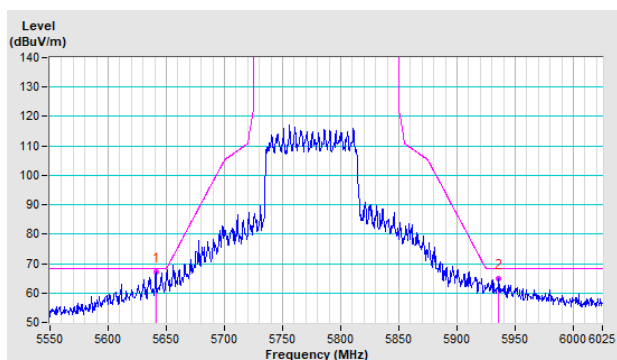


Annex B- Band-edge measurement (For U-NII-1 band)


802.11a

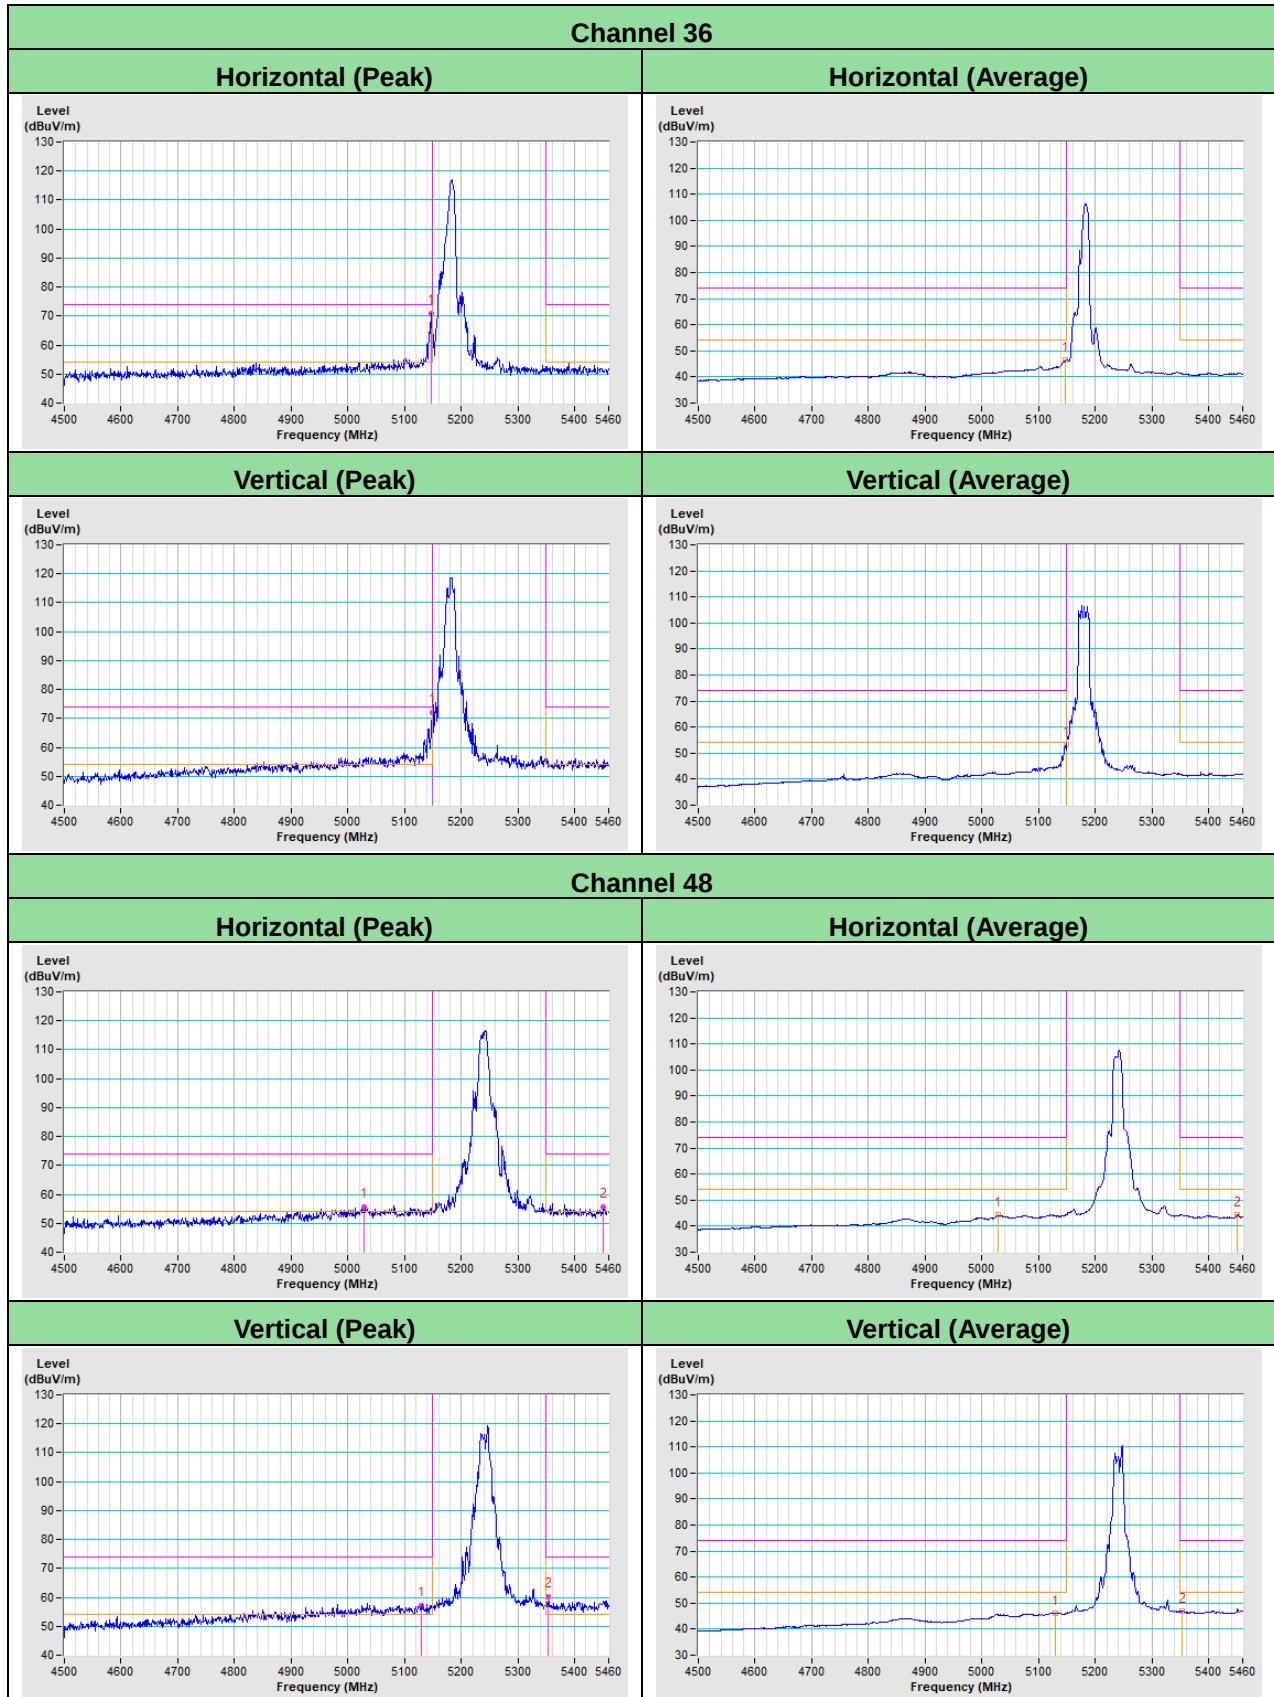


802.11ax (HE20)

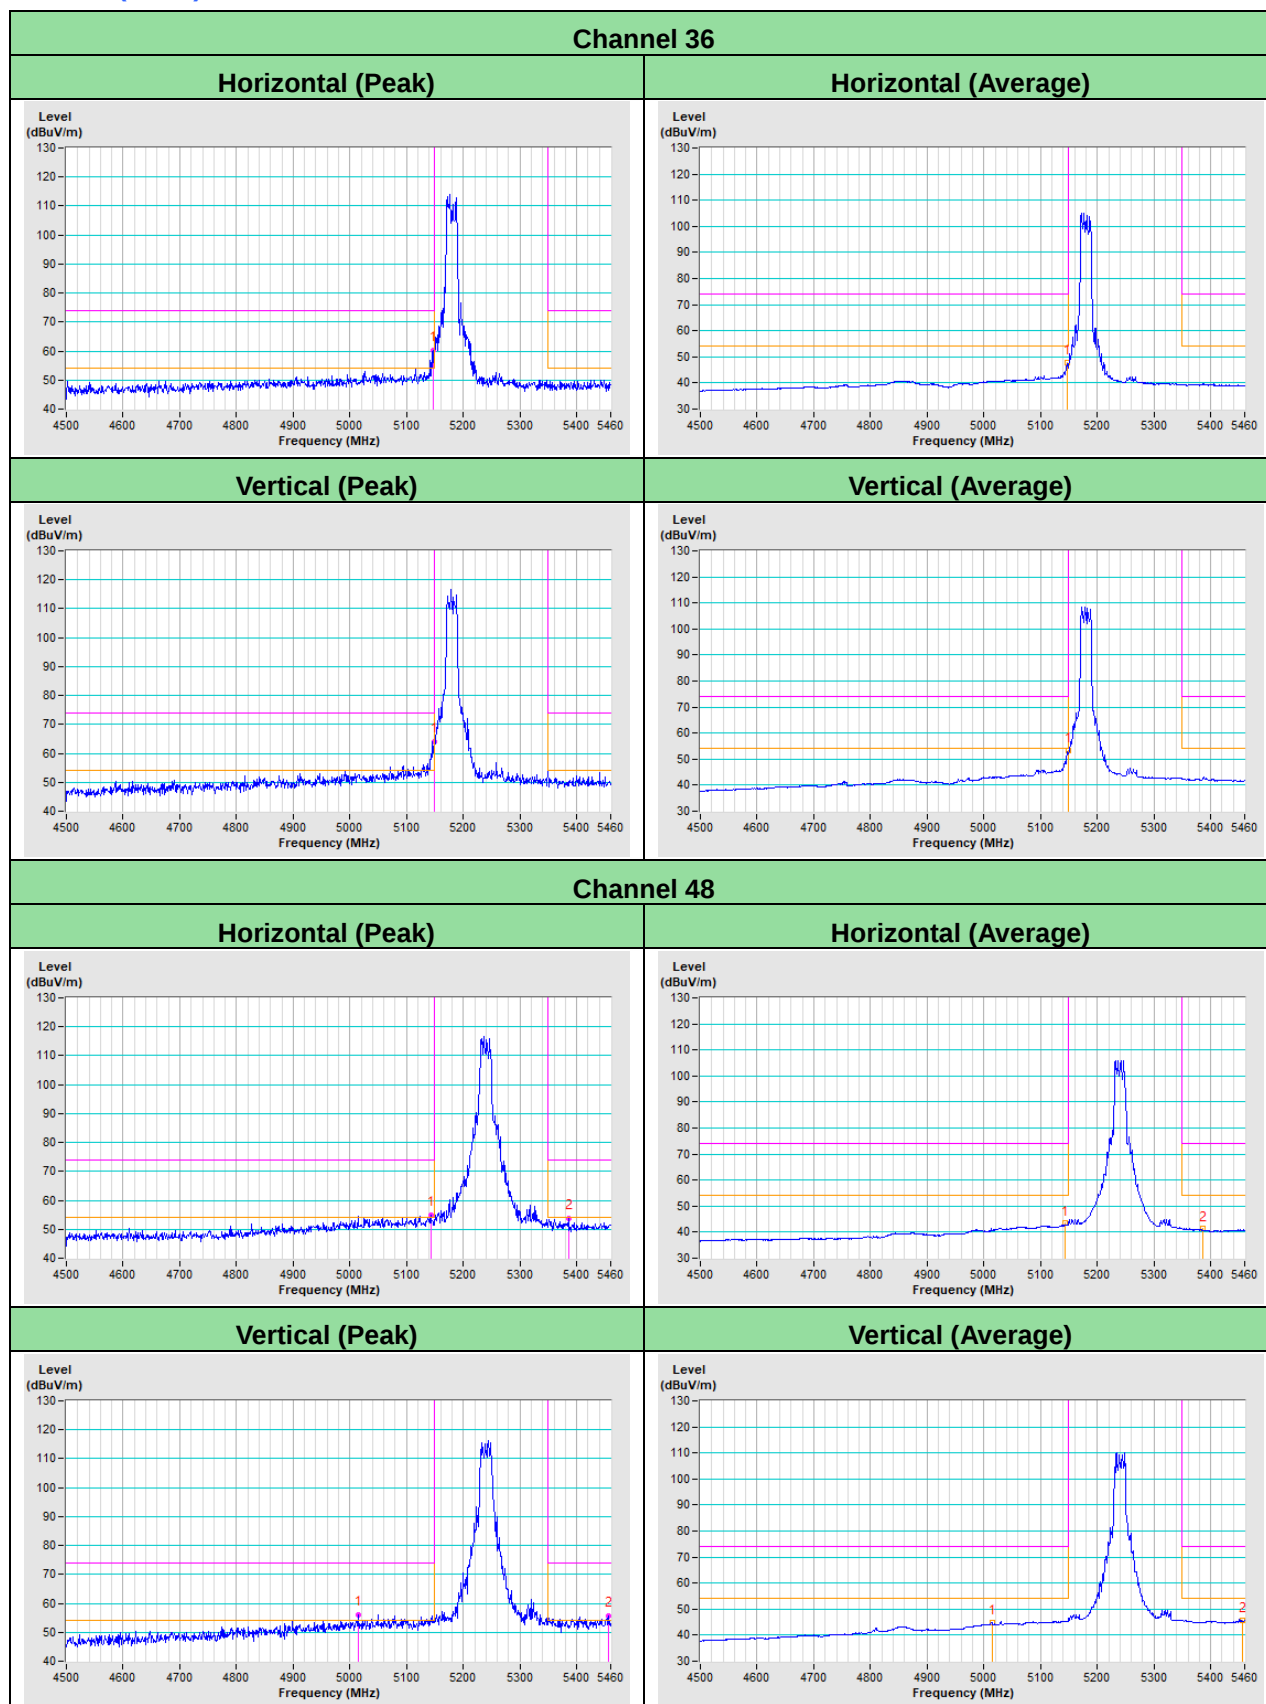

802.11ax (HE40)

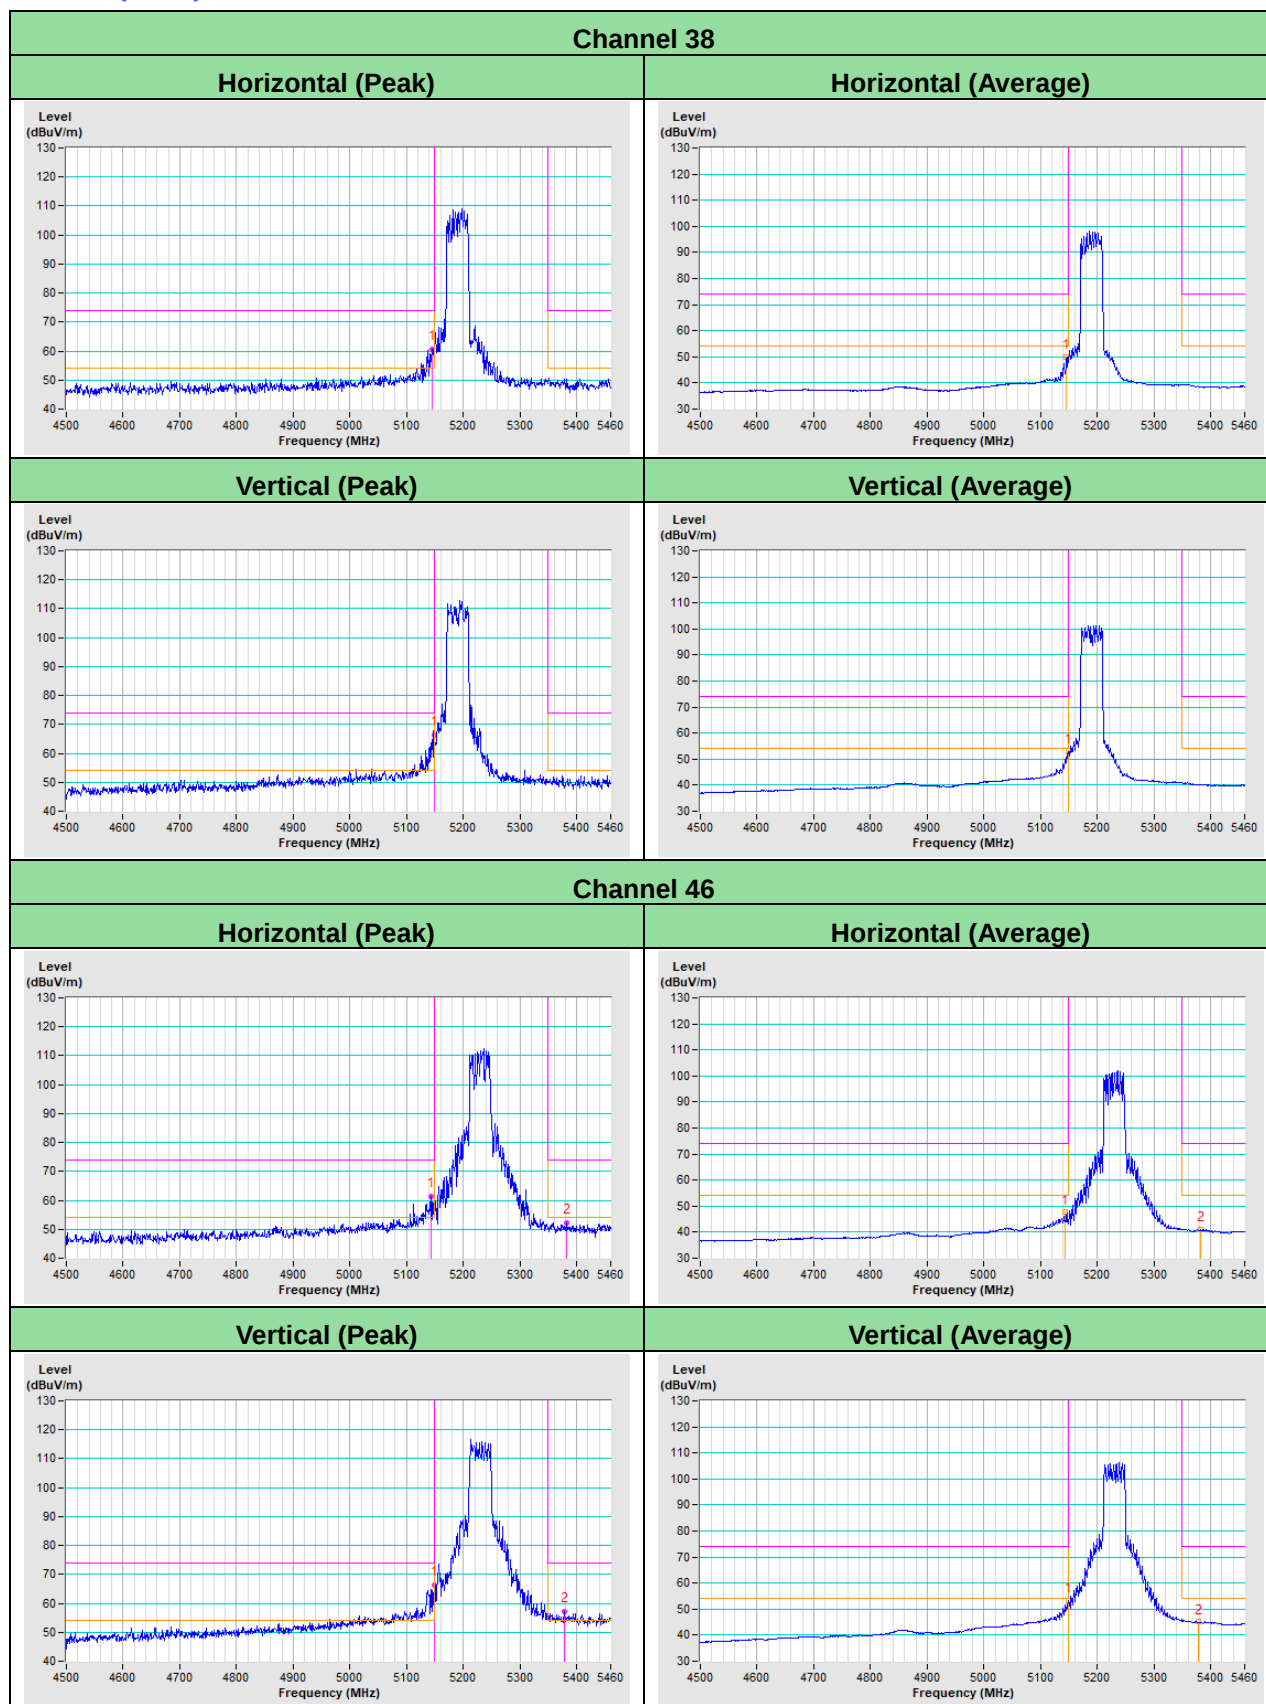

802.11ax (HE80)

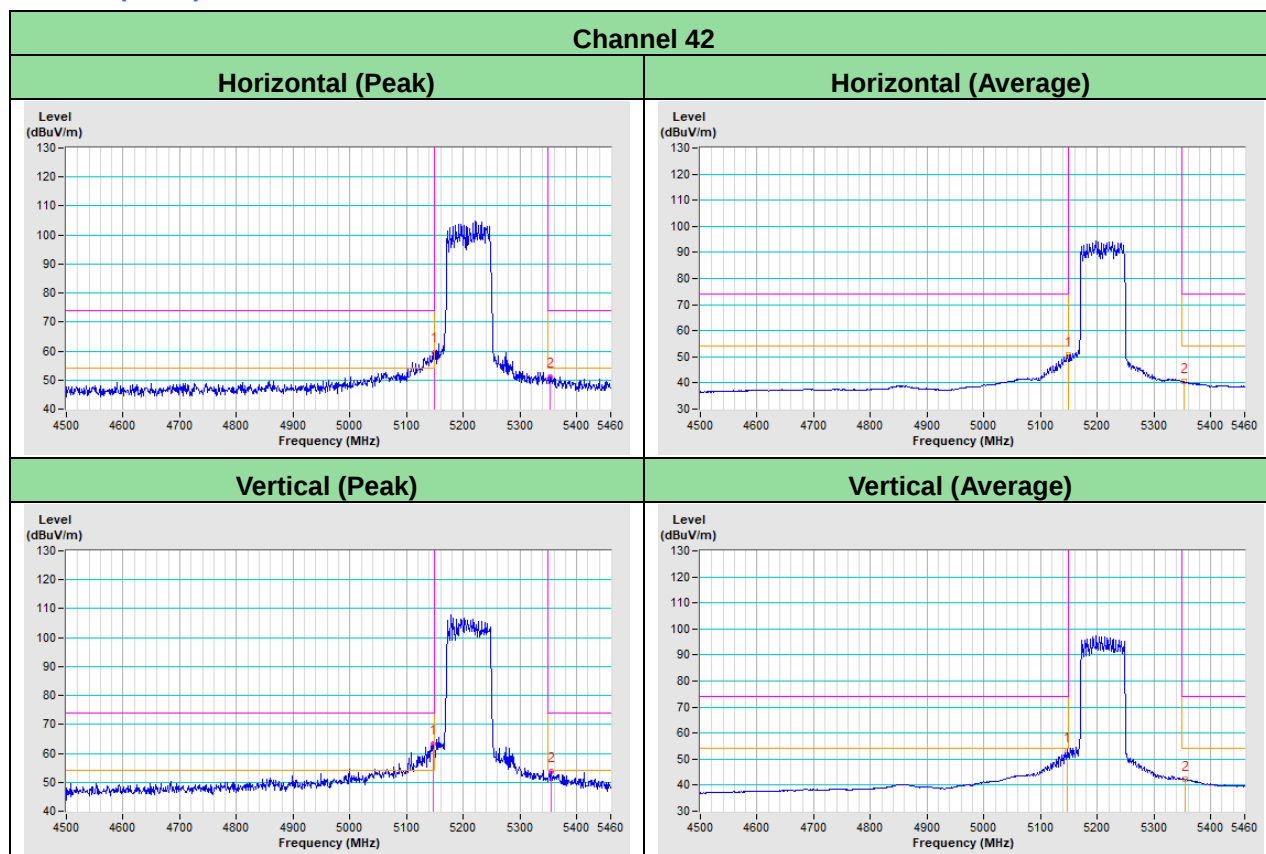

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---