

# **FCC Test Report**

Report No.: AGC14559220601FE01

FCC ID : 2AX4Y-X97PRO

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Smart Phone

**BRAND NAME** : DOOGEE

**MODEL NAME** : X97Pro, X97

**APPLICNAT** : Shenzhen DOOGEE Hengtong Technology CO., LTD

**DATE OF ISSUE** : Jul. 21, 2022

**STANDARD(S)** : FCC Part 15B Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd






Page 2 of 22

## REPORT REVISE RECORD


| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Jul. 21, 2022 | Valid         | Initial Release |





## **TABLE OF CONTENTS**

| 1. VERIFICATION OF CONFORMITY   | 4  |
|---|----|
| 2. SYSTEM DESCRIPTION   | 5  |
| 3. MEASUREMENT UNCERTAINTY  |    |
| 4. PRODUCT INFORMATION  |    |
| 5. SUPPORT EQUIPMENT  | 8  |
| 6. TEST FACILITY  | 9  |
| 6. TEST ITEMS AND THE RESULTS   | 10 |
| 7. FCCLINE CONDUCTED EMISSION TEST  | 11 |
| 7.1. LIMITS OF LINE CONDUCTED EMISSION TEST                                       | 11 |
| 7.2. BLOCK DIAGRAM OF TEST SETUP  | 11 |
| 7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST                                    | 12 |
| 7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST                                  | 13 |
| 8. FCC RADIATED EMISSION TEST   | 15 |
| 8.1. EXCEPT FOR CLASS A DIGITAL DEVICES, THE FIELD STRENGTH OF RADIATED EMISSIONS | 15 |
| 8.2. BLOCK DIAGRAM OF TEST SETUP  | 16 |
| 8.3. PROCEDURE OF RADIATED EMISSION TEST  | 17 |
| 8.4. TEST RESULT OF RADIATED EMISSION TEST  |    |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP   | 22 |
| APPENDIX B. PHOTOGRAPHS OF FUT  | 22 |





## 1. VERIFICATION OF CONFORMITY

| Applicant                        | Shenzhen DOOGEE Hengtong Technology CO., LTD   |
|----------------------------------|--|
| Address                          | B, 2F, Silicon Valley Power Digital Industrial Park, Dafu Industrial Zone, Guanlan Aobei Community, Shenzhen China |
| Manufacturer                     | Shenzhen DOOGEE Hengtong Technology CO., LTD   |
| Address                          | B, 2F, Silicon Valley Power Digital Industrial Park, Dafu Industrial Zone, Guanlan Aobei Community, Shenzhen China |
| Factory                          | Shenzhen DOOGEE Hengtong Technology CO., LTD   |
| Address                          | B, 2F, Silicon Valley Power Digital Industrial Park, Dafu Industrial Zone, Guanlan Aobei Community, Shenzhen China |
| Product Designation Smart Phone  |  |
| Brand Name                       | DOOGEE   |
| Test Model                       | X97Pro   |
| Series Model                     | X97  |
| <b>Declaration of Difference</b> | All the same except the model name   |
| Date of test                     | Jun. 30, 2022~Jul. 21, 2022  |
| Deviation                        | No any deviation from the test method.   |
| <b>Condition of Test Sample</b>  | Normal   |
| Report Template                  | AGCRT-US-IT/AC   |

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

| Prepared By | tder zhan                       |               |  |  |  |
|-------------|---------------------------------|---------------|--|--|--|
|             | Eder Zhan<br>(Project Engineer) | Jul. 21, 2022 |  |  |  |
| Reviewed By | Calin                           | Lin           |  |  |  |
|             | Calvin Liu<br>(Reviewer)        | Jul. 21, 2022 |  |  |  |
| Approved By | Max Zha                         | ng            |  |  |  |
|             | Max Zhang<br>Authorized Officer | Jul. 21, 2022 |  |  |  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 5 of 22


## 2. SYSTEM DESCRIPTION

#### **EUT** test procedure:

- 1. Connect EUT and peripheral devices (PC) through USB port.
- 2. Power on the EUT, use the software to transfer data between EUT and PC.
- 3. Make sure the EUT operates normally during the test.

#### **Test Mode**

| TEST MODE DESCRIPTION           |  |       |  |  |  |  |
|---------------------------------|--|-------|--|--|--|--|
| NO.                             | TEST MODE DESCRIPTION                    | WORST |  |  |  |  |
| 1                               | USB (connection for data transferring) V |       |  |  |  |  |
| Note: 1. V means EMI worst mode |  |       |  |  |  |  |





## 3. MEASUREMENT UNCERTAINTY

| Test                                    | Measurement<br>Uncertainty | Notes |
|---|----------------------------|-------|
| Transmitter power conducted             | ±0.57 dB                   | (1)   |
| Transmitter power Radiated              | ±2.20 dB                   | (1)   |
| Conducted spurious emission 9KHz-40 GHz | ±2.20 dB                   | (1)   |
| Occupied Bandwidth                      | ±0.01ppm                   | (1)   |
| Radiated Emission 30~1000MHz            | ±4.10dB                    | (1)   |
| Radiated Emission Above 1GHz            | ±4.32dB                    | (1)   |
| Conducted Disturbance0.15~30MHz         | ±3.20dB                    | (1)   |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 7 of 22

## 4. PRODUCT INFORMATION

| Housing Type            | Plastic and metal                          |
|-------------------------|--|
| Hardware Version        | E2T_01                                     |
| Software Version        | DOOGEE-X97Pro-EEA-Android12.0-20220616     |
| <b>EUT Input Rating</b> | DC 3.87V by battery or DC 5.0V by adapter. |

I/O Port Information (⊠Applicable □Not Applicable)

| I/O Port of EUT                           |   |                |   |  |  |  |
|---|---|----------------|---|--|--|--|
| I/O Port Type Number Specific Tested With |   |                |   |  |  |  |
| USB Port                                  | 1 | 0.8 Unshielded | 1 |  |  |  |
| Earphone Port                             | 1 | -              | 1 |  |  |  |




Page 8 of 22

## 5. SUPPORT EQUIPMENT

| Device Type | Manufacturer | Model Name | Serial No. | Data Cable | Power Cable      |
|-------------|--------------|------------|------------|------------|------------------|
| PC          | Xiaomi Inc.  |            |            |            |                  |
| Adapter     | Xiaomi Inc.  |            |            |            | 1.25m Unshielded |

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.





## 6. TEST FACILITY

| Test Site                         | Attestation of Global Compliance (Shenzhen) Co., Ltd   |
|-----------------------------------|--|
| Location                          | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Designation Number                | CN1259   |
| FCC Test Firm Registration Number | 975832   |
| A2LA Cert. No.                    | 5054.02  |
| Description                       | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA  |

## TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment     | Manufacturer | Model                | S/N    | Cal. Date     | Cal. Due      |
|---------------|--------------|----------------------|--------|---------------|---------------|
| TEST RECEIVER | R&S          | ESPI                 | 101206 | Mar. 28, 2022 | Mar. 27, 2023 |
| LISN          | R&S          | ESH2-Z5              | 100086 | Jun. 07, 2022 | Jun. 06, 2023 |
| Test software | R&S          | ES-K1(Ver.V1.<br>71) | N/A    | N/A           | N/A           |

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

| Equipment                       | Manufacturer | Model                | S/N        | Cal. Date     | Cal. Due      |
|---------------------------------|--------------|----------------------|------------|---------------|---------------|
| TEST RECEIVER                   | R&S          | ESCI                 | 10096      | Mar. 28, 2022 | Mar. 27, 2023 |
| EXA Signal<br>Analyzer          | Aglient      | N9010A               | MY53470504 | Nov. 17, 2021 | Nov. 16, 2022 |
| Horn antenna                    | SCHWARZBECK  | BBHA 9170            | #768       | Sep. 19, 2021 | Sep. 18, 2023 |
| preamplifier                    | ChengYi      | EMC184045SE          | 980508     | Sep.16, 2021  | Sep.15, 2022  |
| Double-Ridged<br>Waveguide Horn | ETS LINDGREN | 3117                 | 00034609   | Apr. 23, 2021 | Apr. 22, 2023 |
| Broadband<br>Preamplifier       | SCHWARZBECK  | 3117PA               | 00225134   | Sep.03, 2020  | Sep.02, 2022  |
| ANTENNA                         | SCHWARZBECK  | VULB9168             | D69250     | Jan. 08, 2021 | Jan. 07, 2023 |
| Test software                   | Tonscend     | JS32-RE<br>(Ver.2.5) | N/A        | N/A           | N/A           |



Page 10 of 22

## 6. TEST ITEMS AND THE RESULTS

| Test item             | Test Requirement      | Test Method     | Class/Severity | Result |
|-----------------------|-----------------------|-----------------|----------------|--------|
| CONDUCTED<br>EMISSION | FCC Part 15.107 Rules | ANSI C63.4:2014 | Class B        | Pass   |
| RADIATED<br>EMISSION  | FCC Part 15.109 Rules | ANSI C63.4:2014 | Class B        | Pass   |



## 7. FCCLINE CONDUCTED EMISSION TEST


#### 7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Fraguenov     | Maximum RF Line Voltage |                |  |  |  |  |
|---------------|-------------------------|----------------|--|--|--|--|
| Frequency     | Q.P.( dBuV)             | Average( dBuV) |  |  |  |  |
| 150kHz-500kHz | 66-56                   | 56-46          |  |  |  |  |
| 500kHz-5MHz   | 56                      | 46             |  |  |  |  |
| 5MHz-30MHz    | 60                      | 50             |  |  |  |  |

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

## 7.2. BLOCK DIAGRAM OF TEST SETUP

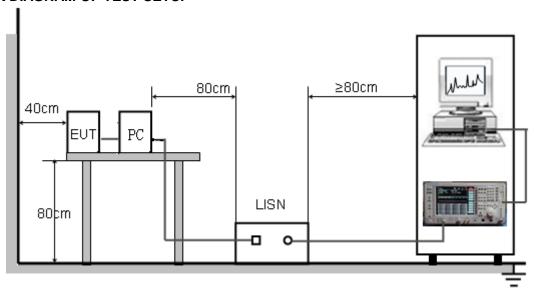



Page 12 of 22

#### 7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST


- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC 5V power from PC with receive AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.



#### 7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

## LINE CONDUCTED EMISSION TEST-L

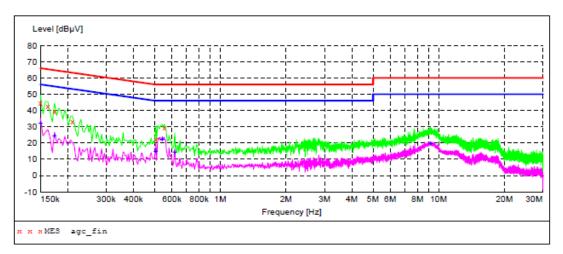

## MEASUREMENT RESULT: "agc\_fin"

| 2022/7/8 14:<br>Frequency<br>MHz                         |  | Transd<br>dB                    | Limit<br>dBµV        | Margin<br>dB                                 | Detector             | Line                       |
|--|--|---------------------------------|----------------------|--|----------------------|----------------------------|
| 0.150000<br>0.162000<br>0.174000<br>0.210000<br>0.506000 | 44.80<br>42.50<br>39.60<br>33.20<br>22.00<br>29.50 | 6.9<br>6.8<br>6.7<br>6.5<br>5.4 | 66<br>65<br>63<br>56 | 21.2<br>22.9<br>25.2<br>30.0<br>34.0<br>26.5 | QP<br>QP<br>QP<br>QP | L1<br>L1<br>L1<br>L1<br>L1 |

## MEASUREMENT RESULT: "agc\_fin2"

| 2022/7/8 14:06<br>Frequency<br>MHz           |                                  | Transd<br>dB             | Limit<br>dBµV        | Margin<br>dB                 | Detector | Line                 |
|--|----------------------------------|--------------------------|----------------------|------------------------------|----------|----------------------|
| 0.150000<br>0.174000<br>0.506000<br>0.542000 | 32.10<br>24.10<br>15.10<br>22.10 | 6.9<br>6.7<br>5.4<br>5.4 | 56<br>55<br>46<br>46 | 23.9<br>30.7<br>30.9<br>23.9 | AV<br>AV | L1<br>L1<br>L1<br>L1 |
| 0.618000<br>9.162000                         | 14.20<br>19.70                   | 5.4                      | 46<br>50             |                              | AV<br>AV | L1<br>L1             |


## **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



## LINE CONDUCTED EMISSION TEST-N

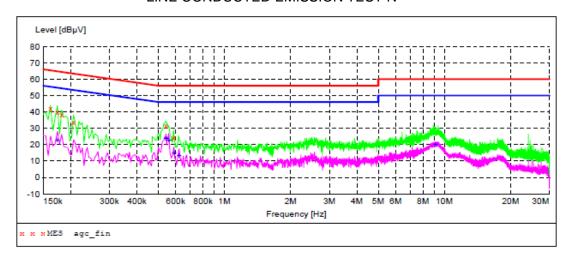

# MEASUREMENT RESULT: "agc\_fin"

| 2022/7/8 14:02<br>Frequency<br>MHz |       | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line |
|------------------------------------|-------|--------------|---------------|--------------|----------|------|
| 0.162000                           | 42.10 | 6.8          | 65            | 23.3         | QP       | N    |
| 0.174000                           | 40.30 | 6.7          | 65            | 24.5         | QP       | N    |
| 0.182000                           | 38.60 | 6.7          | 64            | 25.8         | QP       | N    |
| 0.206000                           | 33.80 | 6.5          | 63            | 29.6         | QP       | N    |
| 0.542000                           | 31.90 | 5.4          | 56            | 24.1         | QP       | N    |
| 0.586000                           | 24.10 | 5.4          | 56            | 31.9         | QP       | N    |

## MEASUREMENT RESULT: "agc\_fin2"

| 2022/7/8<br>Frequen                            | ncy Lev                       | rel Transd<br>UµV dB       |                | _                    | Detector | Line             |
|--|-------------------------------|----------------------------|----------------|----------------------|----------|------------------|
| 0.1740<br>0.5420<br>0.5580<br>0.5900<br>0.6220 | 000 23.<br>000 23.<br>000 15. | 80 5.4<br>00 5.4<br>10 5.4 | 46<br>46<br>46 | 22.2<br>23.0<br>30.9 |          | N<br>N<br>N<br>N |
| 9.0980   |                               |                            |                |                      |          | N                |

#### **RESULT: PASS**



Page 15 of 22

## 8. FCC RADIATED EMISSION TEST

## 8.1. EXCEPT FOR CLASS A DIGITAL DEVICES, THE FIELD STRENGTH OF RADIATED EMISSIONS

from unintentional radiators at a distance of 3 meters shall not exceed the following values:


| Frequency<br>(MHz) | Distance<br>(m) | Maximum Field Strength Limit (dBuV/m/ Q.P.) |
|--------------------|-----------------|---|
| 30~88              | 3               | 40.0  |
| 88~216             | 3               | 43.5  |
| 216~960            | 3               | 46.0  |
| Above 960          | 3               | 54.0  |

Note: The lower limit shall apply at the transition frequency.

## 8.1.1 The following table is the setting of spectrum analyzer and receiver:

| Spectrum Parameter    | Setting                                   |  |  |  |
|-----------------------|---|--|--|--|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP               |  |  |  |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP               |  |  |  |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP            |  |  |  |
| Start ~Stop Frequency | 1GHz~26.5GHz                              |  |  |  |
| Start ~Stop Frequency | 1MHz/1MHz for Peak, 1MHz/10Hz for Average |  |  |  |


| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |






#### **8.2. BLOCK DIAGRAM OF TEST SETUP**

## System Diagram of Connections between EUT and Simulators

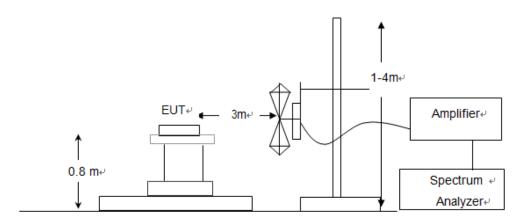

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

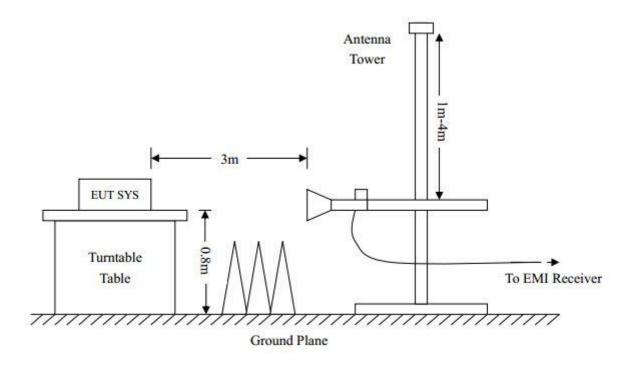



Page 17 of 22


#### 8.3. PROCEDURE OF RADIATED EMISSION TEST

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 3MHz VBW for average reading in spectrum analyzer. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. The test data of the worst case condition (mode 1) was reported on the Summary Data page.



#### 8.4. TEST RESULT OF RADIATED EMISSION TEST

## RADIATED EMISSION TEST AT 3M DISTANCE-HORIZONTAL

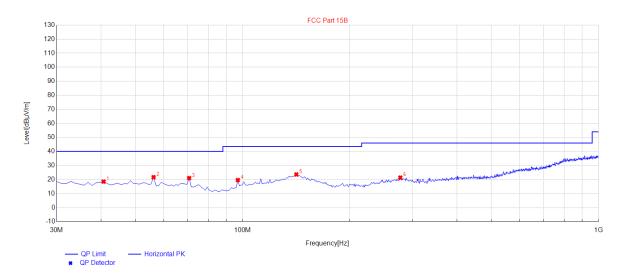


| NO. | Freq.<br>[MHz] | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height [cm] | Angle<br>[°] | Polarity   |
|-----|----------------|-------------------|----------------|-------------------|----------------|-------------|--------------|------------|
| 1   | 40.67          | 18.57             | 10.79          | 40.00             | 21.43          | 100         | 180          | Horizontal |
| 2   | 56.19          | 21.72             | 11.20          | 40.00             | 18.28          | 100         | 86           | Horizontal |
| 3   | 70.74          | 21.07             | 9.07           | 40.00             | 18.93          | 100         | 6            | Horizontal |
| 4   | 96.93          | 19.67             | 10.11          | 43.50             | 23.83          | 100         | 258          | Horizontal |
| 5   | 141.55         | 23.64             | 17.65          | 43.50             | 19.86          | 100         | 78           | Horizontal |
| 6   | 277.35         | 21.41             | 16.05          | 46.00             | 24.59          | 100         | 10           | Horizontal |

**RESULT: PASS** 



## RADIATED EMISSION TEST AT 3M DISTANCE-VERTICAL

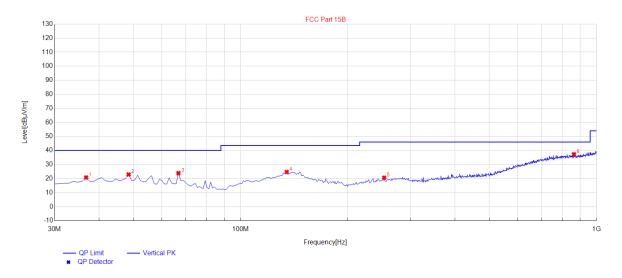

| NO. | Freq.<br>[MHz] | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity |
|-----|----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|----------|
| 1   | 36.79          | 20.77             | 10.73          | 40.00             | 19.23          | 100            | 271          | Vertical |
| 2   | 48.43          | 22.89             | 11.53          | 40.00             | 17.11          | 100            | 322          | Vertical |
| 3   | 66.86          | 23.84             | 9.76           | 40.00             | 16.16          | 100            | 201          | Vertical |
| 4   | 134.76         | 24.68             | 18.71          | 43.50             | 18.82          | 100            | 13           | Vertical |
| 5   | 253.1          | 20.62             | 14.23          | 46.00             | 25.38          | 100            | 326          | Vertical |
| 6   | 864.2          | 37.29             | 31.59          | 46.00             | 8.71           | 100            | 91           | Vertical |


#### **RESULT: PASS**

Note: 1.Measurement = Reading + Factor, Over = Limit-Measurement .

2. The "Factor" value can be calculated automatically by software of measurement system.




## RADIATED EMISSION ABOVE 1GHZ TEST AT 3M DISTANCE -HORIZONTAL

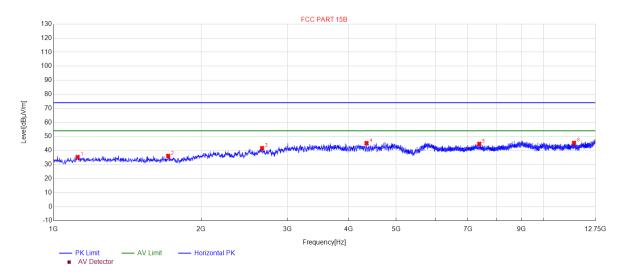

| NO. | Freq.<br>[MHz] | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   |
|-----|----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|------------|
| 1   | 1119.862       | 35.32             | -19.86         | 74.00             | 38.68          | 100            | 360          | Horizontal |
| 2   | 1713.2963      | 36.14             | -18.26         | 74.00             | 37.86          | 100            | 300          | Horizontal |
| 3   | 2662.7913      | 41.66             | -12.50         | 74.00             | 32.34          | 100            | 20           | Horizontal |
| 4   | 4349.0849      | 45.23             | -7.68          | 74.00             | 28.77          | 100            | 50           | Horizontal |
| 5   | 7386.7637      | 44.68             | -3.48          | 74.00             | 29.32          | 100            | 20           | Horizontal |
| 6   | 11525.5276     | 45.39             | 0.27           | 74.00             | 28.61          | 100            | 150          | Horizontal |



# RADIATED EMISSION ABOVE 1GHZ TEST AT 3M DISTANCE -VERTICAL

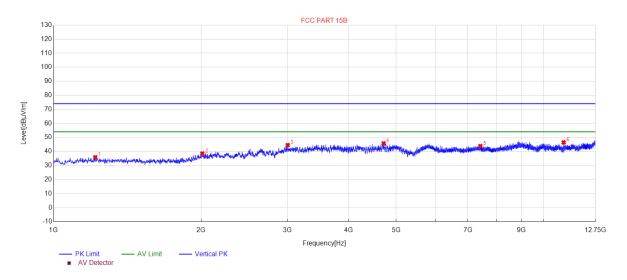

| NO. | Freq.<br>[MHz] | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity |
|-----|----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|----------|
| 1   | 1216.2216      | 35.90             | -19.88         | 74.00             | 38.10          | 100            | 120          | Vertical |
| 2   | 2010.6011      | 38.54             | -15.96         | 74.00             | 35.46          | 100            | 300          | Vertical |
| 3   | 3003.5754      | 44.54             | -11.22         | 74.00             | 29.46          | 100            | 200          | Vertical |
| 4   | 4712.1962      | 45.77             | -7.00          | 74.00             | 28.23          | 100            | 270          | Vertical |
| 5   | 7424.3674      | 43.84             | -3.46          | 74.00             | 30.16          | 100            | 240          | Vertical |
| 6   | 10977.9228     | 46.47             | 0.54           | 74.00             | 27.53          | 100            | 170          | Vertical |

Note: 1. Emissions range from 6GHz to 12.5GHz have 20dB margin. No recording in the test report.

- 2. Factor=Antenna Factor + Cable loss Amplifier gain, Margin= Limit Measurement.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



Page 22 of 22

## **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC14559220601AP03

**APPENDIX B: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC14559220601AP02

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.