

FCC Test Report

Product Name	MOBILE DATA TERMINAL
Model No.	MT7010
FCC ID.	2ABTU-MT7010

Applicant	RuggON Corporation
Address	4F, No. 298, Yang Guang St. Neihu Dist., Taipei City, Taiwan

Date of Receipt	Aug. 29, 2017
Issued Date	Oct. 23, 2017
Report No.	1780508R-RFUSP12V00-C
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Oct. 23, 2017

Report No.: 1780508R-RFUSP12V00-C



Product Name	MOBILE DATA TERMINAL
Applicant	RuggON Corporation
Address	4F, No. 298, Yang Guang St. Neihu Dist., Taipei City, Taiwan
Manufacturer	RuggON Corporation
Model No.	MT7010
FCC ID.	2ABTU-MT7010
EUT Rated Voltage	DC 9-36V
EUT Test Voltage	DC 12V
Trade Name	RuggON
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2016 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v04
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Joanne Lin)

Tested By :



(Engineer / Anson Lu)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	9
1.6. Test Facility	10
1.7. List of Test Equipment.....	11
2. CONDUCTED EMISSION	12
2.1. Test Setup	12
2.2. Limits.....	13
2.3. Test Procedure	13
2.4. Uncertainty	13
2.5. Test Result of Conducted Emission.....	14
3. PEAK POWER OUTPUT	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output.....	16
4. RADIATED EMISSION	17
4.1. Test Setup	17
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Uncertainty	20
4.5. Test Result of Radiated Emission.....	21
5. RF ANTENNA CONDUCTED TEST.....	25
5.1. Test Setup	25
5.2. Limits.....	25
5.3. Test Procedure	25
5.4. Uncertainty	25
5.5. Test Result of RF Antenna Conducted Test.....	26
6. BAND EDGE	27
6.1. Test Setup	27
6.2. Limit	28
6.3. Test Procedure	28
6.4. Uncertainty	28
6.5. Test Result of Band Edge	29
7. 6DB BANDWIDTH.....	33
7.1. Test Setup	33
7.2. Limits.....	33
7.3. Test Procedure	33
7.4. Uncertainty	33
7.5. Test Result of 6dB Bandwidth.....	34
8. POWER DENSITY	36
8.1. Test Setup	36
8.2. Limits.....	36
8.3. Test Procedure	36
8.4. Uncertainty	36
8.5. Test Result of Power Density	37
9. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	39
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	MOBILE DATA TERMINAL
Trade Name	RuggON
Model No.	MT7010
FCC ID.	2ABTU-MT7010
Frequency Range	2402 – 2480MHz
Channel Number	V4.1: 40CH
Type of Modulation	V4.1: GFSK(1Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Anjie	MT7010	PIFA Antenna	2.14dBi for 2.4 GHz

Note:

1. The antenna of EUT is conforming to FCC 15.203.
2. Only the higher gain antenna was tested and recorded in this report

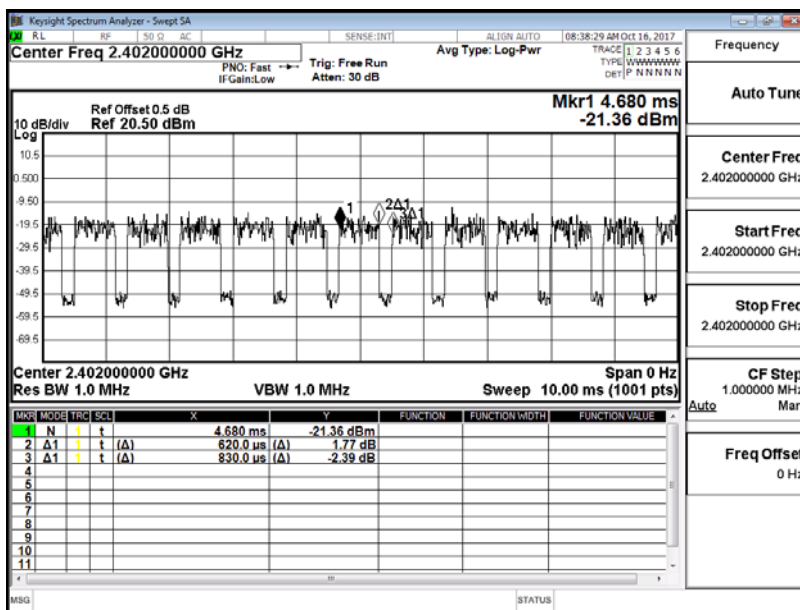
Center Frequency of Each Channel: (For V4.0)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Duty Cycle:

BLE	0.747
-----	-------

*Duty cycle = Ton / (Ton + Toff)



Note:

1. The EUT is a MOBILE DATA TERMINAL with a built-in WLAN 、 Bluetooth V3.0, V2.1+EDR,V4.1 transceiver, this report for Bluetooth V4.1.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit - BLE (GFSK)
-----------	-------------------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 GPS Antenna	N/A	N/A	N/A	N/A
2 Modem	ACEEX	DM-1414	0102027550	Non-Shielded, 1.8m
3 Mouse	Logitech	M-SBM96B	810-000439	N/A
4 WD HDD 2.5	Western Digital	WD1200BEVS	WXE108L30036	Non-Shielded, 1.8m With Core*1
5 Earphone	Dr.AV	CD-806B	N/A	N/A
6 Modem	ACEEX	DM-1414	0102027533	Non-Shielded, 1.8m
7 DC 12V Battery	TRANE	12B50PE	N/A	N/A

Signal Cable Type	Signal cable Description
A Signal Cable	Non-Shielded, 1.3m
B Signal Cable	Non-Shielded, 1.2m
C Signal Cable	Non-Shielded, 1.8m
D USB Cable	Non-Shielded, 0.4m
E Signal Cable	Non-Shielded, 1.8m
F Signal Cable	Non-Shielded, 1.2m
G Signal Cable	Non-Shielded, 0.7m
H Network Cable	Non-Shielded, 1.8m
I Signal Cable	Non-Shielded, 1.5m

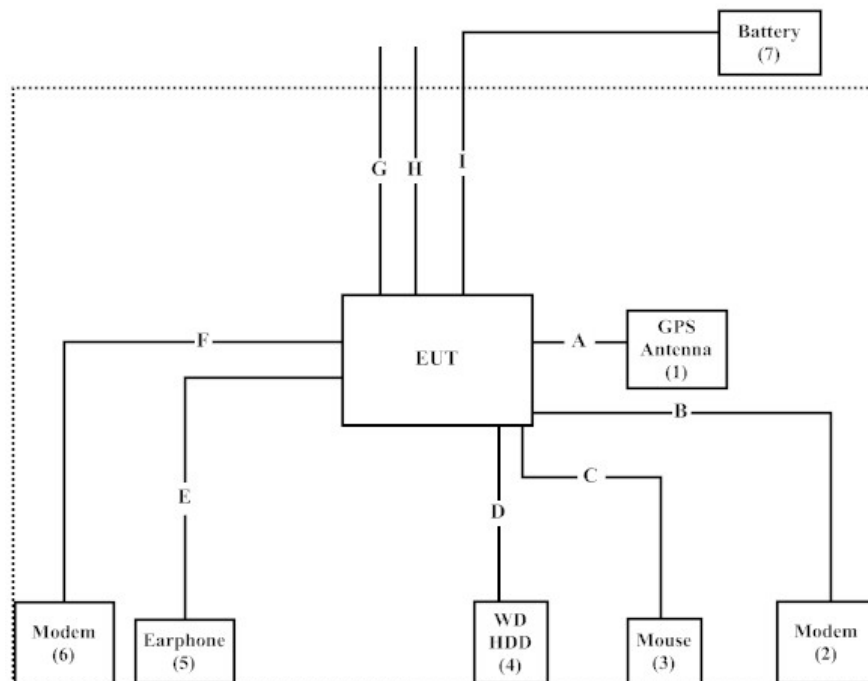1.4. Configuration of Tested System



1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software "RF Test V3.10.49" on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conducted measurements / CB3 / SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2017/7/22	2018/7/21
X	Power Meter	Anritsu	ML2495A	6K00003357	2017/6/23	2018/6/22
X	EMI Test Receiver	R&S	ESCS 30	100369	2017/10/13	2018/10/12
X	LISN	R&S	ESH3-Z5	836679/017	2017/1/7	2018/1/6
X	LISN	R&S	ENV216	100097	2017/1/7	2018/1/6
X	Coaxial Cable	QTK(Arnist)	RG 400	LC018-RG	2017/6/25	2018/6/24

For Radiated measurements / Site3 / CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2017/1/5	2018/1/4
X	Loop Antenna	Teseq	HLA6121	37133	2017/3/18	2018/3/17
X	Bi-Log Antenna	Schaffner Chase	CBL6112B	2707	2017/9/10	2018/9/9
X	Horn Antenna	ETS-Lindgren	3117	00135205	2017/4/6	2018/4/5
X	Horn Antenna	Schwarzbeck	BBHA9170	9170430	2017/1/11	2018/1/10
X	Pre-Amplifier	QTK	AP/0100A	CHM/0901069	2017/6/28	2018/6/27
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2017/1/27	2018/1/26
X	Pre-Amplifier	NARDA WE	DBL-1840N506	013	2017/9/30	2018/9/29
X	Filter	MicroTRON	BRM50701	019	2017/10/20	2018/10/19
X	Filter	Microwave Circuits	N0257881	36681	2016/12/7	2017/12/6
X	EMI Test Receiver	R&S	ESR26	101385	2017/9/29	2018/9/28
X	Coaxial Cable	QTK(Arnist)	SUCOFLEX 106	L1606-015C	2017/6/25	2018/6/24
X	EMI Test Receiver	R&S	ESCS 30	838251/001	2017/7/21	2018/7/20
X	Coaxial Cable	QTK(Arnist)	RG 214	LC003-RG	2017/6/21	2018/6/20
X	Coaxial signal switch	Anritsu	MP59B	6201415889	2017/6/16	2018/6/15

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

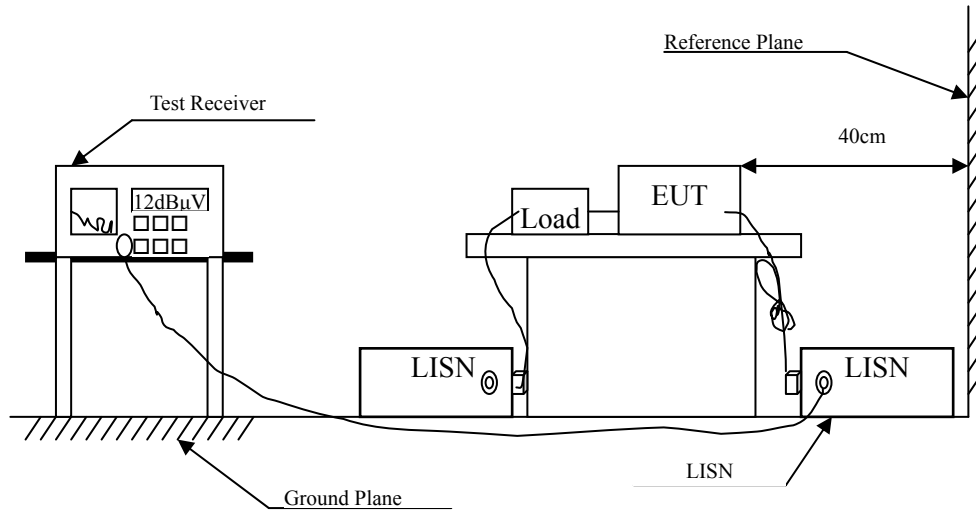2.1. Test Setup



2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4: 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Uncertainty

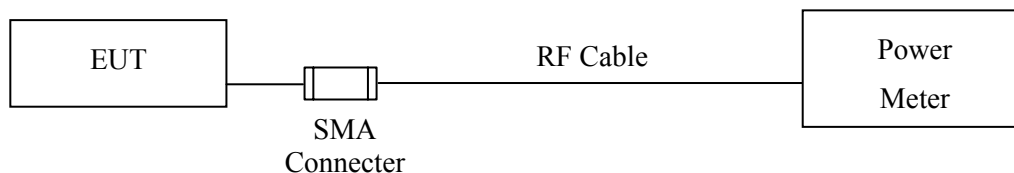
± 2.26 dB

2.5. Test Result of Conducted Emission

Owing to the DC operation of EUT, this test item is not performed.

3. Peak Power Output

3.1. Test Setup



3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

3.4. Uncertainty

± 1.19 dB

3.5. Test Result of Peak Power Output


Product : MOBILE DATA TERMINAL
Test Item : Peak Power Output
Test Site : No.3 OATS
Test date : 2017/10/05
Test Mode : Mode 1: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	-3.31	1 Watt= 30 dBm	Pass
Channel 19	2440.00	-1.85	1 Watt= 30 dBm	Pass
Channel 39	2480.00	-4.21	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup

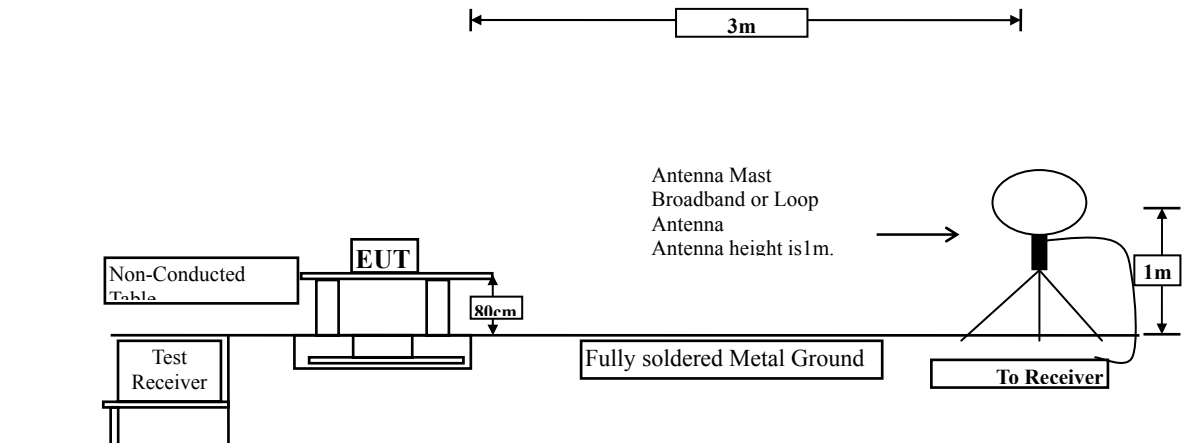
Under 30MHz



Below 1GHz

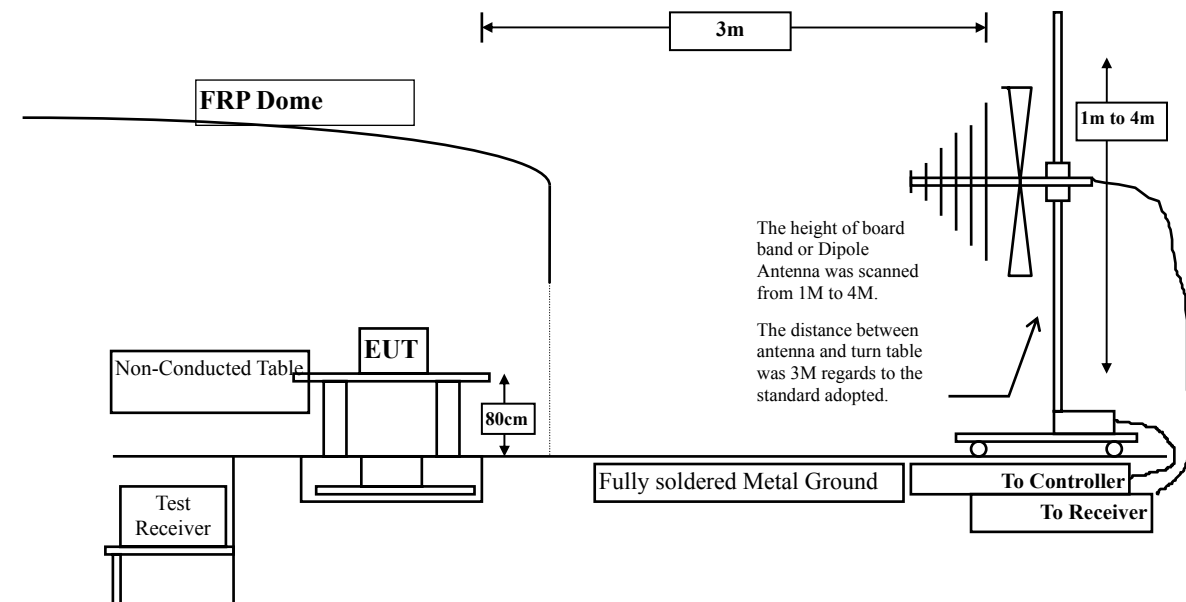

Above 1GHz

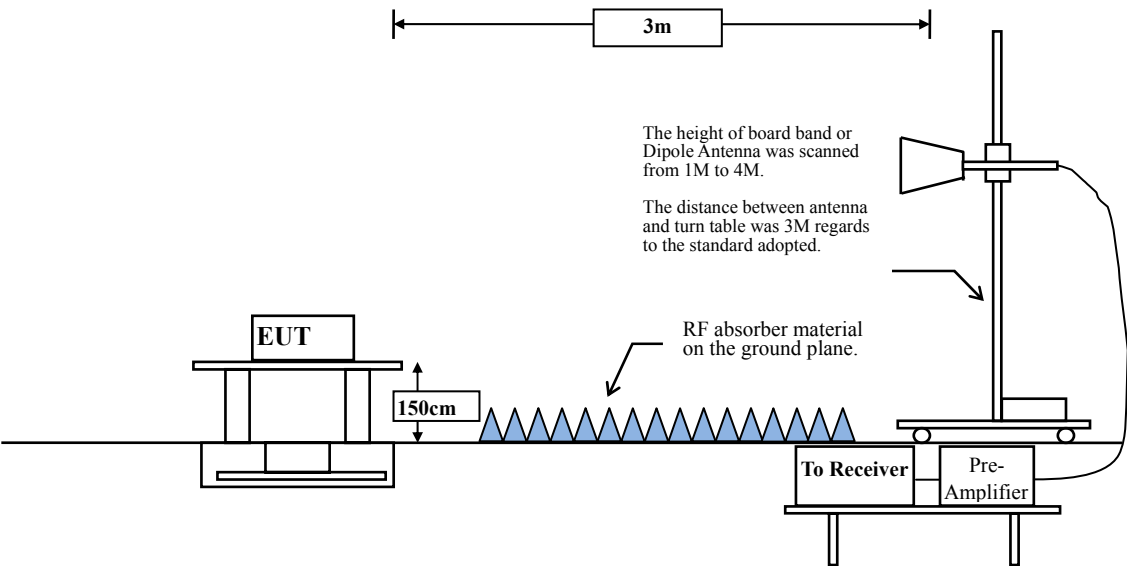

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

The average measurement tested according to KDB 558074 section 12.2.5.3. Reduced VBW averaging across on- and off-times of the EUT transmissions with max hold.

$VBW \geq 1/T$:

Duty Cycle	T	1/T	VBW Setting
0.747	0.62	1613	1.6 kHz

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : MOBILE DATA TERMINAL
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/10/12
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
4804.000	2.754	40.421	43.175	-10.825	54.000
7206.000	10.177	37.911	48.088	-5.912	54.000
9608.000	10.848	39.426	50.273	-3.727	54.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4804.000	36.079	40.150	43.072	-30.928	74.000
7206.000	41.679	38.838	48.827	-25.173	74.000
9608.000	42.589	38.854	49.701	-24.299	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOBILE DATA TERMINAL
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/10/12
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4880.000	2.038	40.501	42.539	-31.461	74.000
7320.000	9.699	38.226	47.925	-26.075	74.000
9760.000	9.665	39.023	48.688	-25.312	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4880.000	2.038	40.122	42.160	-31.840	74.000
7320.000	9.699	38.335	48.034	-25.966	74.000
9760.000	10.299	39.266	49.566	-24.434	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOBILE DATA TERMINAL
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/10/12
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4960.000	2.582	40.756	43.338	-30.662	74.000
7440.000	10.555	37.687	48.242	-25.758	74.000
9920.000	10.206	38.973	49.179	-24.821	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4960.000	3.398	40.179	43.578	-30.422	74.000
7440.000	11.214	37.309	48.523	-25.477	74.000
9920.000	11.245	39.810	51.055	-22.945	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOBILE DATA TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/10/12
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)


Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
55.220	10.838	41.819	30.052	-9.948	40.000
304.510	18.423	41.206	37.309	-8.691	46.000
409.270	22.226	38.765	38.811	-7.189	46.000
512.090	25.204	35.711	38.895	-7.105	46.000
716.760	25.477	33.827	37.636	-8.364	46.000
819.580	28.391	32.057	39.018	-6.982	46.000
Vertical					
157.070	-5.195	36.176	30.981	-12.519	43.500
305.480	-4.016	43.335	39.319	-6.681	46.000
512.090	0.604	33.157	33.761	-12.239	46.000
614.910	1.701	32.538	34.239	-11.761	46.000
716.760	-1.321	36.259	34.938	-11.062	46.000
819.580	3.001	31.591	34.592	-11.408	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

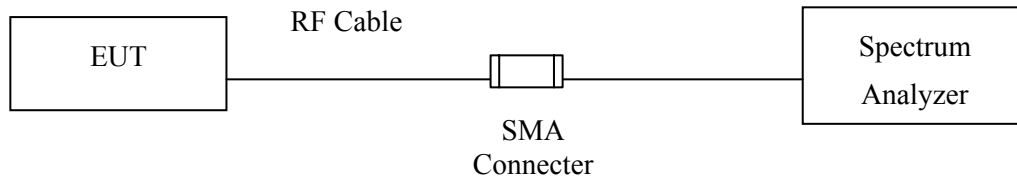5.1. Test Setup



5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.20\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : MOBILE DATA TERMINAL
Test Item : RF Antenna Conducted Test
Test Site : No.3 OATS
Test date : 2017/10/05
Test Mode : Mode 1: Transmit - BLE (GFSK)

Figure Channel 00:

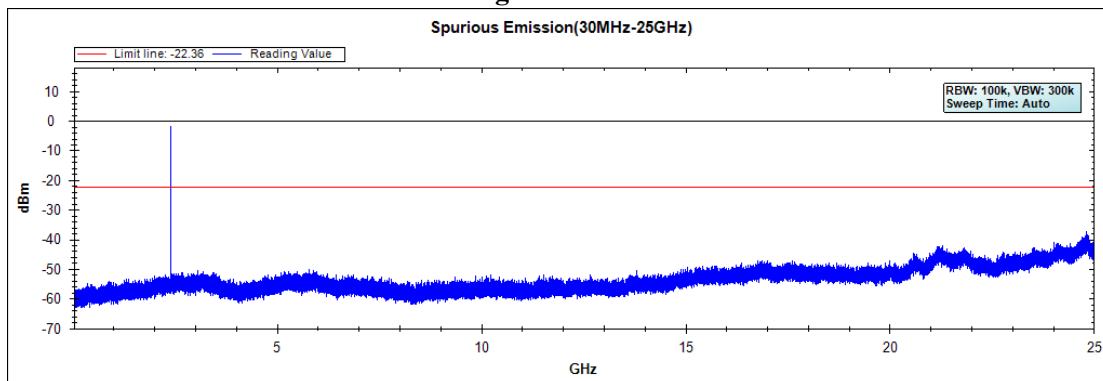


Figure Channel 19:


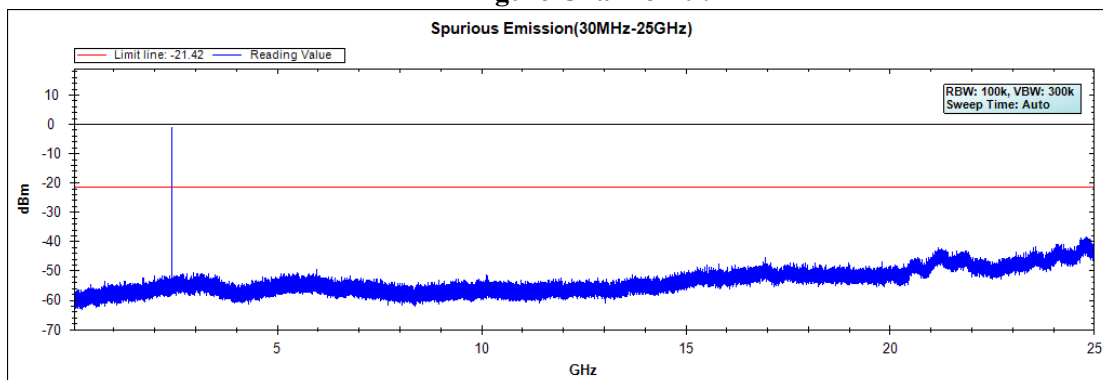


Figure Channel 39:

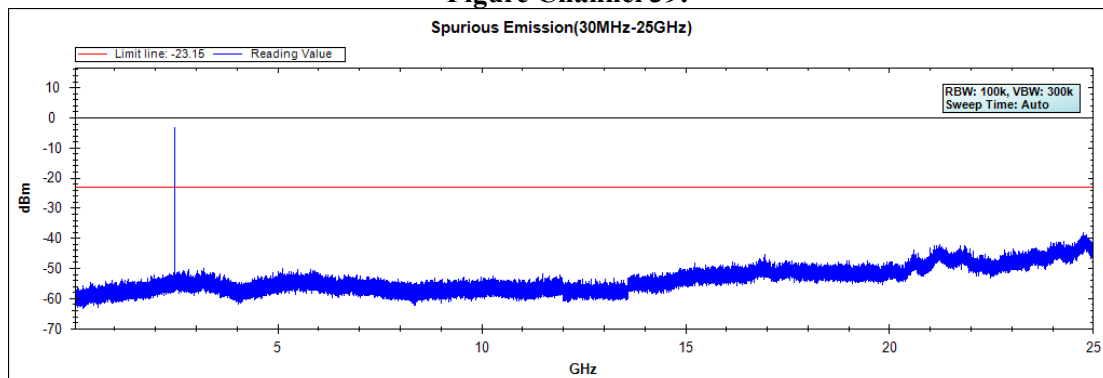


Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge


6.1. Test Setup

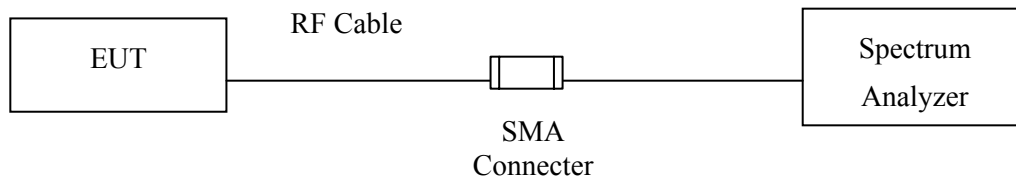RF Conducted Measurement



RF Radiated Measurement:

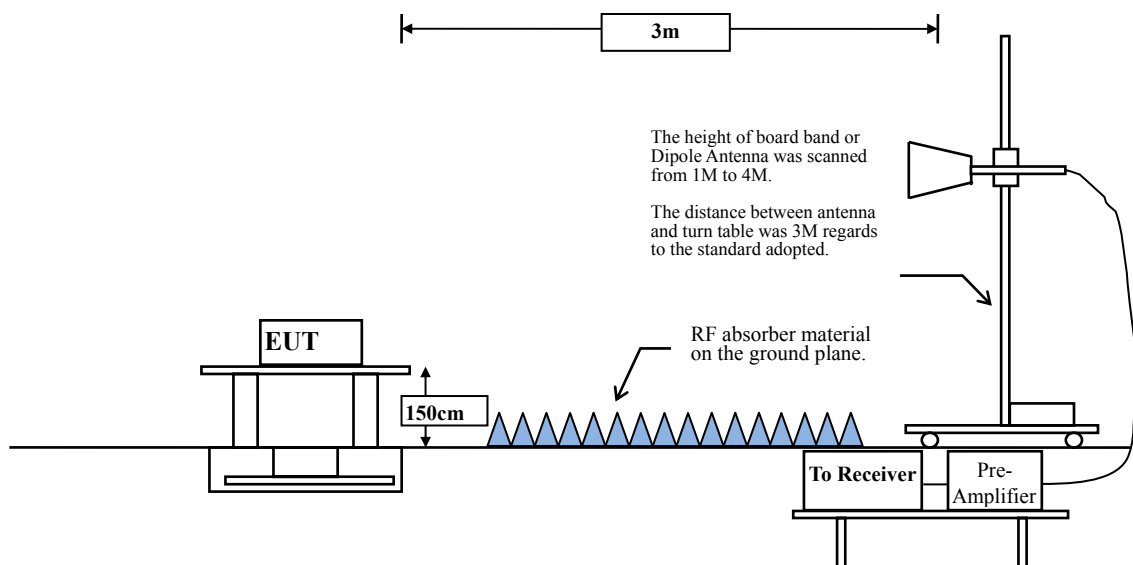Above 1GHz



6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

The average measurement tested according to KDB 558074 section 12.2.5.3. Reduced VBW averaging across on- and off-times of the EUT transmissions with max hold.

VBW $\geq$ 1/T:

Duty Cycle	T	1/T	VBW Setting
0.747	0.62	1613	1.6 kHz

6.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : MOBILE DATA TERMINAL
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/10/16
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2383.400	-2.716	41.078	38.362	74.00	54.00	Pass
00 (Peak)	2390.000	-2.687	39.105	36.418	74.00	54.00	Pass
00 (Peak)	2400.000	-2.660	53.495	50.835	--	--	--
00 (Peak)	2401.700	-2.658	87.126	84.468	--	--	--
00 (Average)	2390.000	-2.687	28.438	25.751	74.00	54.00	Pass
00 (Average)	2400.000	-2.660	47.482	44.822	--	--	--
00 (Average)	2402.000	-2.657	85.850	83.193	--	--	--

Figure Channel 00:

Horizontal (Peak)


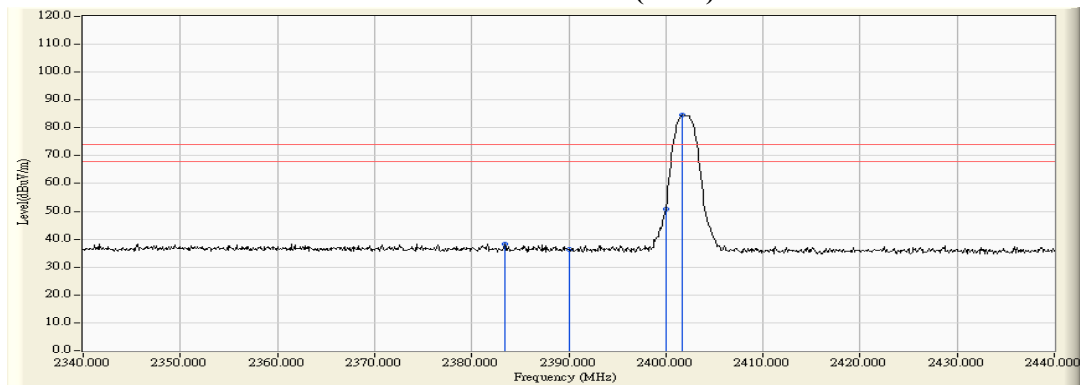


Figure Channel 00:

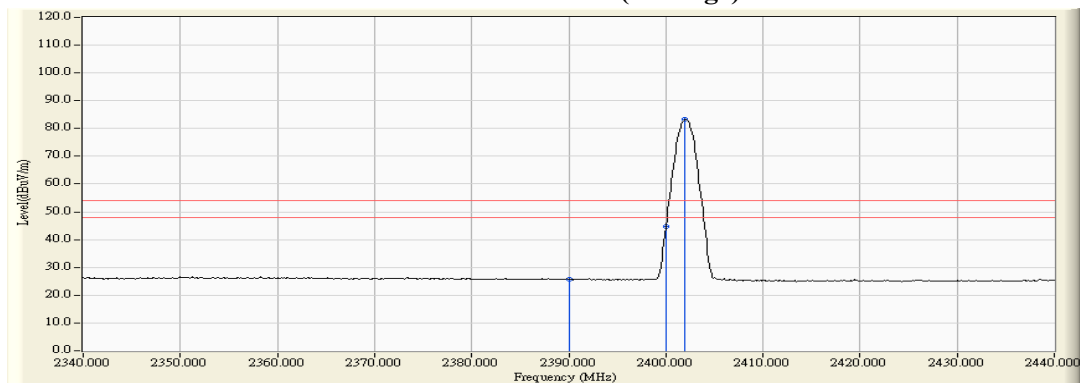Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOBILE DATA TERMINAL
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/10/16
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2375.900	-4.112	42.039	37.927	74.00	54.00	Pass
00 (Peak)	2390.000	-4.159	39.555	35.396	74.00	54.00	Pass
00 (Peak)	2400.000	-4.171	46.425	42.254	--	--	--
00 (Peak)	2401.700	-4.171	79.033	74.862	--	--	--
00 (Average)	2390.000	-4.159	28.441	24.282	74.00	54.00	Pass
00 (Average)	2400.000	-4.171	39.691	35.520	--	--	--
00 (Average)	2402.000	-4.171	77.695	73.524	--	--	--

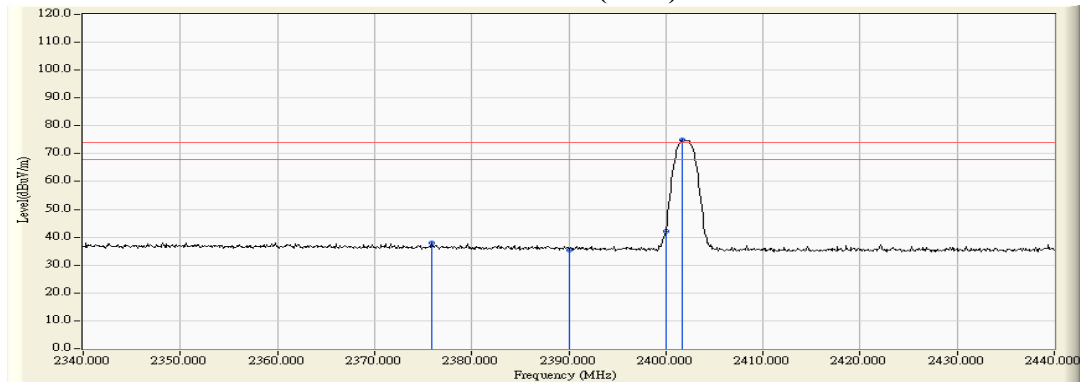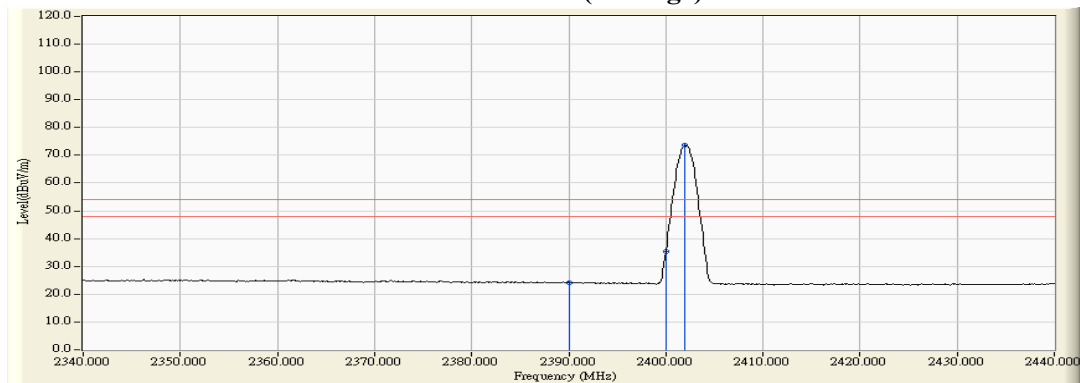Figure Channel 00:**Vertical (Peak)****Figure Channel 00:****Vertical (Average)**



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOBILE DATA TERMINAL
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/10/16
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
39 (Peak)	2479.800	-2.605	81.187	78.582	--	--	--
39 (Peak)	2483.500	-2.601	39.761	37.159	74.00	54.00	Pass
39 (Peak)	2517.400	-2.710	41.597	38.887	74.00	54.00	Pass
39 (Average)	2480.000	-2.605	79.949	77.344	--	--	--
39 (Average)	2483.500	-2.601	28.701	26.099	74.00	54.00	Pass

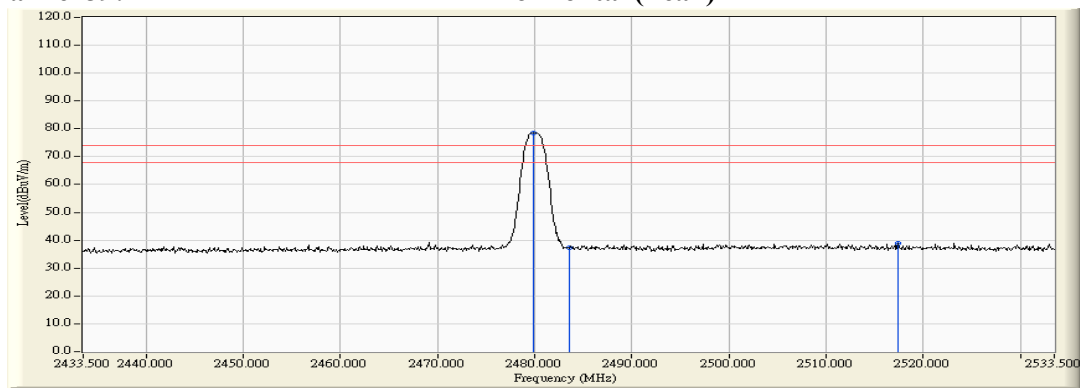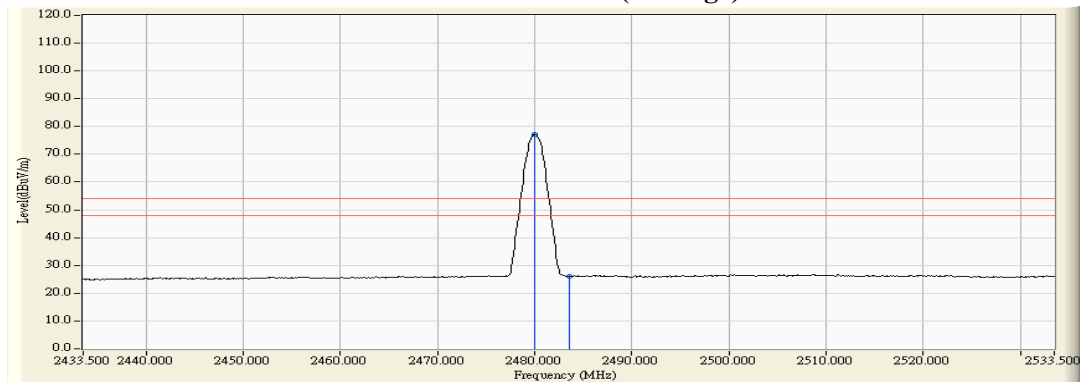Figure Channel 39:**Horizontal (Peak)****Figure Channel 39:****Horizontal (Average)**

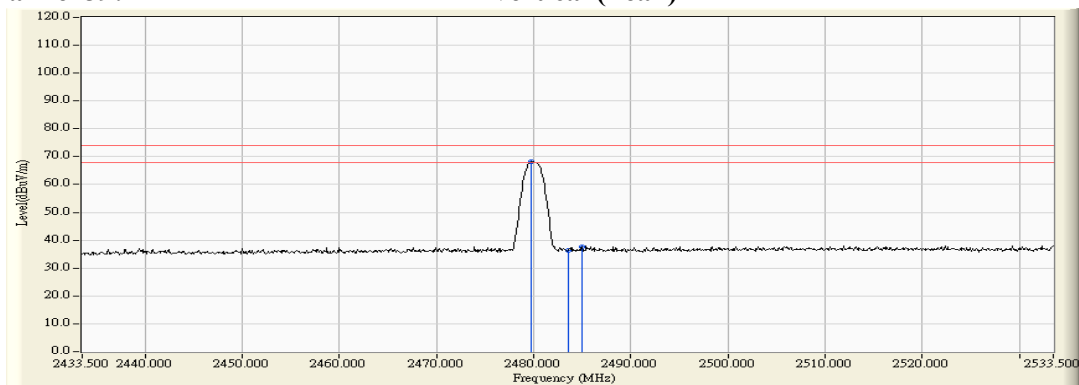
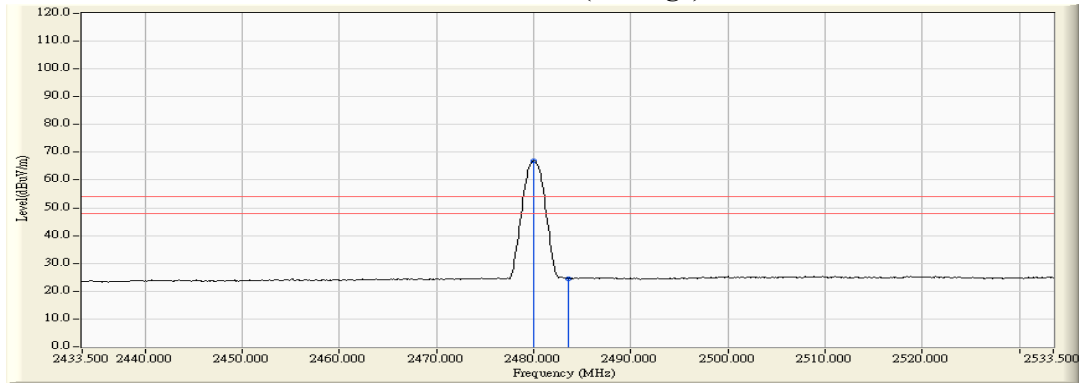
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOBILE DATA TERMINAL
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/10/16
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
39 (Peak)	2479.700	-3.978	72.158	68.179	--	--	--
39 (Peak)	2483.500	-3.966	40.392	36.425	74.00	54.00	Pass
39 (Peak)	2485.000	-3.962	41.539	37.577	74.00	54.00	Pass
39 (Average)	2480.000	-3.978	70.888	66.910	--	--	--
39 (Average)	2483.500	-3.966	28.512	24.545	74.00	54.00	Pass

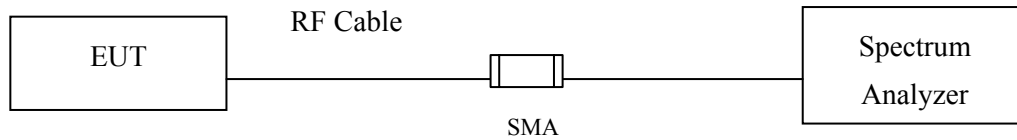
Figure Channel 39: Vertical (Peak)

Figure Channel 39: Vertical (Average)


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 1.6k Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

7. 6dB Bandwidth

7.1. Test Setup



7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.4. Uncertainty

$\pm 283\text{Hz}$

7.5. Test Result of 6dB Bandwidth

Product : MOBILE DATA TERMINAL
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	540	>500	Pass
19	2440	540	>500	Pass
39	2480	550	>500	Pass

Figure Channel 00:

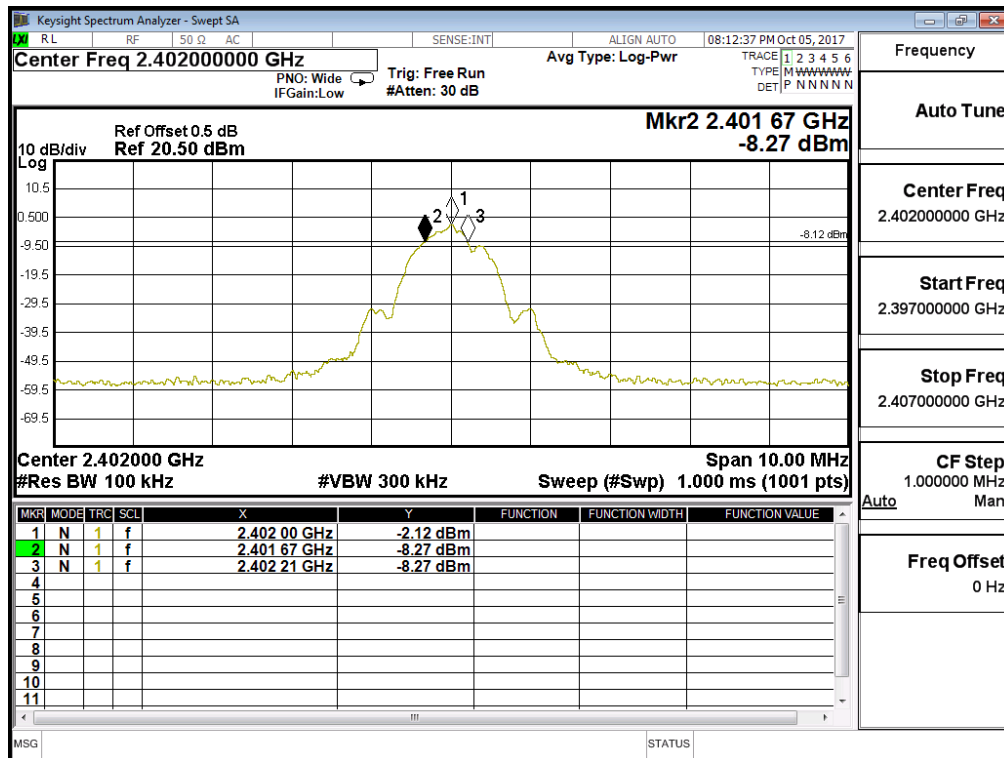


Figure Channel 19:



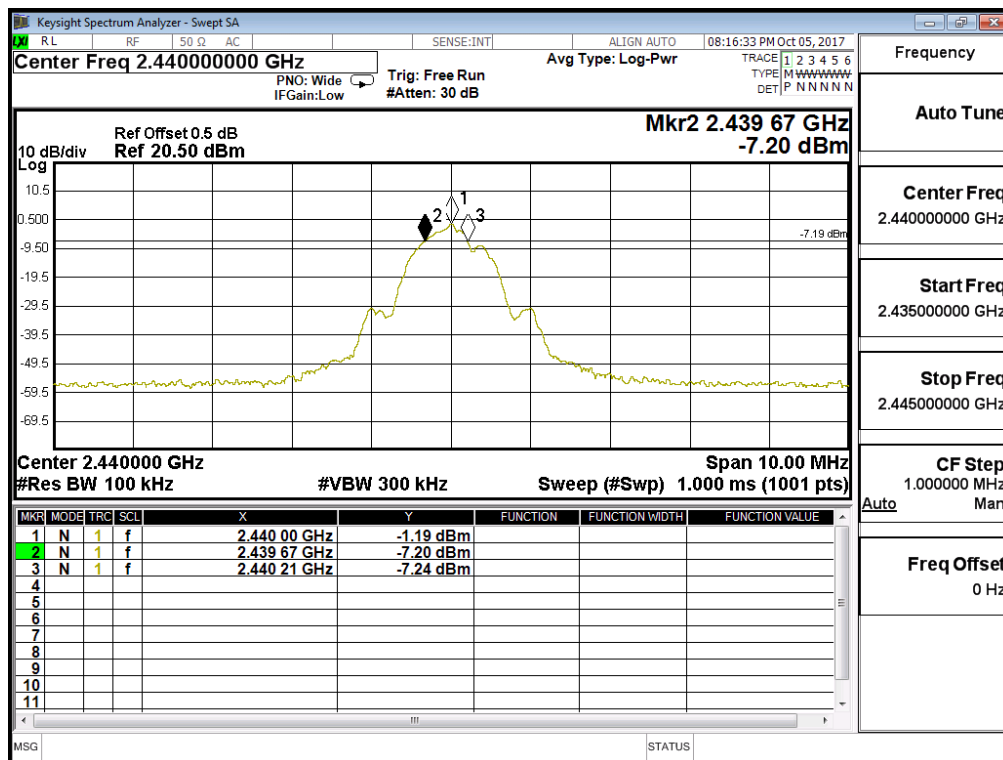


Figure Channel 39:

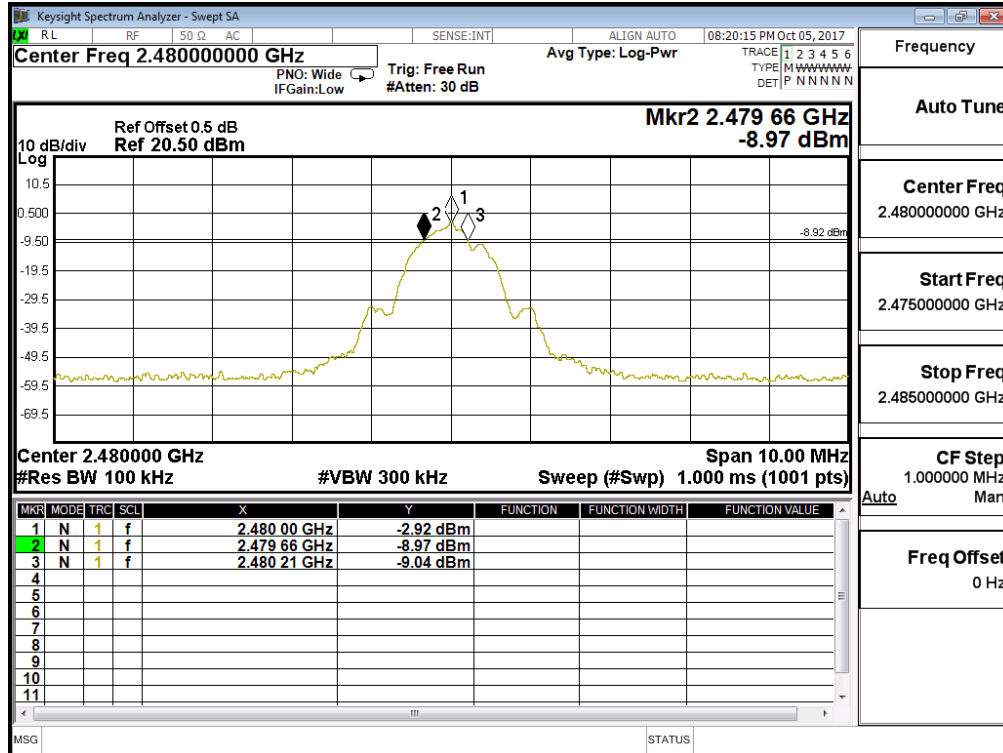

8. Power Density

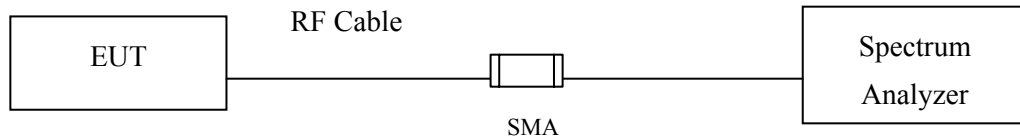8.1. Test Setup



8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013, the maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.4. Uncertainty

± 1.20 dB

8.5. Test Result of Power Density

Product : MOBILE DATA TERMINAL
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-2.350	≤ 8 dBm	Pass
19	2440	-1.420	≤ 8 dBm	Pass
39	2480	-3.150	≤ 8 dBm	Pass

Figure Channel 00:

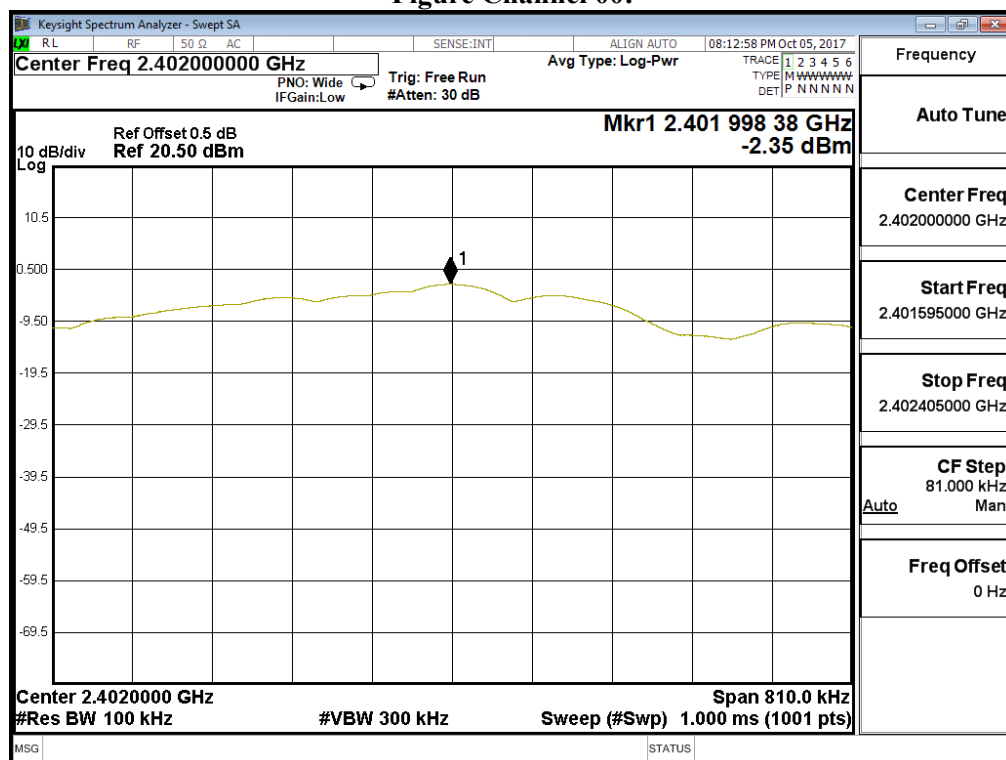


Figure Channel 19:


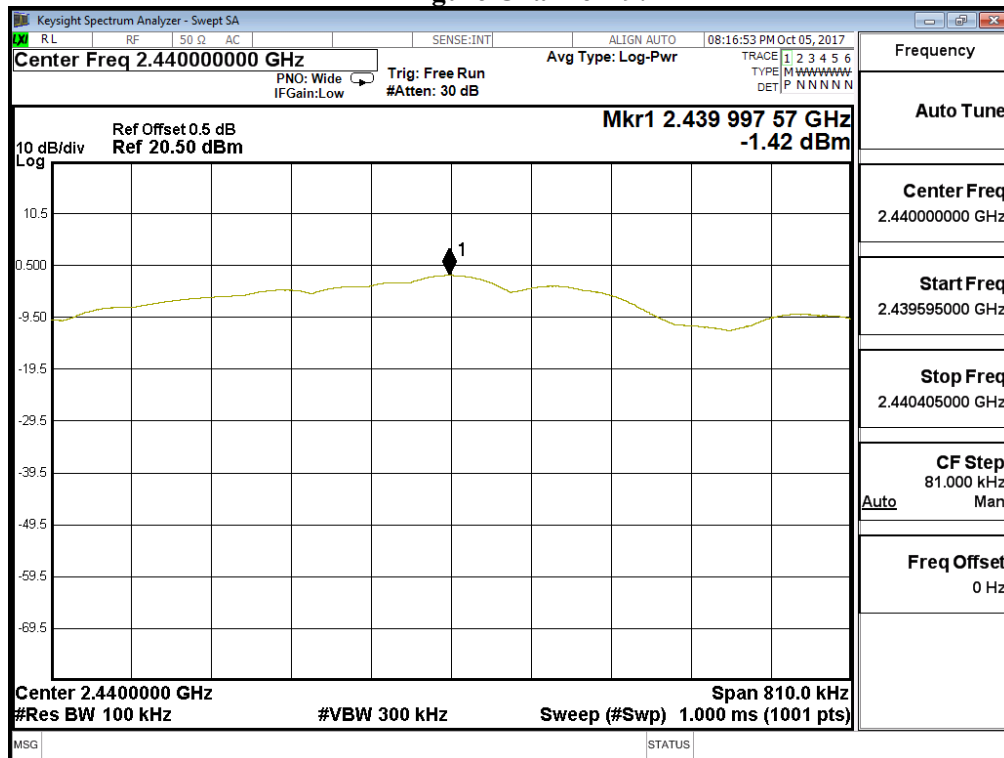


Figure Channel 39:

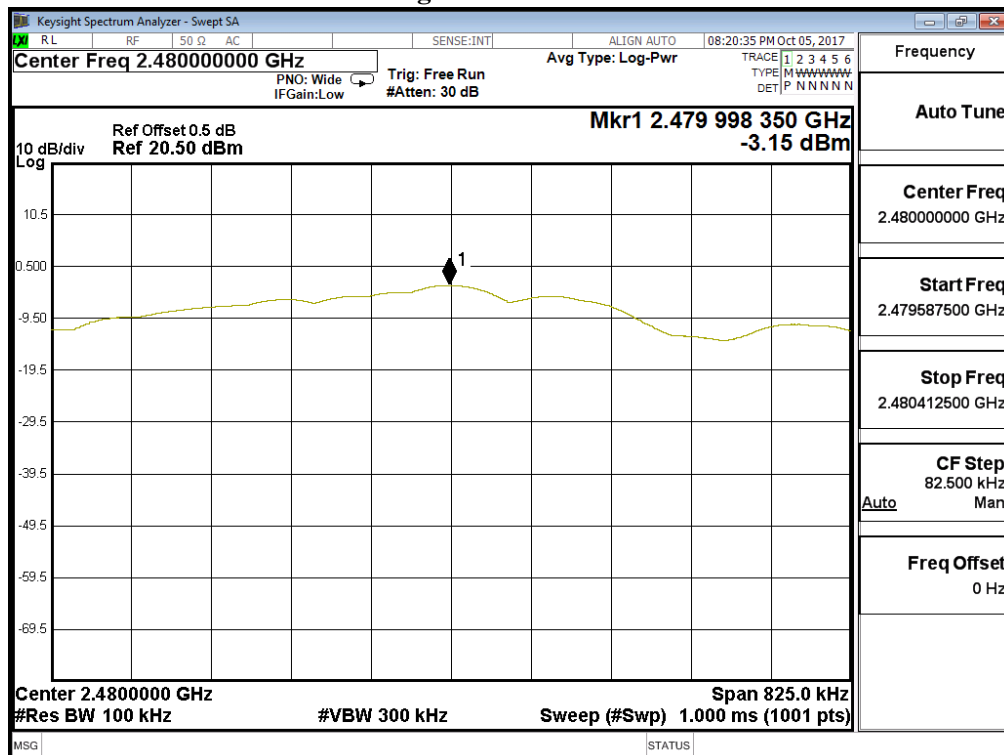

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.