
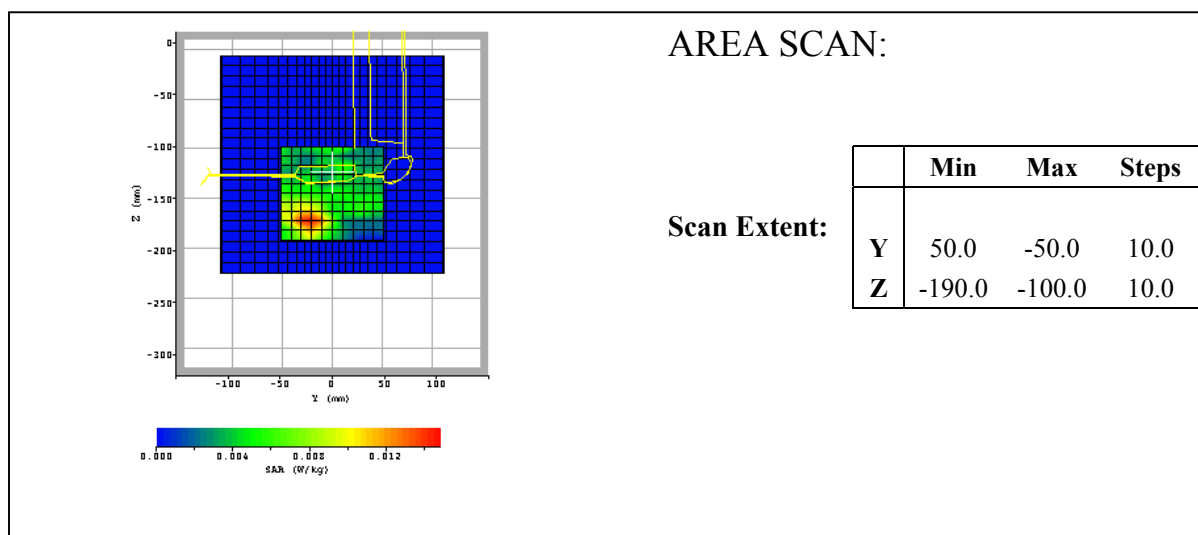


Date / Time:	9/4/2003 4:02:31 PM	Position:	lap
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore iX104 802.11b S24-DS	Head Rotation:	0
Antenna:	integral	Test Frequency:	2437
Shape File:	xplor802lap.csv	Power Level:	maximum

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.58	0.58	0.58
Amp Gain:	2			
Averaging:	6			
Batteries				
Replaced:	09/03/2003			



Liquid:	2400
Type:	Body
Conductivity:	1.945
Relative Permittivity:	51.5
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

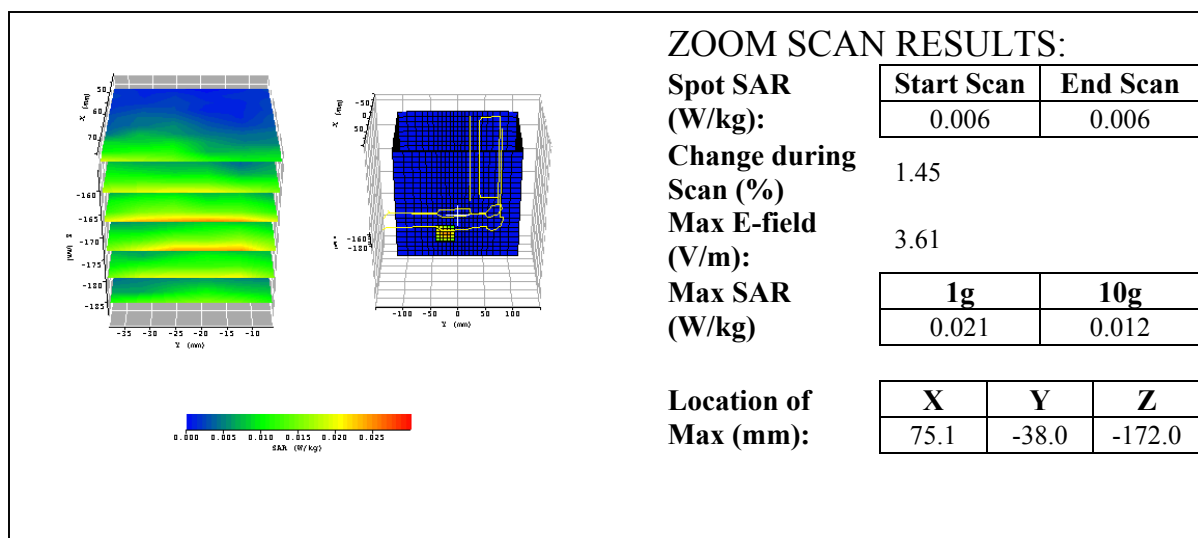

Date / Time:	9/4/2003 4:27:33 PM	Position:	bystander 1.5cm
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore iX104 802.11b S24-DS	Head Rotation:	0
Antenna:	integral	Test Frequency:	2437
Shape File:	xplor802bystand1.csv	Power Level:	maximum

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.58	0.58	0.58
		5	5	5
Amp Gain:	2			
Averaging:	6			
Batteries				
Replaced:	09/03/2003			



Liquid:	2400
Type:	Body
Conductivity:	1.945
Relative Permittivity:	51.5
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

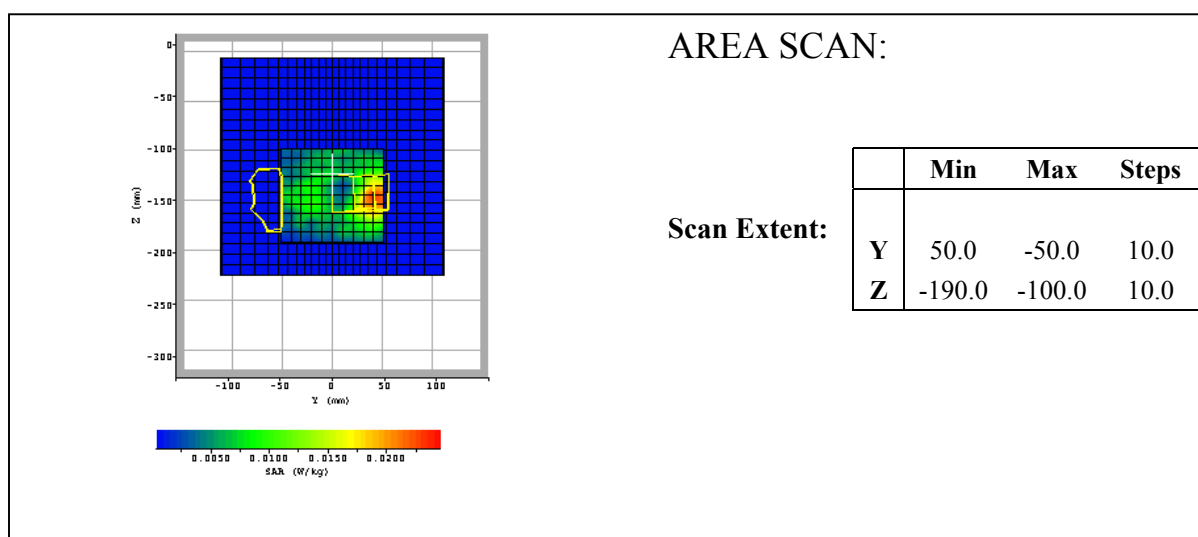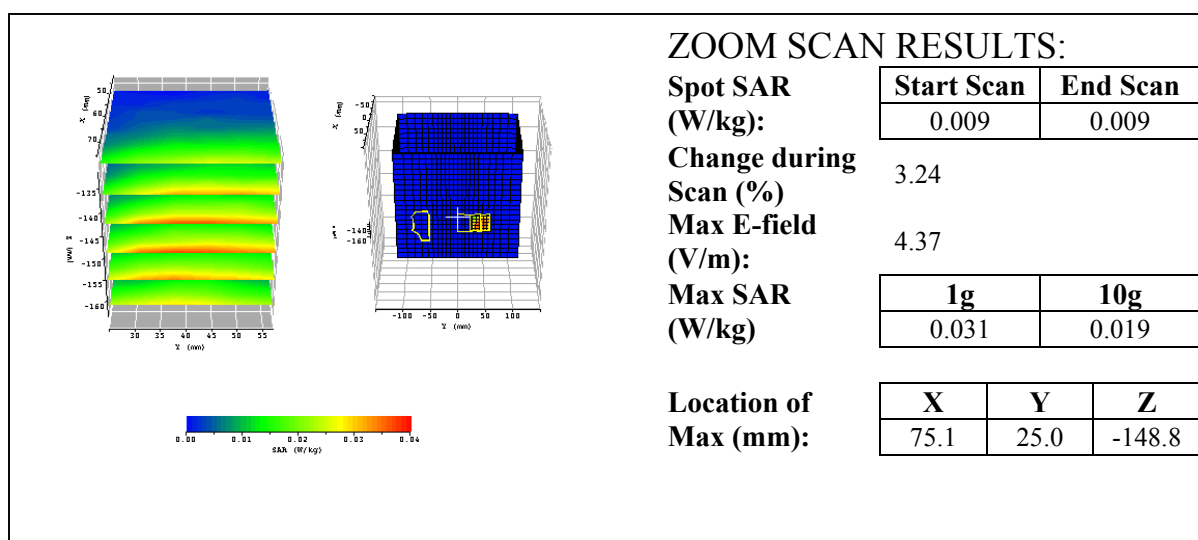

Date / Time:	9/4/2003 4:58:42 PM	Position:	bystander 1.5cm
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore iX104 802.11b S24-DS	Head Rotation:	0
Antenna:	integral	Test Frequency:	2412
Shape File:	xplor802bystand1.csv	Power Level:	maximum

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.58	0.58	0.58
		5	5	5
Amp Gain:	2			
Averaging:	6			
Batteries				
Replaced:	09/03/2003			

Liquid:	2400
Type:	Body
Conductivity:	1.932
Relative Permittivity:	51.6
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

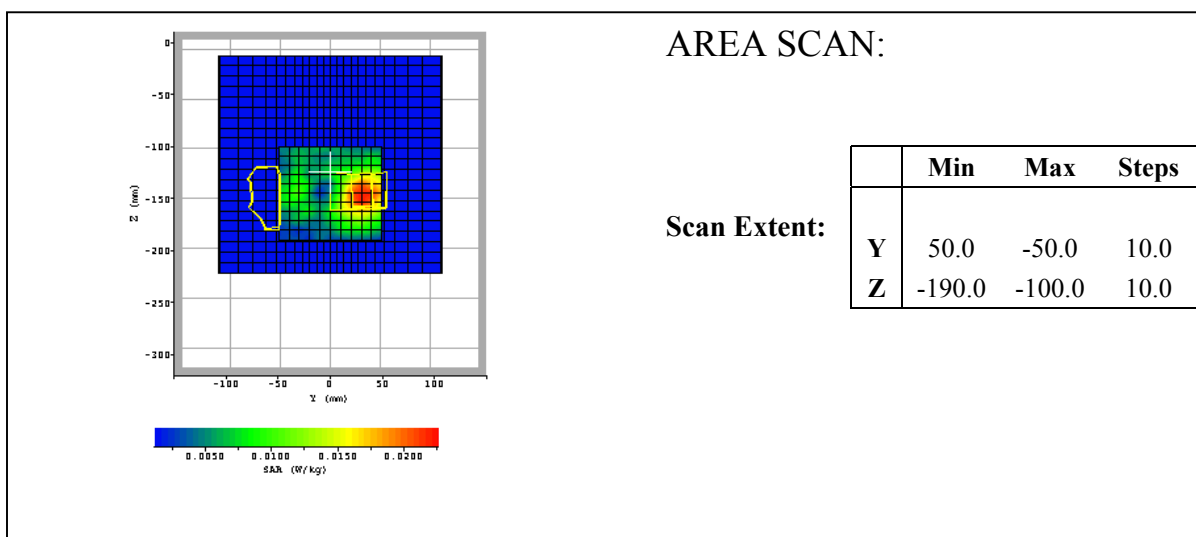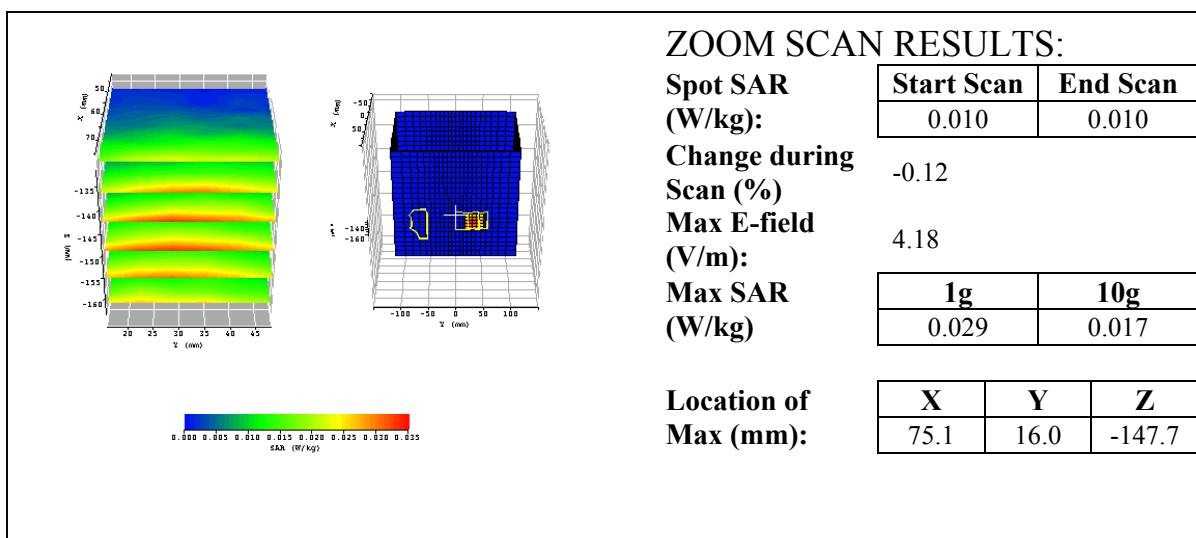

Date / Time:	9/4/2003 5:24:31 PM	Position:	bystander 1.5cm
Filename:	bystander11_3d.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore iX104 802.11b S24-DS	Head Rotation:	0
Antenna:	integral	Test Frequency:	2462
Shape File:	xplor802bystand1.csv	Power Level:	maximum

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.58	0.58	0.58
		5	5	5
Amp Gain:	2			
Averaging:	6			
Batteries				
Replaced:	09/03/2003			

Liquid:	2400
Type:	Body
Conductivity:	1.961
Relative Permittivity:	51.1
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

