

Appendix A: SAR System performance Check Plots

Measurement	Liquid	Frequency	Test Date
System Check	Head	850	2019-01-22
System Check	Body	850	2019-01-22
System Check	Head	1900	2019-01-24
System Check	Body	1900	2019-01-24
System Check	Head	2450	2019-01-25
System Check	Body	2450	2019-01-25
System Check	Body	835	2021-05-10
System Check	Body	1900	2021-05-11
System Check	Body	2450	2021-05-12

System Performance Check (Head, 850MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 01/22/2019

Measurement duration: 22 minutes 16 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	850MHz
Channels	
Signal	CW

B. SAR Measurement Results



Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	850
Relative permittivity (real part)	41.44
Relative permittivity	18.27
Conductivity (S/m)	0.87
Power drift (%)	-0.15
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	5.85
Crest factor:	1:1

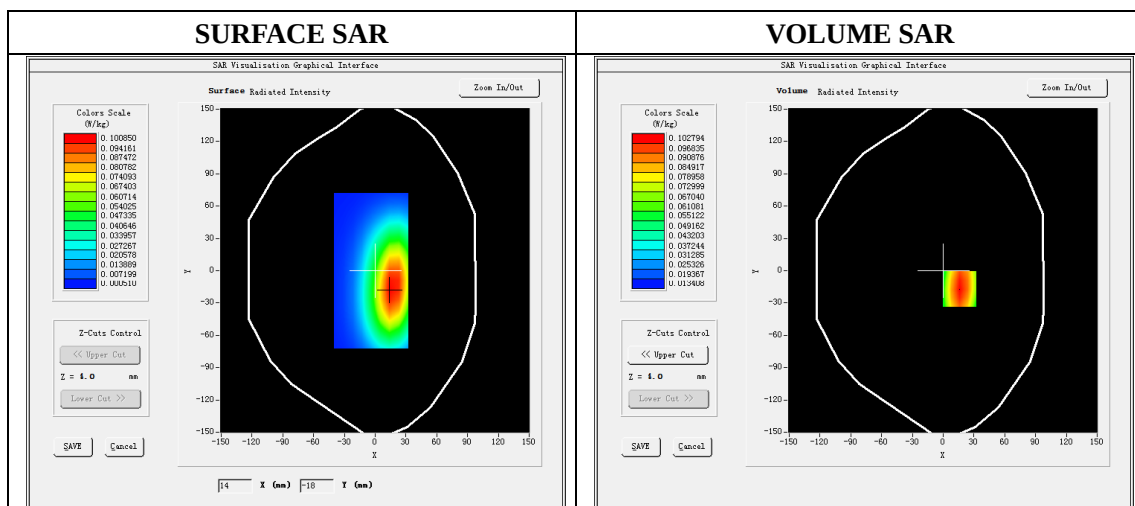

Maximum location: X=16.00, Y=-17.00

SAR 10g (W/Kg)	0.065131
SAR 1g (W/Kg)	0.098424

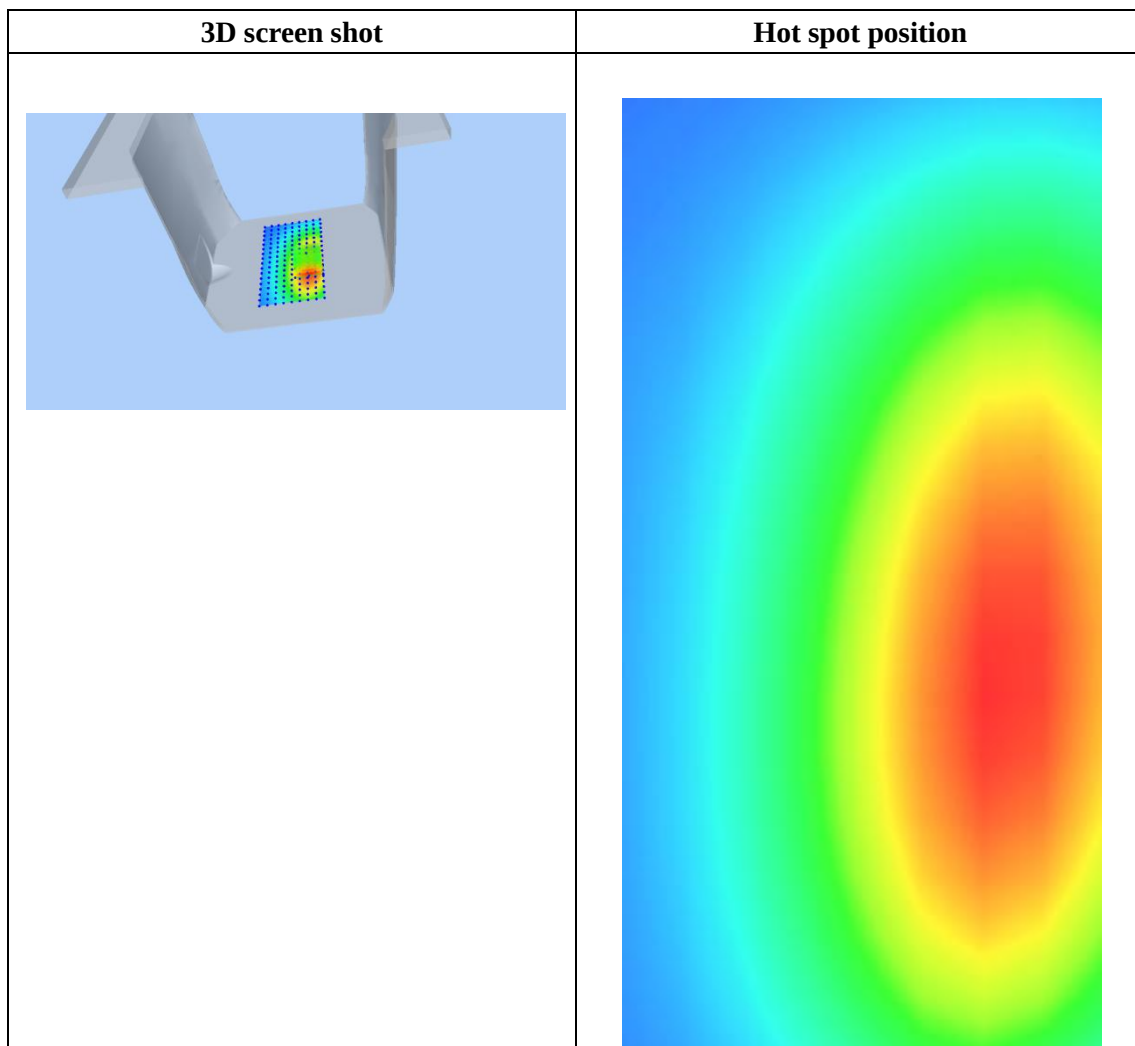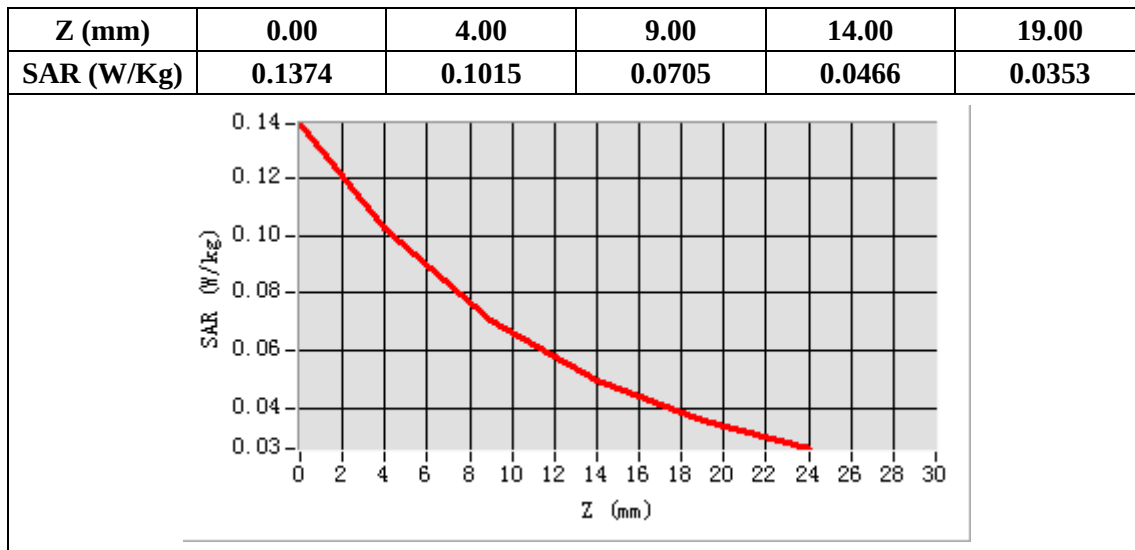

System Performance Check (Body, 850MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 01/22/2019

Measurement duration: 22 minutes 22 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	850MHz
Channels	
Signal	CW

B. SAR Measurement Results



Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	850
Relative permittivity (real part)	55.18
Relative permittivity	21.12
Conductivity (S/m)	0.98
Power drift (%)	-2.33
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	6.17
Crest factor:	1:1

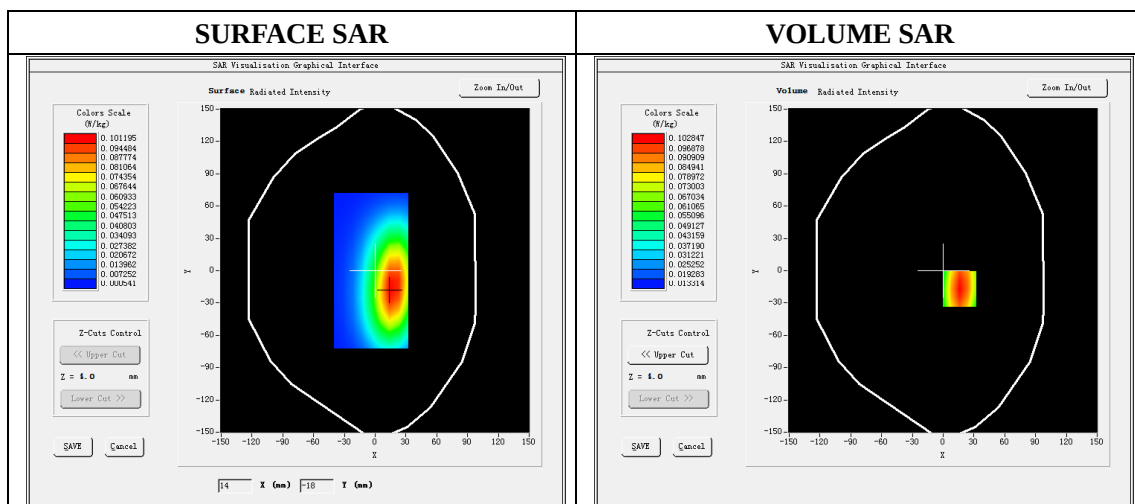

Maximum location: X=16.00, Y=-17.00

SAR 10g (W/Kg)	0.065124
SAR 1g (W/Kg)	0.098741

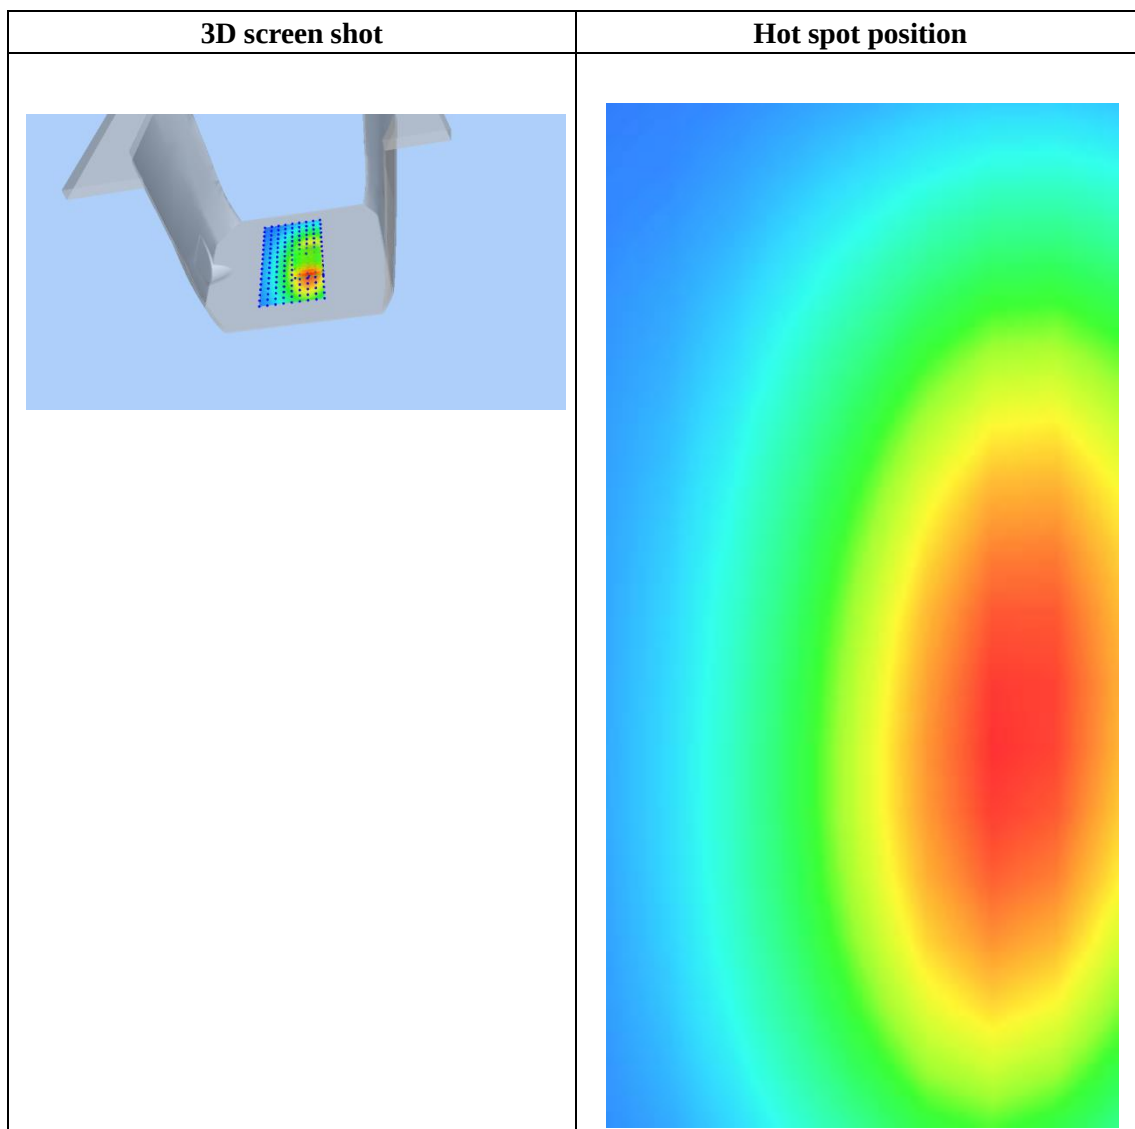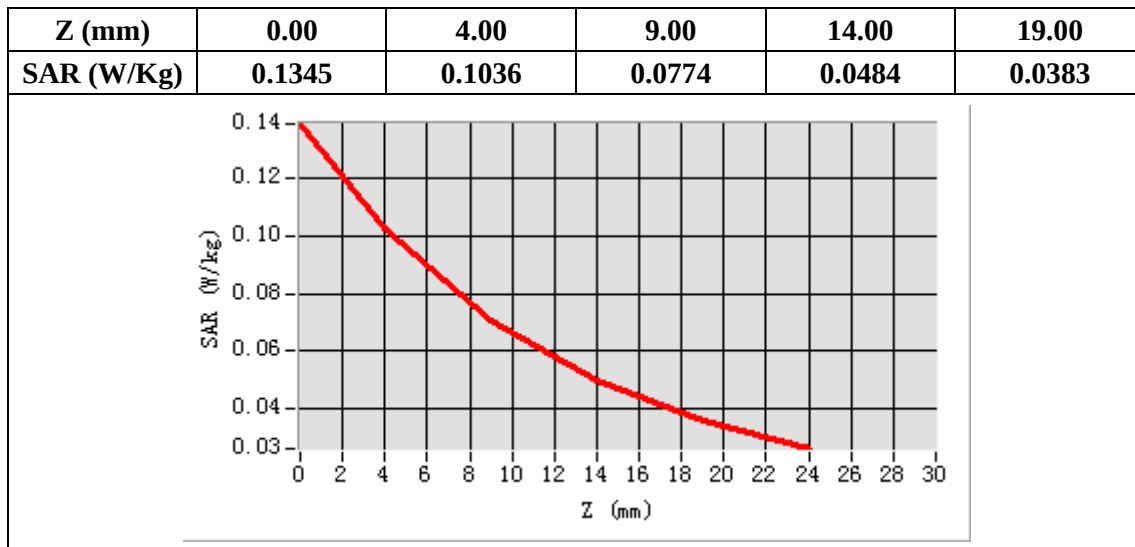

System Performance Check (Head, 1900MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 01/24/2019

Measurement duration: 22 minutes 15 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results



Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1900
Relative permittivity (real part)	40.55
Relative permittivity	13.54
Conductivity (S/m)	1.43
Power Drift (%)	-0.11
Ambient Temperature:	22.1°C
Liquid Temperature:	22.6°C
ConvF:	5.90
Duty factor:	1:1

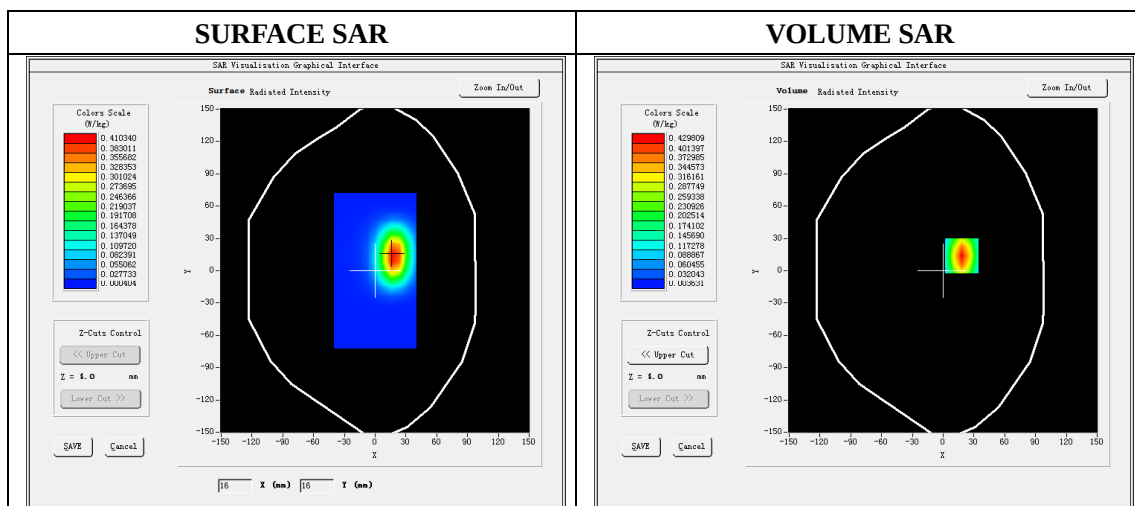

Maximum location: X=18.00, Y=14.00

SAR 10g (W/Kg)	0.184143
SAR 1g (W/Kg)	0.396781

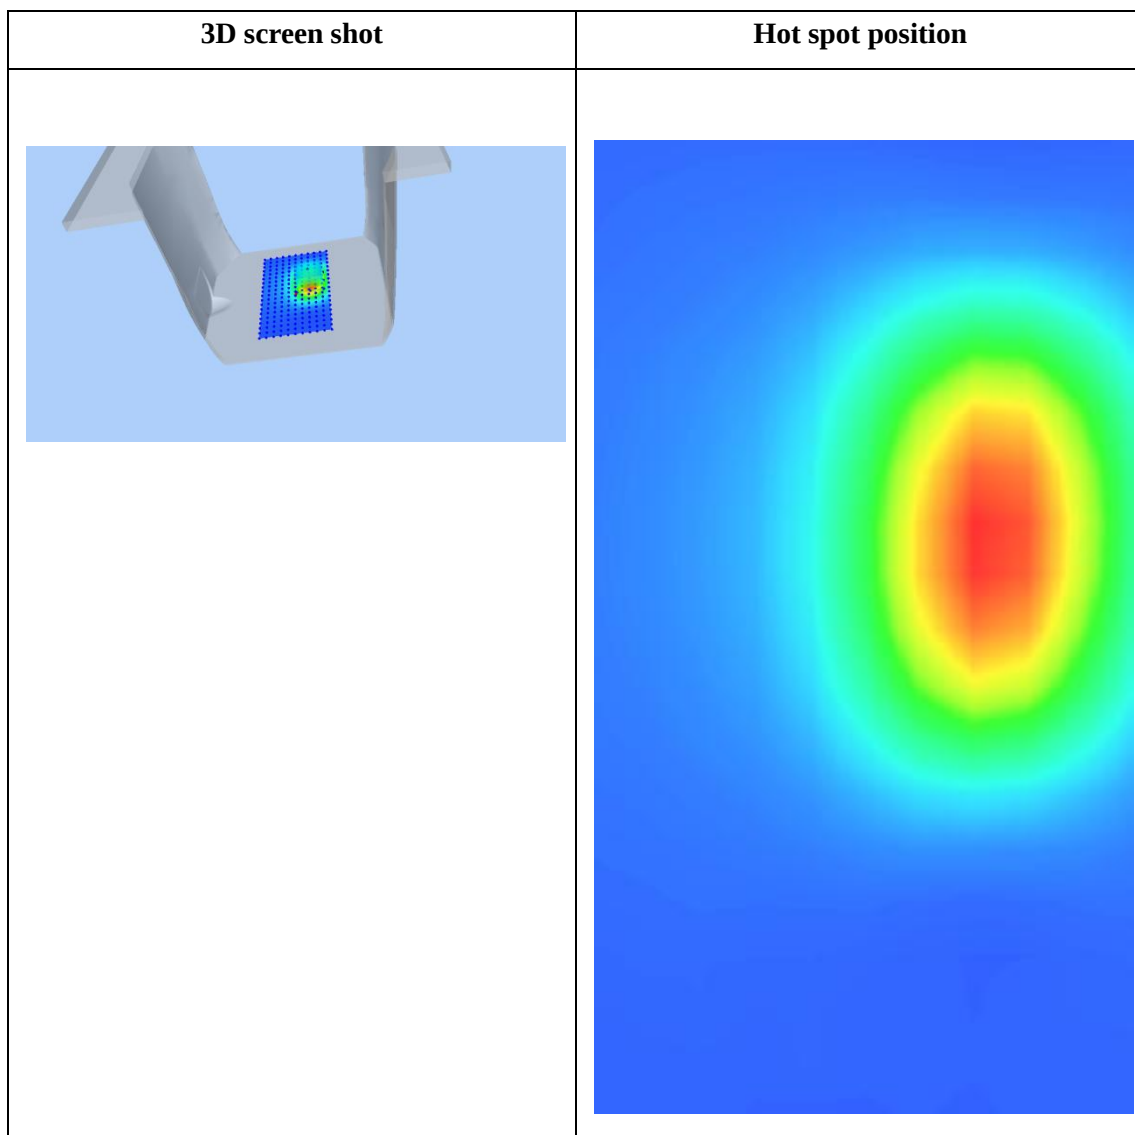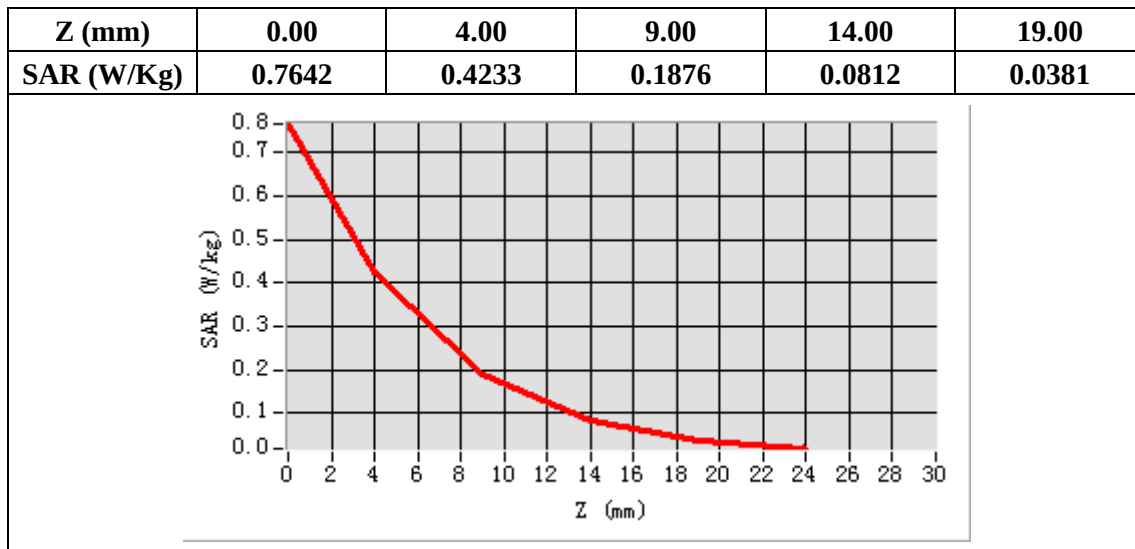

System Performance Check (Body, 1900MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 01/24/2019

Measurement duration: 22 minutes 42 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results



Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1900
Relative permittivity (real part)	53.32
Relative permittivity	14.40
Conductivity (S/m)	1.51
Power Drift (%)	-0.13
Ambient Temperature:	22.1°C
Liquid Temperature:	22.6°C
ConvF:	6.10
Duty factor:	1:1

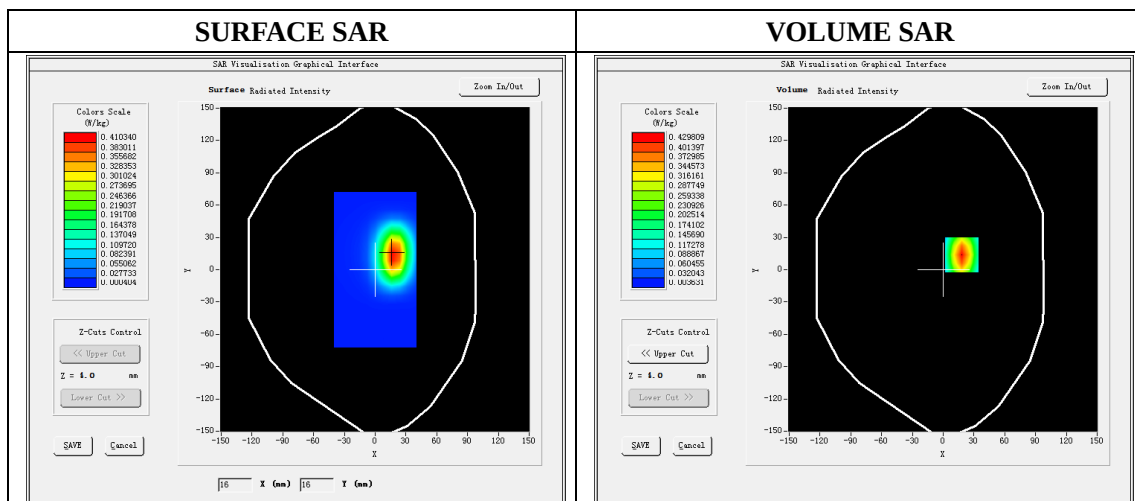

Maximum location: X=18.00, Y=14.00

SAR 10g (W/Kg)	0.185142
SAR 1g (W/Kg)	0.397641

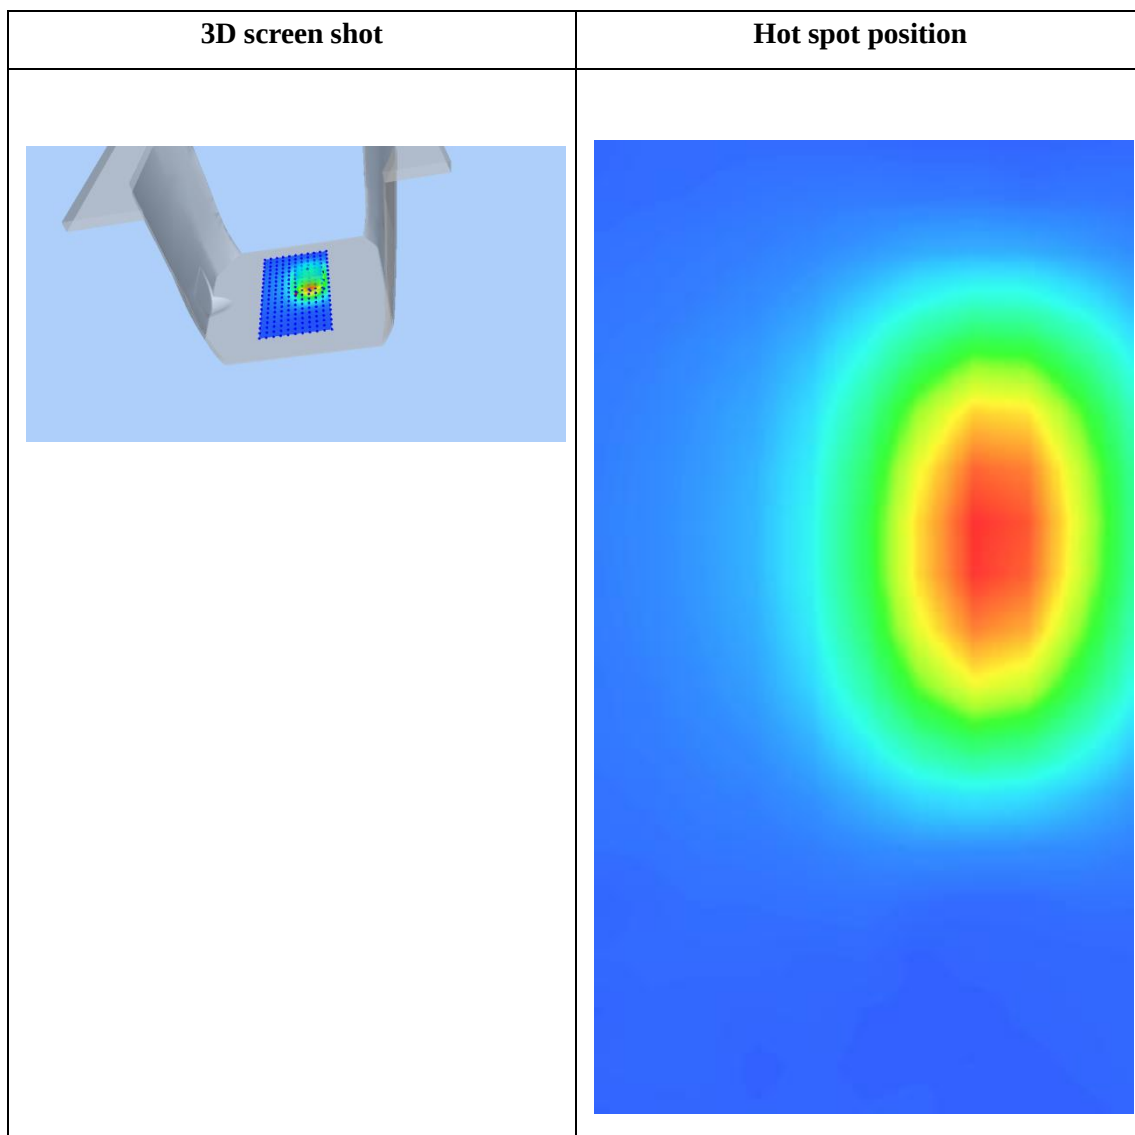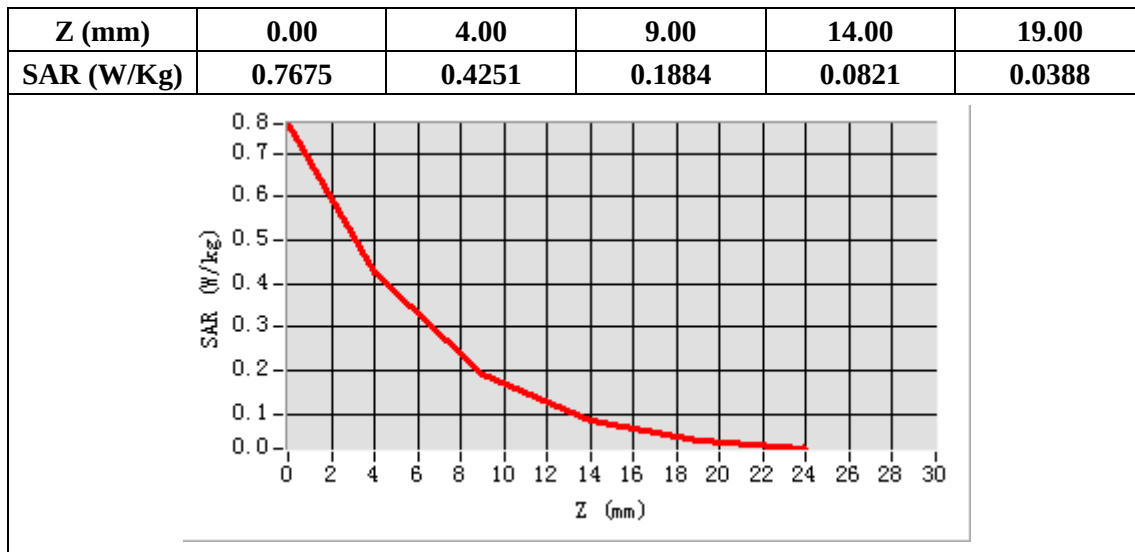

System Performance Check (Head, 2450MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=4mm

Date of measurement: 01/25/2019

Measurement duration: 22 minutes 51 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results



Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	2450
Relative permittivity (real part)	39.25
Relative permittivity	13.44
Conductivity (S/m)	1.83
Power Drift (%)	-0.66
Duty factor:	1:1
ConvF:	5.35

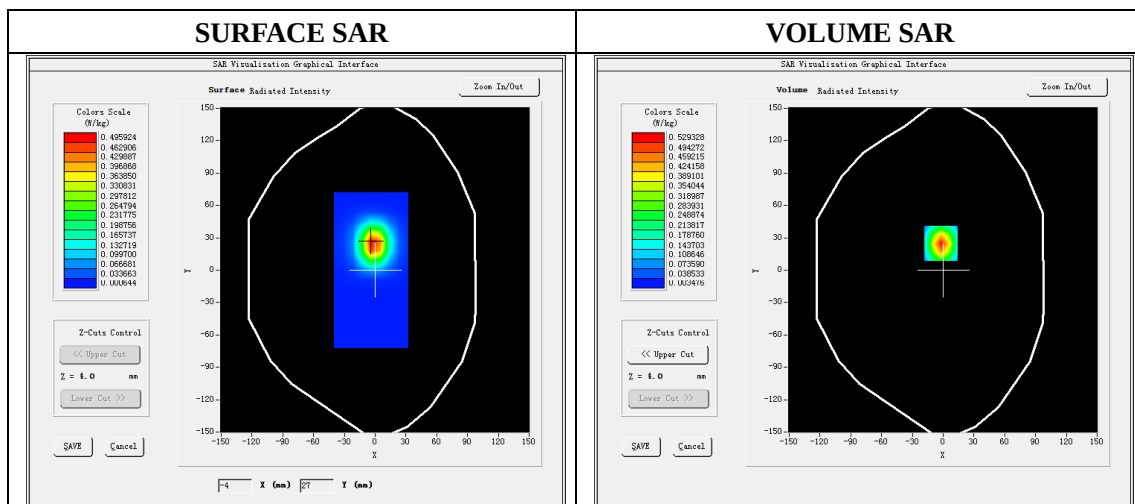

Maximum location: X=-2.00, Y=25.00

SAR 10g (W/Kg)	0.224517
SAR 1g (W/Kg)	0.521435

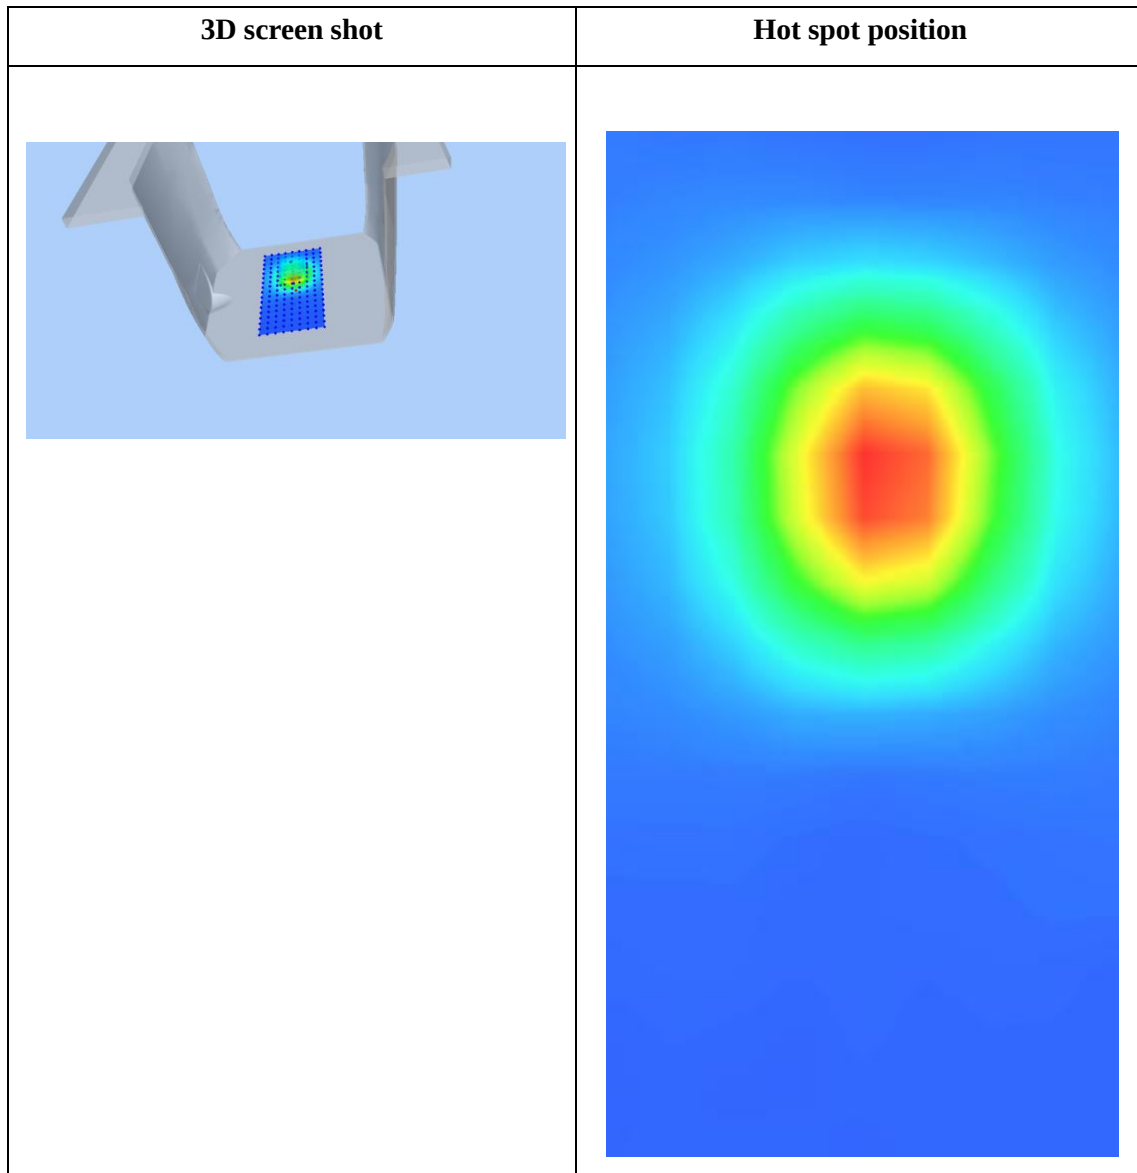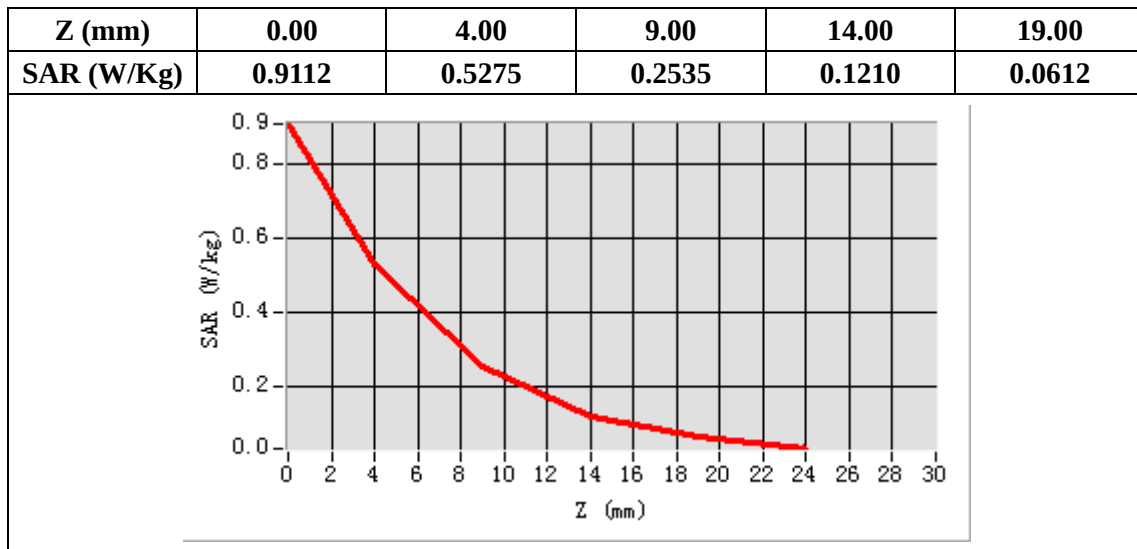

System Performance Check (Body, 2450MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=4mm

Date of measurement: 01/25/2019

Measurement duration: 22 minutes 48 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results



Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	2450
Relative permittivity (real part)	52.74
Relative permittivity	14.54
Conductivity (S/m)	1.98
Power Drift (%)	-0.26
Duty factor:	1:1
ConvF:	5.56

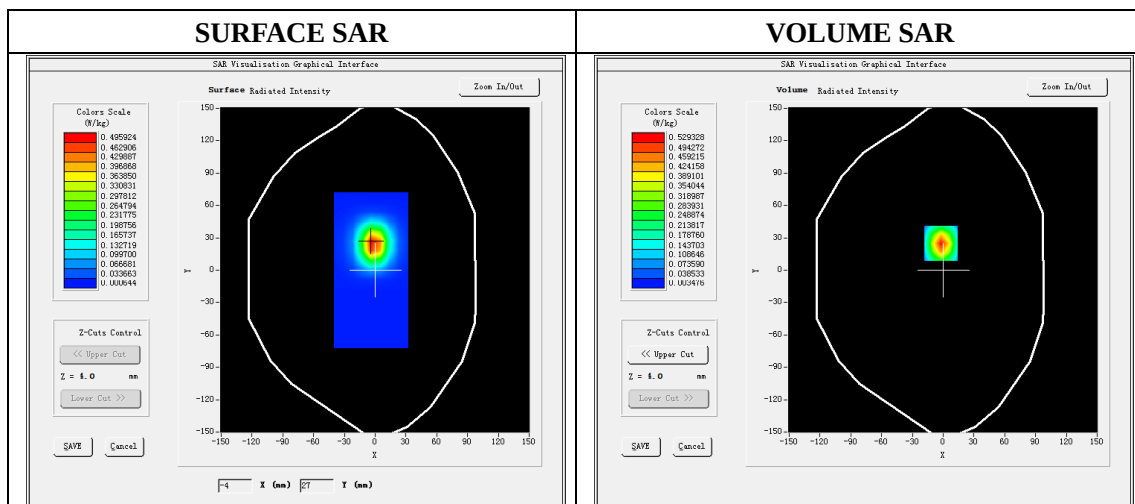

Maximum location: X=-2.00, Y=25.00

SAR 10g (W/Kg)	0.231241
SAR 1g (W/Kg)	0.522356

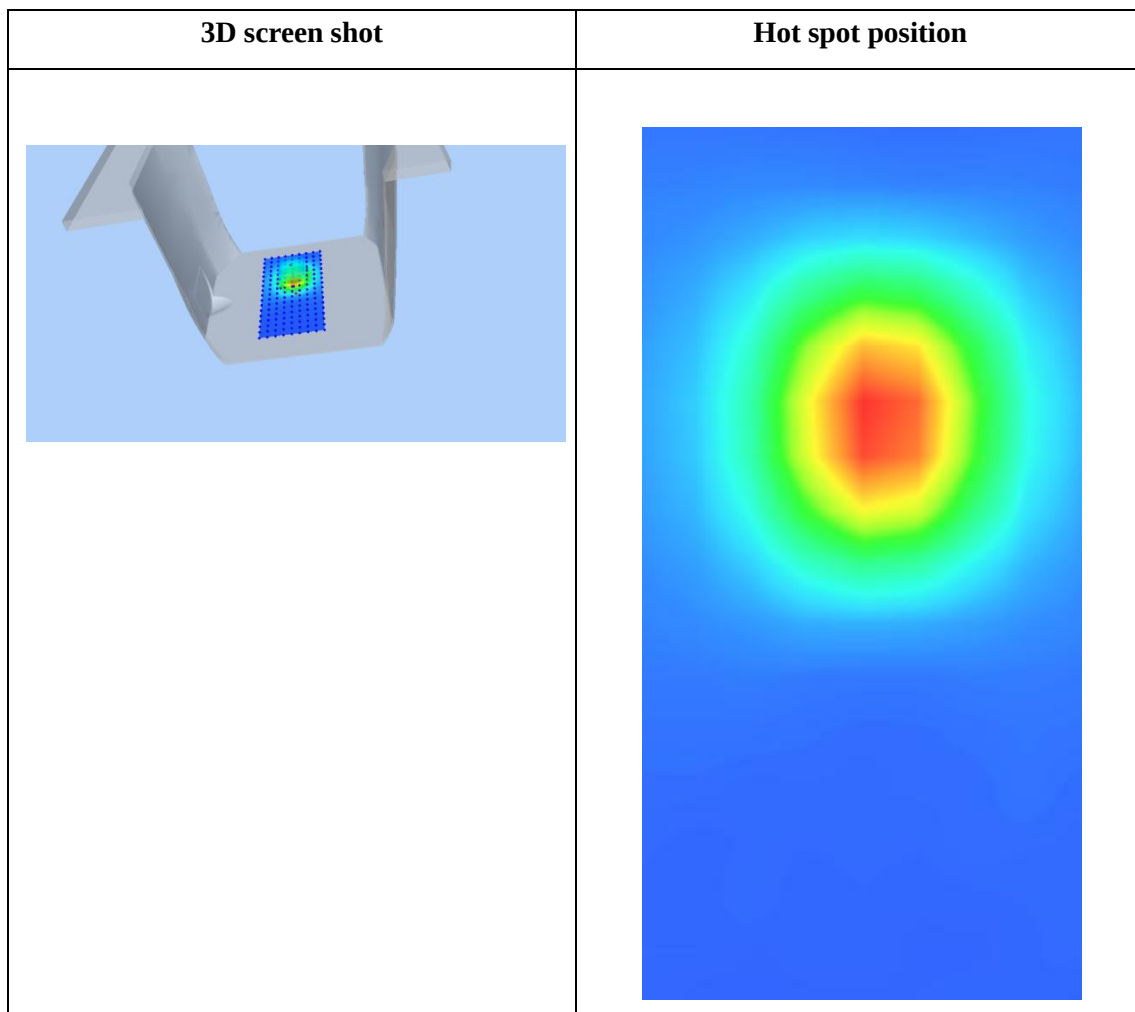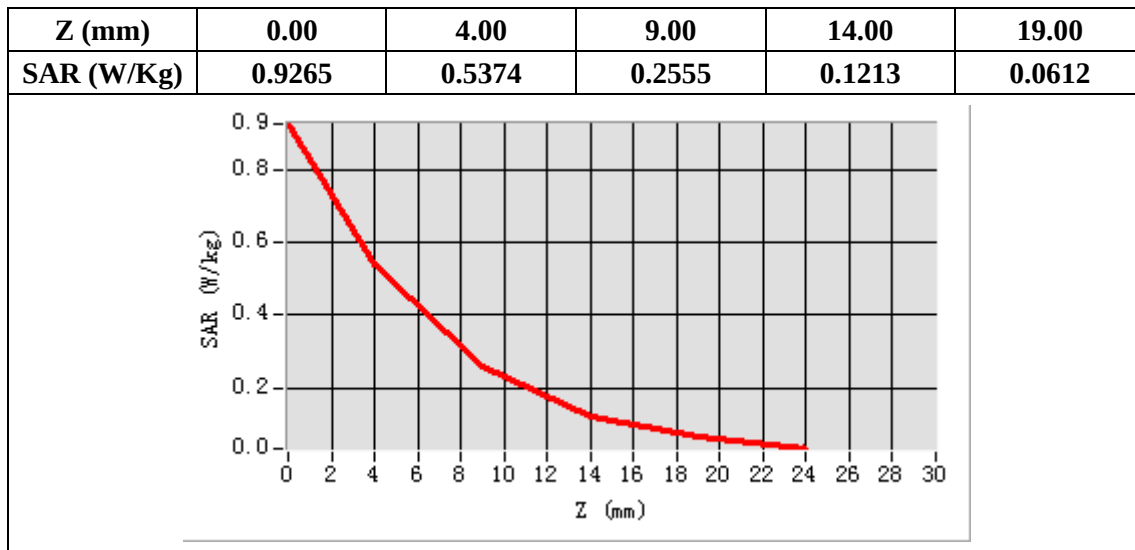

System Performance Check (Body, 835MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 05/10/2021

Measurement duration: 22 minutes 05 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR



E-Field Probe	SATIMO SN_27/15_EPG0261
Frequency (MHz)	835
Relative permittivity (real part)	55.16
Relative permittivity	20.26
Conductivity (S/m)	0.94
Power drift (%)	-3.29
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	1.90
Crest factor:	1:1

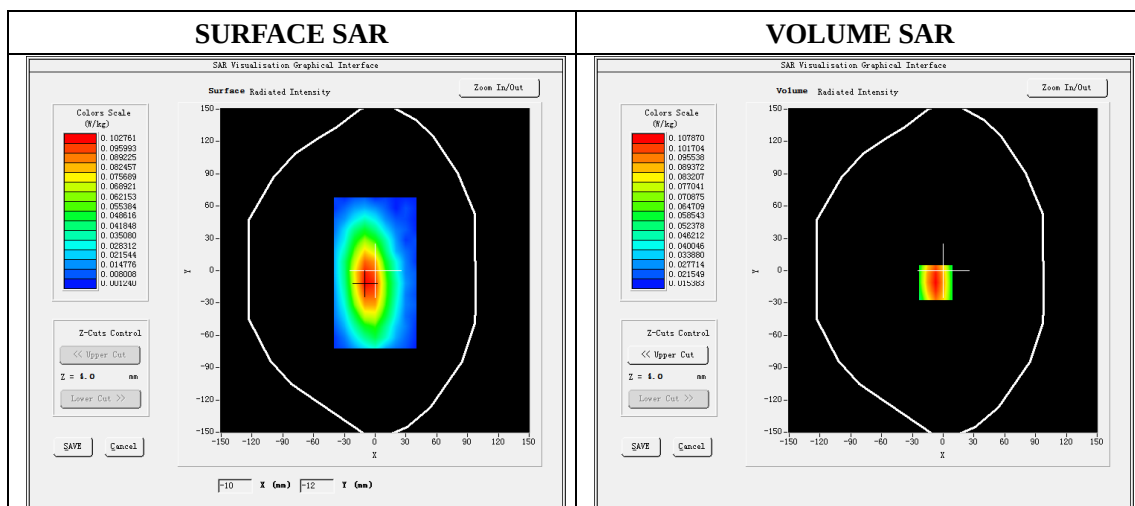

Maximum location: X=-7.00, Y=-11.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.068547
SAR 1g (W/Kg)	0.104226

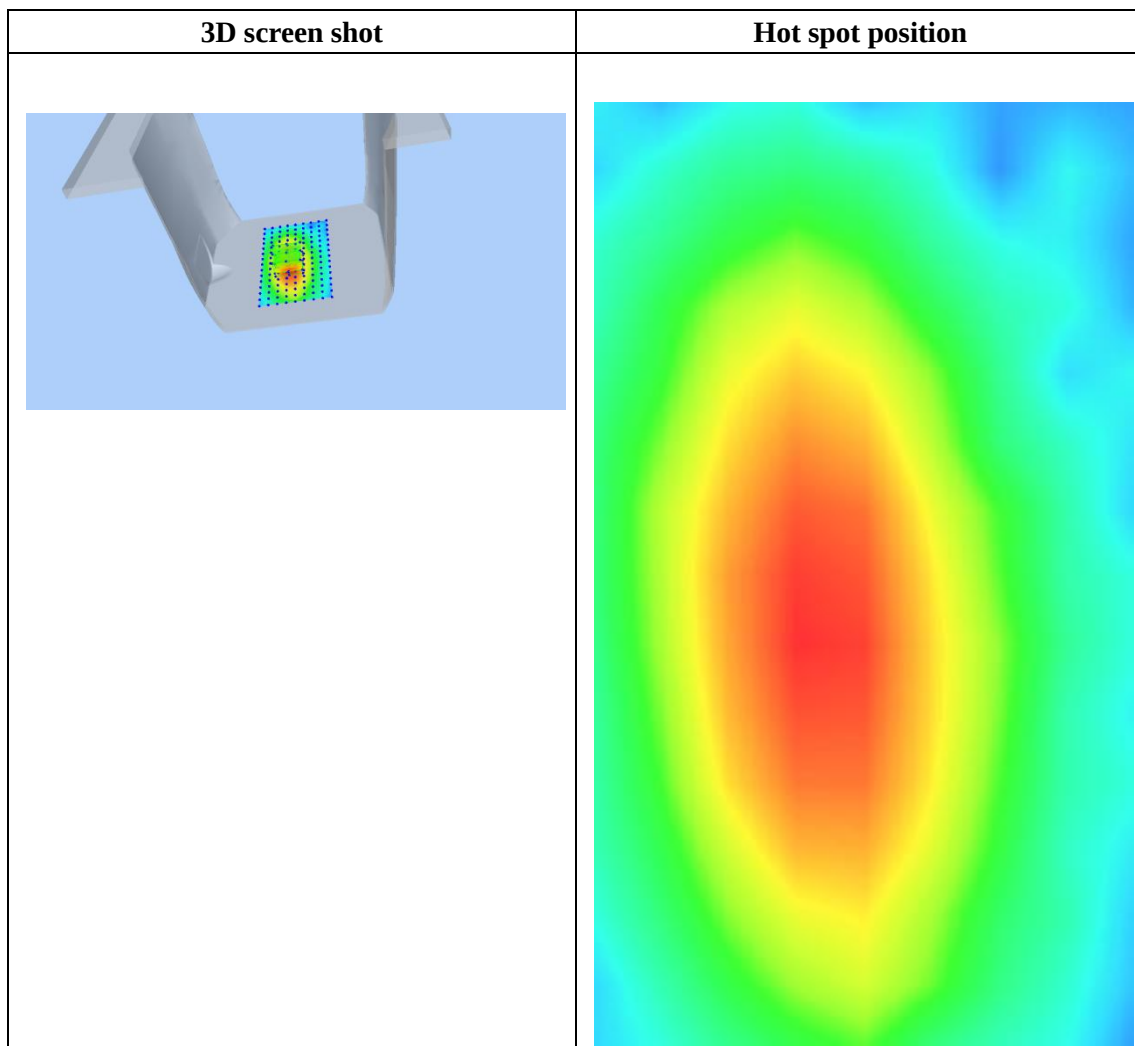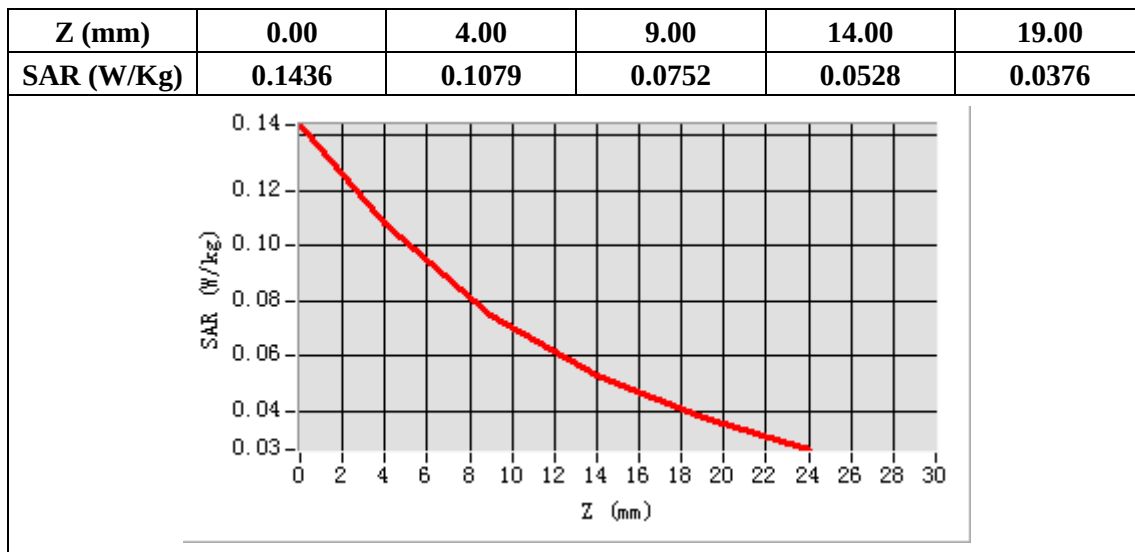

System Performance Check (Body, 1900MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 05/11/2021

Measurement duration: 22 minutes 08 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR



E-Field Probe	SATIMO SN_27/15_EPG0261
Frequency (MHz)	1900
Relative permittivity (real part)	53.33
Relative permittivity	14.49
Conductivity (S/m)	1.53
Power Drift (%)	0.31
Ambient Temperature:	22.1°C
Liquid Temperature:	22.6°C
ConvF:	2.26
Duty factor:	1:1

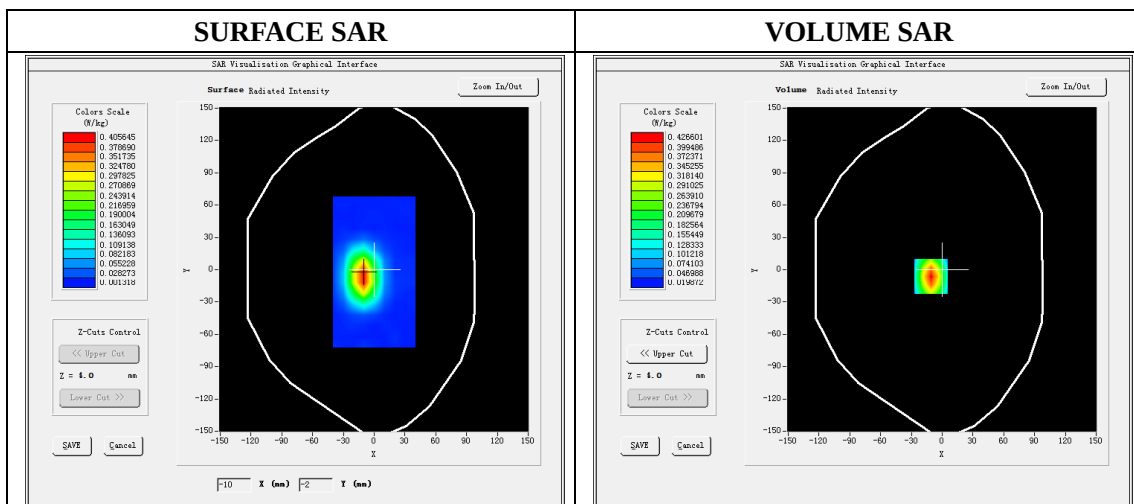

Maximum location: X=-11.00, Y=-6.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.209552
SAR 1g (W/Kg)	0.392738

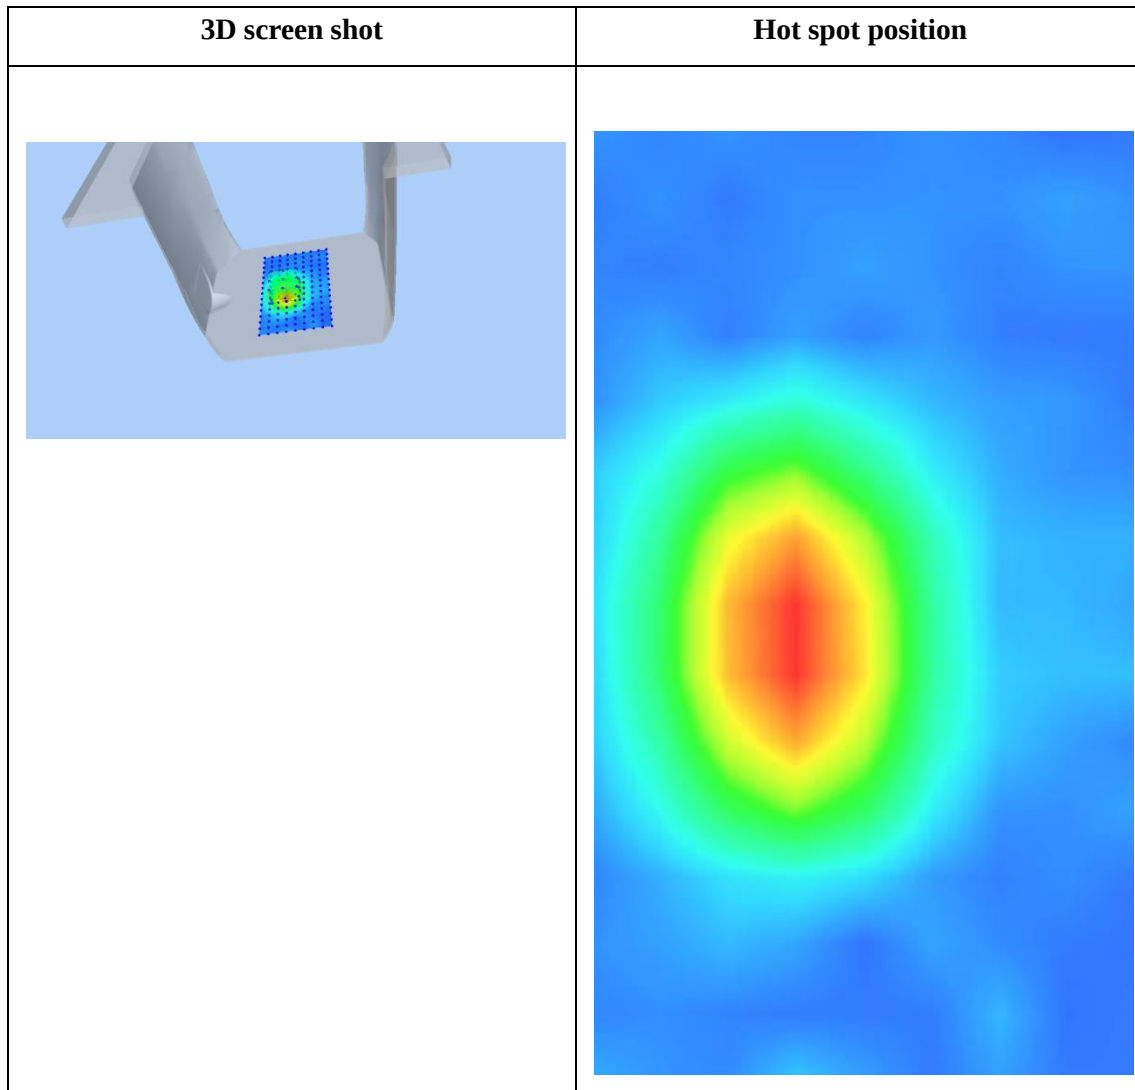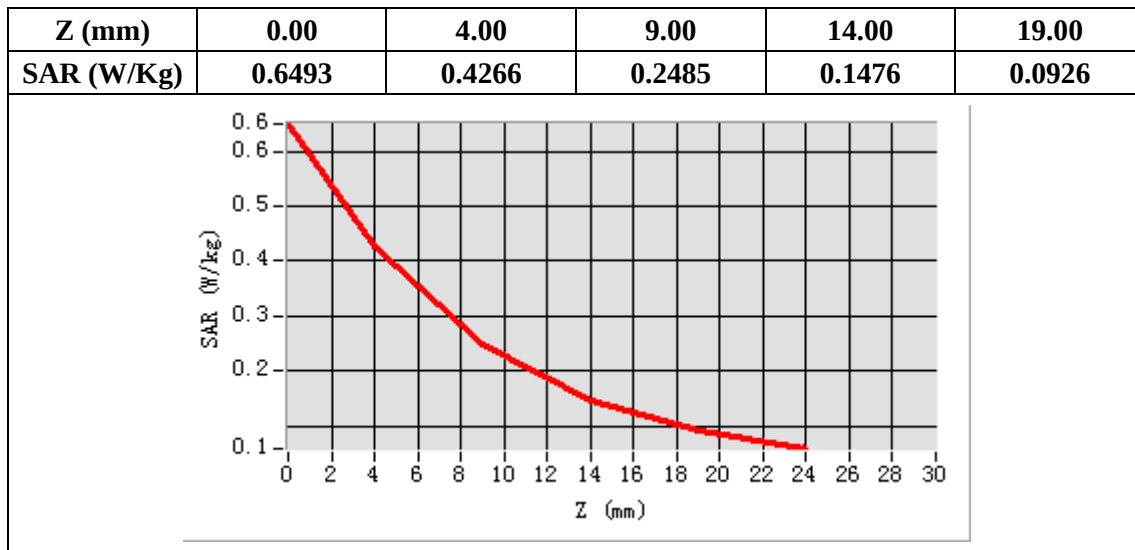

System Performance Check (Body, 2450MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=4mm

Date of measurement: 05/12/2021

Measurement duration: 22 minutes 09 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_27/15_EPG0261
Frequency (MHz)	2450
Relative permittivity (real part)	52.65
Relative permittivity	14.18
Conductivity (S/m)	1.93
Power Drift (%)	-1.56
Ambient Temperature:	22.1°C
Liquid Temperature:	22.6°C
ConvF:	2.47
Duty factor:	1:1

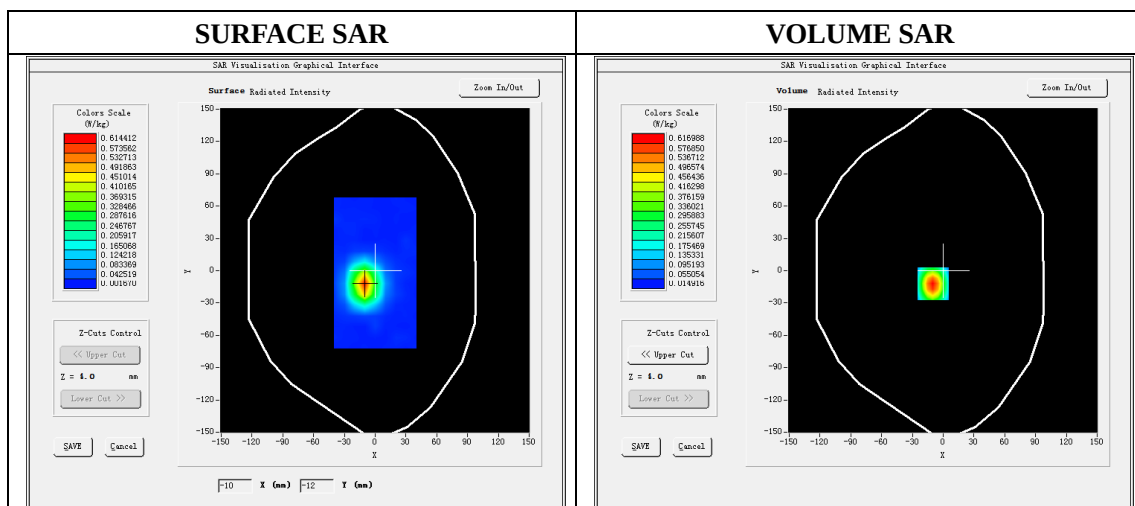

Maximum location: X=-10.00, Y=-12.00

SAR Peak: 1.07 W/kg

SAR 10g (W/Kg)	0.258635
SAR 1g (W/Kg)	0.559002

