



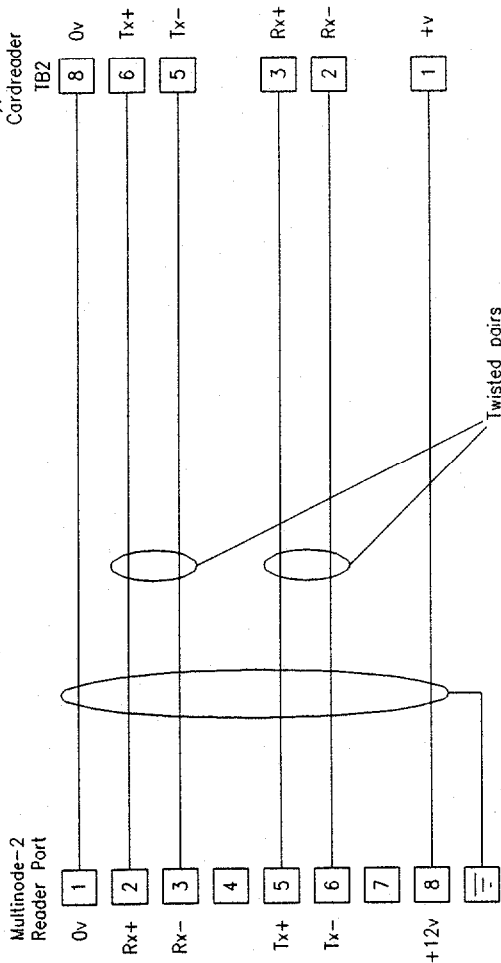

NOTES
Set Reader Interface switches
on Multinode to position C
(Current Loop).

IMPORTANT
All Electric Striking Plates/Locks must be fitted with a suppression diode and must be powered directly from the Power Supply, not via the Multinode Cardreader supply output.

FCC NOTE Any power supply connected to the reader must be a compliant device. If the power supply is a "switcher", it must comply with Part 15 of the FCC Rules.

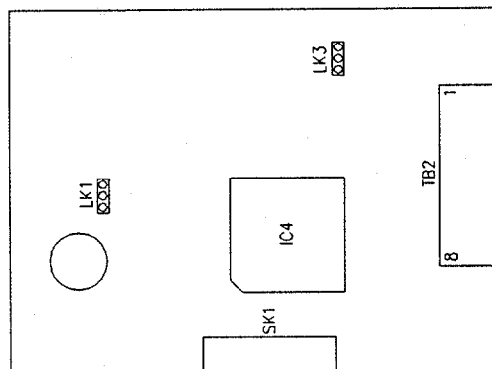

LINK	FUNCTION	SETTING
LK1	LED Intensity	L = Low* H = High
LK2	Test	Not fitted*
LK3	Audio Feedback	0 = Off 1 = On*

* = Default settings

Type 0001 Reader PCB

[illegible]

Title		MULTINODE-2/TYPE 0001 PROXIMITY CARDREADER INTERCONNECTIONS	
Date	26 August 1958	Drawing no. 9600-0160	
Scale	1"		
Drawn	P. Hawath		
Checked			
Approved			

Group 4 Systems
Challenge House
Northway Lane
Tewkesbury
Gloucestershire GL20 8JG

Tel: 01684 850977 Fax: 01684 294845