

6	7	8	
REV.	Description	By	Date
△1	初版发行	Ann.He	2018.04.24
△2			

69.85mm+/-0.2

Powered Subwoofer

Model: PB-3000

SN: PB3KMMYY1001



FCC ID: 2AGJ43K IC: 20885-3K

CAN ICES-3(B)/NMB-3(B)

Design and Engineering by SVS, Ohio USA

Made in China Exclusively for SVS




25.4mm+/-0.2

PB3KMMYY1001

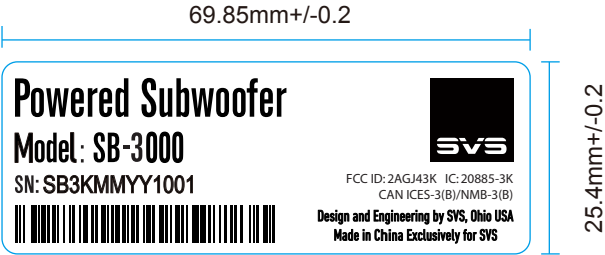
流水号从1001~9999 (每月从1001开始往下流)
生产月/年 (例如: 2018年4月, 表示为0418)
机种号码

图纸条码仅作参考, 生产时需重新输入数据
条码格式: CODE 39
一式三份

- Note:
- 1. Parts shall be approved by Tymphany Engineering prior to mass production.
所有零部件都需超声工程师确定后才可生产。
 - 2. ■ indicates design-critical dimension, and ◆ indicates customer-controlled dimension. Supplier must establish quality control plan for these dimensions. Customer-controlled dimension cannot be changed without prior customer approval.
有"■"标识的尺寸为重要管控尺寸(IQC必检), 有"◆"标识的尺寸为客户重要管控尺寸(IQC必检)。
 - 3. Comply with Tymphany QSI057-1031 "Green Product Chemical Substances Specification".
符合QSI057-1031绿色产品化学物质限用规格;
 - 4. Follow customer's specification as required.符合客户要求。
 - 5. Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
有要求时需符合无卤要求 : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm 。
 - 6. All dimensions and tolerances indicated on the drawing indicate delivered part dimensions;
All dimensions not indicated on the drawing are per 3D model.
来料部件或产品的尺寸及公差需符合图纸标识, 未标识的尺寸请参照3D
 - 7. Material(材质): ARTPAPER FASSON-AW5209 Weight(重量) : 0.4g ±5%
 - 8. Finishing(表面处理): Printing black

		This drawing is the property of Tymphany corporation. It contains material that is confidential and/or legally privileged for the sole use of the intended recipient. Any review or distribution by others is strictly prohibited and punishable to the full extent of the law.				Tolerance					Cus. Model No.	
						Angular ±0.25°					PB-3000 US	
	Quotation	Version NO.: 1	Scale : 1:1 Sheet : 1/1	Unit : MM Size : A4		Tymphony Model No. T02-326013701						
		Drawn By	Checked By	Approved By		Part No. T304002548000						
		Tooling	Ann.He	Suki.Deng		Jacky.Tan	DWG No. T304002548000					
							Part Name.					
							SN label					
Official Issue												
		5		6		7		F176-0705G				

6	7	8	
REV.	Description	By	Date
△1	初版发行	Ann.He	2018.04.23
△2			




SB3KMMYY1001

流水号从1001~9999 (每月从1001开始往下流)
生产月/年 (例如: 2018年4月, 表示为0418)
机种号码

图纸条码仅作参考, 生产时需重新输入数据
条码格式: CODE 39
一式三份

- Note:
- Parts shall be approved by Tymphany Engineering prior to mass production.
所有零部件都需超声工程师确定后才可生产。
 - indicates design-critical dimension, and ◆ indicates customer-controlled dimension. Supplier must establish quality control plan for these dimensions. Customer-controlled dimension cannot be changed without prior customer approval.
有"■"标识的尺寸为重要管控尺寸(IQC必检), 有"◆"标识的尺寸为客户重要管控尺寸(IQC必检)。
 - Comply with Tymphany QSI057-1031 "Green Product Chemical Substances Specification".
符合QSI057-1031绿色产品化学物质限用规格;
 - Follow customer's specification as required.符合客户要求。
 - Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
有要求时需符合无卤要求 : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm 。
 - All dimensions and tolerances indicated on the drawing indicate delivered part dimensions;
All dimensions not indicated on the drawing are per 3D model.
来料部件或产品的尺寸及公差需符合图纸标识, 未标识的尺寸请参照3D
 - Material(材质): ARTPAPER FASSON-AW5209 Weight(重量) : 0.4g ±5%
 - Finishing(表面处理): Printing black

		This drawing is the property of Tymphany corporation. It contains material that is confidential and/or legally privileged for the sole use of the intended recipient. Any review or distribution by others is strictly prohibited and punishable to the full extent of the law.			Tolerance					Cus. Model No.
					Angular ±0.25°					SB-3000 US
	Quotation	Version NO.: 1	Scale : 1:1 Sheet : 1/1	Unit : MM Size : A4	Dimension	F	G	H	J	Tymphany Model No. T02-325023701 /T02-325033701
	Sample	Drawn By	Checked By	Approved By	>0-8	±0.05	±0.1	±0.1	±0.2	Part No. T304002803000
		Tooling	Ann.He	Suki.Deng	Jacky.Tan	>8-25	±0.06	±0.15	±0.15	
	Official Issue								>25-80	±0.12
					>250-800	±0.5	±0.6	±0.8	±1.0	Part Name. SN label
		5	6		7					F176-0705G

**SVS SOUNDPATH WIRELESS
AUDIO ADAPTER**

5V ~ 150mA

LINE LEVEL

INPUT OUTPUT

L R

LFE

TRIGGER INPUT

3V-12V | AC/DC

ON

OFF

AC 100V-120V ~ 50-60Hz 800W

AUTO ON [amber] [blue]

30Hz ··· 40Hz ··· 60Hz ··· 90Hz ··· 140Hz ··· LFE

0° ··· 90° ··· 180°

LOW PASS

PHASE

SVS

SLEDGE
AMPLIFIER TECHNOLOGY

STA-800D | 2

[serial number]



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

1/2 watt standby

CE

RoHS COMPLIANT

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

ATTENTION: RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

AVERTISSEMENT: POUR PREVENIR LES RISQUES D'INCENDIE OU DE CHOC ELECTRIQUE, EVITER D'EXPOSER CET APPAREIL A LA PLUIE OU A L'HUMIDITE.

SVS | 260 Victoria Road, Youngstown, OH 44515, USA | svsound.com