



TEST REPORT

No.I17Z61989-WMD01

for

**Ericsson AB (1900MHz) Radio 2212 B2 B25 KRC 161 688/1 and KRC
161 688/3**

Remote Radio Unit

FCC ID: TA8FKRC161688

IC: 287AB-FS161688

In accordance with FCC CFR 47 Part 24 and

ISED RSS-133: Issue 6

Issued Date: 2018-04-10



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

ISED(IC) accredited test site number: 12389B-1

CTTL, Telecommunication Technology Labs, CAICT

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z61989-WMD01	Rev.0	1 st edition	2018-4-10

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. PROJECT DATA	4
1.3. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT).....	6
3.1. ABOUT EUT	6
3.2. GENERAL DESCRIPTION	7
3.3. CONFIGURATION DESCRIPTION	8
4. REFERENCE DOCUMENTS.....	21
4.1. REFERENCE DOCUMENTS FOR TESTING	21
5. TEST SETUP	22
6. LABORATORY ENVIRONMENT	23
7. SUMMARY OF TEST RESULTS	24
8. TEST EQUIPMENTS UTILIZED	25
9. MEASUREMENT UNCERTAINTY	25
ANNEX A: MEASUREMENT RESULTS	26
A.1 MAXIMUM OUTPUT POWER AND PEAK-TO-AVERAGE POWER RATIO	26
A.2 OCCUPIED BANDWIDTH.....	61
A.3 SPURIOUS EMISSIONS AT BAND EDGE.....	103
A.4 CONDUCTED SPURIOUS EMISSION	206
A.5 RADIATED SPURIOUS EMISSION	297
A.6 FREQUENCY STABILITY	302
ANNEX B: ACCREDITATION CERTIFICATE.....	307

1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(Kangding Road)

Address: No. 18, Kangding Road, Yizhuang, Beijing,
P. R. China 100176

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Project data

Testing Start Date: 2018-03-01

Testing End Date: 2018-04-08

1.3. Signature




Shen Yi

(Prepared this test report)



Zhou Yu

(Reviewed this test report)



Liu Baodian

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Ericsson (China) Communications Company Ltd.
Address /Post: Ericsson Tower, Lize East Street, Chaoyang District, Beijing 100102,
P.R.China
Contact: Tingting Wang
Email: tingting.wang@ericsson.com
Telephone: +86 10 6439 4884

2.2. Manufacturer Information

Company Name: Ericsson AB
Address /Post: Isafjordsgatan 10, 164 80 Stockholm
Sweden
Contact: /
Email: /
Telephone: /



3. Equipment Under Test (EUT)

3.1. About EUT

Description	Remote Radio Unit
Product Name	Radio 2212 B2 B25
Product Number	KRC 161 688/1 ; KRC 161 688/3
FCC ID	TA8FKRC161688
IC	287AB-FS161688
Antenna	N/A
Output power	Maximum 49.0dBm (80W) per port
Power source	-48V DC
Serial Number	C46K100150; D827032786
Hardware Version	R5B
Software Version	PIS: CXP 9017316/7 rev R70JB
Frequency range	B2: Rx: 1850-1910 MHz, Tx: 1930-1990 MHz B25: Rx: 1850-1915 MHz, Tx: 1930-1995 MHz
Supported TX/RX configuration	2 TX / 2 RX per unit
Maximum RF bandwidth (IBW)	GSM SR: 40MHz WCDMA SR: 65MHz LTE SR: 65 MHz valid for LTE BW>3 MHz, 20 MHz or 40MHz valid for LTE BW≤3 MHz GSM+WCDMA Mix Mode: 60MHz LTE+WCDMA Mix Mode: 65 MHz valid for LTE BW>3 MHz, 20 MHz or 40MHz valid for LTE carriers BW≤3 MHz LTE+GSM Mix Mode: 60 MHz valid for LTE BW>3 MHz, 40MHz valid for LTE carriers BW≤3 MHz NB+GSM: 40MHz NB+WCDMA: 65MHz NB+LTE: 65 MHz valid for LTE BW>3 MHz, 20MHz or 40MHz valid for LTE BW≤3 MHz NB+GSM+WCDMA: 60MHz, But clearance of NB and G shall be no larger than 40MHz NB+GSM+LTE: 60 MHz valid for LTE BW>3 MHz, 40MHz valid for LTE carriers BW≤3 MHz, But clearance of NB and G shall be no larger than 40MHz NB+WCDMA+LTE: 65 MHz valid for LTE BW>3 MHz, 20 MHz or 40MHz valid for LTE carriers BW≤3 MHz
Total number of supported carriers per port	Maximum 6 carriers for all except GSM single RAT and NB-IoT Standalone per port. GSM SR: Maximum 4 carriers NB-IoT Standalone: Maximum 1 carrier
Supported modulations	GSM: GMSK, 8PSK, AQPSK WCDMA: QPSK, 16QAM, 64QAM LTE: QPSK, 16QAM, 64QAM, 256QAM NB-IoT: QPSK
Date of receipt	2018-03-01

3.2. General Description

The Equipment Under Test (EUT) is an Ericsson Remote Radio Unit working in the public mobile service 1900MHz band which provides communication connections to 1900MHz network in GSM / WCDMA / LTE / NB-IoT modes and MSR modes. The Radio 2212 B2 B25 KRC 161 688/1 and KRC 161 688/3 operates from a -48V DC supply.

The EUT includes two TX/RX ports and it can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration. The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

The EUT is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.



Equipment Under Test

3.3. Configuration Description

The following settings were used to representative for all traffic scenarios when settings with different modulations, channel bandwidths, number for carriers and RF configurations have been tested to find the worst case setting. The settings below were used for all measurements unless otherwise noted:

GSM

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
GSM-1C	1 Carrier	1930.4	1960.0	1989.6
GSM-2C	2 Carriers	1930.4 + 1970.0	1940.2 + 1979.8	1950.0 + 1989.6
GSM-3C	3 Carriers	1930.4 + 1950.0 + 1970.0	1940.2 + 1960.0 + 1979.8	1950.0 + 1970.0 + 1989.6
GSM-4C	4 Carriers	1930.4 + 1931 + 1969.4 + 1970.0	1950.2+1950.8+1969.2 +1969.8	1950.0 + 1950.6 + 1989.0 + 1989.6
GSM-1C-BE	1 Carriers	1930.4	N/A	1989.6
GSM-2C-BE	2 Carriers	1930.4 + 1932.0	N/A	1988.0 + 1989.6

WCDMA

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
WCDMA-1C	1 Carrier	1932.4	1962.6	1992.6
WCDMA-2C	2 Carriers	-	1932.4 + 1992.6	-
WCDMA-3C	3 Carriers	-	1932.4 + 1937.4 + 1992.6	-
WCDMA-6C	6 Carriers	-	1932.4 + 1937.4 + 1942.4 + 1982.6 + 1987.6 + 1992.6	-
WCDMA-1C-BE	1 Carriers	1932.4	N/A	1992.6
WCDMA-2C-BE	2 Carriers	1932.4 + 1937.4	N/A	1992.6 + 1987.6

LTE

Configuration	Carrier	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE-MIMO-1C	1 Carrier	1.4MHz	1930.7	1962.5	1994.3
		3MHz	1931.5	1962.5	1993.5
		5MHz	1932.5	1962.5	1992.5
		10MHz	1935.0	1962.5	1990.0
		15MHz	1937.5	1962.5	1987.5
		20MHz	1940.0	1962.5	1985.0
LTE-MIMO-2C	2 Carriers	1.4MHz	1930.7 + 1949.3	1953.2 + 1971.8	1975.7 + 1994.3
		3MHz	1931.5 + 1948.5	1954.0 + 1971.0	1976.5 + 1993.5
		5MHz	-	1932.5 + 1992.5	-
		10MHz	-	1935.0 + 1990.0	-
		15MHz	-	1937.5 + 1987.5	-
		20MHz	-	1940.0 + 1985.0	-
LTE-MIMO-3C	3 Carriers	1.4MHz	1930.7 + 1932.1 + 1949.3	1953.2 + 1954.6 + 1971.8	1975.7 + 1977.1 + 1994.3
		3MHz	1931.5 + 1934.5 + 1948.5	1954.0 + 1957.0 + 1971.0	1976.5 + 1979.5 + 1993.5
		5MHz	-	1932.5 + 1937.5 + 1992.5	-
		10MHz	-	1935.0 + 1945.0 + 1990.0	-
		15MHz	-	1937.5 + 1952.5 + 1987.5	-
		20MHz	-	1940.0 + 1960.0 + 1985.0	-
LTE-MIMO-4C	4 Carriers	15MHz	-	1937.5 + 1952.5 + 1972.5 + 1987.5	-
LTE-MIMO-6C	6 Carriers	1.4MHz	1930.7 + 1932.1 + 1933.5 + 1946.5 + 1947.9 + 1949.3	1953.2 + 1954.6 + 1956 + 1969 + 1970.4 + 1971.8	1975.7 + 1977.1 + 1978.5 + 1991.5 + 1992.9 + 1994.3
		3MHz	1931.5 + 1934.5 + 1937.5 + 1942.5 + 1945.5 + 1948.5	1954.0 + 1957.0 + 1960.0 + 1965.0 + 1968.0 + 1971.0	1976.5 + 1979.5 + 1982.5 + 1987.5 + 1990.5 + 1993.5
		5MHz	-	1932.5 + 1937.5 + 1942.5 + 1982.5 + 1987.5 + 1992.5	-
		10MHz	-	1935 + 1945 + 1955 + 1970 + 1980 + 1990	-

Configuration	Carrier	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE-MIMO-1C-BE	1 Carriers	1.4MHz	1930.7	N/A	1994.3
		3MHz	1931.5	N/A	1993.5
		5MHz	1932.5	N/A	1992.5
		10MHz	1935.0	N/A	1990.0
		15MHz	1937.5	N/A	1987.5
		20MHz	1940.0	N/A	1985.0
LTE-MIMO-2C-BE	2 Carriers	1.4MHz	1930.7 + 1932.1	N/A	1992.9 + 1994.3
		3MHz	1931.5 + 1934.5	N/A	1990.5 + 1993.5
		5MHz	1932.5 + 1937.5	N/A	1987.5 + 1992.5
		10MHz	1935.0 + 1945.0	N/A	1980.0 + 1990.0
		15MHz	1937.5 + 1952.5	N/A	1972.5 + 1987.5
		20MHz	1940.0 + 1960.0	N/A	1985.0 + 1965.0

NB-IoT

Configuration	Carrier	Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT-InBand-1C	1 Carrier	5MHz	1932.5	1962.5	1992.5
		10MHz	1935.0	1962.5	1990.0
		15MHz	1937.5	1962.5	1987.5
		20MHz	1940.0	1962.5	1985.0
NB-IoT-InBand-1C-BE	1 Carrier	5MHz	1932.5	N/A	1992.5
		10MHz	1935.0	N/A	1990.0
		15MHz	1937.5	N/A	1987.5
		20MHz	1940.0	N/A	1985.0

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
NB-IoT-Standalone-1C	1 Carrier	1930.3	1962.5	1994.8
NB-IoT-Standalone-1C-BE	1 Carrier	1930.3	N/A	1994.8

WCDMA+LTE

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
WCDMA+LTE-M C-1	1W+1L	1.4MHz	-	(W)1932.4 + (L)1994.3	-
		3MHz	-	(W)1932.4 + (L)1993.5	-
		5MHz	-	(W)1932.4 + (L)1992.5	-
		10MHz	-	(W)1932.4 + (L)1990.0	-
		15MHz	-	(W)1932.4 + (L)1987.5	-
		20MHz	-	(W)1932.4 + (L)1985.0	-
WCDMA+LTE-M C-2	2W+1L	1.4MHz	-	(W)1932.4 + 1937.4 + (L)1994.3	-
		3MHz	-	(W)1932.4 + 1937.4 + (L)1993.5	-
		5MHz	-	(W)1932.4 + 1937.4 + (L)1992.5	-
		10MHz	-	(W)1932.4 + 1937.4 + (L)1990	-
		15MHz	-	(W)1932.4 + 1937.4 + (L)1987.5	-
		20MHz	-	(W)1932.4 + 1937.4 + (L)1985	-
WCDMA+LTE-M C-3	3W+3L	1.4MHz	-	(W)1932.4 + (W)1937.4 + (W)1942.4 + (L)1991.5 + 1992.9 + 1994.3	-
		3MHz	-	(W)1932.4 + (W)1937.4 + (W)1942.4 + (L)1987.5 + 1990.5 + 1993.5	-
		5MHz	-	(W)1932.4 + (W)1937.4 + (W)1942.4 + (L)1982.5 + 1987.5 + 1992.5	-
		10MHz	-	(W)1932.4 + (W)1937.4 + (W)1942.4 + (L)1970 + (L)1980 + (L)1990	-
		15MHz	-	(W)1932.4 + (W)1937.4 + (W)1942.4 + (L)1957.5 + (L)1972.5 + (L)1987.5	-
WCDMA+LTE-M C-4	3W+2L	20MHz	-	(W)1932.4 + (W)1937.4 + (W)1942.4 + (L)1965 + (L)1985	-

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
WCDMA+LTE-MI MO-MC-1-BE	1W+1L	1.4MHz	(L)1930.7 + (W)1934.0	N/A	(W)1991.0 + (L)1994.3
		3MHz	(L)1931.5 + (W)1935.6	N/A	(W)1989.4 + (L)1993.5
		5MHz	(W)1932.4 + (L)1937.5	N/A	(L)1987.5 + (W)1992.6
		10MHz	(W)1932.4 + (L)1940.0	N/A	(L)1985.0 + (W)1992.6
		15MHz	(W)1932.4 + (L)1942.5	N/A	(L)1982.5 + (W)1992.6
		20MHz	(W)1932.4 + (L)1945.0	N/A	(L)1980.0 + (W)1992.6
WCDMA+LTE-MI MO-MC-2-BE	2W+1L	1.4MHz	(L)1930.7 + (W)1934.0 + (W)1939.0	N/A	(W)1986.0 + (W)1991.0 + (L)1994.3
		3MHz	(L)1931.5 + (W)1935.6 + (W)1940.6	N/A	(W)1984.4 + (W)1989.4 + (L)1993.5
		5MHz	(W)1932.4 + 1937.4 + (L)1942.5	N/A	(L)1982.5 + (W)1987.6 + 1992.6
		10MHz	(W)1932.4 + 1937.4 + (L)1945.0	N/A	(L)1980.0 + (W)1987.6 + 1992.6
		15MHz	(W)1932.4 + 1937.4 + (L)1947.5	N/A	(L)1977.5 + (W)1987.6 + 1992.6
		20MHz	(W)1932.4 + 1937.4 + (L)1950.0	N/A	(L)1975.0 + (W)1987.6 + 1992.6

GSM+WCDMA

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
GSM+WCDMA-M C-1	1G+1W	-	(G)1930.4+(W)1987.6	-
GSM+WCDMA-M C-2	2G+1W	-	(G)1930.4+1935.8+(W)19 87.6	-
GSM+WCDMA-M C-3	4G+2W	-	(G)1930.4+(G)1932.2+(G) 1934.0+(G)1935.8+(W)19 82.6+(W)1987.6	-
GSM+WCDMA-M C-1-BE	1G+1W	(G)1930.4 + (W)1933.0	N/A	(W)1987.0 + (G)1989.6
GSM+WCDMA-M C-2-BE	2G+1W	(G)1930.4 + (G)1932.0 + (W)1934.8	N/A	(W)1985.2 + (G)1988.0 + (G)1989.6

GSM+LTE

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
GSM+LTE-MIMO -MC-1	1G+1L	1.4MHz	(G)1930.4+(L)1969.3	(G)1940.2+(L)1979.3	(G)1955.2+(L)1989.3
		3MHz	(G)1930.4+(L)1968.5	(G)1940.2+(L)1978.5	(G)1955.2+(L)1988.5
		5MHz	-	(G)1930.4+(L)1987.5	-
		10MHz	-	(G)1930.4+(L)1985	-
		15MHz	-	(G)1930.4+(L)1982.5	-
		20MHz	-	(G)1930.4+(L)1980	-
GSM+LTE-MIMO -MC-2	2G+1L	1.4MHz	(G)1930.4+(G)1935.8+(L) 1969.3	(G)1940.2+(G)1945.8+(L) 1979.3	(G)1950.2+(G)1955.8+(L) 1989.3
		3MHz	(G)1930.4+(G)1935.8+(L) 1968.5	(G)1940.2+(G)1945.8+(L) 1978.5	(G)1950.2+(G)1955.8+(L) 1988.5
		5MHz	-	(G)1930.4+(G)1935.8+(L) 1987.5	-
		10MHz	-	(G)1930.4+(G)1935.8+(L) 1985	-
		15MHz	-	(G)1930.4+(G)1935.8+(L) 1982.5	-
		20MHz	-	(G)1930.4+(G)1935.8+(L) 1980	-
GSM+LTE-MIMO -MC-3	4G+2L	1.4MHz	(G)1930.4 + (G)1931+ (L)1949.3 + (L)1950.7 + (G)1969.4 + (G)1970	(G)1940.2 + (G)1940.8+ (L)1959.3 + (L)1960.7 + (G)1979.2 + (G)1979.8	(G)1950.2 + (G)1950.8+ (L)1969.3 + (L)1970.7 + (G)1989 + (G)1989.6
		3MHz	(G)1930.4 + (G)1931+ (L)1948.5 + (L)1951.5 + (G)1969.4 + (G)1970	(G)1940.2 + (G)1940.8+ (L)1958.5 + (L)1961.5 + (G)1979.2 + (G)1979.8	(G)1950.2 + (G)1950.8+ (L)1968.5 + (L)1971.5 + (G)1989 + (G)1989.6
		5MHz	-	(G)1930.4 + (G)1932.2+ (G)1934 + (G)1935.8 + (L)1982.5 + (L)1987.5	-
		10MHz	-	(G)1930.4 + (G)1932.2+ (G)1934 + (G)1935.8 + (L)1975 + (L)1985	-
		15MHz	-	(G)1930.4 + (G)1932.2+ (G)1934 + (G)1935.8 + (L)1967.5 + (L)1982.5	-
		20MHz	-	(G)1930.4 + (G)1932.2+ (G)1934 + (G)1935.8 + (L)1960 + (L)1980	-

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
GSM+LTE-MIMO -MC-1-BE	1G+1L	1.4MHz	(G)1930.4 + (LTE)1931.3	N/A	(LTE)1988.7 + (G)1989.6
		3MHz	(G)1930.4 + (LTE)1932.1	N/A	(LTE)1987.9 + (G)1989.6
		5MHz	(G)1930.4 + (LTE)1933.1	N/A	(LTE)1986.9 + (G)1989.6
		10MHz	(G)1930.4 + (LTE)1935.6	N/A	(LTE)1984.4 + (G)1989.6
		15MHz	(G)1930.4 + (LTE)1938.1	N/A	(LTE)1981.9 + (G)1989.6
		20MHz	(G)1930.4 + (LTE)1940.6	N/A	(LTE)1979.4 + (G)1989.6
GSM+LTE-MIMO -MC-2-BE	2G+1L	1.4MHz	(G)1930.4 + (G)1932.0 + (L)1932.9	N/A	(L)1987.1 + (G)1988.0 + (G)1989.6
		3MHz	(G)1930.4 + (G)1932.0 + (L)1933.7	N/A	(L)1986.3 + (G)1988.0 + (G)1989.6
		5MHz	(G)1930.4 + (G)1932.0 + (L)1934.7	N/A	(L)1985.3 + (G)1988.0 + (G)1989.6
		10MHz	(G)1930.4 + (G)1932.0 + (L)1937.2	N/A	(L)1982.8 + (G)1988.0 + (G)1989.6
		15MHz	(G)1930.4 + (G)1932.0 + (L)1939.7	N/A	(L)1980.3 + (G)1988.0 + (G)1989.6
		20MHz	(G)1930.4 + (G)1932.0 + (L)1942.2	N/A	(L)1977.8 + (G)1988.0 + (G)1989.6

NB-IoT+GSM

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
NB-IoT+GSM-MC -1	1NB+1 G	(G)1930.4+(NB)1969.8	(G)1940.2+(NB)1979.8	(G)1950.2+(NB)1989.8
NB-IoT+GSM-MC -2	1NB+2 G	(G)1930.4 + 1935.8 + (NB)1969.8	(G)1940.2+1945.8+(NB)1 979.8	(G)1950.2+1955.8+(NB)1 989.8
NB-IoT+GSM-MC -3	1NB+3 G	(G)1930.4+1931+(NB)195 0+(G)1969.8	(G)1940.2+1941+(NB)196 0+(G)1979.8	(G)1950.2+1951+(NB)197 0+(G)1989.6
NB-IoT+GSM-MC -1-BE	1NB+1 G	(NB)1930.3 + (G)1932	N/A	(G)1988.2 + (NB)1989.8
NB-IoT+GSM-MC -2-BE	1NB+2 G	(NB)1930.3 + (G)1932 + (G)1933.6	N/A	(G)1986.6 + (G)1988.2 + (NB)1989.8

NB-IoT+WCDMA

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
NB-IoT+WCDMA-MC-1	1NB+1 W	-	(NB)1930.3+(W)1992.6	-
NB-IoT+WCDMA-MC-2	1NB+2 W	-	(NB)1930.3+(W)1962.4+1 992.6	-
NB-IoT+WCDMA-MC-3	1NB+5 W	-	(NB)1930.3+(W)1955+196 0+1965+1970+1992.6	-
NB-IoT+WCDMA-MC-1-BE	1NB+1 W	(NB)1930.3 + (W)1933	N/A	(W)1992.2 + (NB)1994.8
NB-IoT+WCDMA-MC-2-BE	1NB+2 W	(NB)1930.3 + (W)1933 + 1938.0	N/A	(W)1987.2 + 1992.2 + (NB)1994.8

NB-IoT+LTE

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT+LTE-MIM O-MC-1	1NB+1L	1.4MHz	(NB)1930.3+(L)1949.3	(NB)1952.7+(L)1971.8	(NB)1975.2+(L)1994.3
		3MHz	(NB)1930.3+(L)1948.5	(NB)1952.7+(L)1971.0	(NB)1975.2+(L)1993.5
		5MHz	-	(NB)1930.3+(L)1992.5	-
		10MHz	-	(NB)1930.3+(L)1990.0	-
		15MHz	-	(NB)1930.3+(L)1987.5	-
		20MHz	-	(NB)1930.3+(L)1985.0	-
NB-IoT+LTE-MIM O-MC-2	1NB+2L	1.4MHz	(NB)1930.3 + (L)1940 + 1949.3	(NB)1952.7 + (L)1962.5 + 1971.8	(NB)1975.2 + (L)1985 + 1994.3
		3MHz	(NB)1930.3 + (L)1940 + 1948.5	(NB)1952.7 + (L)1962.5 + 1971	(NB)1975.2 + (L)1985 + 1993.5
		5MHz	-	(NB)1930.3 + (L)1962.5+1992.5	-
		10MHz	-	(NB)1930.3 + (L)1962.5+1990	-
		15MHz	-	(NB)1930.3 + (L)1962.5+1987.5	-
		20MHz	-	(NB)1930.3 + (L)1962.5+1985	-

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT+LTE-MIM O-MC-3	1NB+5L	1.4MHz	(NB)1930.3+(L)1937.9+19 39.3+1940.7+1942.1+194 9.3	(NB)1952.7+(L)1960.4+19 61.8+1963.2+1964.6+197 1.8	(NB)1975.2+(L)1982.9+19 84.3+1985.7+1987.1+ 1994.3
		3MHz	(NB)1930.3+(L)1935.5+19 38.5+1941.5+1944.5+194 8.5	(NB)1952.7+(L)1958+196 1+1964+1967+1971	(NB)1975.2+(L)1980.5+19 83.5+1986.5+1989.5+ 1993.5
		5MHz	-	(NB)1930.3+(L)1955+197 60+1965+1970+ 1992.5	-
		10MHz	-	(NB)1930.3+(L)1947.5+19 57.5+1967.5+1977.5+ 1990.0	-
NB-IoT+LTE-MIM O-MC-4	1NB+4L	15MHz	-	(NB)1930.3+(L)1940.0+19 55.0+1970.0+ 1987.5	-
NB-IoT+LTE-MIM O-MC-5	1NB+3L	20MHz	-	(NB)1930.3+(L)1945 + 1965+ 1985.0	-
NB-IoT+LTE-MIM O-MC-1-BE	1NB+1L	1.4MHz	(NB)1930.3 + (L)1931.2	N/A	(L)1993.9 + (NB)1994.8
		3MHz	(NB)1930.3 + (L)1932.0	N/A	(L)1993.1 + (NB)1994.8
		5MHz	(NB)1930.3 + (L)1933.0	N/A	(L)1992.1 + (NB)1994.8
		10MHz	(NB)1930.3 + (L)1935.5	N/A	(L)1989.6 + (NB)1994.8
		15MHz	(NB)1930.3 + (L)1938	N/A	(L)1987.1 + (NB)1994.8
		20MHz	(NB)1930.3 + (L)1940.5	N/A	(L)1984.6 + (NB)1994.8
NB-IoT+LTE-MIM O-MC-2-BE	1NB+2L	1.4MHz	(NB)1930.3 + (L)1931.2 + 1932.6	N/A	(L)1992.5 + 1993.9 + (NB)1994.8
		3MHz	(NB)1930.3 + (L)1932.0 + 1935.0	N/A	(L)1990.1 + 1993.1 + (NB)1994.8
		5MHz	(NB)1930.3 + (L)1933.0 + 1938.0	N/A	(L)1987.1 + 1992.1 + (NB)1994.8
		10MHz	(NB)1930.3 + (L)1935.5+1945.5	N/A	(L)1979.6+1989.6 + (NB)1994.8
		15MHz	(NB)1930.3 + (L)1938+1953	N/A	(L)1972.1+1987.1 + (NB)1994.8
		20MHz	(NB)1930.3 + (L)1940.5+1960.5	N/A	(L)1964.6+1984.6 + (NB)1994.8

NB-IoT+GSM+WCDMA

Configuration	Carrier	Carrier Frequency Configuration (MHz)		
		Bottom	Middle	Top
NB-IoT+GSM+W CDMA-MC-1	1NB+1 G+1W	(G)1930.4+(W)1950+(NB) 1969.8	(G)1940.2+(W)1960+(NB) 1979.8	(G)1950.2+(W)1970+(NB) 1989.8
NB-IoT+GSM+W CDMA-MC-2	1NB+2 G+1W	(G)1930.4+1931+(W)1950 +(NB)1969.8	(G)1940.2+1940.8+(W)19 60+(NB)1979.8	(G)1950.2+1950.8+(W)19 70+(NB)1989.8
NB-IoT+GSM+W CDMA-MC-3	1NB+3 G+2W	(G)1930.4+1931+1931.6+ (W)1947.4+1952.4+(NB)1 969.8	(G)1940.2+1940.8+1941.4 +(W)1957.4+1963.4+(NB) 1979.8	(G)1950.2+1950.8+1951.4 +(W)1967.4+1972.4+(NB) 1989.8
NB-IoT+GSM+W CDMA-MC-1-BE	1NB+1 G+1W	(NB)1930.3+(G)1932+(W) 1934.6	N/A	(W)1985.6+(G)1988.2+(N B)1989.8
NB-IoT+GSM+W CDMA-MC-2-BE	1NB+2 G+1W	(NB)1930.3+(G)1932+193 3.6+(W)1936.2	N/A	(W)1984+(G)1986.6+1988 .2+(NB)1989.8

NB-IoT+GSM+LTE

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT+GSM+LT E-MIMO-MC-1	1NB+1 G+1L	1.4MHz	(G)1930.4+(L)1950+(NB)1 969.8	(G)1940.2+(L)1960+(NB)1 979.8	(G)1950.2+(L)1970+(NB)1 989.8
		3MHz	(G)1930.4+(L)1950+(NB)1 969.8	(G)1940.2+(L)1960+(NB)1 979.8	(G)1950.2+(L)1970+(NB)1 989.8
		5MHz	(G)1930.4+(L)1950+(NB)1 969.8	(G)1940.2+(L)1960+(NB)1 979.8	(G)1950.2+(L)1970+(NB)1 989.8
		10MHz	(G)1930.4+(L)1950+(NB)1 969.8	(G)1940.2+(L)1960+(NB)1 979.8	(G)1950.2+(L)1970+(NB)1 989.8
		15MHz	(G)1930.4+(L)1950+(NB)1 969.8	(G)1940.2+(L)1960+(NB)1 979.8	(G)1950.2+(L)1970+(NB)1 989.8
		20MHz	(G)1930.4+(L)1950+(NB)1 969.8	(G)1940.2+(L)1960+(NB)1 979.8	(G)1950.2+(L)1970+(NB)1 989.8
NB-IoT+GSM+LT E-MIMO-MC-2	1NB+2 G+1L	1.4MHz	(G)1930.4+1931+(L)1950 +(NB)1969.8	(G)1940.2+1940.8+(L)196 0+(NB)1979.8	(G)1950.2+1950.8+(L)197 0+(NB)1989.8
		3MHz	(G)1930.4+1931+(L)1950 +(NB)1969.8	(G)1940.2+1940.8+(L)196 0+(NB)1979.8	(G)1950.2+1950.8+(L)197 0+(NB)1989.8
		5MHz	(G)1930.4+1931+(L)1950 +(NB)1969.8	(G)1940.2+1940.8+(L)196 0+(NB)1979.8	(G)1950.2+1950.8+(L)197 0+(NB)1989.8
		10MHz	(G)1930.4+1931+(L)1950 +(NB)1969.8	(G)1940.2+1940.8+(L)196 0+(NB)1979.8	(G)1950.2+1950.8+(L)197 0+(NB)1989.8
		15MHz	(G)1930.4+1931+(L)1950 +(NB)1969.8	(G)1940.2+1940.8+(L)196 0+(NB)1979.8	(G)1950.2+1950.8+(L)197 0+(NB)1989.8
		20MHz	(G)1930.4+1931+(L)1950 +(NB)1969.8	(G)1940.2+1940.8+(L)196 0+(NB)1979.8	(G)1950.2+1950.8+(L)197 0+(NB)1989.8

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT+GSM+LT E-MIMO-MC-3	1NB+3 G+2L	1.4MHz	(G)1930.4+1931+1931.6+ (L)1949.3+1950.7+(NB)19 69.8	(G)1940.2+1940.8+1941.4 +(L)1959.3+1960.7+(NB)1 979.8	(G)1950.2+1950.8+1951.4 +(L)1969.3+1970.7+(NB)1 989.8
		3MHz	(G)1930.4+1931+1931.6+ (L)1948.5+1951.5+(NB)19 69.8	(G)1940.2+1940.8+1941.4 +(L)1958.5+1961.5+(NB)1 979.8	(G)1950.2+1950.8+1951.4 +(L)1968.5+1971.5+(NB)1 989.8
		5MHz	(G)1930.4+1931+1931.6+ (L)1947.5+1952.5+(NB)19 69.8	(G)1940.2+1940.8+1941.4 +(L)1957.5+1962.5+(NB)1 979.8	(G)1950.2+1950.8+1951.4 +(L)1967.5+1972.5+(NB)1 989.8
		10MHz	(G)1930.4+1931+1931.6+ (L)1945+1955+(NB)1969. 8	(G)1940.2+1940.8+1941.4 +(L)1955+1965+(NB)1979 .8	(G)1950.2+1950.8+1951.4 +(L)1965+1975+(NB)1989 .8
		15MHz	(G)1930.4+1931+1931.6+ (L)1942.5+1957.5+(NB)19 69.8	(G)1940.2+1940.8+1941.4 +(L)1952.5+1967.5+(NB)1 979.8	(G)1950.2+1950.8+1951.4 +(L)1962.5+1977.5+(NB)1 989.8
		20MHz	(G)1930.4+1931+1931.6+ (L)1940+1960+(NB)1969. 8	(G)1940.2+1940.8+1941.4 +(L)1950+1970+(NB)1979 .8	(G)1950.2+1950.8+1951.4 +(L)1960+1980+(NB)1989 .8
NB-IoT+GSM+LT E-MIMO-MC-1-B E	1NB+1 G+1L	1.4MHz	(NB)1930.3+(G)1932+(L)1 932.9	N/A	(L)1987.3+(G)1988.2+(NB)1989.8
		3MHz	(NB)1930.3+(G)1932+(L)1 933.7	N/A	(L)1986.5+(G)1988.2+(NB)1989.8
		5MHz	(NB)1930.3+(G)1932+(L)1 934.7	N/A	(L)1985.5+(G)1988.2+(NB)1989.8
		10MHz	(NB)1930.3+(G)1932+(L)1 937.2	N/A	(L)1983+(G)1988.2+(NB)1 989.8
		15MHz	(NB)1930.3+(G)1932+(L)1 939.7	N/A	(L)1980.5+(G)1988.2+(NB)1989.8
		20MHz	(NB)1930.3+(G)1932+(L)1 942.2	N/A	(L)1978+(G)1988.2+(NB)1 989.8
NB-IoT+GSM+LT E-MIMO-MC-2-B E	1NB+2 G+1L	1.4MHz	(NB)1930.3+(G)1932+193 3.6+(L)1933.8	N/A	(L)1986.4+(G)1986.6+198 8.2+(NB)1989.8
		3MHz	(NB)1930.3+(G)1932+193 3.6+(L)1933.8	N/A	(L)1986.4+(G)1986.6+198 8.2+(NB)1989.8
		5MHz	(NB)1930.3+(G)1932+193 3.6+(L)1933.8	N/A	(L)1986.4+(G)1986.6+198 8.2+(NB)1989.8
		10MHz	(NB)1930.3+(G)1932+193 3.6+(L)1933.8	N/A	(L)1986.4+(G)1986.6+198 8.2+(NB)1989.8
		15MHz	(NB)1930.3+(G)1932+193 3.6+(L)1933.8	N/A	(L)1986.4+(G)1986.6+198 8.2+(NB)1989.8
		20MHz	(NB)1930.3+(G)1932+193 3.6+(L)1933.8	N/A	(L)1986.4+(G)1986.6+198 8.2+(NB)1989.8

NB-IoT+WCDMA+LTE

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT+WCDMA+LTE-MIMO-MC-1	1NB+1W+1L	1.4MHz	(NB)1930.3+(W)1940+(L)1949.3	(NB)1952.7+(W)1962.5+(L)1971.8	(NB)1975.2+(W)1985+(L)1994.3
		3MHz	(NB)1930.3+(W)1940+(L)1948.5	(NB)1952.7+(W)1962.5+(L)1971	(NB)1975.2+(W)1985+(L)1993.5
		5MHz	-	(NB)1930.3+(W)1962.4+(L)1985	-
		10MHz	-	(NB)1930.3+(W)1962.4+(L)1985	-
		15MHz	-	(NB)1930.3+(W)1962.4+(L)1985	-
		20MHz	-	(NB)1930.3+(W)1962.4+(L)1985	-
NB-IoT+WCDMA+LTE-MIMO-MC-2	1NB+2W+1L	1.4MHz	(NB)1930.3+(W)1935+1940+(L)1949.3	(NB)1952.7+(W)1979.8+1962.4+(L)1971.8	(NB)1975.2+(W)1980+1985+(L)1994.3
		3MHz	(NB)1930.3+(W)1935+1940+(L)1948.5	(NB)1952.7+(W)1979.8+1962.4+(L)1971	(NB)1975.2+(W)1980+1985+(L)1993.5
		5MHz	-	(NB)1930.3+(W)1955+1960+(L)1987.5	-
		10MHz	-	(NB)1930.3+(W)1955+1960+(L)1985	-
		15MHz	-	(NB)1930.3+(W)1955+1960+(L)1982.5	-
		20MHz	-	(NB)1930.3+(W)1955+1960+(L)1980	-
NB-IoT+WCDMA+LTE-MIMO-MC-3	1NB+2W+3L	1.4MHz	(NB)1930.3+(W)1935+1940+(L)1943.2+1944.6+1949.3	(NB)1952.7+(W)1957.4+1962.4+(L)1965.7+1967.1+1971.8	(NB)1975.2+(W)1980+1988.2+1989.6+1994.3
		3MHz	(NB)1930.3+(W)1933+1938+(L)1942.5+1945.5+1948.5	(NB)1952.7+(W)1955.4+1960.4+(L)1965+1968+1971	(NB)1975.2+(W)1978+1983+(L)1987.5+1990.5+1993.5
		5MHz	-	(NB)1930.3+(W)1957.4+1962.4+(L)1982.5+1987.5+1992.5	-
		10MHz	-	(NB)1930.3+(W)1957.4+1962.4+(L)1970+1980+1990	-
		15MHz	-	(NB)1930.3+(W)1933+1938+(L)1957.5+1972.5+1987.5	-

Configuration	Carrier	LTE Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NB-IoT+WCDMA +LTE-MIMO-MC-4	1NB+3 W+2L	20MHz	-	(NB)1930.3+(W)1933+1938+1943+(L)1965+1985	-
NB-IoT+WCDMA +LTE-MIMO-MC-1-BE	1NB+1 W+1L	1.4MHz	(NB)1930.3 + (L)1931.2 + (W)1934.4	N/A	(W)1990.8 + (L)1993.9 + (NB)1994.8
		3MHz	(NB)1930.3 + (L)1932 + (W)1936	N/A	(W)1989.2 + (L)1993.1 + (NB)1994.8
		5MHz	(NB)1930.3 + (W)1933 + (L)1938	N/A	(L)1987.1 + (W)1992.2 + (NB)1994.8
		10MHz	(NB)1930.3 + (W)1933 + (L)1940.5	N/A	(L)1984.6 + (W)1992.2 + (NB)1994.8
		15MHz	(NB)1930.3 + (W)1933 + (L)1943	N/A	(L)1982.1 + (W)1992.2 + (NB)1994.8
		20MHz	(NB)1930.3 + (W)1933 + (L)1945.5	N/A	(L)1979.6 + (W)1992.2 + (NB)1994.8
NB-IoT+WCDMA +LTE-MIMO-MC-2-BE	1NB+2 W+1L	1.4MHz	(NB)1930.3 + (W)1933 + 1938 + (L)1950.5	N/A	(W)1985.8 + 1990.8 + (L)1993.9 + (NB)1994.8
		3MHz	(NB)1930.3 + (W)1933 + 1938 + (L)1950.5	N/A	(W)1984.2 + 1989.2 + (L)1993.1 + (NB)1994.8
		5MHz	(NB)1930.3 + (W)1933 + 1938 + (L)1950.5	N/A	(L)1982.2 + (W)1987.2 + 1992.2 + (NB)1994.8
		10MHz	(NB)1930.3 + (W)1933 + 1938 + (L)1950.5	N/A	(L)1979.7 + (W)1987.2 + 1992.2 + (NB)1994.8
		15MHz	(NB)1930.3 + (W)1933 + 1938 + (L)1950.5	N/A	(L)1977.2 + (W)1987.2 + 1992.2 + (NB)1994.8
		20MHz	(NB)1930.3 + (W)1933 + 1938 + (L)1950.5	N/A	(L)1974.7 + (W)1987.2 + 1992.2 + (NB)1994.8

4. Reference Documents

4.1. Reference Documents for testing


The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONSSERVICES	10-1-17 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-17 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz	2014
ANSI 63.26	IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
TIA 102.CAAA-E	Project 25 Digital C4FM/CQPSK Transceiver Measurement Methods	2016
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03
KDB 662911 D01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band	v02r01
RSS-GEN Issue 4	General Requirements for Compliance of Radio Apparatus	2014
RSS 133	2 GHz Personal Communications Services	Issue 6 2018 amendment

Note: RSS 133 Issue 6 2018 amendment is not in the scope of ISO 17025 accreditation by NVLAP.


5. TEST SETUP

Test Setup, Conducted Measurement:

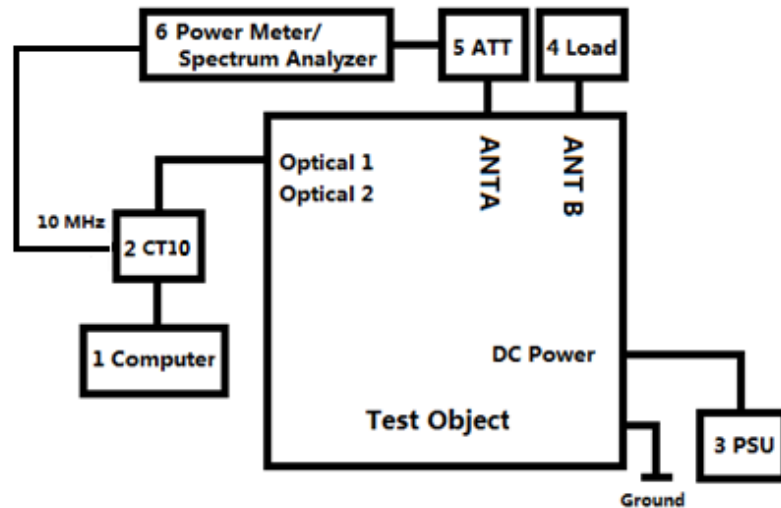

No.	Auxiliary Equipment	Model Type	Version
1	Computer	HP EliteBook 8540w	-
2	CT10	LPC 102 487/1	R1C
3	Power supply unit	PCR2000M	-
4	Load	TF150	-
5	40dB Attenuator	Aeroflex / Weinschel	-

Test Setup, Radiated Measurement:

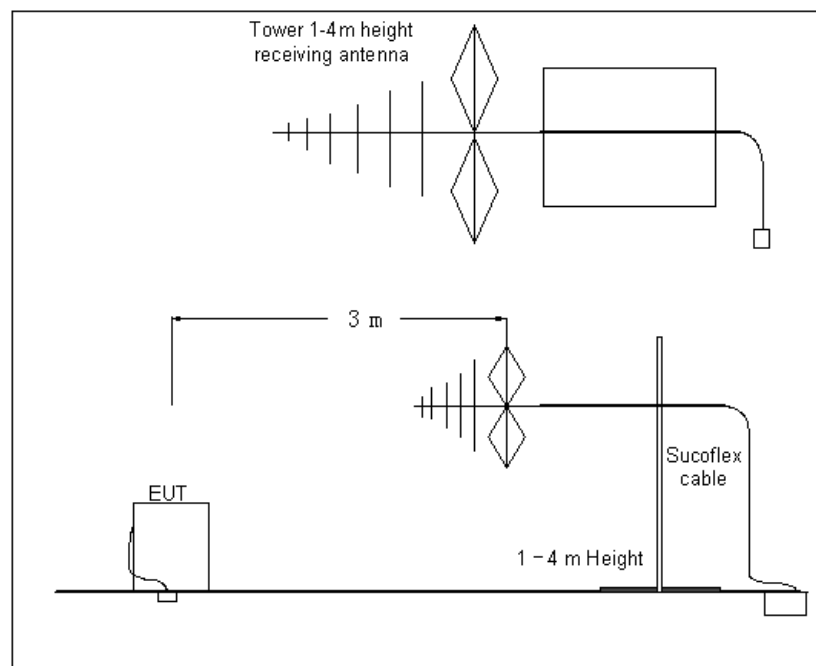

6. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber(10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ± 3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

7. SUMMARY OF TEST RESULTS

Items	Test Name	Clause in FCC rules	Clause in ISSED rules	Verdict
1	Maximum Output Power and Peak-to-Average Power Ratio	24.232(a),(d), 2.1046	RSS-133 6.4	Pass
2	Equivalent Isotropically Radiated Power (EIRP)	-	-	N/A ¹
3	Occupied Bandwidth	24.238(b), 2.1049(h)	RSS-133 6.6	Pass
4	Spurious Emissions at Band Edge	24.238(b), 2.1051	RSS-133 6.5	Pass
5	Conducted Spurious Emission	24.238(a), 2.1051	RSS-133 6.5	Pass
6	Radiated Spurious Emission	24.238(a), 2.1053	RSS-133 6.5	Pass
7	Frequency Stability	24.235, 2.1055	RSS-133 6.3	Pass
8	Receiver Spurious Emission	-	-	N/A

N/A¹ - Not Applicable, due to no integrated antenna

N/A – Not Applicable

8. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE
1	AC Power Supply	PCR2000M	PJ000583	Kikusui	2019-02-24
2	Load	TF150	11081907	Shanghai Huaxiang	-
3	40dB Attenuator	66-40-33	CD4019	Aeroflex / Weinschel	-
4	40dB Attenuator	TSG150R-4-40N11	1511040001	Nanjing Jiexi Technologies	-
5	Spectrum Analyzer	N9030	MY54490502	Keysight	2018-11-15
6	Power Sensor	NRP-Z91	103104	Rohde & Schwarz	2019-01-18
7	Power Sensor	NRP-Z21	102432	Rohde & Schwarz	2018-08-04
8	Power Meter	NRP2	105423-GL	Rohde & Schwarz	2018-08-15
9	EMI Antenna	3115	00167250	ETS-LINDGREN	2020-05-21
10	EMI Antenna	3116	2661	ETS-LINDGREN	2020-07-27
11	EMI Antenna	VULB 9163	9163-514	SCHWARZBECK	2021-01-03
12	Test Receiver	ESU26	100376	Rohde & Schwarz	2018-11-27
13	Climate Chamber	GPS-4	0010-003512	ESPEC	2018-05-23

9. MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Discipline	Measurement Uncertainty
Conducted Maximum Peak Output Power	0.5dB
Occupied Bandwidth	1.1Hz
Conducted Spurious Emissions	2.3dB
Band Edge	2.3dB
Radiated Spurious Emissions	5.4dB
Frequency Stability	$<\pm 1 \times 10^{-7}$

ANNEX A: MEASUREMENT RESULTS

A.1 Maximum Output Power and Peak-to-Average Power Ratio

A.1.1 Reference

FCC CFR 47 Part 2, Clause 2.1046

FCC CFR 47 Part 24, Clause 24.232 (a) (d)

RSS-133, Clause 6.4

A.1.2 Method of Measurements

During the process of testing, the EUT was configured to transmit on maximum power and proper modulation. In case of the EUT was configured to MIMO mode, since the EUT transmits on all antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at all antennas were tested and the total output power were then summed mathematically in linear power units according to FCC KDB 662911 D01.

A peak to average ratio measurement is performed at the conducted ports of the EUT for single carrier for single RAT mode. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) was used and 0.1% probability value recorded.

A.1.3 Limit

Output Power:

(EIRP) 1640 W or 62.15 dBm for emission bandwidth $\leq$ 1MHz

1640 W/MHz or 62.15 dBm/MHz for emission bandwidth $>$ 1MHz

Peak to Average Ratio: 13 dB

A.1.4 Measurement result

Configuration GSM-1C

Maximum Output Power 43.01dBm per port

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK	42.95	-	0.23	43.01	-	0.23	42.93	-	0.23
	8PSK	42.98	-	3.45	43.03	-	3.44	42.86	-	0.43
	AQPSK	43.10	-	3.57	43.05	-	3.56	42.95	-	3.58

Configuration GSM-2C

Maximum Output Power 46.02dBm per port

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK	46.10	-	-	46.00	-	-	45.99	-	-
	8PSK	45.17	-	-	45.10	-	-	45.08	-	-
	AQPSK	45.51	-	-	45.44	-	-	45.41	-	-

Configuration GSM-4C

Maximum Output Power 49.03dBm per port

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK	47.69	-	-	47.83	-	-	47.67	-	-
	8PSK	45.63	-	-	45.84	-	-	45.68	-	-
	AQPSK	46.68	-	-	46.19	-	-	46.04	-	-

Configuration WCDMA-1C

Maximum Output Power 49.03dBm per port

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK	48.92	43.79	6.33	49.05	44.26	6.27	48.73	44.04	6.32

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	16QAM	48.53	43.85	6.29	48.72	44.20	6.23	48.40	43.99	6.28

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	64QAM	48.36	43.91	6.29	48.67	44.26	6.24	48.53	44.01	6.29

Configuration WCDMA-2C

Maximum Output Power 49.03dBm per port

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	QPSK	-	-	-	48.27	-	-	-	-	-

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	16QAM	-	-	-	47.85	-	-	-	-	-

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	64QAM	-	-	-	48.06	-	-	-	-	-

Configuration WCDMA-6C

Maximum Output Power 49.03dBm per port

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	QPSK	-	-	-	48.39	-	-	-	-	-

Antenna	Modulation/	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	16QAM	-	-	-	48.24	-	-	-	-	-

Antenna	Modulation	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
B	64QAM	-	-	-	48.19	-	-	-	-	-

Configuration LTE-MIMO-1C

Maximum Output Power 43.01dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	QPSK/1.4	43.08	42.51	8.32	43.07	42.51	8.33	42.98	42.30	8.30
B		43.20	43.06	8.26	43.14	43.00	8.25	43.11	43.01	8.42
C		43.01	41.74	8.33	42.90	41.60	8.33	42.87	41.56	8.38
D		43.18	41.90	8.26	43.13	41.89	8.24	43.11	41.48	8.26
Total		49.14	48.36	-	49.08	48.30	-	49.04	48.15	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	16QAM/1.4	-	-	-	42.99	42.55	8.30	-	-	-
B		-	-	-	43.13	43.01	8.11	-	-	-
C		-	-	-	42.90	41.65	8.31	-	-	-
D		-	-	-	43.12	41.95	8.11	-	-	-
Total		-	-	-	49.06	48.34	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	64QAM/1.4	-	-	-	42.95	42.40	8.27	-	-	-
B		-	-	-	43.06	43.02	8.25	-	-	-
C		-	-	-	42.92	41.48	8.28	-	-	-
D		-	-	-	43.01	41.65	8.25	-	-	-
Total		-	-	-	49.01	48.20	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	256QAM /1.4	-	-	-	43.02	42.42	8.32	-	-	-
B		-	-	-	43.06	43.00	8.10	-	-	-
C		-	-	-	42.92	41.53	8.33	-	-	-
D		-	-	-	43.07	41.57	8.09	-	-	-
Total		-	-	-	49.04	48.19	-	-	-	-

Maximum Output Power 43.01dBm per port

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	QPSK/3.0	43.13	38.06	8.36	43.05	37.96	8.31	42.97	37.95	8.39
B		43.13	38.06	8.18	43.13	38.25	8.22	43.11	38.00	8.20
C		43.03	38.30	8.36	42.91	38.24	8.37	42.72	38.16	8.39
D		43.14	38.21	8.19	43.07	38.21	8.19	42.93	38.15	8.20
Total		49.13	44.18	-	49.06	44.19	-	48.96	44.08	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	16QAM/3.0	-	-	-	43.05	37.94	8.34	-	-	-
B		-	-	-	43.15	38.42	8.30	-	-	-
C		-	-	-	42.90	38.15	8.34	-	-	-
D		-	-	-	43.09	38.19	8.29	-	-	-
Total		-	-	-	49.07	44.20	-	-	-	-



Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	64QAM/3.0	-	-	-	43.05	38.00	8.25	-	-	-
B		-	-	-	43.13	38.33	8.38	-	-	-
C		-	-	-	42.84	38.13	8.26	-	-	-
D		-	-	-	43.03	38.15	8.41	-	-	-
Total		-	-	-	49.03	44.17	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	256QAM /3.0	-	-	-	43.06	37.90	8.32	-	-	-
B		-	-	-	43.13	38.30	8.30	-	-	-
C		-	-	-	42.83	38.16	8.32	-	-	-
D		-	-	-	43.01	38.17	8.30	-	-	-
Total		-	-	-	49.03	44.16	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/5.0	48.78	41.60	7.29	49.13	41.83	7.26	48.63	41.35	7.29
B		48.91	41.95	7.31	49.15	42.05	7.30	48.79	41.80	7.31
C		48.73	41.82	7.29	48.92	41.89	7.26	48.39	41.41	7.29
D		48.84	41.75	7.30	49.01	41.92	7.29	48.51	41.42	7.32
Total		54.84	47.80	-	55.07	47.94	-	54.60	47.52	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/5.0	-	-	-	49.08	41.84	7.27	-	-	-
B		-	-	-	49.10	42.21	7.28	-	-	-
C		-	-	-	48.93	42.05	7.26	-	-	-
D		-	-	-	49.02	42.10	7.28	-	-	-
Total		-	-	-	55.05	48.07	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/5.0	-	-	-	49.06	41.78	7.27	-	-	-
B		-	-	-	49.08	42.07	7.29	-	-	-
C		-	-	-	48.93	42.02	7.26	-	-	-
D		-	-	-	49.01	42.05	7.29	-	-	-
Total		-	-	-	55.04	48.00	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /5.0	-	-	-	49.05	41.75	7.28	-	-	-
B		-	-	-	49.09	42.05	7.29	-	-	-
C		-	-	-	48.89	41.92	7.29	-	-	-
D		-	-	-	48.97	41.94	7.29	-	-	-
Total		-	-	-	55.02	47.94	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 10.0	48.87	38.86	7.35	49.07	38.95	7.27	48.79	38.62	7.35
B		49.02	39.03	7.36	49.13	39.08	7.30	48.89	38.94	7.34
C		48.83	39.01	7.34	48.93	39.01	7.26	48.54	38.59	7.34
D		48.89	39.02	7.35	49.00	39.01	7.28	48.66	38.61	7.34
Total		54.92	45.00	-	55.05	45.03	-	54.74	44.71	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	16QAM/ 10.0	-	-	-	49.05	38.95	7.26	-	-	-
B		-	-	-	49.11	39.07	7.28	-	-	-
C		-	-	-	48.86	39.00	7.26	-	-	-
D		-	-	-	48.98	39.02	7.27	-	-	-
Total		-	-	-	55.02	45.03	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 10.0	-	-	-	49.06	38.94	7.27	-	-	-
B		-	-	-	49.14	39.10	7.28	-	-	-
C		-	-	-	48.89	39.01	7.27	-	-	-
D		-	-	-	49.00	39.03	7.27	-	-	-
Total		-	-	-	55.04	45.04	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /10.0	-	-	-	49.06	38.95	7.28	-	-	-
B		-	-	-	49.12	39.04	7.28	-	-	-
C		-	-	-	48.86	38.98	7.27	-	-	-
D		-	-	-	48.95	39.01	7.27	-	-	-
Total		-	-	-	55.02	45.02	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 15.0	48.96	37.14	7.41	49.09	37.23	7.27	48.85	36.92	7.39
B		49.08	37.30	7.43	49.15	37.30	7.29	48.95	37.07	7.38
C		48.87	37.25	7.39	48.89	37.21	7.27	48.60	36.94	7.39
D		48.93	37.24	7.41	48.98	37.23	7.29	48.70	36.96	7.41
Total		54.98	43.25	-	55.05	43.26	-	54.80	42.99	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	16QAM/ 15.0	-	-	-	49.11	37.23	7.27	-	-	-
B		-	-	-	49.16	37.29	7.29	-	-	-
C		-	-	-	48.92	37.30	7.27	-	-	-
D		-	-	-	49.00	37.34	7.29	-	-	-
Total		-	-	-	55.07	43.31	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 15.0	-	-	-	49.12	37.25	7.29	-	-	-
B		-	-	-	49.18	37.33	7.29	-	-	-
C		-	-	-	48.85	37.27	7.28	-	-	-
D		-	-	-	48.94	37.32	7.28	-	-	-
Total		-	-	-	55.05	43.31	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /15.0	-	-	-	49.10	37.25	7.29	-	-	-
B		-	-	-	49.18	37.32	7.30	-	-	-
C		-	-	-	48.87	37.29	7.28	-	-	-
D		-	-	-	48.96	37.34	7.29	-	-	-
Total		-	-	-	55.05	43.32	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 20.0	49.05	36.35	7.49	49.10	36.42	7.28	48.89	36.12	7.41
B		49.16	36.08	7.49	49.17	36.10	7.30	49.01	35.87	7.39
C		48.89	36.04	7.46	48.88	35.97	7.28	48.63	35.61	7.42
D		48.96	36.10	7.48	48.98	36.00	7.28	48.77	35.69	7.42
Total		55.04	42.16	-	55.05	42.15	-	54.85	41.84	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/ 20.0	-	-	-	49.12	36.11	7.27	-	-	-
B		-	-	-	49.17	36.42	7.30	-	-	-
C		-	-	-	48.92	36.05	7.28	-	-	-
D		-	-	-	49.01	36.23	7.28	-	-	-
Total		-	-	-	55.08	42.23	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 20.0	-	-	-	49.12	36.12	7.28	-	-	-
B		-	-	-	49.18	36.41	7.30	-	-	-
C		-	-	-	48.84	35.97	7.29	-	-	-
D		-	-	-	48.95	36.01	7.28	-	-	-
Total		-	-	-	55.05	42.15	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
	A	256QAM /20.0	-	-	-	49.11	36.11	7.28	-	-
B	-		-	-	49.18	36.42	7.30	-	-	-
C	-		-	-	48.86	36.06	7.29	-	-	-
D	-		-	-	48.99	36.16	7.29	-	-	-
Total		-	-	-	55.06	42.21	-	-	-	-

Configuration LTE-MIMO-2C

Maximum Output Power 46.02dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	QPSK/1.4	46.08	-	-	46.11	-	-	46.06	-	-
B		46.21	-	-	46.21	-	-	46.17	-	-
C		45.96	-	-	45.86	-	-	45.79	-	-
D		46.08	-	-	46.03	-	-	45.98	-	-
Total		52.10	-	-	52.07	-	-	52.02	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	16QAM/ 1.4	-	-	-	46.14	-	-	-	-	-
B		-	-	-	46.20	-	-	-	-	-
C		-	-	-	45.81	-	-	-	-	-
D		-	-	-	46.00	-	-	-	-	-
Total		-	-	-	52.06	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	64QAM/ 1.4	-	-	-	46.11	-	-	-	-	-
B		-	-	-	46.20	-	-	-	-	-
C		-	-	-	45.78	-	-	-	-	-
D		-	-	-	45.97	-	-	-	-	-
Total		-	-	-	52.04	-	-	-	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	256QAM /1.4	-	-	-	46.14	-	-	-	-	-
B		-	-	-	46.21	-	-	-	-	-
C		-	-	-	45.77	-	-	-	-	-
D		-	-	-	45.96	-	-	-	-	-
Total		-	-	-	52.04	-	-	-	-	-

Maximum Output Power 46.02dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	QPSK/3.0	46.02	-	-	45.93	-	-	45.91	-	-
B		46.15	-	-	46.06	-	-	46.05	-	-
C		45.85	-	-	45.79	-	-	45.74	-	-
D		45.98	-	-	45.97	-	-	45.96	-	-
Total		52.02	-	-	51.96	-	-	51.94	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	16QAM/3.0	-	-	-	45.95	-	-	-	-	-
B		-	-	-	46.11	-	-	-	-	-
C		-	-	-	45.83	-	-	-	-	-
D		-	-	-	46.03	-	-	-	-	-
Total		-	-	-	52.00	-	-	-	-	-



Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR(	POWER	POWER	PAR	POWER	POWER	PAR(
		(dBm)	(dBm/MHz)	db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	db)
A	64QAM/3.0	-	-	-	45.98	-	-	-	-	-
B		-	-	-	46.12	-	-	-	-	-
C		-	-	-	45.81	-	-	-	-	-
D		-	-	-	46.02	-	-	-	-	-
Total			-	-	52.00	-	-	-	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR(	POWER	POWER	PAR	POWER	POWER	PAR(
		(dBm)	(dBm/MHz)	db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	db)
A	256QAM /3.0	-	-	-	45.95	-	-	-	-	-
B		-	-	-	46.09	-	-	-	-	-
C		-	-	-	45.80	-	-	-	-	-
D		-	-	-	45.98	-	-	-	-	-
Total			-	-	51.98	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	QPSK/5.0	-	-	-	48.36	-	-	-	-	-
B		-	-	-	48.53	-	-	-	-	-
C		-	-	-	48.17	-	-	-	-	-
D		-	-	-	48.31	-	-	-	-	-
Total		-	-	-	54.37	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
	A	16QAM/5.0	-	-	-	48.40	-	-	-	-
B	-		-	-	48.56	-	-	-	-	-
C	-		-	-	48.20	-	-	-	-	-
D	-		-	-	48.31	-	-	-	-	-
Total		-	-	-	54.39	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/5.0	-	-	-	48.35	-	-	-	-	-
B		-	-	-	48.54	-	-	-	-	-
C		-	-	-	48.24	-	-	-	-	-
D		-	-	-	48.37	-	-	-	-	-
Total		-	-	-	54.40	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /5.0	-	-	-	48.36	-	-	-	-	-
B		-	-	-	48.35	-	-	-	-	-
C		-	-	-	48.25	-	-	-	-	-
D		-	-	-	48.37	-	-	-	-	-
Total		-	-	-	54.35	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 10.0	-	-	-	48.44	-	-	-	-	-
B		-	-	-	48.44	-	-	-	-	-
C		-	-	-	48.36	-	-	-	-	-
D		-	-	-	48.47	-	-	-	-	-
Total		-	-	-	54.45	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/ 10.0	-	-	-	48.47	-	-	-	-	-
B		-	-	-	48.44	-	-	-	-	-
C		-	-	-	48.37	-	-	-	-	-
D		-	-	-	48.42	-	-	-	-	-
Total		-	-	-	54.45	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 10.0	-	-	-	48.47	-	-	-	-	-
B		-	-	-	48.34	-	-	-	-	-
C		-	-	-	48.33	-	-	-	-	-
D		-	-	-	48.43	-	-	-	-	-
Total		-	-	-	54.41	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /10.0	-	-	-	48.43	-	-	-	-	-
B		-	-	-	48.40	-	-	-	-	-
C		-	-	-	48.33	-	-	-	-	-
D		-	-	-	48.41	-	-	-	-	-
Total		-	-	-	54.41	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 15.0	-	-	-	48.55	-	-	-	-	-
B		-	-	-	48.38	-	-	-	-	-
C		-	-	-	48.41	-	-	-	-	-
D		-	-	-	48.48	-	-	-	-	-
Total		-	-	-	54.48	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/ 15.0	-	-	-	48.43	-	-	-	-	-
B		-	-	-	48.75	-	-	-	-	-
C		-	-	-	48.44	-	-	-	-	-
D		-	-	-	48.54	-	-	-	-	-
Total		-	-	-	54.56	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 15.0	-	-	-	48.65	-	-	-	-	-
B		-	-	-	48.33	-	-	-	-	-
C		-	-	-	48.43	-	-	-	-	-
D		-	-	-	48.52	-	-	-	-	-
Total		-	-	-	54.50	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /15.0	-	-	-	48.60	-	-	-	-	-
B		-	-	-	48.23	-	-	-	-	-
C		-	-	-	48.34	-	-	-	-	-
D		-	-	-	48.43	-	-	-	-	-
Total		-	-	-	54.42	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 20.0	-	-	-	48.68	-	-	-	-	-
B		-	-	-	48.23	-	-	-	-	-
C		-	-	-	48.37	-	-	-	-	-
D		-	-	-	48.48	-	-	-	-	-
Total		-	-	-	54.46	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/ 20.0	-	-	-	48.68	-	-	-	-	-
B		-	-	-	48.31	-	-	-	-	-
C		-	-	-	48.38	-	-	-	-	-
D		-	-	-	48.48	-	-	-	-	-
Total		-	-	-	54.48	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 20.0	-	-	-	48.66	-	-	-	-	-
B		-	-	-	48.34	-	-	-	-	-
C		-	-	-	48.36	-	-	-	-	-
D		-	-	-	48.47	-	-	-	-	-
Total		-	-	-	54.48	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
	A	256QAM /20.0	-	-	-	48.66	-	-	-	-
B	-		-	-	48.31	-	-	-	-	-
C	-		-	-	48.35	-	-	-	-	-
D	-		-	-	48.47	-	-	-	-	-
Total		-	-	-	54.47	-	-	-	-	-

Configuration LTE-MIMO-6C

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	QPSK/1.4	48.40	-	-	48.53	-	-	48.51	-	-
B		47.96	-	-	48.18	-	-	48.18	-	-
C		48.49	-	-	48.45	-	-	48.11	-	-
D		48.56	-	-	48.56	-	-	48.27	-	-
Total		54.38	-	-	54.45	-	-	54.29	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	16QAM/ 1.4	-	-	-	48.50	-	-	-	-	-
B		-	-	-	48.20	-	-	-	-	-
C		-	-	-	48.43	-	-	-	-	-
D		-	-	-	48.55	-	-	-	-	-
Total		-	-	-	54.44	-	-	-	-	-



Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	64QAM/ 1.4	-	-	-	48.57	-	-	-	-	-
B		-	-	-	48.22	-	-	-	-	-
C		-	-	-	48.45	-	-	-	-	-
D		-	-	-	48.57	-	-	-	-	-
Total		-	-	-	54.47	-	-	-	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR(	POWER	POWER	PAR	POWER	POWER	PAR(
		(dBm)	(dBm/MHz)	db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	db)
A	256QAM /1.4	-	-	-	48.50	-	-	-	-	-
B		-	-	-	48.18	-	-	-	-	-
C		-	-	-	48.43	-	-	-	-	-
D		-	-	-	48.56	-	-	-	-	-
Total		-	-	-	54.44	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR(	POWER	POWER	PAR	POWER	POWER	PAR(
		(dBm)	(dBm/MHz)	db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	db)
A	QPSK/3.0	48.65	-	-	48.74	-	-	48.62	-	-
B		48.22	-	-	48.37	-	-	48.26	-	-
C		48.82	-	-	48.84	-	-	48.53	-	-
D		48.90	-	-	48.94	-	-	48.67	-	-
Total		54.68	-	-	54.75	-	-	54.54	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	16QAM/3.0	-	-	-	48.67	-	-	-	-	-
B		-	-	-	48.33	-	-	-	-	-
C		-	-	-	48.83	-	-	-	-	-
D		-	-	-	48.92	-	-	-	-	-
Total		-	-	-	54.71	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
	POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)	
A	64QAM/3.0	-	-	-	48.68	-	-	-	-	-
B		-	-	-	48.34	-	-	-	-	-
C		-	-	-	48.81	-	-	-	-	-
D		-	-	-	48.91	-	-	-	-	-
Total		-	-	-	54.71	-	-	-	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
	Bandwidth (MHz)	Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR(db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR(db)
A	256QAM /3.0	-	-	-	48.69	-	-	-	-	-
B		-	-	-	48.34	-	-	-	-	-
C		-	-	-	48.81	-	-	-	-	-
D		-	-	-	48.89	-	-	-	-	-
Total		-	-	-	54.70	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/5.0	-	-	-	48.37	-	-	-	-	-
B		-	-	-	48.00	-	-	-	-	-
C		-	-	-	48.11	-	-	-	-	-
D		-	-	-	48.22	-	-	-	-	-
Total		-	-	-	54.20	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/5.0	-	-	-	48.41	-	-	-	-	-
B		-	-	-	48.04	-	-	-	-	-
C		-	-	-	48.07	-	-	-	-	-
D		-	-	-	48.91	-	-	-	-	-
Total		-	-	-	54.39	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/5.0	-	-	-	48.42	-	-	-	-	-
B		-	-	-	48.05	-	-	-	-	-
C		-	-	-	48.16	-	-	-	-	-
D		-	-	-	48.26	-	-	-	-	-
Total		-	-	-	54.24	-	-	-	-	-

Antenna	Modulation/ Carrier	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
	Bandwidth	POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
	(MHz)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	256QAM /5.0	-	-	-	48.32	-	-	-	-	-
B		-	-	-	47.97	-	-	-	-	-
C		-	-	-	48.16	-	-	-	-	-
D		-	-	-	48.26	-	-	-	-	-
Total		-	-	-	54.20	-	-	-	-	-

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 10.0	-	-	-	48.63	-	-	-	-	-
B		-	-	-	48.27	-	-	-	-	-
C		-	-	-	48.44	-	-	-	-	-
D		-	-	-	48.54	-	-	-	-	-
Total		-	-	-	54.49	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
	A	16QAM/ 10.0	-	-	-	48.62	-	-	-	-
B	-		-	-	48.28	-	-	-	-	-
C	-		-	-	48.44	-	-	-	-	-
D	-		-	-	48.54	-	-	-	-	-
Total		-	-	-	54.49	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 10.0	-	-	-	48.63	-	-	-	-	-
B		-	-	-	48.28	-	-	-	-	-
C		-	-	-	48.43	-	-	-	-	-
D		-	-	-	48.54	-	-	-	-	-
Total		-	-	-	54.49	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	256QAM /10.0	-	-	-	48.63	-	-	-	-	-
B		-	-	-	48.27	-	-	-	-	-
C		-	-	-	48.41	-	-	-	-	-
D		-	-	-	48.52	-	-	-	-	-
Total		-	-	-	54.48	-	-	-	-	-

Configuration LTE-MIMO-4C

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	QPSK/ 15.0	-	-	-	48.64	-	-	-	-	-
B		-	-	-	48.30	-	-	-	-	-
C		-	-	-	48.42	-	-	-	-	-
D		-	-	-	48.53	-	-	-	-	-
Total		-	-	-	54.49	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	16QAM/ 15.0	-	-	-	48.67	-	-	-	-	-
B		-	-	-	48.31	-	-	-	-	-
C		-	-	-	48.42	-	-	-	-	-
D		-	-	-	48.53	-	-	-	-	-
Total		-	-	-	54.50	-	-	-	-	-



Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 15.0	-	-	-	48.67	-	-	-	-	-
B		-	-	-	48.32	-	-	-	-	-
C		-	-	-	48.43	-	-	-	-	-
D		-	-	-	48.54	-	-	-	-	-
Total		-	-	-	54.51	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	256QAM /15.0	-	-	-	48.68	-	-	-	-	-
B		-	-	-	48.31	-	-	-	-	-
C		-	-	-	48.40	-	-	-	-	-
D		-	-	-	48.51	-	-	-	-	-
Total		-	-	-	54.50	-	-	-	-	-

Configuration LTE-MIMO-3C

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 20.0	-	-	-	48.71	-	-	-	-	-
B		-	-	-	48.37	-	-	-	-	-
C		-	-	-	48.38	-	-	-	-	-
D		-	-	-	48.50	-	-	-	-	-
Total		-	-	-	54.51	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	16QAM/ 20.0	-	-	-	48.73	-	-	-	-	-
B		-	-	-	48.37	-	-	-	-	-
C		-	-	-	48.39	-	-	-	-	-
D		-	-	-	48.51	-	-	-	-	-
Total		-	-	-	54.52	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	64QAM/ 20.0	-	-	-	48.65	-	-	-	-	-
B		-	-	-	48.31	-	-	-	-	-
C		-	-	-	48.38	-	-	-	-	-
D		-	-	-	48.50	-	-	-	-	-
Total		-	-	-	54.48	-	-	-	-	-

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
		(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
A	256QAM /20.0	-	-	-	48.66	-	-	-	-	-
B		-	-	-	48.31	-	-	-	-	-
C		-	-	-	48.39	-	-	-	-	-
D		-	-	-	48.50	-	-	-	-	-
Total		-	-	-	54.49	-	-	-	-	-

Configuration NB-IoT-InBand-1C

Maximum Output Power 49.03dBm per port

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/5.0	48.38	41.78	7.28	48.78	41.85	7.27	48.33	41.60	7.29

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/10.0	48.51	38.83	7.35	48.71	38.91	7.29	48.54	38.61	7.34

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/15.0	48.80	37.13	7.43	48.90	37.14	7.28	48.49	36.90	7.37

Antenna	Modulation/ Carrier Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/20.0	48.79	35.89	7.50	48.89	35.89	7.31	48.75	35.70	7.40

Configuration NB-IoT-StandAlone-1C

Maximum Output Power 43.01dBm per port

Antenna	Modulation/ Carrier Bandwidth (KHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
A	QPSK/ 250.0	42.51	-	4.60	42.47	-	4.61	42.34	-	4.59
B	QPSK/ 250.0	42.58	-	4.63	42.65	-	4.62	42.51	-	4.56
Total		45.58	-	-	45.54	-	-	45.47	-	-

Configuration WCDMA+LTE-MIMO-MC-1

Maximum Output Power 49.03dBm per port

1WCDMA QPSK+1LTE QPSK

Antenna	WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 1.4	-	-	-	48.37	-	-	-	-	-
	QPSK/ QPSK 3.0	-	-	-	48.42	-	-	-	-	-
	QPSK/ QPSK 5.0	-	-	-	48.02	-	-	-	-	-
	QPSK/ QPSK 10	-	-	-	48.08	-	-	-	-	-
	QPSK/ QPSK 15	-	-	-	48.13	-	-	-	-	-
	QPSK/ QPSK 20	-	-	-	48.16	-	-	-	-	-

1WCDMA 16QAM+1LTE QPSK

Antenna	WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	16QAM/ QPSK 1.4	-	-	-	48.52	-	-	-	-	-
	16QAM/ QPSK 3.0	-	-	-	48.52	-	-	-	-	-
	16QAM/ QPSK 5.0	-	-	-	48.18	-	-	-	-	-
	16QAM/ QPSK 10	-	-	-	48.20	-	-	-	-	-
	16QAM/ QPSK 15	-	-	-	48.21	-	-	-	-	-
	16QAM/ QPSK 20	-	-	-	48.28	-	-	-	-	-

Configuration WCDMA+LTE-MIMO-MC-3

Maximum Output Power 49.03dBm per port

3WCDMA QPSK+3LTE QPSK

Antenna	WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 1.4	-	-	-	48.19	-	-	-	-	-
	QPSK/ QPSK 3.0	-	-	-	48.23	-	-	-	-	-
	QPSK/ QPSK 5.0	-	-	-	48.26	-	-	-	-	-
	QPSK/ QPSK 10.0	-	-	-	48.32	-	-	-	-	-
	QPSK/ QPSK 15.0	-	-	-	48.36	-	-	-	-	-

3WCDMA 16QAM+3LTE QPSK

Antenna	WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	16QAM/ QPSK 1.4	-	-	-	48.14	-	-	-	-	-
	16QAM/ QPSK 3.0	-	-	-	48.18	-	-	-	-	-
	16QAM/ QPSK 5.0	-	-	-	48.27	-	-	-	-	-
	16QAM/ QPSK 10.0	-	-	-	48.25	-	-	-	-	-
	16QAM/ QPSK 15.0	-	-	-	48.27	-	-	-	-	-

Configuration WCDMA+LTE-MIMO-MC-4

Maximum Output Power 49.03dBm per port

3WCDMA QPSK+2LTE QPSK

Antenna	WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 20.0	-	-	-	48.27	-	-	-	-	-

3WCDMA 16QAM+2LTE QPSK

Antenna	WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	16QAM/ QPSK 20.0	-	-	-	48.28	-	-	-	-	-

Configuration GSM+WCDMA-MC-1 (1GSM+1WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	GSM Mod./ WCDMA Mod.	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK/ QPSK	-	-	-	48.79	-	-	-	-	-
B	GMSK/ 16QAM	-	-	-	48.78	-	-	-	-	-

Configuration GSM+WCDMA-MC-3 (4GSM+2WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	GSM Mod./ WCDMA Mod.	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK/ QPSK	-	-	-	48.79	-	-	-	-	-
B	GMSK/ 16QAM	-	-	-	48.74	-	-	-	-	-

Configuration GSM+LTE-MIMO-MC-1 (1GSM+1LTE)

Maximum Output Power 46.02dBm per port for 1.4MHz and 3.0MHz bandwidth

Maximum Output Power 49.03dBm per port for more than 3.0MHz bandwidth

Antenna	GSM Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK/ QPSK 1.4	46.12	-	-	46.05	-	-	46.10	-	-
	GMSK/ QPSK 3.0	46.09	-	-	46.07	-	-	46.08	-	-
	GMSK/ QPSK 5.0	-	-	-	48.65	-	-	-	-	-
	GMSK/ QPSK 10	-	-	-	48.63	-	-	-	-	-
	GMSK/ QPSK 15	-	-	-	48.62	-	-	-	-	-
	GMSK/ QPSK 20	-	-	-	48.79	-	-	-	-	-

Configuration GSM+LTE-MIMO-MC-2 (2GSM+1LTE)

Maximum Output Power 47.78dBm per port for 1.4MHz and 3.0MHz bandwidth

Maximum Output Power 49.03dBm per port for more than 3.0MHz bandwidth

Antenna	GSM Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK/ QPSK 1.4	47.85	-	-	47.81	-	-	47.83	-	-
	GMSK/ QPSK 3.0	47.89	-	-	47.77	-	-	47.79	-	-
	GMSK/ QPSK 5.0	-	-	-	47.76	-	-	-	-	-
	GMSK/ QPSK 10	-	-	-	48.12	-	-	-	-	-
	GMSK/ QPSK 15	-	-	-	48.40	-	-	-	-	-
	GMSK/ QPSK 20	-	-	-	48.62	-	-	-	-	-

Configuration GSM+LTE-MIMO-MC-3 (4GSM+2LTE)

Maximum Output Power 49.03dBm per port

Antenna	GSM Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	GMSK/ QPSK 1.4	48.34	-	-	48.46	-	-	48.32	-	-
	GMSK/ QPSK 3.0	48.48	-	-	48.56	-	-	48.50	-	-
	GMSK/ QPSK 5.0	-	-	-	47.94	-	-	-	-	-
	GMSK/ QPSK 10	-	-	-	48.50	-	-	-	-	-
	GMSK/ QPSK 15	-	-	-	48.51.	-	-	-	-	-
	GMSK/ QPSK 20	-	-	-	48.84	-	-	-	-	-

Configuration NB-IoT+GSM-MC-1(1NB+1GSM)

Maximum Output Power 46.02dBm per port

Antenna	NBMod./ GSM Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ GMSK	45.90	-	-	45.77	-	-	45.80	-	-

Configuration NB-IoT+GSM-MC-2(1NB+2GSM)

Maximum Output Power 47.78dBm per port

Antenna	NBMod./ GSM Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ GMSK	-	-	-	47.62	-	-	-	-	-

Configuration NB-IoT+GSM-MC-3 (1NB+3GSM)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ GSM Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ GMSK	48.32	-	-	48.54	-	-	48.50	-	-

Configuration NB-IoT+WCDMA-MC-1 (1NB+1WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ WCDMA Mod.	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK	-	-	-	47.76	-	-	-	-	-
	QPSK/ 16QAM	-	-	-	47.72	-	-	-	-	-

Configuration NB-IoT+WCDMA-MC-3(1NB+5WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ WCDMA Mod.	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK	-	-	-	48.02	-	-	-	-	-
	QPSK/ 16QAM	-	-	-	47.99	-	-	-	-	-

Configuration NB-IoT+LTE-MIMO-MC-1 (1NB+1LTE)

Maximum Output Power 46.02dBm per port for 1.4MHz and 3.0MHz bandwidth

Maximum Output Power 49.03dBm per port for more than 3.0MHz bandwidth

Antenna	NBMod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 1.4	45.98	-	-	45.92	-	-	45.91	-	-
	QPSK/ QPSK 3.0	45.94	-	-	45.90	-	-	45.87	-	-
	QPSK/ QPSK 5.0	-	-	-	48.32	-	-	-	-	-
	QPSK/ QPSK 10	-	-	-	48.39	-	-	-	-	-
	QPSK/ QPSK 15	-	-	-	48.33	-	-	-	-	-
	QPSK/ QPSK 20	-	-	-	48.49	-	-	-	-	-

Configuration NB-IoT+LTE-MIMO-MC-3(1NB+5LTE)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 1.4	48.00	-	-	48.05	-	-	47.94	-	-
	QPSK/ QPSK 3.0	47.99	-	-	48.10	-	-	47.93	-	-
	QPSK/ QPSK 5.0	-	-	-	48.37	-	-	-	-	-
	QPSK/ QPSK 10	-	-	-	48.87	-	-	-	-	-

Configuration NB-IoT+LTE-MC-4 (1NB+4LTE)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 15	-	-	-	48.82	-	-	-	-	-

Configuration NB-IoT+LTE-MIMO-MC-5 (1NB+3LTE)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK 20.0	-	-	-	48.76	-	-	-	-	-

Configuration NB-IoT+GSM+WCDMA-MC-1(1NB+1GSM+1WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./	Output Power / Peak to Average Ratio (PAR)								
	GSM Mod/.	Channel position B			Channel position M			Channel position T		
	WCDMA	POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
	Mod	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
B	QPSK/ GMSK/ QPSK	47.92	-	-	48.06	-	-	47.95	-	-

Configuration NB-IoT+GSM+WCDMA-MC-2 (1NB+2GSM +1WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./	Output Power / Peak to Average Ratio (PAR)								
	GSM Mod./	Channel position B			Channel position M			Channel position T		
	WCDMA	POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
	Mod	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
B	QPSK/ GMSK/ QPSK		-	-	48.00	-	-		-	-

Configuration NB-IoT+GSM+WCDMA-MC-3 (1NB+3GSM+2WCDMA)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./	Output Power / Peak to Average Ratio (PAR)								
	GSM Mod./	Channel position B			Channel position M			Channel position T		
	WCDMA	POWER	POWER	PAR	POWER	POWER	PAR	POWER	POWER	PAR
	Mod	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)	(dBm)	(dBm/MHz)	(db)
B	QPSK/ GMSK/ QPSK	47.73	-	-	47.82	-	-	47.97	-	-



Configuration NB-IoT+GSM+LTE-MIMO-MC-1(1NB+1GSM+1LTE)

Maximum Output Power 47.78dBm per port for 1.4MHz and 3.0MHz bandwidth

Maximum Output Power 49.03dBm per port for more than 3.0MHz bandwidth

Antenna	NBMod./ GSM Mod. / LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ GMSK/ QPSK 1.4	47.72	-	-	47.70	-	-	47.68	-	-
	QPSK/ GMSK/ QPSK 3.0	47.73	-	-	47.70	-	-	47.69	-	-
	QPSK/ GMSK/ QPSK 5.0	48.36	-	-	48.43	-	-	48.37	-	-
	QPSK/ GMSK/ QPSK 10.0	48.26	-	-	48.32	-	-	48.26	-	-
	QPSK/ GMSK/ QPSK 15.0	48.59	-	-	48.65	-	-	48.59	-	-
	QPSK/ GMSK/ QPSK 20.0	48.80	-	-	48.83	-	-	48.78	-	-



Configuration NB-IoT+GSM+LTE-MC-3 (1NB+3GSM+2LTE)
Maximum Output Power 49.03dBm per port

Antenna	NBMod./	Output Power / Peak to Average Ratio (PAR)								
	GSM Mod./	Channel position B			Channel position M			Channel position T		
	LTE Mod. Bandwidth (MHz)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ GMSK/ QPSK 1.4	48.09	-	-	48.32	-	-	48.30	-	-
	QPSK/ GMSK/ QPSK 3.0	48.43	-	-	48.56	-	-	48.53	-	-
	QPSK/ GMSK/ QPSK 5.0	48.21	-	-	48.30	-	-	48.27	-	-
	QPSK/ GMSK/ QPSK 10.0	48.35	-	-	48.53	-	-	48.50	-	-
	QPSK/ GMSK/ QPSK 15.0	48.37	-	-	48.57	-	-	48.54	-	-
	QPSK/ GMSK/ QPSK 20.0	48.71	-	-	48.87	-	-	48.87	-	-



Configuration NB-IoT+WCDMA+LTE-MC-1(1NB+1WCDMA+1LTE)
Maximum Output Power 49.03dBm per port

Antenna	NBMod./ WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK/ QPSK 1.4	48.37	-	-	48.47	-	-	48.41	-	-
	QPSK/ QPSK/ QPSK 3.0	48.48	-	-	48.62	-	-	48.56	-	-
	QPSK/ QPSK/ QPSK 5.0	-	-	-	47.87	-	-	-	-	-
	QPSK/ QPSK/ QPSK 10.0	-	-	-	47.91	-	-	-	-	-
	QPSK/ QPSK/ QPSK 15.0	-	-	-	47.95	-	-	-	-	-
	QPSK/ QPSK/ QPSK 20.0	-	-	-	47.97	-	-	-	-	-

Configuration NB-IoT+WCDMA+LTE-MC-3 (1NB+2WCDMA+3LTE)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK/ QPSK 1.4	47.94	-	-	48.01	-	-	47.86	-	-
	QPSK/ QPSK/ QPSK 3.0	47.98	-	-	48.09	-	-	47.91	-	-
	QPSK/ QPSK/ QPSK 5.0	-	-	-	47.90	-	-	-	-	-
	QPSK/ QPSK/ QPSK 10.0	-	-	-	47.92	-	-	-	-	-
	QPSK/ QPSK/ QPSK 15.0	-	-	-	47.91	-	-	-	-	-

Configuration NB-IoT+WCDMA+LTE-MC-4 (1NB+3WCDMA+2LTE)

Maximum Output Power 49.03dBm per port

Antenna	NBMod./ WCDMA Mod./ LTE Mod. Bandwidth (MHz)	Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
B	QPSK/ QPSK/ QPSK20.0	-	-	-	47.93	-	-	-	-	-

NOTE:

The DUT is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/ISED Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

A.2 Occupied Bandwidth

A.2.1 Reference

FCC CFR 47 Part 2, Clause 2.1049(h)

FCC CFR 47 Part 24, Clause 24.238 (b)

RSS-GEN, Clause 6.6

A.2.2 Method of Measurements

The EUT was set to transmit at maximum power and testing was carried out on bottom, middle and top channels. Using the Occupied Bandwidth measurement function in the spectrum analyzer, the 26dB bandwidth was measured in accordance with FCC KDB 971168 D01 Power Measurement License Digital Systems v02r02 Clause 4.2. In addition, measurements of 99% occupied bandwidths were made in accordance with RSS-GEN Clause 6.6.

The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

A.2.3 Measurement result

Configuration GSM-1C


-26dBc Occupied Bandwidth

Modulation	Occupied Bandwidth (KHz)		
	Channel position B	Channel position M	Channel position T
GMSK	318.60	319.20	319.20
8PSK	317.10	315.30	314.60
AQPSK	318.40	316.70	318.40


99% Occupied Bandwidth

Modulation	Occupied Bandwidth (KHz)		
	Channel position B	Channel position M	Channel position B
GMSK	247.11	245.97	246.77
8PSK	244.24	245.78	244.43
AQPSK	240.94	241.51	240.57


Port B, GMSK Channel Position B

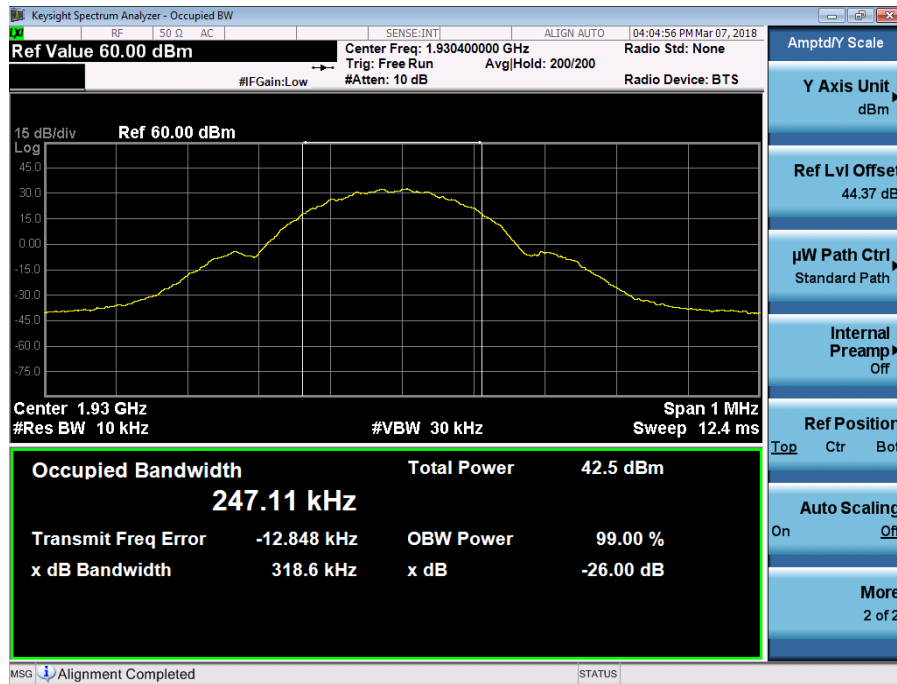


Port B, GMSK Channel Position M

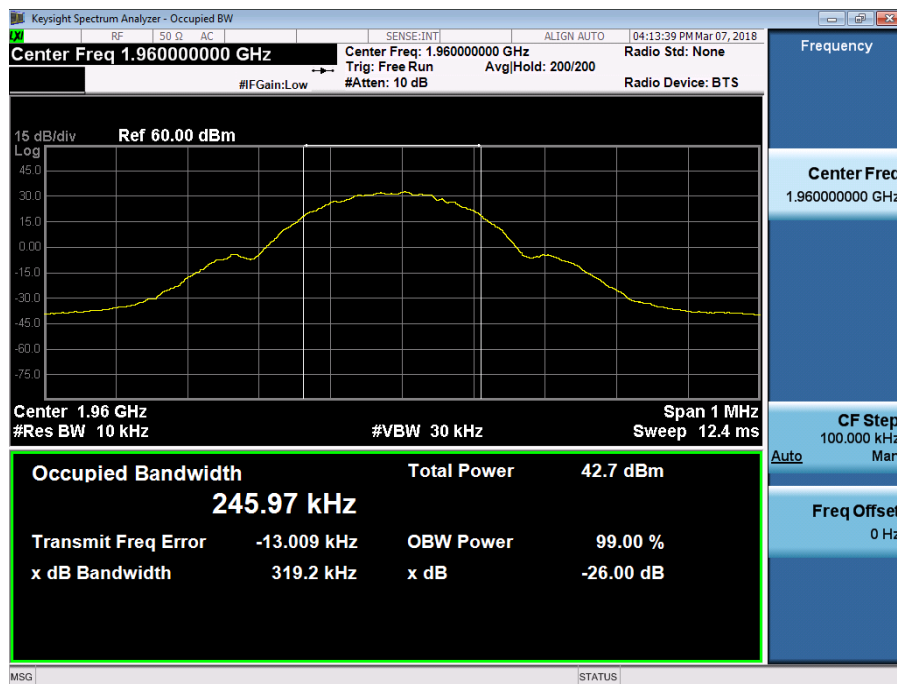


Port B, GMSK Channel Position T

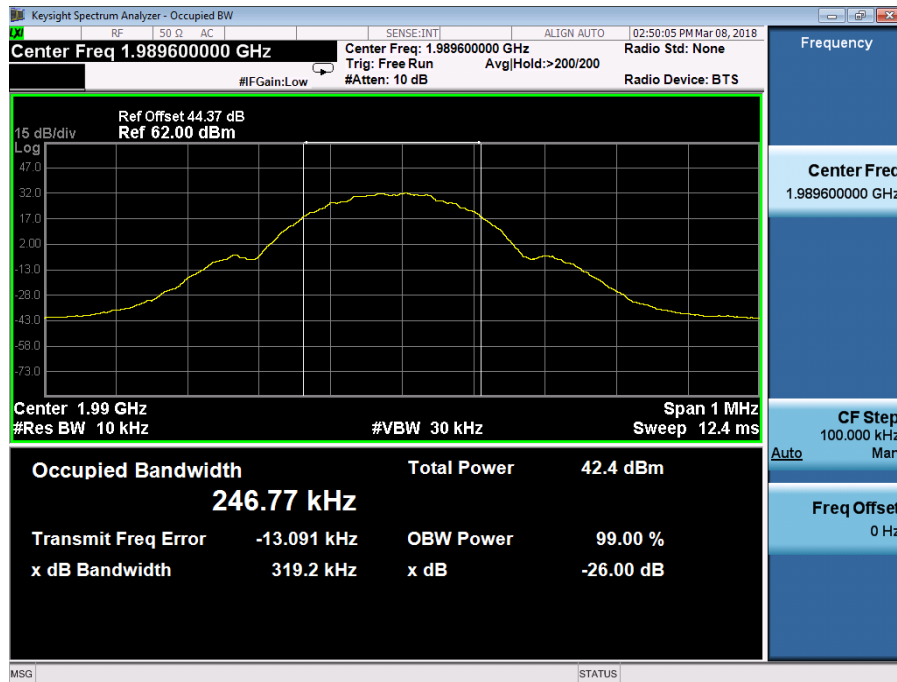


Port B, 8PSK Channel Position B

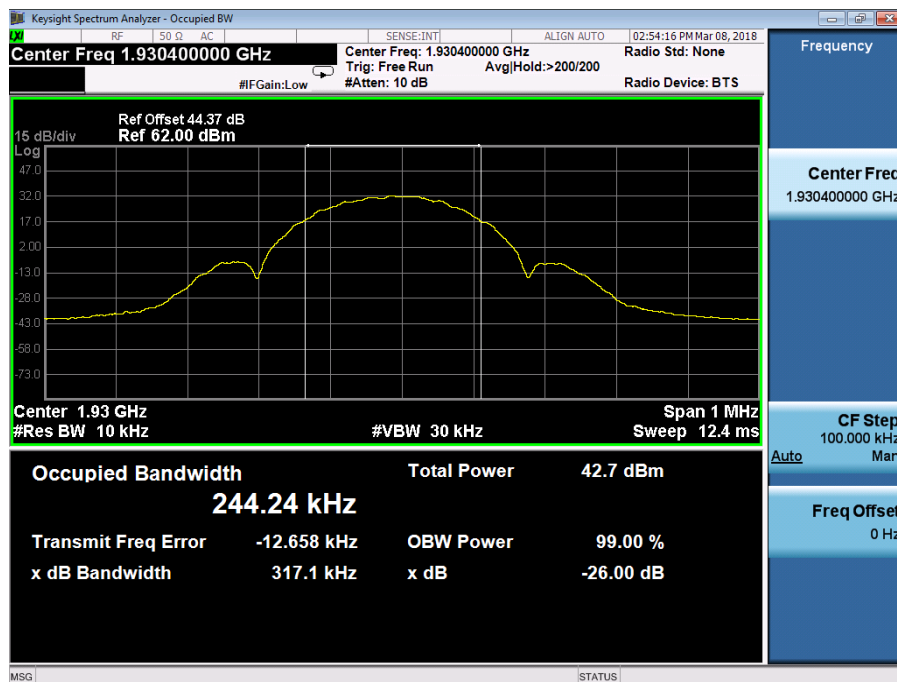


Port B, 8PSK Channel Position M

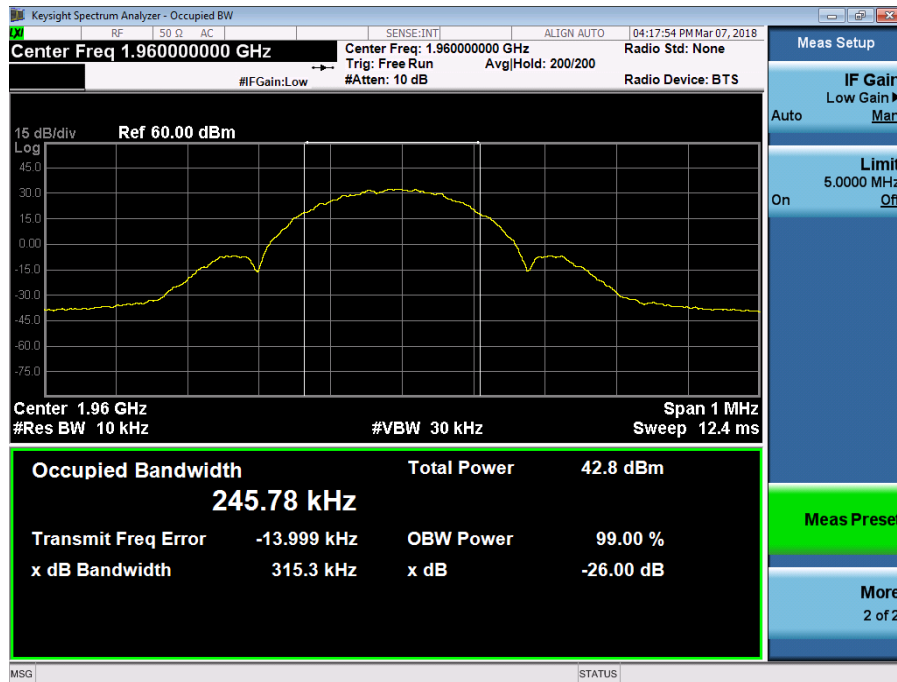


Port B, 8PSK Channel Position T

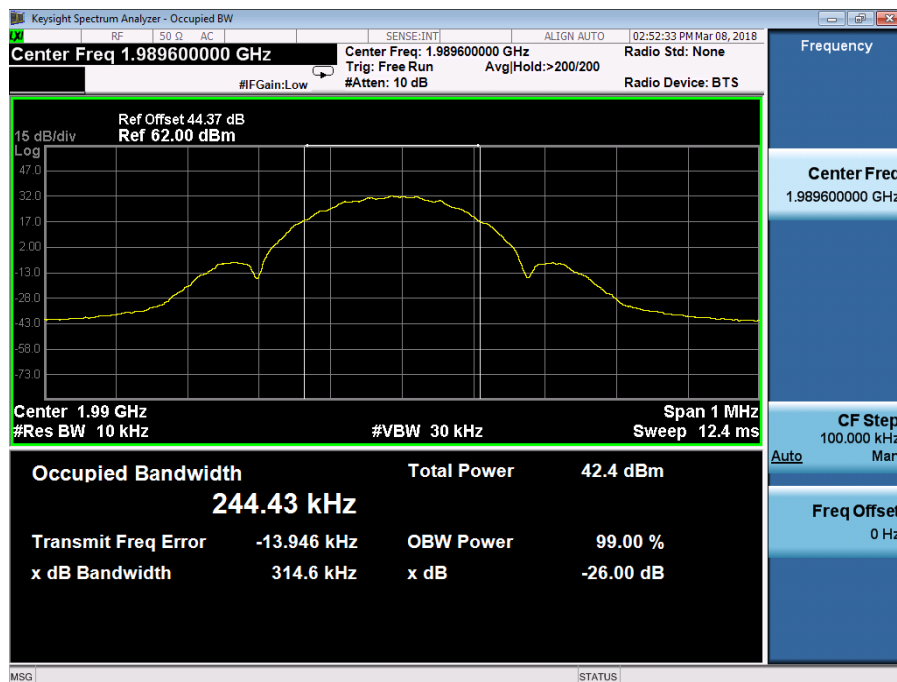


Port B, AQPSK Channel Position B

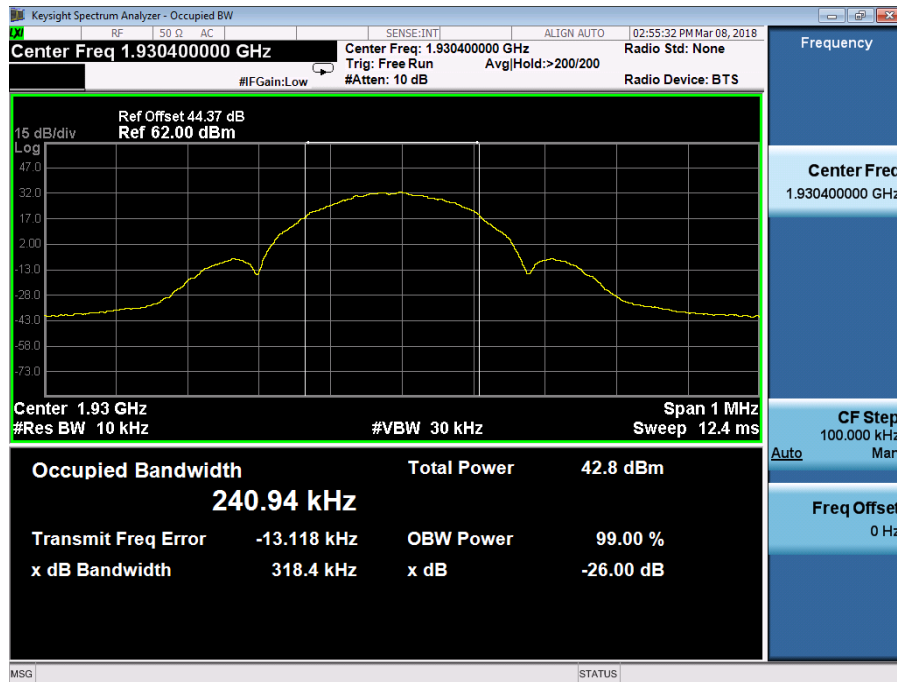

Port B, AQPSK Channel Position M

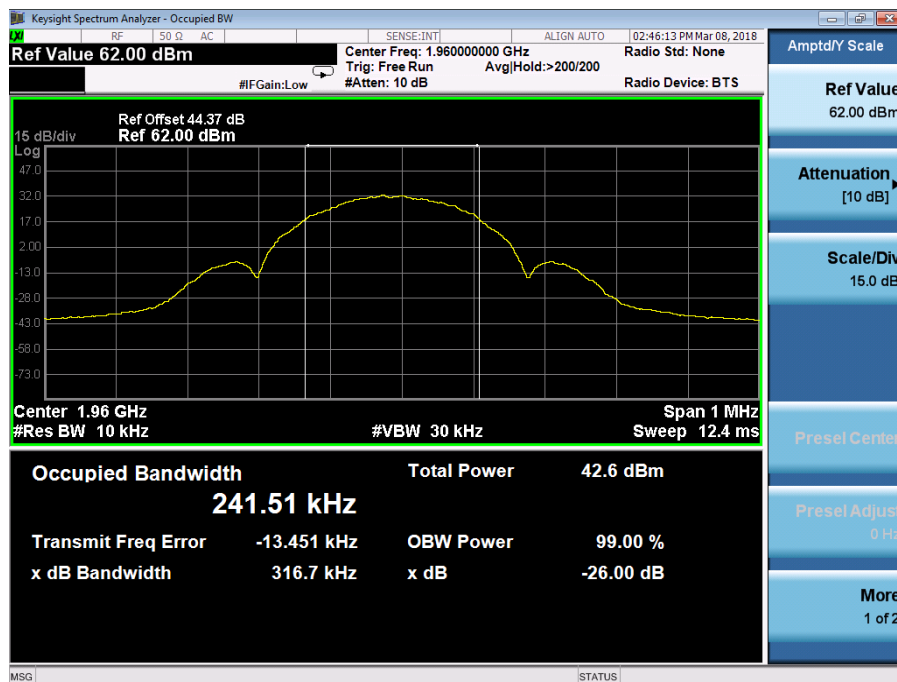

Port B, AQPSK Channel Position T

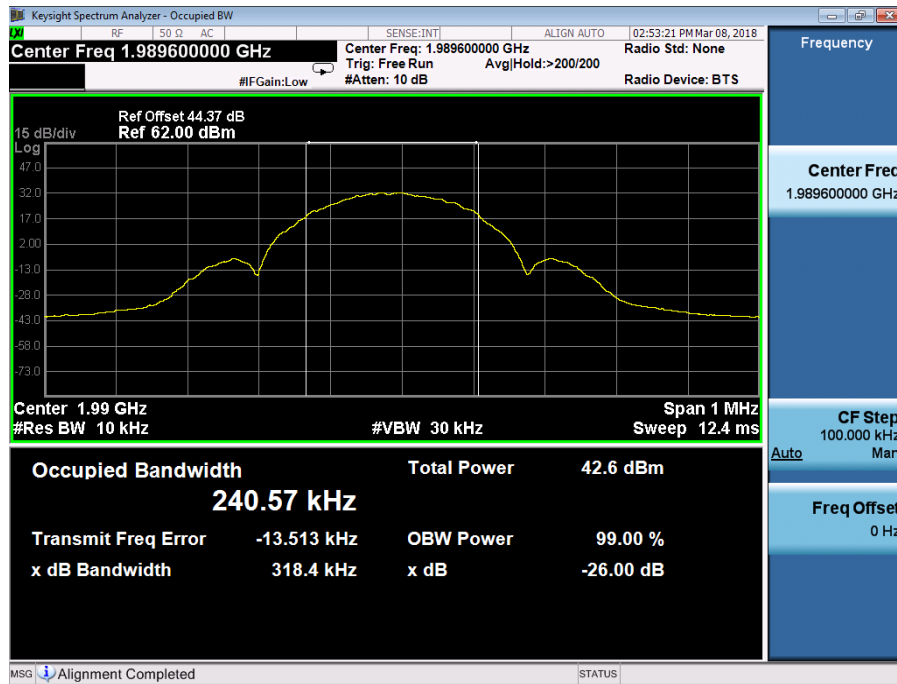

Configuration WCDMA-1C
-26dBc Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
B	QPSK/5.0 MHz	4.666	4.662	4.667
	QPSK/3.8 MHz	3.749	3.751	3.750


Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
B	16QAM/ 5.0 MHz	4.663	4.663	4.664
	64QAM/ 5.0 MHz	4.665	4.661	4.666

99% Occupied Bandwidth


Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
B	QPSK/5.0 MHz	4.178	4.175	4.175
	QPSK/3.8 MHz	3.571	3.573	3.573

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
B	16QAM/ 5.0 MHz	4.170	4.172	4.174
	64QAM/ 5.0 MHz	4.175	4.172	4.169


Port B, QPSK/3.8 MHz Channel Position B

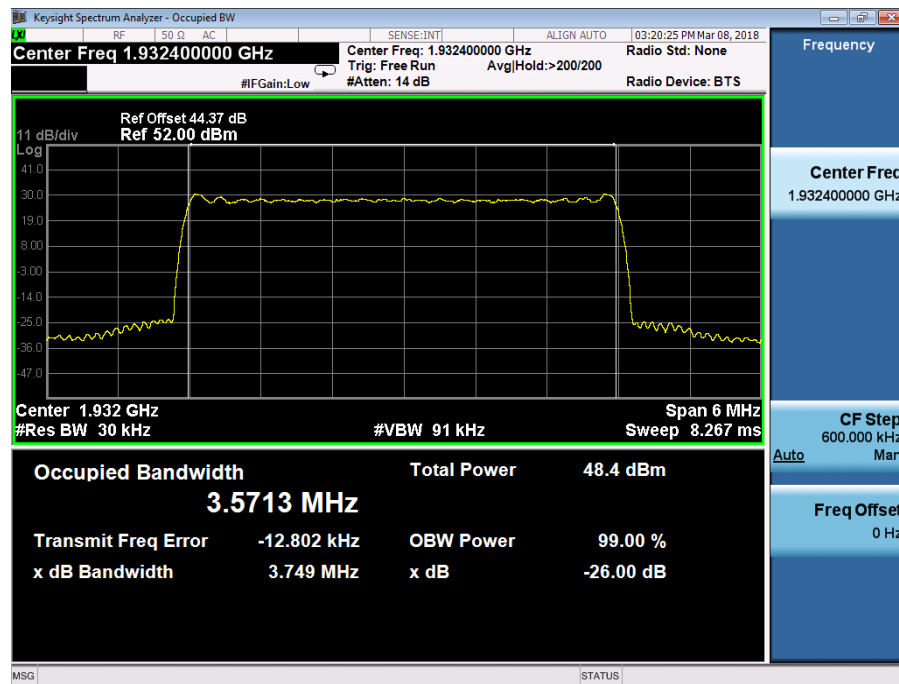


Port B, QPSK/3.8 MHz Channel Position M

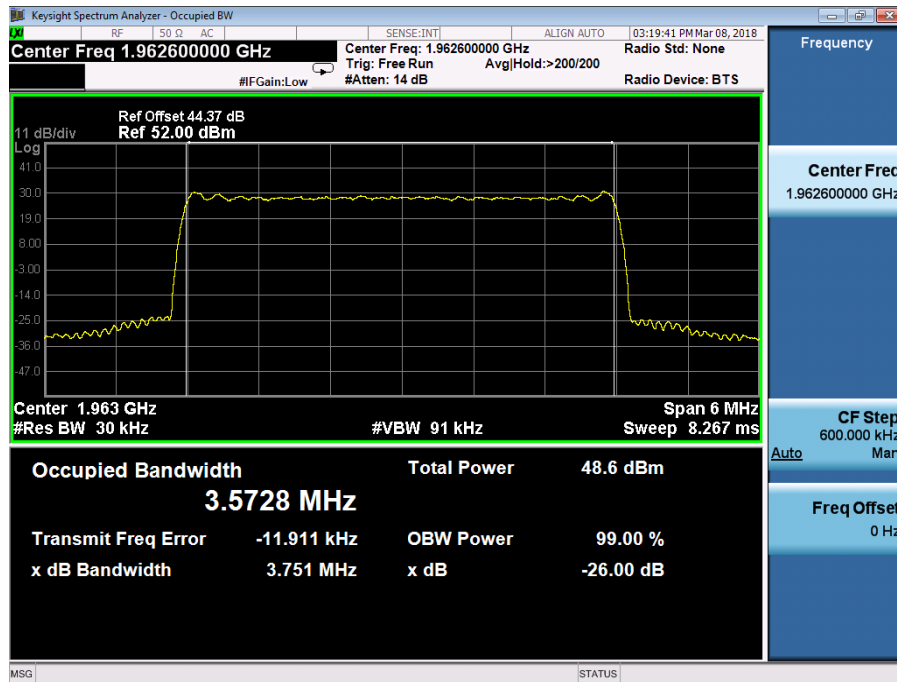


Port B, QPSK/3.8 MHz Channel Position T

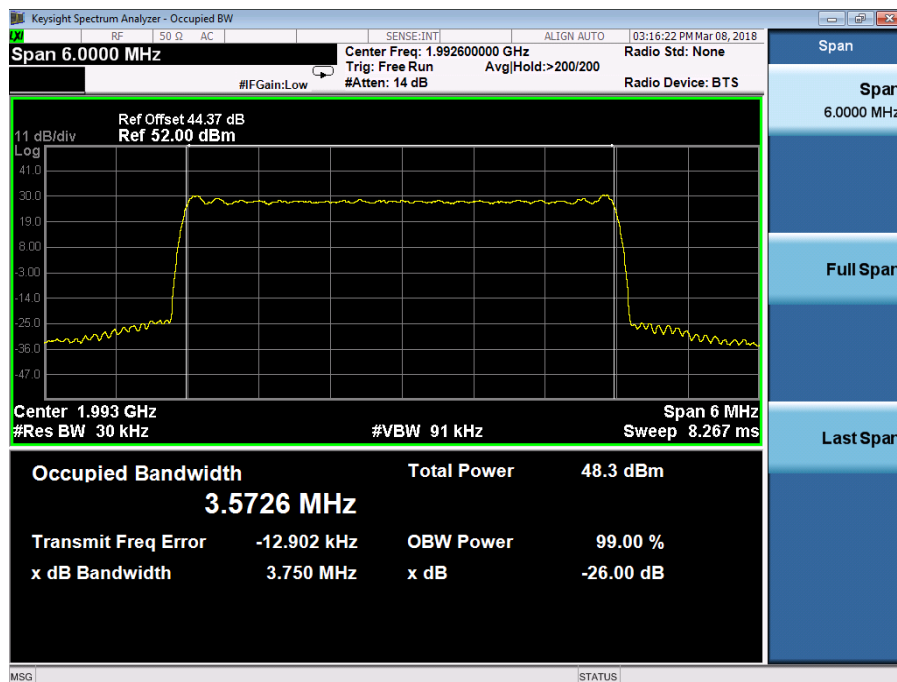


Port B, QPSK/5.0 MHz Channel Position B

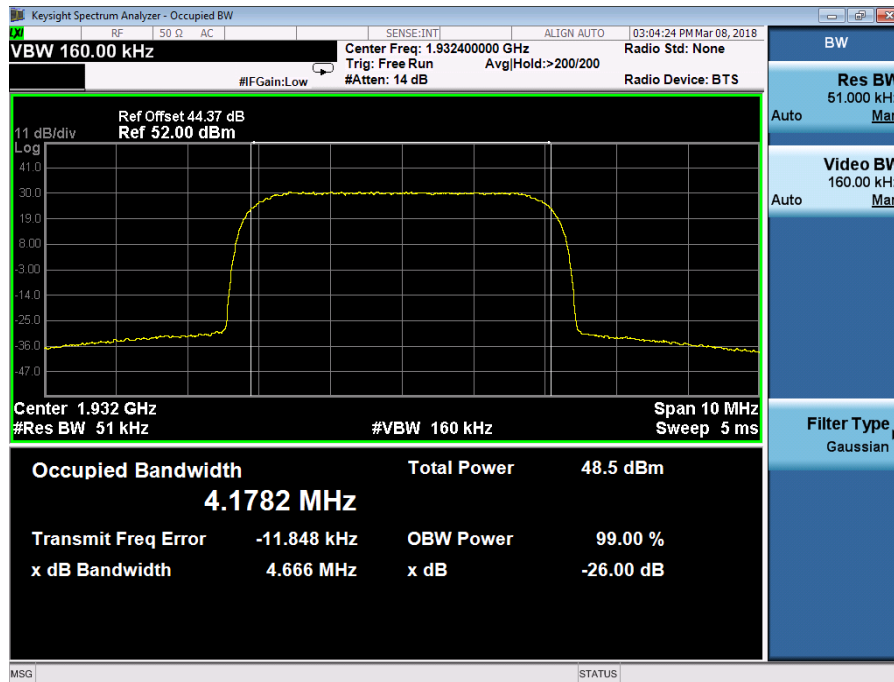


Port B, QPSK/5.0 MHz Channel Position M

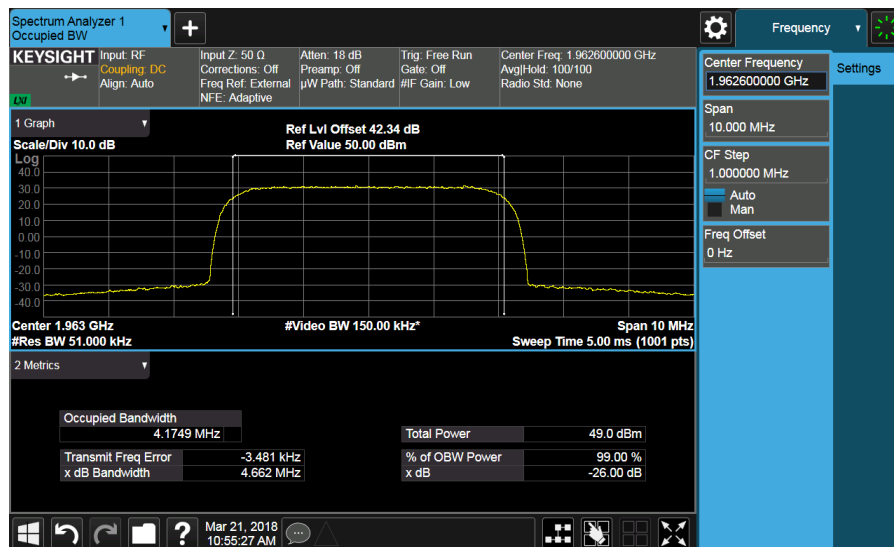

Port B, QPSK/5.0 MHz Channel Position T

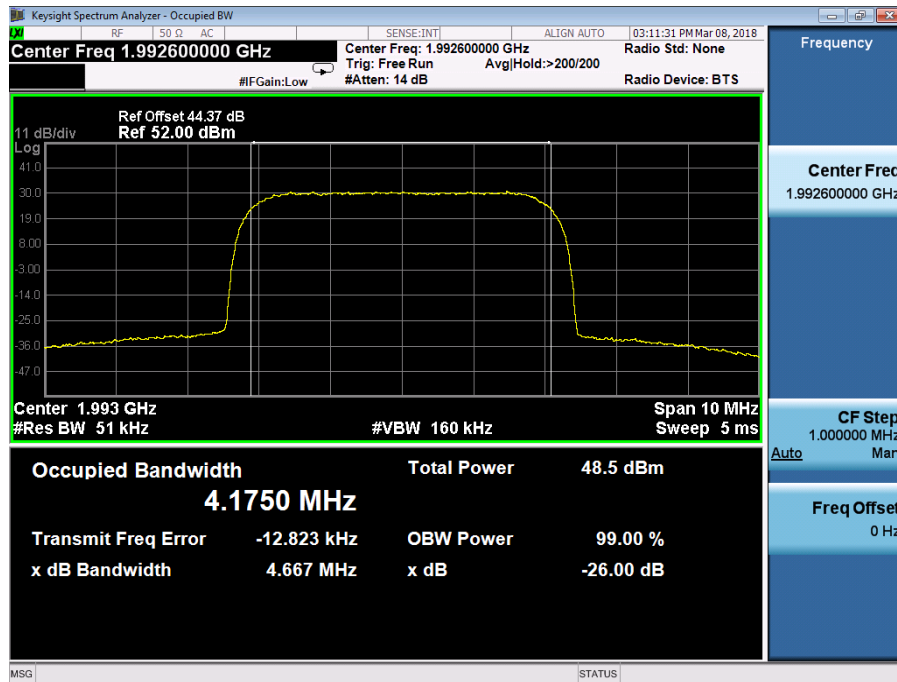


Port B, 16QAM/5.0 MHz Channel Position B

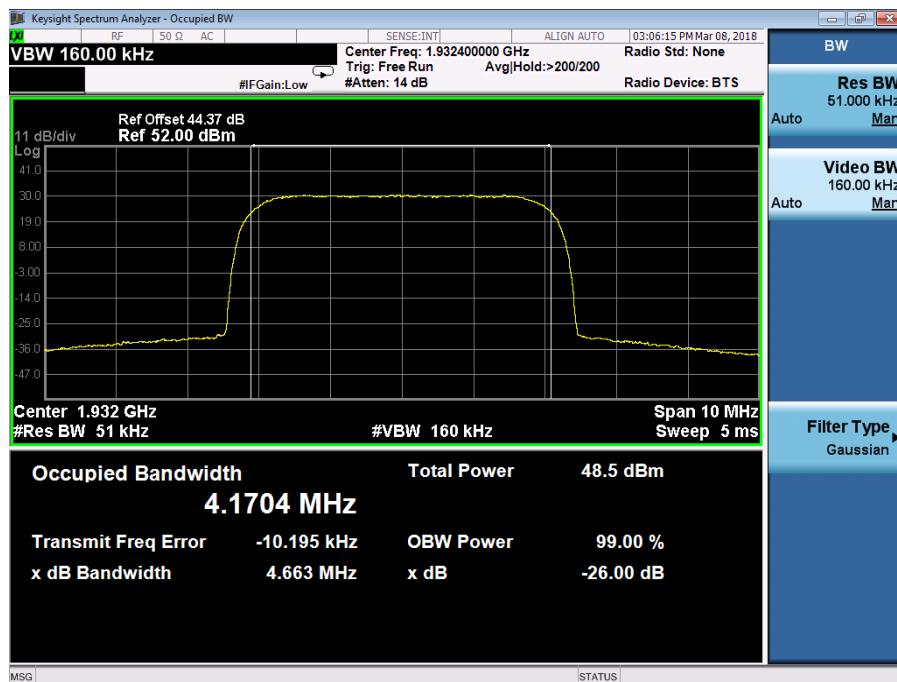


Port B, 16QAM/5.0 MHz Channel Position M



Port B, 16QAM/5.0 MHz Channel Position T

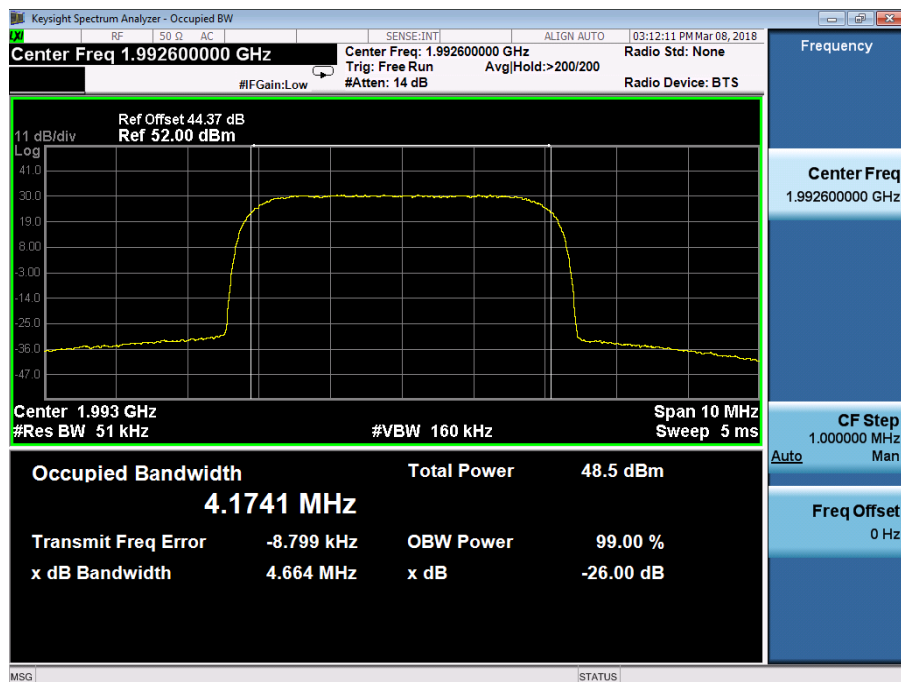


Port B, 64QAM/5.0 MHz Channel Position B

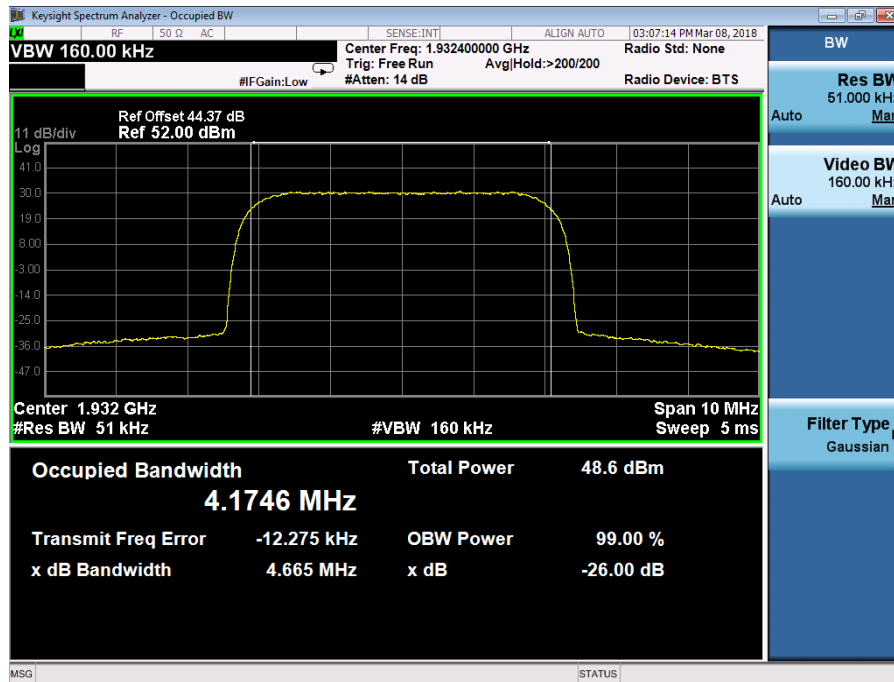

Port B, 64QAM/5.0 MHz Channel Position M



Port B, 64QAM/5.0 MHz Channel Position T

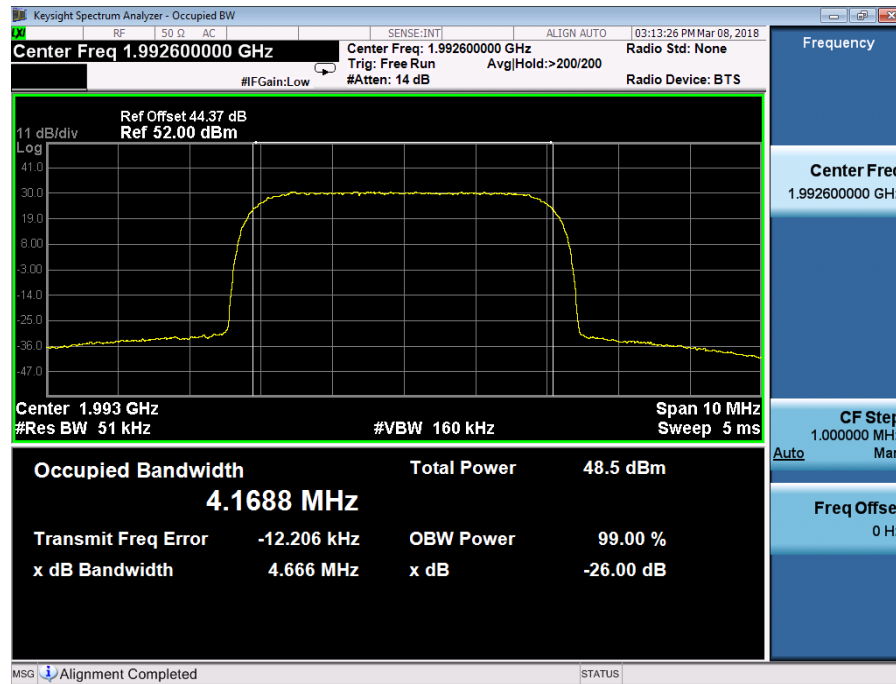

Configuration LTE-MIMO-1C
-26dBc Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
B	QPSK/ 1.4 MHz	1.236	1.236	1.235
	QPSK/ 3.0 MHz	2.852	2.853	2.847
	QPSK/ 5.0 MHz	4.730	4.729	4.737
	QPSK/ 10.0 MHz	9.384	9.360	9.330
	QPSK/ 15.0 MHz	13.960	13.970	13.980
	QPSK/ 20.0 MHz	18.560	18.580	18.570

-26dBc Occupied Bandwidth

Antenna	Bandwidth	Occupied Bandwidth (MHz)		
		Modulation 16QAM/ Channel Position M	Modulation 64QAM/ Channel Position M	Modulation 256QAM/ Channel Position M
B	1.4 MHz	1.220	1.244	1.238
	3.0 MHz	2.852	2.859	2.857
	5.0 MHz	4.700	4.748	4.731
	10.0 MHz	9.331	9.356	9.375
	15.0 MHz	13.920	14.010	13.960
	20.0 MHz	18.580	18.550	18.630


99% Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
B	QPSK/ 1.4 MHz	1.089	1.089	1.089
	QPSK/ 3.0 MHz	2.690	2.691	2.690
	QPSK/ 5.0 MHz	4.479	4.476	4.477
	QPSK/ 10.0 MHz	8.941	8.939	8.941
	QPSK/ 15.0 MHz	13.393	13.398	13.393
	QPSK/ 20.0 MHz	17.848	17.873	17.862


99% Occupied Bandwidth

Antenna	Bandwidth	Occupied Bandwidth (MHz)		
		Modulation 16QAM/ Channel Position M	Modulation 64QAM/ Channel Position M	Modulation 256QAM/ Channel Position M
B	1.4 MHz	1.087	1.090	1.090
	3.0 MHz	2.690	2.691	2.690
	5.0 MHz	4.462	4.477	4.478
	10.0 MHz	8.934	8.934	8.938
	15.0 MHz	13.414	13.402	13.395
	20.0 MHz	17.835	17.861	17.861

Port B, QPSK 1.4M Channel position B

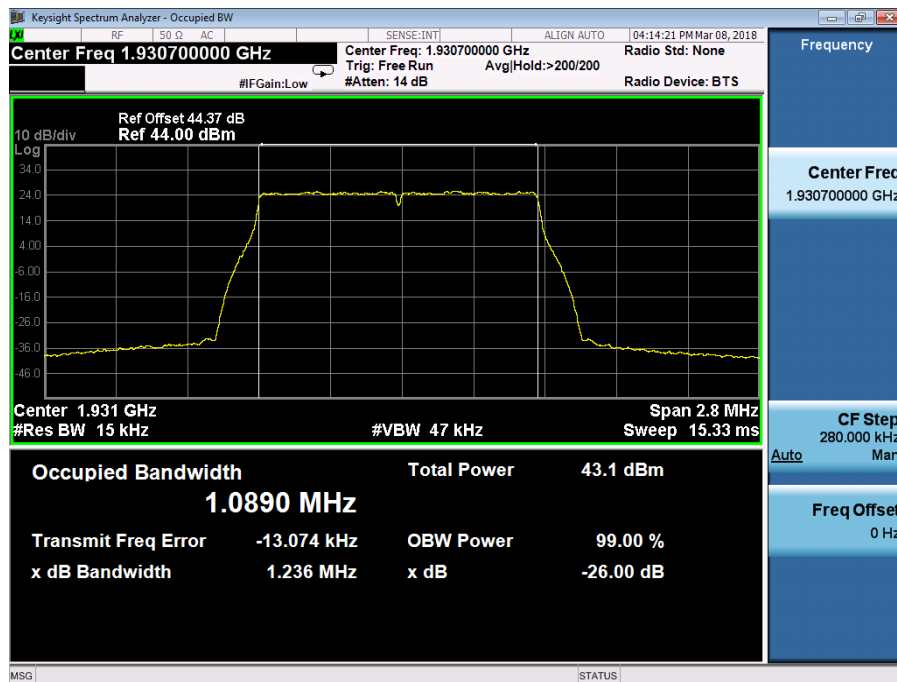

Port B, QPSK 1.4M Channel position M

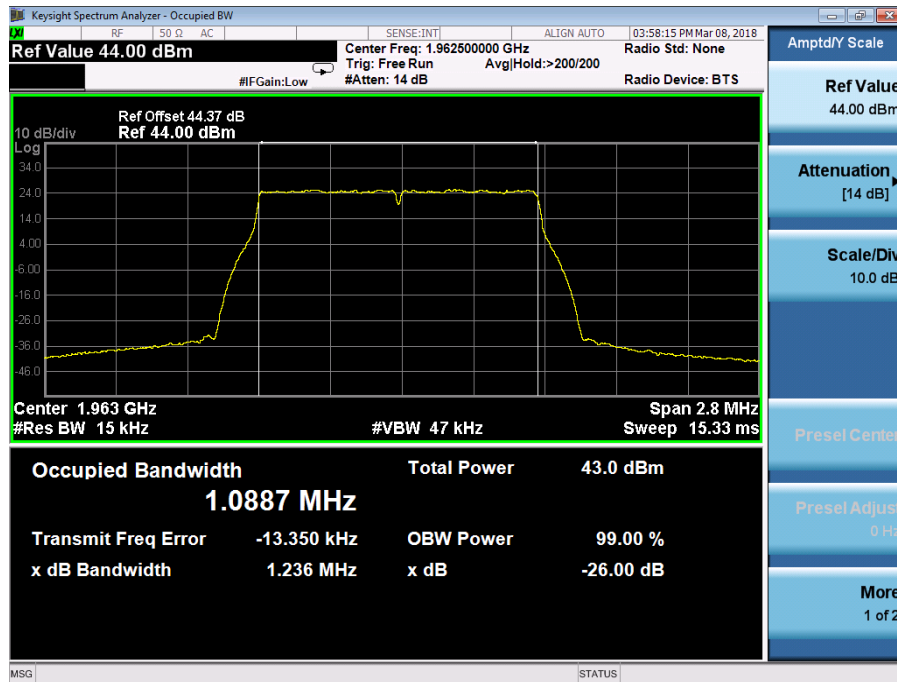

Port B, QPSK 1.4M Channel position T

