

TEST REPORT

of

FCC PART 15 SUBPART E AND CANADA RSS-247

☐ New Application; ☐ Class I PC; ☒ Class II PC

Product : J129 IP Deskphone
Brand: Avaya
Model: J129
Model Difference: N/A
FCC ID: TYM-J129
IC: 3794-J129
FCC Rule Part: §15.407, Cat:NII
IC Rule Part: RSS-247 issue 2: 2017
RSS-Gen issue 5: 2018
Applicant: AVAYA
Address: 250 Sidney Street, Belleville, Ontario k8P 3Z3,
Canada

Test Performed by:
International Standards Laboratory Corp.

<LT Lab.>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4;

*Address:

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-16LR194FE-R1**

Issue Date : **2019/04/22**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.

VERIFICATION OF COMPLIANCE

Applicant: AVAYA
Product Description: J129 IP Deskphone
Brand Name: Avaya
Model No.: J129
Model Difference: N/A
FCC ID: TYM-J129
IC: 3794C-J129
Date of test: 2019/03/28 ~ 2019/04/19
Date of EUT Received: 2019/03/28

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:



Date:

2019/04/22

Barry Lee / Senior Engineer

Prepared By:



Date:

2019/04/22

Gigi Yeh / Senior Engineer

Approved By:



Date:

2019/04/22

Jerry Liu / Technical Manager

Version

| Version No. | Date | Description |
|-------------|------------|--|
| 00 | 2019/04/16 | Initial creation of document |
| 02 | 2019/04/22 | 1. Replacement of some non-RF parts on the main board. 2. A DC jack is added. |

Uncertainty of Measurement

| Description Of Test | Uncertainty |
|---------------------------------------|---|
| Conducted Emission (AC power line) | 2.586 dB |
| Field Strength of Spurious Radiation | ≤30MHz: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB |
| Conducted Power | 2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB |
| Power Density | 2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB |
| Frequency | 0.0032% |
| Time | 0.01% |
| DC Voltage | 1% |

Table of Contents

| | |
|--|-----------|
| 1. General Information..... | 5 |
| 1.1. Product Description | 5 |
| 1.2. Related Submittal(s) / Grant (s) | 7 |
| 1.3. Test Methodology | 7 |
| 1.4. Test Facility..... | 7 |
| 1.5. Special Accessories..... | 7 |
| 1.6. Equipment Modifications..... | 7 |
| 2. System Test Configuration..... | 8 |
| 2.1. EUT Configuration | 8 |
| 2.2. EUT Exercise | 8 |
| 2.3. Test Procedure..... | 8 |
| 2.4. Configuration of Tested System..... | 9 |
| 3. Summary of Test Results..... | 10 |
| 4. Description of Test Modes..... | 11 |
| 5. Output Power / EIRP /Spectral Density Measurement..... | 12 |
| 5.1. Standard Applicable | 12 |
| 5.2. Measurement Procedure..... | 15 |
| 5.3. Measurement Equipment Used: | 16 |
| 5.4. Measurement Equipment Used: | 16 |
| 5.5. Measurement Result..... | 17 |
| 6. Undesirable Emission – Radiated Measurement | 18 |
| 6.1. Standard Applicable | 18 |
| 6.2. EUT Setup..... | 21 |
| 6.3. Measurement Procedure..... | 21 |
| 6.4. Test SET-UP (Block Diagram of Configuration) | 22 |
| 6.5. Measurement Equipment Used: | 23 |
| 6.6. Field Strength Calculation | 24 |
| 6.7. Measurement Result..... | 24 |
| 7. Antenna Requirement | 36 |
| 7.1. Standard Applicable | 36 |
| 7.2. Antenna Connected Construction | 37 |

1. General Information

1.1. Product Description

| | |
|-----------------------|---|
| Product Name: | J129 IP Deskphone |
| Brand Name: | Avaya |
| Model Name: | J129 |
| Model Difference: | N/A |
| Operation Environment | Indoor used |
| TPC | No |
| DFS | No |
| Power Supply: | 1. 48Vdc by AC Adapter, Model No.: POE 2. 5Vdc by AC/DC Adapter; Model No.:PSAC12R-050 |

IC RSS-Gen:

| | |
|--------------------|--------------------------|
| Product SW version | FW_S_J129_R2_0_0_0_0b248 |
| Product HW version | 14124-1 |
| Radio SW version | FW_S_J129_R2_0_0_0_0b248 |
| Radio HW version | 15329-1A |

| | FCC | IC |
|-----------------------------------|--|---|
| RF power setting in TEST SoftWare | <p>2.4G :</p> <p>b mode : low(17) mid(17) high(16)</p> <p>g mode : low(13) mid(13) high(13)</p> <p>n20 mode : low(13) mid(13) high(12)</p> <p>n40 mode : low(13) mid(13) high(12)</p> <p>5G :</p> <p>B1</p> <p>a mode : low(17) mid(17) high(17)</p> <p>n20 mode : low(13) mid(13) high(13)</p> <p>n40 mode : low(13) high(13)</p> <p>ac mode : CH 42 5210MHz(12)</p> <p>B3</p> <p>a mode : low(17) mid(17) high(17)</p> <p>n20 mode : low(13) mid(13) high(13)</p> <p>n40 mode : low(13) high(13)</p> <p>ac mode : CH 155 5775MHz(12)</p> | <p>2.4G :</p> <p>b mode : low(17) mid(17) high(16)</p> <p>g mode : low(13) mid(13) high(13)</p> <p>n20 mode : low(13) mid(13) high(12)</p> <p>n40 mode : low(13) mid(13) high(12)</p> <p>5G :</p> <p>B1</p> <p>a mode : low(14) mid(14) high(14)</p> <p>n20 mode : low(11) mid(11) high(11)</p> <p>n40 mode : low(11) high(11)</p> <p>ac mode : CH 42 5210MHz(11)</p> <p>B3</p> <p>a mode : low(17) mid(17) high(17)</p> <p>n20 mode : low(13) mid(13) high(13)</p> <p>n40 mode : low(13) high(13)</p> <p>ac mode : CH 155 5775MHz(12)</p> |

Power Tolerance: +/- 1 dB

WLAN: 1TX/1RX

| Wi-Fi | Frequency Range (MHz) | Channels | Peak / Average Rated Power | Modulation Technology | |
|---------------------|--------------------------|--|-------------------------------|--------------------------|--|
| 802.11b | 2412 – 2462(DTS) | 11 | 19.43dBm (PK) | DSSS | |
| 802.11g | 2412 – 2462(DTS) | 11 | 22.02dBm (PK) | OFDM | |
| 802.11n (2.4G) | HT20 2412 – 2462(DTS) | 11 | 21.85dBm (PK) | | |
| | HT40 2422 – 2452(DTS) | 7 | 21.94dBm (PK) | | |
| 802.11a | 5180 – 5240(NII) | 4 | 17.31dBm (AV) | | |
| | 5745 – 5825(NII) | 5 | 13.14dBm (AV) | | |
| 802.11n(5G) | HT20, 5180 – 5240(NII) | 4 | 16.57dBm (AV) | | |
| | HT20, 5745 – 5825(NII) | 5 | 12.10dBm (AV) | | |
| | HT40, 5190 – 5230(NII) | 2 | 15.13dBm (AV) | | |
| | HT40, 5755 – 5815(NII) | 2 | 13.65dBm (AV) | | |
| 802.11ac | HT80, 5210(NII) | 1 | 19.53dBm (AV) | | |
| | HT80, 5775(NII) | 1 | 18.75dBm (AV) | | |
| Modulation type | | CCK, DQPSK, DBPSK for DSSS 256QAM.64QAM. 16QAM, QPSK, BPSK for OFDM | | | |
| Antenna Designation | | Fixed Chip Antenna WiFi 2.4G Antenna : 2.1 dBi WiFi 5G Antenna : 2.4 dBi | | | |

The devices can be installed inside the EUT are listed below:

| Component | Vendor | Description |
|-----------------|--------|---|
| Wireless module | Avaya | Vender Model: J100 / K100 Wireless module |

The EUT is compliance with IEEE 802.11 a/n/ac Standard.

This report applies for Wifi frequency band 5150 MHz– 5250 MHz, 5725 MHz– 5850 MHz

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: TYM-J129** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules. Subpart C Rules and **IC: 3794C-J129** filing to comply with Industry Canada RSS-247 issue 2.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 789033 D02 General UNII Test Procedures New Rules v02r01

FCC 14-30 Revision UNII

594280 D02 U-NII Device Security v01r03

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of International Standards Laboratory Corp. <LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

2. System Test Configuration

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013. Con-ducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m/1.5m (Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 6 and 11 of ANSI C63.10: 2013

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

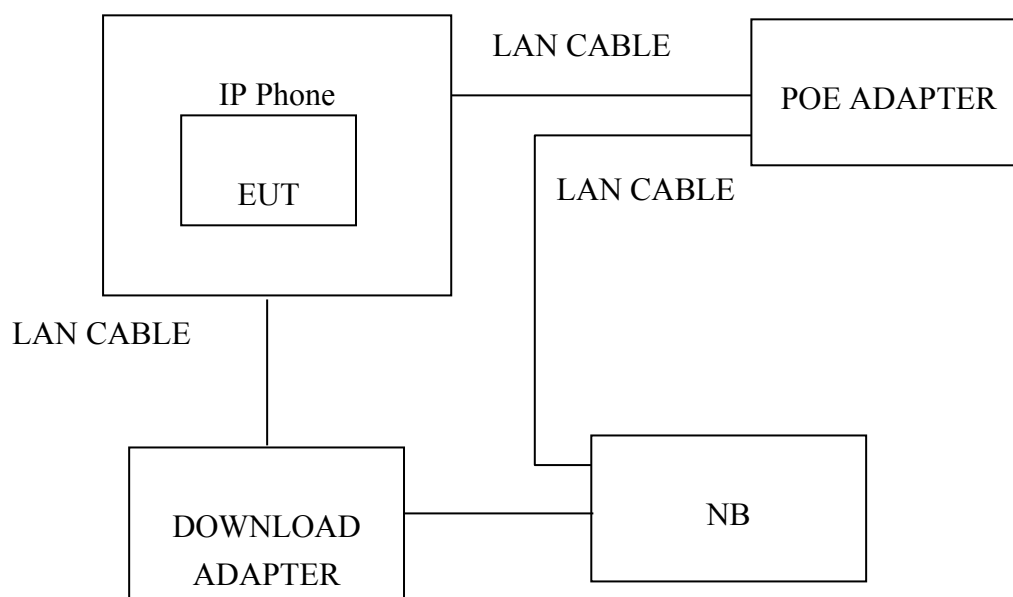


Table 1-1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/ Type No. | Series No. | Data Cable | Power Cord |
|------|---------------------|-----------|--------------------|------------------------|--------------|--------------|
| 1 | NB | Dell | LATITUDE 3340 | 481.06F01.0003 | NA | Non-shielded |
| 2 | IP Phone | AVAYA | J129 | 16WZ2620003T | Non-shielded | Non-shielded |
| 3 | DOWNLOAD ADAPTER | AVAYA | FWADPT1A-003 | 09WZ30551803 | Non-shielded | Non-shielded |
| 4 | POE adaptor | AVAYA | POE | C153166400000 00210 | Non-shielded | Non-shielded |

3. Summary of Test Results

| FCC Rules | Description Of Test | Result |
|---|---|-----------|
| §15.207 RSS-Gen §7.2.4 | AC Power Line Conducted Emission | N/A |
| §15.407(a)(2) RSS-247, 6.2 | Output Power/ EIRP/ Spectral Density Measurement | Compliant |
| §15.407(a) RSS-247, 6.2 RSS-Gen §4.6.3 | 26dB/99% Emission Bandwidth | N/A |
| §15.407(e) RSS-247, 6.2.4 RSS-Gen §4.6.3 | 6dB Emission Bandwidth | N/A |
| §15.407(b) RSS-247, 6.2 | Undesirable Emission – Radiated Measurement | Compliant |
| §15.407(c) RSS-247, 6.4(2) | Transmission in case of Absence of In- formation | N/A |
| §15.407(g) | Frequency Stability | N/A |
| §15.407(a) RSS-GEN 7.1.2, RSS-247 issue 8,§A8.4 | Antenna Requirement | Compliant |
| §15.407(d) RSS-247, 6.3 | TPC and DFS Measurement | N/A |
| §15.407(i) RSS-247, 6.4(4) | Device Security | N/A |

This is a Class II Permission Change case with the replacement of some non-RF parts on the main board, and a DC jack is added

Note: Test item list below has been re-verify:

1. RF Output power
2. Transmitter spurious emissions above 1GHz
3. Receiver spurious emissions above 1GHz

4. Description of Test Modes

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

5150MHz-5250MHz:

a mode: Channel lowest (5180MHz) 、Mid (5220MHz) and Highest (5240MHz) with 6Mbps data rate are chosen for full testing.

n HT 20 mode: Channel lowest (5180MHz) 、Mid (5220MHz) and Highest (5240MHz) with 6.5Mbps data rate are chosen for full testing

n HT 40 mode: Channel lowest (5190MHz) and Highest (5230MHz) with 13.5Mbps data rate are chosen for full testing

802.11 ac HT80: Channel (5210MHz) with lowest data rate is chosen for full testing

The worst case Band 1, 802.11ac HT80 (5GHz) was reported for Radiated Emission.

5725-5850MHz:

802.11a mode: Channel low (5745MHz) 、mid (5785MHz) and high (5825MHz) with 6Mbps lowest data rate are chosen for pre-test testing of radiated emissions.

802.11 n HT20: Channel low (5745MHz) 、mid (5785MHz) and high (5825MHz) with 6.5Mbps lowest data rate are chosen for pre-test testing of radiated emissions.

802.11 n HT40: Channel low (5755MHz) and high (5795MHz) with 13.5Mbps lowest data rate are chosen for pre-test testing of radiated emissions.

802.11 ac HT80: Channel (5775MHz) with lowest data rate is chosen for full testing

The worst case Band 3, 802.11ac HT80 was reported for Radiated Emission.

5. Output Power / EIRP /Spectral Density Measurement

5.1. Standard Applicable

According to §15.407(a) Power limits:

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247

6.2.1 Frequency Band 5150-5250 MHz

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

6.2.2 Frequency Band 5250-5350 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

6.2.3 Frequency Bands 5470-5600 MHz and 5650-5725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

6.2.4 Frequency Band 5725-5850 MHz

The maximum conducted output power shall not exceed 1 W.

The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

5.2. Measurement Procedure

For Output Power

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

For Power Spectral Density


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
3. Set RBW=1MHz,VBW=3MHz, Span=50MHz (Base Mode), Sweep time = Auto, traces 100 sweeps of video averaging for 5150-5725MHz;
4. Set RBW=500kHz,VBW=1.5MHz, Span=60MHz (Base Mode), Sweep time = Auto, traces 100 sweeps of video averaging for 5725-5850MHz;
5. Record the max. reading.
6. Repeat above procedures until all frequency measured were complete.

Refer to section E3 of KDB Document: KDB 789033 D02 General UNII Test Procedures New Rules v02r01

5.3. Measurement Equipment Used:

| Conducted Emission Test Site | | | | | |
|------------------------------|----------|-----------------------------|-------------------|------------|------------|
| Equipment Type | MFR | Model Number | Serial Number | Last Cal. | Cal Due. |
| Power Meter 05 | Anritsu | ML2495A | 1116010 | 10/28/2018 | 10/27/2019 |
| Power Sensor 05 | Anritsu | MA2411B | 34NKF50 | 10/28/2018 | 10/27/2019 |
| Power Sensor 06 | DARE | RPR3006W | 13I00030SN O33 | 01/11/2019 | 01/10/2020 |
| Power Sensor 07 | DARE | RPR3006W | 13I00030SN O34 | 01/11/2019 | 01/10/2020 |
| Temperature Chamber | KSON | THS-B4H100 | 2287 | 02/19/2019 | 02/18/2020 |
| DC Power supply | ABM | 8185D | N/A | 01/10/2019 | 01/09/2020 |
| AC Power supply | EXTECH | CFC105W | NA | 12/25/2018 | 12/24/2019 |
| Attenuator | Woken | Watt-65m3502 | 11051601 | NA | NA |
| Splitter | MCLI | PS4-199 | 12465 | 12/26/2017 | 12/25/2019 |
| Spectrum analyzer | keysight | N9010A | MY56070257 | 10/15/2018 | 10/14/2019 |
| Test Software | DARE | Radimation Ver:2013.1.23 | NA | NA | NA |

5.4. Measurement Equipment Used:

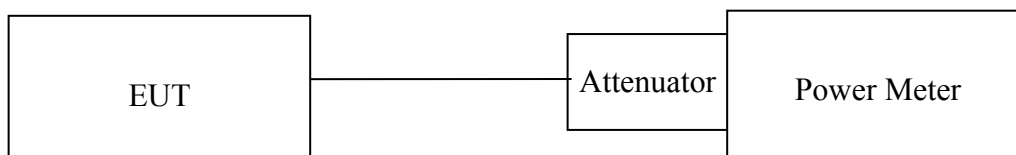

5.5. Measurement Result

Average Power Measurement:

802.11a

| Channel | power (dBm) | limit(dBm) | result |
|---------|-------------|------------|--------|
| 5180 | 16.94 | 23.97 | pass |
| 5220 | 17.03 | 23.97 | pass |
| 5240 | 17.31 | 23.97 | pass |
| 5745 | 13.02 | 30 | pass |
| 5785 | 13.14 | 30 | pass |
| 5825 | 13.07 | 30 | pass |

802.11n HT20

| Freq(MHz) | power (dBm) | limit(dBm) | result |
|-----------|-------------|------------|--------|
| 5180 | 16.27 | 23.97 | pass |
| 5220 | 16.57 | 23.97 | pass |
| 5240 | 16.22 | 23.97 | pass |
| 5745 | 12.04 | 30 | pass |
| 5785 | 12.10 | 30 | pass |
| 5825 | 11.94 | 30 | pass |

802.11n HT40

| Freq(MHz) | power (dBm) | limit(dBm) | result |
|-----------|-------------|------------|--------|
| 5190 | 15.04 | 23.97 | pass |
| 5230 | 15.13 | 23.97 | pass |
| 5755 | 13.65 | 30 | pass |
| 5795 | 13.37 | 30 | pass |

802.11ac HT80

| Freq(MHz) | power (dBm) | limit(dBm) | result |
|-----------|-------------|------------|--------|
| 5210 | 19.53 | 23.97 | pass |
| 5775 | 18.75 | 30 | pass |

6. Undesirable Emission – Radiated Measurement

6.1. Standard Applicable

According to §15.407(b), Undesirable Emission Limits: Except as shown in Paragraph (b)(7) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The above emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.
- (7) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

According to RSS-247, 6.2

6.2.1 Frequency Band 5150-5250 MHz

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz.

6.2.2 Frequency Band 5250-5350 MHz

- i) For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:
 - a. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
 - b. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled “for indoor use only.”
- ii) For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices’ unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled “for indoor use only.”

(3) Additional requirements

In addition to the above requirements, devices operating in the band 5250-5350 MHz with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below:

- (i) -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$
- (ii) (ii) $-13 - 0.716 (\theta - 8)$ dBW/MHz for $8^\circ \leq \theta < 40^\circ$
- (iii) (iii) $-35.9 - 1.22 (\theta - 40)$ dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$
- (iv) (iv) -42 dBW/MHz for $\theta > 45^\circ$

The measurement procedure defined in Annex A of this document shall be used to verify the compliance to the e.i.r.p. at different elevations.

6.2.3 Frequency Bands 5470-5600 MHz and 5650-5725 MHz

Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

6.2.4 Frequency Band 5725-5850 MHz

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

§15.205- RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209- RADIATED EMISSION LIMITS: GENERAL REQUIREMENTS

FCC PART 15.209

| MEASURING DISTANCE OF 3 METER | | |
|-------------------------------|----------------------------------|----------------------------|
| FREQUENCY RANGE (MHz) | FIELD STRENGTH (Microvolts/m) | FIELD STRENGTH (dBuV/m) |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

6.2. EUT Setup

1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.10: 2013
2. The EUT was put in the front of the test table. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 120Vac/60Hz power source.


6.3. Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.


Refer to section F of KDB Document: KDB 789033 D02 General UNII Test Procedures New Rules v02r01

6.4. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Setup, Frequency below 1000MHz

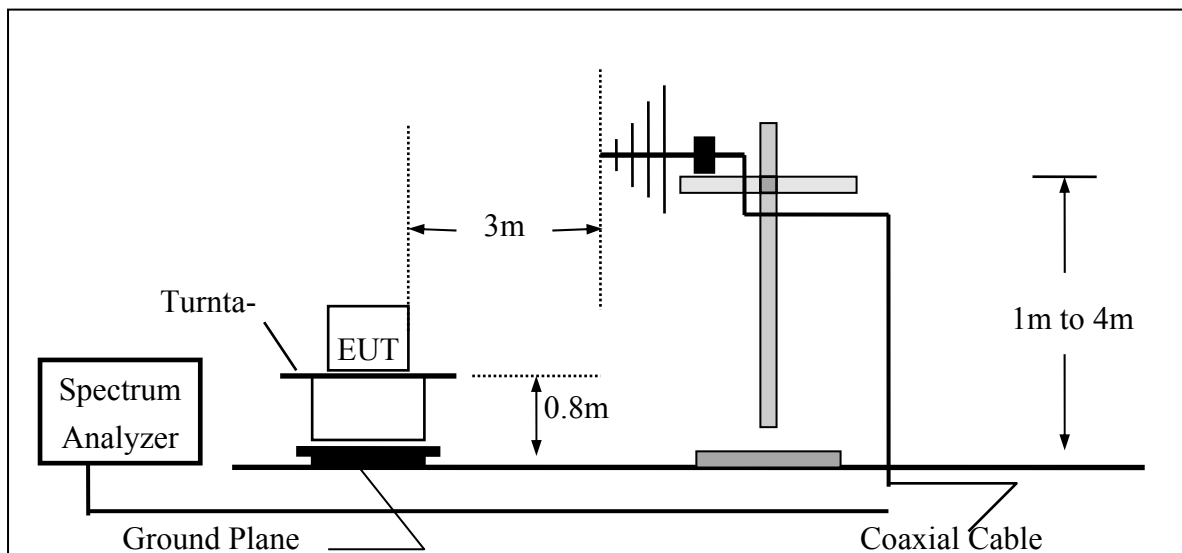

(B) Radiated Emission Test Setup Frequency above 1 GHz

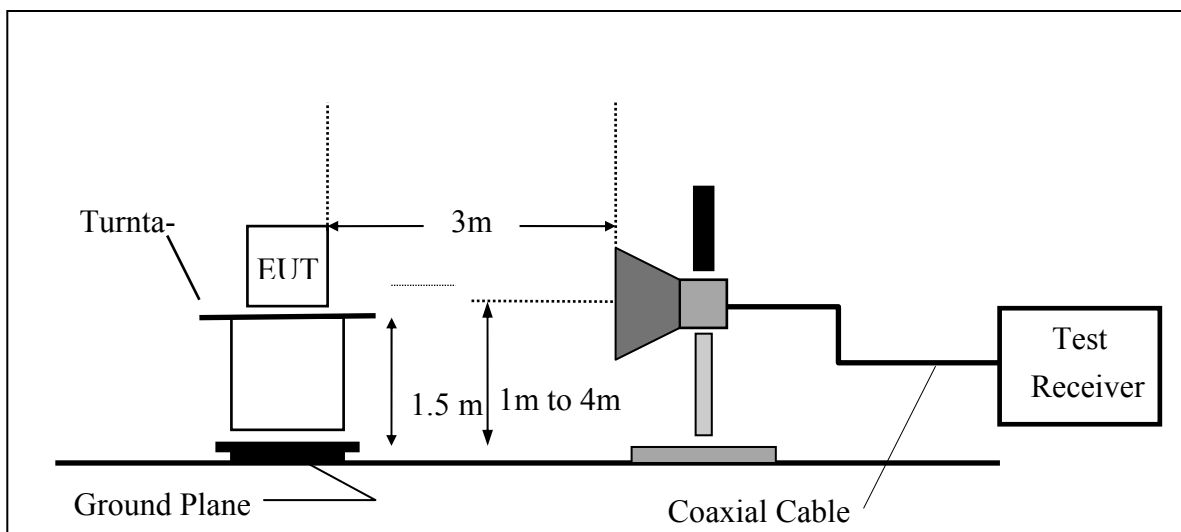

6.5. Measurement Equipment Used:

| Chamber 19(966) | | | | | |
|-------------------------|---------------|------------------------|-----------------|------------|------------|
| Equipment Type | MFR | Model Number | Serial Number | Last Cal. | Cal Due. |
| 966 Chamber | Chance Most | Chamber 19 | N/A | 08/13/2018 | 08/12/2019 |
| Spectrum analyzer | R&S | FSP40 | 100116 | 01/10/2019 | 01/09/2020 |
| EMI Receiver | R&S | ESR3 | 102461 | 08/08/2018 | 08/07/2019 |
| Loop Antenna(9K-30M) | EM | EM-6879 | 271 | 06/06/2018 | 06/05/2020 |
| Bilog Antenna (30M-1G) | SCHWARZBECK | VULB9168 w 5dB Att | 736 | 01/29/2019 | 01/28/2020 |
| Horn antenna (1G-18G) | SCHWARZBECK | 9120D | 9120D-1627 | 11/27/2017 | 11/26/2019 |
| Horn antenna (18G-26G) | Com-power | AH-826 | 081001 | 11/21/2017 | 11/20/2019 |
| Horn antenna (26G-40G) | Com-power | AH-640 | 100A | 03/29/2019 | 03/28/2021 |
| Preamplifier (9k-1000M) | HP | 8447F | 3113A06362 | 01/14/2019 | 01/13/2020 |
| Preamplifier(1G-26G) | Agilent | 8449B | 3008A02471 | 10/29/2018 | 10/28/2019 |
| Preamplifier (26G-40G) | MITEQ | JS4-26004000- 27-5A | 818471 | 11/20/2017 | 07/21/2019 |
| RF Cable (9k-18G) | HUBER SUHNER | SUCOFLEX 104A | MY1397/4A | 01/17/2019 | 01/16/2020 |
| RF cable (18G~40G) | HUBER SUHNER | Sucoflex 102 | 27963/2&37421/2 | 11/12/2018 | 11/11/2019 |
| Turn Table | MF | Turn Table-19 | Turn Table-19 | N/A | N/A |
| Mast Tower | MF | JSDES-15A | 1308283 | N/A | N/A |
| Controller | MF | MF-7802BS | MF780208460 | N/A | N/A |
| AC power source | T-Power | TFC-1005 | 40006471 | N/A | N/A |
| Signal Generator | Anritsu | MG3692A | 20311 | 01/09/2019 | 01/08/2020 |
| 2.4G Filter | Micro-Tronics | Brm50702 | 76 | 12/25/2018 | 12/24/2019 |
| 5G Filter | Micro-Tronics | Brm50716 | 005 | 12/25/2018 | 12/24/2019 |
| Test Software | Audix | E3 Ver:6.12023 | N/A | N/A | N/A |

6.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

6.7. Measurement Result

Refer to attach tabular data sheets.

NOTE:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz. And RBW 1MHz for frequency above 1GHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

(Band 1, 802.11a mode)

| | | | |
|----------------|---------|-----------|------------|
| Operation Mode | TX MODE | Test Date | 2019/04/19 |
| Channel Number | CH Low | Test By | Barry |
| Temperature | 25 °C | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|--------------|--------|------------|
| 1 | 10360.00 | 40.74 | 4.29 | 45.03 | 68.20 | -23.17 | Peak | VERTICAL |
| 2 | 14730.00 | 43.13 | 9.50 | 52.63 | 68.20 | -15.57 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 10360.00 | 41.31 | 4.29 | 45.60 | 68.20 | -22.60 | Peak | HORIZONTAL |
| 2 | 14920.00 | 43.49 | 9.47 | 52.96 | 68.20 | -15.24 | Peak | HORIZONTAL |

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

(Band 1, 802.11a mode)

| | | | |
|----------------|---------|-----------|------------|
| Operation Mode | TX MODE | Test Date | 2019/04/19 |
| Channel Number | CH Mid | Test By | Barry |
| Temperature | 25 °C | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|--------------|--------|------------|
| 1 | 10400.00 | 41.65 | 4.41 | 46.06 | 68.20 | -22.14 | Peak | VERTICAL |
| 2 | 12110.00 | 44.89 | 6.89 | 51.78 | 74.00 | -22.22 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 10400.00 | 42.63 | 4.41 | 47.04 | 68.20 | -21.16 | Peak | HORIZONTAL |
| 2 | 14040.00 | 48.39 | 9.82 | 58.21 | 68.20 | -9.99 | Peak | HORIZONTAL |

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

(Band 1, 802.11a mode)

| | | | |
|----------------|---------|-----------|------------|
| Operation Mode | TX MODE | Test Date | 2019/04/19 |
| Channel Number | CH High | Test By | Barry |
| Temperature | 25 °C | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|--------------|--------|------------|
| 1 | 10480.00 | 42.94 | 4.63 | 47.57 | 68.20 | -20.63 | Peak | VERTICAL |
| 2 | 14010.00 | 48.81 | 9.83 | 58.64 | 68.20 | -9.56 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 10480.00 | 43.39 | 4.63 | 48.02 | 68.20 | -20.18 | Peak | HORIZONTAL |
| 2 | 14010.00 | 49.28 | 9.83 | 59.11 | 68.20 | -9.09 | Peak | HORIZONTAL |

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

(Band 3 802.11a mode)

| | | | |
|----------------|---------|-----------|------------|
| Operation Mode | TX MODE | Test Date | 2019/04/19 |
| Channel Number | CH Low | Test By | Barry |
| Temperature | 25 °C | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|--------------|--------|------------|
| 1 | 11550.00 | 40.90 | 6.73 | 47.63 | 74.00 | -26.37 | Peak | VERTICAL |
| 2 | 14780.00 | 43.65 | 9.49 | 53.14 | 68.20 | -15.06 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 11550.00 | 40.47 | 6.73 | 47.20 | 74.00 | -26.80 | Peak | HORIZONTAL |
| 2 | 13690.00 | 43.67 | 9.07 | 52.74 | 68.20 | -15.46 | Peak | HORIZONTAL |

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

(Band 3 802.11a mode)

| | | | |
|----------------|---------|-----------|------------|
| Operation Mode | TX MODE | Test Date | 2019/04/19 |
| Channel Number | CH Mid | Test By | Barry |
| Temperature | 25 °C | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|--------------|--------|------------|
| 1 | 11570.00 | 41.63 | 6.74 | 48.37 | 74.00 | -25.63 | Peak | VERTICAL |
| 2 | 14030.00 | 48.80 | 9.82 | 58.62 | 68.20 | -9.58 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 11570.00 | 42.71 | 6.74 | 49.45 | 74.00 | -24.55 | Peak | HORIZONTAL |
| 2 | 14030.00 | 50.11 | 9.82 | 59.93 | 68.20 | -8.27 | Peak | HORIZONTAL |

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

(Band 3 802.11a mode)

| | | | |
|----------------|---------|-----------|------------|
| Operation Mode | TX MODE | Test Date | 2019/04/19 |
| Channel Number | CH High | Test By | Barry |
| Temperature | 25 °C | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|--------------|--------|------------|
| 1 | 11650.00 | 41.79 | 6.75 | 48.54 | 74.00 | -25.46 | Peak | VERTICAL |
| 2 | 14040.00 | 48.37 | 9.82 | 58.19 | 68.20 | -10.01 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 11650.00 | 43.42 | 6.75 | 50.17 | 74.00 | -23.83 | Peak | HORIZONTAL |
| 2 | 14040.00 | 51.50 | 9.82 | 61.32 | 68.20 | -6.88 | Peak | HORIZONTAL |

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Band Edges test (Band 1, 802.11ac 80 mode) -Radiated

Operation Mode TX CH Low
Channel Number 5210 MHz
Temperature 25 °C

Test Date 2019/04/19
Test By Barry
Humidity 65 %

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|---------|------------|
| 1 | 5139.00 | 35.53 | -8.42 | 27.11 | 54.00 | -26.89 | Average | VERTICAL |
| 2 | 5139.00 | 80.11 | -8.42 | 71.69 | 74.00 | -2.31 | Peak | VERTICAL |
| 3 | 5150.00 | 34.11 | -8.39 | 25.72 | 54.00 | -28.28 | Average | VERTICAL |
| 4 | 5150.00 | 75.33 | -8.39 | 66.94 | 68.20 | -1.26 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 5144.25 | 36.32 | -8.42 | 27.90 | 54.00 | -26.10 | Average | HORIZONTAL |
| 2 | 5144.25 | 78.01 | -8.42 | 69.59 | 74.00 | -4.41 | Peak | HORIZONTAL |
| 3 | 5150.00 | 37.28 | -8.39 | 28.89 | 54.00 | -25.11 | Average | HORIZONTAL |
| 4 | 5150.00 | 73.00 | -8.39 | 64.61 | 68.20 | -3.59 | Peak | HORIZONTAL |

Operation Mode TX CH High
Channel Number 5290MHz
Temperature 25 °C

Test Date 2019/04/19
Test By Barry
Humidity 65 %

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 5350.00 | 57.57 | -7.98 | 49.59 | 68.20 | -18.61 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 5350.00 | 56.78 | -7.98 | 48.80 | 68.20 | -19.40 | Peak | HORIZONTAL |


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Band Edges test (Band 3, 802.11ac HT80 mode) –Radiated


Operation Mode TX CH Low
Channel Number 5775 MHz
Temperature 25 °C

Test Date 2019/04/19
Test By Barry
Humidity 65 %

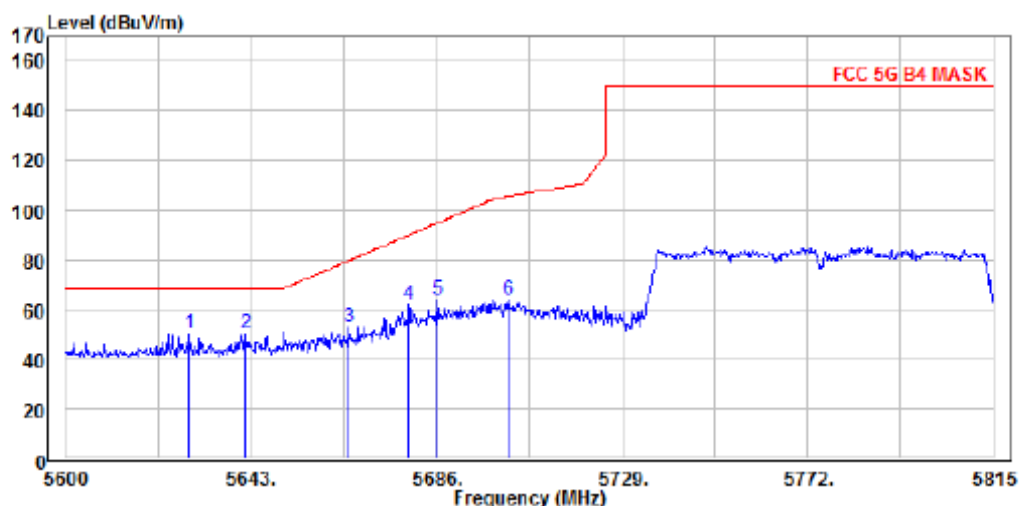

Condition: limit\FCC\FCC 5G B4 MASK.csv 3m Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WISTRON IP phone
Mode : Wifi 5G Mask B4 802.11AC80
Note :

| | | Read | | | Limit | Over | |
|---|-------------|-------|--------|--------|--------|--------|-----------|
| | Freq | Level | Factor | Level | Line | Limit | Pol/Phase |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | PP 5628.595 | 63.76 | -13.17 | 50.59 | 68.20 | -17.61 | Vertical |
| 2 | 5641.710 | 63.55 | -13.19 | 50.36 | 68.20 | -17.84 | Vertical |
| 3 | 5665.790 | 66.53 | -13.23 | 53.30 | 79.92 | -26.62 | Vertical |
| 4 | 5679.550 | 75.10 | -13.26 | 61.84 | 90.11 | -28.27 | Vertical |
| 5 | 5686.215 | 76.97 | -13.27 | 63.70 | 95.03 | -31.33 | Vertical |
| 6 | 5702.770 | 77.44 | -13.29 | 64.15 | 105.98 | -41.83 | Vertical |

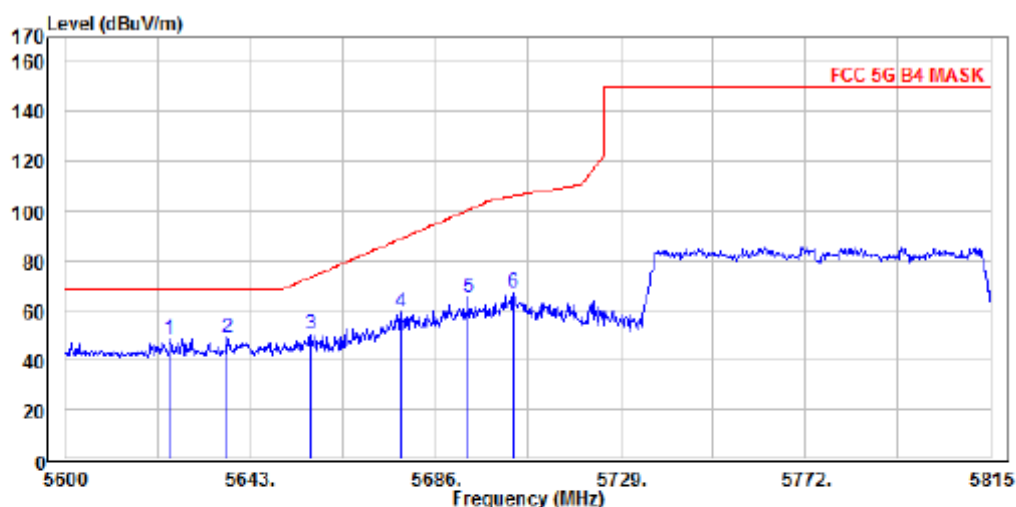


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m Horizontal
 : RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
 EUT : WISTRON IP phone
 Mode : Wifi 5G Mask B4 802.11AC80
 Note :

| | | Read | | | Limit | Over | |
|------|----------|-------|--------|--------|--------|--------|------------|
| | Freq | Level | Factor | Level | Line | Limit | Pol/Phase |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 5624.295 | 61.49 | -13.11 | 48.38 | 68.20 | -19.82 | Horizontal |
| 2 PP | 5637.410 | 62.07 | -13.14 | 48.93 | 68.20 | -19.27 | Horizontal |
| 3 | 5657.190 | 63.41 | -13.17 | 50.24 | 73.54 | -23.30 | Horizontal |
| 4 | 5677.830 | 72.97 | -13.21 | 59.76 | 88.83 | -29.07 | Horizontal |
| 5 | 5693.740 | 78.63 | -13.24 | 65.39 | 100.59 | -35.20 | Horizontal |
| 6 | 5704.275 | 80.78 | -13.26 | 67.52 | 106.40 | -38.88 | Horizontal |


Operation Mode TX CH High
Channel Number 5755MHz
Temperature 25 °C

Test Date 2019/04/19
Test By Barry
Humidity 65 %

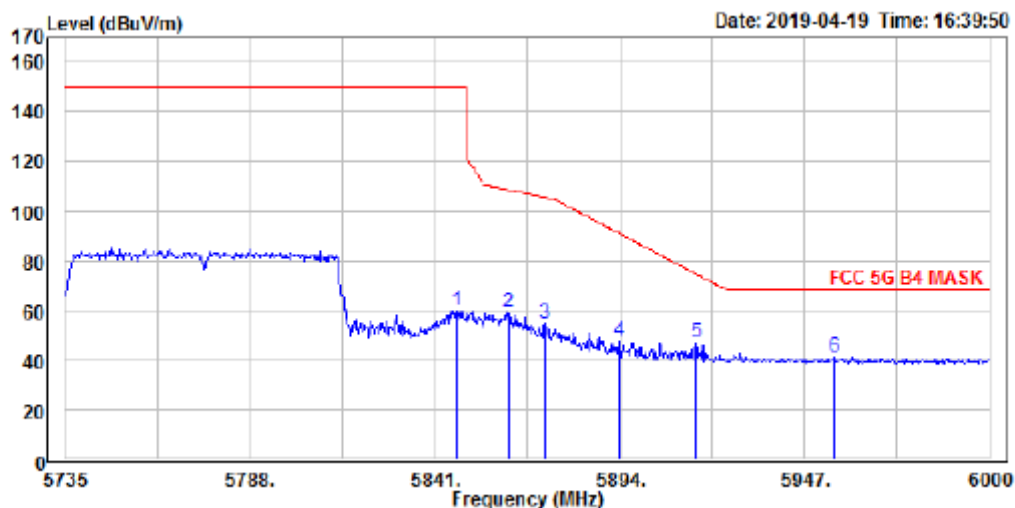

Condition: limit\FCC\FCC 5G B4 MASK.csv 3m Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WISTRON IP phone
Mode : Wifi 5G Mask B4 802.11AC80
Note :

| | | Read | | | Limit | Over | |
|------|----------|-------|--------|--------|--------|--------|-----------|
| | Freq | Level | Factor | Level | Line | Limit | Pol/Phase |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 5847.360 | 73.70 | -13.54 | 60.16 | 150.00 | -89.84 | Vertical |
| 2 | 5862.200 | 72.73 | -13.56 | 59.17 | 108.78 | -49.61 | Vertical |
| 3 | 5872.535 | 68.70 | -13.58 | 55.12 | 105.89 | -50.77 | Vertical |
| 4 | 5893.735 | 61.57 | -13.61 | 47.96 | 91.30 | -43.34 | Vertical |
| 5 | 5915.995 | 61.15 | -13.65 | 47.50 | 74.84 | -27.34 | Vertical |
| 6 PP | 5955.745 | 54.79 | -13.71 | 41.08 | 68.20 | -27.12 | Vertical |

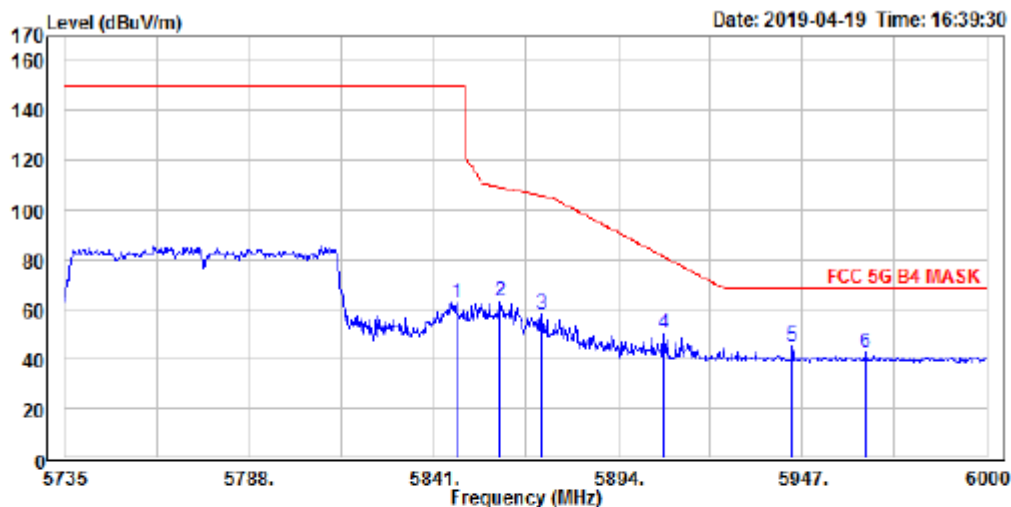

Condition: limit\FCC\FCC 5G B4 MASK.csv 3m Horizontal
 : RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
 EUT : WISTRON IP phone
 Mode : Wifi 5G Mask B4 802.11AC80
 Note :

| | | Read | | Limit | Over | |
|------|----------|-------|--------|--------|--------|-------------------|
| | Freq | Level | Factor | Level | Line | Limit Pol/Phase |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB |
| 1 | 5847.625 | 76.14 | -13.50 | 62.64 | 150.00 | -87.36 Horizontal |
| 2 | 5860.080 | 77.11 | -13.52 | 63.59 | 109.38 | -45.79 Horizontal |
| 3 | 5872.270 | 71.68 | -13.54 | 58.14 | 105.96 | -47.82 Horizontal |
| 4 | 5907.250 | 63.89 | -13.60 | 50.29 | 81.30 | -31.01 Horizontal |
| 5 PP | 5944.085 | 58.67 | -13.66 | 45.01 | 68.20 | -23.19 Horizontal |
| 6 | 5965.020 | 56.07 | -13.70 | 42.37 | 68.20 | -25.83 Horizontal |

7. Antenna Requirement

7.1. Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-247 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-247 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5745-5850 MHz Bands) or RSS-247 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-247 Annex 8 or Annex 9, the antenna gain shall not be added.

7.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 4.5dBi, which is revised PCB antenna and no consideration of replacement by user. Please see EUT photo and antenna spec. for details.

Antenna Designation:

| | P/N | Type | Gain (2.4GHz) | Gain (5GHz) |
|-----|---------------|--------------------|---------------|-------------|
| Ant | AH 104N2450D1 | Fixed Chip Antenna | 2.1dBi | 2.4dBi |