

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	10.40	6442.200
802.11ax HE40 SU SP	5.16	6521.429
802.11ax HE80 SU SP	5.16	6786.500
802.11ax HE160 SU SP	4.61	5932.000

Table 345 - Unwanted Emissions Within the RLAN Band Summary Results

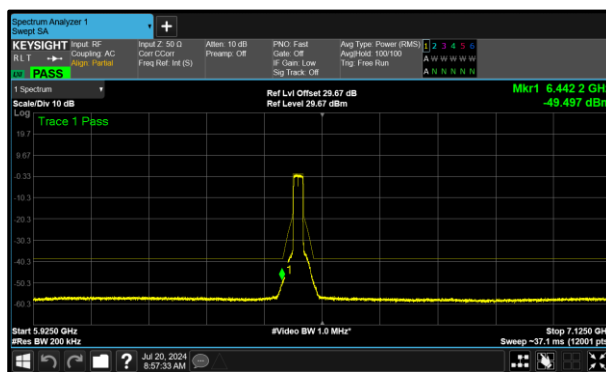


Figure 244 - A (Core 0) 802.11ax HE20 SU SP
6475 MHz (CH105)

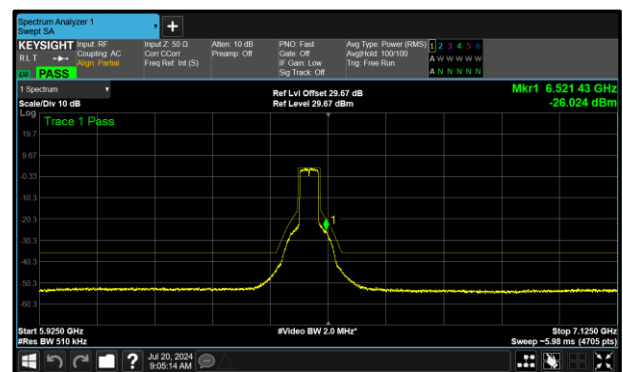


Figure 245 - A (Core 0) 802.11ax HE40 SU SP
6485 MHz (CH107)

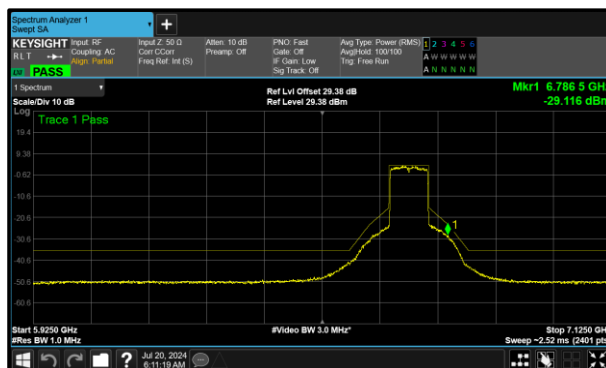


Figure 246 - A (Core 0) 802.11ax HE80 SU SP
6705 MHz (CH151)

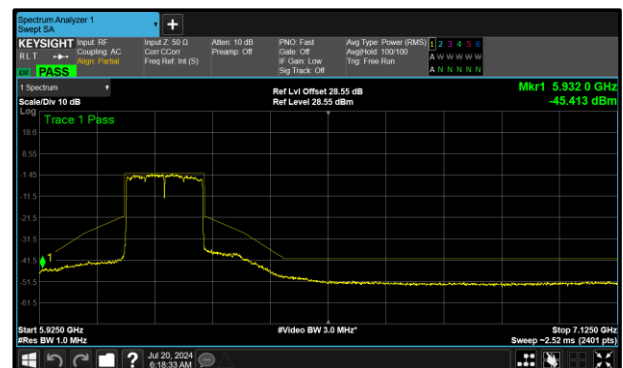


Figure 247 - B (Core 1) 802.11ax HE160 SU SP
6185 MHz (CH47)



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 SP	15.92	5988.500
802.11ax HE20 RU26 SP	15.78	5997.400
802.11ax HE20 RU52 SP	16.02	6002.800

Table 346 - Unwanted Emissions Within the RLAN Band Summary Results

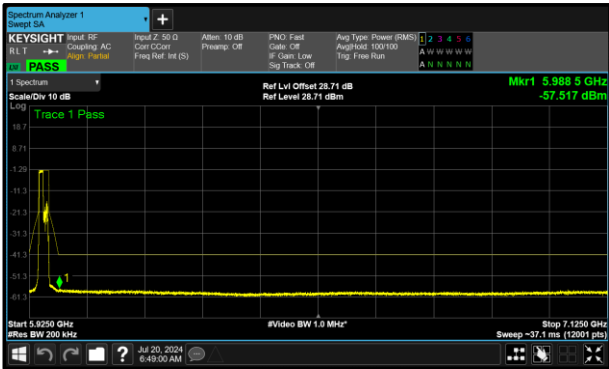


Figure 248 - A (Core 0) 802.11ax HE20 RU106 SP
5955 MHz (CH1)

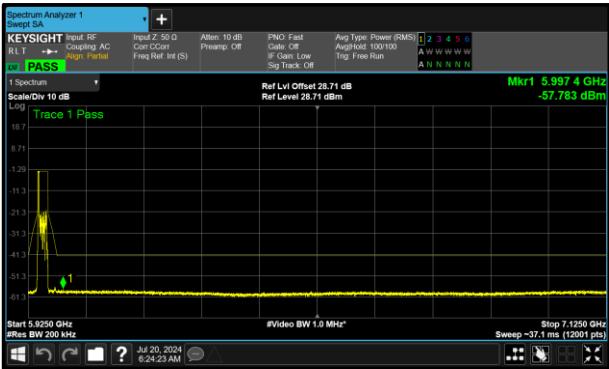


Figure 249 - A (Core 0) 802.11ax HE20 RU26 SP
5955 MHz (CH1)

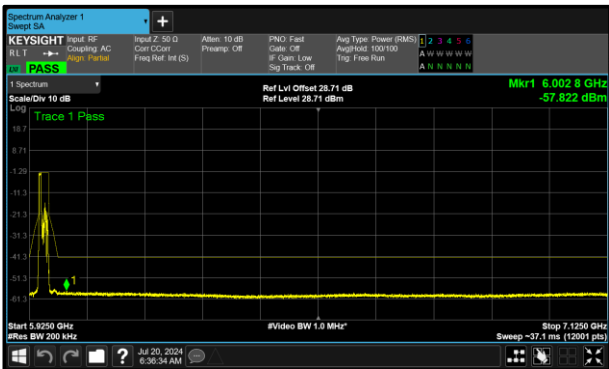


Figure 250 - A (Core 0) 802.11ax HE20 RU52 SP
5955 MHz (CH1)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	15.15	15.47	-	-
6175	15.59	15.77	-	-
6415	10.43	11.65	-	-
6435	10.69	10.94	-	-
6475	10.40	10.77	-	-
6515	10.77	10.61	-	-
6535	11.66	11.56	-	-
6695	12.35	13.36	-	-
6855	13.22	12.22	-	-

Table 347 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	12.27	13.53	-	-
6165	8.63	9.42	-	-
6405	6.22	6.47	-	-
6445	7.38	7.55	-	-
6485	5.16	8.22	-	-
6525	5.38	7.90	-	-
6565	5.74	7.52	-	-
6685	5.84	6.98	-	-
6845	6.58	6.77	-	-

Table 348 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	5.79	7.15	-	-
6145	5.23	5.41	-	-
6385	6.89	7.48	-	-
6465	7.48	6.20	-	-
6545	6.81	5.77	-	-
6625	6.57	6.57	-	-
6705	5.16	5.35	-	-
6785	5.76	6.32	-	-

Table 349 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	8.24	8.71	-	-
6185	5.26	4.61	-	-
6345	5.47	5.28	-	-
6505	5.57	6.02	-	-
6665	6.18	6.22	-	-

Table 350 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	15.78	16.77	-	-
6175 (RU26.0)	16.88	16.76	-	-
6415 (RU26.8)	18.07	17.02	-	-
6435 (RU26.0)	18.49	18.37	-	-
6475 (RU26.0)	18.68	17.25	-	-
6515 (RU26.8)	17.28	16.62	-	-
6535 (RU26.0)	18.07	18.03	-	-
6695 (RU26.0)	18.14	17.83	-	-
6855 (RU26.8)	18.11	16.52	-	-

Table 351 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	16.02	16.58	-	-
6175 (RU52.37)	16.42	17.19	-	-
6415 (RU52.40)	17.98	16.14	-	-
6435 (RU52.37)	17.77	18.46	-	-
6475 (RU52.37)	18.26	17.50	-	-
6515 (RU52.40)	17.97	16.65	-	-
6535 (RU52.37)	18.14	17.99	-	-
6695 (RU52.37)	17.74	17.96	-	-
6855 (RU52.40)	18.15	16.52	-	-

Table 352 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	15.92	16.54	-	-
6175 (RU106.53)	16.28	16.27	-	-
6415 (RU106.54)	17.93	17.84	-	-
6435 (RU106.53)	18.03	17.63	-	-
6475 (RU106.53)	17.88	17.81	-	-
6515 (RU106.54)	17.88	17.51	-	-
6535 (RU106.53)	17.79	17.74	-	-
6695 (RU106.53)	18.46	17.44	-	-
6855 (RU106.54)	18.03	18.23	-	-

Table 353 - Unwanted Emissions Within the Band Results

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU VLP	5.12	5928.200
802.11ax HE40 SU VLP	5.21	6026.276
802.11ax HE80 SU VLP	4.89	6065.500
802.11ax HE160 SU VLP	5.55	5940.000

Table 354 - Unwanted Emissions Within the RLAN Band Summary Results

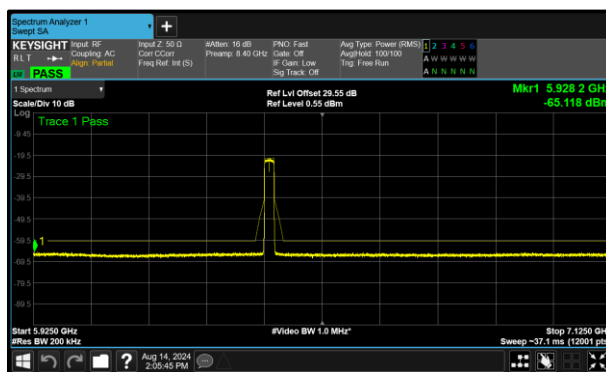


Figure 251 - A(Core 0) 802.11ax HE20 SU VLP
6415 MHz (CH93)

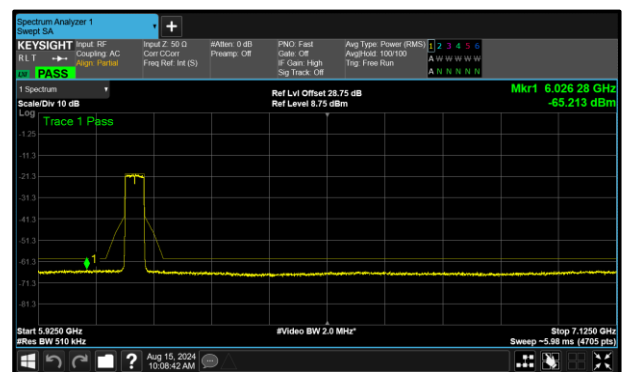


Figure 252 - A(Core 0) 802.11ax HE40 SU VLP
6125 MHz (CH35)

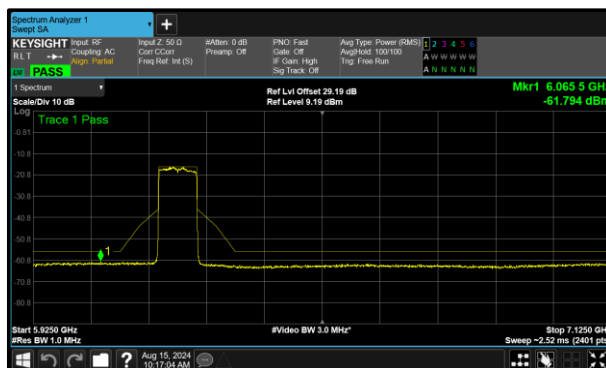


Figure 253 - A(Core 0) 802.11ax HE80 SU VLP
6225 MHz (CH55)

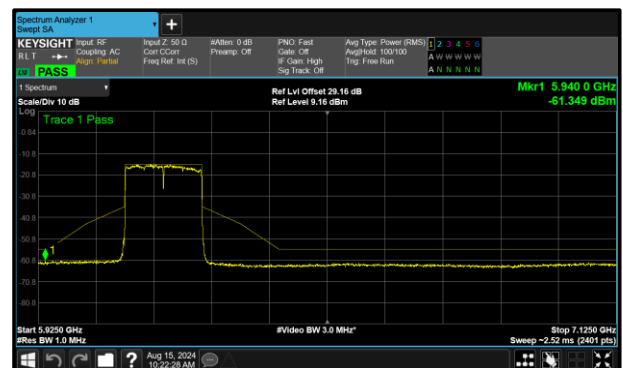


Figure 254 - A(Core 0) 802.11ax HE160 SU VLP
6185 MHz (CH47)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6275	5.52	6.08	-	-
6335	5.52	5.92	-	-
6415	5.12	5.54	-	-
6535	8.78	9.30	-	-
6695	8.85	5.51	-	-
6855	8.54	9.01	-	-

Table 355 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6125	5.21	5.51	-	-
6245	5.30	5.95	-	-
6405	6.94	7.48	-	-
6565	6.82	7.03	-	-
6685	7.01	6.07	-	-
6845	6.64	6.49	-	-

Table 356 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	5.72	5.79	-	-
6225	4.89	6.13	-	-
6385	6.44	6.70	-	-
6625	6.73	6.55	-	-
6705	6.74	7.11	-	-
6785	6.81	7.41	-	-

Table 357 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	5.55	6.10	-	-
6345	6.78	7.01	-	-
6665	6.91	7.45	-	-

Table 358 - Unwanted Emissions Within the Band Results

MIMO SDM

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU LPI	15.71	6442.300
802.11ax HE40 SU LPI	9.82	6002.551
802.11ax HE80 SU LPI	8.34	6932.000
802.11ax HE160 SU LPI	8.21	5939.000

Table 359 - Unwanted Emissions Within the RLAN Band Summary Results

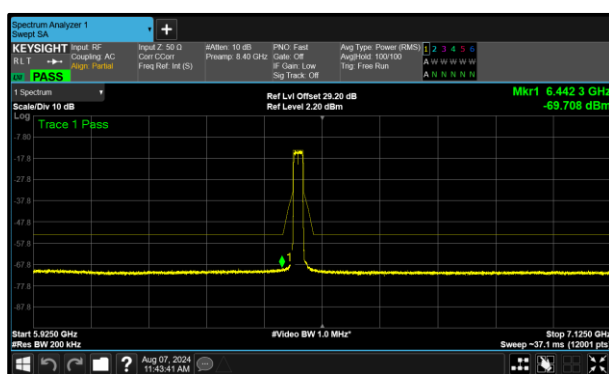


Figure 255 - B (Core 1) 802.11ax HE20 SU LPI
6475 MHz (CH105)

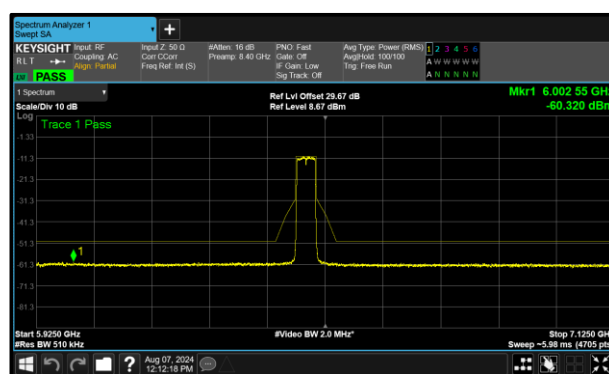


Figure 256 - A (Core 0) 802.11ax HE40 SU LPI
6485 MHz (CH107)

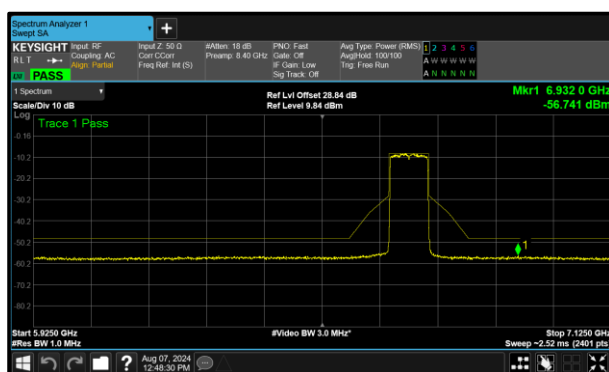


Figure 257 - B (Core 1) 802.11ax HE80 SU LPI
6705 MHz (CH151)

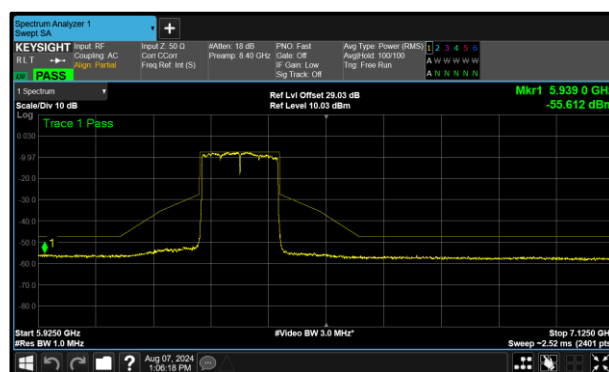


Figure 258 - B (Core 1) 802.11ax HE160 SU LPI
6345 MHz (CH79)



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 LPI	5.91	6410.700
802.11ax HE20 RU26 LPI	14.89	7105.600
802.11ax HE20 RU52 LPI	5.84	6336.000

Table 360 - Unwanted Emissions Within the RLAN Band Summary Results

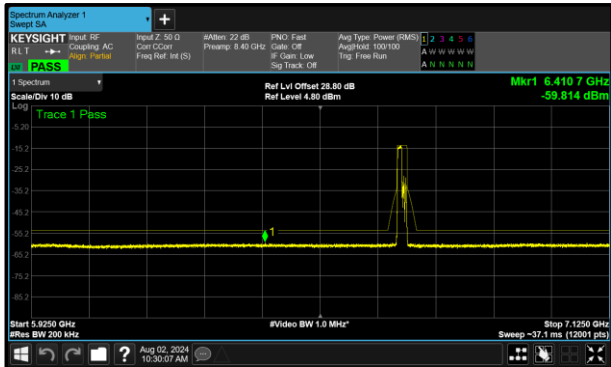


Figure 259 - B (Core 1) 802.11ax HE20 RU106 LPI
6695 MHz (CH149)

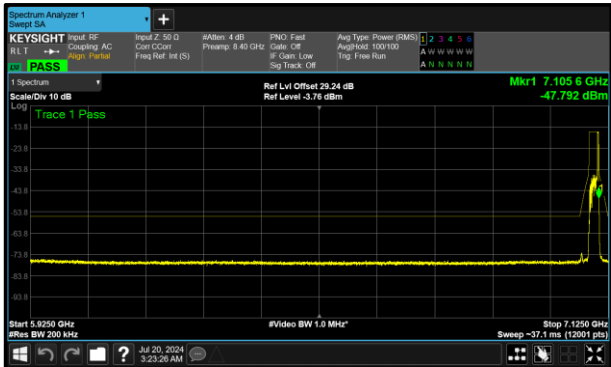


Figure 260 - B (Core 1) 802.11ax HE20 RU26 LPI
7095 MHz (CH229)

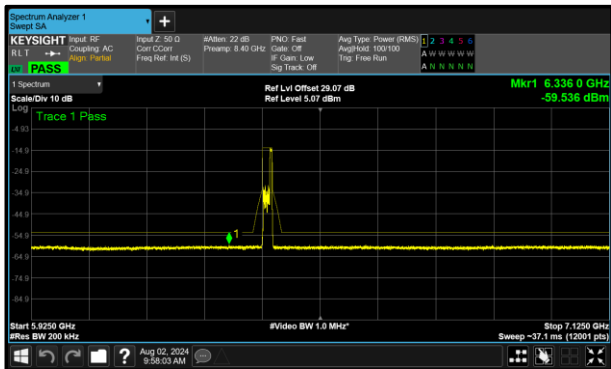


Figure 261 - B (Core 1) 802.11ax HE20 RU52 LPI
6415 MHz (CH93)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	17.90	17.20	-	-
6175	17.22	17.08	-	-
6415	16.42	17.15	-	-
6435	16.89	17.14	-	-
6475	17.65	15.71	-	-
6515	17.47	17.58	-	-
6535	17.61	17.21	-	-
6695	16.91	16.57	-	-
6855	17.75	17.88	-	-
6875	17.17	17.56	-	-
6895	17.28	17.70	-	-
6995	16.77	17.41	-	-
7095	17.27	16.97	-	-

Table 361 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	12.52	11.49	-	-
6165	9.94	11.06	-	-
6405	10.04	10.13	-	-
6445	10.61	10.30	-	-
6485	9.82	10.17	-	-
6525	10.34	10.37	-	-
6565	10.29	9.91	-	-
6685	10.57	10.70	-	-
6845	12.02	10.90	-	-
6885	11.74	11.83	-	-
6925	11.85	11.72	-	-
7005	11.37	11.84	-	-
7085	11.69	11.66	-	-

Table 362 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	10.10	10.55	-	-
6145	10.21	8.75	-	-
6385	10.28	10.24	-	-
6465	9.70	10.02	-	-
6545	9.54	9.88	-	-
6625	8.99	9.41	-	-
6705	10.20	8.34	-	-
6785	11.11	9.83	-	-
6865	11.21	11.64	-	-
6945	9.15	9.80	-	-
7025	11.70	11.34	-	-

Table 363 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	10.06	10.32	-	-
6185	10.18	8.70	-	-
6345	9.49	8.21	-	-
6505	9.07	9.54	-	-
6665	9.59	8.69	-	-
6825	9.57	9.62	-	-
6985	10.56	9.63	-	-

Table 364 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	19.37	18.68	-	-
6175 (RU26.0)	18.61	17.52	-	-
6415 (RU26.8)	17.66	17.36	-	-
6435 (RU26.0)	19.42	17.67	-	-
6475 (RU26.0)	19.33	17.68	-	-
6515 (RU26.8)	17.43	16.18	-	-
6535 (RU26.0)	20.00	18.54	-	-
6695 (RU26.0)	19.19	17.39	-	-
6855 (RU26.8)	17.82	17.21	-	-
6875 (RU26.3)	20.15	20.63	-	-
6875 (RU26.5)	20.75	20.35	-	-
6895 (RU26.0)	19.64	18.24	-	-
6995 (RU26.0)	20.88	18.42	-	-
7095 (RU26.8)	18.15	14.89	-	-

Table 365 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	6.90	7.77	-	-
6175 (RU52.37)	8.80	9.44	-	-
6415 (RU52.40)	10.51	5.84	-	-
6435 (RU52.37)	10.95	7.41	-	-
6475 (RU52.37)	10.13	11.00	-	-
6515 (RU52.40)	11.25	7.40	-	-
6535 (RU52.37)	10.90	11.39	-	-
6695 (RU52.37)	6.83	10.49	-	-
6855 (RU52.40)	10.77	11.02	-	-
6875 (RU52.38)	9.89	7.67	-	-
6875 (RU52.39)	10.10	10.03	-	-
6895 (RU52.37)	10.28	9.82	-	-
6995 (RU52.37)	10.49	9.75	-	-
7095 (RU52.40)	10.09	10.22	-	-

Table 366 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	7.32	9.74	-	-
6175 (RU106.53)	9.05	10.01	-	-
6415 (RU106.54)	11.32	11.30	-	-
6435 (RU106.53)	7.37	10.84	-	-
6475 (RU106.53)	10.91	11.01	-	-
6515 (RU106.54)	11.45	7.58	-	-
6535 (RU106.53)	7.18	10.87	-	-
6695 (RU106.53)	11.37	5.91	-	-
6855 (RU106.54)	11.15	10.63	-	-
6875 (RU106.53)	10.69	8.62	-	-
6875 (RU106.54)	10.65	10.41	-	-
6895 (RU106.53)	10.72	10.44	-	-
6995 (RU106.53)	10.78	10.17	-	-
7095 (RU106.54)	10.64	9.85	-	-

Table 367 - Unwanted Emissions Within the Band Results

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	7.32	6834.400
802.11ax HE40 SU SP	5.90	6603.316
802.11ax HE80 SU SP	4.62	6874.000
802.11ax HE160 SU SP	3.86	5933.500

Table 368 - Unwanted Emissions Within the RLAN Band Summary Results

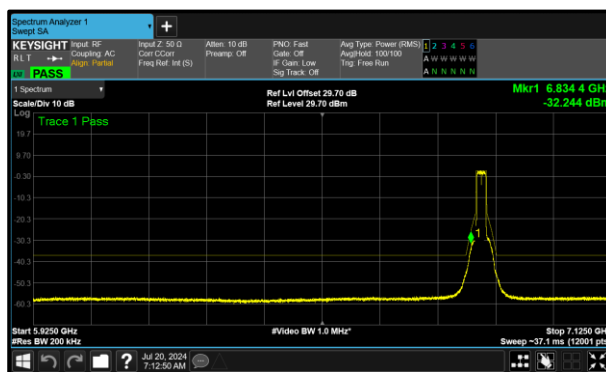


Figure 262 - A (Core 0) 802.11ax HE20 SU SP
6855 MHz (CH181)

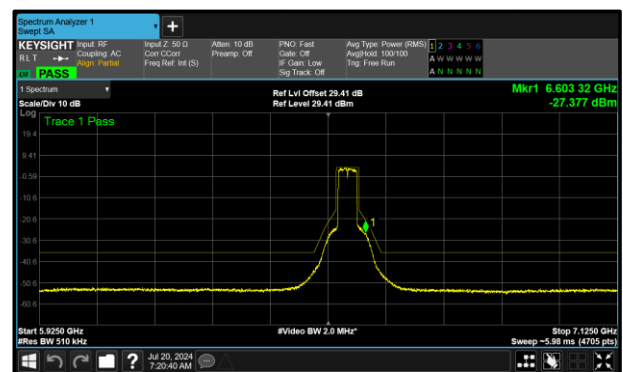


Figure 263 - A (Core 0) 802.11ax HE40 SU SP
6565 MHz (CH123)

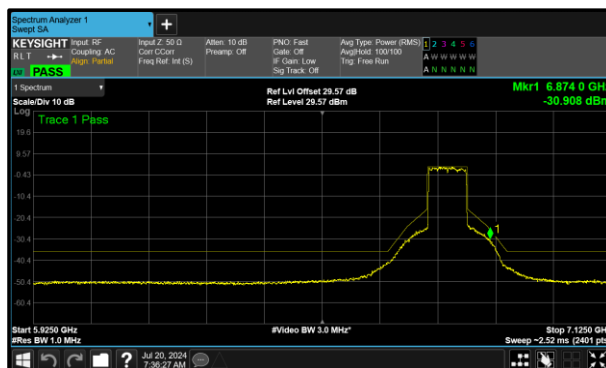


Figure 264 - A (Core 0) 802.11ax HE80 SU SP
6785 MHz (CH167)

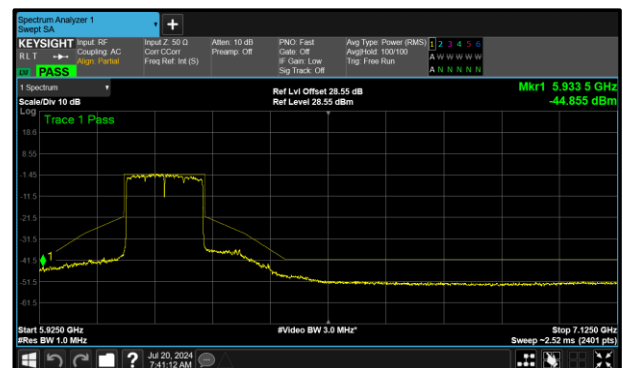


Figure 265 - B (Core 1) 802.11ax HE160 SU SP
6185 MHz (CH47)



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 SP	12.09	6427.200
802.11ax HE20 RU26 SP	15.34	6464.100
802.11ax HE20 RU52 SP	17.15	6865.800

Table 369 - Unwanted Emissions Within the RLAN Band Summary Results

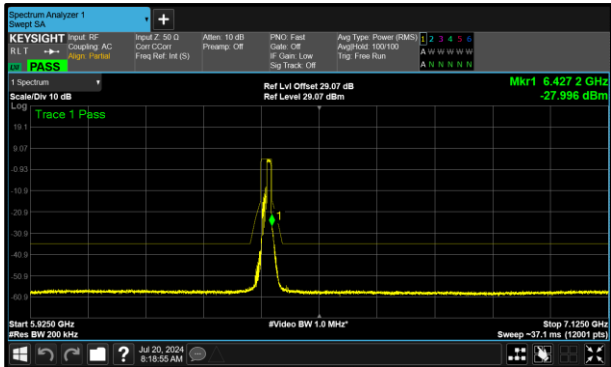


Figure 266 - B (Core 1) 802.11ax HE20 RU106 SP
6415 MHz (CH93)

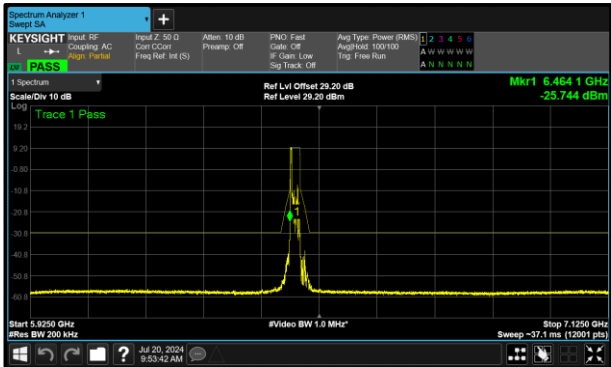


Figure 267 - B (Core 1) 802.11ax HE20 RU26 SP
6475 MHz (CH105)

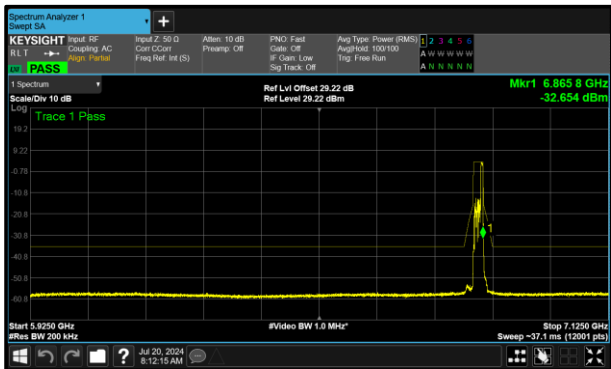


Figure 268 - B (Core 1) 802.11ax HE20 RU52 SP
6855 MHz (CH181)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	14.09	15.51	-	-
6175	10.39	12.18	-	-
6415	8.47	8.24	-	-
6435	10.70	11.16	-	-
6475	11.63	12.36	-	-
6515	12.67	12.15	-	-
6535	8.60	7.56	-	-
6695	7.52	7.44	-	-
6855	7.32	8.03	-	-

Table 370 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	7.51	9.80	-	-
6165	6.28	6.06	-	-
6405	7.86	7.76	-	-
6445	6.85	7.22	-	-
6485	6.60	6.38	-	-
6525	7.17	6.52	-	-
6565	5.90	7.57	-	-
6685	6.16	5.93	-	-
6845	6.09	6.27	-	-

Table 371 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	5.60	6.82	-	-
6145	5.23	5.02	-	-
6385	7.30	7.57	-	-
6465	8.13	7.04	-	-
6545	5.92	6.74	-	-
6625	5.89	5.60	-	-
6705	5.48	5.12	-	-
6785	4.62	7.27	-	-

Table 372 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	8.21	8.82	-	-
6185	4.67	3.86	-	-
6345	3.89	3.88	-	-
6505	5.29	6.31	-	-
6665	6.17	6.97	-	-

Table 373 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	18.58	16.47	-	-
6175 (RU26.0)	18.08	18.39	-	-
6415 (RU26.8)	19.27	17.45	-	-
6435 (RU26.0)	16.25	15.87	-	-
6475 (RU26.0)	16.01	15.34	-	-
6515 (RU26.8)	16.64	15.82	-	-
6535 (RU26.0)	20.69	16.89	-	-
6695 (RU26.0)	19.73	16.56	-	-
6855 (RU26.8)	17.56	16.74	-	-

Table 374 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	19.51	18.33	-	-
6175 (RU52.37)	19.05	19.39	-	-
6415 (RU52.40)	19.79	18.08	-	-
6435 (RU52.37)	18.18	17.91	-	-
6475 (RU52.37)	17.80	18.01	-	-
6515 (RU52.40)	17.52	17.84	-	-
6535 (RU52.37)	17.84	18.82	-	-
6695 (RU52.37)	18.49	19.07	-	-
6855 (RU52.40)	19.72	17.15	-	-

Table 375 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	18.78	18.70	-	-
6175 (RU106.53)	19.16	18.70	-	-
6415 (RU106.54)	12.83	12.09	-	-
6435 (RU106.53)	17.85	17.70	-	-
6475 (RU106.53)	17.76	16.32	-	-
6515 (RU106.54)	17.91	18.04	-	-
6535 (RU106.53)	14.65	13.50	-	-
6695 (RU106.53)	14.19	14.72	-	-
6855 (RU106.54)	15.78	14.65	-	-

Table 376 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU VLP	3.68	6946.700
802.11ax HE40 SU VLP	7.59	6003.827
802.11ax HE80 SU VLP	7.57	6000.000
802.11ax HE160 SU VLP	3.92	7066.000

Table 377 - Unwanted Emissions Within the RLAN Band Summary Results

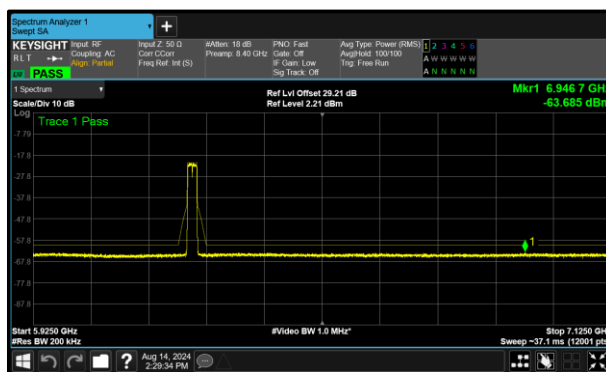


Figure 269 – A (Core 0) 802.11ax HE20 SU VLP
6255 MHz (CH61)

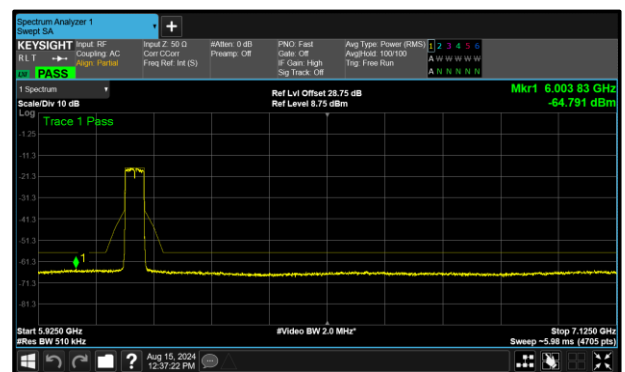


Figure 270 – A (Core 0) 802.11ax HE40 SU VLP
6125 MHz (CH35)

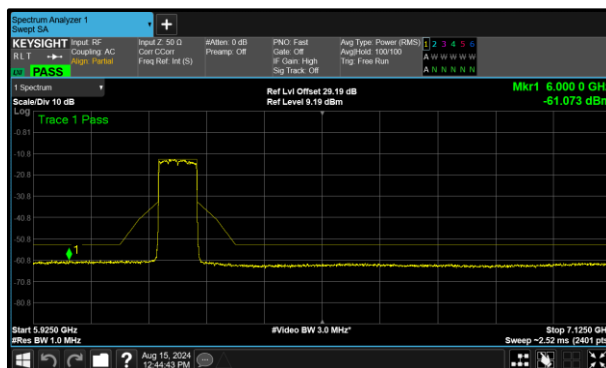


Figure 271 – A (Core 0) 802.11ax HE80 SU VLP
6225 MHz (CH55)

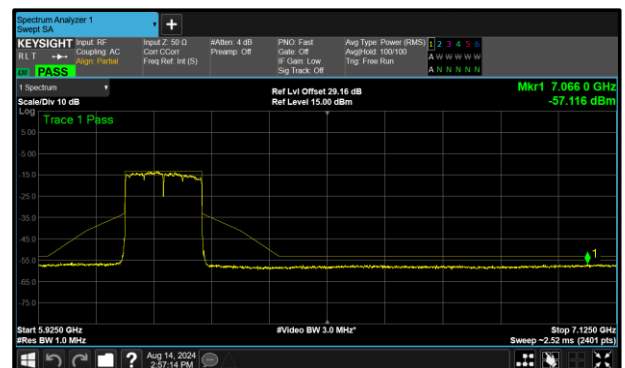


Figure 272 – A (Core 0) 802.11ax HE160 SU VLP
6185 MHz (CH47)



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 VLP	5.78	5998.600

Table 378 - Unwanted Emissions Within the RLAN Band Summary Results

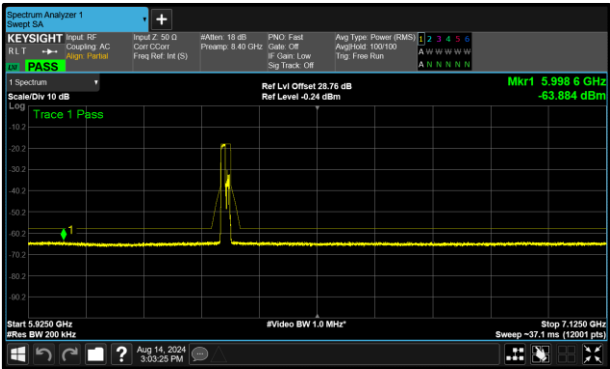


Figure 273 – B (Core 1) 802.11ax HE20 RU106 VLP 6335 MHz (CH77)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115	4.06	4.71	-	-
6255	3.68	4.23	-	-
6415	5.88	5.61	-	-
6535	5.48	5.06	-	-
6695	4.72	4.85	-	-
6855	4.71	4.13	-	-

Table 379 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6125	7.59	8.23	-	-
6245	7.87	8.14	-	-
6405	9.99	9.79	-	-
6565	9.18	9.99	-	-
6725	9.84	9.92	-	-
6845	9.66	9.80	-	-

Table 380 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	7.71	8.28	-	-
6225	7.57	8.56	-	-
6385	9.16	9.31	-	-
6625	8.94	9.24	-	-
6705	9.67	9.54	-	-
6785	8.93	9.71	-	-

Table 381 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	3.92	3.99	-	-
6345	4.40	4.36	-	-
6665	4.53	4.57	-	-

Table 382 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6275 (RU106.53)	7.08	7.97	-	-
6335 (RU106.53)	7.52	5.78	-	-
6415 (RU106.54)	7.30	7.53	-	-
6535 (RU106.53)	7.09	6.91	-	-
6695 (RU106.53)	10.59	10.33	-	-
6855 (RU106.54)	7.12	6.53	-	-

Table 383 - Unwanted Emissions Within the Band Results



TxBF

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU LPI	7.59	6081.300
802.11ax HE40 SU LPI	5.31	6038.520
802.11ax HE80 SU LPI	6.24	6135.500

Table 384 - Unwanted Emissions Within the RLAN Band Summary Results

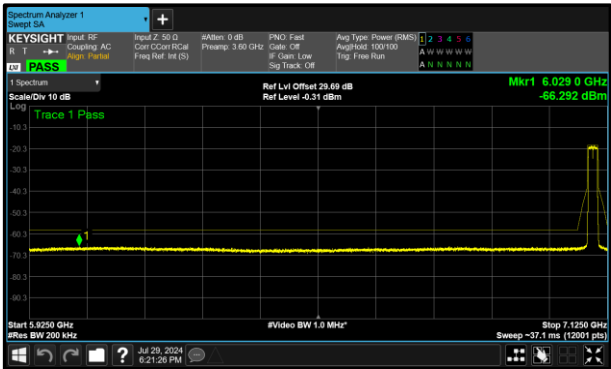


Figure 274 - B (Core 1) 802.11ax HE20 SU LPI
7095 MHz (CH229)

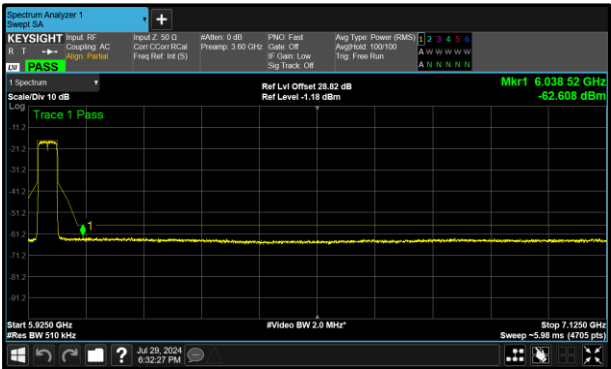


Figure 275 - B (Core 1) 802.11ax HE40 SU LPI
5965 MHz (CH3)

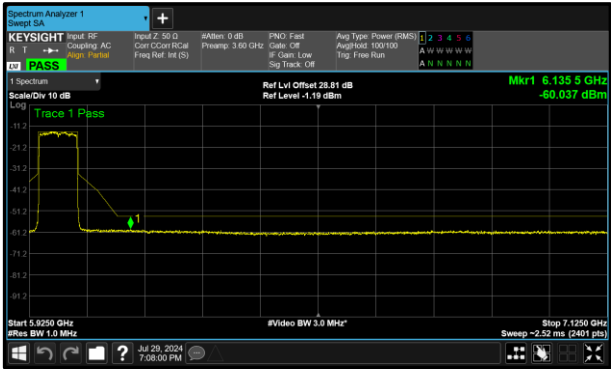


Figure 276 - B (Core 1) 802.11ax HE80 SU LPI
5985 MHz (CH7)

Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6275	7.61	8.17	-	-
6335	8.21	8.05	-	-
6415	10.10	11.20	-	-
6435	16.26	7.98	-	-
6475	8.21	7.59	-	-
6515	8.06	8.08	-	-
6535	8.19	8.44	-	-
6695	7.84	7.81	-	-
6855	8.34	7.95	-	-
6875	7.95	7.67	-	-
6895	16.22	7.93	-	-
6995	16.50	8.39	-	-
7095	7.95	7.59	-	-

Table 385 - Unwanted Emissions Within the Band Results

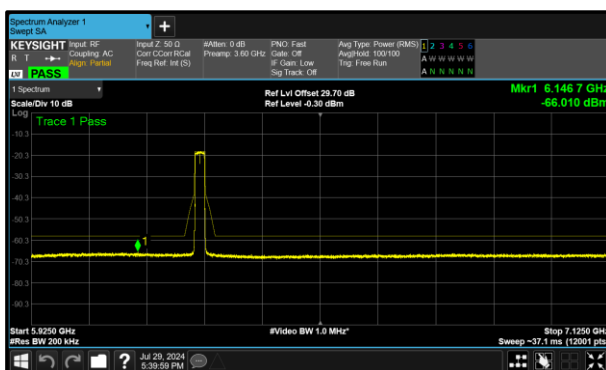


Figure 277 - A (Core 0) 6275 MHz (CH65)

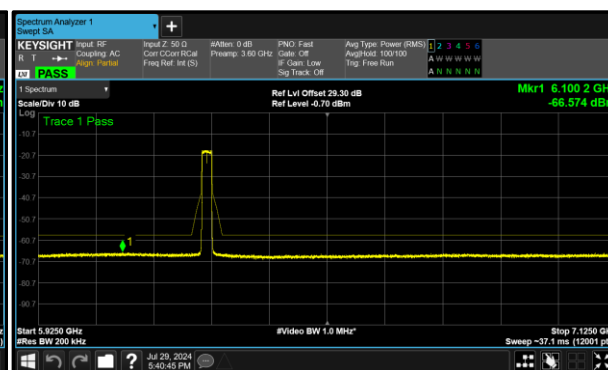


Figure 278 - B (Core 1) 6275 MHz (CH65)

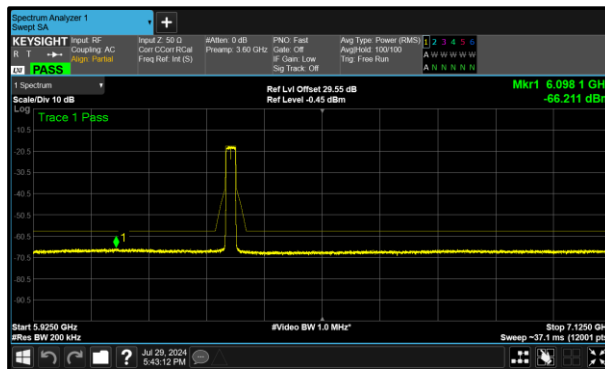


Figure 279 - A (Core 0) 6335 MHz (CH77)

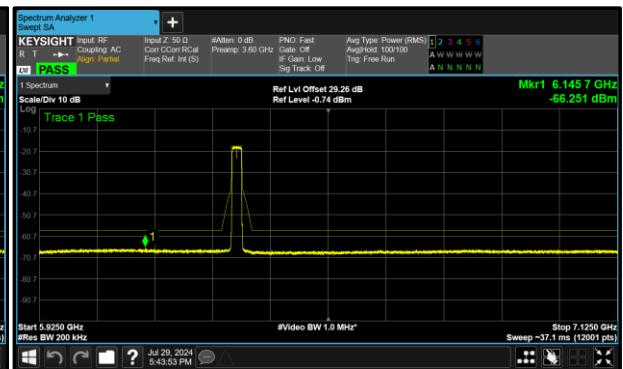


Figure 280 - B (Core 1) 6335 MHz (CH77)

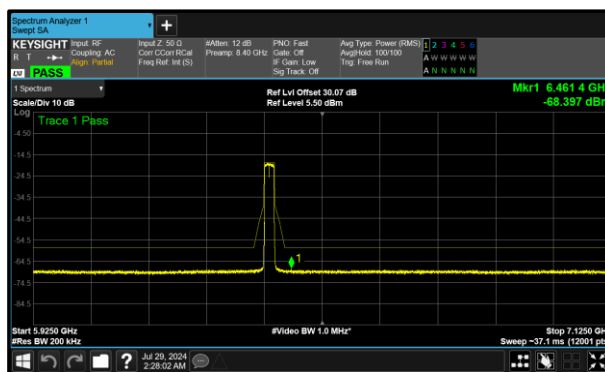


Figure 281 - A (Core 0) 6415 MHz (CH93)

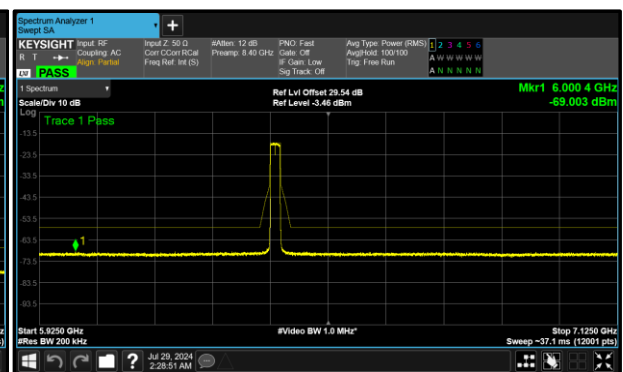


Figure 282 - B (Core 1) 6415 MHz (CH93)

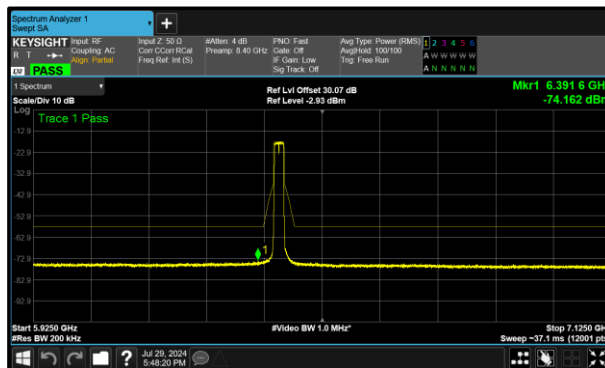


Figure 283 - A (Core 0) 6435 MHz (CH97)

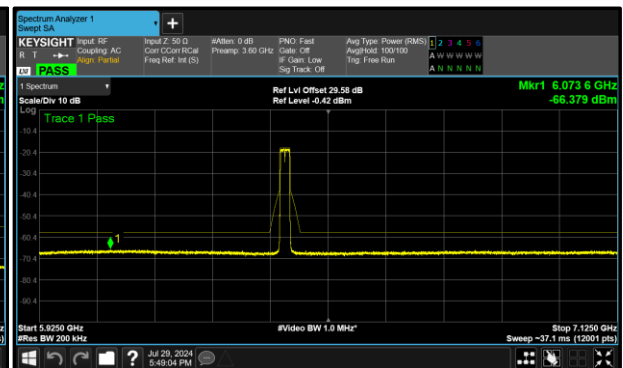


Figure 284 - B (Core 1) 6435 MHz (CH97)

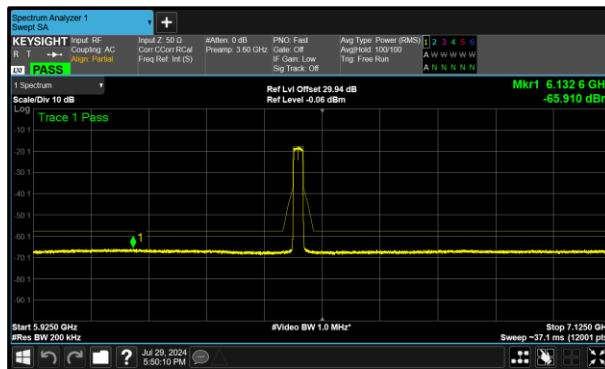


Figure 285 - A (Core 0) 6475 MHz (CH105)

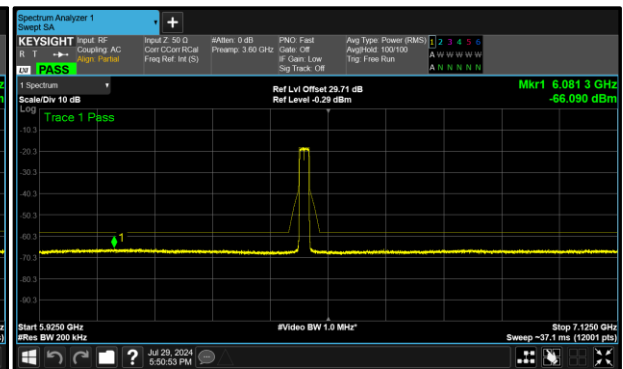


Figure 286 - B (Core 1) 6475 MHz (CH105)

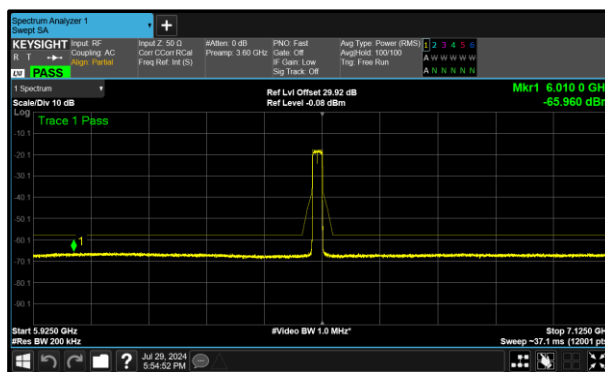


Figure 287 - A (Core 0) 6515 MHz (CH113)

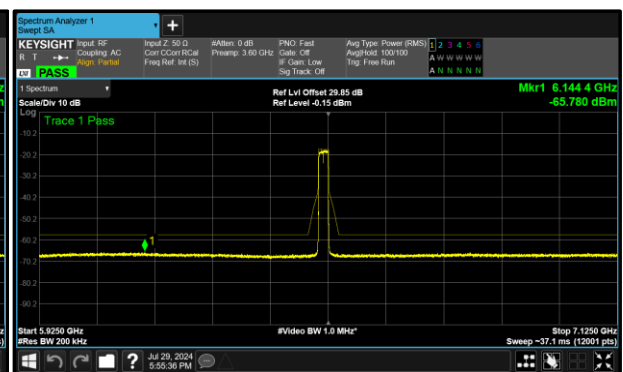


Figure 288 - B (Core 1) 6515 MHz (CH113)

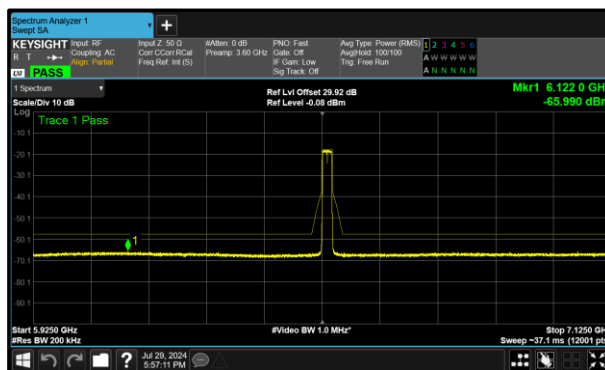


Figure 289 - A (Core 0) 6535 MHz (CH117)

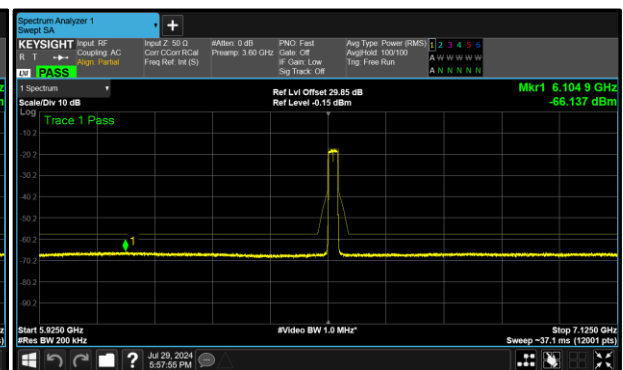


Figure 290 - B (Core 1) 6535 MHz (CH117)

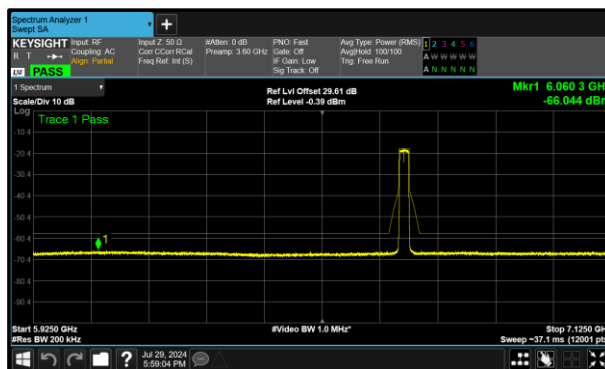


Figure 291 - A (Core 0) 6695 MHz (CH149)

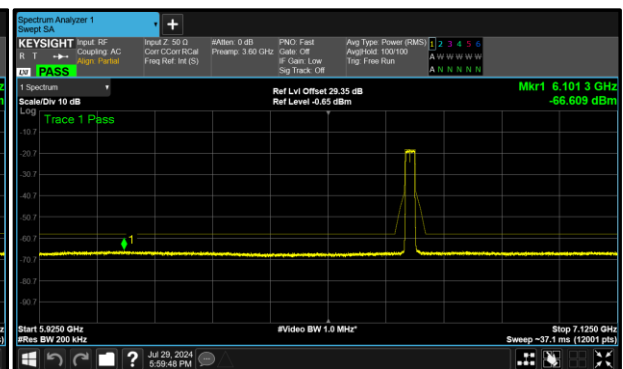


Figure 292 - B (Core 1) 6695 MHz (CH149)

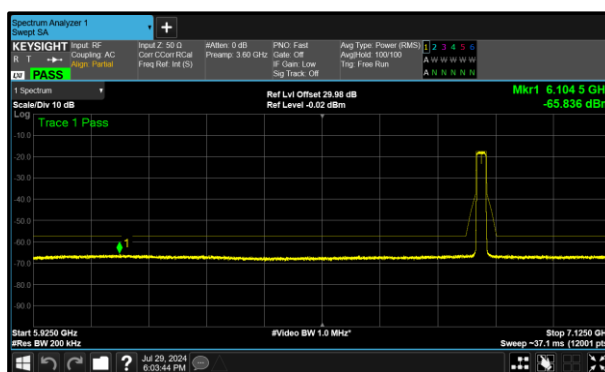


Figure 293 - A (Core 0) 6855 MHz (CH181)

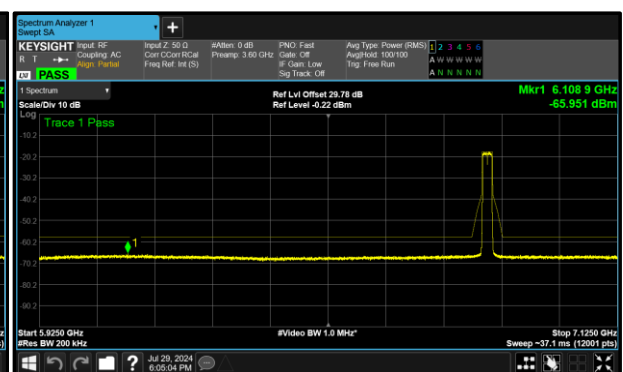


Figure 294 - B (Core 1) 6855 MHz (CH181)

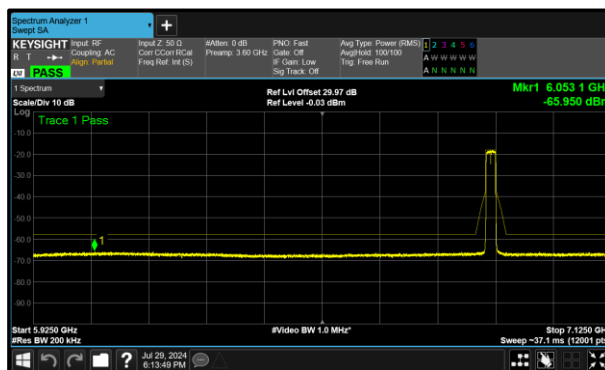


Figure 295 - A (Core 0) 6875 MHz (CH185)

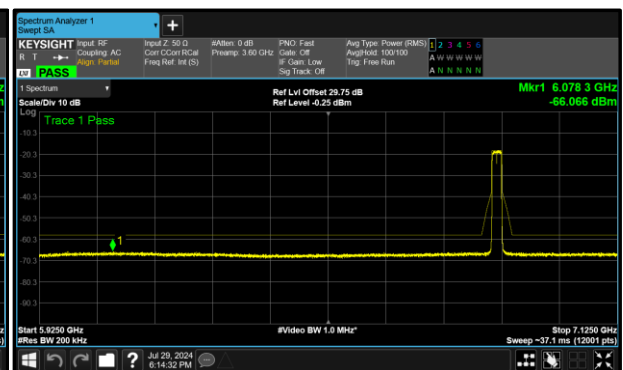


Figure 296 - B (Core 1) 6875 MHz (CH185)

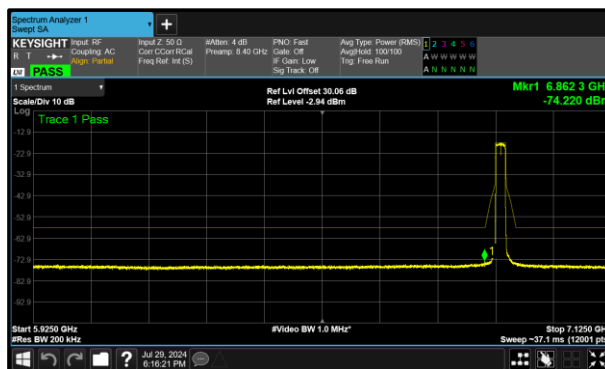


Figure 297 - A (Core 0) 6895 MHz (CH189)

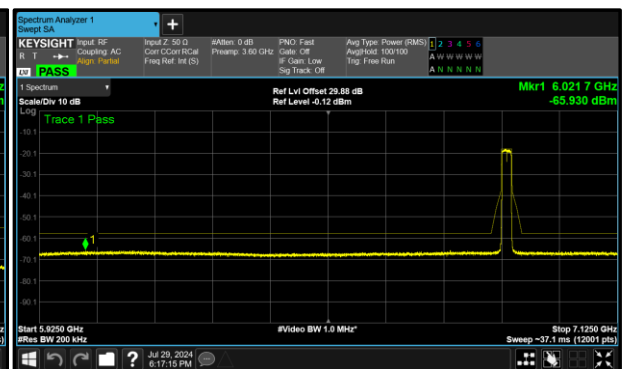


Figure 298 - B (Core 1) 6895 MHz (CH189)

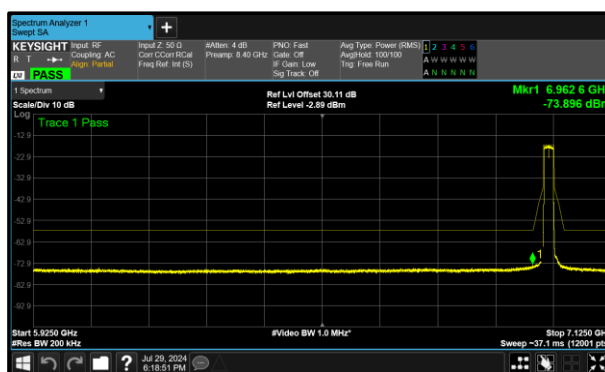


Figure 299 - A (Core 0) 6995 MHz (CH209)

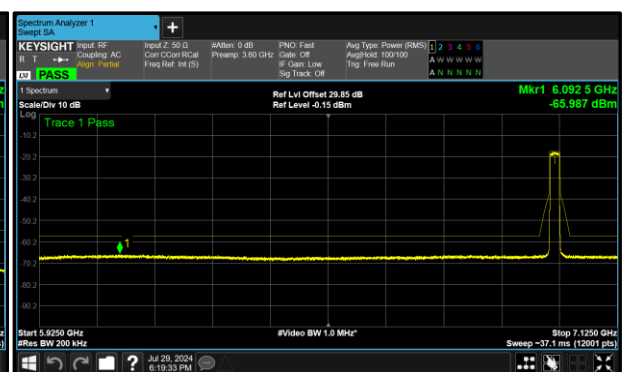


Figure 300 - B (Core 1) 6995 MHz (CH209)

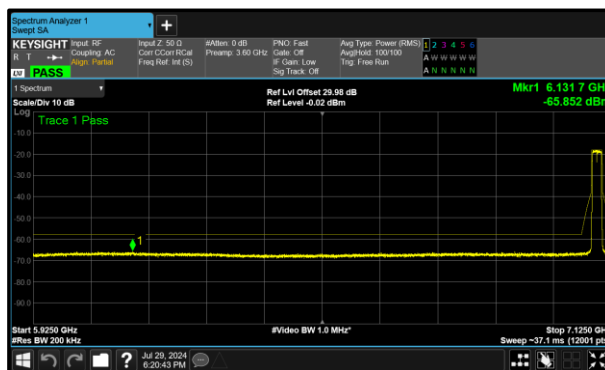


Figure 301 - A (Core 0) 7095 MHz (CH229)

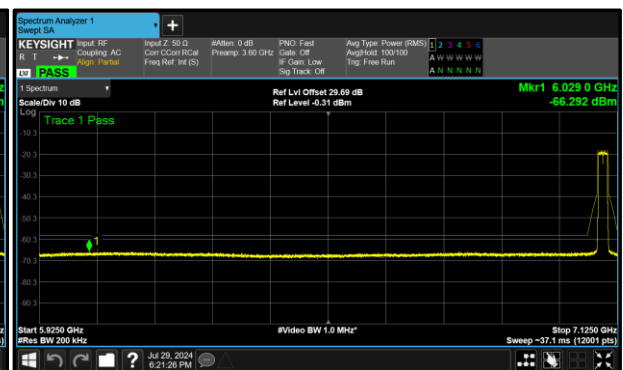


Figure 302 - B (Core 1) 7095 MHz (CH229)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	5.38	5.31	-	-
6165	6.51	6.15	-	-
6405	10.00	7.77	-	-
6445	10.49	8.68	-	-
6485	7.77	8.46	-	-
6525	8.01	8.23	-	-
6565	10.17	8.46	-	-
6685	8.68	8.92	-	-
6845	8.08	8.38	-	-
6885	11.66	8.07	-	-
6925	11.70	7.39	-	-
7005	11.28	7.74	-	-
7085	7.41	7.77	-	-

Table 386 - Unwanted Emissions Within the Band Results

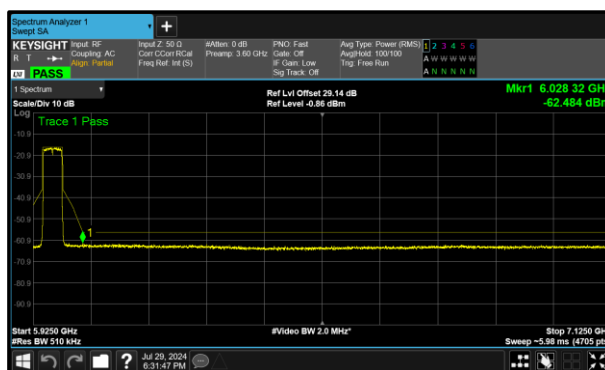


Figure 303 - A (Core 0) 5965 MHz (CH3)

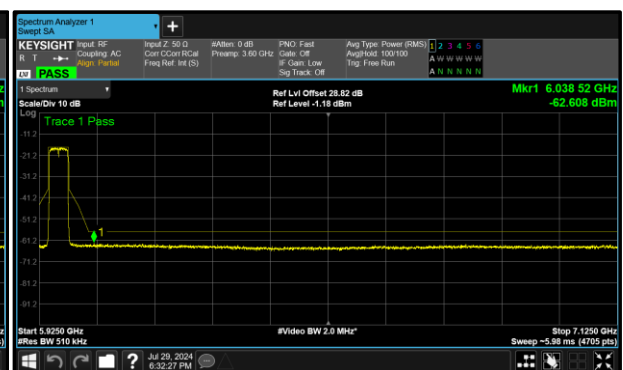


Figure 304 - B (Core 1) 5965 MHz (CH3)

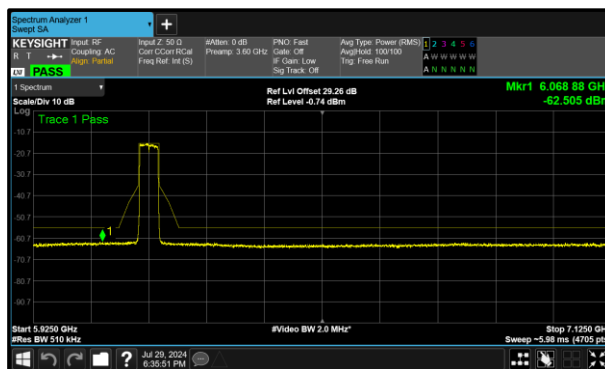


Figure 305 - A (Core 0) 6165 MHz (CH43)

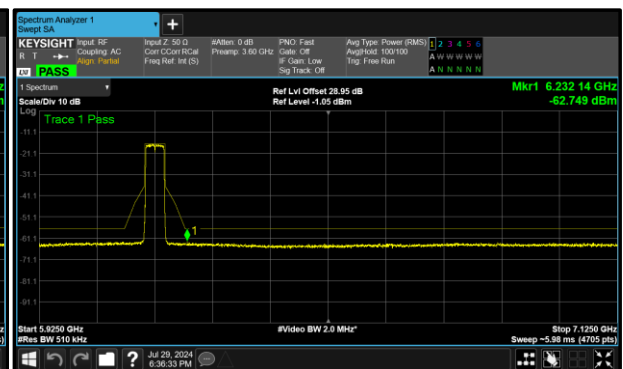


Figure 306 - B (Core 1) 6165 MHz (CH43)

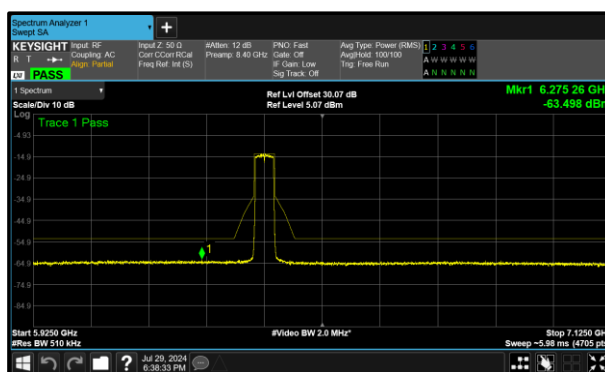


Figure 307 - A (Core 0) 6405 MHz (CH91)

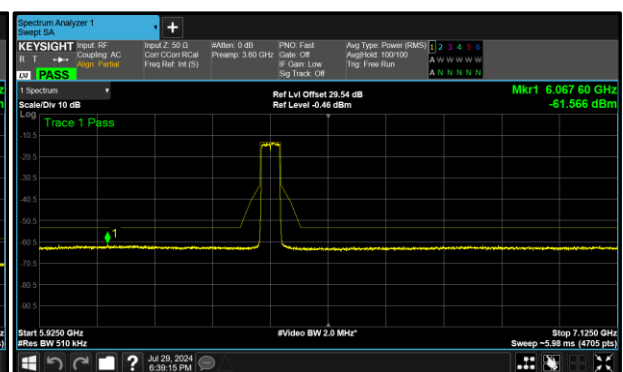


Figure 308 - B (Core 1) 6405 MHz (CH91)

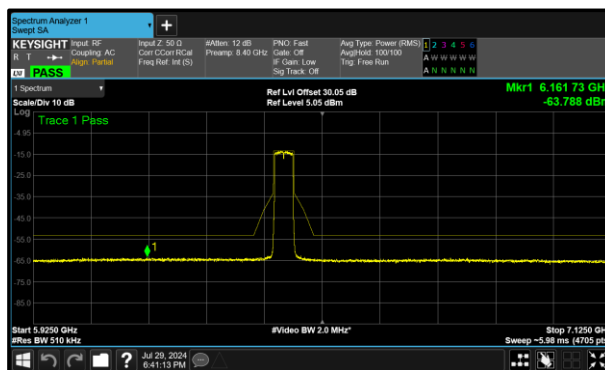


Figure 309 - A (Core 0) 6445 MHz (CH99)

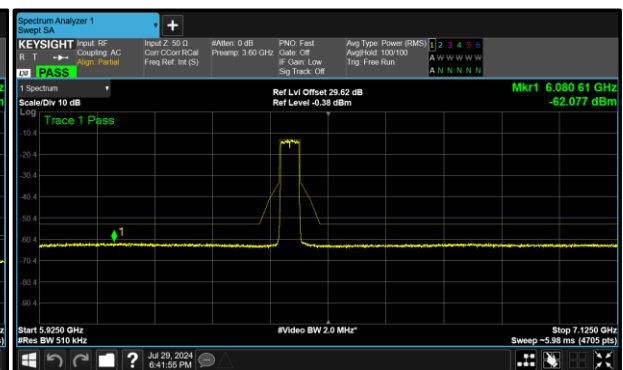


Figure 310 - B (Core 1) 6445 MHz (CH99)

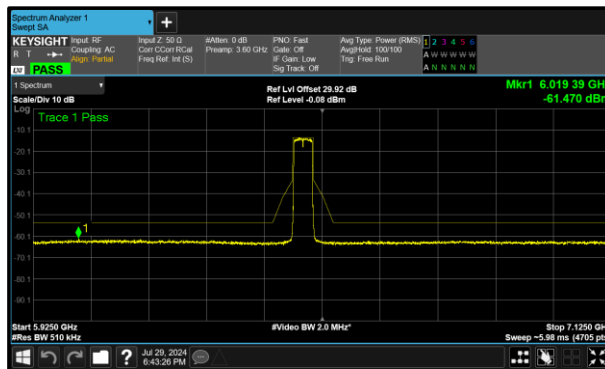


Figure 311 - A (Core 0) 6485 MHz (CH107)

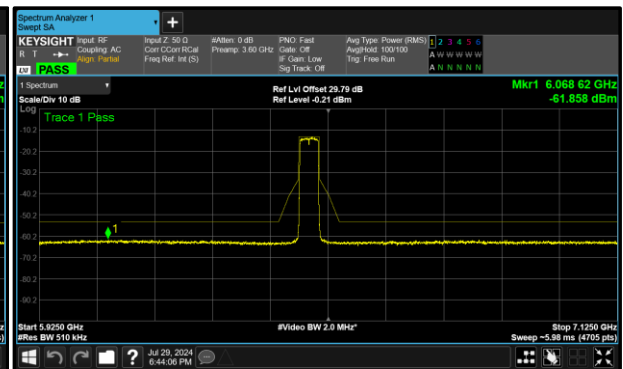


Figure 312 - B (Core 1) 6485 MHz (CH107)

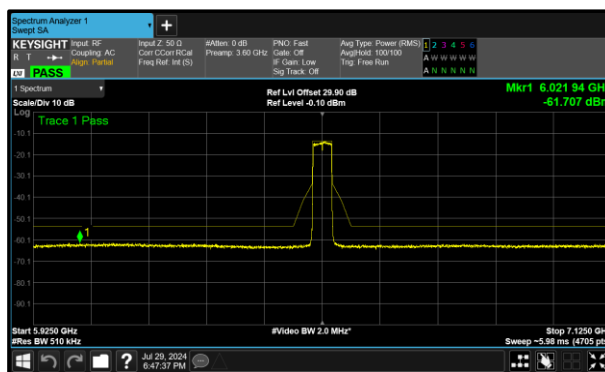


Figure 313 - A (Core 0) 6525 MHz (CH115)

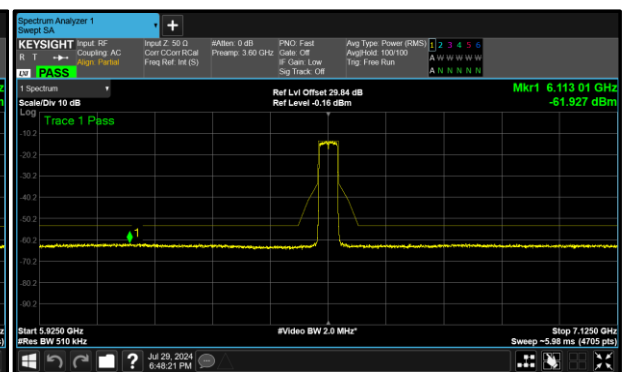


Figure 314 - B (Core 1) 6525 MHz (CH115)

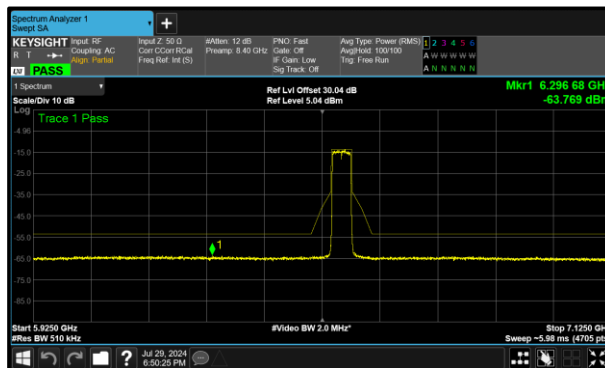


Figure 315 - A (Core 0) 6565 MHz (CH123)

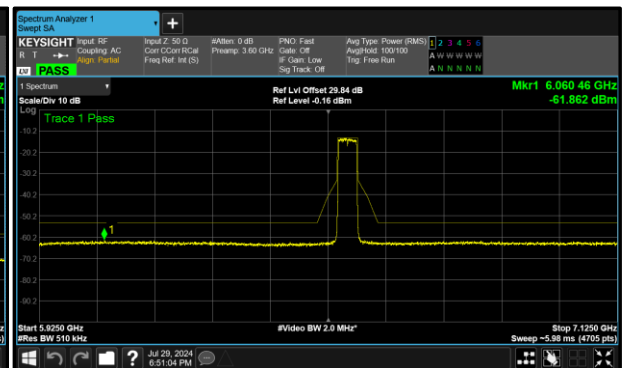
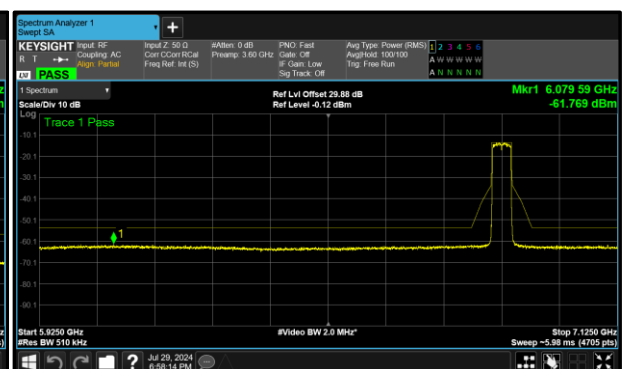
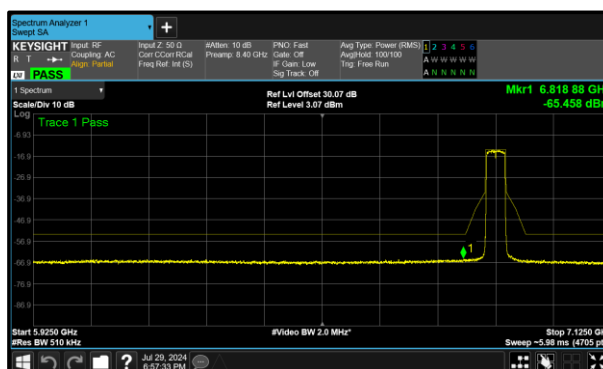
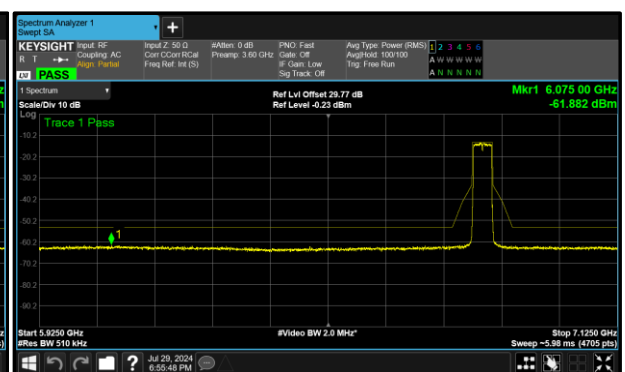
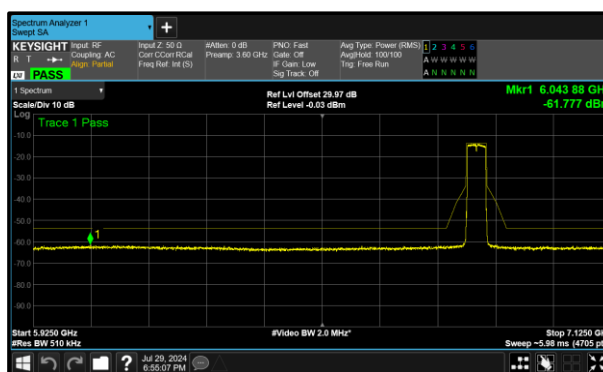
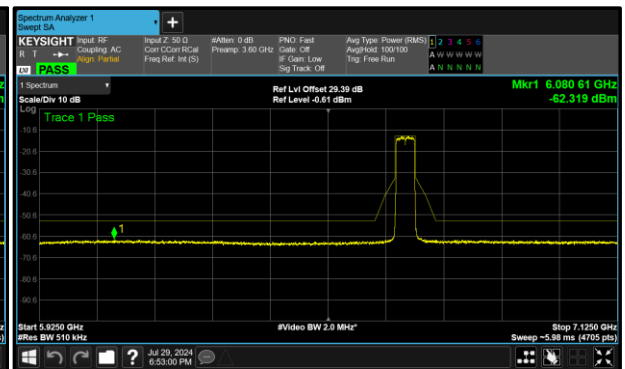
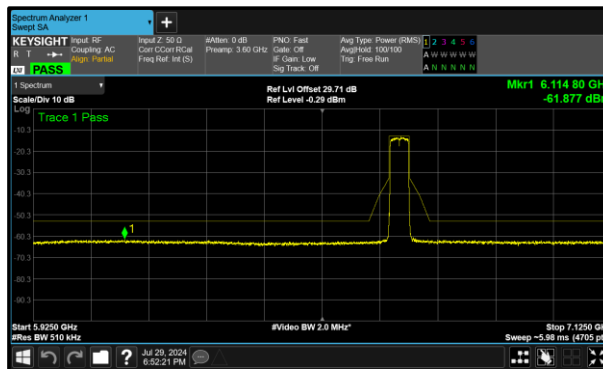


Figure 316 - B (Core 1) 6565 MHz (CH123)



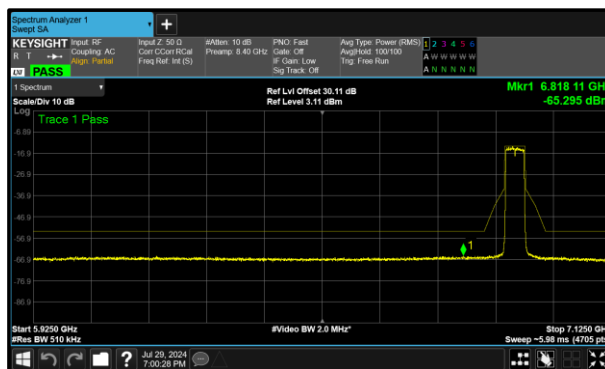


Figure 323 - A (Core 0) 6925 MHz (CH195)

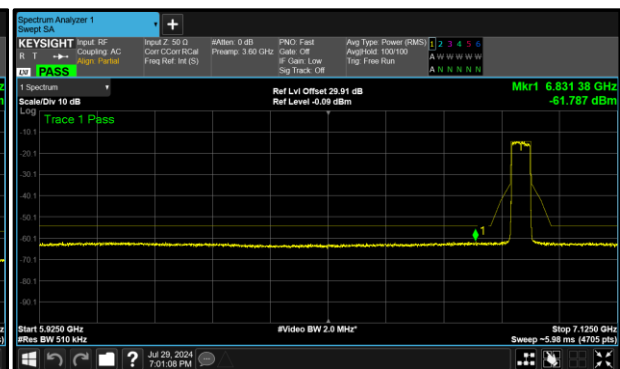


Figure 324 - B (Core 1) 6925 MHz (CH195)

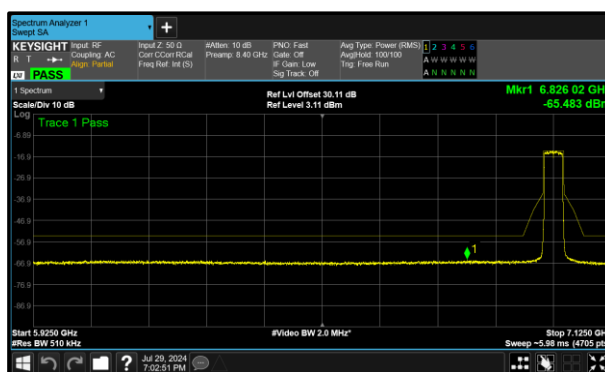


Figure 325 - A (Core 0) 7005 MHz (CH211)

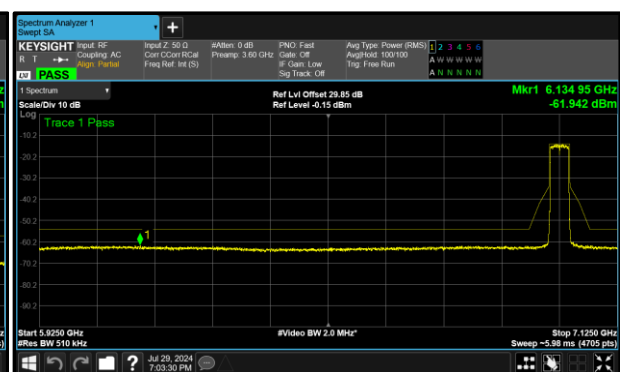


Figure 326 - B (Core 1) 7005 MHz (CH211)

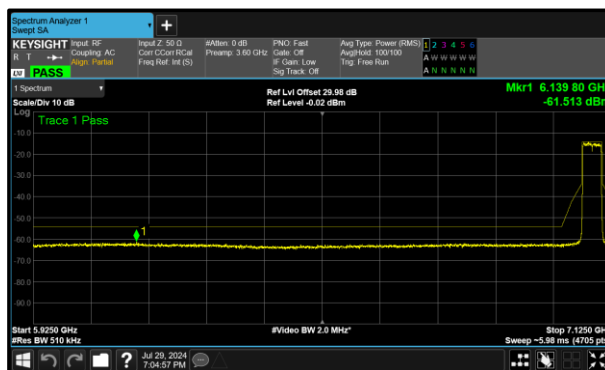


Figure 327 - A (Core 0) 7085 MHz (CH227)

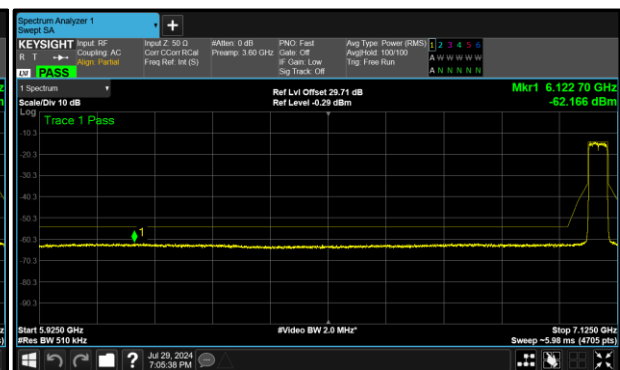


Figure 328 - B (Core 1) 7085 MHz (CH227)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	6.28	6.24	-	-
6145	6.71	7.42	-	-
6385	9.96	9.03	-	-
6465	9.71	8.60	-	-
6545	10.09	8.24	-	-
6625	9.65	8.85	-	-
6705	8.55	8.74	-	-
6785	7.97	8.71	-	-
6865	7.65	8.03	-	-
6945	9.70	7.07	-	-
7025	9.84	7.42	-	-

Table 387 - Unwanted Emissions Within the Band Results

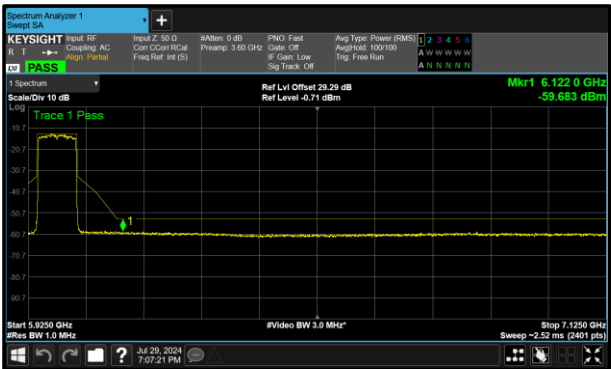


Figure 329 - A (Core 0) 5985 MHz (CH7)

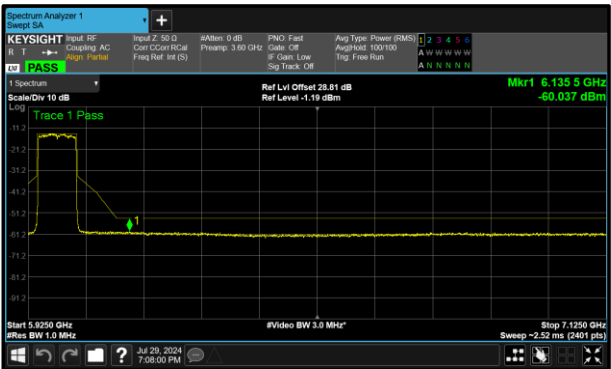


Figure 330 - B (Core 1) 5985 MHz (CH7)