

FCC TEST REPORT

REPORT NO.: RF920724R01A

MODEL NO.: SL-5354AP Aries

OEM MODEL NO.: NL-5354AP Aries

RECEIVED: July 24, 2003

TESTED: July 18 ~ July 30, 2003

APPLICANT: SENAIO INTERNATIONAL CO., LTD.

ADDRESS: 2F, NO. 351, CHUNG CHENG RD., HSIEN-TIEN, TAIPEI, TAIWAN, R.O.C

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

This test report consists of 126 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS.....	6
3.	GENERAL INFORMATION	8
3.1	GENERAL DESCRIPTION OF EUT.....	8
3.2	DESCRIPTION OF TEST MODES.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4	DESCRIPTION OF SUPPORT UNITS.....	11
4.	TEST TYPES AND RESULTS (FOR PART 802.11b & DRAFT 802.11g)	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS.....	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.2.2	TEST INSTRUMENTS	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS.....	24
4.2.7	TEST RESULTS	25
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP	34
4.3.6	EUT OPERATING CONDITIONS.....	34
4.3.7	TEST RESULTS	35
4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	INSTRUMENTS.....	43
4.4.3	TEST PROCEDURES	44
4.4.4	DEVIATION FROM TEST STANDARD	44
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS.....	44
4.4.7	TEST RESULTS	45



4.5	POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.5.2	TEST INSTRUMENTS	46
4.5.3	TEST PROCEDURE	47
4.5.4	DEVIATION FROM TEST STANDARD	47
4.5.5	TEST SETUP	47
4.5.6	EUT OPERATING CONDITION	47
4.5.7	TEST RESULTS	48
4.6	BAND EDGES MEASUREMENT	56
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	56
4.6.2	TEST INSTRUMENTS	56
4.6.3	TEST PROCEDURE	56
4.6.4	DEVIATION FROM TEST STANDARD	56
4.6.5	EUT OPERATING CONDITION	57
4.6.6	TEST RESULTS	57
4.7	ANTENNA REQUIREMENT	62
4.7.1	STANDARD APPLICABLE	62
4.7.2	ANTENNA CONNECTED CONSTRUCTION	62
5.	TEST TYPES AND RESULTS (FOR PART 802.11a).....	63
5.1	CONDUCTED EMISSION MEASUREMENT	63
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	63
5.1.2	TEST INSTRUMENTS	63
5.1.3	TEST PROCEDURES	64
5.1.4	DEVIATION FROM TEST STANDARD	64
5.1.5	TEST SETUP	65
5.1.6	EUT OPERATING CONDITIONS.....	65
5.1.7	TEST RESULTS	66
5.2	RADIATED EMISSION MEASUREMENT	68
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	68
5.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	69
5.2.3	TEST INSTRUMENTS	70
5.2.4	TEST PROCEDURES	71
5.2.5	DEVIATION FROM TEST STANDARD	71
5.2.6	TEST SETUP	72
5.2.7	EUT OPERATING CONDITIONS.....	72
5.2.8	TEST RESULTS	73
5.3	PEAK TRANSMIT POWER MEASUREMENT	81
5.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	81
5.3.2	TEST INSTRUMENTS	81
5.3.3	TEST PROCEDURE	82
5.3.4	DEVIATION FROM TEST STANDARD	82
5.3.5	TEST SETUP	82
5.3.6	EUT OPERATING CONDITIONS.....	82
5.3.7	TEST RESULTS	83



5.4	PEAK POWER EXCURSION MEASUREMENT	96
5.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	96
5.4.2	TEST INSTRUMENTS	96
5.4.3	TEST PROCEDURE	97
5.4.4	DEVIATION FROM TEST STANDARD	97
5.4.5	TEST SETUP	97
5.4.6	EUT OPERATING CONDITIONS.....	97
5.4.7	TEST RESULTS	98
5.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	105
5.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	105
5.5.2	TEST INSTRUMENTS	105
5.5.3	TEST PROCEDURES	106
5.5.4	DEVIATION FROM TEST STANDARD	106
5.5.5	TEST SETUP	106
5.5.6	EUT OPERATING CONDITIONS.....	106
5.5.7	TEST RESULTS	107
5.6	FREQUENCY STABILITY	114
5.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	114
5.6.2	TEST INSTRUMENTS	114
5.6.3	TEST PROCEDURE	114
5.6.4	DEVIATION FROM TEST STANDARD	115
5.6.5	TEST SETUP	115
5.6.6	EUT OPERATING CONDITION	115
5.6.7	TEST RESULTS	116
5.7	BAND EDGES MEASUREMENT	117
5.7.1	TEST INSTRUMENTS	117
5.7.2	TEST PROCEDURE	117
5.7.3	EUT OPERATING CONDITION	117
5.7.4	TEST RESULTS	118
5.8	ANTENNA REQUIREMENT	123
5.8.1	STANDARD APPLICABLE	123
5.8.2	ANTENNA CONNECTED CONSTRUCTION	123
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	124
7.	INFORMATION ON THE TESTING LABORATORIES.....	126



1. CERTIFICATION

PRODUCT : 802.11a+802.11g Dual Band Wireless Access Point
BRAND NAME : SENAO
MODEL NO. : SL-5354AP Aries
OEM BRAND NAME : EnGenius
MODEL NO. : NL-5354AP Aries
TEST ITEM: Engineering Sample
APPLICANT : SENAO INTERNATIONAL CO., LTD.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
Subpart E (Section 15.407), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from July 18 ~ July 30, 2003. The test record data evaluation and Equipment under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Rennie Wang, **DATE:** August 7, 2003
Rennie Wang

APPROVED BY: Angus Hsu, **DATE:** August 7, 2003
Angus Hsu, Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -9.70dBuV at 0.431MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.60dBuV/m at 2390.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



APPLIED STANDARD: 47 CFR Part 15, Subpart E			
Standard Section	Test Type	Result	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -15.81dBuV at 0.494MHz
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30 MHz – 40000 MHz	PASS	Meet the requirement of limit Minimum passing margin is -1.90dBuV/m at 495.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11a+802.11g Dual Band Wireless Access Point
MODEL NO.	SL-5354AP Aries
OEM MODEL NO.	NL-5354AP Aries
POWER SUPPLY	12VDC from AC adapter
MODULATION	BPSK, QPSK, CCK, 16QAM, 64QAM
TRANSFER RATE	up to 54Mbps
FREQUENCY RANGE	802.11b: 2412MHz ~ 2462MHz 802.11a: 5.15GHz ~ 5.35GHz, 5.725GHz ~ 5.825GHz
NUMBER OF CHANNEL	802.11b: 11 802.11a: 12
CHANNEL SPACING	802.11b: 5MHz 802.11a: 20MHz
OUTPUT POWER	802.11b and draft 802.11g: 16.42dBm 802.11a: 17.82dBm
DATA CABLE	NA
ANTENNA TYPE	Dipole antenna
ANTENNA GAIN	802.11b: 4dBi 802.11a: 5dBi
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was operated with following Adapter.

Model No.:	AM-121000
Input power :	120VAC, 60Hz, 60W
Output power :	12VDC, 1000mA

2. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11g technology.
3. IEEE 802.11a, 802.11b, and Draft 802.11g Compliant.
4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

For 802.11b and draft 802.11g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate of 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

For 802.11a: Twelve channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	5180 MHz	7	5300 MHz
2	5200 MHz	8	5320 MHz
3	5220 MHz	9	5745MHz
4	5240 MHz	10	5765MHz
5	5260 MHz	11	5785MHz
6	5280 MHz	12	5805MHz

NOTE:

1. The EUT allows data rates of up to 54Mbps and was tested at 6Mbps data rate that produced the highest output power.
2. Channel 1, 4, 5, 8, 9 and 12 are the closest frequencies to the band edge, were chosen for final test.



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11a+802.11g Dual Band Wireless Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247),
Subpart E (15.407). ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	PP01L	TW-09C748-12800-19O-B220	FCC DoC Approved
2	USB 10/100 Fast Ethernet	D-Link	DU-E100	UR15001597	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (FOR PART 802.11b & draft 802.11g)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May. 01, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

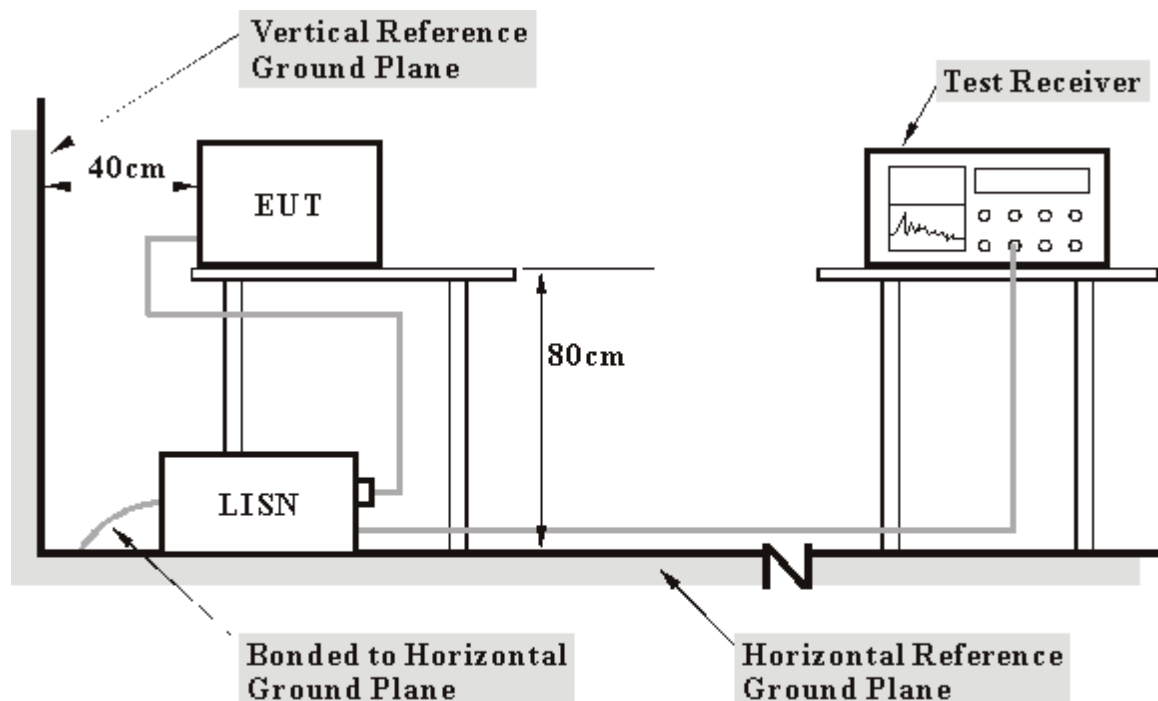

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- Placed the EUT on the testing table.
- Prepared another computer system to act as a communication partner and placed it outside of testing area.
- The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- The communication partner sent data to EUT by command "PIN".

4.1.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.06	48.03	-	48.09	-	65.38	55.38	-17.29	-
2	0.220	0.06	46.09	-	46.15	-	62.81	52.81	-16.66	-
3	0.341	0.06	42.53	-	42.59	-	59.17	49.17	-16.58	-
4	0.459	0.07	40.92	-	40.99	-	56.72	46.72	-15.73	-
5	5.430	0.27	27.52	-	27.79	-	60.00	50.00	-32.21	-
6	24.141	0.85	23.09	-	23.94	-	60.00	50.00	-36.06	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

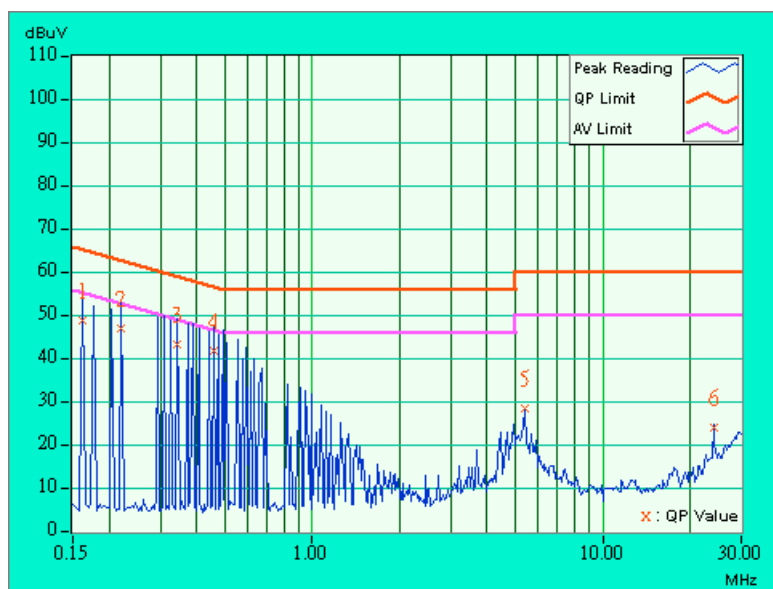

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.05	46.95	-	47.00	-	64.25	54.25	-17.25	-
2	0.213	0.05	15.75	-	15.80	-	63.11	53.11	-47.31	-
3	0.431	0.06	47.47	13.48	47.53	13.54	57.23	47.23	-9.70	-33.69
4	0.564	0.08	25.33	-	25.41	-	56.00	46.00	-30.59	-
5	5.430	0.25	22.83	-	23.08	-	60.00	50.00	-36.92	-
6	17.496	0.50	7.72	-	8.22	-	60.00	50.00	-51.78	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

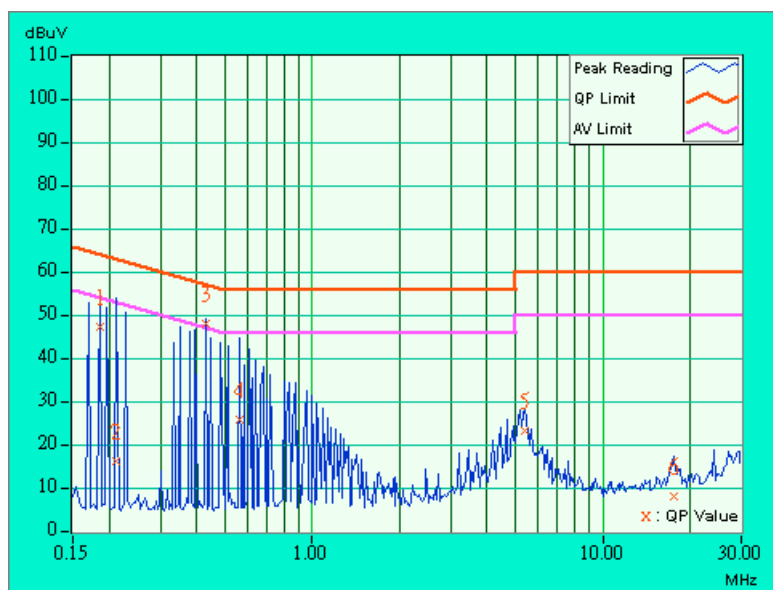

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.06	45.83	-	45.89	-	62.66	52.66	-16.77	-
2	0.357	0.06	42.15	-	42.21	-	58.80	48.80	-16.59	-
3	0.493	0.08	40.14	-	40.22	-	56.12	46.12	-15.90	-
4	0.917	0.15	23.23	-	23.38	-	56.00	46.00	-32.62	-
5	5.184	0.26	24.02	-	24.28	-	60.00	50.00	-35.72	-
6	24.138	0.85	20.50	-	21.35	-	60.00	50.00	-38.65	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

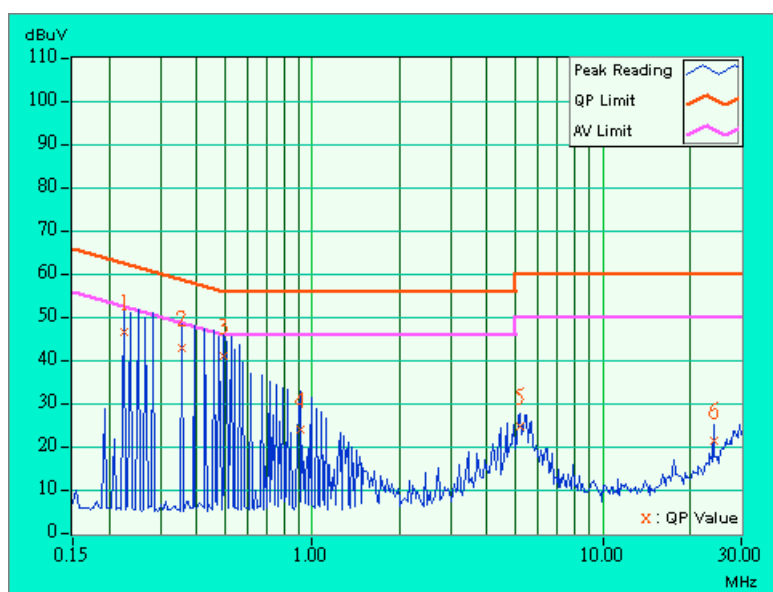

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.240	0.05	44.52	-	44.57	-	62.10	52.10	-17.53	-
2	0.349	0.05	41.60	-	41.65	-	58.98	48.98	-17.33	-
3	0.492	0.07	39.84	-	39.91	-	56.13	46.13	-16.23	-
4	0.919	0.14	22.75	-	22.89	-	56.00	46.00	-33.11	-
5	5.435	0.25	27.16	-	27.41	-	60.00	50.00	-32.59	-
6	24.141	0.69	23.03	-	23.72	-	60.00	50.00	-36.28	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

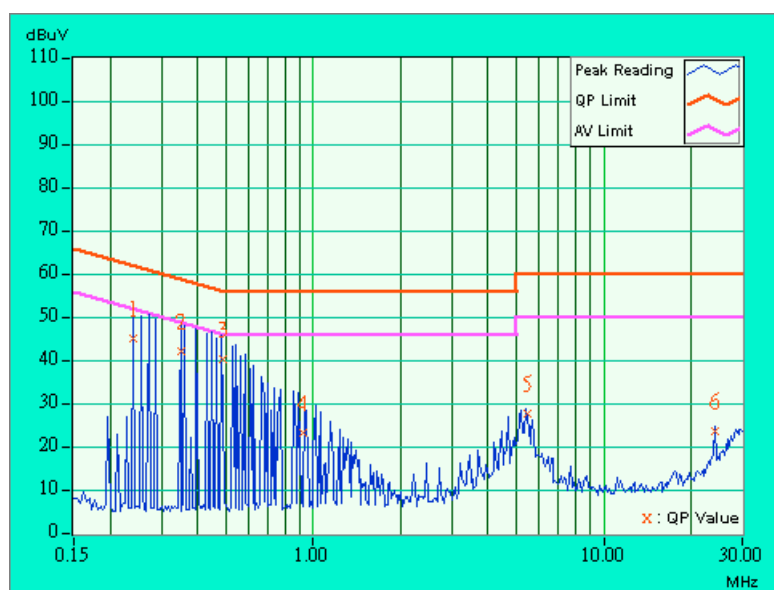

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.06	48.13	-	48.19	-	65.38	55.38	-17.19	-
2	0.252	0.06	44.93	-	44.99	-	61.71	51.71	-16.72	-
3	0.392	0.06	41.57	-	41.63	-	58.02	48.02	-16.39	-
4	0.595	0.09	34.89	-	34.98	-	56.00	46.00	-21.02	-
5	5.188	0.26	26.56	-	26.82	-	60.00	50.00	-33.18	-
6	28.590	0.89	19.67	-	20.56	-	60.00	50.00	-39.44	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

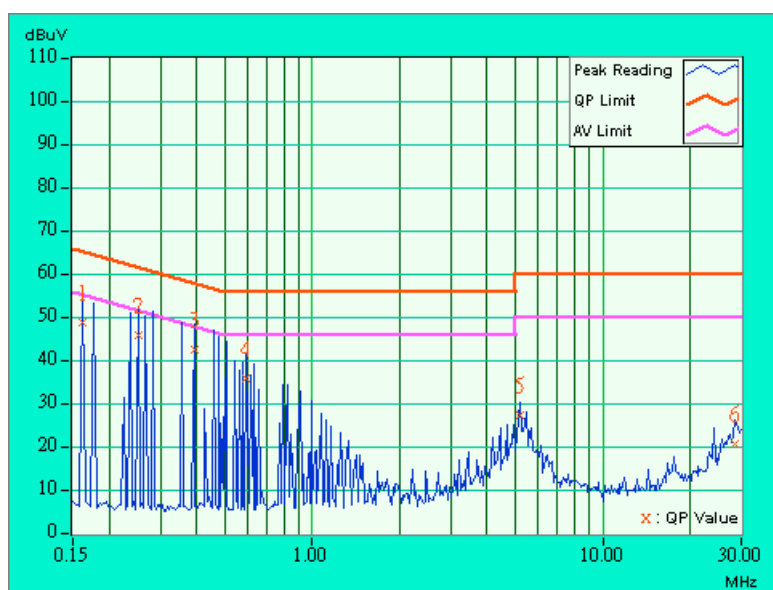

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.05	47.12	-	47.17	-	64.43	54.43	-17.26	-
2	0.298	0.05	43.28	-	43.33	-	60.29	50.29	-16.96	-
3	0.492	0.07	40.20	-	40.27	-	56.13	46.13	-15.86	-
4	0.918	0.14	22.69	-	22.83	-	56.00	46.00	-33.17	-
5	5.434	0.25	27.16	-	27.41	-	60.00	50.00	-32.59	-
6	28.336	0.72	18.85	-	19.57	-	60.00	50.00	-40.43	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

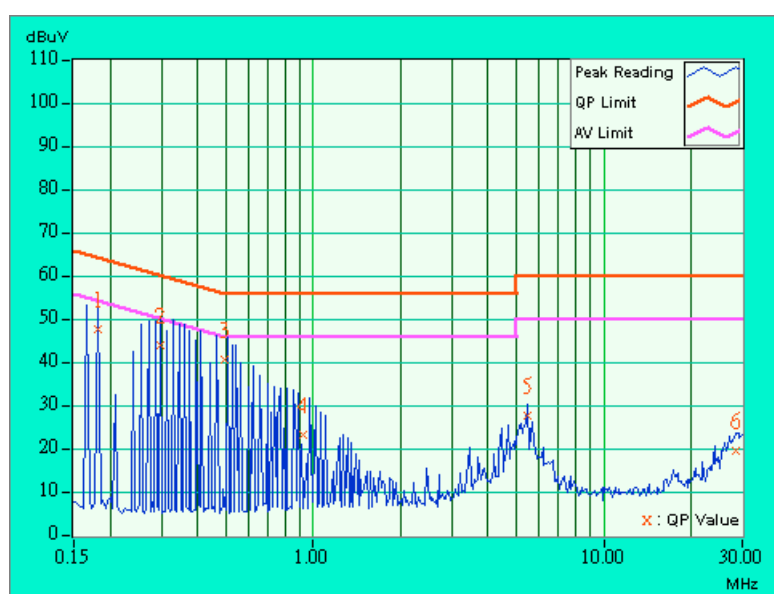

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May. 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiated_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05. 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05. 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

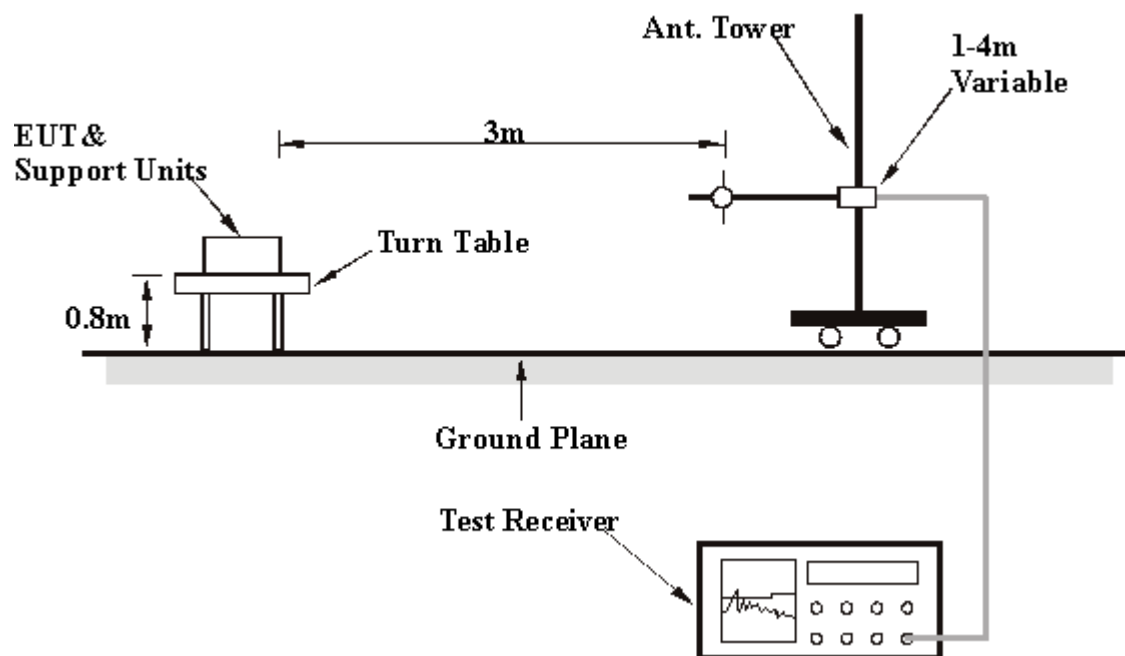

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991 hPa	TEST MODE	CCK & OFDM
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	29.4 QP	43.50	-14.10	1.00 H	195	16.30	13.20
2	175.00	29.8 QP	43.50	-13.70	1.00 H	101	19.10	10.60
3	192.01	30.9 QP	43.50	-12.60	1.00 H	48	20.10	10.80
4	200.01	28.0 QP	43.50	-15.50	1.00 H	117	17.00	11.00
5	225.00	30.2 QP	46.00	-15.80	1.00 H	225	16.90	13.30
6	250.02	38.4 QP	46.00	-7.60	1.00 H	79	22.80	15.60
7	275.01	38.3 QP	46.00	-7.70	1.00 H	165	21.90	16.40
8	288.00	32.7 QP	46.00	-13.30	1.00 H	114	16.00	16.60
9	300.01	34.7 QP	46.00	-11.30	1.00 H	131	17.90	16.80
10	320.00	35.5 QP	46.00	-10.50	1.00 H	73	18.30	17.10
11	352.01	32.4 QP	46.00	-13.60	1.00 H	235	14.70	17.70
12	375.00	35.2 QP	46.00	-10.80	1.00 H	121	16.80	18.40
13	400.00	30.7 QP	46.00	-15.30	1.00 H	40	11.60	19.10
14	495.00	39.5 QP	46.00	-6.50	1.00 H	165	18.40	21.10
15	500.03	33.5 QP	46.00	-12.50	1.00 H	214	12.30	21.20
16	512.01	36.2 QP	46.00	-9.80	1.00 H	108	15.00	21.20
17	693.00	31.6 QP	46.00	-14.40	1.00 H	84	8.60	23.00
18	791.99	33.0 QP	46.00	-13.00	1.00 H	102	8.20	24.80
19	800.01	33.2 QP	46.00	-12.80	1.00 H	187	8.30	24.90
20	891.00	33.7 QP	46.00	-12.30	1.00 H	182	8.50	25.20
21	989.99	36.0 QP	54.00	-18.00	1.00 H	135	10.80	25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991 hPa	TEST MODE	CCK & OFDM
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	37.8 QP	43.50	-5.70	1.12 V	45	24.60	13.20
2	150.00	33.4 QP	43.50	-10.10	1.00 V	136	21.90	11.50
3	175.00	36.3 QP	43.50	-7.20	1.00 V	38	25.60	10.60
4	200.00	29.2 QP	43.50	-14.30	1.00 V	100	18.20	11.00
5	225.00	37.6 QP	46.00	-8.40	1.00 V	92	24.30	13.30
6	250.01	38.9 QP	46.00	-7.10	1.00 V	0	23.30	15.60
7	275.01	33.4 QP	46.00	-12.60	1.00 V	185	16.90	16.40
8	288.00	37.3 QP	46.00	-8.70	1.00 V	185	20.70	16.60
9	297.00	30.2 QP	46.00	-15.80	1.00 V	203	13.40	16.70
10	300.00	30.4 QP	46.00	-15.60	1.00 V	94	13.60	16.80
11	320.00	42.1 QP	46.00	-3.90	1.00 V	82	25.00	17.10
12	375.01	36.0 QP	46.00	-10.00	1.00 V	91	17.60	18.40
13	384.00	39.0 QP	46.00	-7.00	1.00 V	110	20.30	18.70
14	396.00	28.4 QP	46.00	-17.60	1.00 V	172	9.40	19.00
15	416.01	35.9 QP	46.00	-10.10	1.00 V	152	16.60	19.30
16	450.00	31.4 QP	46.00	-14.60	1.00 V	73	11.70	19.80
17	495.00	44.1 QP	46.00	-1.90	1.00 V	209	23.10	21.10
18	500.00	37.4 QP	46.00	-8.60	1.00 V	74	16.20	21.20
19	519.74	34.7 QP	46.00	-11.30	1.00 V	229	13.60	21.20
20	576.00	41.7 QP	46.00	-4.30	1.00 V	124	19.80	21.90
21	608.00	37.3 QP	46.00	-8.70	1.00 V	94	14.60	22.70
22	608.00	37.8 QP	46.00	-8.20	1.00 V	175	15.10	22.70
23	640.01	35.3 QP	46.00	-10.70	1.00 V	99	12.50	22.80
24	671.99	37.0 QP	46.00	-9.00	1.00 V	59	14.10	22.90
25	693.01	35.1 QP	46.00	-10.90	1.00 V	153	12.10	23.00
26	792.01	39.4 QP	46.00	-6.60	1.00 V	81	14.70	24.80
27	891.01	33.7 QP	46.00	-12.30	1.00 V	166	8.50	25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991 hPa	TEST MODE	CCK
TESTED BY	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	97.8 PK			1.42 H	111	68.10	29.70
1	*2412.00	90.4 AV			1.42 H	111	60.70	29.70
2	4824.00	53.0 PK	74.00	-21.00	1.52 H	23	17.70	35.30
2	4824.00	37.3 AV	54.00	-16.70	1.52 H	23	2.10	35.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.2 PK	74.00	-13.80	1.42 V	11	30.60	29.60
1	2390.00	22.8 AV	54.00	-1.60	1.42 V	11	22.80	29.60
2	*2412.00	108.4 PK			1.42 V	11	78.70	29.70
2	*2412.00	100.6 AV			1.42 V	11	70.90	29.70
3	4824.00	63.9 PK	74.00	-10.10	1.02 V	214	28.60	35.30
3	4824.00	48.0 AV	54.00	-6.00	1.02 V	214	12.70	35.30

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991 hPa	TEST MODE	CCK
TESTED BY	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.6 PK			1.12 H	119	65.90	29.70
1	*2437.00	87.1 AV			1.12 H	119	57.40	29.70
2	4874.00	52.6 PK	74.00	-21.40	1.47 H	258	17.10	35.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.1 PK			1.15 V	258	78.40	29.70
1	*2437.00	100.1 AV			1.15 V	258	70.40	29.70
2	4874.00	60.5 PK	74.00	-13.50	1.03 V	96	25.00	35.50
2	4874.00	47.2 AV	54.00	-6.80	1.03 V	96	11.70	35.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991 hPa	TEST MODE	CCK
TESTED BY	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	93.4 PK			2.10 H	7	63.50	29.80
1	*2462.00	85.7 AV			2.10 H	7	55.80	29.80
2	4924.00	50.7 PK	74.00	-23.30	1.01 H	117	15.00	35.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.7 PK			1.06 V	159	77.90	29.80
1	*2462.00	99.8 AV			1.06 V	159	70.00	29.80
2	2483.50	58.90 PK	74.00	-15.10	1.06 V	159	29.00	29.90
2	2483.50	51.0 AV	54.00	-3.00	1.06 V	159	21.10	29.90
3	4924.00	57.8 PK	74.00	-16.20	1.19 V	110	22.10	35.70
3	4924.00	42.5 AV	54.00	-11.50	1.19 V	110	6.90	35.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991 hPa	TEST MODE	OFDM
TESTED BY	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	90.4 PK			2.00 H	161	60.70	29.70
1	*2412.00	80.7 AV			2.00 H	161	51.00	29.70
2	4824.00	47.1 PK	74.00	-26.90	1.35 H	144	11.90	35.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.7 PK	74.00	-13.30	1.12 V	102	31.20	29.60
1	2390.00	50.6 AV	54.00	-3.40	1.12 V	102	21.10	29.60
2	*2412.00	101.3 PK			1.12 V	102	73.60	29.70
2	*2412.00	91.1 AV			1.12 V	102	63.50	29.70
3	4824.00	53.7 PK	74.00	-20.30	1.35 V	44	18.50	35.30
3	4824.00	38.8 AV	54.00	-15.20	1.35 V	44	3.60	35.30

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991 hPa	TEST MODE	OFDM
TESTED BY	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	91.9 PK			1.39 H	29	62.20	29.70
1	*2437.00	81.9 AV			1.39 H	29	52.10	29.70
2	4874.00	46.8 PK	74.00	-27.20	1.10 H	66	11.30	35.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.9 PK			1.08 V	104	73.10	29.70
1	*2437.00	92.6 AV			1.08 V	104	62.90	29.70
2	4874.00	50.9 PK	74.00	-23.10	1.10 V	66	15.40	35.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991 hPa	TEST MODE	OFDM
TESTED BY	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	90.0 PK			1.59 H	11	60.20	29.80
1	*2462.00	80.4 AV			1.59 H	11	50.60	29.80
2	4924.00	46.0 PK	74.00	-28.00	1.99 H	161	10.30	35.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.6 PK			1.00 V	161	71.80	29.80
1	*2462.00	91.4 AV			1.00 V	161	61.50	29.80
2	2483.50	58.6 PK	74.00	-15.40	1.00 V	161	28.70	29.90
2	2483.50	48.4 AV	54.00	-5.60	1.00 V	161	18.50	29.90
3	4924.00	51.3 PK	74.00	-22.70	1.99 V	161	15.60	35.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS


EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	CCK	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.59	0.5	PASS
6	2437	11.94	0.5	PASS
11	2462	12.67	0.5	PASS


CH1

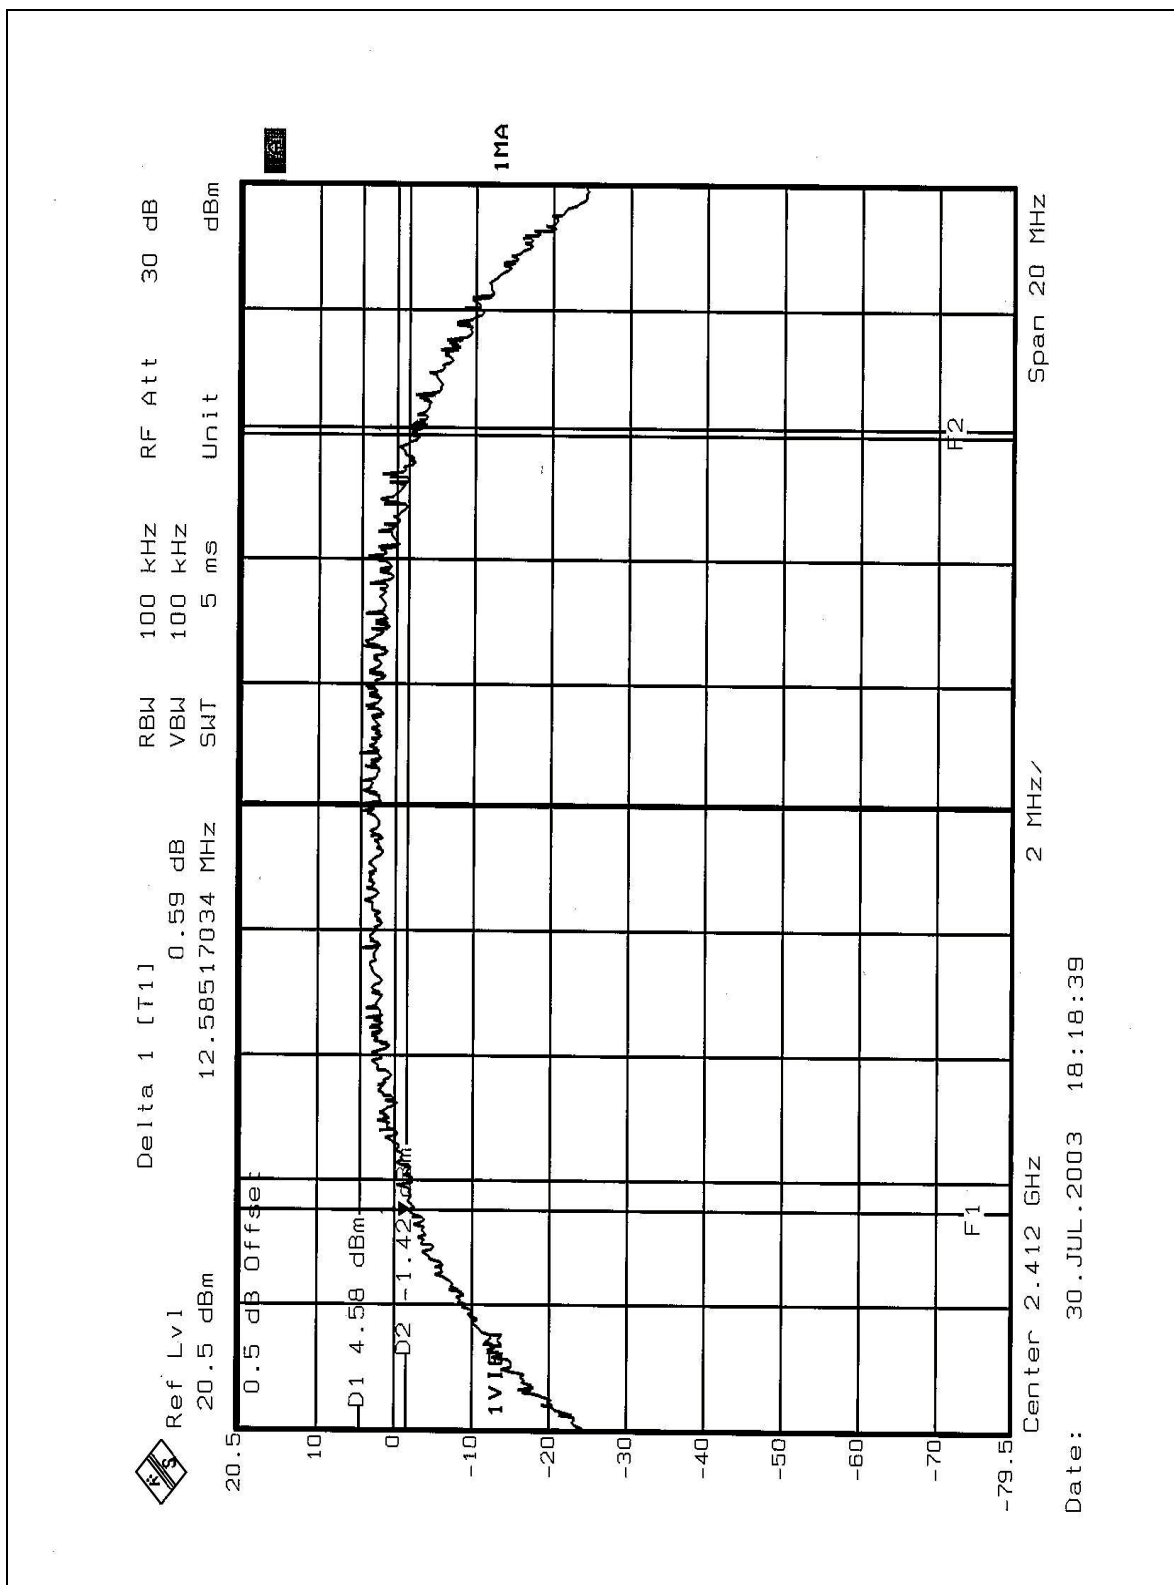

CH6

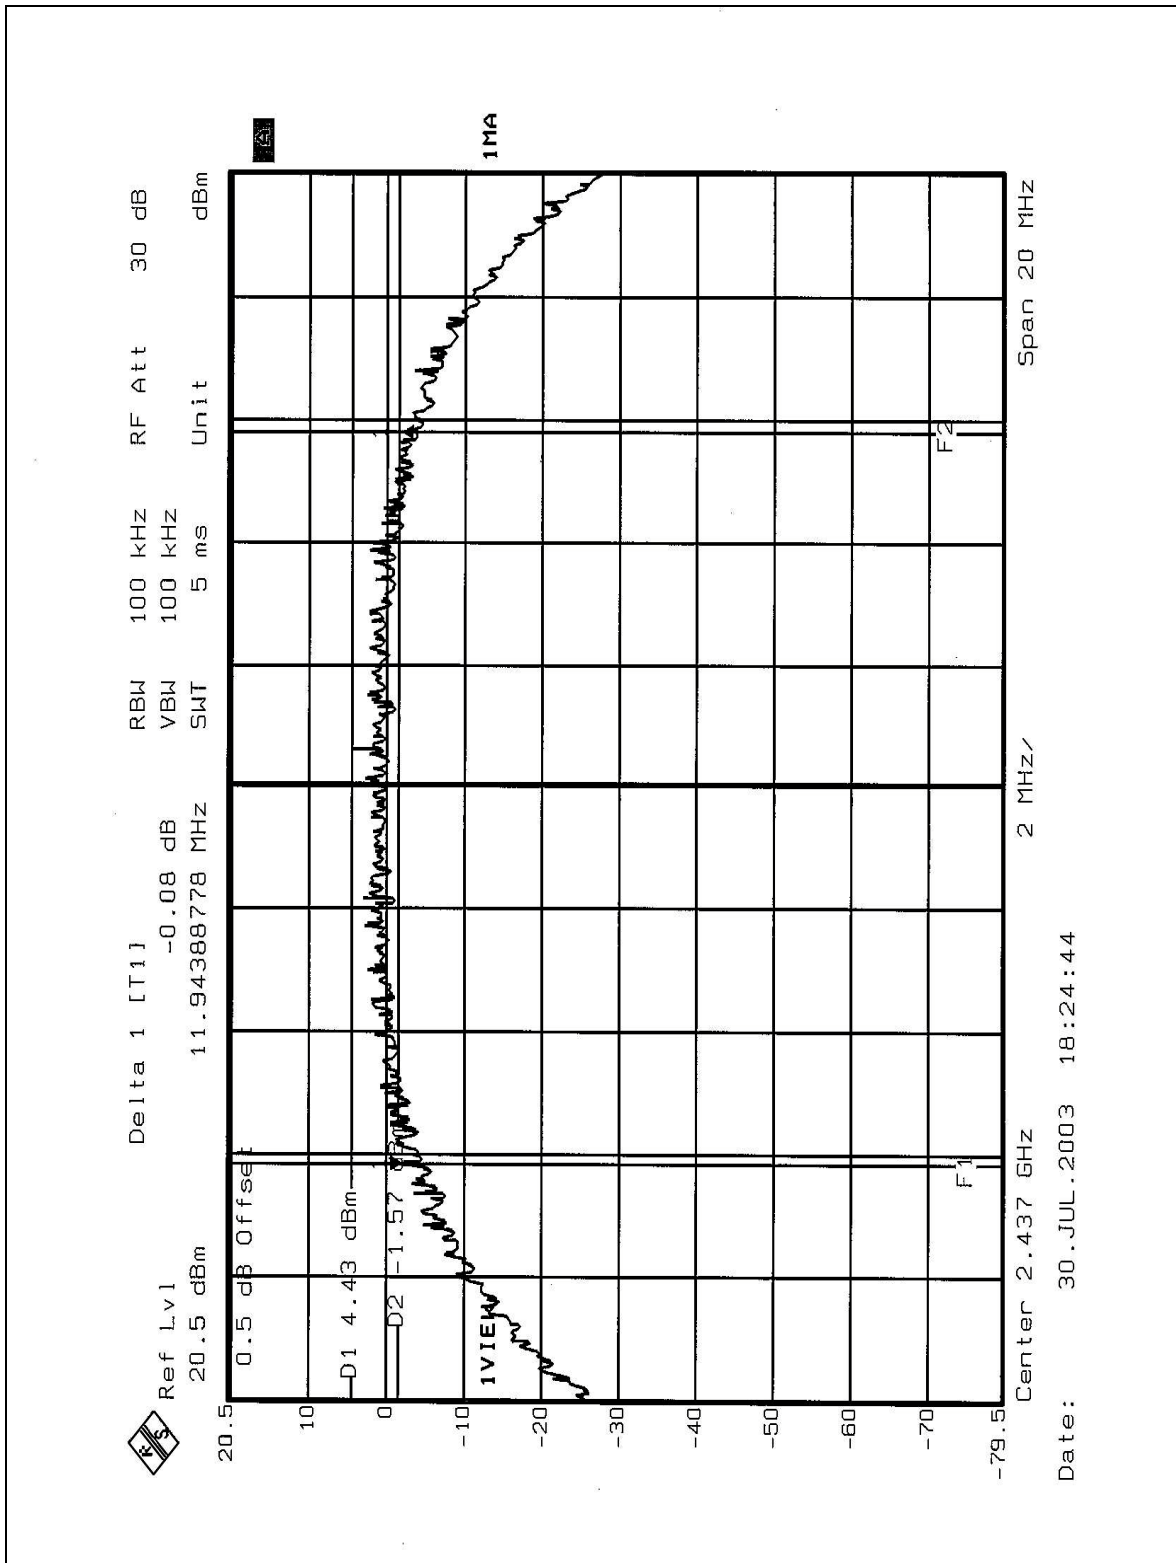

CH11

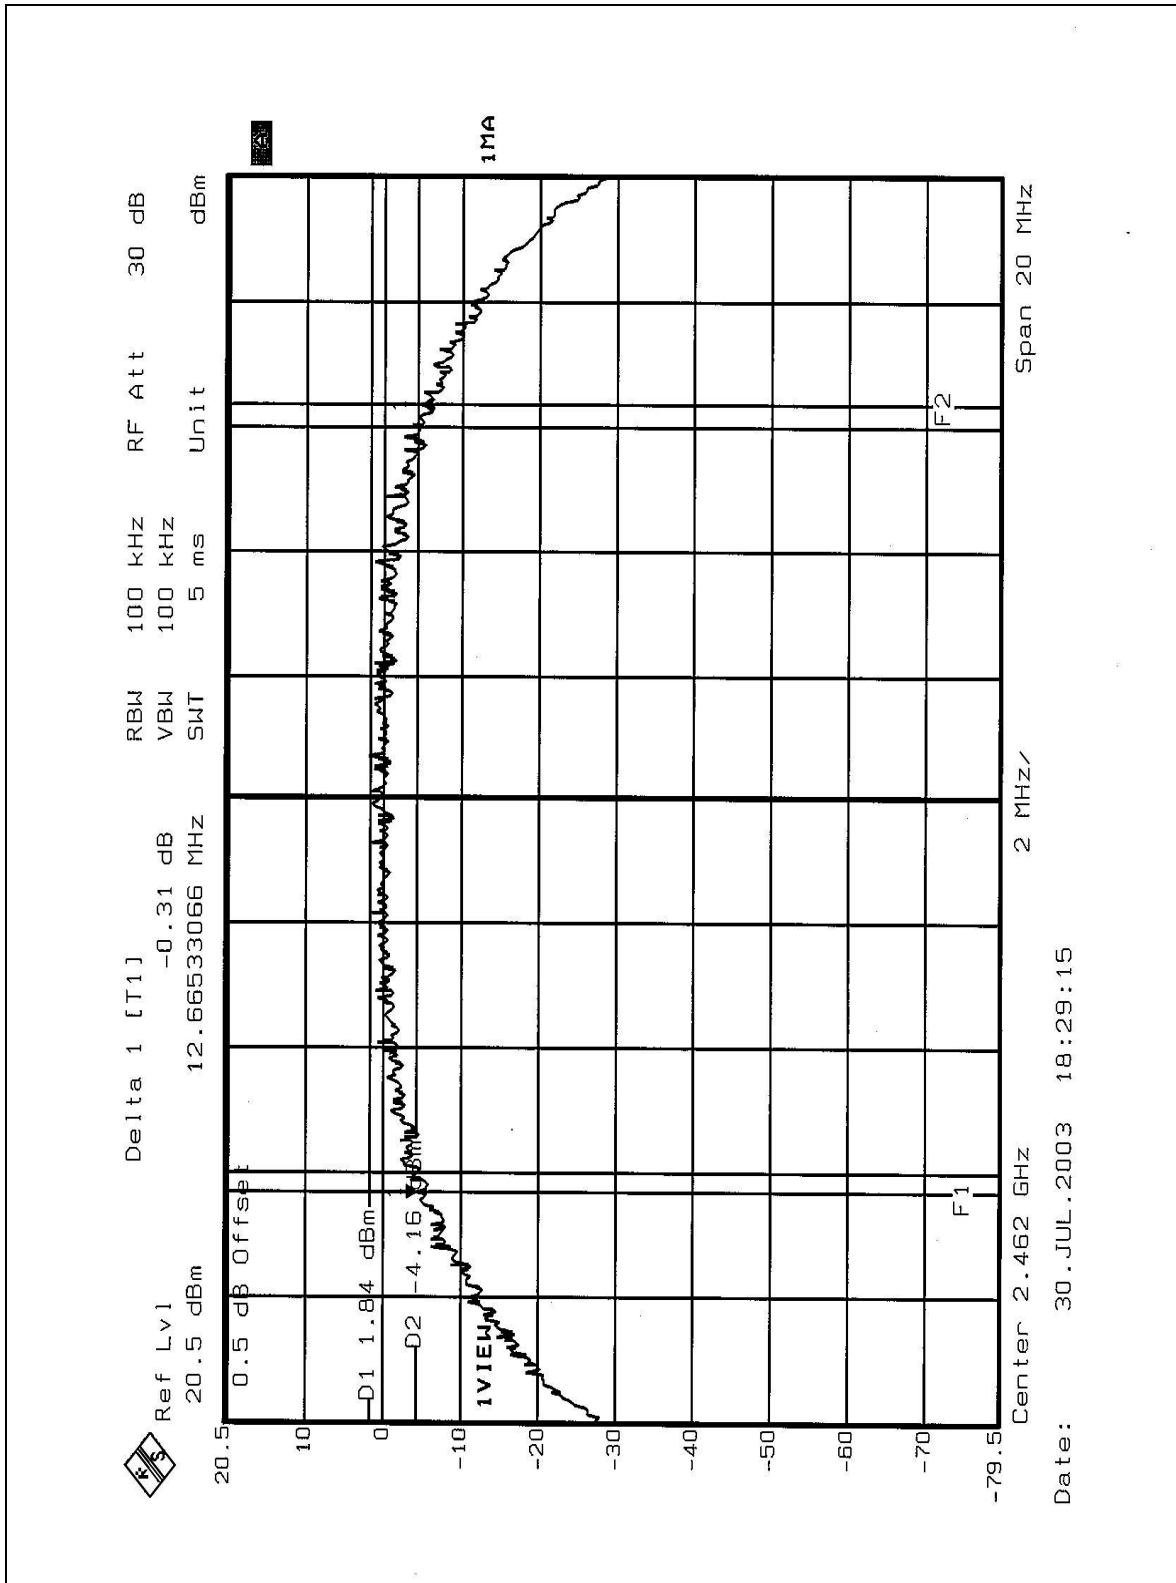





EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.63	0.5	PASS
6	2437	16.53	0.5	PASS
11	2462	16.63	0.5	PASS


CH1

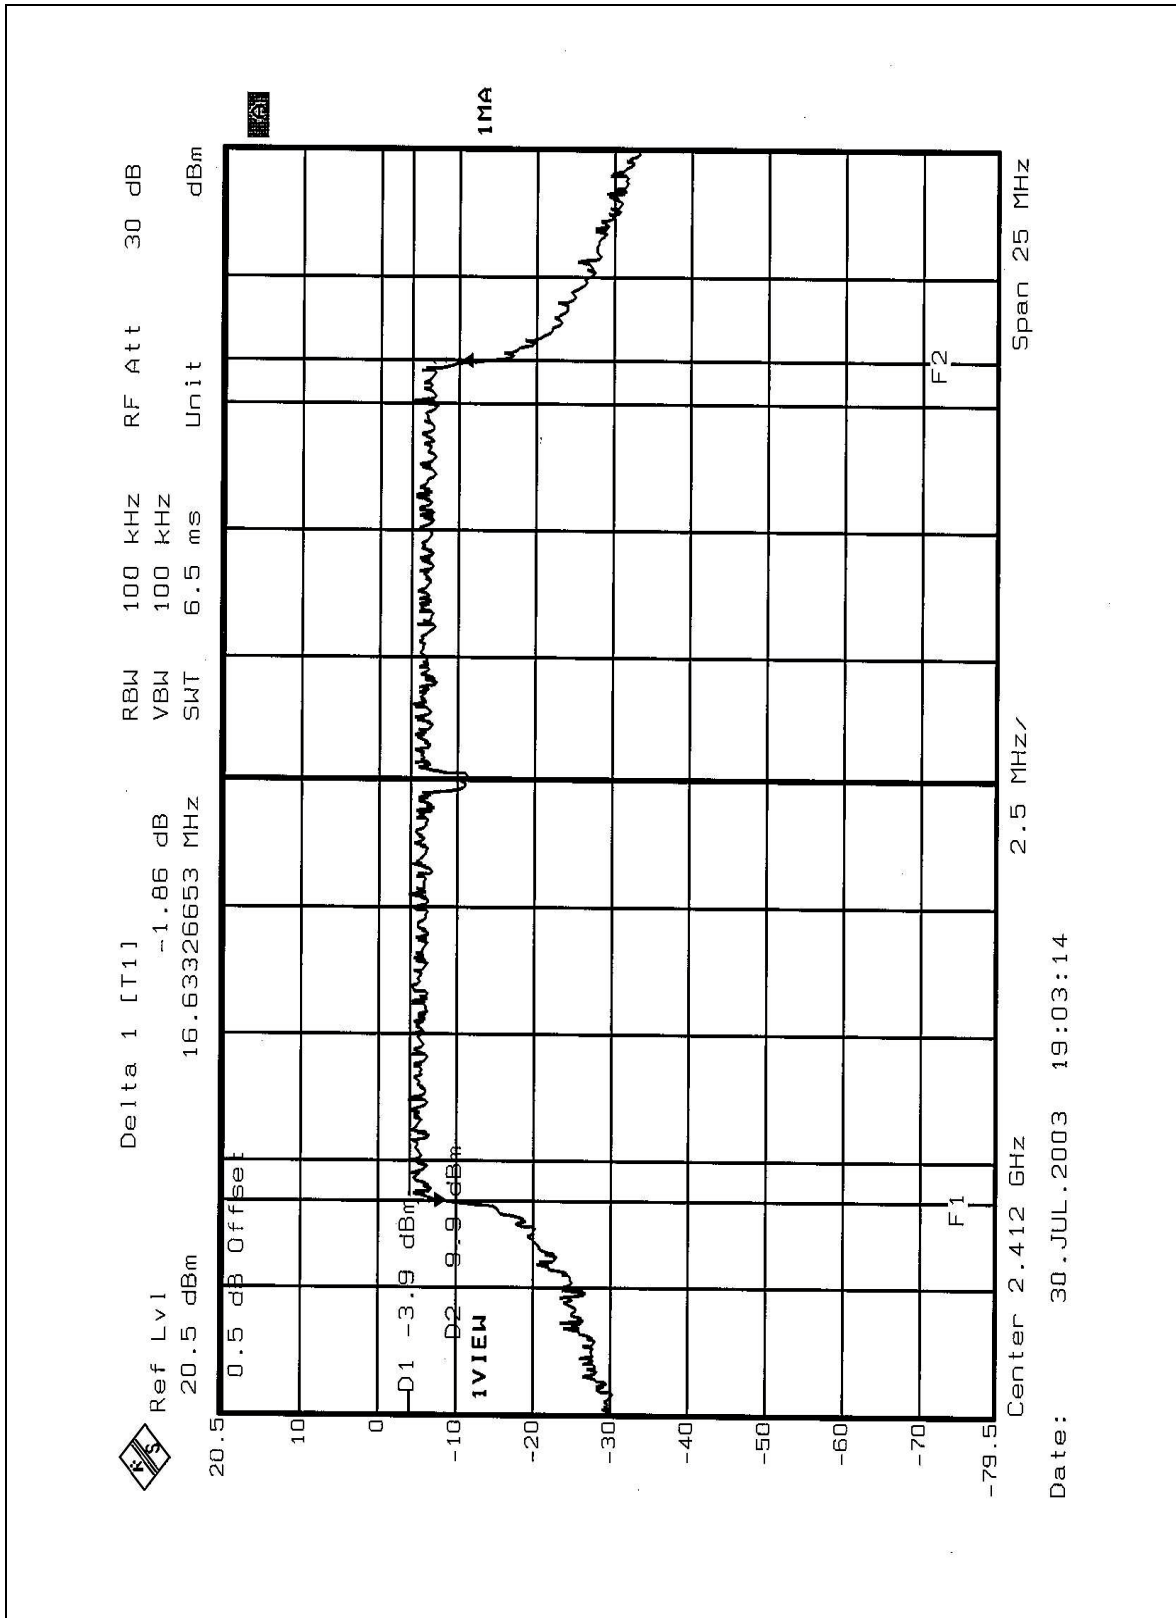

CH6

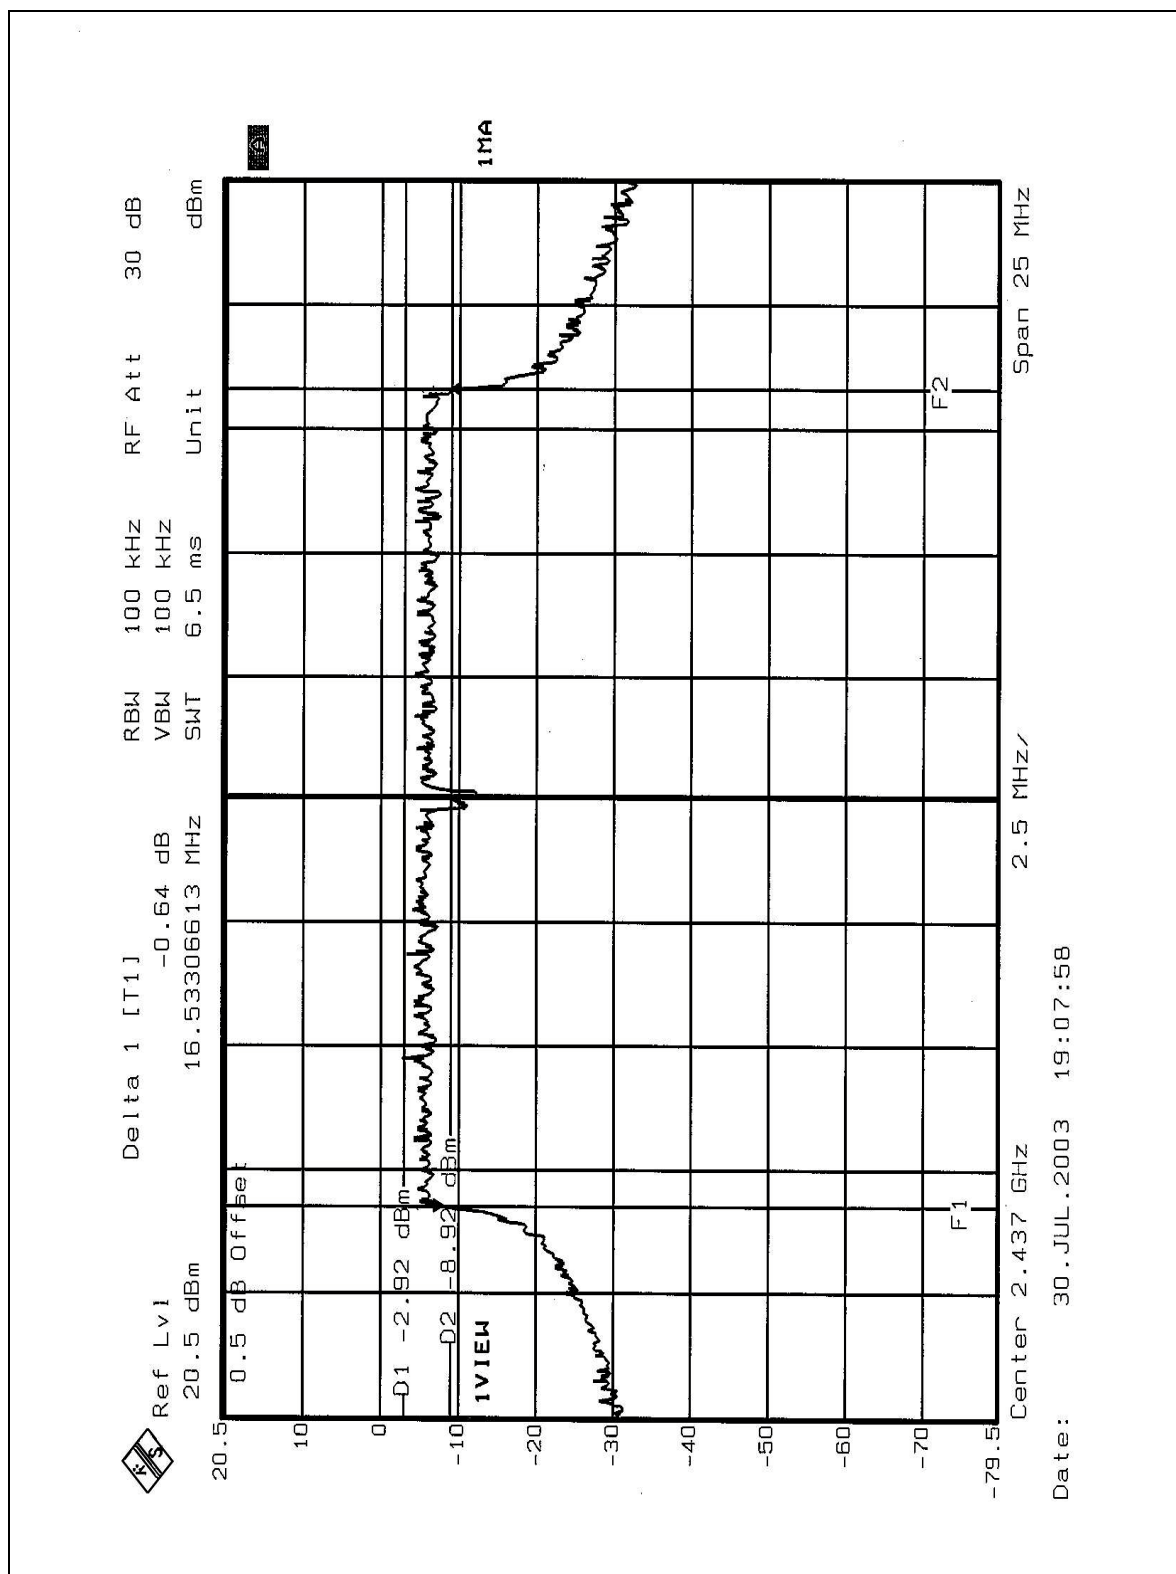

CH11

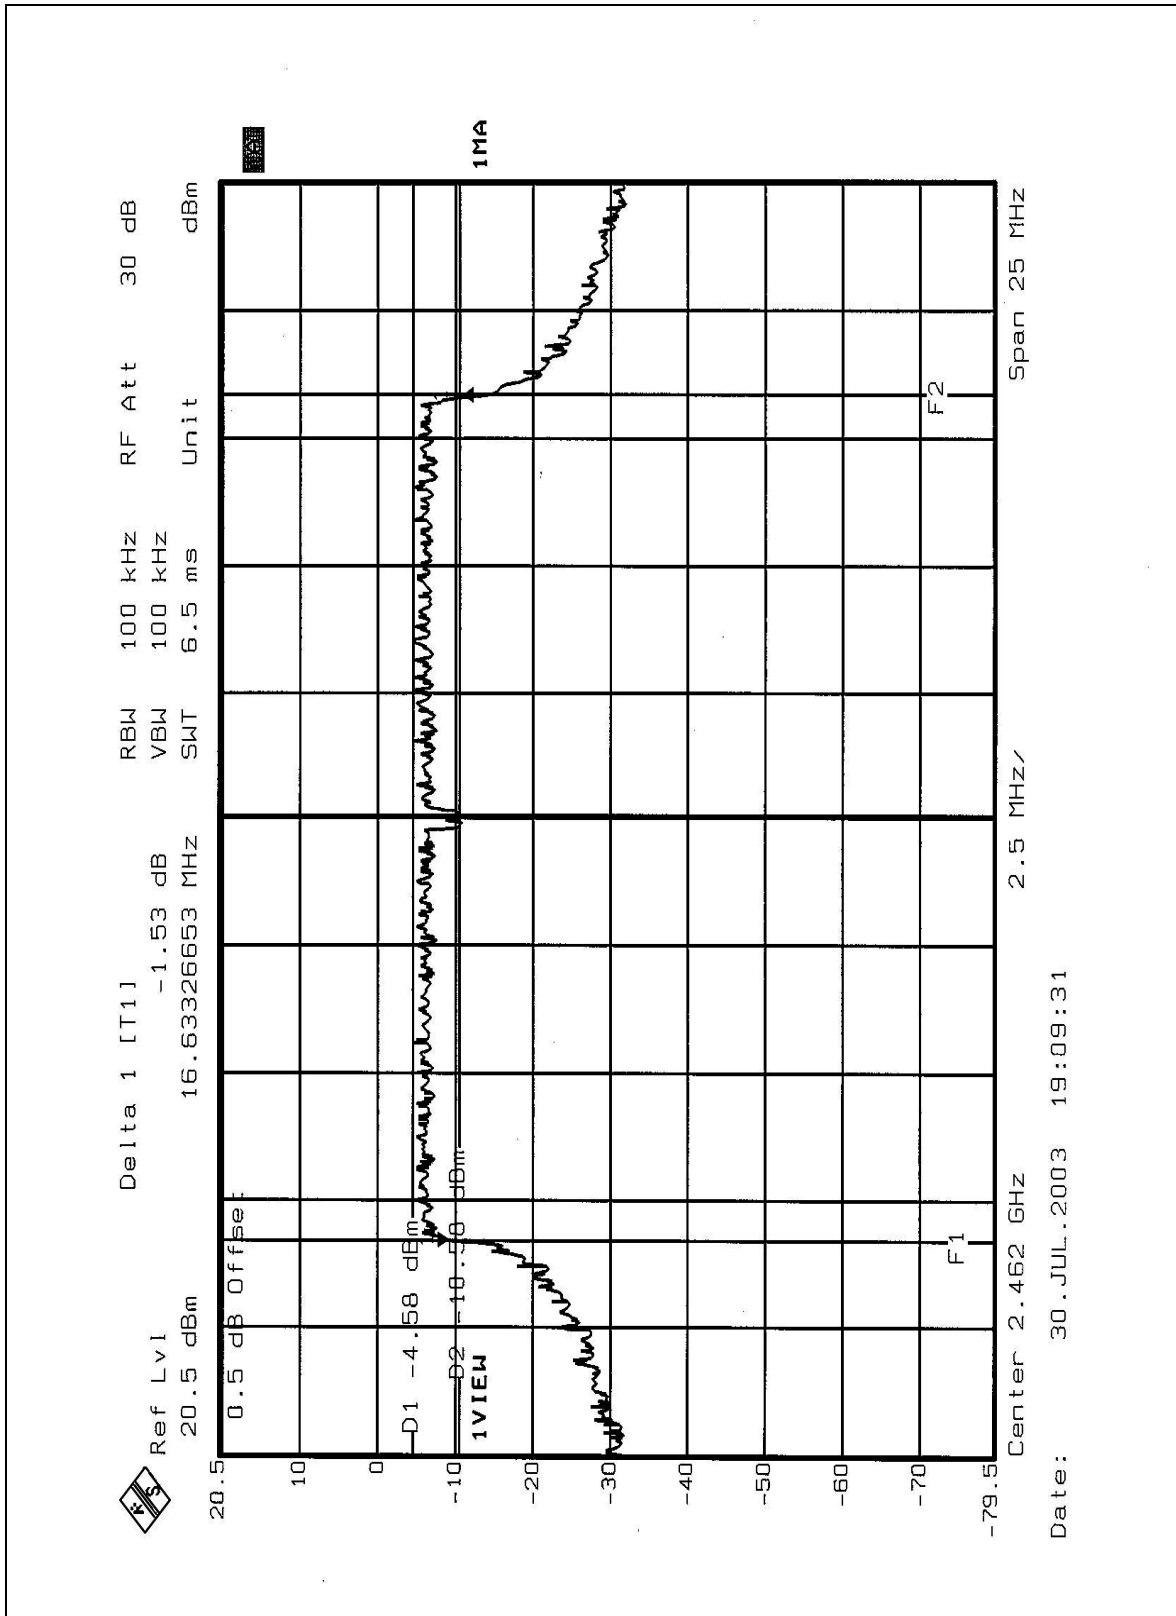

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 24, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	CCK	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.42	30	PASS
6	2437	16.14	30	PASS
11	2462	15.39	30	PASS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.12	30	PASS
6	2437	16.09	30	PASS
11	2462	15.68	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS


EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	CCK	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.66	8	PASS
6	2437	-9.44	8	PASS
11	2462	-8.82	8	PASS

CH1

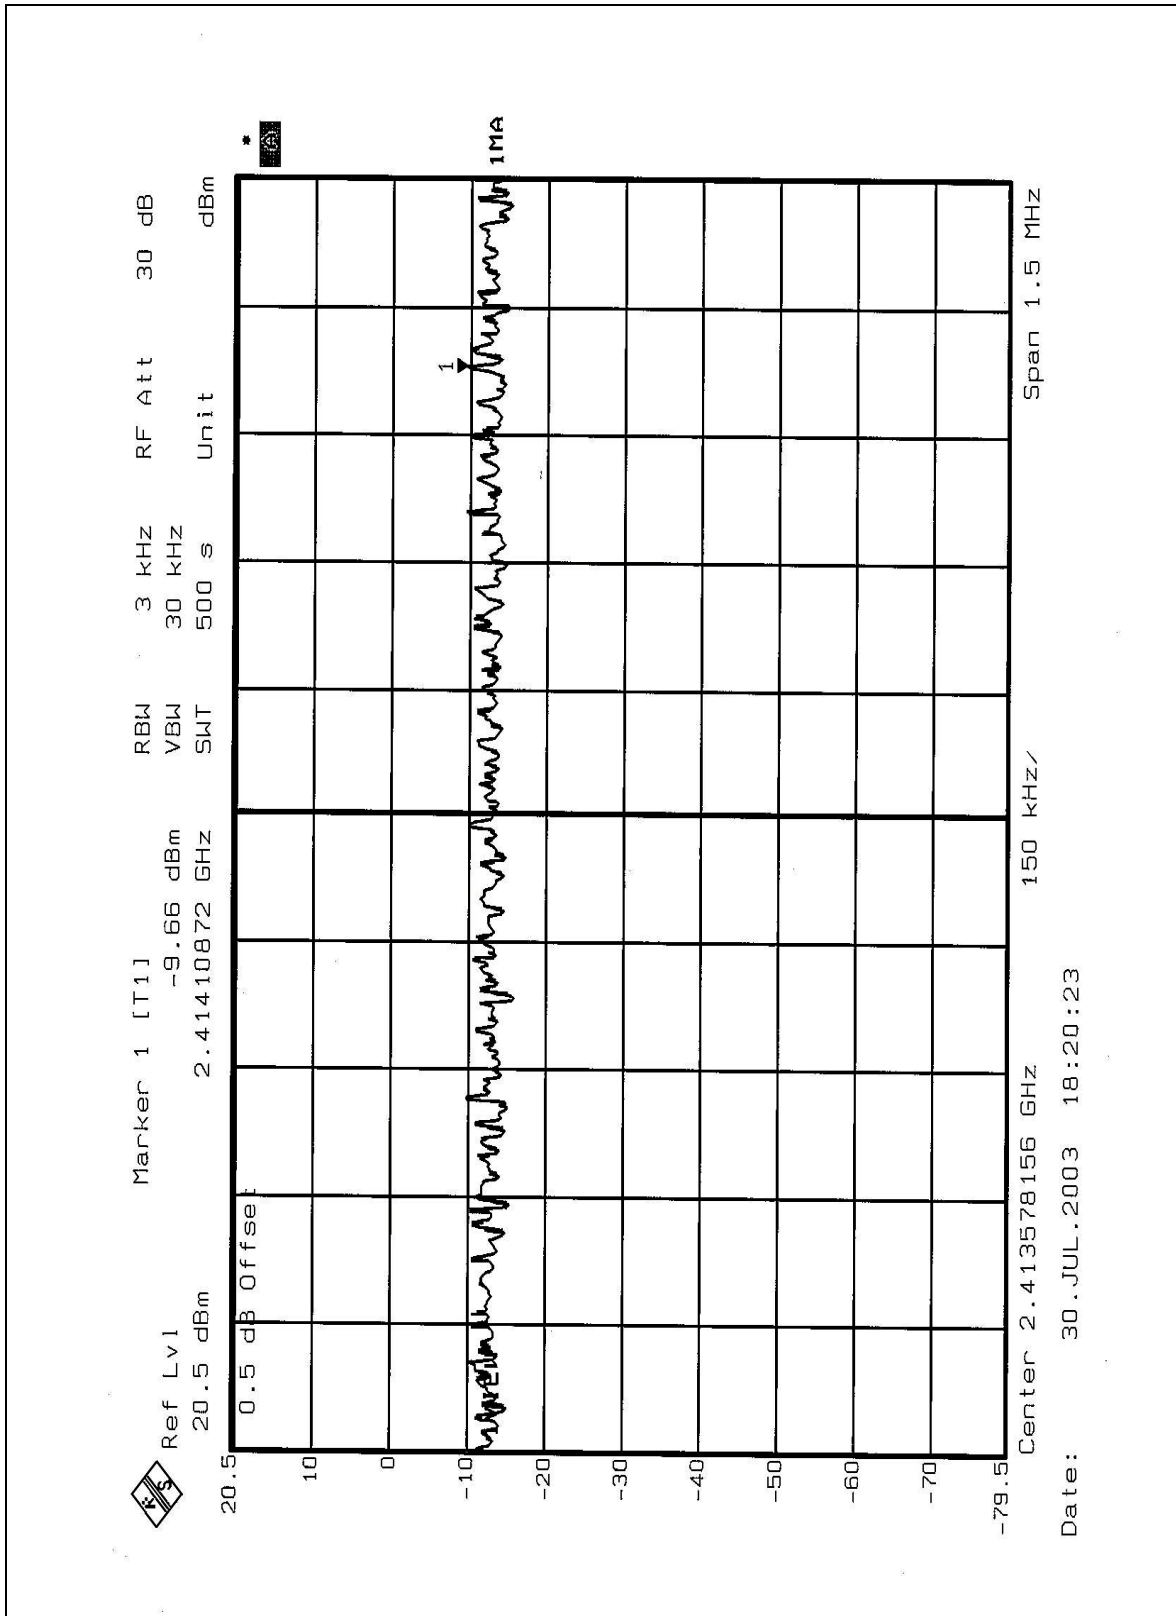

CH6

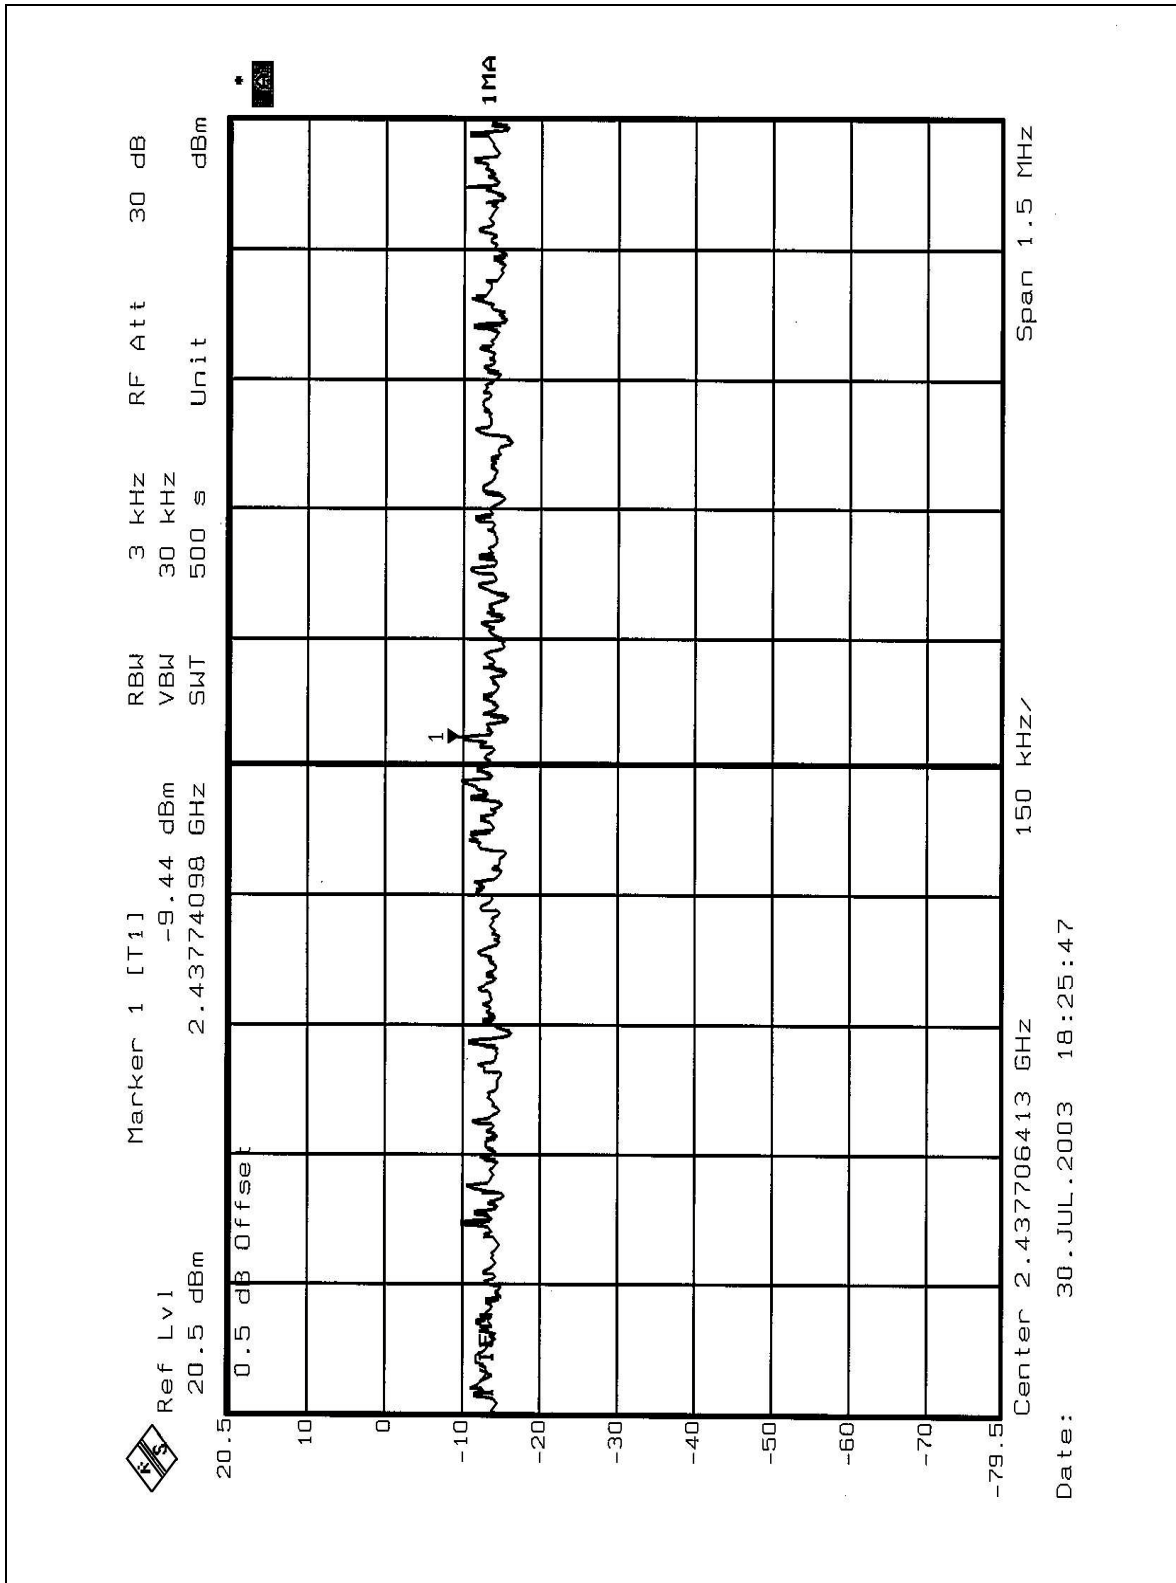

Marker 1 [T1]
-8.82 dBm
2.45203006 GHz

Ref Lvl
20.5 dBm

Unit
30 dB

Span 1.5 MHz

Center 2.45203006 GHz

Date: 30.JUL.2003 18:30:04




EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.72	8	PASS
6	2437	-15.64	8	PASS
11	2462	-14.84	8	PASS




CH1

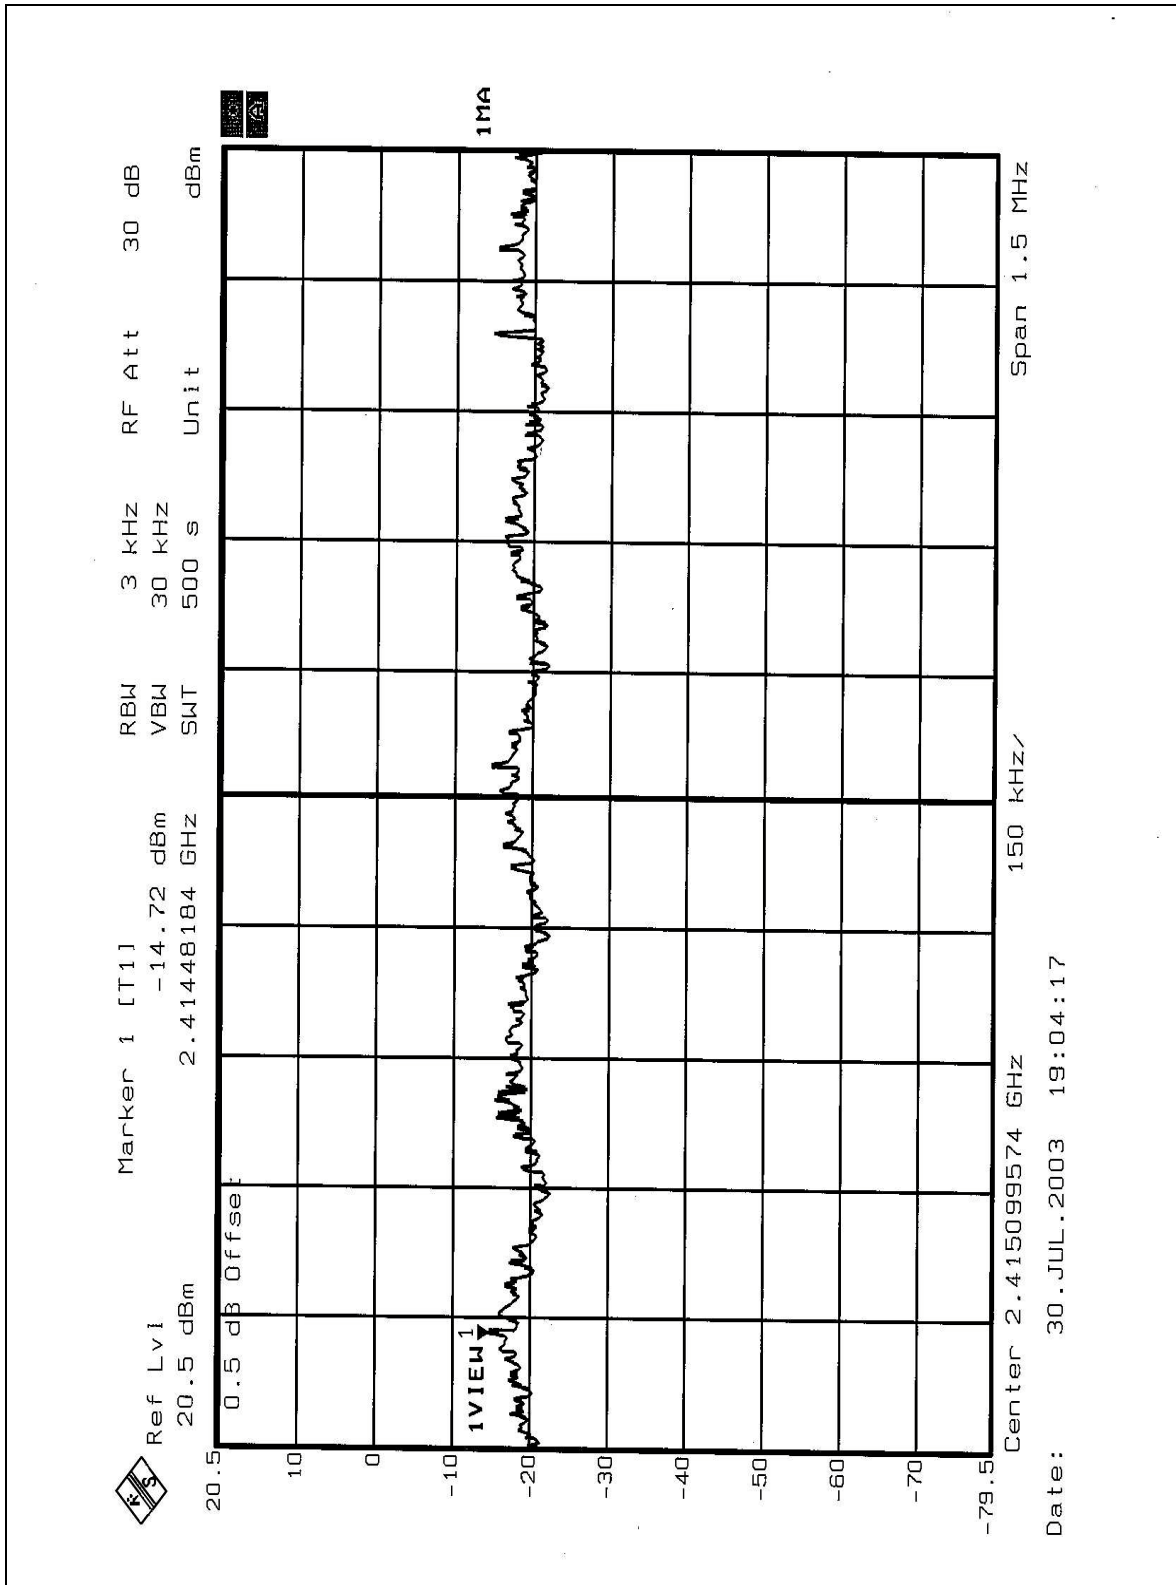




CH6

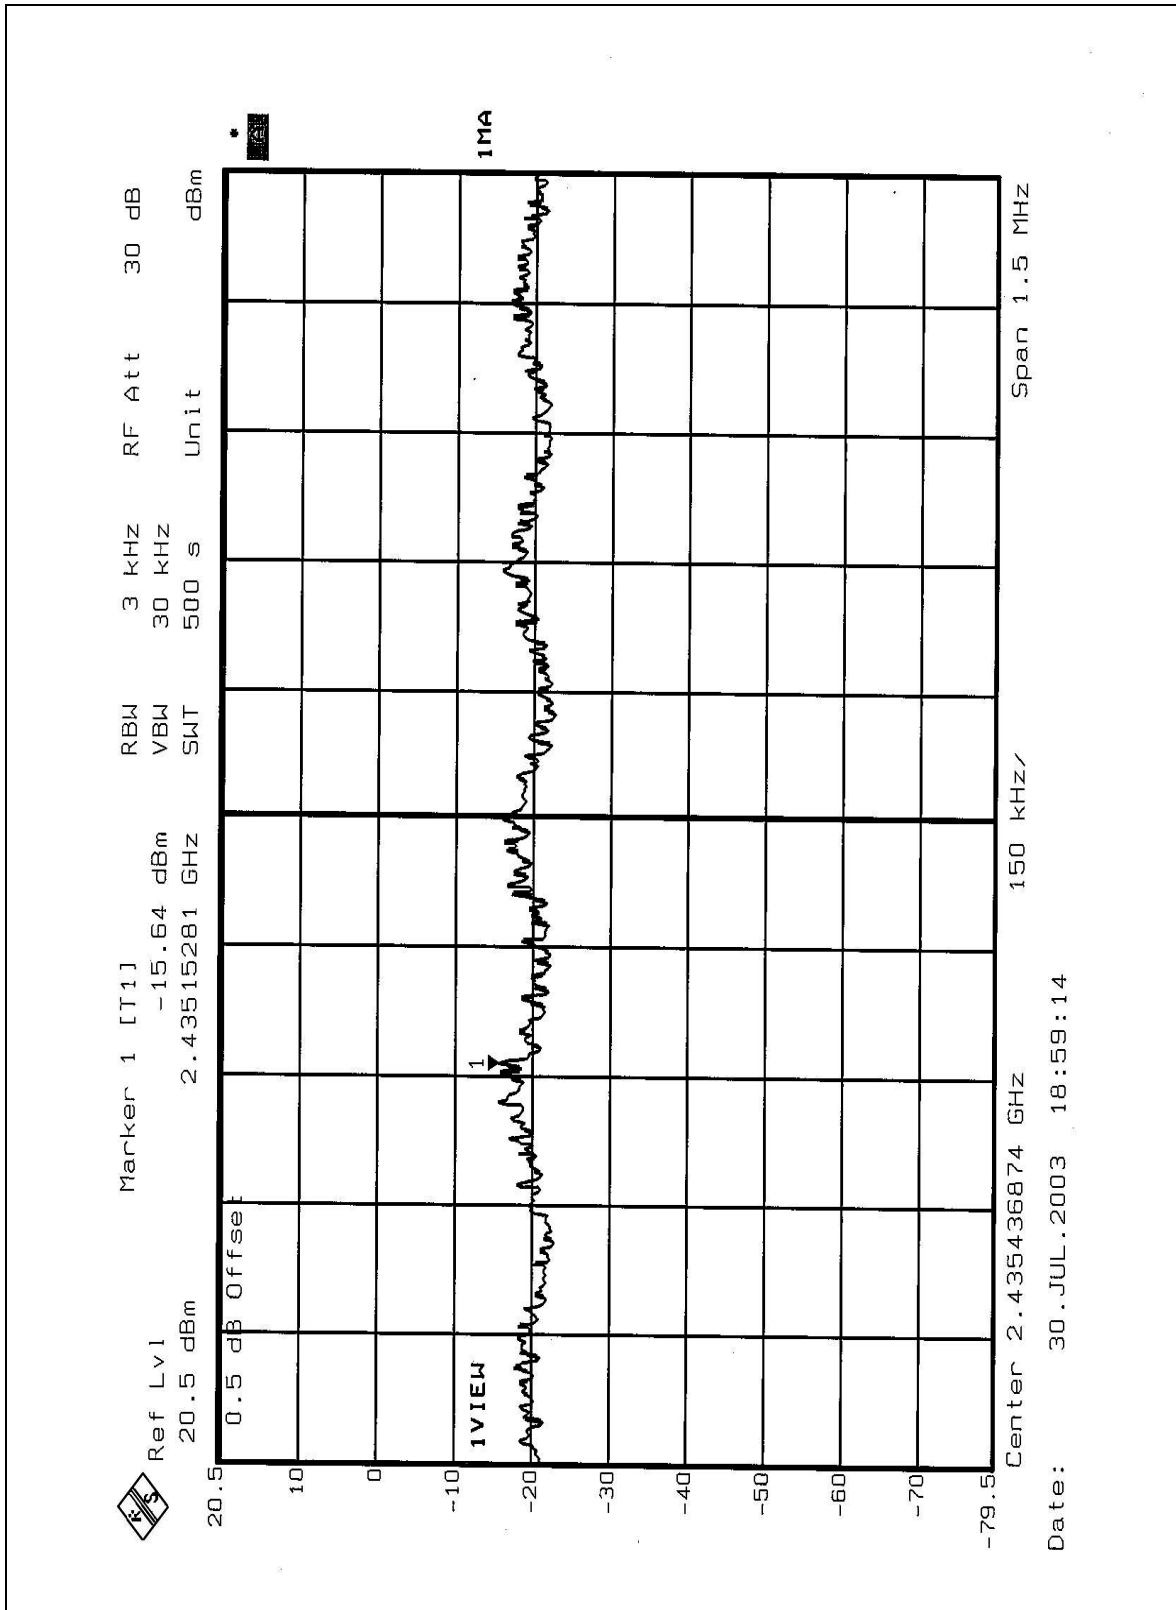

CH11

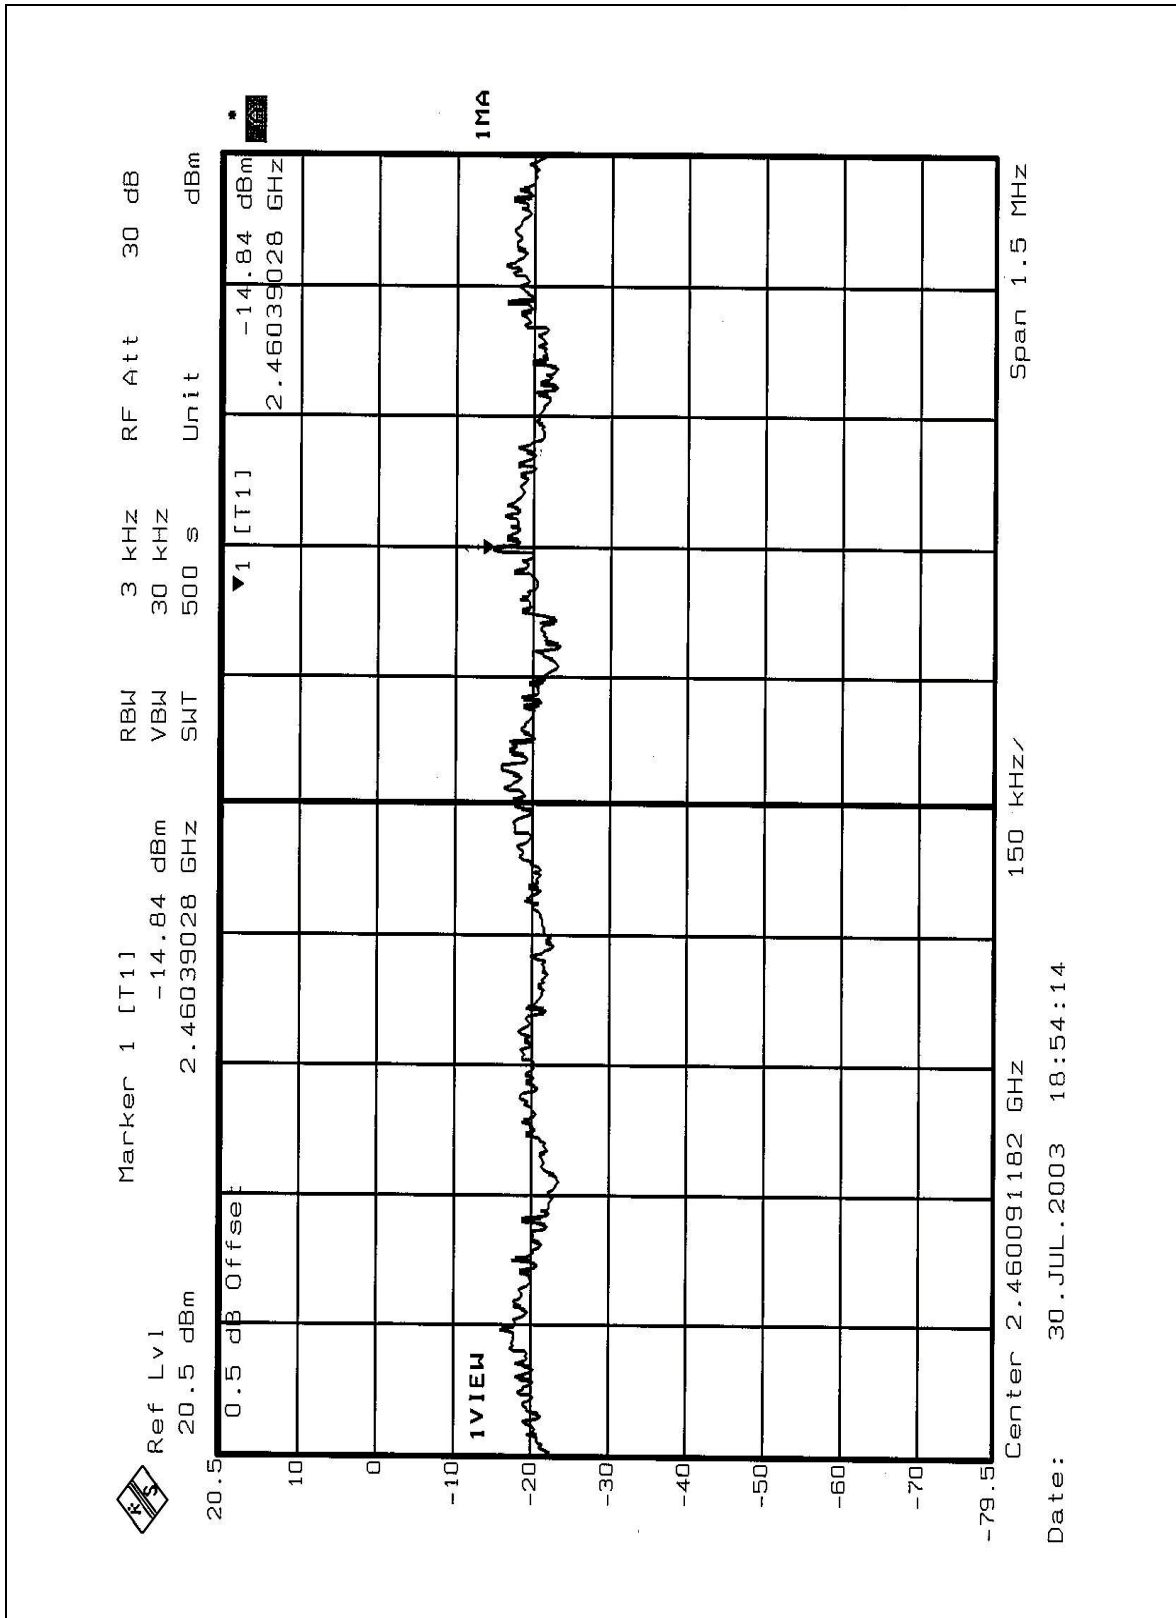

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6


4.6.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE1: The band edge emission plot on the following 1-2 shows 46.8dB / 48.79dB delta between carrier maximum power and local maximum emission in restrict band (2.3681GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (page 27) with CCK mode is 100.6dBuV/m, so the maximum field strength in restrict band is $100.6 - 46.8 = 53.80$ dBuV/m which is under 54dBuV/m limit.

NOTE2: The band edge emission plot on the following 3-4 shows 38.04dB / 41.67dB delta between carrier maximum power and local maximum emission in restrict band (2.3679GHz / 2.4837GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (page 30) with OFDM mode is 91.1dBuV/m, so the maximum field strength in restrict band is $91.1 - 38.04 = 53.06$ dBuV/m which is under 54dBuV/m limit.



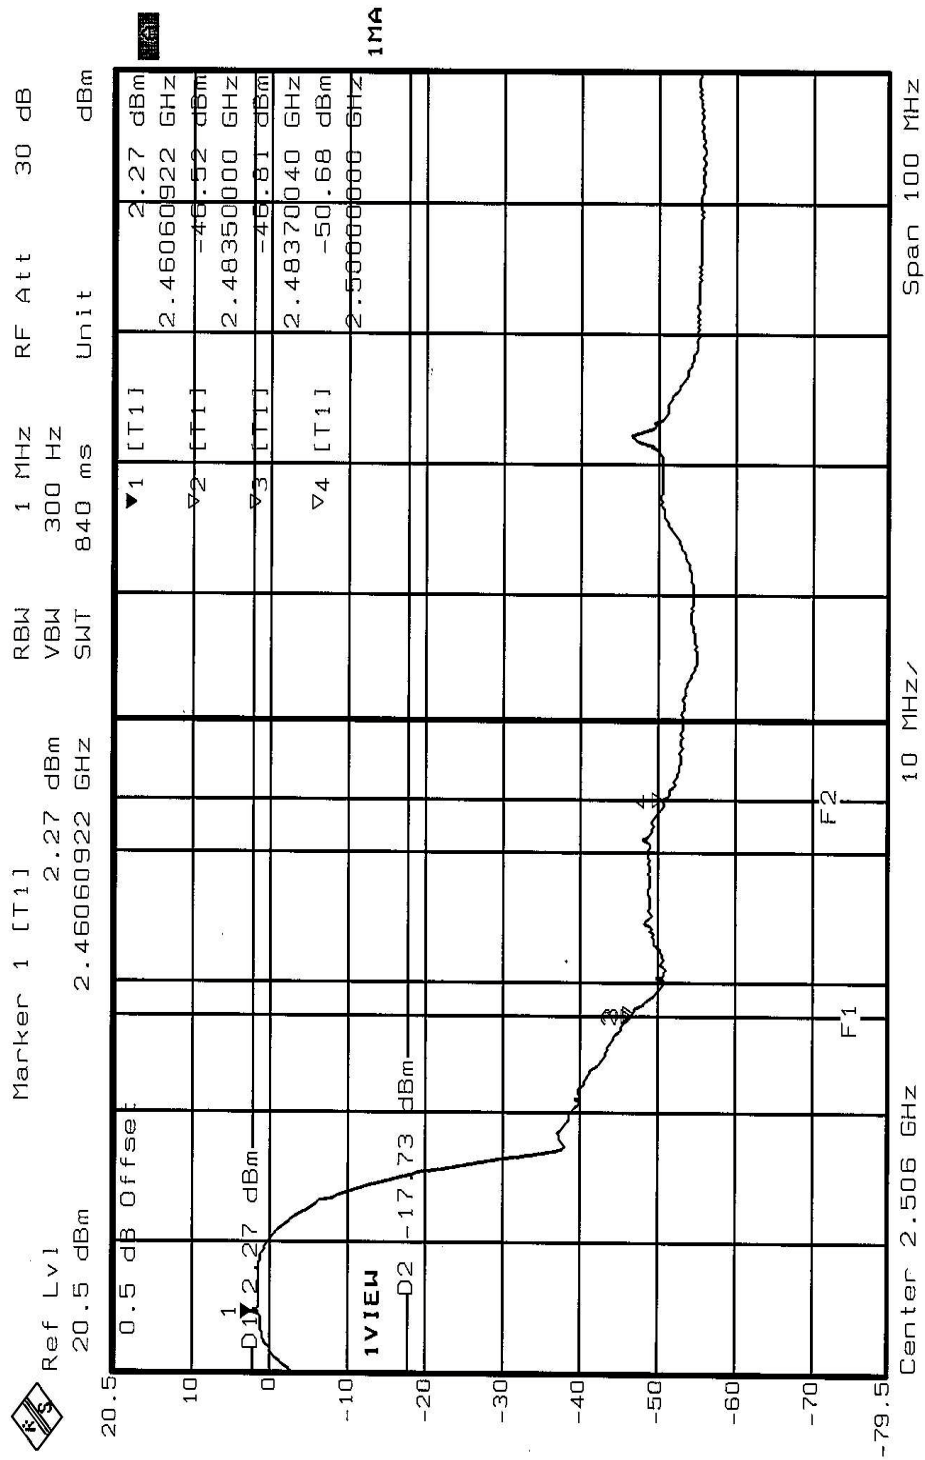

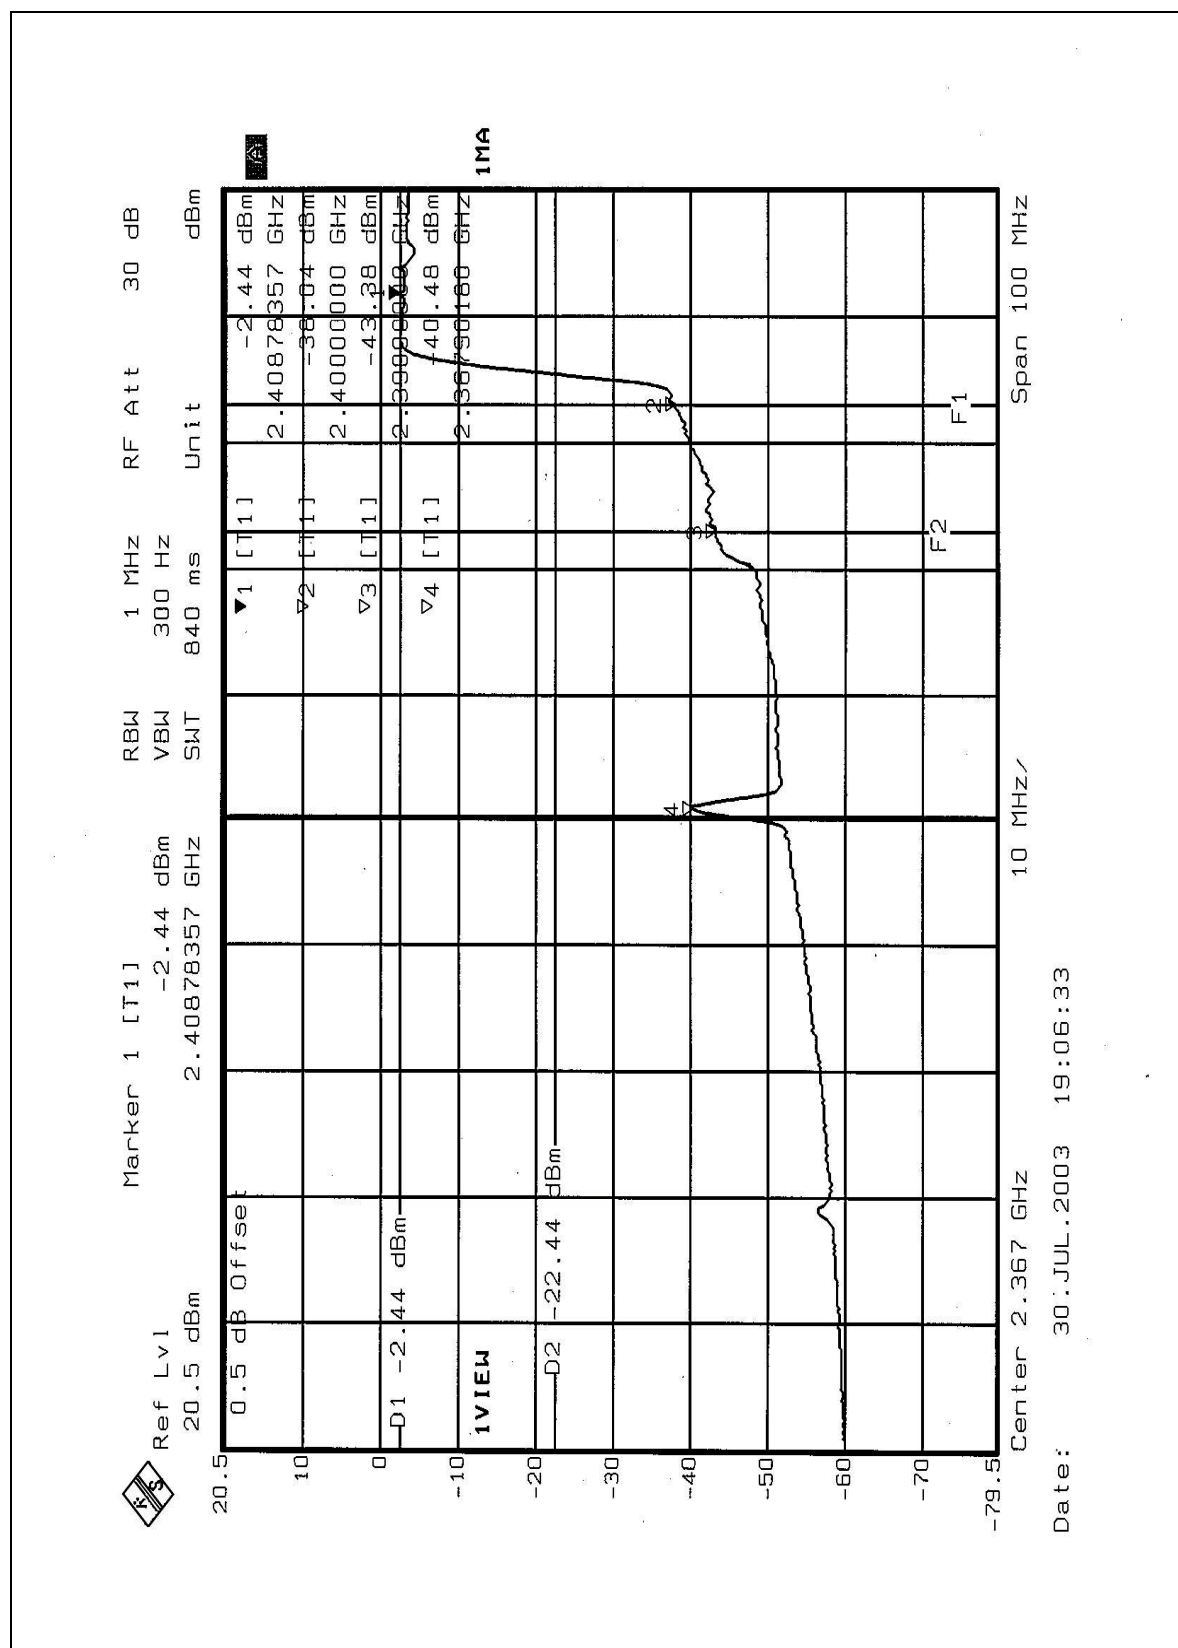

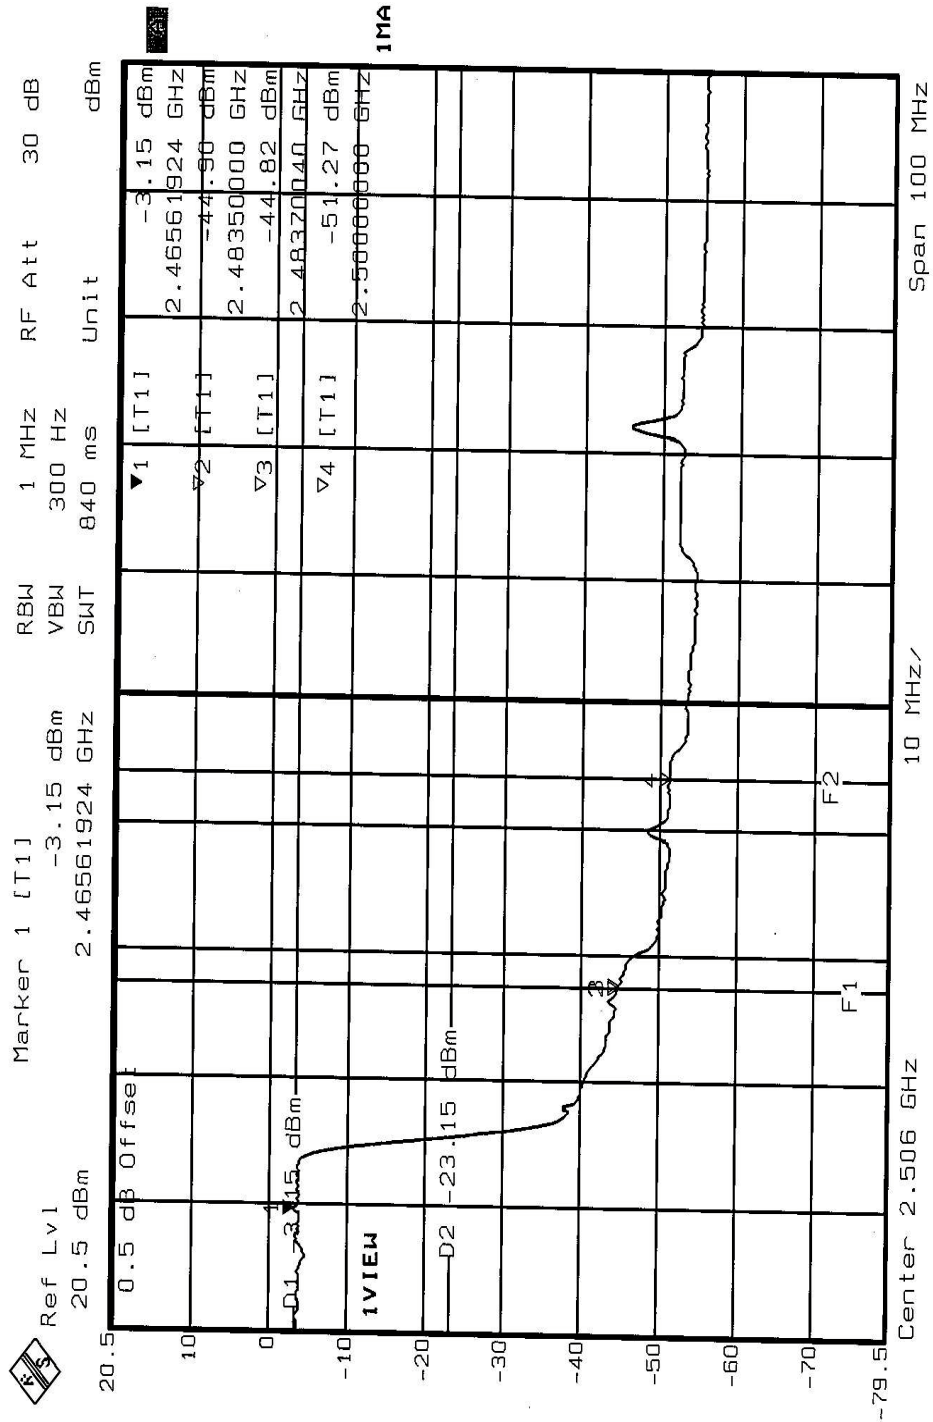



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna without antenna connector. The maximum Gain of the antenna is 4dBi

5. TEST TYPES AND RESULTS (FOR PART 802.11a)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May. 01, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

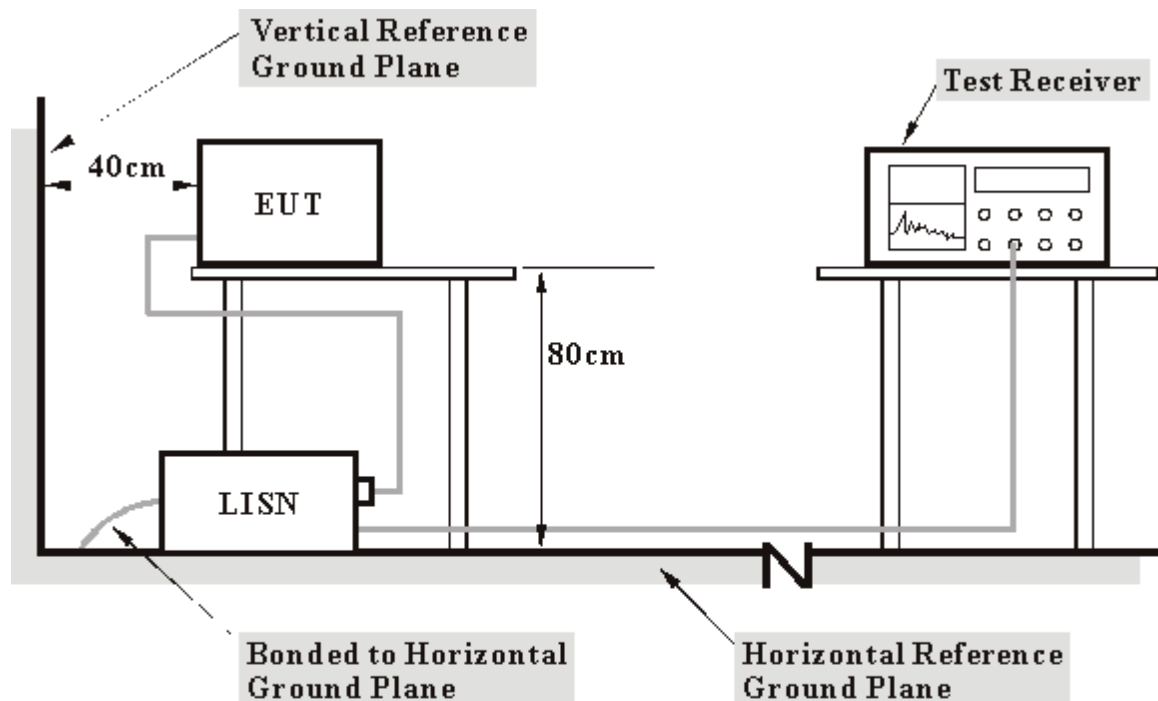

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS


Same as 4.1.6

5.1.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	PHASE	Line (L)
TESTED BY	Steven Lu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.06	47.04	-	47.10	-	64.43	54.43	-17.33	-
2	0.298	0.06	42.81	-	42.87	-	60.29	50.29	-17.42	-
3	0.494	0.08	40.22	-	40.30	-	56.10	46.10	-15.81	-
4	0.619	0.10	32.82	-	32.92	-	56.00	46.00	-23.08	-
5	5.434	0.27	27.16	-	27.43	-	60.00	50.00	-32.57	-
6	28.840	0.89	19.27	-	20.16	-	60.00	50.00	-39.84	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

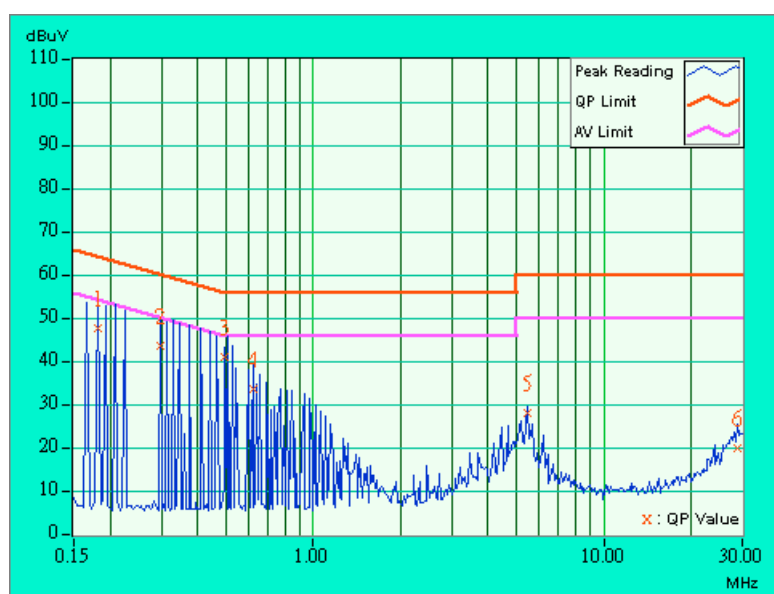

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
INPUT POWER (SYSTEM)	120Vac, 60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	PHASE	Neutral (N)
TESTED BY	Steven Lu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.05	46.13	-	46.18	-	63.74	53.74	-17.56	-
2	0.349	0.05	41.83	-	41.88	-	58.98	48.98	-17.10	-
3	0.495	0.07	39.74	-	39.81	-	56.09	46.09	-16.28	-
4	0.834	0.13	24.03	-	24.16	-	56.00	46.00	-31.84	-
5	5.434	0.25	27.03	-	27.28	-	60.00	50.00	-32.72	-
6	24.141	0.69	22.32	-	23.01	-	60.00	50.00	-36.99	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

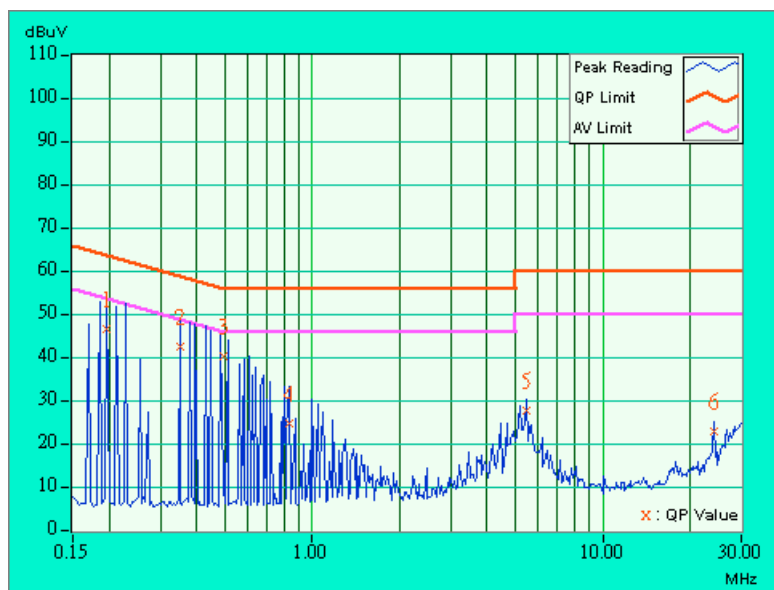

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	73.3
5250~5350	-27	73.3
5725~5825	-27 *note 1	73.3
	-17 *note 2	83.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



5.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May. 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiated_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05. 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05. 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



5.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

5.2.5 DEVIATION FROM TEST STANDARD

No deviation

5.2.6 TEST SETUP

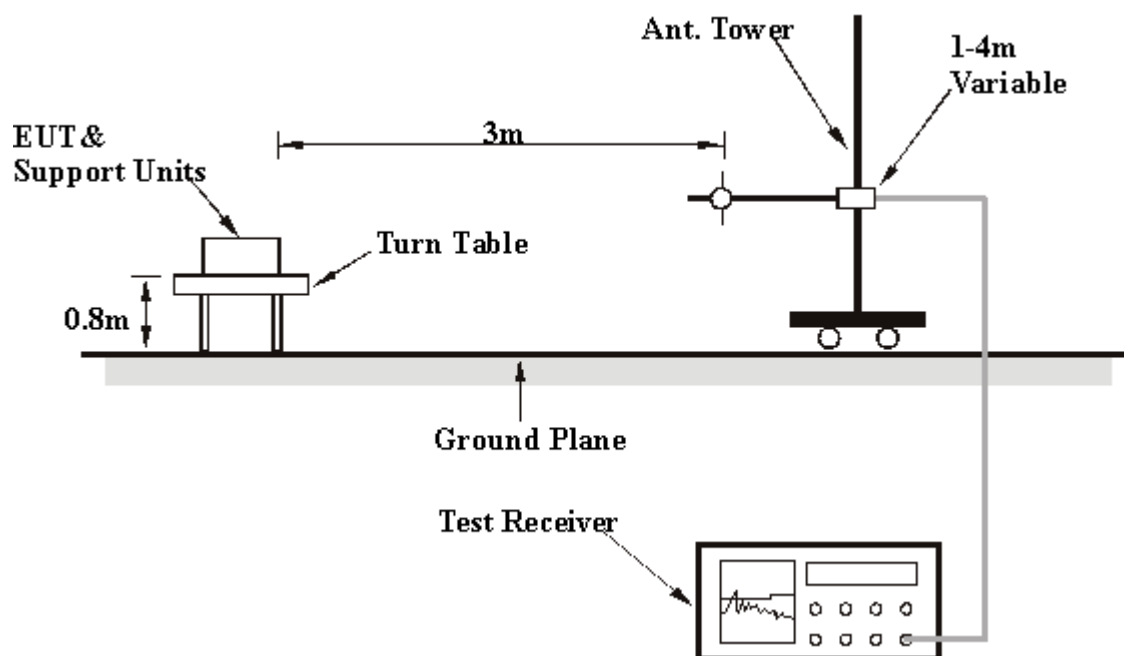

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.8 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	29.4 QP	43.50	-14.10	1.00 H	195	16.30	13.20
2	175.00	29.8 QP	43.50	-13.70	1.00 H	101	19.10	10.60
3	192.01	30.9 QP	43.50	-12.60	1.00 H	48	20.10	10.80
4	200.01	28.0 QP	43.50	-15.50	1.00 H	117	17.00	11.00
5	225.00	30.2 QP	46.00	-15.80	1.00 H	225	16.90	13.30
6	250.02	38.4 QP	46.00	-7.60	1.00 H	79	22.80	15.60
7	275.01	38.3 QP	46.00	-7.70	1.00 H	165	21.90	16.40
8	288.00	32.7 QP	46.00	-13.30	1.00 H	114	16.00	16.60
9	300.01	34.7 QP	46.00	-11.30	1.00 H	131	17.90	16.80
10	320.00	35.5 QP	46.00	-10.50	1.00 H	73	18.30	17.10
11	352.01	32.4 QP	46.00	-13.60	1.00 H	235	14.70	17.70
12	375.00	35.2 QP	46.00	-10.80	1.00 H	121	16.80	18.40
13	400.00	30.7 QP	46.00	-15.30	1.00 H	40	11.60	19.10
14	495.00	39.5 QP	46.00	-6.50	1.00 H	165	18.40	21.10
15	500.03	33.5 QP	46.00	-12.50	1.00 H	214	12.30	21.20
16	512.01	36.2 QP	46.00	-9.80	1.00 H	108	15.00	21.20
17	693.00	31.6 QP	46.00	-14.40	1.00 H	84	8.60	23.00
18	791.99	33.0 QP	46.00	-13.00	1.00 H	102	8.20	24.80
19	800.01	33.2 QP	46.00	-12.80	1.00 H	187	8.30	24.90
20	891.00	33.7 QP	46.00	-12.30	1.00 H	182	8.50	25.20
21	989.99	36.0 QP	54.00	-18.00	1.00 H	135	10.80	25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	37.8 QP	43.50	-5.70	1.12 V	45	24.60	13.20
2	150.00	33.4 QP	43.50	-10.10	1.00 V	136	21.90	11.50
3	175.00	36.3 QP	43.50	-7.20	1.00 V	38	25.60	10.60
4	200.00	29.2 QP	43.50	-14.30	1.00 V	100	18.20	11.00
5	225.00	37.6 QP	46.00	-8.40	1.00 V	92	24.30	13.30
6	250.01	38.9 QP	46.00	-7.10	1.00 V	0	23.30	15.60
7	275.01	33.4 QP	46.00	-12.60	1.00 V	185	16.90	16.40
8	288.00	37.3 QP	46.00	-8.70	1.00 V	185	20.70	16.60
9	297.00	30.2 QP	46.00	-15.80	1.00 V	203	13.40	16.70
10	300.00	30.4 QP	46.00	-15.60	1.00 V	94	13.60	16.80
11	320.00	42.1 QP	46.00	-3.90	1.00 V	82	25.00	17.10
12	375.01	36.0 QP	46.00	-10.00	1.00 V	91	17.60	18.40
13	384.00	39.0 QP	46.00	-7.00	1.00 V	110	20.30	18.70
14	396.00	28.4 QP	46.00	-17.60	1.00 V	172	9.40	19.00
15	416.01	35.9 QP	46.00	-10.10	1.00 V	152	16.60	19.30
16	450.00	31.4 QP	46.00	-14.60	1.00 V	73	11.70	19.80
17	495.00	44.1 QP	46.00	-1.90	1.00 V	209	23.10	21.10
18	500.00	37.4 QP	46.00	-8.60	1.00 V	74	16.20	21.20
19	519.74	34.7 QP	46.00	-11.30	1.00 V	229	13.60	21.20
20	576.00	41.7 QP	46.00	-4.30	1.00 V	124	19.80	21.90
21	608.00	37.3 QP	46.00	-8.70	1.00 V	94	14.60	22.70
22	608.00	37.8 QP	46.00	-8.20	1.00 V	175	15.10	22.70
23	640.01	35.3 QP	46.00	-10.70	1.00 V	99	12.50	22.80
24	671.99	37.0 QP	46.00	-9.00	1.00 V	59	14.10	22.90
25	693.01	35.1 QP	46.00	-10.90	1.00 V	153	12.10	23.00
26	792.01	39.4 QP	46.00	-6.60	1.00 V	81	14.70	24.80
27	891.01	33.7 QP	46.00	-12.30	1.00 V	166	8.50	25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
		CHANNEL	1
FREQUENCY RANGE	Above 1000 MHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4144.00	43.3 PK	74.00	-30.70	1.21 H	84	9.80	33.50
2	*5180.00	97.8 PK			1.41 H	39	61.60	36.20
2	*5180.00	86.8 AV			1.41 H	39	50.50	36.20
3	10360.00	55.5 PK	73.30	-17.80	1.33 H	33	11.00	44.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4144.00	43.0 PK	74.00	-31.00	1.24 V	21	9.50	33.50
2	#5150.00	58.0 PK	73.30	-15.30	1.40 V	194	21.80	36.20
2	#5150.00	48.0 AV	73.30	-25.30	1.40 V	194	11.80	36.20
3	*5180.00	107.3 PK			1.40 V	194	71.00	36.20
3	*5180.00	97.6 AV			1.40 V	194	61.40	36.20
4	10360.00	54.8 PK	73.30	-18.50	1.50 V	21	10.30	44.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
		CHANNEL	4
FREQUENCY RANGE	Above 1000 MHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4192.00	42.8 PK	74.00	-31.20	1.31 H	52	9.30	33.50
2	*5240.00	100.3 PK			1.55 H	151	64.00	36.30
2	*5240.00	91.0 AV			1.55 H	151	54.70	36.30
3	10480.00	57.7 PK	73.30	-15.60	1.30 H	34	13.00	44.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4192.00	43.7 PK	74.00	-30.30	1.37 V	245	10.10	33.50
2	*5240.00	108.5 PK			1.06 V	60	72.20	36.30
2	*5240.00	97.8 AV			1.06 V	60	61.50	36.30
3	10480.00	55.3 PK	73.30	-18.00	1.22 V	74	10.60	44.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "#" : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
		CHANNEL	5
FREQUENCY RANGE	Above 1000 MHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4208.00	43.0 PK	74.00	-31.00	1.35 H	34	9.40	33.60
2	*5260.00	98.2 PK			1.75 H	201	61.80	36.40
2	*5260.00	87.8 AV			1.75 H	201	51.40	36.40
3	10520.00	58.3 PK	73.30	-15.00	1.12 H	41	13.50	44.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4208.00	43.3 PK	74.00	-30.70	1.36 V	59	9.70	33.60
2	*5260.00	108.8 PK			1.52 V	194	72.40	36.40
2	*5260.00	98.9 AV			1.52 V	194	62.50	36.40
3	10520.00	60.3 PK	73.30	-13.00	1.12 V	352	15.50	44.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” : Fundamental frequency
6. “#” : The radiated frequency falling in the restricted band.

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
		CHANNEL	8
FREQUENCY RANGE	Above 1000 MHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4255.00	44.0 PK	74.00	-30.00	1.31 H	251	10.40	33.60
2	*5320.00	96.3 PK			1.42 H	240	59.90	36.40
2	*5320.00	85.9 AV			1.42 H	240	49.40	36.40
3	#10640.00	55.4 PK	74.00	-18.60	1.51 H	47	10.30	45.10
3	#10640.00	44.7 AV	54.00	-9.30	1.51 H	47	-0.40	45.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4256.00	45.7 PK	74.00	-28.30	1.15 V	320	12.10	33.60
2	*5320.00	104.4 PK			1.25 V	222	68.00	36.40
2	*5320.00	93.7 AV			1.25 V	222	57.30	36.40
3	#5350.00	54.0 PK	74.00	-20.00	1.25 V	222	17.50	36.50
3	#5350.00	46.0 AV	54.00	-8.00	1.25 V	222	9.50	36.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” : Fundamental frequency
6. “#” : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
		CHANNEL	9
FREQUENCY RANGE	Above 1000 MHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4596.00	43.2 PK	74.00	-30.80	1.30 H	55	8.90	34.30
2	5715.00	59.1 PK	73.30	-14.20	1.41 H	160	22.00	37.10
3	5725.00	67.1 PK	83.30	-16.20	1.41 H	160	30.00	37.10
4	*5745.00	93.6 PK			1.41 H	160	56.50	37.10
4	*5745.00	84.9 AV			1.41 H	160	47.80	37.10
5	#11490.00	56.6 PK	74.00	-17.40	1.31 H	224	10.90	45.80
6	#11490.00	45.8 AV	54.00	-8.20	1.31 H	224	0.00	45.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4596.00	45.0 PK	74.00	-29.00	1.25 V	217	10.70	34.30
2	5715.00	62.5 PK	73.30	-10.80	1.12 V	32	25.40	37.10
3	5725.00	74.8 PK	83.30	-8.50	1.23 V	62	37.70	37.10
4	*5745.00	108.9 PK			1.65 V	85	71.80	37.10
4	*5745.00	96.8 AV			1.65 V	85	59.70	37.10
5	#11490.00	56.3 PK	74.00	-17.70	1.23 V	62	10.50	45.80
5	#11490.00	45.5 AV	54.00	-8.50	1.23 V	62	-0.20	45.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” : Fundamental frequency
6. “#” : The radiated frequency falling in the restricted band.

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	SL-5354AP Aries
		CHANNEL	12
FREQUENCY RANGE	Above 1000 MHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4644.00	43.9 PK	74.00	-30.10	1.23 H	235	9.40	34.50
2	*5805.00	100.2 PK			1.87 H	26	63.00	37.20
2	*5805.00	90.7 AV			1.87 H	26	53.50	37.20
3	5825.00	66.3 PK	83.30	-17.00	1.87 H	26	29.00	37.30
4	5835.00	57.3 PK	73.30	-16.00	1.87 H	26	20.00	37.30
5	#11611.00	55.9 PK	74.00	-18.10	1.54 H	214	10.20	45.60
5	#11611.00	45.4 AV	54.00	-8.60	1.54 H	214	-0.30	45.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4644.00	44.2 PK	74.00	-29.80	1.08 V	144	9.70	34.50
2	*5805.00	106.0 PK			1.18 V	165	68.80	37.20
2	*5805.00	95.4 AV			1.18 V	165	58.20	37.20
3	5825.00	72.3 PK	83.30	-11.00	1.18 V	165	35.00	37.30
4	5835.00	58.3 PK	73.30	-15.00	1.18 V	165	21.00	37.30
5	#11611.00	56.2 PK	74.00	-17.80	1.50 V	231	10.50	45.60
5	#11611.00	45.2 AV	54.00	-8.80	1.50 V	231	-0.50	45.60

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” : Fundamental frequency
6. “#” : The radiated frequency falling in the restricted band.