

EMC Test Report

Application for FCC Grant of Equipment Authorization Canada Certification

Innovation, Science and Economic Development Canada RSS-Gen Issue 4 / RSS 247 Issue 1 FCC Part 15 Subpart C

Model: FB407

IC CERTIFICATION #: 8542A-FB407
FCC ID: XRAFB407

APPLICANT: Fitbit, Inc.
405 Howard Street
San Francisco, CA 94105

TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-4, 2845B-7

REPORT DATE: May 9, 2016

REISSUE DATE: June 2, 2016

FINAL TEST DATES: March 4, 21 and 23, 2016


TOTAL NUMBER OF PAGES: 54

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	May 9, 2016	First release	
1.0	June 2, 2016	Clarified EUT orientation during spurious emissions	MEH

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ)	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
OTHER EUT DETAILS.....	8
ANTENNA SYSTEM	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	9
EUT OPERATION	10
TEST SITE.....	11
GENERAL INFORMATION.....	11
CONDUCTED EMISSIONS CONSIDERATIONS	11
RADIATED EMISSIONS CONSIDERATIONS	11
MEASUREMENT INSTRUMENTATION	12
RECEIVER SYSTEM	12
INSTRUMENT CONTROL COMPUTER	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS	13
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNABLE.....	13
INSTRUMENT CALIBRATION.....	13
TEST PROCEDURES	14
EUT AND CABLE PLACEMENT	14
CONDUCTED EMISSIONS.....	14
RADIATED EMISSIONS.....	14
CONDUCTED EMISSIONS FROM ANTENNA PORT	18
BANDWIDTH MEASUREMENTS	18
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	19
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	19
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	20
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	20
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	20
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	21
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	22
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	23
APPENDIX B TEST DATA	25
END OF REPORT	54

SCOPE

An electromagnetic emissions test has been performed on the Fitbit, Inc. model FB407, pursuant to the following rules:

RSS-Gen Issue 4 “General Requirements for Compliance of Radio Apparatus”
RSS 247 Issue 1 “Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices”
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2013
FCC DTS Measurement Guidance KDB558074

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer’s declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body’s review of the submitted documents. Once the equipment authorization has been obtained, the label

indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Fitbit, Inc. model FB407 complied with the requirements of the following regulations:

RSS-Gen Issue 4 “General Requirements for Compliance of Radio Apparatus”
RSS 247 Issue 1 “Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices”
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Fitbit, Inc. model FB407 and therefore apply only to the tested sample. The sample was selected and prepared by Sachin Sawalapurkar of Fitbit, Inc.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY

DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 247 5.2	Digital Modulation	Systems uses DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 247 5.2 (1)	6dB Bandwidth	752 kHz	>500kHz	Complies
15.247 (b) (3)	RSS 247 5.4 (4)	Output Power (multipoint systems)	3.7 dBm (2.3mW) EIRP = 1.5mW ^{Note 1}	1Watt, EIRP limited to 4 Watts.	Complies
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	-1.1 dBm/30kHz	8dBm/3kHz	Complies
15.247(d)	RSS 247 5.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	All emissions < -30 dBc	< -30dBc ^{Note 2}	Complies
15.247(d) / 15.209	RSS 247 5.5	Radiated Spurious Emissions 30MHz – 25 GHz	49.6 dBμV/m @ 4959.9 MHz (-4.4 dB)	Refer to the limits section (p20) for restricted bands, all others <-30dBc ^{Note 2}	Complies

Note 1: EIRP calculated using antenna gains of -2.0 dB for the highest EIRP system.

Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Antenna is integral	Unique or integral antenna required	Complies
15.407 (b) (6)	RSS-Gen Table 3	AC Conducted Emissions	34.3 dBμV @ 0.612 MHz(-11.7 dB)	Refer to page 19	Complies
15.247 (i)	RSS 102	RF Exposure Requirements	Refer to SAR exclusion calculations in separate exhibit and RSS 102 declaration	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP-100 RSS-Gen 6.6	Occupied Bandwidth	1067 kHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Fitbit, Inc. model FB407 is a wireless activity tracker. The EUT was treated as handheld equipment during testing to simulate the end-user environment. The EUT is powered via a rechargeable Li battery.

The sample was received on March 4, 2016 and tested on March 4, 21 and 23, 2016. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Fitbit	FB407	Fitness Tracker	0X16820a23e021	XRAFB407
Fitbit	FB407	Fitness Tracker	0x167399241821 (antenna port)	XRAFB407

OTHER EUT DETAILS

Bluetooth Low Energy mode only, does not support Basic/EDR operation
A modified sample with a temporary RF port was provided for antenna port measurements.

ANTENNA SYSTEM

Internal antenna, -2.0dBi

ENCLOSURE

The EUT enclosure is primarily constructed of plastic with a metal frame. It measures approximately 2.5 cm wide by 3.5 cm deep by 1.5 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Test Configuration #1

Company	Model	Description	Serial Number	FCC ID
Fitbit		Charge cable	-	N/A
Apple	A1265	USB charger	-	N/A

Test Configuration #2

Company	Model	Description	Serial Number	FCC ID
Fitbit	NA	Test fixture	-	N/A
Lenovo	T430	Laptop	-	N/A
Lenovo		Laptop power supply	-	N/A

The following equipment was used as remote support equipment for emissions testing:

Test Configuration #1

Company	Model	Description	Serial Number	FCC ID
Lenovo	T430	Laptop*		
Lenovo		Laptop power supply*		
Fitbit	NA	Test fixture*	NA	

* - These items were used to configure the EUT then disconnected

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Test Configuration #1 (EUT)

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
EUT contacts	Charge cable	Spring loaded pins	NA	NA
USB (charger)	Charge cable	Multiwire	Shielded	3
AC in (charger)	AC mains	Direct plug-in	NA	NA

Test Configuration #2 (EUT)

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
EUT contacts	Test fixture	Spring loaded pins	NA	NA
Antenna	Spectrum analyzer	Coax	Shielded	1

Test Configuration #2 (Additional on Support Equipment)

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
USB (test fixture)	Laptop	Multiwire	Shielded	1
DC in (laptop)	Laptop power supply	2 wire	Unshielded	2
AC in (power supply)	AC mains	2 wire	Unshielded	1

EUT OPERATION

During emissions testing the EUT was either transmitting at full power or receiving on the channel called out in the individual test.

TEST SITE

GENERAL INFORMATION

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Designation / Registration Numbers		Location
	FCC	Canada	
Chamber 4	US0027	2845B-4	41039 Boyce Road Fremont, CA 94538-2435
Chamber 7	US0027	2845B-7	

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

Software is used to view and convert receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers. The software used for radiated and conducted emissions measurements is NTS EMI Test Software (rev 2.10)

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

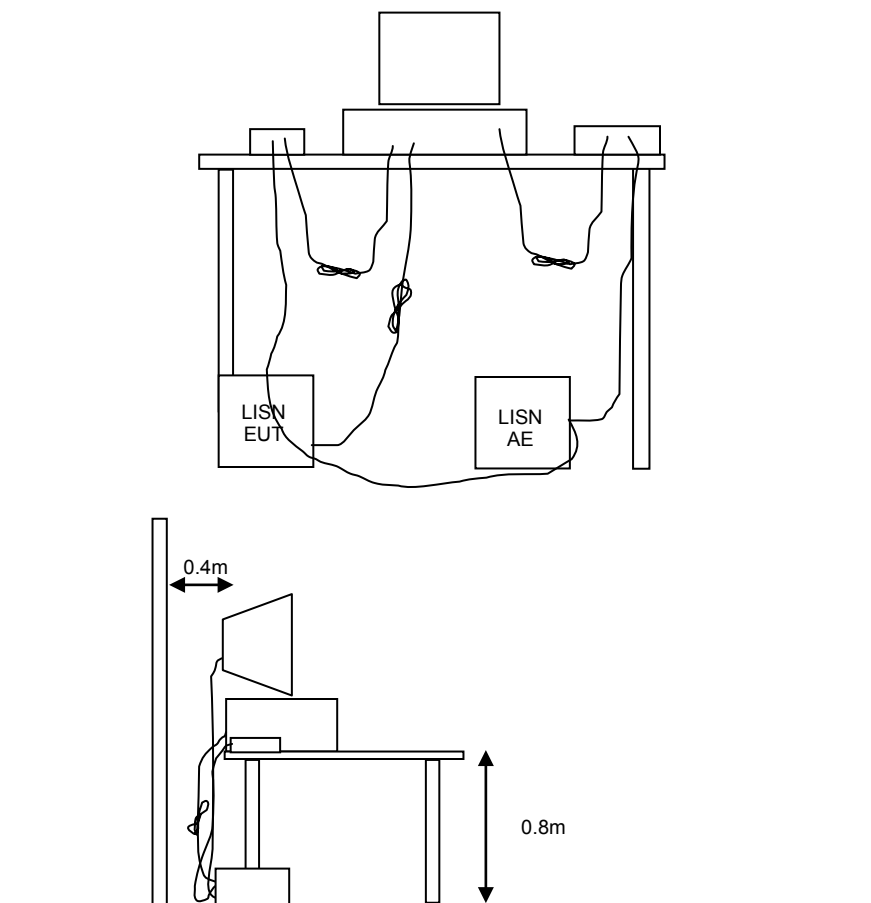


Figure 1 Typical Conducted Emissions Test Configuration



RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

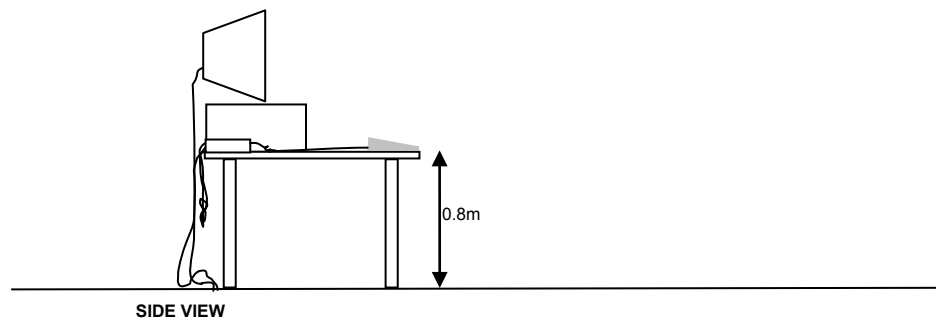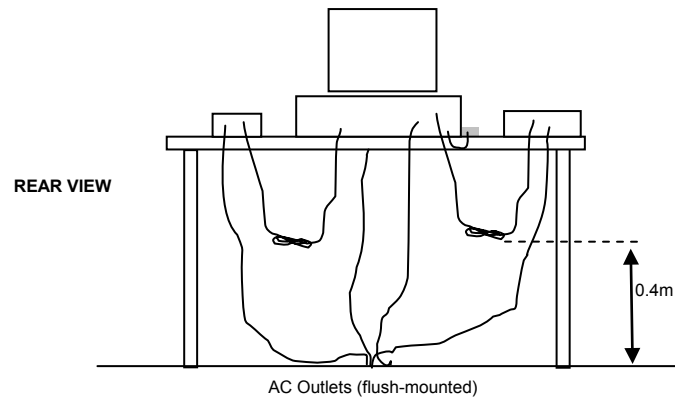


Typical Test Configuration for Radiated Field Strength Measurements

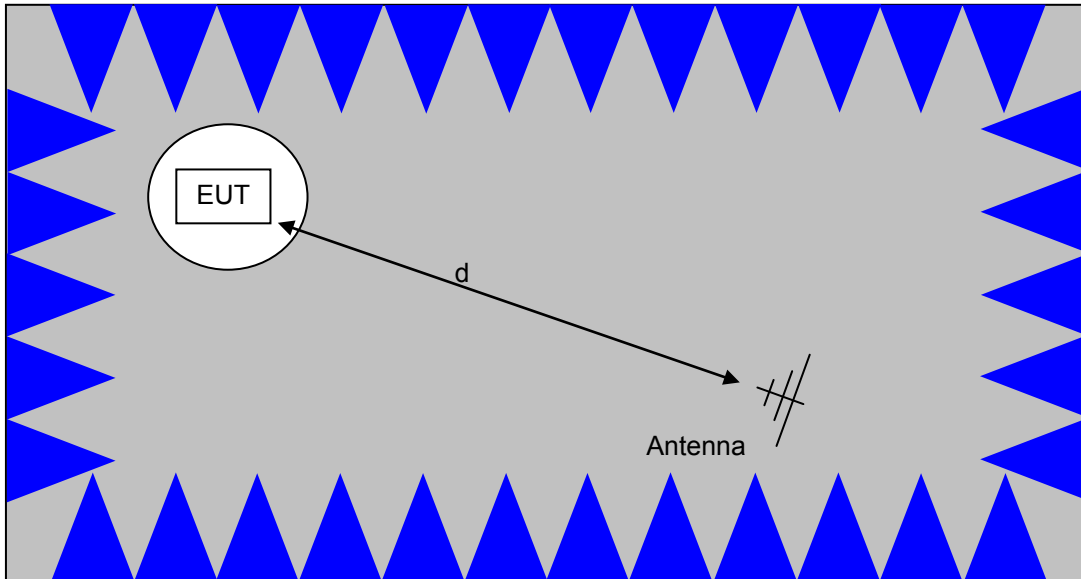

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

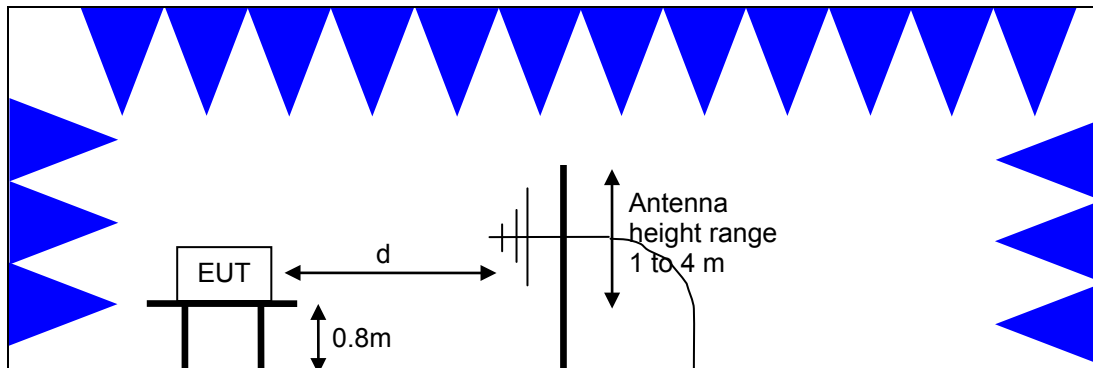

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

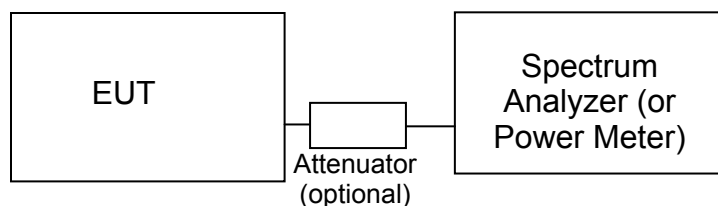**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density.

Operating Frequency (MHz)	Output Power	Power Spectral Density
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

¹ The restricted bands are detailed in FCC 15.205 and RSS-Gen Table 6

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \log_{10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \log_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 1000 - 25,000 MHz, 04-Mar-16					
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/26/2014	6/26/2016
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
HP / Miteq	SA40 Head (Red)	TTA1840-45-5P-HG-S	1145	7/17/2015	7/17/2016
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Hewlett Packard	High Pass filter, 8.2 GHz	P/N 84300-80039	1156	6/2/2015	6/2/2016
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	7/13/2015	7/13/2016
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/28/2014	8/28/2017
Radiated Spurious Emissions, 1000 - 12,750 MHz, 04-Mar-16					
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/26/2014	6/26/2016
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	7/13/2015	7/13/2016
Radiated Spurious Emissions, 30 - 1,000 MHz, 21-Mar-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1549	6/2/2015	6/2/2017
Hewlett Packard	9KHz-1300MHz pre-amp	8447F	2777	1/26/2016	1/26/2017
Bandedges, 1000 - 2,500 MHz, 21-Mar-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/26/2014	6/26/2016
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Radiated Emissions, 1000 - 25,000 MHz, 21-Mar-16					
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/26/2014	6/26/2016
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
HP / Miteq	SA40 Head (Red)	TTA1840-45-5P-HG-S	1145	7/17/2015	7/17/2016
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Hewlett Packard	High Pass filter, 8.2 GHz (Purple System)	P/N 84300-80039	1767	11/3/2015	11/3/2016
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/28/2014	8/28/2017
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	9/16/2015	9/16/2016
Conducted Emissions - AC Power Ports, 21-Mar-16					
EMCO	LISN, 10 kHz-100 MHz	3825/2	1292	7/24/2015	7/24/2016



<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	5/14/2015	5/14/2016
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Radio Antenna Port (Power and Spurious Emissions), 23-Mar-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
NTS	NTS Capture Analyzer Software (rev 3.8)	N/A	0		N/A
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	6/22/2015	6/22/2016
Rohde & Schwarz	Open Switch and Control Unit, p/s	OSP120 with B157	3000	7/08/2015	6/8/2016

Appendix B Test Data

T99621 Pages 26 – 53

Client:	Fitbit, Inc.	Job Number:	JD99532
Product	FB407	T-Log Number:	T99621
System Configuration:	-	Project Manager:	Deepa Shetty
Contact:	Sachin Sawalapurkar	Project Coordinator:	-
Emissions Standard(s):	FCC 15.247/RSS-247/LP0002	Class:	B
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Fitbit, Inc.

Product

FB407

Date of Last Test: 4/6/2016

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Duty Cycle

Date of Test: 3/3/2016
 Test Engineer: Rafael varelas
 Test Location: Chamber #4

Duty cycle measurements performed on the worse case data rate for power.


Notes: Measurements taken with maximum RBW/VBW settings allowed.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1Mbps	0.64	Yes	0.406	1.9	3.9	2463

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

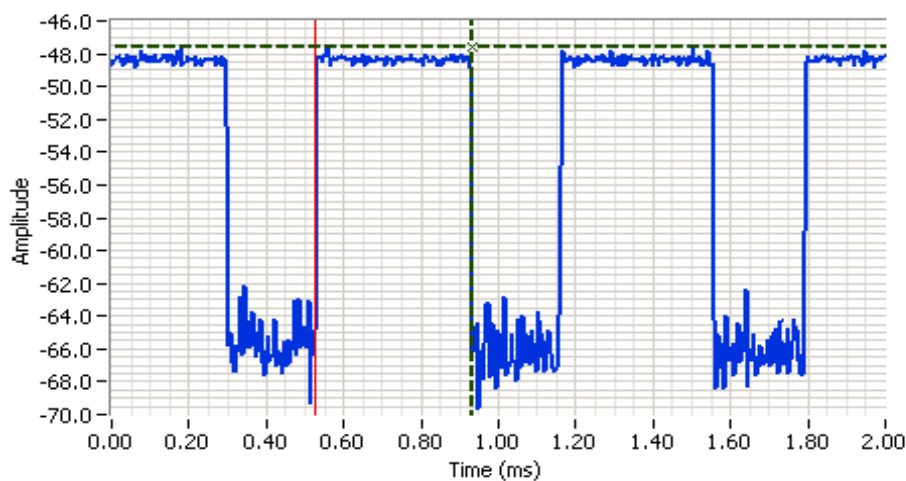

Analyzer Settings

Rohde&Schwarz, ESI
 CF: 2402.000 MHz
 SPAN: 0.000 MHz
 RB: 10.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 0.0 DB
 Sweep Time: 2.0ms
 Ref Lvl: -12.0 DBM

Comments

BLE duty cycle
 On time = .0406ms
 Off time = 0.229ms
 Duty Cycle = 64%

Cursor 1	0.9323	-47.6		Delta Time (ms)	0.406
Cursor 1	0.5260	0.0		Delta Amplitude	47.6

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

RSS-247 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 22.4 °C
 Rel. Humidity: 36 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
1	BLE	2402MHz	-	13	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(d)	37.8 dBμV/m @ 2386.1 MHz (-16.2 dB)
		2480MHz	-		Restricted Band Edge (2483.5 MHz)		39.3 dBμV/m @ 2483.6 MHz (-14.7 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

Sample S/N: 0X16820a23e021 (S/N:EV1-SEAL-103) (With Band Attached)
 Driver: 22.20
 Antenna: internal
 Build Time: Dec 3 2015

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has a duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1 Mb/s	0.64	Yes	0.406	1.9	3.9	2463

Measurement Specific Notes:

Note 4:	Emission has constant duty cycle $< 98\%$, average measurement performed: RBW=1MHz, VBW $>1/T$ but not less than 10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor
Note 7:	Plots of the average and peak bandedge do not account for any duty cycle correction. Refer to the tabular results for final measurements.



EMC Test Data

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1: Radiated Bandedge Measurements

Date of Test: 3/21/2016 0:00
 Test Engineer: John Caizzi
 Test Location: Chamber 7


Config. Used: 1
 Config Change: none
 EUT Voltage: 5 VDC (USB)

Channel: 2402MHz Mode: BLE
 Tx Chain: N/A Data Rate: 1 Mb/s

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
EUT flat								
2377.740	34.1	V	54.0	-19.9	Avg	0	1.00	Vavg 100; RB 1 MHz; VB: 3 kHz
2378.540	42.5	V	74.0	-31.5	PK	0	1.00	
2385.990	37.3	H	54.0	-16.7	Avg	170	1.90	Vavg 100; RB 1 MHz; VB: 3 kHz
2381.980	50.1	H	74.0	-23.9	PK	170	1.90	
EUT side								
2386.070	37.8	H	54.0	-16.2	Avg	6	1.30	Vavg 100; RB 1 MHz; VB: 3 kHz
2388.000	51.0	H	74.0	-23.0	PK	6	1.30	
2386.070	34.6	V	54.0	-19.4	Avg	360	1.34	Vavg 100; RB 1 MHz; VB: 3 kHz
2386.790	44.6	V	74.0	-29.4	PK	360	1.34	
EUT upright								
2385.990	37.3	V	54.0	-16.7	Avg	0	1.64	Vavg 100; RB 1 MHz; VB: 3 kHz
2388.720	49.9	V	74.0	-24.1	PK	0	1.64	
2385.990	34.7	H	54.0	-19.3	Avg	360	1.64	Vavg 100; RB 1 MHz; VB: 3 kHz
2380.540	44.9	H	74.0	-29.1	PK	360	1.64	

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

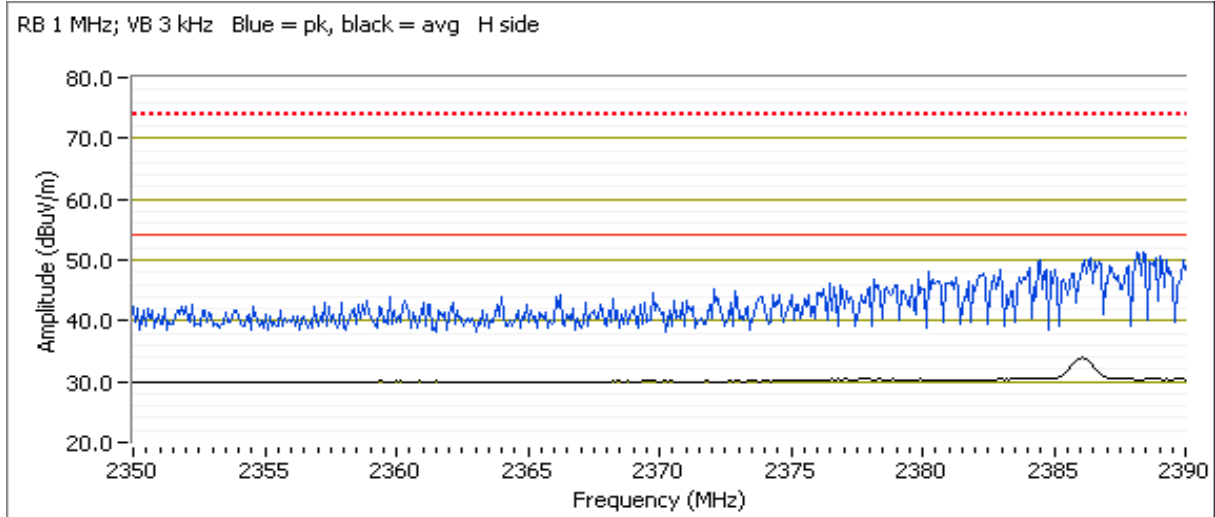


Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Channel: 2480MHz Mode: BLE
 Tx Chain: N/A Data Rate: 1 Mb/s

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.570	39.3	H	54.0	-14.7	Avg	0	1.24	Vavg 100; RB 1 MHz; VB: 3 kHz
2483.830	64.0	H	74.0	-10.0	PK	0	1.24	

RB 1 MHz; VB 3 kHz Blue = pk, black = avg H side

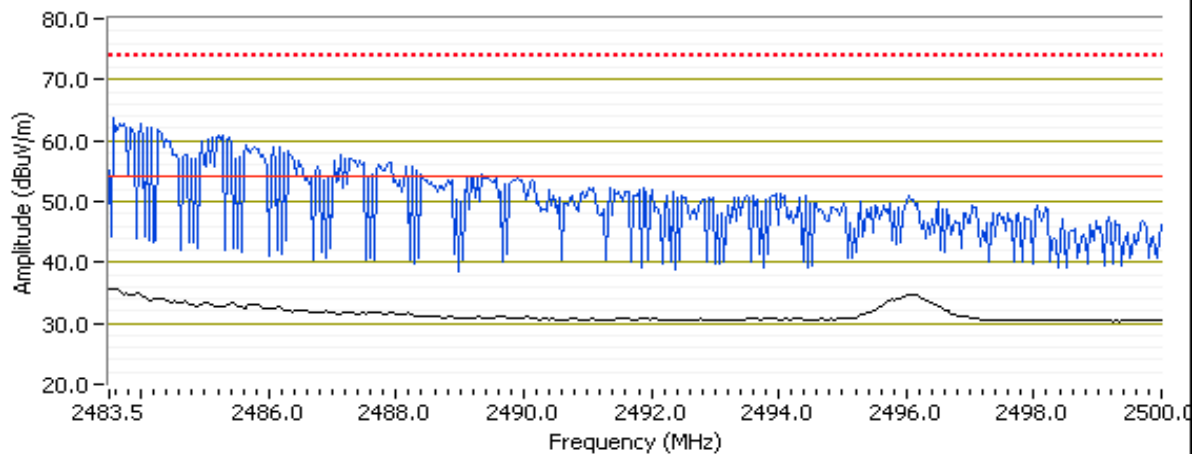

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

RSS-247 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 22.4 °C
 Rel. Humidity: 36 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
1	BLE	2402MHz	-	13	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(d)	49.0 dBµV/m @ 9607.2 MHz (-5.0 dB)
	BLE	2442MHz	-	13	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(d)	49.4 dBµV/m @ 4883.8 MHz (-4.6 dB)
	BLE	2480MHz	-	13	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(d)	49.6 dBµV/m @ 4959.9 MHz (-4.4 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

Sample S/N: 0X16820a23e021 (S/N:EV1-SEAL-103) (With Band Attached)
 Driver: 22.20
 Antenna: internal
 Build Time: Dec 3 2015

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

2.4GHz band reject filter used

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1Mbps	0.64	Yes	0.406	1.9	3.9	2463

Measurement Specific Notes:

Note 1:	Emission in non-restricted band, but limit of 15.209 used.
Note 2:	Emission in non-restricted band, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 4:	Emission has constant duty cycle $< 98\%$, average measurement performed: RBW=1MHz, VBW $>1/T$ but not less than 10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor
Note 7:	Plots of the average and peak bandedge do not account for any duty cycle correction. Refer to the tabular results for final measurements.

Preliminary testing was performed to assess worse case orientation of the product. Worse case results presented

Worst case orientation: side

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: BLE


Run #1a: Low Channel

Date of Test: 3/21/2016 0:00
 Test Engineer: Rafael Varelas
 Test Location: Chamber #7

Config. Used: 1
 Config Change: none
 EUT Voltage: 5 VDC (USB)

Channel: 2402MHz Mode: BLE
 Tx Chain: N/A Data Rate: 1Mbps

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
9607.180	49.0	V	54.0	-5.0	Avg	360	1.1	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
9607.160	55.3	V	74.0	-18.7	PK	360	1.1	RB 1 MHz; VB 3 MHz; Peak
4803.940	45.7	H	54.0	-8.3	Avg	133	1.2	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
4804.380	50.1	H	74.0	-23.9	PK	133	1.2	RB 1 MHz; VB 3 MHz; Peak
4929.900	36.9	V	54.0	-17.1	Avg	225	1.0	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
4924.870	46.0	V	74.0	-28.0	PK	225	1.0	RB 1 MHz; VB 3 MHz; Peak

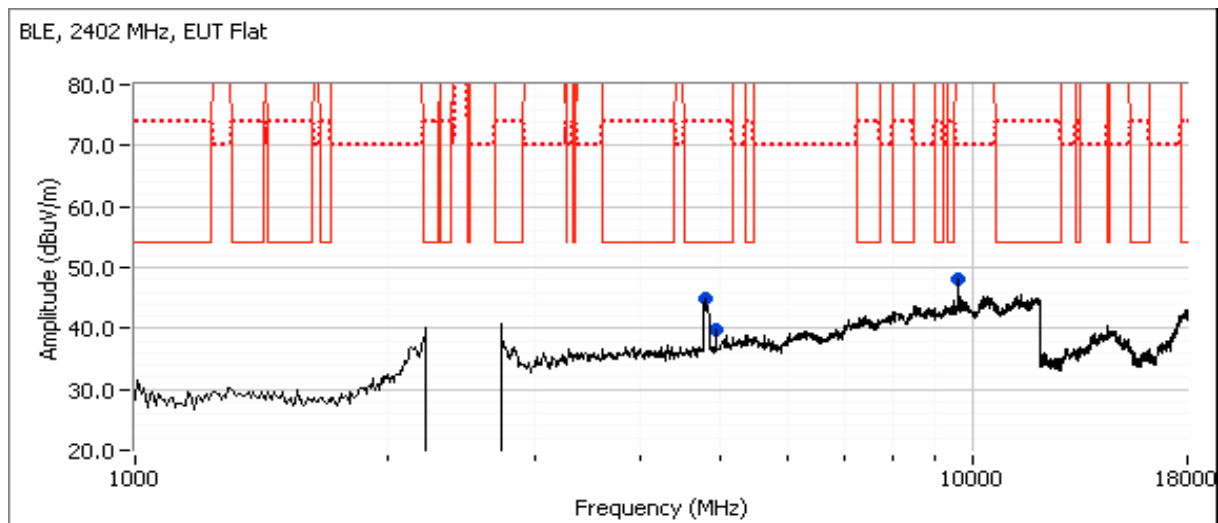

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1b: Center Channel

Date of Test: 3/4/2016 0:00

Test Engineer: John Caizzi / Rafael Varelas

Test Location: Chamber #4

Config. Used: 1


Config Change: none

EUT Voltage: 5 VDC (USB)

Channel: 2442MHz Mode: BLE
 Tx Chain: N/A Data Rate: 1Mbps

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4883.770	49.4	V	54.0	-4.6	AVG	192	1.6	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
4883.560	52.1	V	74.0	-21.9	PK	192	1.6	RB 1 MHz; VB 3 MHz; Peak
1328.910	36.3	V	54.0	-17.7	AVG	54	1.0	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
1327.710	47.3	V	74.0	-26.7	PK	54	1.0	RB 1 MHz; VB 3 MHz; Peak
9767.200	48.7	V	54.0	-5.3	AVG	166	1.1	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
9766.880	55.3	V	70.0	-14.7	PK	166	1.1	RB 1 MHz; VB 3 MHz; Peak

Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

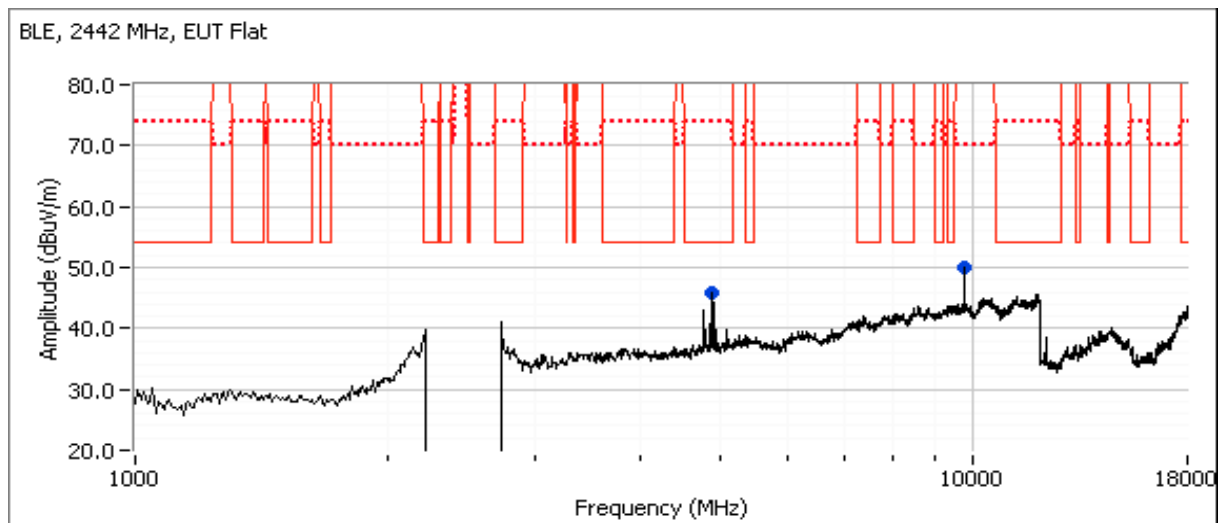

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1c: High Channel


Date of Test: 3/21/2016 0:00
 Test Engineer: John Caizzi
 Test Location: Chamber #7

Config. Used: 1
 Config Change: none
 EUT Voltage: 5 VDC (USB)

Channel: 2480MHz Mode: BLE
 Tx Chain: N/A Data Rate: 1Mbps

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4959.940	49.6	V	54.0	-4.4	Avg	339	1.5	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
4960.720	52.9	V	74.0	-21.1	PK	339	1.5	RB 1 MHz; VB 3 MHz; Peak
9919.120	47.8	V	54.0	-6.2	Avg	350	1.0	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
9918.890	54.8	V	74.0	-19.2	PK	350	1.0	RB 1 MHz; VB 3 MHz; Peak
4777.080	38.1	V	54.0	-15.9	Avg	160	1.5	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
4777.030	48.9	V	74.0	-25.1	PK	160	1.5	RB 1 MHz; VB 3 MHz; Peak
4981.220	38.2	V	54.0	-15.8	Avg	0	1.0	Note 4, RB 1 MHz; VB 3 kHz; Peak VA
4981.980	50.0	V	74.0	-24.0	PK	0	1.0	RB 1 MHz; VB 3 MHz; Peak

BLE, 2480 MHz, EUT Flat

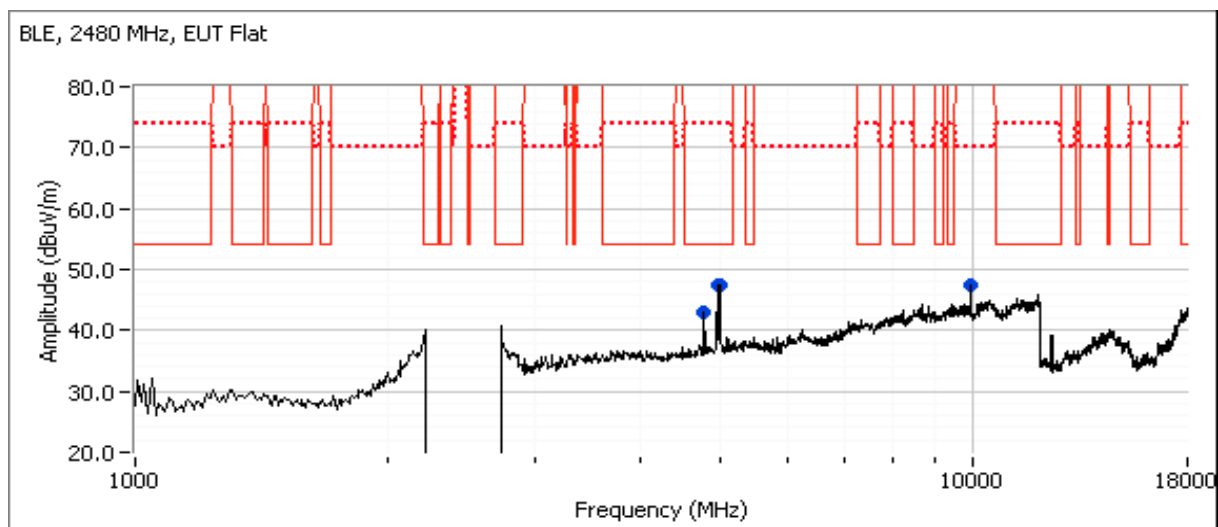

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

RSS-247 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 22.4 °C
 Rel. Humidity: 36 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
1	BLE	2402MHz	-	13	Radiated Emissions, 30 - 1000 MHz	FCC Part 15.209 / 15.247(d)	24.8 dBμV/m @ 30.00 MHz (-15.2 dB)
		2480MHz	-				33.1 dBμV/m @ 924.2 MHz (-12.9 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

Sample S/N: 0X16820a23e021 (S/N:EV1-SEAL-103) (With Band Attached)
 Driver: 22.20
 Antenna: internal
 Build Time: Dec 3 2015

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

2.4GHz band reject filter used

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1 Mb/s	0.64	Yes	0.406	1.9424769	3.8849538	2463

Measurement Specific Notes:

Note 1:	Emission in non-restricted band, but limit of 15.209 used.
Note 4:	Emission has constant duty cycle $< 98\%$, average measurement performed: RBW=1MHz, VBW $>1/T$ but not less than 10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor

Preliminary testing was performed to assess worse case orientation of the product. Worse case results presented

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1: Radiated Spurious Emissions, 30 - 1000 MHz. Operating Mode: BLE


Date of Test: 3/21/2016 0:00
 Test Engineer: John Caizzi
 Test Location: Chamber 7

Config. Used: 1
 Config Change: none
 EUT Voltage: 5 VDC (USB)

Run #1a: Low Channel

Channel: 2402MHz Mode: BLE
 Tx Chain: N/A Data Rate: 1 Mb/s

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
30.000	24.8	V	40.0	-15.2	Peak	110	2.5	Note 1
37.776	20.8	V	40.0	-19.2	Peak	82	1.0	
171.904	27.1	H	43.5	-16.4	Peak	300	3.5	
181.623	28.2	H	43.5	-15.3	Peak	15	2.0	Note 1

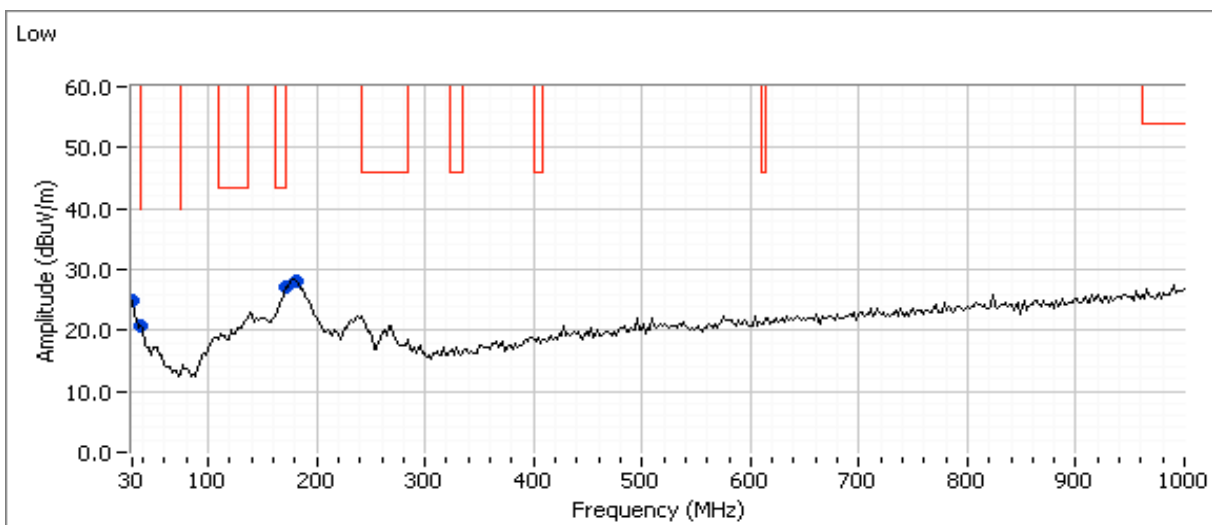


Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1c: High Channel

Channel: 2480MHz Mode: BLE
 Tx Chain: Main Data Rate: 1 Mb/s

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
30.000	24.7	V	40.0	-15.3	Peak	26	1.0	Notes 1, 2
37.776	20.2	V	40.0	-19.8	Peak	22	1.0	Note 2
142.745	29.5	H	43.5	-14.0	Peak	348	1.0	Note 1
171.904	27.0	H	43.5	-16.5	Peak	343	2.0	Note 2
179.679	28.6	H	43.5	-14.9	Peak	202	2.0	Notes 1, 2
924.188	33.1	V	46.0	-12.9	Peak	328	1.5	Notes 1

Note 2 Emission identical to low channel; not radio related.

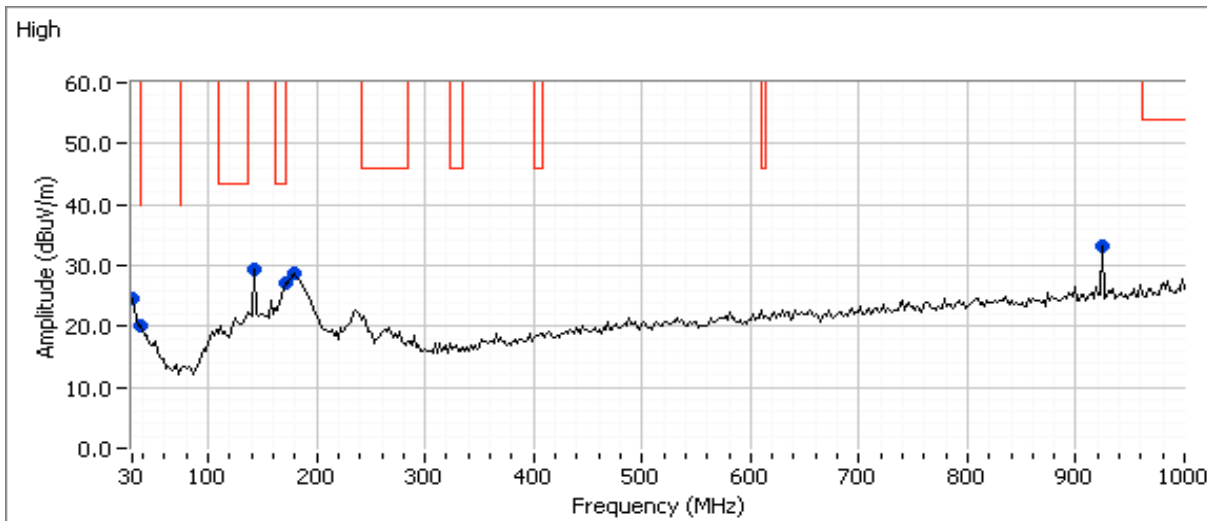

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

RSS-247 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/23/2016
 Test Engineer: John Caizzi
 Test Location: Lab 4B

Config. Used: 2
 Config Change: none
 EUT Voltage: 5 VDC (USB)

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 23 °C
 Rel. Humidity: 40 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	13		Output Power	15.247(b)	Pass	3.7 dBm (2.3mW)
2			Power spectral Density (PSD)	15.247(d)	Pass	-1.1 dBm/30kHz
3			Minimum 6dB Bandwidth	15.247(a)	Pass	752 kHz
3			99% Bandwidth	RSS GEN	-	1067 kHz
4			Spurious emissions	15.247(b)	Pass	All emissions < -30 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Client:	Fitbit, Inc.	Job Number:	JD99532
Model:	FB407	T-Log Number:	T99621
Contact:	Sachin Sawalapurkar	Project Manager:	Deepa Shetty
Standard:	FCC 15.247/RSS-247/LP0002	Project Coordinator:	-
		Class:	N/A

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1 Mb/s	0.64	Yes	0.406	1.9424769	3.8849538	2463

Sample Notes

Sample S/N: 0x167399241821 (EV1-RF-05)

Driver: 22.20, Build 0x00000000

Date: Dec 3/15

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #1: Output Power

Mode: BLE

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
13	2402	3.6	2.3	-2.0	Pass	1.6	0.0014		
	2440	3.7	2.3	-2.0	Pass	1.7	0.0015		
	2480	3.7	2.3	-2.0	Pass	1.7	0.0015		

Note 1: Output power measured using gated average power meter.

Note 2: Power setting - the software power setting used during testing, included for reference only.


Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #2: Power spectral Density

Mode: BLE

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) <small>Note 1</small>	Limit dBm/3kHz	Result
13	2402	-1.1	8.0	Pass
	2440	-1.2	8.0	Pass
	2480	-1.3	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

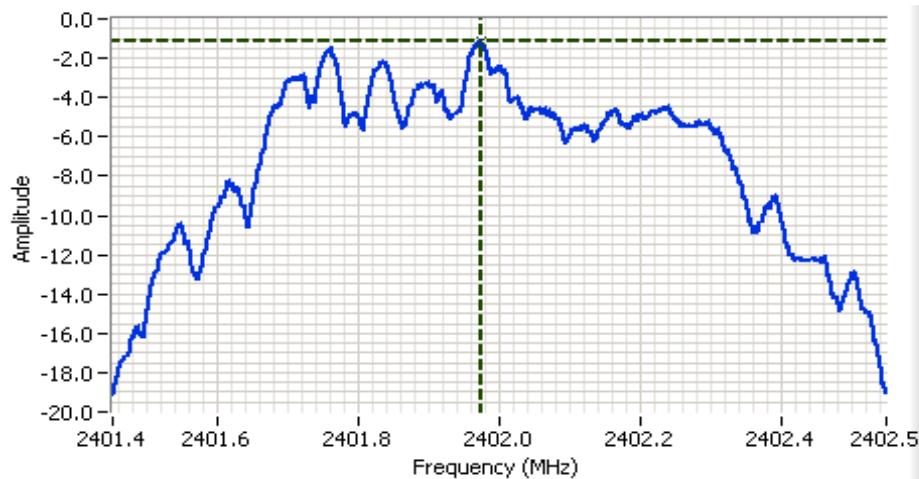

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 1.100 MHz
 RB: 30.0 kHz
 VB: 91.0 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.9 DB
 Sweep Time: 1.2ms
 Ref Lvl: 10.0 DBM

Comments

PSD = -1.1 dBm/30 kHz

Cursor 1	2401.9730	-1.1	
	0.0000	0.0	


Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #3: Signal Bandwidth

Mode: BLE

Power Setting	Frequency (MHz)	Bandwidth (kHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
13	2402	752	1055	100	30
	2440	775	1061		
	2480	792	1067		

Note 1: DTS BW: RBW=100kHz, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time, Span 2-5 times measured BW.
 99% BW: RBW=1-5% of 99%BW, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time. Span 1.5-5 times OBW.

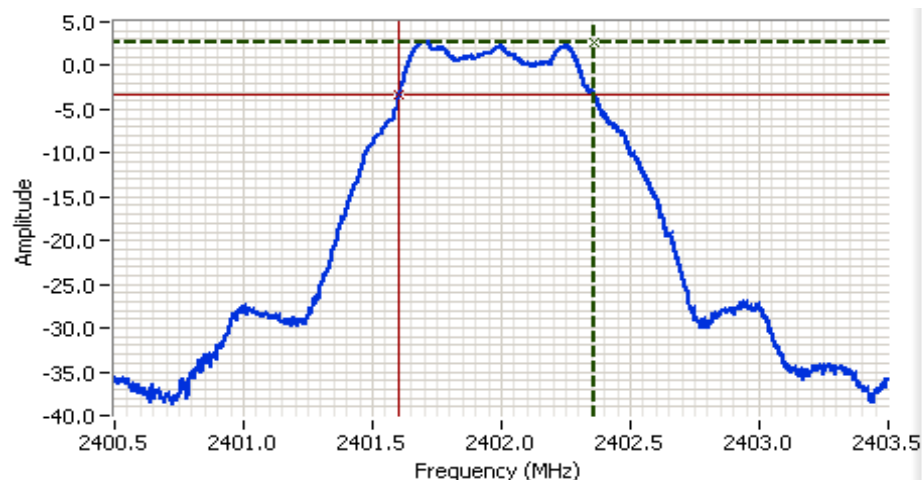


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 3.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.9 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.0 DBM

Comments

6dB BW: 752 kHz

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

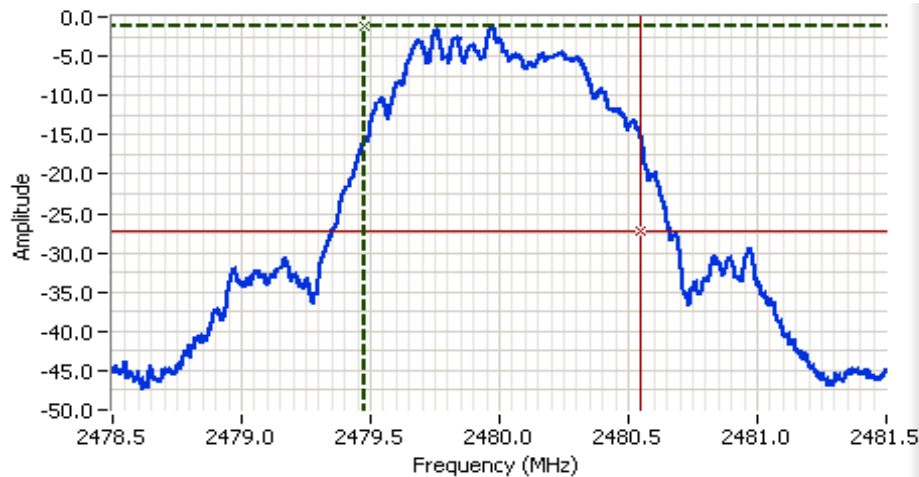







Analyzer Settings

Agilent Technologies, E4446A
 CF: 2480.000 MHz
 SPAN: 3.000 MHz
 RB: 30.0 kHz
 VB: 91.0 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.9 DB
 Sweep Time: 3.2ms
 Ref Lvl: 10.0 DBM

Comments

99% power BW: 1.067 MHz

Cursor 1	2479.4780	-1.3			
Cursor 2	2480.5450	-27.3			

Delta Freq. 1.067

Delta Amplitude 26.0


Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Run #4a: Out of Band Spurious Emissions

Frequency (MHz)	Power Setting	Mode	Limit	Result
2402	13	BLE	-30dBc	Pass
2440				Pass
2480				Pass


Note: All measurements performed using RBW=100kHz, VBW=300kHz, peak detector, max hold

Plot for low channel

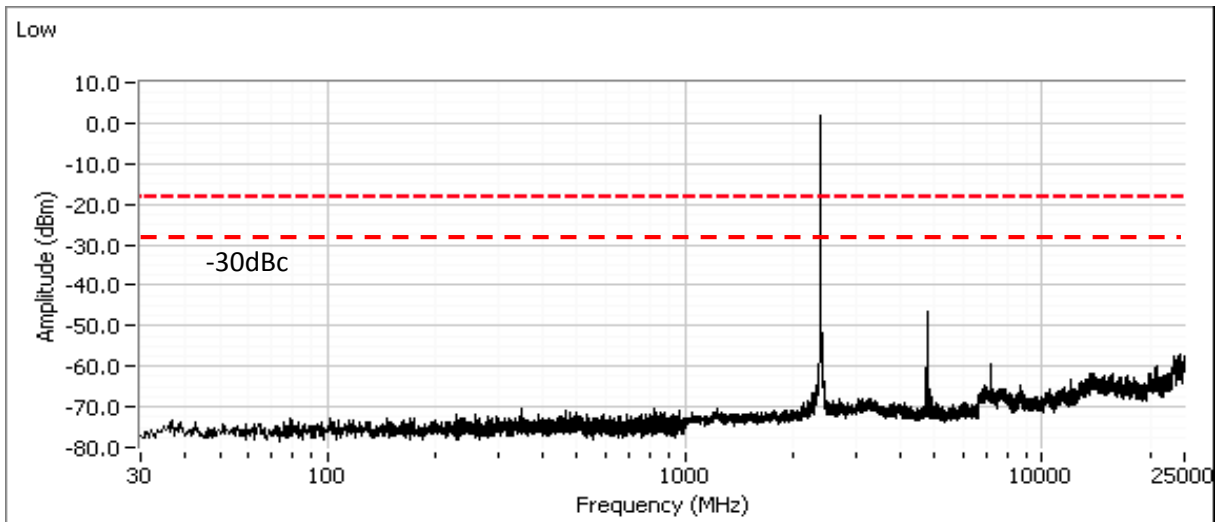


Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Additional plot showing compliance with -30dBc limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

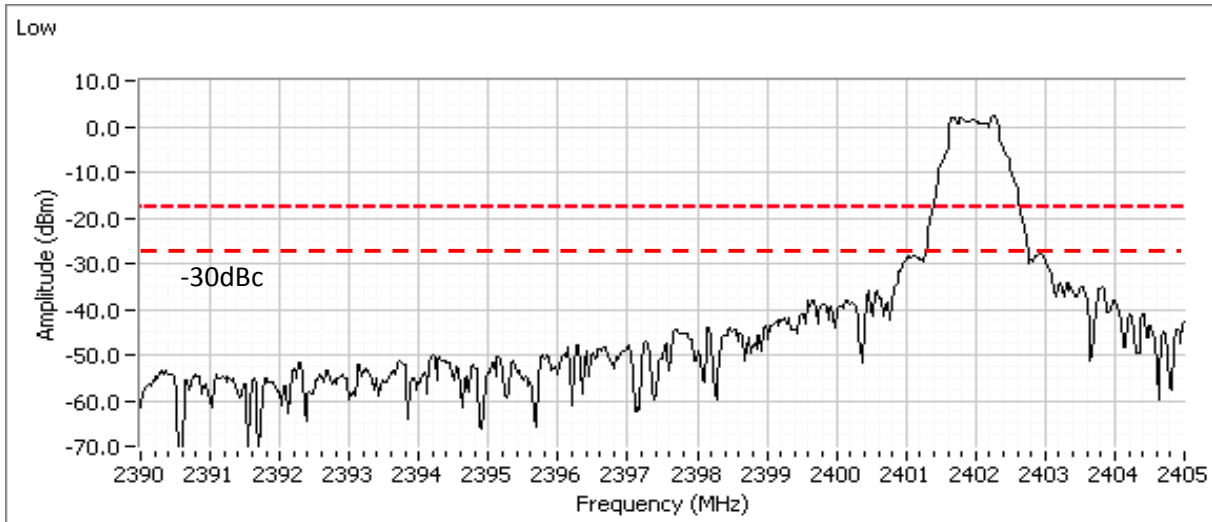


Plot for center channel

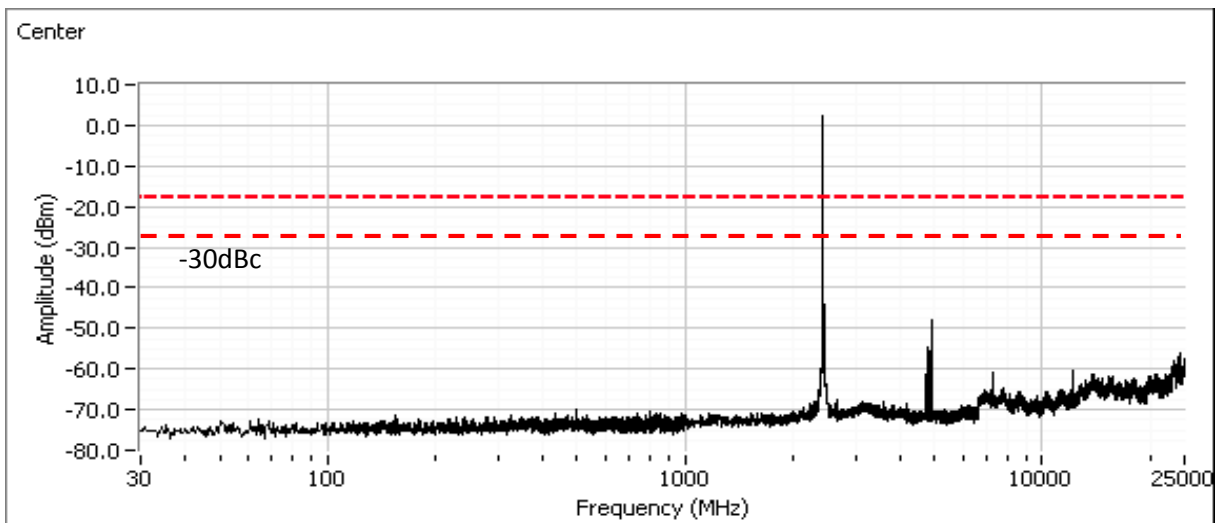

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: N/A

Plot for high channel

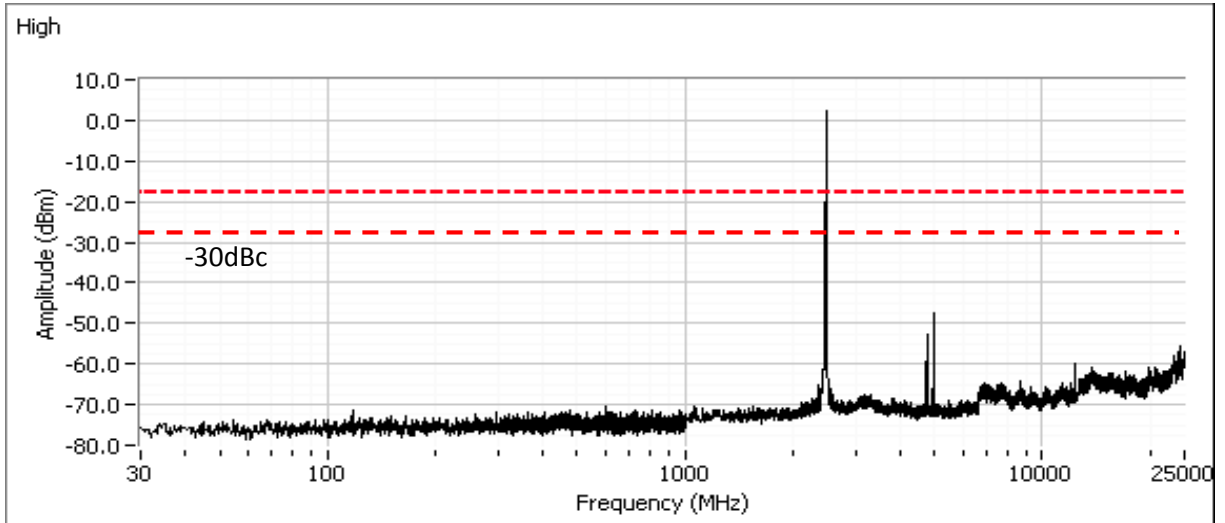

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: B

Conducted Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/21/2016
 Test Engineer: Rafael Varelas
 Test Location: Chamber #7

Config. Used: 1
 Config Change: None
 Host Unit Voltage 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions: Temperature: 22.4 °C
 Rel. Humidity: 36 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	FCC 15.207	Pass	34.3 dBμV @ 0.612 MHz (-11.7 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes


Sample S/N: 0X16820a23e021 (S/N:EV1-SEAL-103) (With Band Attached)
 Driver: 22.20
 Antenna: internal
 Build Time: Dec 3 2015

Notes:

EUT configured to transmit on channel 20 at power setting 13

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

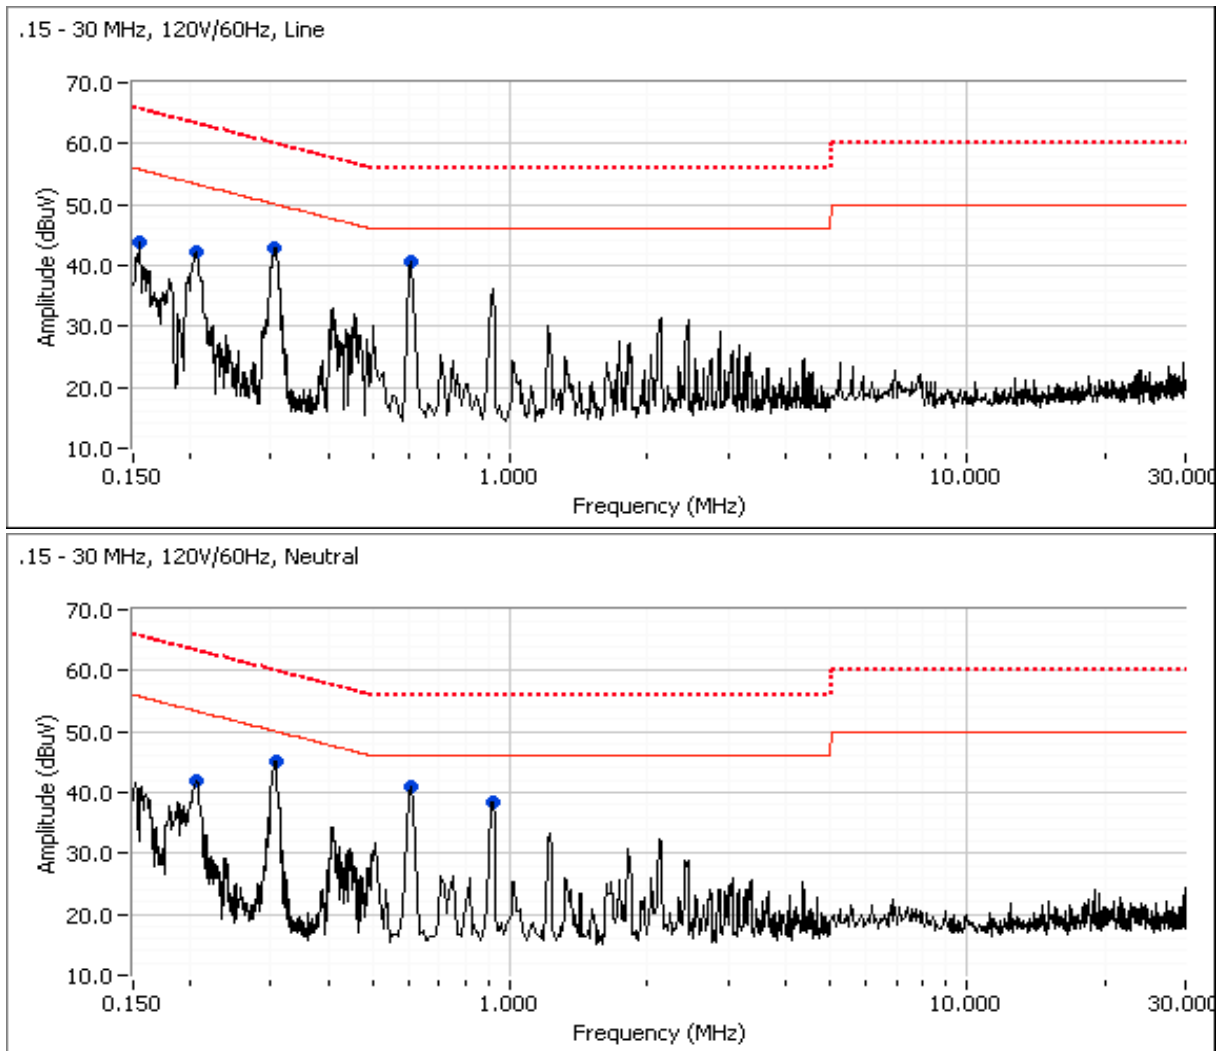

Client: Fitbit, Inc.	Job Number: JD99532
Model: FB407	T-Log Number: T99621
Contact: Sachin Sawalapurkar	Project Manager: Deepa Shetty
Standard: FCC 15.247/RSS-247/LP0002	Project Coordinator: -
	Class: B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	FCC 15.207		Detector QP/Ave	Comments
			Limit	Margin		
0.154	43.8	Line 1	55.7	-11.9	Peak	
0.203	42.2	Line 1	53.4	-11.2	Peak	
0.305	43.0	Line 1	50.1	-7.1	Peak	
0.608	40.7	Line 1	46.0	-5.3	Peak	
0.206	42.0	Neutral	53.3	-11.3	Peak	
0.305	45.1	Neutral	50.0	-4.9	Peak	
0.612	40.8	Neutral	46.0	-5.2	Peak	
0.912	38.5	Neutral	46.0	-7.5	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	FCC 15.207		Detector QP/Ave	Comments
			Limit	Margin		
0.612	34.3	Neutral	46.0	-11.7	AVG	AVG (0.10s)
0.912	33.3	Neutral	46.0	-12.7	AVG	AVG (0.10s)
0.305	35.9	Neutral	50.1	-14.2	AVG	AVG (0.10s)
0.305	43.3	Neutral	60.1	-16.8	QP	QP (1.00s)
0.612	38.8	Neutral	56.0	-17.2	QP	QP (1.00s)
0.608	37.5	Line 1	56.0	-18.5	QP	QP (1.00s)
0.305	41.2	Line 1	60.1	-18.9	QP	QP (1.00s)
0.912	37.0	Neutral	56.0	-19.0	QP	QP (1.00s)
0.608	26.4	Line 1	46.0	-19.6	AVG	AVG (0.10s)
0.305	28.9	Line 1	50.1	-21.2	AVG	AVG (0.10s)
0.203	40.3	Line 1	63.5	-23.2	QP	QP (1.00s)
0.203	18.4	Line 1	53.5	-35.1	AVG	AVG (0.10s)

End of Report

This page is intentionally blank and marks the last page of this test report.