

FCC Part 15 EMI TEST REPORT of

E.U.T. : Wireless Broadband Router

MODEL : IP806SM

FCC ID. : P27IP806SM

for

APPLICANT : Sercomm Corp.

ADDRESS : 3F, No. 81, Yu-Yih Rd., Chu-Nan, Miao-Li 350,
Taiwan, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 8 LANE 29, WENMIMG ROAD,
LOSHAN TSUN, KWEISHAN HSIANG,
TAOYUAN, TAIWAN, R. O. C.

Tel: (03)3280026#570~576

Fax:(03)3276188

Report Number: ET92S-11-084-01

TEST REPORT CERTIFICATION

Applicant : Sercomm Corp.
3F, No. 81, Yu-Yih Rd., Chu-Nan, Miao-Li 350, Taiwan, R.O.C.

Manufacturer : Sercomm Corp.
3F, No. 81, Yu-Yih Rd., Chu-Nan, Miao-Li 350, Taiwan, R.O.C.

Description of EUT :

- a) Type of EUT : Wireless Broadband Router
- b) Trade Name : Sercomm
- c) Model No. : IP806SM
- d) Power Supply : AC Power : Input 120Vac , 50/60Hz ; Output DC 12Vdc , 800mA

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B & C (2003)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date : Dec. 03, 2003

Test Engineer : 
Andy Kuo


Approve & Authorized Signer : 
Signature
Tsung-Ching Lin
Supervisor of EMC Testing Department
Electronics Testing Center, Taiwan

Table of Contents	Page
1 GENERAL INFORMATION	5
1.1 Product Description.....	5
1.2 Characteristics of Device	5
1.3 Test Methodology	6
1.4 Test Facility.....	6
2 PROVISIONS APPLICABLE	7
2.1 Definition	7
2.2 Requirement for Compliance	8
2.3 Restricted Bands of Operation	10
2.4 Labeling Requirement.....	10
2.5 User Information	11
3. SYSTEM TEST CONFIGURATION	12
3.1 Justification	12
3.2 Devices for Tested System.....	12
4 RADIATED EMISSION MEASUREMENT.....	13
4.1 Applicable Standard.....	13
4.2 Measurement Procedure.....	13
4.3 Measuring Instrument	15
4.4 Radiated Emission Data	16
4.4.1 RF Portion.....	16
4.4.2 Other Emission	20
4.5 Field Strength Calculation	23
4.6 Photos of Radiation Measuring Setup.....	24
5 CONDUCTED EMISSION MEASUREMENT	25
5.1 Standard Applicable.....	25
5.2 Measurement Procedure.....	25
5.3 Conducted Emission Data	26
5.4 Result Data Calculation	27
5.5 Conducted Measurement Equipment	27
5.6 Photos of Conduction Measuring Setup.....	28
6 ANTENNA REQUIREMENT	29
6.1 Standard Applicable	29
6.2 Antenna Construction and Directional Gain	29
7 EMISSION BANDWIDTH MEASUREMENT	30
7.1 Standard Applicable	30
7.2 Measurement Procedure.....	30
7.3 Measurement Equipment	30
7.4 Measurement Data	31

8 OUTPUT POWER MEASUREMENT	32
8.1 Standard Applicable.....	32
8.2 Measurement Procedure.....	32
8.3 Measurement Equipment	32
8.4 Measurement Data	33
9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	34
9.1 Standard Applicable.....	34
9.2 Measurement Procedure.....	34
9.3 Measurement Equipment	34
9.4 Measurement Data	35
10 RADIATED MEASUREMENT AT BANDEDGE WITH FUNDAMENTAL FREQUENCIES..	36
10.1 Standard Applicable.....	36
10.2 Measurement Procedure.....	36
10.3 Measuring Instrument	37
10.4 Radiated Emission Data	38
11 POWER DENSITY MEASUREMENT	42
11.1 Standard Applicable.....	42
11.2 Measurement Procedure.....	42
11.3 Measurement Equipment	42
11.4 Measurement Data	43
12 RF EXPOSURE EVALUATION.....	44
12.1 Friis Formula.....	44
12.2 EUT Operation condition.....	44
12.3 Test Result of RF Exposure Evaluation.....	45
APPENDIX 1: PLOTTED DATAS OF RADIATED EMISSIONS.....	47
APPENDIX 2: PLOTTED DATAS OF POWER LINE CONDUCTED EMISSIONS	72
APPENDIX 3: PLOTTED DATAS OF EMISSIONS BANDWIDTH	75
APPENDIX 4: PLOTTED DATAS OF OUTPUT PEAK POWER.....	82
APPENDIX 5: PLOTTED DATAS OF BAND EDGE EMISSION	89
APPENDIX 6: PLOTTED DATAS OF POWER DENSITY	100

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Wireless Broadband Router
 b) Trade Name : Sercomm
 c) Model No. : IP806SM
 d) Power Supply : AC Power : Input 120Vac , 50/60Hz ; Output DC 12Vdc , 800mA

1.2 Characteristics of Device

Congratulations on the purchase of your new Wireless Router. The Wireless Router is a multi-function device providing the following services:

- **Shared Broadband Internet Access** for all LAN users.
- **4-Port Switching Hub** for 10BaseT or 100BaseT connections.
- **Wireless Access Point** for 802.11b and 802.11g Wireless Stations.

Wireless LAN

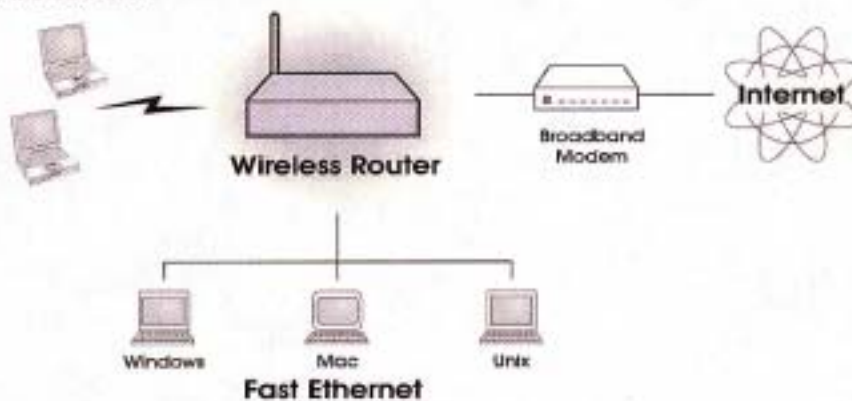


Figure 1: Wireless Router

Wireless Router Features

The Wireless Router incorporates many advanced features, carefully designed to provide sophisticated functions while being easy to use.

Internet Access Features

- **Shared Internet Access.** All users on the LAN or WLAN can access the Internet through the Wireless Router, using only a single external IP Address. The local (invalid) IP Addresses are hidden from external sources. This process is called NAT (Network Address Translation).
- **DSL & Cable Modem Support.** The Wireless Router has a 10/100BaseT Ethernet port for connecting a DSL or Cable Modem. All popular DSL and Cable Modems are supported. SingTel RAS and Big Pond (Australia) login support is also included.
- **PPPoE, PPTP, SingTel RAS and Telstra Big Pond Support.** The Internet (WAN port) connection supports PPPoE (PPP over Ethernet), PPTP (Peer-to-Peer Tunneling Protocol), SingTel RAS and Telstra Big Pond (Australia), as well as "Direct Connection" type services.
- **Fixed or Dynamic IP Address.** On the Internet (WAN port) connection, the Wireless Router supports both Dynamic IP Address (IP Address is allocated on connection) and Fixed IP Address.

1.3 Test Methodology

The Wireless Broadband Router with a transmitting method of direct sequence spread spectrum is for local area network operation, which operates at 2.4 GHz ISM band. The Network Standard are following the IEEE 802.11b and IEEE 802.11g. The data rate up to 11 Mbps for IEEE 802.11b and 54Mbps for IEEE 802.11g. The peak output powers are 20.4 dBm (109.6 mW) for IEEE 802.11b and 16.8 dBm (47.9 mW) for IEEE 802.11g.

1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

*Decreases with the logarithm of the frequency.

For intentional device, according to § 15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set allowed by EUT.

3.2 Devices for Tested System

Device	Manufacture	Model No.	Cable Description
Wireless Broadband Router*	Sercomm Corp.	IP806SM	N/A
Keyboard	IBM	KB-9910	2.0m, Unshielded Cable
Mouse	IBM	M-SAU-IBM6	1.8m, Unshielded Cable (with a core)
PC	Compaq	D380mx	1.8m, Unshielded Power Cord
LCD	HP	D5063	1.7m, Shielded Cable (with a core) Adapter: (with a core) 3.6m, Unshielded Power Cord
RJ45	N/A	N/A	1.0m*4, Unshielded Cable 10m*1, Unshielded Cable

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with § 15.109(a).

For intentional radiators, according to § 15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with § 15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, it is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions. For emission frequencies measured above 1 GHz, a pre-scan be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the datarate, placement of ANT. cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


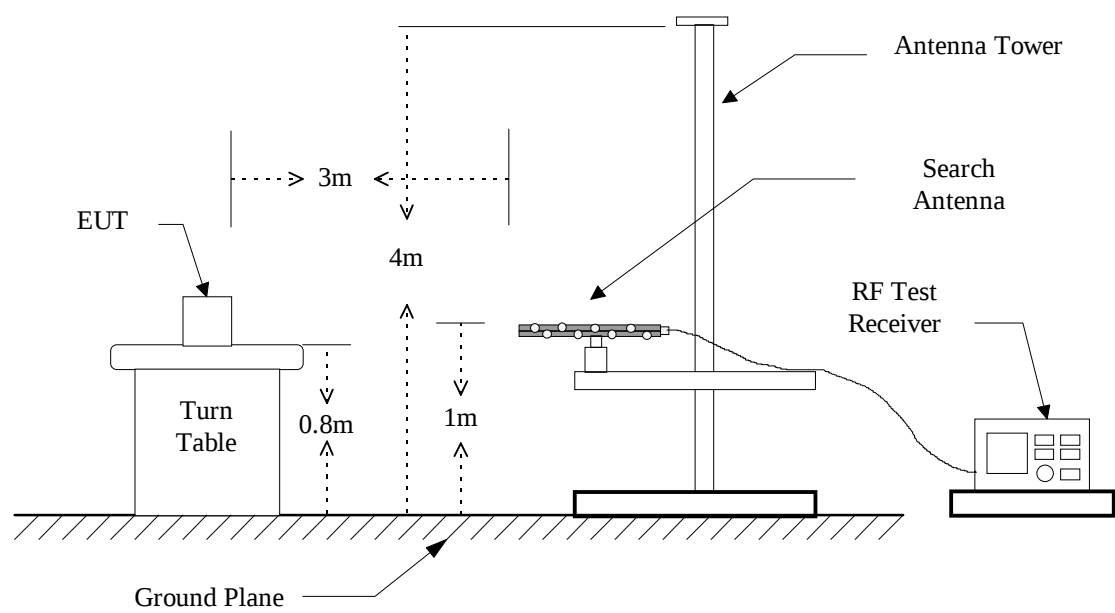


Figure 2 : Frequencies measured above 1 GHz configuration

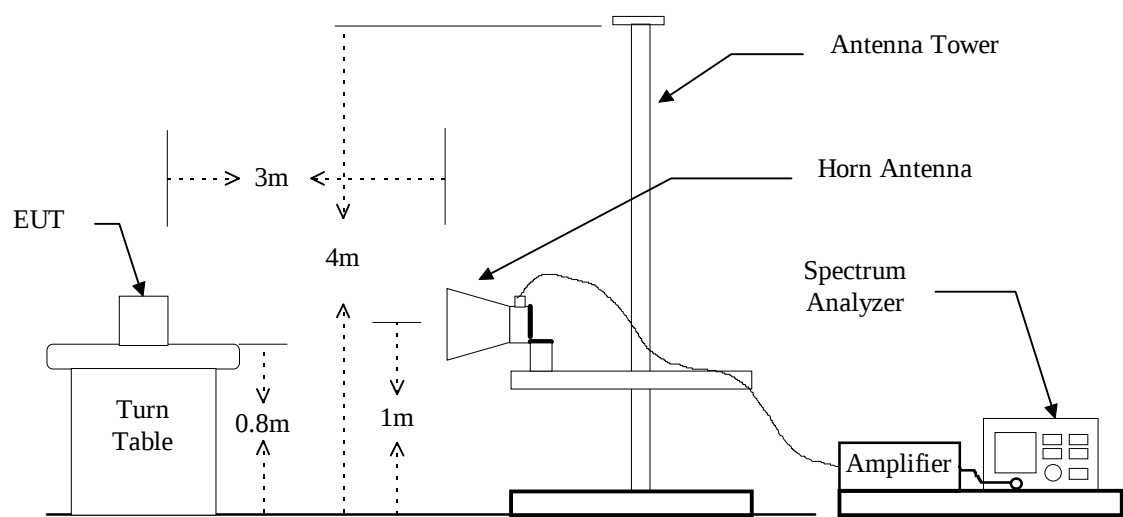

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	01/31/2004
Horn Antenna	EMCO	3115	05/09/2004
LogBicone Antenna	Schwarzbeck	9160	10/18/2004
Horn Antenna	EMCO	3116	06/28/2004
Preamplifier	Hewlett-Packard	8449B	09/17/2005
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	300 kHz
	Spectrum Analyzer	Peak	120 kHz	300 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

4.4 Radiated Emission Data

4.4.1 RF Portion

(1) Antenna I, Modulation Standard: IEEE 802.11b

Operation Mode: Receiving /Transmitting

Test Date: Nov. 17, 2003

Temperature: 23

Humidity: 67 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			(dBuV/m)		(dBuV/m)				
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave.			
4824.000	48.1	33.2	49.2	34.2	-4.4	44.8	29.8	74.0	54.0	-24.2	180	1.0
7236.000	47.7	35.0	47.4	35.0	1.2	48.9	36.2	74.0	54.0	-17.8	180	1.0
12060.000	48.2	34.9	47.8	35.0	2.8	51.0	37.8	74.0	54.0	-16.2	180	1.0
14472.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
19296.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			(dBuV/m)		(dBuV/m)				
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave.			
4874.000	49.0	33.1	51.3	34.2	-4.4	46.9	29.8	74.0	54.0	-24.2	180	1.0
7311.000	47.6	35.0	47.9	35.0	1.2	49.1	36.2	74.0	54.0	-17.8	180	1.0
12185.000	48.5	35.0	48.1	35.0	2.8	51.3	37.8	74.0	54.0	-16.2	180	1.0
19496.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			(dBuV/m)		(dBuV/m)				
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave.			
4924.000	49.2	33.1	54.0	34.2	-4.4	50.2	29.8	74.0	54.0	-23.8	180	1.0
7386.000	47.2	34.8	47.8	35.0	1.2	49.0	36.2	74.0	54.0	-17.8	180	1.0
19696.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
22158.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.

(2) Antenna I, Modulation Standard: IEEE 802.11g

Operation Mode: Receiving /Transmitting

Test Date: Nov. 17, 2003

Temperature: 23

Humidity: 67 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
4824.000	48.5	33.1	49.1	34.0	-4.4	44.7	29.6	74.0	54.0	-24.4	180	1.0
7236.000	47.6	35.0	47.4	35.0	1.2	48.8	36.2	74.0	54.0	-17.8	180	1.0
12060.000	48.2	35.0	47.7	35.0	2.8	51.0	37.8	74.0	54.0	-16.2	180	1.0
14472.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
19296.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
4874.000	50.2	34.5	51.4	34.9	-4.4	47.0	30.5	74.0	54.0	-23.5	180	1.0
7311.000	47.8	35.0	47.9	35.1	1.2	49.1	36.3	74.0	54.0	-17.7	180	1.0
12185.000	48.6	35.0	48.1	35.0	2.8	51.4	37.8	74.0	54.0	-16.2	180	1.0
19496.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
4924.000	48.9	34.0	50.9	34.5	-4.4	49.5	30.1	74.0	54.0	-23.9	180	1.0
7386.000	47.3	35.0	47.8	35.3	1.2	49.9	36.5	74.0	54.0	-17.5	180	1.0
19696.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
22158.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.

(3) Antenna II, Modulation Standard: IEEE 802.11b

Operation Mode: Receiving /Transmitting

Test Date: Nov. 28, 2003

Temperature: 20

Humidity: 65 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			(dBuV/m)		(dBuV/m)				
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave.			
4824.000	45.3	33.0	45.8	34.1	-4.4	41.4	29.7	74.0	54.0	-24.3	180	1.0
7236.000	47.7	35.1	47.5	35.0	1.2	48.9	36.3	74.0	54.0	-17.7	180	1.0
12060.000	48.3	34.9	47.8	35.1	2.8	51.5	37.9	74.0	54.0	-16.1	180	1.0
14472.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
19296.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			(dBuV/m)		(dBuV/m)				
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave.			
4874.000	46.0	33.1	45.2	34.4	-4.4	41.6	30.0	74.0	54.0	-24.0	180	1.0
7311.000	47.5	35.0	47.8	35.1	1.2	49.0	36.3	74.0	54.0	-17.7	180	1.0
12185.000	48.5	35.0	48.0	35.0	2.8	51.3	37.8	74.0	54.0	-16.2	180	1.0
19496.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			(dBuV/m)		(dBuV/m)				
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave.			
4924.000	45.2	33.2	46.7	34.3	-4.4	42.3	29.9	74.0	54.0	-24.1	180	1.0
7386.000	47.3	35.0	47.8	35.2	1.2	49.0	36.4	74.0	54.0	-17.6	180	1.0
19696.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
22158.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.

(4) Antenna II, Modulation Standard: IEEE 802.11g

Operation Mode: Receiving /Transmitting

Test Date: Nov. 28, 2003

Temperature: 20

Humidity: 65 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
4824.000	45.4	33.0	46.0	34.2	-4.4	41.6	29.8	74.0	54.0	-24.2	180	1.0
7236.000	47.8	35.1	47.6	35.0	1.2	49.0	36.3	74.0	54.0	-17.7	180	1.0
12060.000	48.3	34.9	47.8	35.0	2.8	51.1	37.0	74.0	54.0	-17.0	180	1.0
14472.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
19296.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
4874.000	46.1	33.1	46.2	34.3	-4.4	41.8	29.9	74.0	54.0	-24.1	180	1.0
7311.000	47.4	35.0	47.8	35.0	1.2	49.0	36.2	74.0	54.0	-17.8	180	1.0
12185.000	48.6	35.0	48.3	35.0	2.8	51.4	37.8	74.0	54.0	-16.2	180	1.0
19496.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
4924.000	45.1	33.3	46.8	34.4	-4.4	42.4	30.0	74.0	54.0	-24.0	180	1.0
7386.000	47.2	35.0	47.8	35.1	1.2	49.0	36.3	74.0	54.0	-17.7	180	1.0
19696.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---
22158.000	---	---	---	---	---	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.

4.4.2 Other Emission

(1) Antenna I, Modulation Standard: IEEE 802.11b

a) Emission frequencies below 1 GHz

Test Date: Oct. 30, 2003

Temperature: 25

Humidity: 61 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
55.310	V	30.1	7.8	37.9	40.0	-2.1	186	1.1
58.130	H	28.8	7.5	36.3	40.0	-3.7	180	2.0
126.030	V	23.8	10.6	34.4	43.5	-9.1	179	1.1
162.890	H	26.3	11.6	37.9	43.5	-5.6	175	2.1
255.040	H	21.3	15.6	36.9	46.0	-9.1	174	1.9
255.040	V	19.6	15.6	35.2	46.0	-10.8	175	1.0
324.820	H	20.0	17.5	37.5	46.0	-8.5	12	1.9
324.880	V	16.4	17.5	33.9	46.0	-12.1	10	1.0
484.930	V	15.2	22.3	37.5	46.0	-8.5	170	1.2
487.840	H	18.6	22.3	40.9	46.0	-5.1	169	2.1
644.970	H	17.9	26.1	44.0	46.0	-2.0	10	2.4
644.980	V	16.2	26.1	42.3	46.0	-3.7	10	1.2

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.

Note : Please see appendix 1 for Ploted Datas

(2) Antenna I, Modulation Standard: IEEE 802.11g

a) Emission frequencies below 1 GHz

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
55.240	V	30.2#	7.8	38.0#	40.0	-2.0	185	1.0
57.240	H	28.7#	7.8	36.5#	40.0	-3.5	180	1.9
95.340	H	24.8#	9.6	34.4#	43.5	-9.1	134	1.5
95.340	V	27.9#	9.6	37.5#	43.5	-6.0	130	1.6
102.630	V	27.1#	9.4	36.5#	43.5	-7.0	180	1.0
161.490	H	26.9#	11.6	38.5#	43.5	-5.0	177	2.0
161.490	V	23.0#	11.6	34.6#	43.5	-8.9	175	2.0
251.130	H	29.7	15.6	45.3	46.0	-0.7	185	1.9
251.130	V	26.7#	15.6	42.3#	46.0	-3.7	185	2.0
481.300	H	18.1#	22.3	40.4#	46.0	-5.6	170	2.1
481.300	V	17.1#	22.3	39.4#	46.0	-6.6	170	2.1
640.900	H	11.9#	26.1	38.0#	46.0	-8.0	10	2.4
640.900	V	12.9#	26.1	39.0#	46.0	-7.0	54	2.0
799.800	H	14.3#	27.6	41.9#	46.0	-4.1	54	2.0
799.800	V	12.7#	27.6	40.3#	46.0	-5.7	180	1.0

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.

Note : Please see appendix 1 for Ploted Datas

(3) Antenna II, Modulation Standard: IEEE 802.11b

a) Emission frequencies below 1 GHz

Test Date: Oct. 28, 2003

Temperature: 20

Humidity: 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
37.830	H	25.6#	11.1	36.7#	40.0	-3.3	40	1.0
37.830	V	27.7#	11.1	38.8#	40.0	-1.2	50	1.6
95.340	H	33.4	9.6	43.0	43.5	-0.5	130	1.6
95.340	V	32.6#	9.6	42.2#	43.5	-1.3	130	1.4
134.490	H	27.8#	10.6	38.4#	43.5	-5.1	180	1.0
134.490	V	32.6	10.6	43.2	43.5	-0.3	183	1.2
196.590	H	26.1#	12.7	38.8#	43.5	-4.7	188	1.7
196.590	V	30.1	12.7	42.8	43.5	-0.7	190	1.9
250.010	H	23.0#	15.6	38.6#	46.0	-7.4	185	1.9
250.010	V	20.8#	15.6	36.4#	46.0	-9.6	185	2.0
327.300	H	26.0	19.0	45.0	46.0	-1.0	66	1.8
327.300	V	26.0#	19.0	45.0#	46.0	-1.0	65	1.9
586.300	H	17.4#	24.9	42.3#	46.0	-3.7	69	2.0
780.990	V	18.9#	24.9	43.8#	46.0	-2.2	70	2.0
843.900	V	16.4	28.6	45.0	46.0	-1.0	140	1.7

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.

Note : Please see appendix 1 for Ploted Datas

(4) Antenna II, Modulation Standard: IEEE 802.11g

a) Emission frequencies below 1 GHz

Test Date: Oct. 28, 2003

Temperature: 20

Humidity: 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
95.340	H	32.8#	9.6	42.4#	43.5	-1.1	130	1.6
95.340	V	33.3	9.6	42.9	43.5	-0.6	130	1.4
133.680	H	32.4	10.6	43.0	43.5	-0.5	180	1.0
133.680	V	31.9#	10.6	42.5#	43.5	-1.0	183	1.2
196.590	H	29.7#	12.7	42.4#	43.5	-1.1	188	1.7
196.590	V	29.6	12.7	42.3	43.5	-1.2	190	1.9
251.940	H	21.5#	15.6	37.1#	46.0	-8.9	185	1.9
251.940	V	21.5	15.6	37.1	46.0	-8.9	185	2.0
327.300	H	25.2#	19.0	44.2#	46.0	-1.8	66	1.8
327.300	V	19.7	19.0	38.7	46.0	-7.3	65	1.7
586.300	H	19.0#	24.9	43.9#	46.0	-2.1	69	2.0
586.300	V	13.6	24.9	38.5	46.0	-7.5	69	1.9

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.

Note : Please see appendix 1 for Ploted Datas

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup



5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.

5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

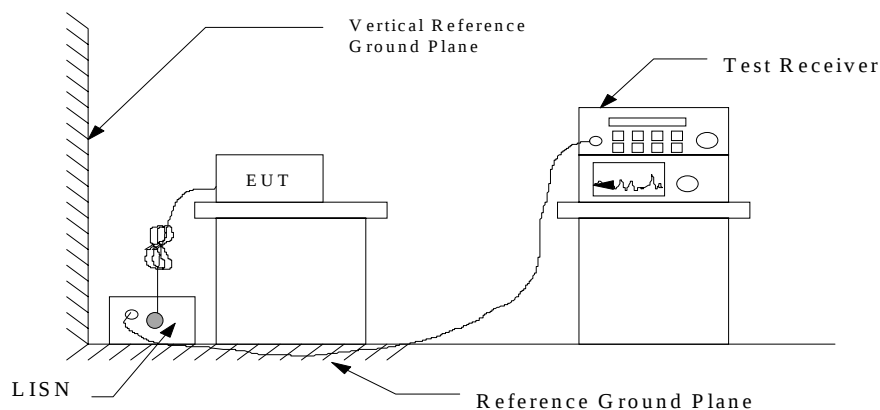

5.3 Conducted Emission Data

Operation Mode: Transmitting / Receiving

Test Date: Nov. 01, 2003

Temperature: 24

Humidity: 64 %

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB)
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value	Q.P. or AVG.
	L1	L2	L1	L2		L1	L2	L1	L2			
0.150	***	49.1	----	----	0.1	***	49.2	----	----	66.0	56.0	-16.8
0.154	48.3	***	----	----	0.1	48.4	***	----	----	65.8	55.8	-17.4
0.228	47.8	***	----	----	0.1	47.9	***	----	----	62.5	52.5	-14.6
0.235	***	48.1	----	----	0.1	***	48.2	----	----	62.3	52.3	-14.1
0.372	44.0	***	----	----	0.1	44.1	***	----	----	58.5	48.5	-14.4
0.396	***	44.4	----	----	0.1	***	44.5	----	----	57.9	47.9	-13.4
0.493	***	42.7	----	----	0.1	***	42.8	----	----	56.1	46.1	-13.3
0.568	40.1	***	----	----	0.1	40.2	***	----	----	56.0	46.0	-15.8
1.683	36.7	***	----	----	0.2	36.9	***	----	----	56.0	46.0	-19.1
1.988	***	40.3	----	----	0.2	***	40.5	----	----	56.0	46.0	-15.5
23.129	34.1	34.5	----	----	0.5	34.6	35.0	----	----	60.0	50.0	-25.0

Note:

1. The full frequency range scanning test data is shown in appendix 2 pages.
2. "****" means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
4. The estimated measurement uncertainty of the result measurement is ± 3 dB.

Note : Please see appendix 2 for Ploted Datas

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR (Included Cable Loss)}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \text{ } \mu \text{ V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESCS30	09/18/2004
Line Impedance Stabilization network	Telemeter	NNB-4/32T	03/27/2004
Line Impedance Stabilization network	Rolf Heine	NNB-2/16Z	04/04/2004

5.6 Photos of Conduction Measuring Setup



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to § 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

Highly efficient dipole antennas fix on the PCB. The directional gain of antenna used for transmitting is Peak less than 3.0dBi and the details antenna construction.

Antenna I: type: monopole antnna; antenna gain: +2.0 dBi.

Antenna II: type: monopole antnna; antenna gain: +2.0 dBi.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7440A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005

7.4 Measurement Data

(1) Modulation Standard: IEEE 802.11b

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

- a) Channel 01 : 6 dB Emission Bandwidth is 9.97 MHz
- b) Channel 06 : 6 dB Emission Bandwidth is 10.00 MHz
- c) Channel 11 : 6 dB Emission Bandwidth is 10.03 MHz

(2) Modulation Standard: IEEE 802.11g

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

- a) Channel 01 : 6 dB Emission Bandwidth is 16.43 MHz
- b) Channel 06 : 6 dB Emission Bandwidth is 16.53 MHz
- c) Channel 11 : 6 dB Emission Bandwidth is 16.60 MHz

Note: Please see Appendix 3 for plotted datas

8 OUTPUT POWER MEASUREMENT


8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 2 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7440A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005

8.4 Measurement Data

(1) Modulation Standard: IEEE 802.11b

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

- a) Channel 01 : Output Peak Power is 19.6 dBm or 91.2 mW
- b) Channel 06 : Output Peak Power is 20.2 dBm or 104.7 mW
- c) Channel 11 : Output Peak Power is 20.4 dBm or 109.6 mW

(2) Modulation Standard: IEEE 802.11g

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

- a) Channel 01 : Output Peak Power is 16.4 dBm or 43.7 mW
- b) Channel 06 : Output Peak Power is 16.8 dBm or 47.8 mW
- c) Channel 11 : Output Peak Power is 16.8 dBm or 47.9 mW

Note: 1. Please see Appendix 4 for plotted datas

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7440A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005

9.4 Measurement Data

(1) Modulation Standard: IEEE 802.11b

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

- a) Lower Band Edge: maximum value is -47.33 dBm that is attenuated more than 20dB
- b) Upper Band Edge: maximum value is -48.17 dBm that is attenuated more than 20dB

(2) Modulation Standard: IEEE 802.11b

Test Date: Nov. 13, 2003

Temperature: 22

Humidity: 65 %

- a) Lower Band Edge: maximum value is -43.67 dBm that is attenuated more than 20dB
- b) Upper Band Edge: maximum value is -50.33 dBm that is attenuated more than 20dB

Note: Please see Appendix 5 for plotted datas

10 RADIATED MEASUREMENT AT BANDEDGE WITH FUNDAMENTAL FREQUENCIES

10.1 Standard Applicable

According to 15.247(c), radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

10.2 Measurement Procedure

1. Setup the configuration per figure 2 for 2.39GHz and 2.4835GHz measured.
2. Set the spectrum analyzer on 1MHz resolution bandwidth for each frequency measured.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the height when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Measurement applied to channel 1, 6, 11, recorded the result.

10.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	01/31/2004
Horn Antenna	EMCO	3115	05/09/2004
LogBicone Antenna	Schwarzbeck	9160	10/18/2004
Horn Antenna	EMCO	3116	06/28/2004
Preamplifier	Hewlett-Packard	8449B	09/17/2005
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005

Measuring instrument setup in measured frequency band when specified detector function is used:

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
2390 & 2483.5	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

10.4 Radiated Emission Data

(1) Antenna I, Modulation Standard: IEEE 802.11b

Test Date: Nov. 17, 2003

Temperature: 23

Humidity: 67 %

a) Channel 1

Operation Mode: Receiving /Transmitting

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	H Ave	V Peak	V Ave		Peak	Ave	Peak	Ave.			
2390.000	27.5	15.2	29.7	20.1	28.3	58.0	48.4	74.0	54.0	-5.6	180	1.0
2483.500	28.7	15.3	30.3	19.2	28.3	58.6	47.5	74.0	54.0	-6.5	180	1.0

b) Channel 6

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	H Ave	V Peak	V Ave		Peak	Ave	Peak	Ave.			
2390.000	28.1	15.0	29.6	20.2	28.3	57.9	48.5	74.0	54.0	-5.5	180	1.0
2483.500	28.6	15.3	30.4	17.0	28.3	58.7	45.3	74.0	54.0	-8.7	180	1.0

c) Channel 11

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	H Ave	V Peak	V Ave		Peak	Ave	Peak	Ave.			
2390.000	28.8	15.5	29.5	20.6	28.3	57.8	48.9	74.0	54.0	-5.1	180	1.0
2483.500	29.0	15.8	30.2	17.7	28.3	58.5	46.0	74.0	54.0	-8.0	180	1.0

(2) Antenna I, Modulation Standard: IEEE 802.11g

Test Date: Nov. 14, 2003

Temperature: 22

Humidity: 65 %

a) Channel 1

Operation Mode: Receiving /Transmitting

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
2375.730	28.0	15.2	29.8	21.2	28.3	58.1	49.3	74.0	54.0	-4.7	180	1.0
2485.950	28.3	15.8	39.3	19.7	28.3	67.6	48.0	74.0	54.0	-6.0	180	1.0

b) Channel 6

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
2389.300	27.0	15.0	27.3	20.5	28.3	55.6	48.8	74.0	54.0	-5.2	180	1.0
2489.140	28.0	15.8	30.5	17.2	28.3	58.8	45.3	74.0	54.0	-8.7	180	1.0

c) Channel 11

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
2389.500	27.5	15.5	29.7	20.7	28.3	58.0	49.0	74.0	54.0	-5.0	180	1.0
2488.200	28.8	15.8	30.3	17.9	28.3	58.6	45.8	74.0	54.0	-8.2	180	1.0

(3) Antenna II, Modulation Standard: IEEE 802.11b

Test Date: Nov. 28, 2003

Temperature: 20

Humidity: 65 %

a) Channel 1

Operation Mode: Receiving /Transmitting

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
2390.000	28.0	15.5	27.3	15.8	28.3	56.3	44.1	74.0	54.0	-9.9	180	1.0
2483.500	28.6	16.4	29.2	17.0	28.3	57.5	45.3	74.0	54.0	-8.7	180	1.0

b) Channel 6

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
2390.000	27.6	15.4	27.4	15.5	28.3	55.9	43.8	74.0	54.0	-10.2	180	1.0
2483.500	28.7	16.2	29.6	17.4	28.3	57.9	45.7	74.0	54.0	-8.3	180	1.0

c) Channel 11

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
2390.000	27.5	15.3	27.5	15.5	28.3	55.8	43.8	74.0	54.0	-10.2	180	1.0
2483.500	28.5	16.2	29.5	17.3	28.3	57.8	45.6	74.0	54.0	-8.4	180	1.0

(4) Antenna II, Modulation Standard: IEEE 802.11g

Test Date: Nov. 28, 2003

Temperature: 20

Humidity: 65 %

a) Channel 1

Operation Mode: Receiving /Transmitting

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
2390.0	28.1	15.6	27.4	15.8	28.3	56.4	44.1	74.0	54.0	-9.9	180	1.0
2483.5	28.5	16.4	29.3	17.2	28.3	57.6	45.5	74.0	54.0	-8.5	180	1.0

b) Channel 6

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
2390.0	27.4	15.4	27.1	15.4	28.3	55.7	43.7	74.0	54.0	-10.3	180	1.0
2483.5	28.5	16.3	29.6	17.5	28.3	57.9	45.8	74.0	54.0	-8.2	180	1.0

c) Channel 11

Operation Mode: Receiving / Transmitting

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave.			
	Peak	Ave	Peak	Ave								
2390.0	27.7	15.4	27.8	15.5	28.3	56.1	43.8	74.0	54.0	-10.2	180	1.0
2483.5	28.8	16.3	30.0	17.2	28.3	58.3	45.5	74.0	54.0	-8.5	180	1.0

11 POWER DENSITY MEASUREMENT

11.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on highest level appearing on spectral display within a 300 kHz frequency span.
4. Set the spectrum analyzer on a 3 kHz resolution bandwidth and 10 kHz video bandwidth as well as max. hold function, then record the measurement result.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7440A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005

11.4 Measurement Data

(1) Modulation Standard: IEEE 802.11b

Test Date: Nov. 17, 2003

Temperature: 23

Humidity: 67 %

- a) Channel 01 : Maximun Power Density of 3 kHz Bandwidth is -9.67 dBm
- b) Channel 06 : Maximun Power Density of 3 kHz Bandwidth is -8.83 dBm
- c) Channel 11 : Maximun Power Density of 3 kHz Bandwidth is -9.00 dBm

(2) Modulation Standard: IEEE 802.11g

Test Date: Nov. 14, 2003

Temperature: 22

Humidity: 65 %

- a) Channel 01 : Maximun Power Density of 3 kHz Bandwidth is -24.05 dBm
- b) Channel 06 : Maximun Power Density of 3 kHz Bandwidth is -23.33 dBm
- c) Channel 11 : Maximun Power Density of 3 kHz Bandwidth is -23.50 dBm

Note: Please see Appendix 6 for plotted datas

12 RF Exposure Evaluation

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (nW/cm ²)	Average Time (Minutes)
(A) Limits for Occupational/control Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	1	30

F=Frequency in MHz

12.1 Friis Formula

Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d =power density in mW/cm²

P_{out} =output power to antenna in mW

G =gain of antenna in linear scale

π =3.1416

R =distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

12.2 EUT Operation condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

12.3 Test Result of RF Exposure Evaluation

Product: Wireless Broadband Router

Test Item: RF Exposure Evaluation Data

Test site: No. 2 chamber

Test Mode: Normal Operation

12.3.1 Antenna Gain

Antenna I Gain: The maximum Gain is 2.0dBi.

Antenna II Gain: The maximum Gain is 2.0dBi.

12.3.2 Output Power Into Antenna & RF Exposure Evaluation Distance

(1) Antenna I, Modulation Standard: IEEE 802.11b

Test Date : Nov. 17, 2003

Temperature : 23

Humidity: 67 %

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum allowable Distance ®From Skin (cm)
01	2412	19.6	3.81
06	2437	20.2	4.08
11	2462	20.4	4.18

(2) Antenna I, Modulation Standard: IEEE 802.11g

Test Date : Nov. 17, 2003

Temperature : 23

Humidity: 67 %

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum allowable Distance ®From Skin (cm)
01	2412	16.4	2.64
06	2437	16.8	2.76
11	2462	16.8	2.76

The distance r (4th column) calculated from the Friis transmission formula is far shorter than 20 cm separation requirement. So, RF exposure limit warning or SAR test are not required.

(3) Antenna II, Modulation Standard: IEEE 802.11b

Test Date : Nov. 28, 2003Temperature : 20Humidity: 65 %

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum allowable Distance ®From Skin (cm)
01	2412	19.6	3.81
06	2437	20.2	4.08
11	2462	20.4	4.18

(4) Antenna II, Modulation Standard: IEEE 802.11g


Test Date : Nov. 28, 2003Temperature : 20Humidity: 65 %

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum allowable Distance ®From Skin (cm)
01	2412	16.4	2.64
06	2437	16.8	2.76
11	2462	16.8	2.76


The distance r (4th column) calculated from the Friis transmission formula is far shorter than 20 cm separation requirement. So, RF exposure limit warning or SAR test are not required.


Appendix 1: Ploted Datas of Radiated Emissions


*ATTEN 0dB MKR 27.67dB μ V
RL 60.0dB μ V 2.328GHz
10dB/

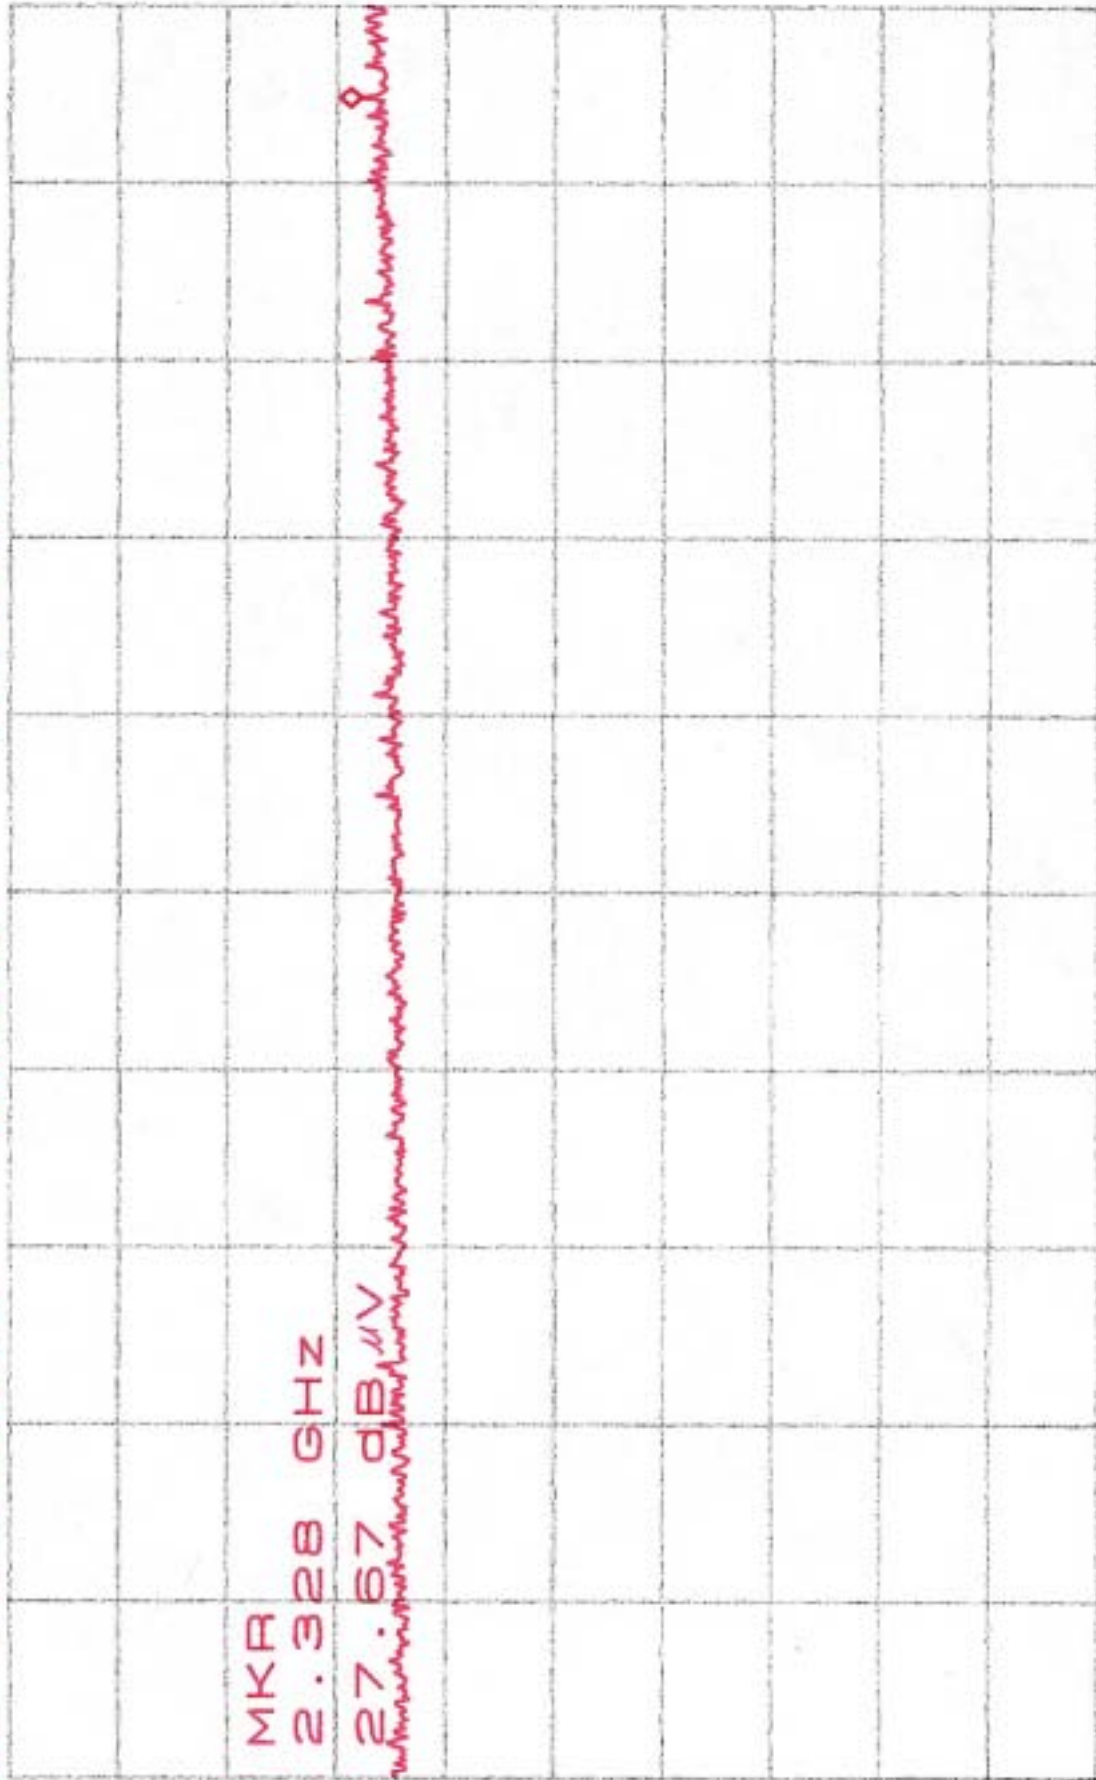



START 1.000GHz STOP 2.400GHz
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

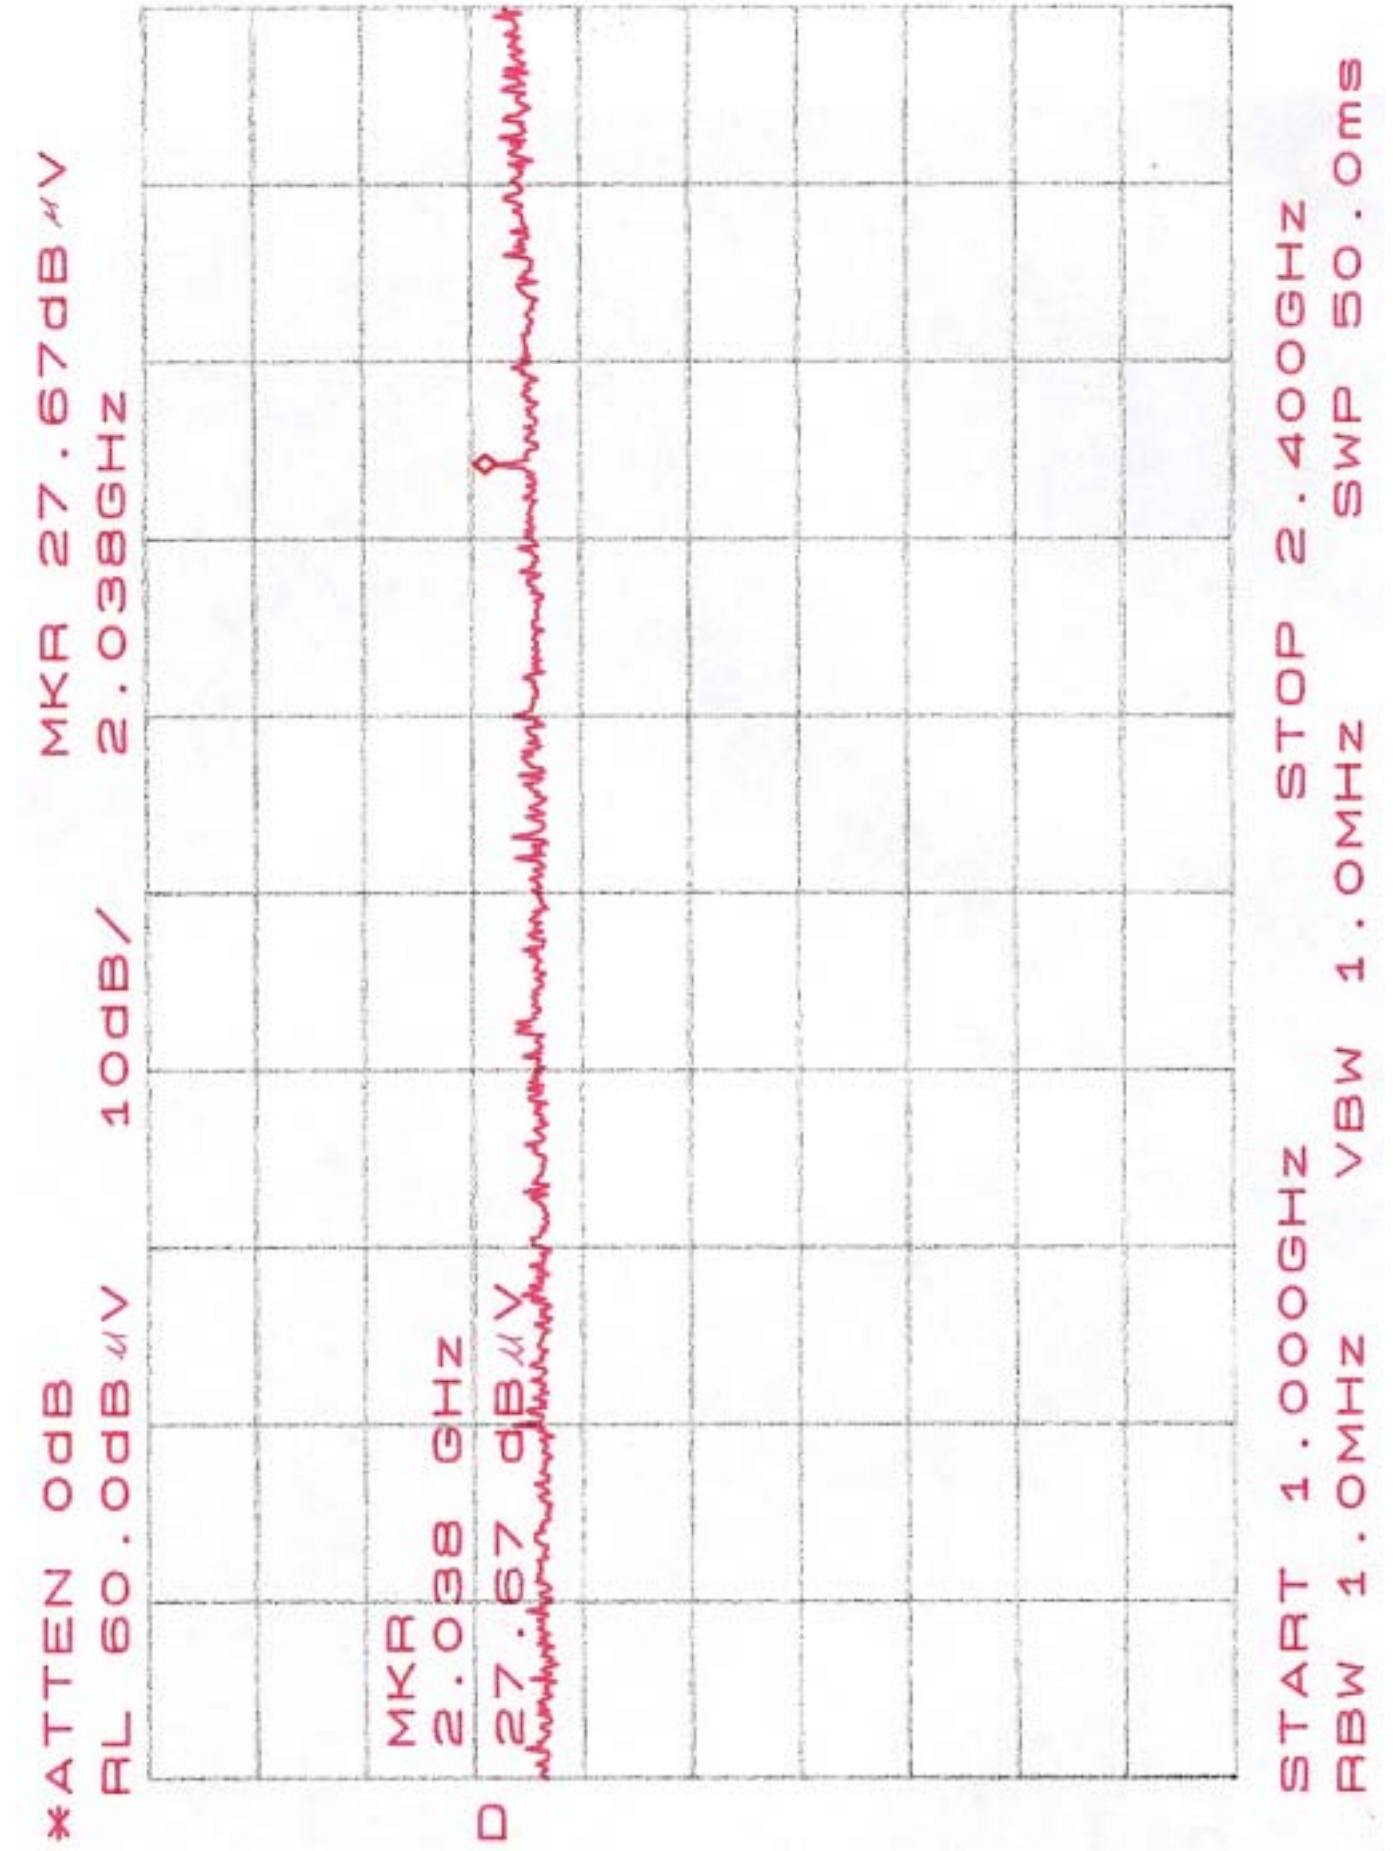


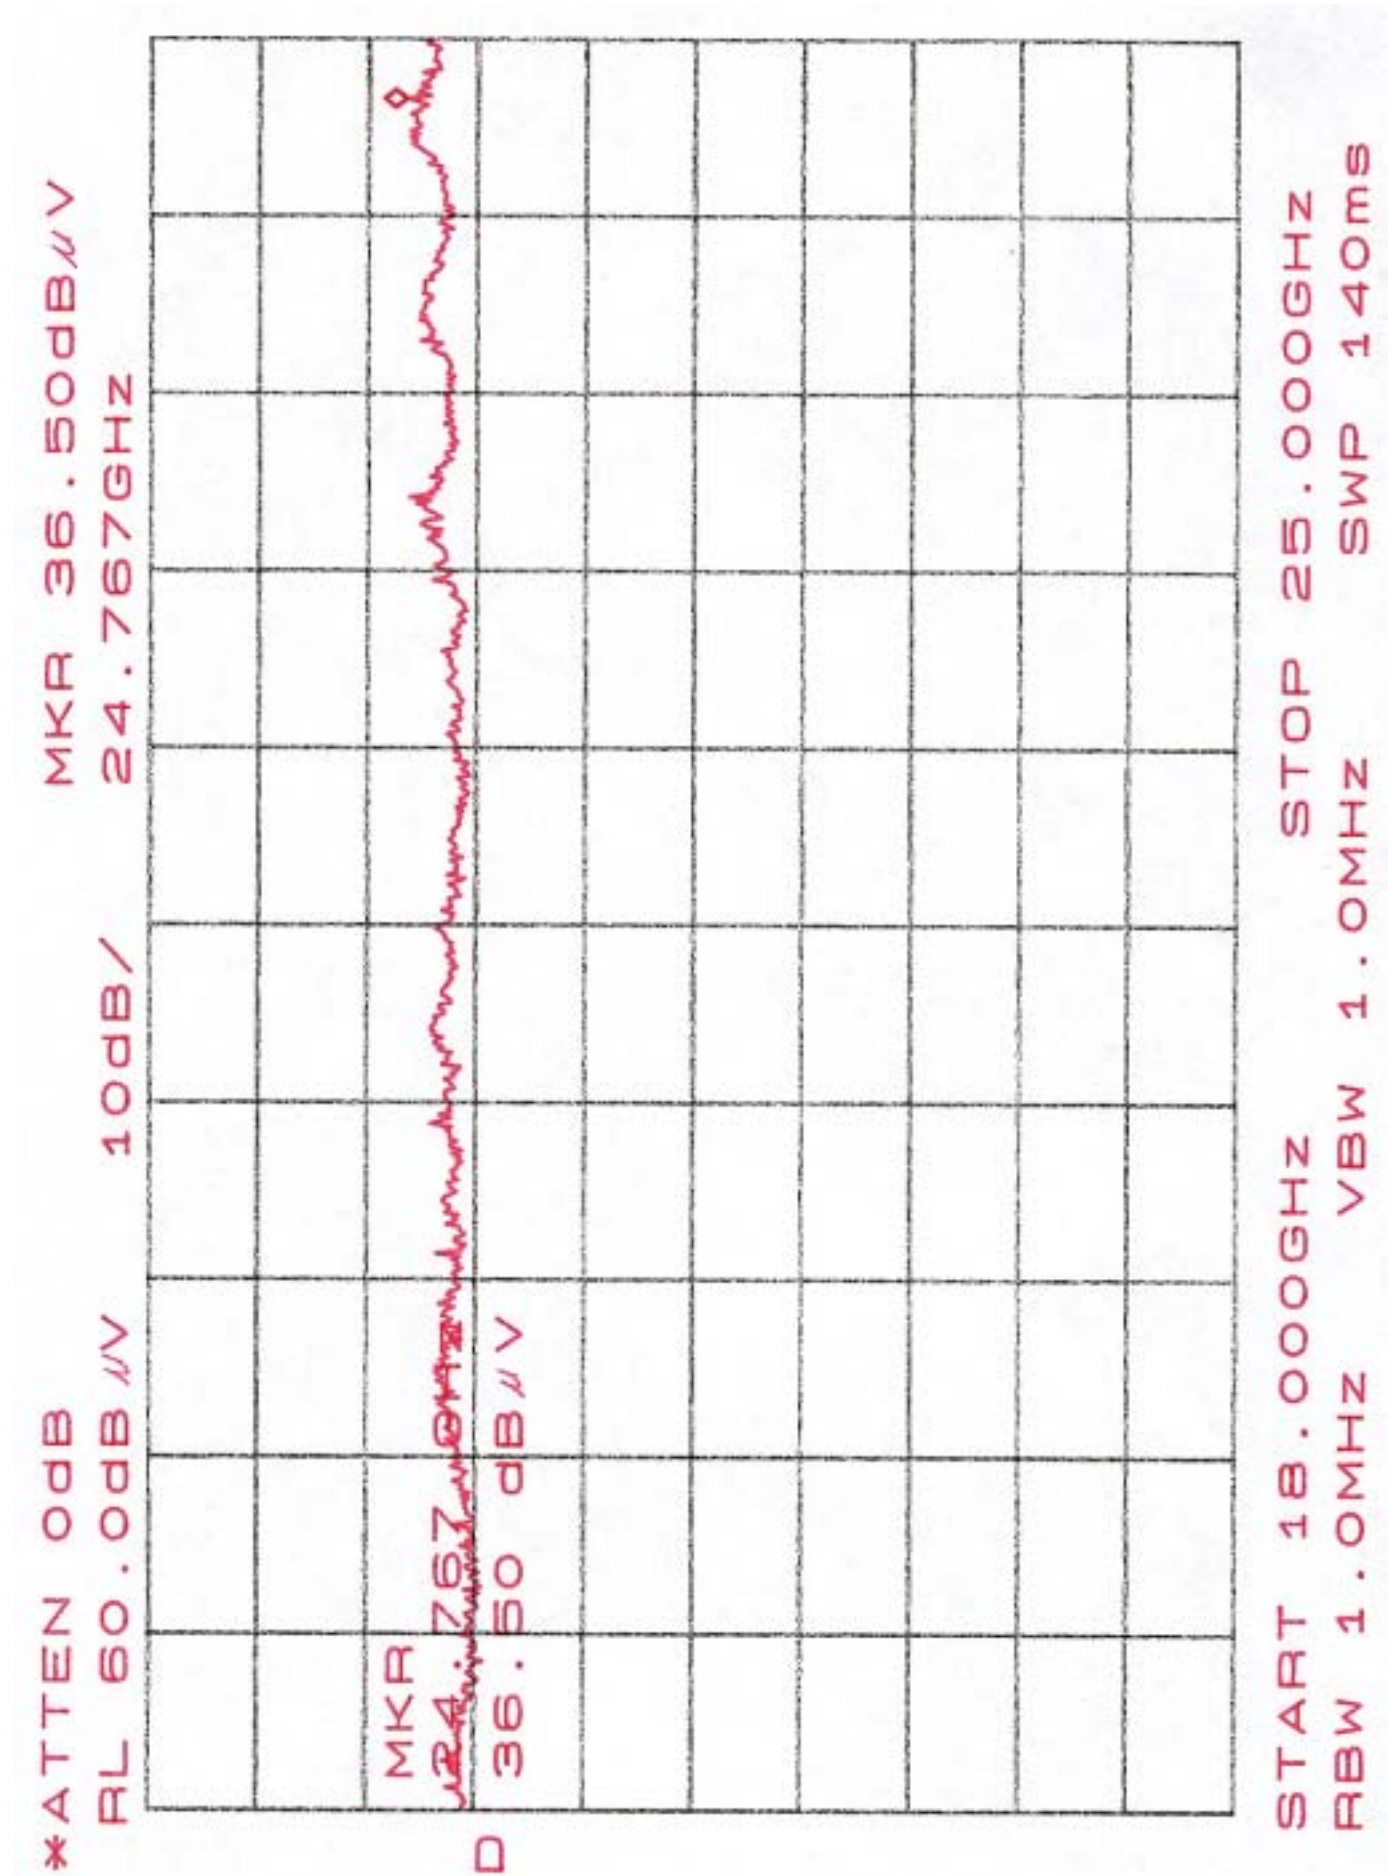

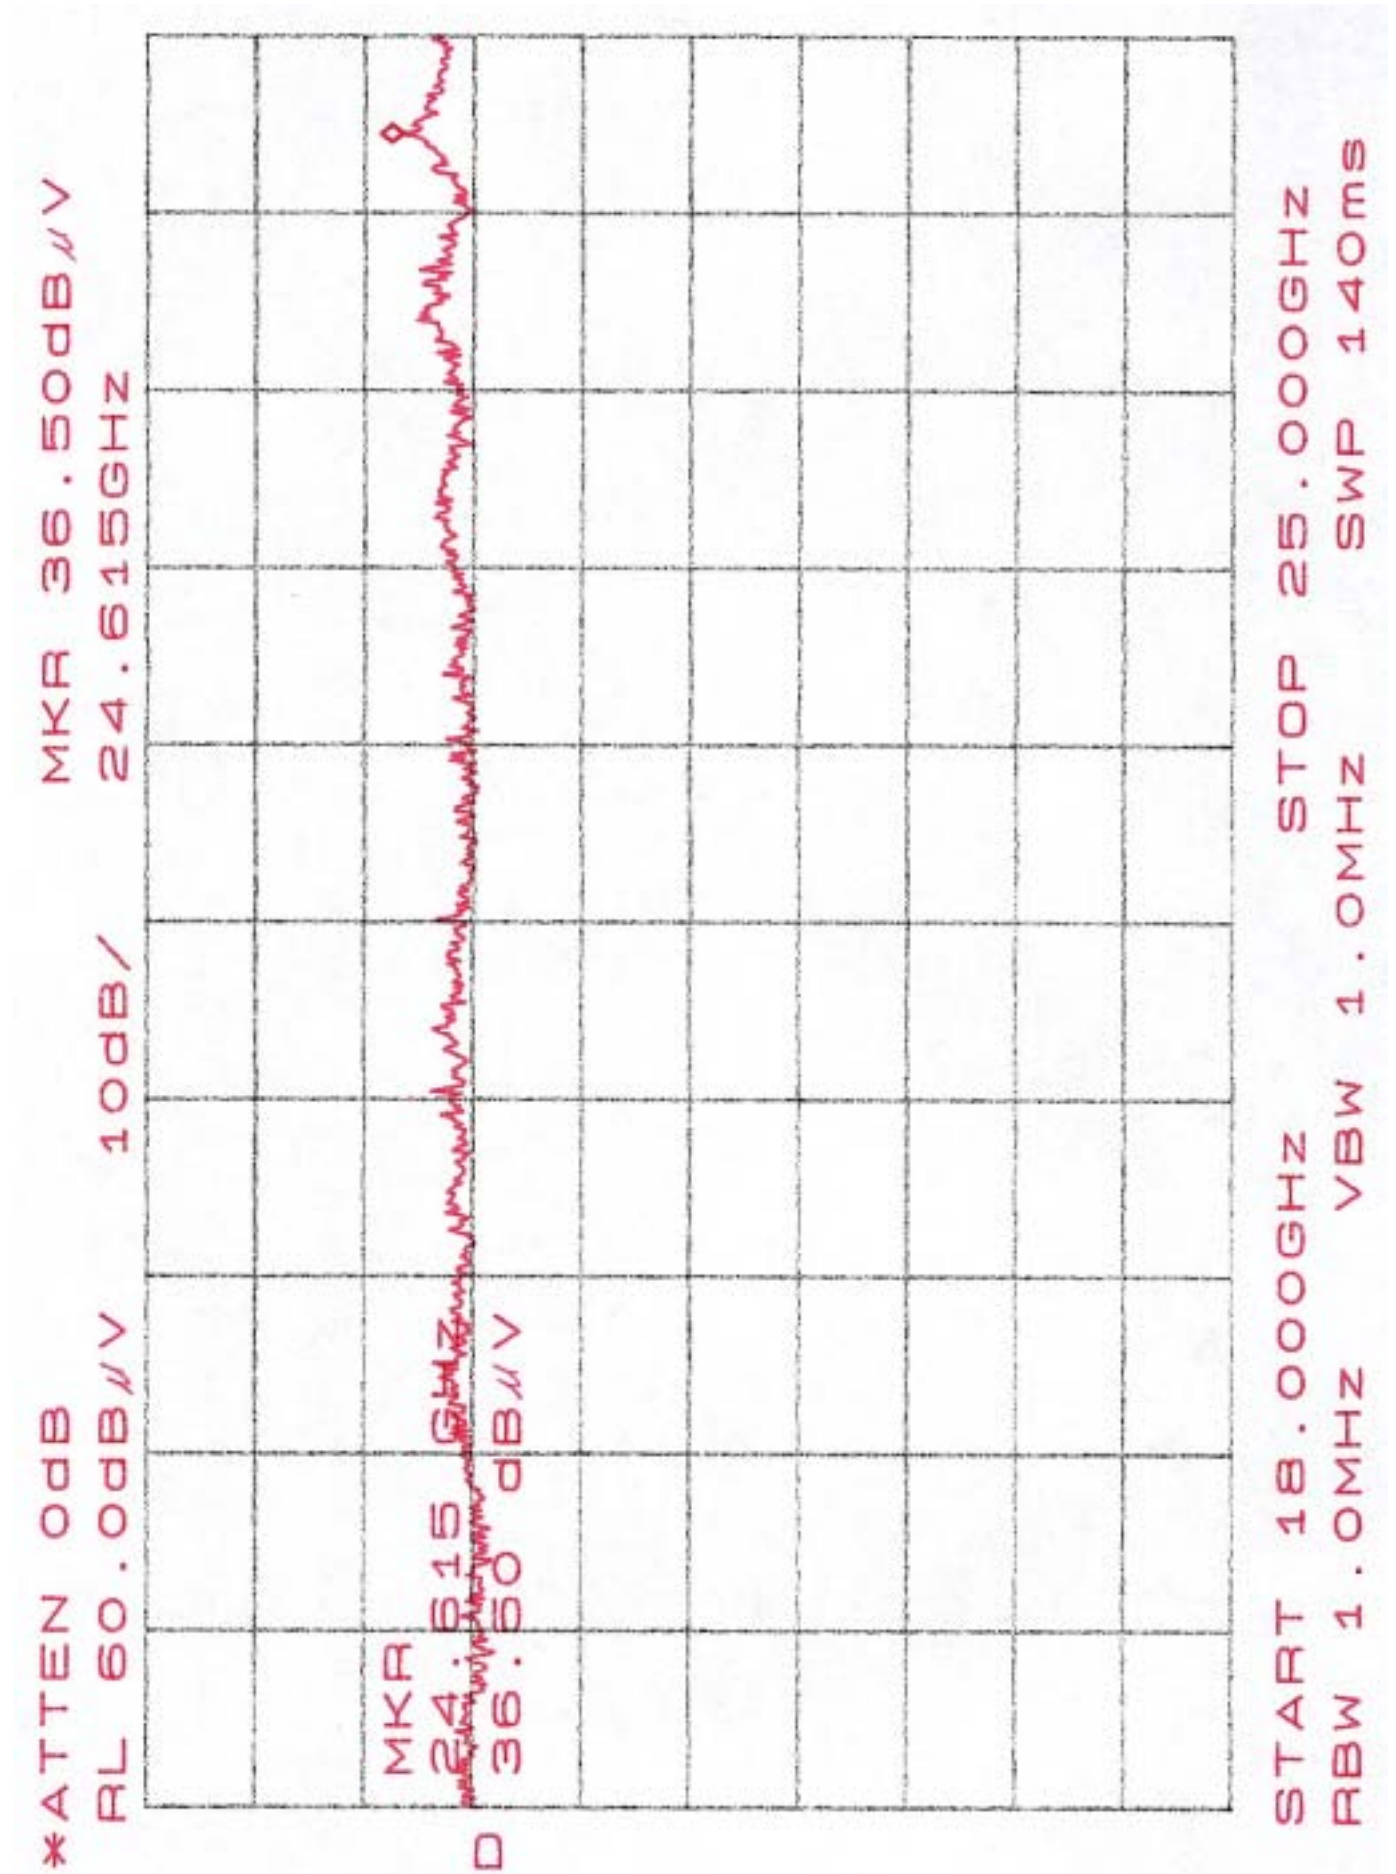


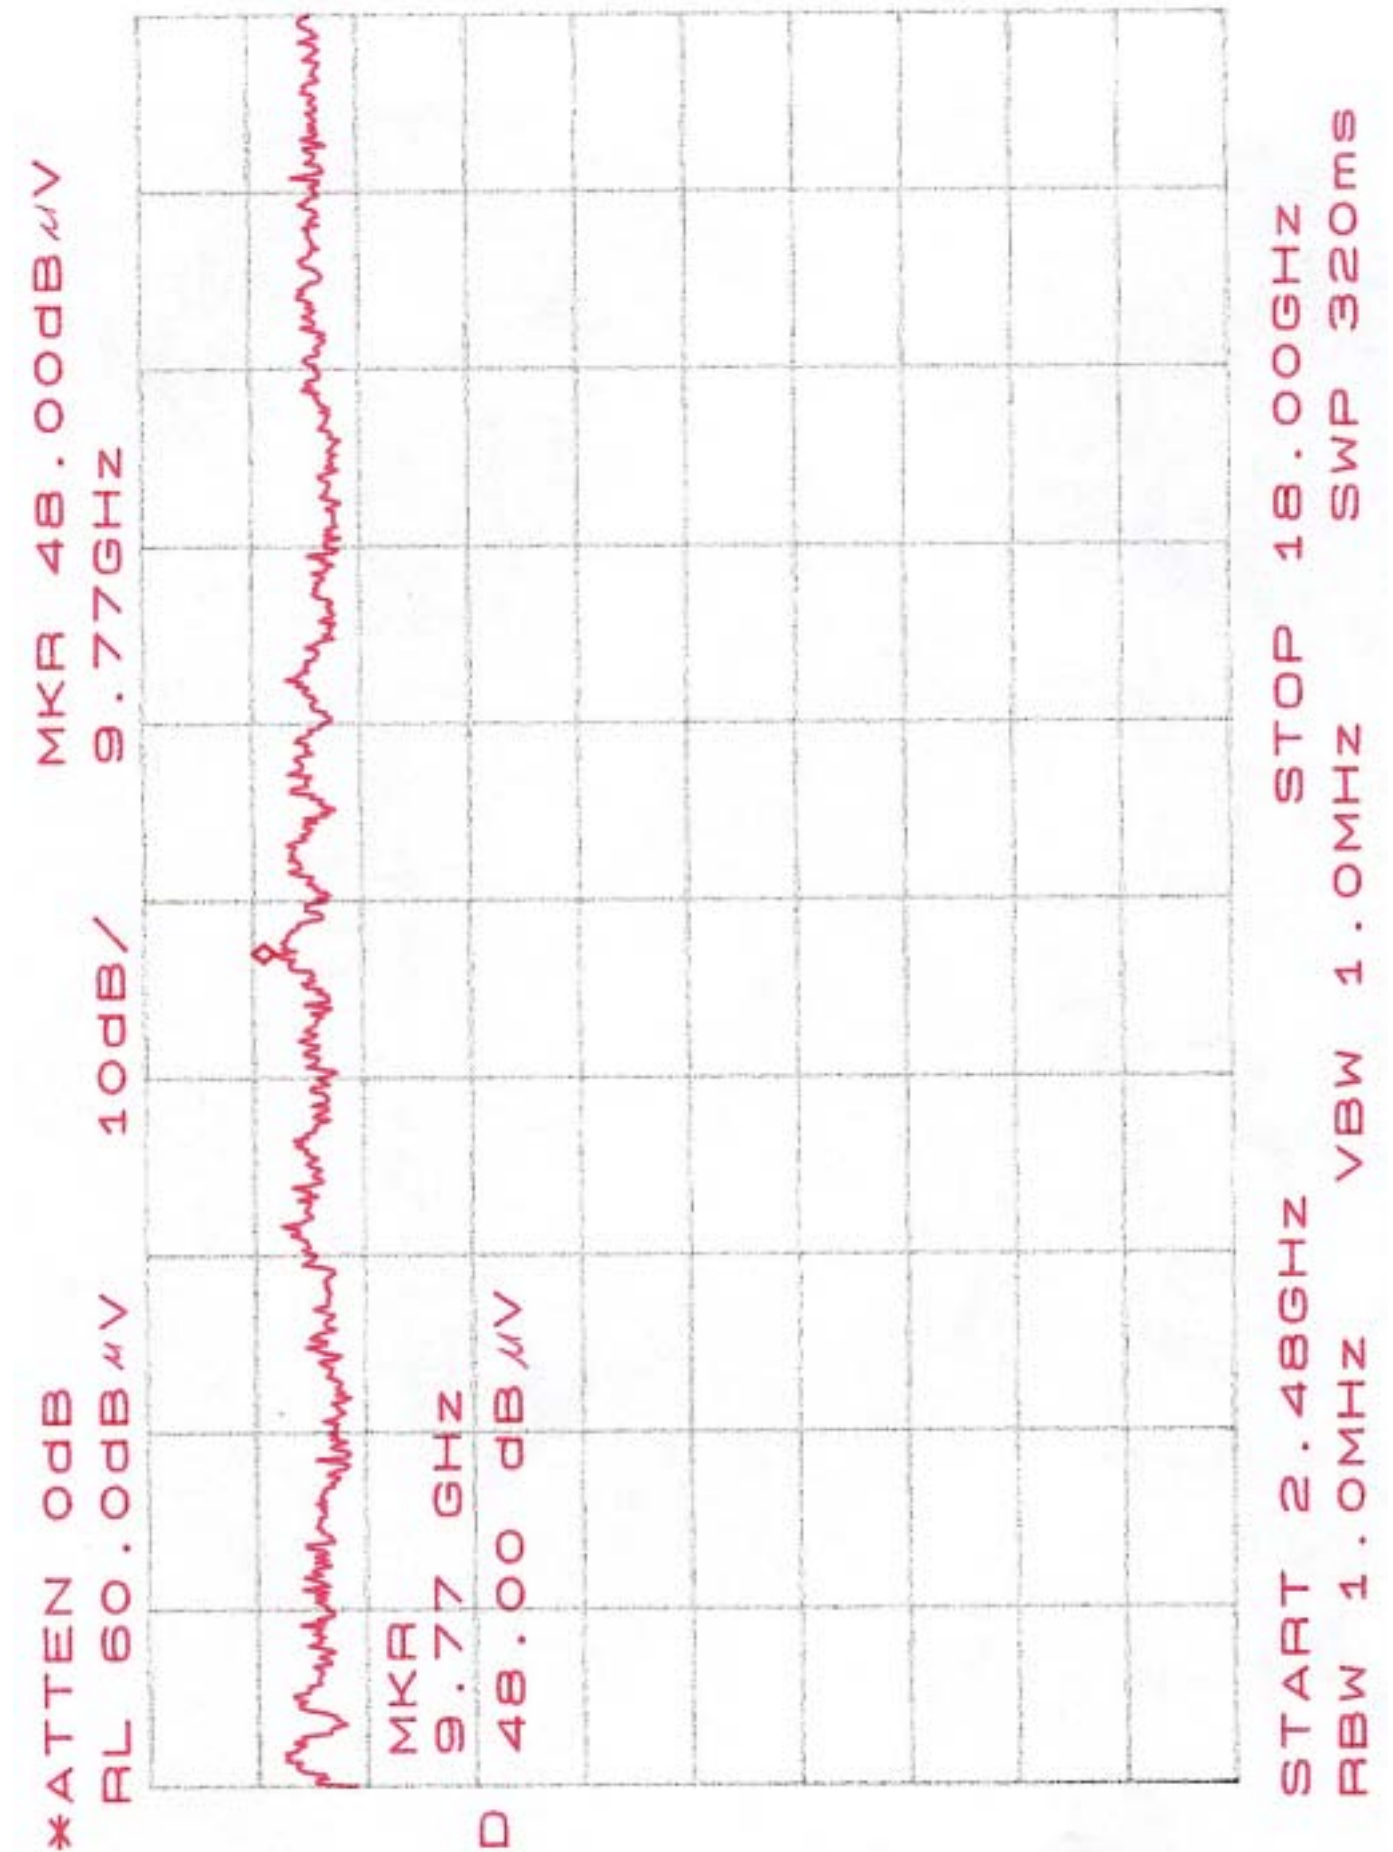

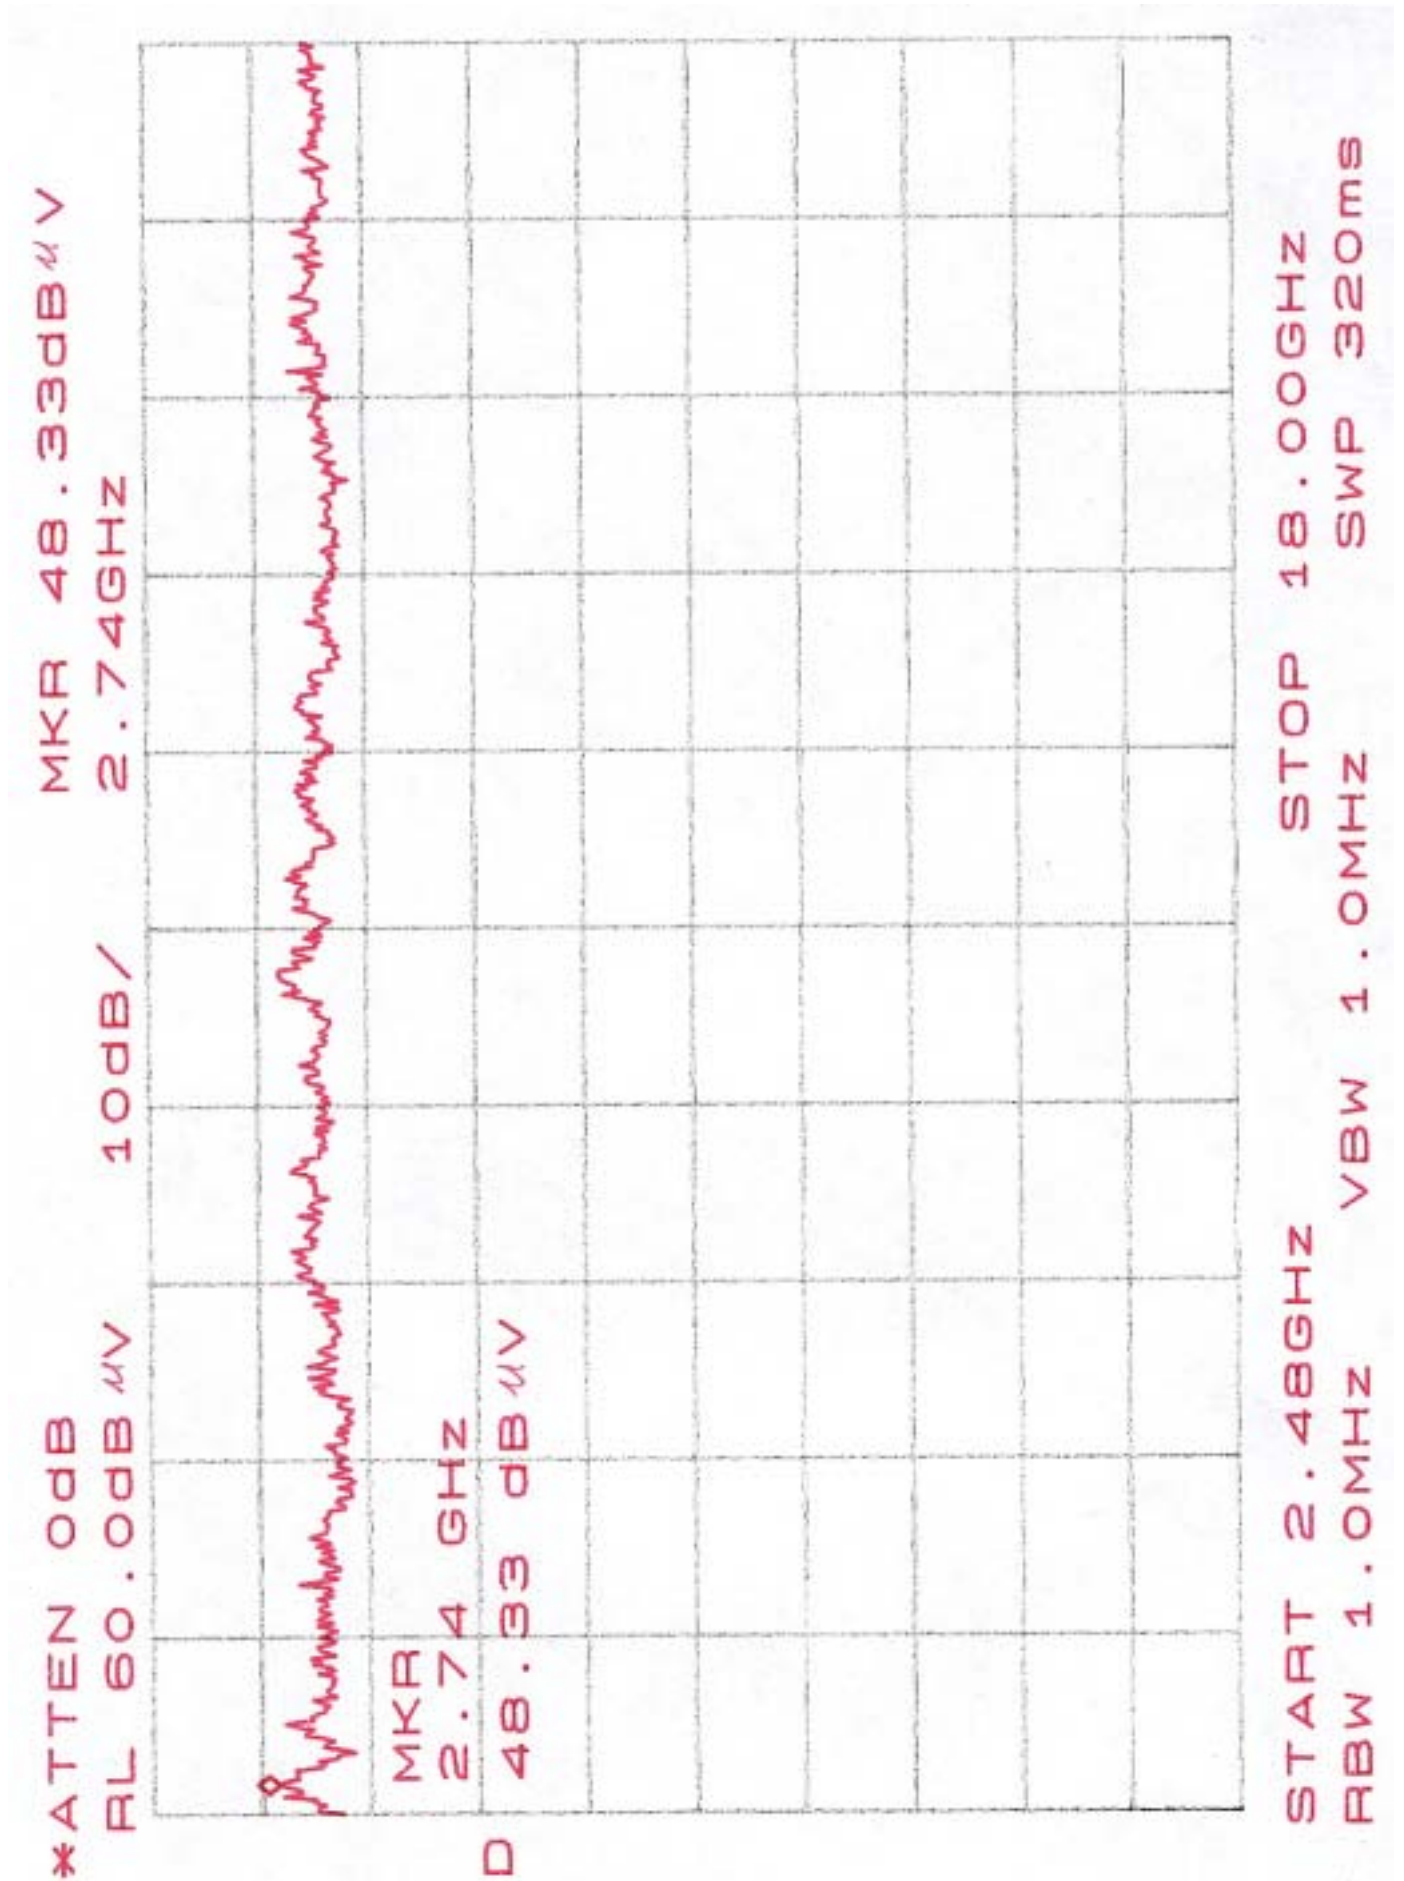


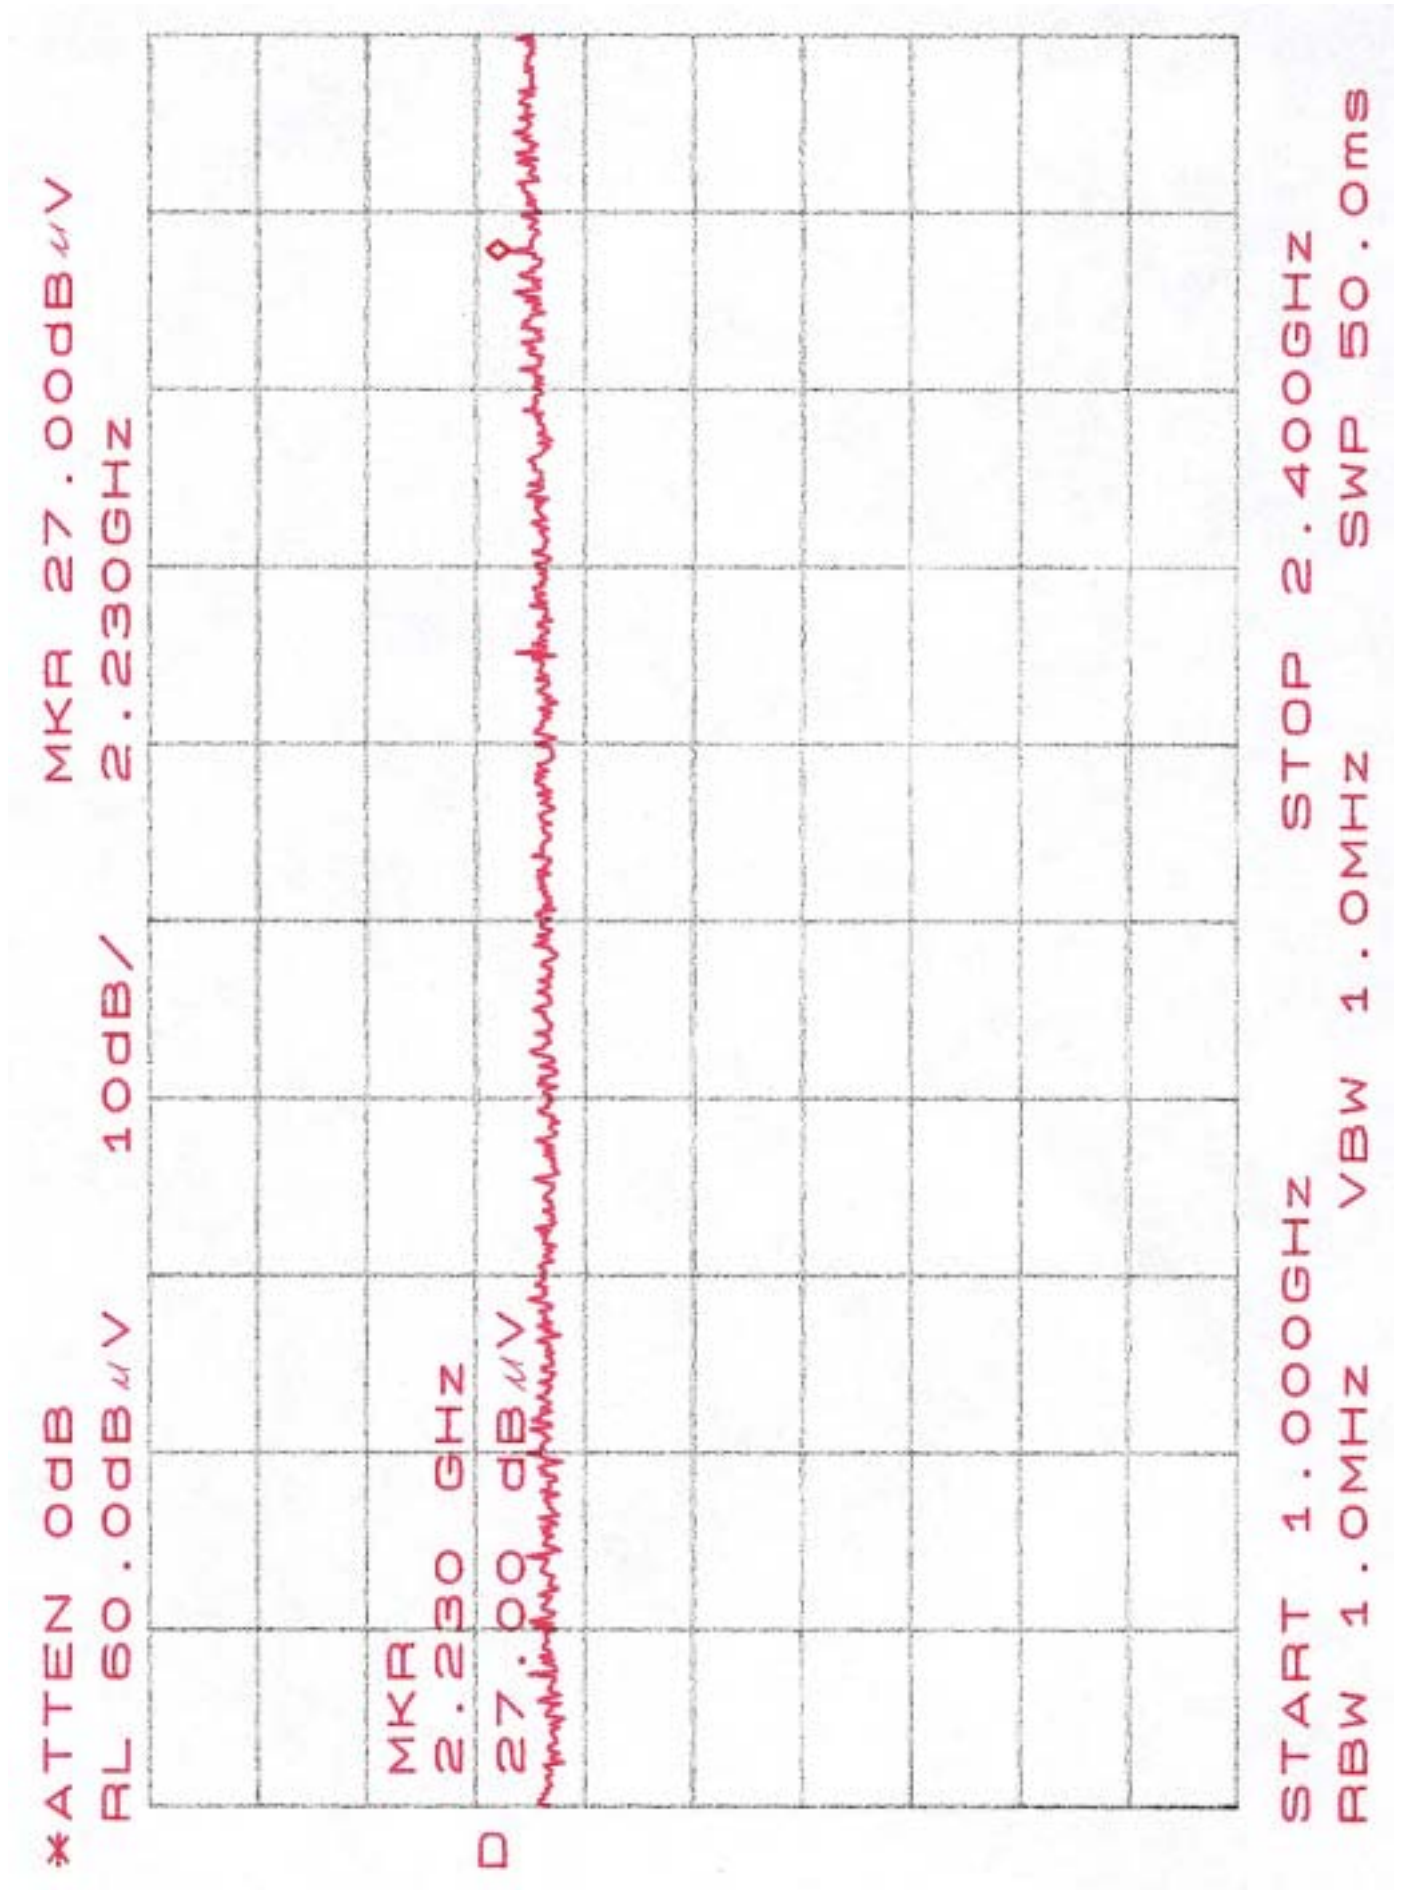


*ATTEN 0dB
RL 60.0dBμV
MKR 28.83dBμV
2.038GHz
10dB/

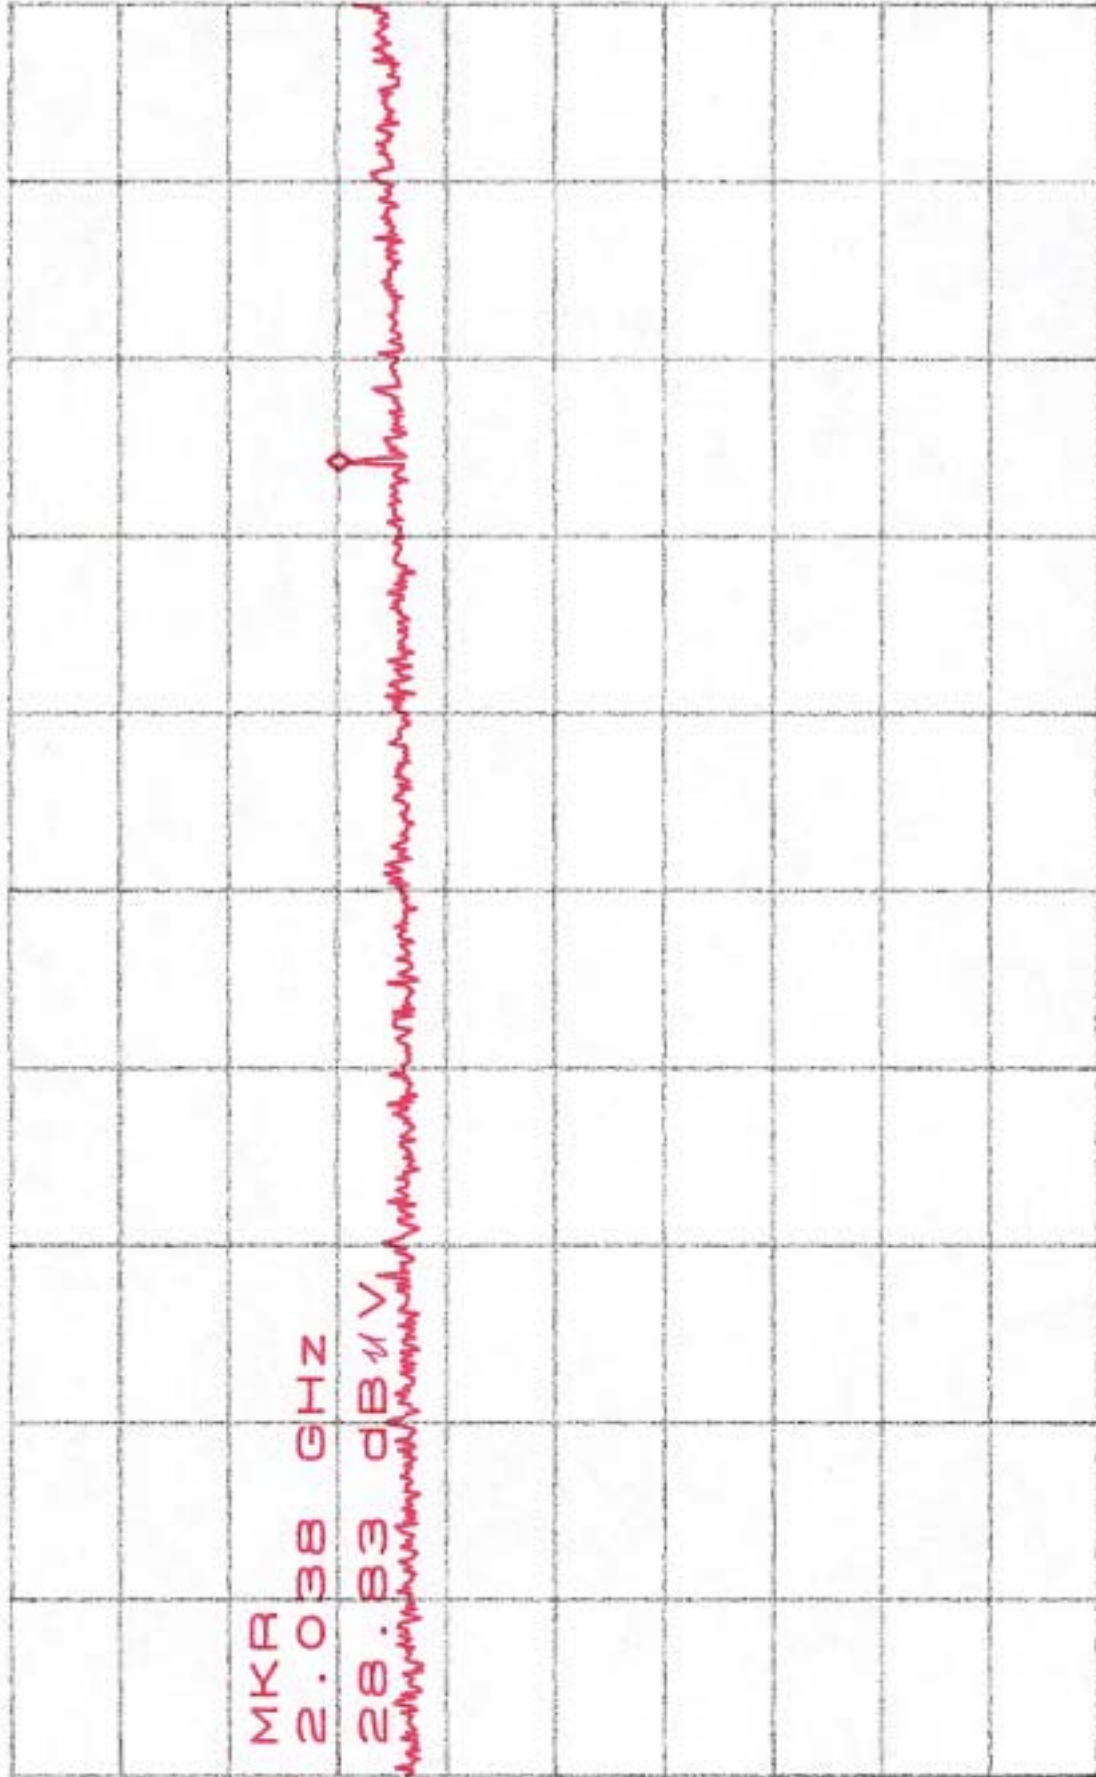


START 1.000GHz
RBW 1.0MHz
STOP 2.400GHz
VBW 1.0MHz
SWP 50.0ms

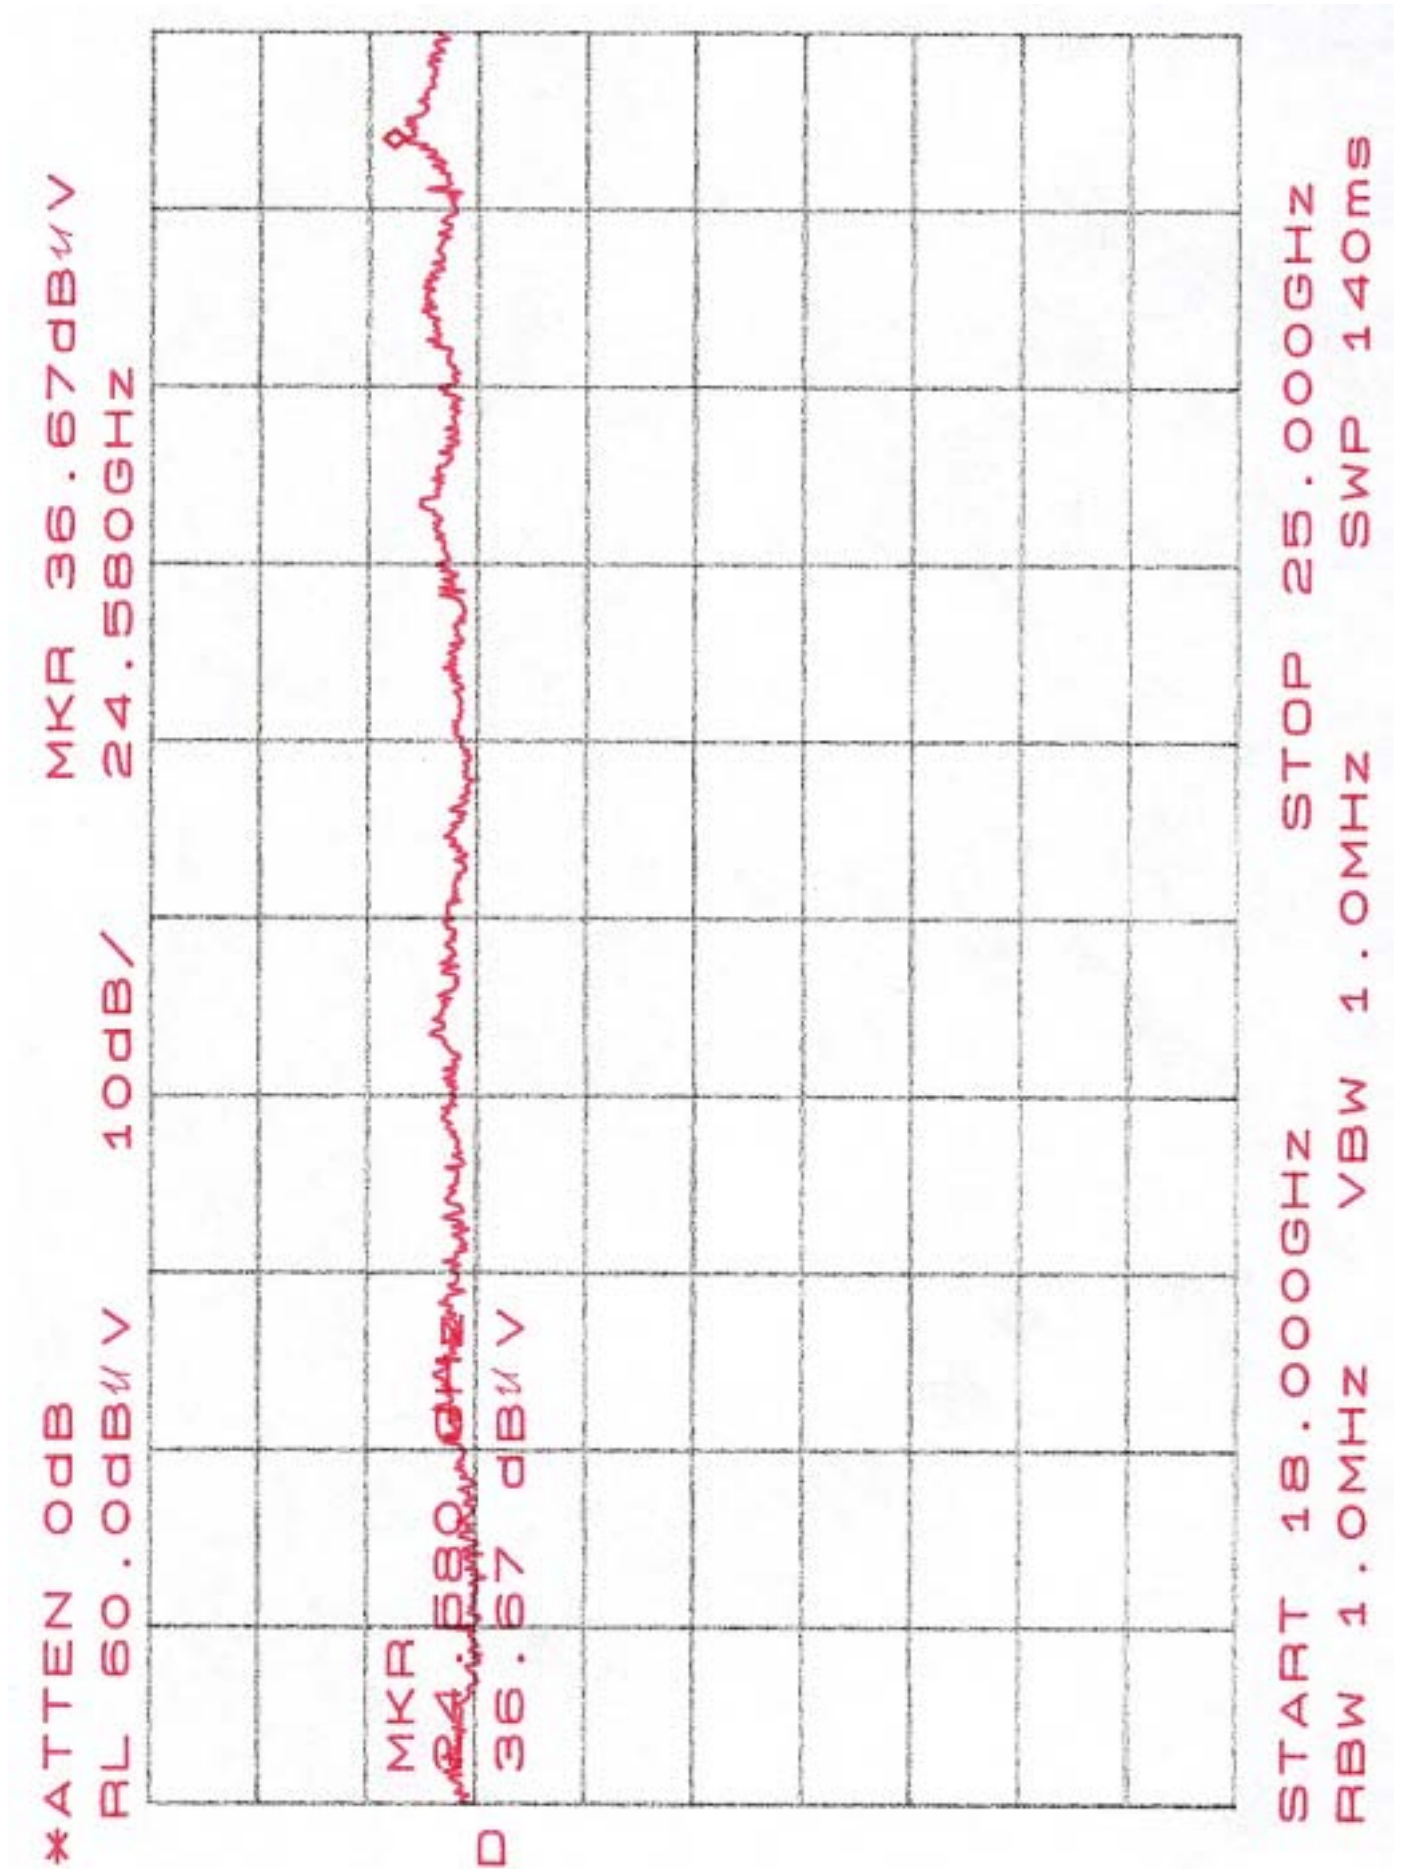



*ATTEN 0dB MKR 36.67dBV
RL 60.0dBV 10dB/ 24.603GHz

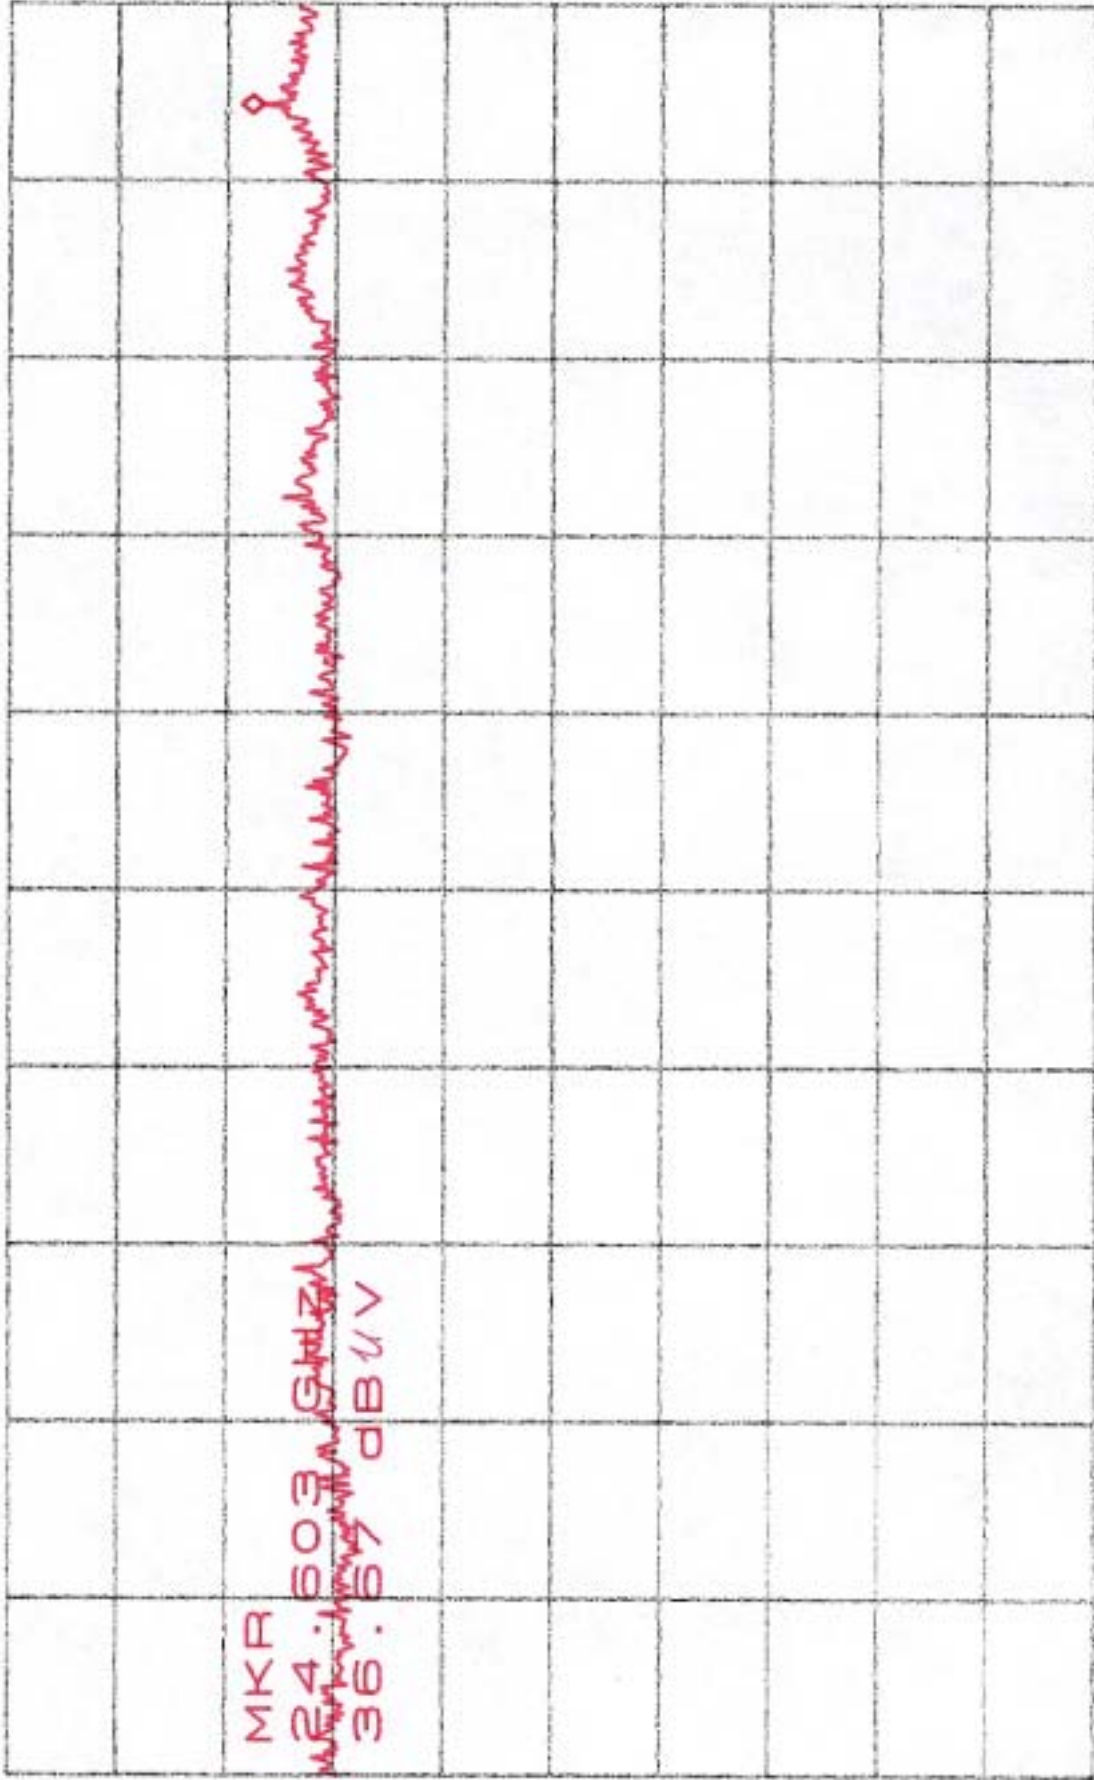



START 18.000GHZ STOP 25.000GHZ
RBW 1.0MHZ VBW 1.0MHZ SWP 140ms

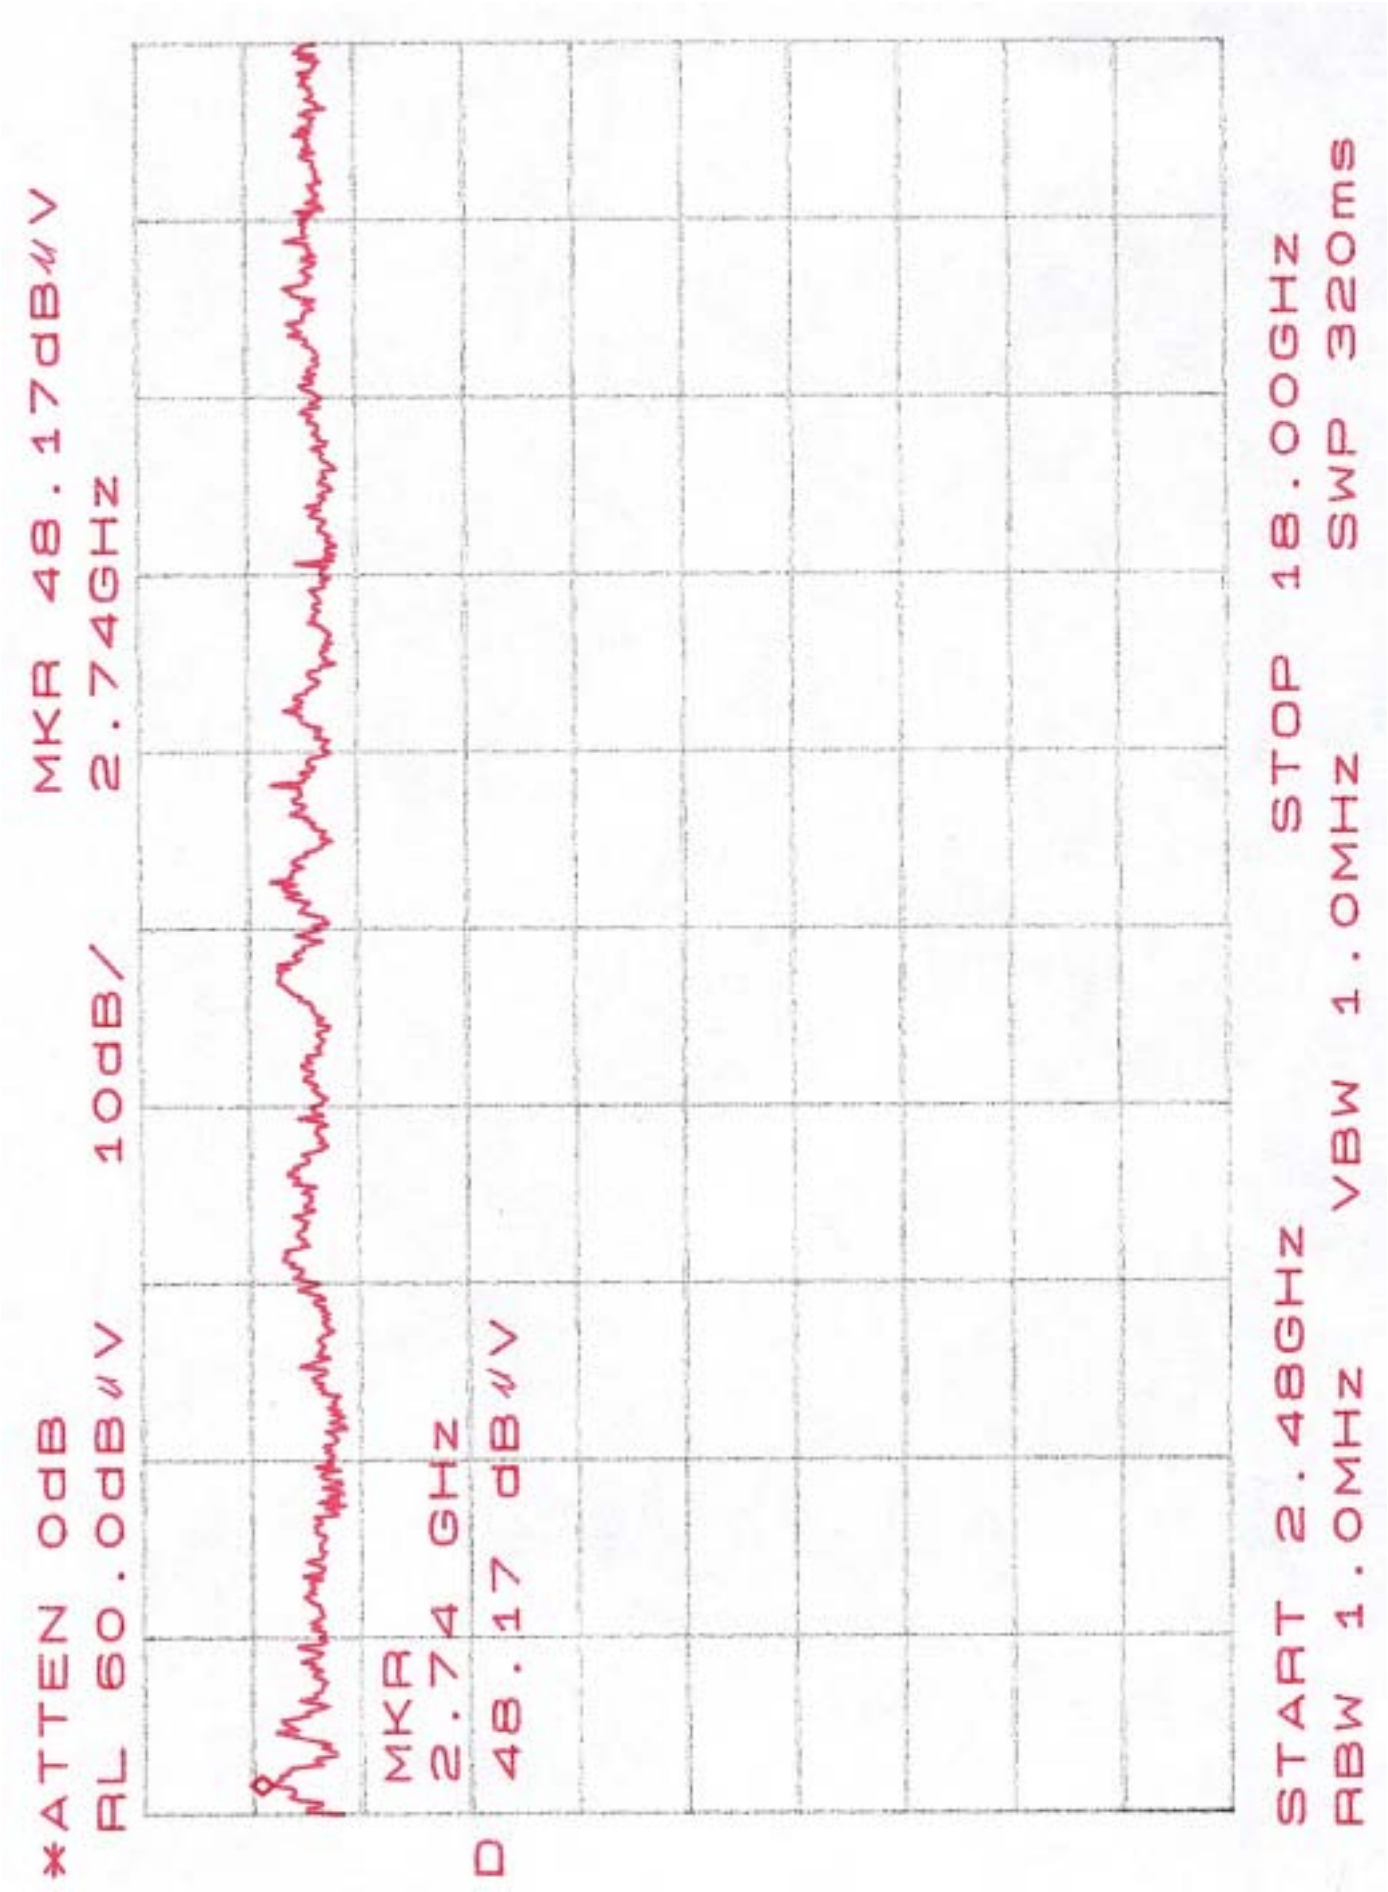

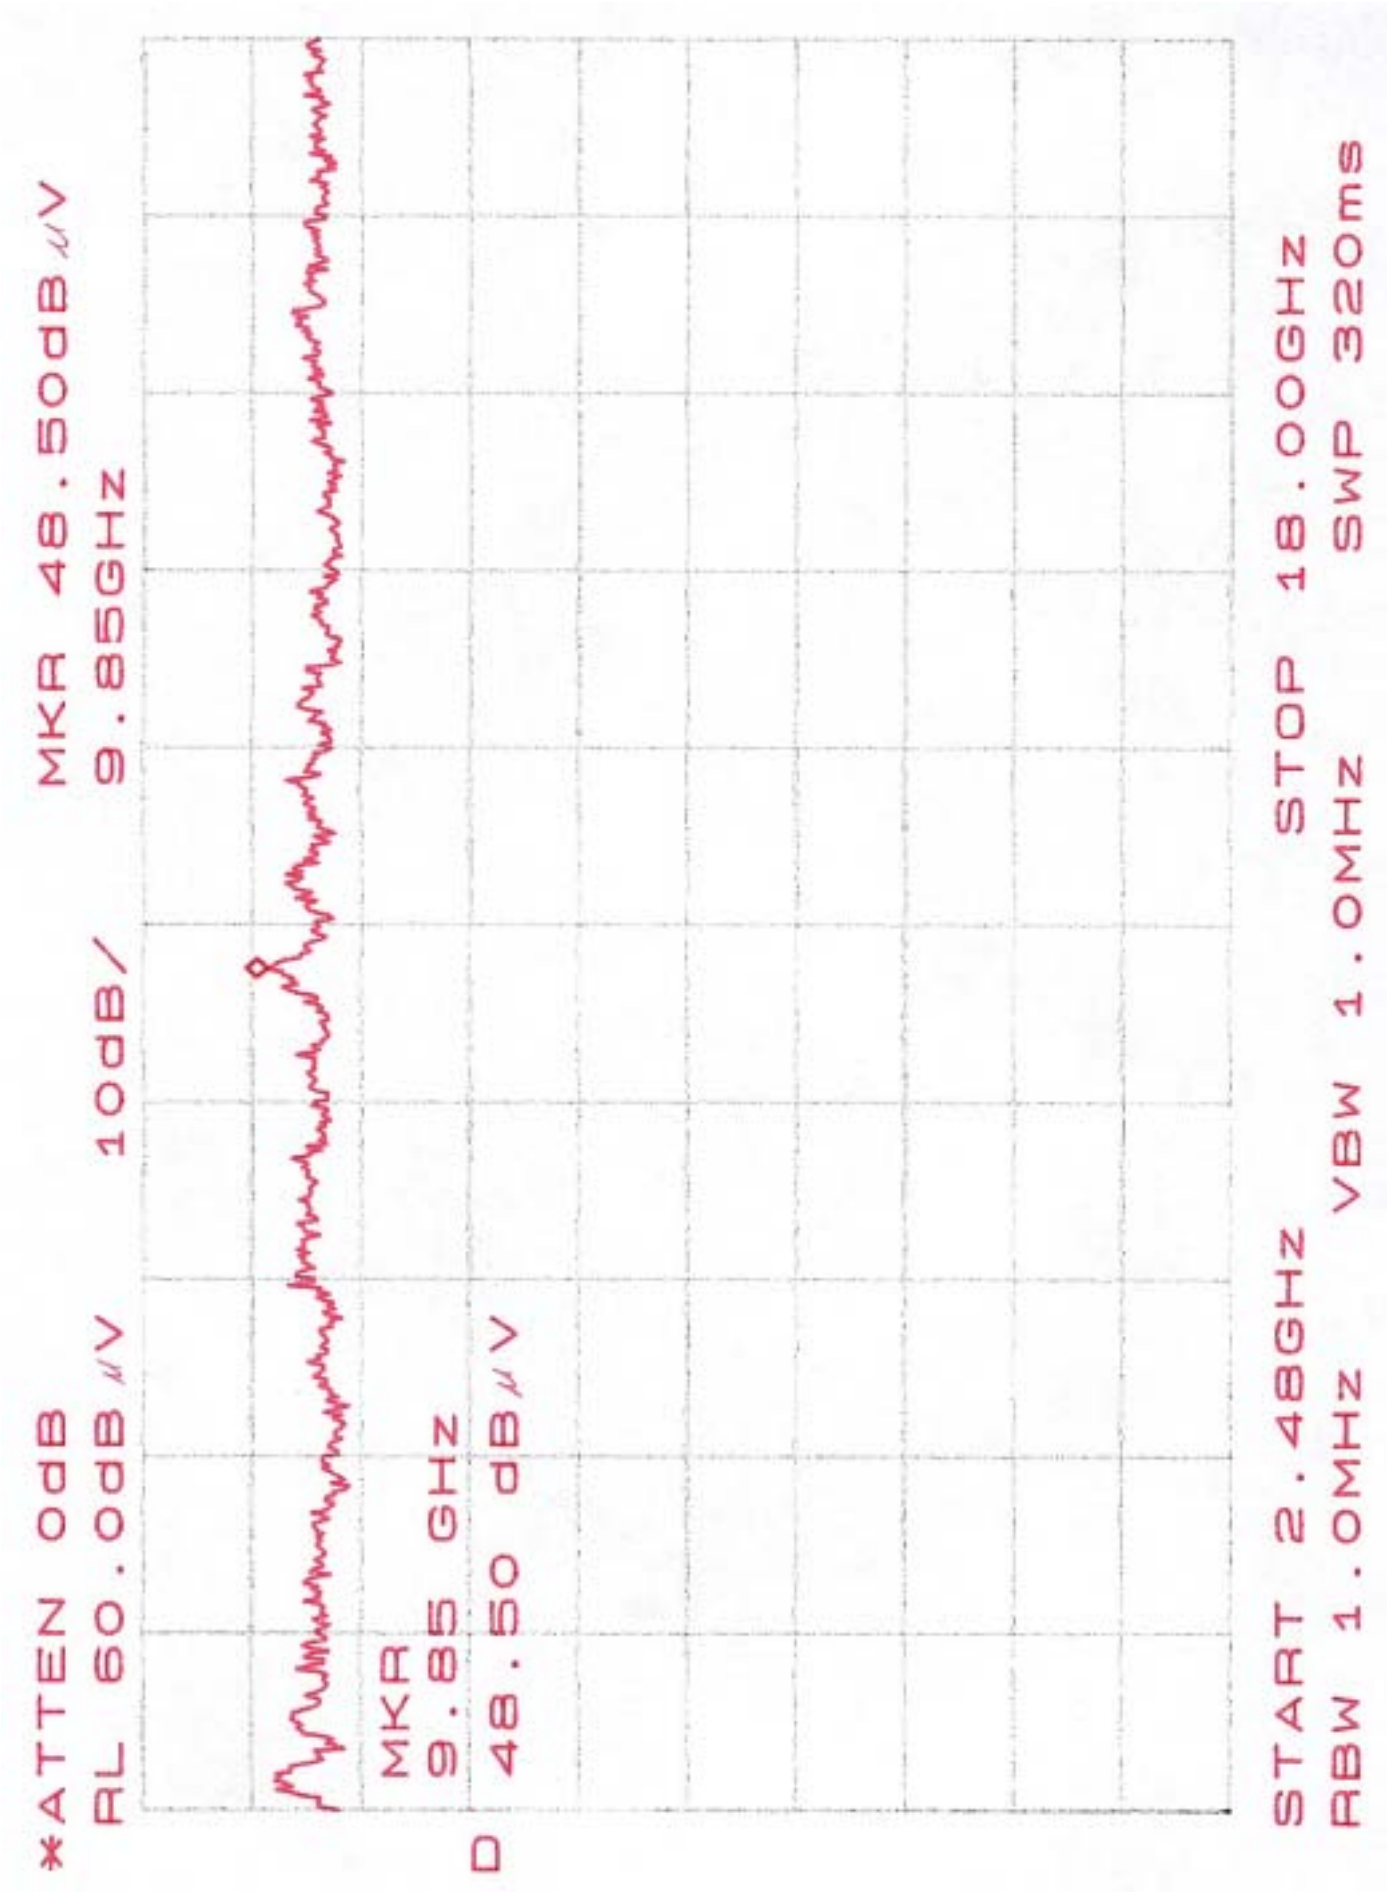


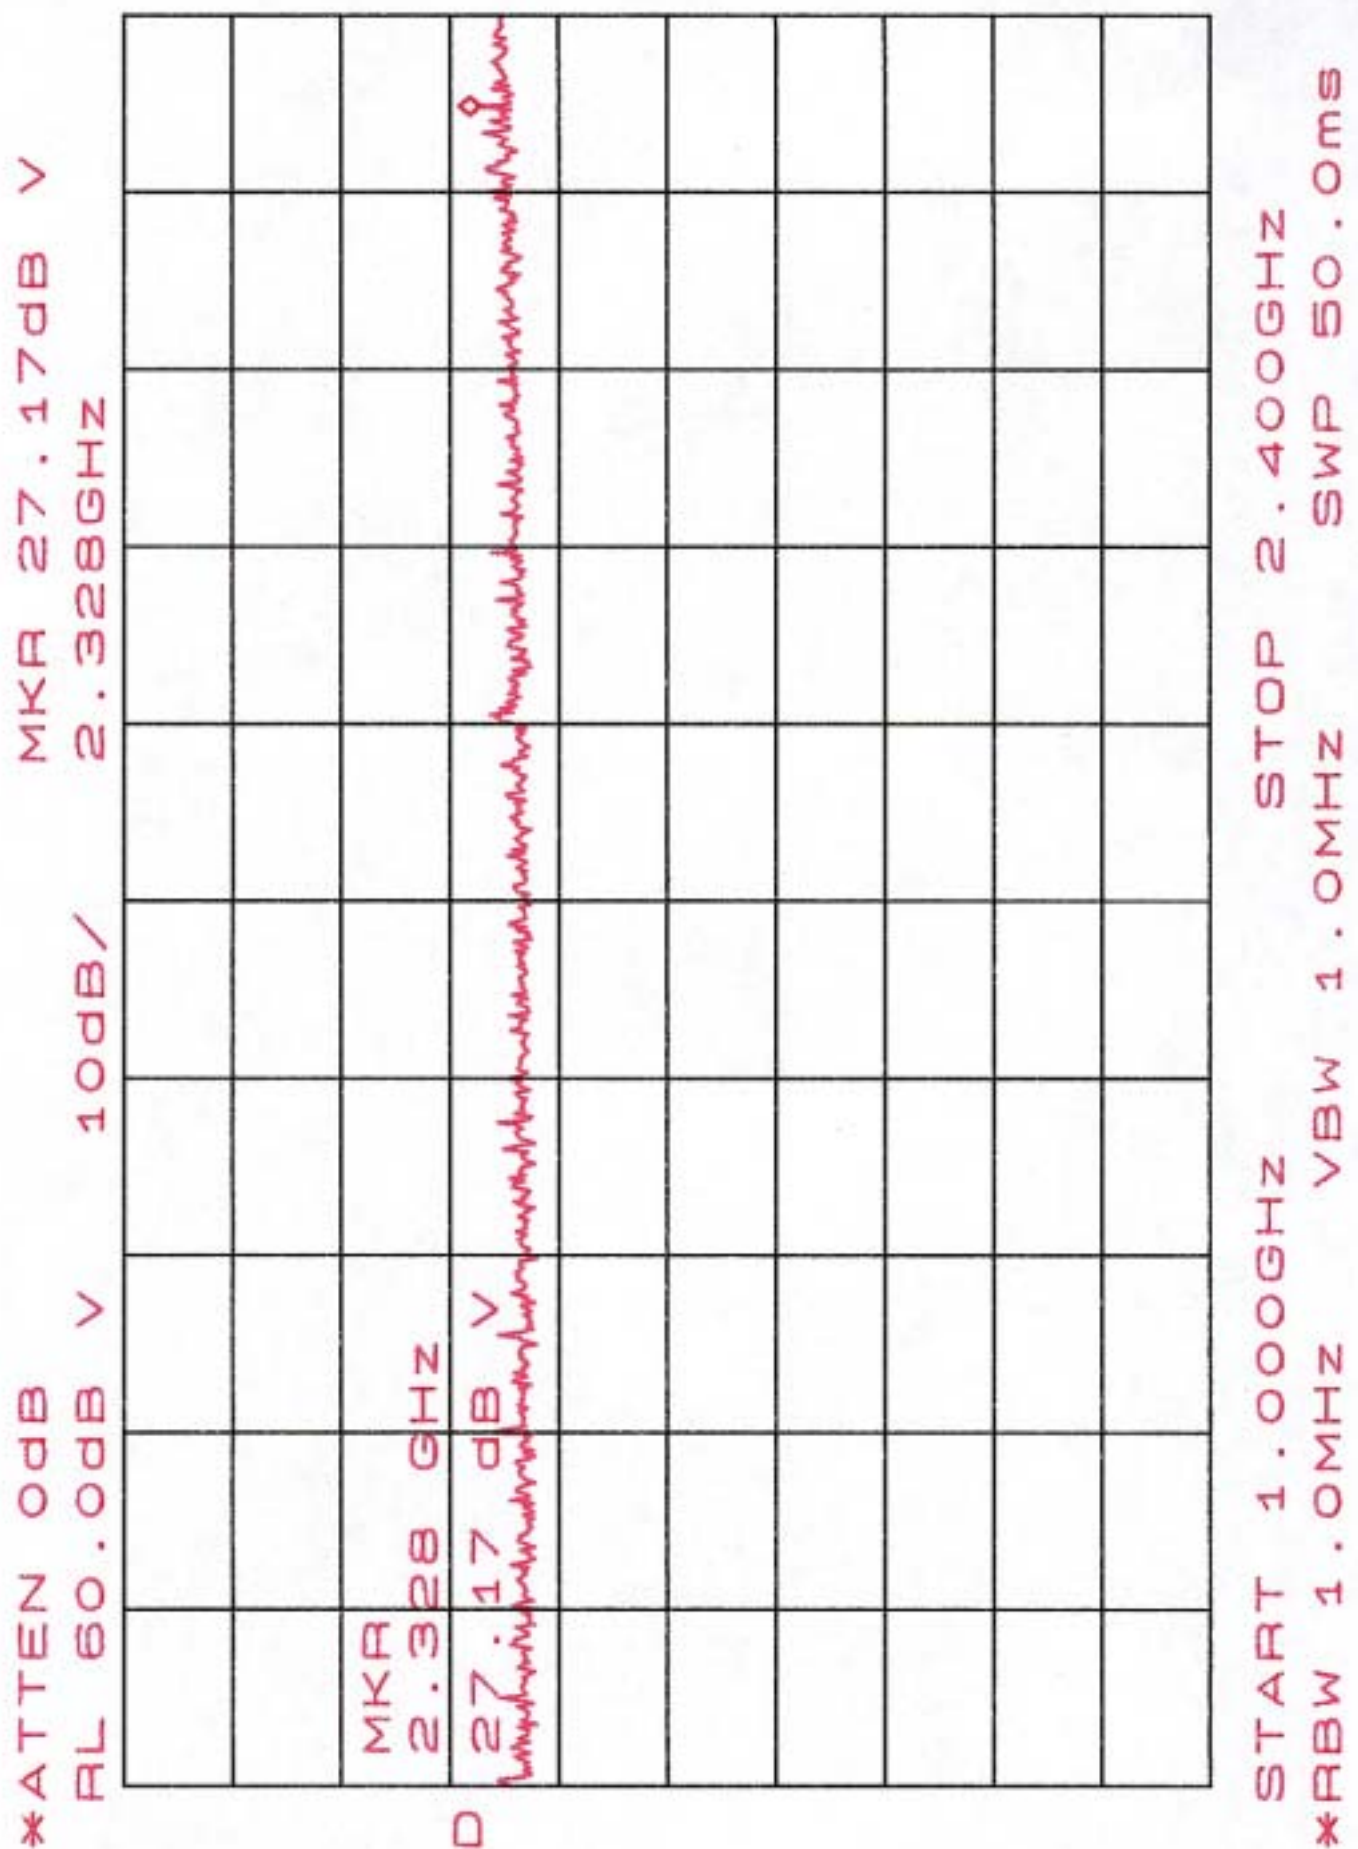

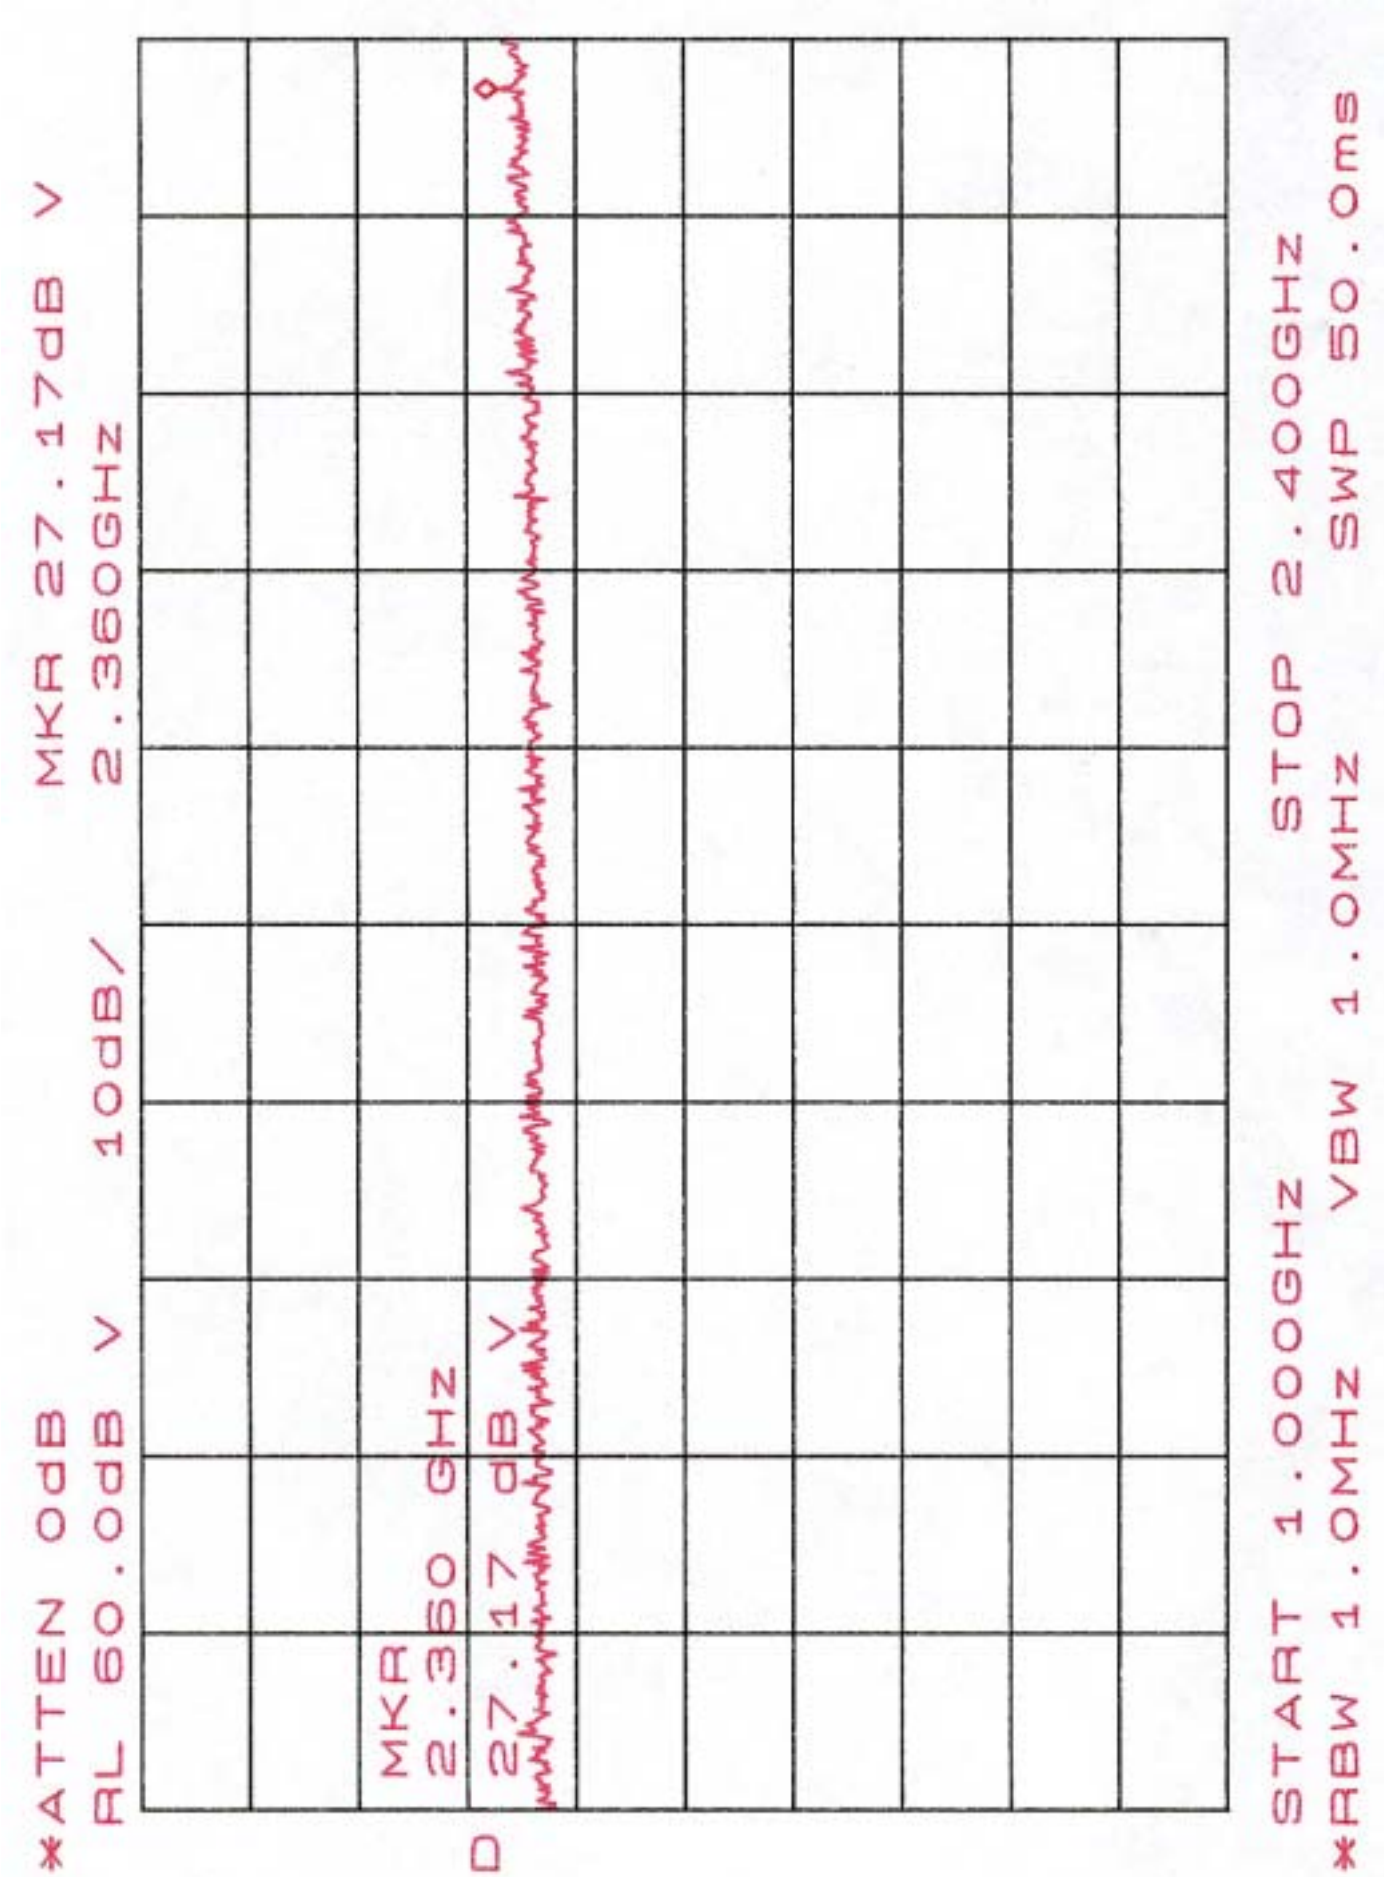


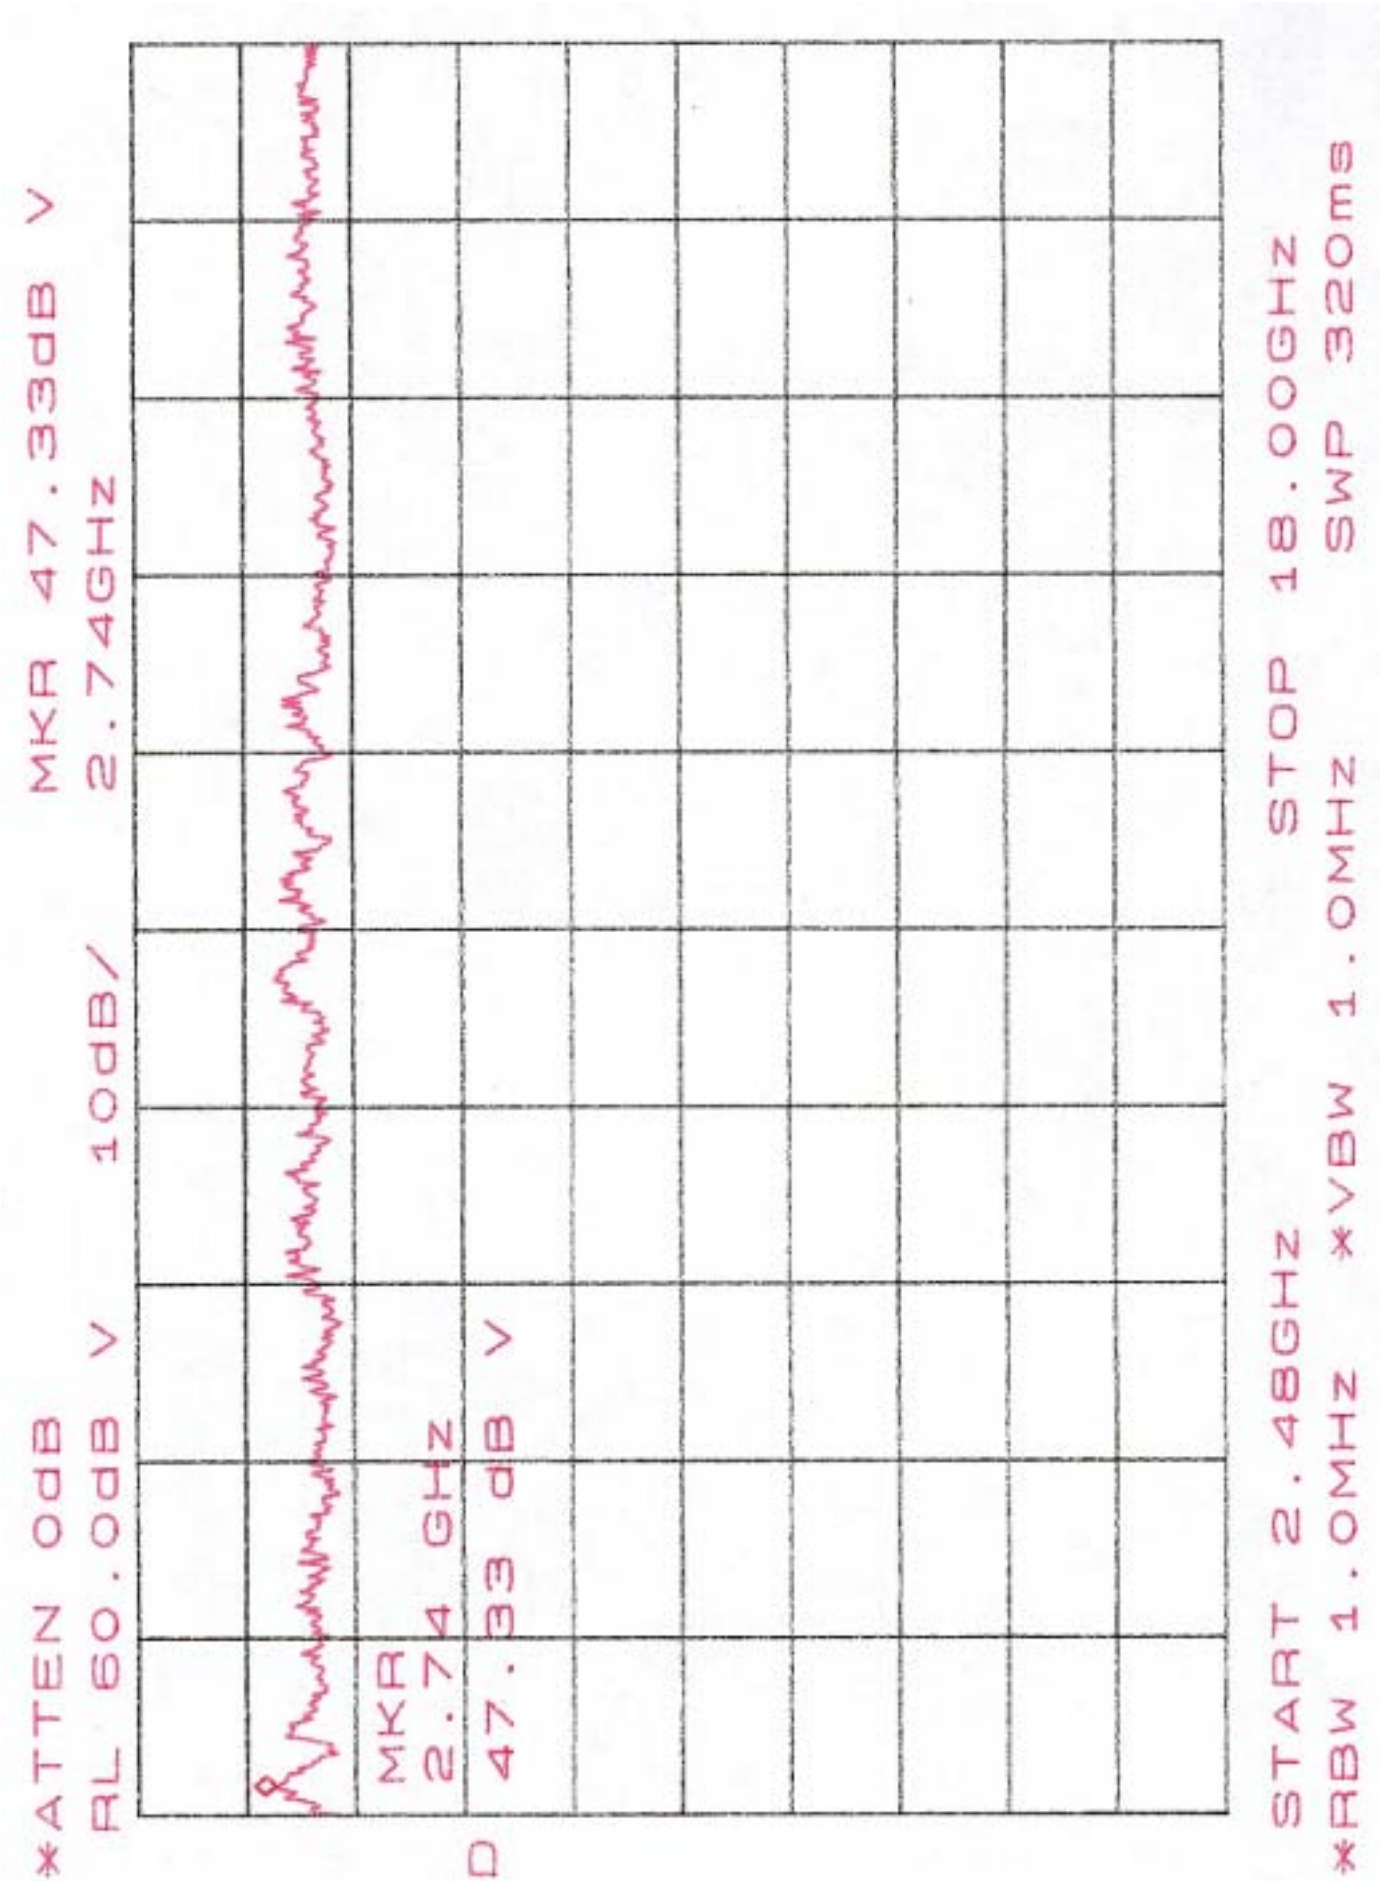


*ATTEN 0dB
RL 60.0dB V
MKR 48.33dB V
9.88GHz
10dB/

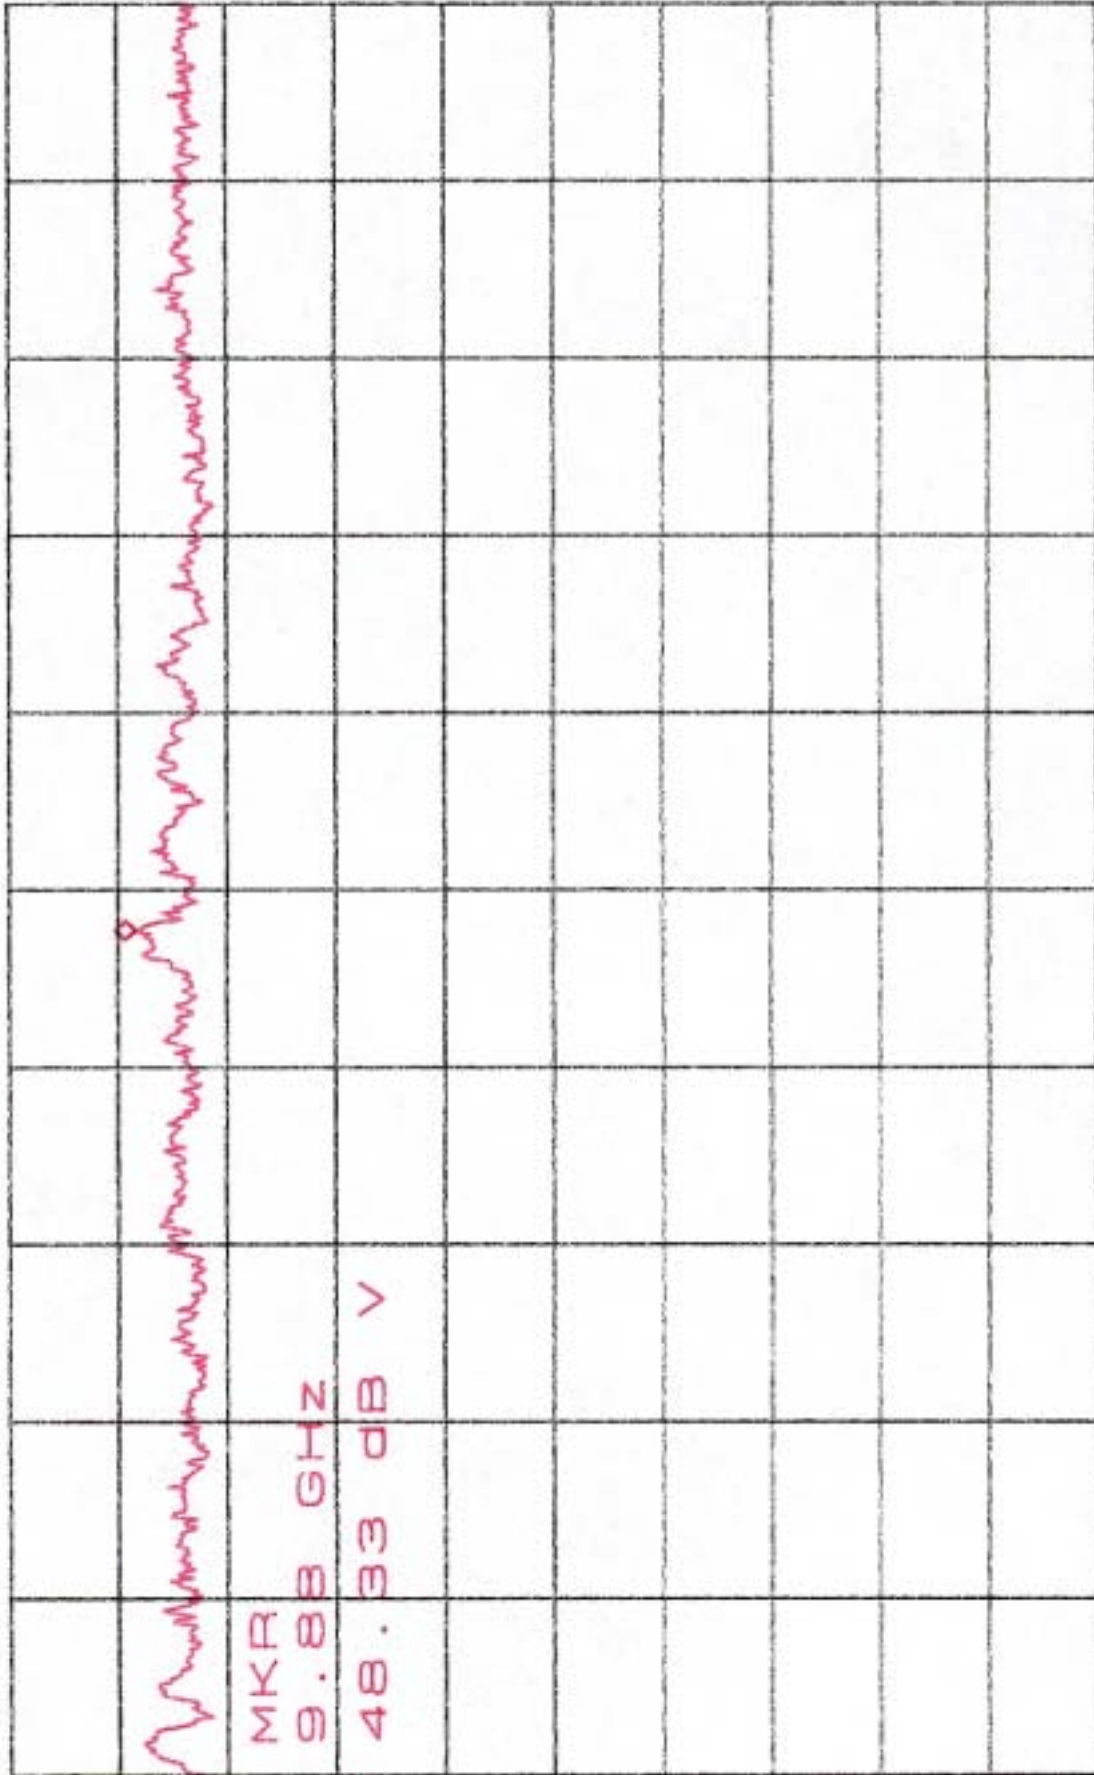


START 2.48GHz
*RBW 1.0MHz
STOP 18.00GHz
*VBW 1.0MHz
SWP 320ms

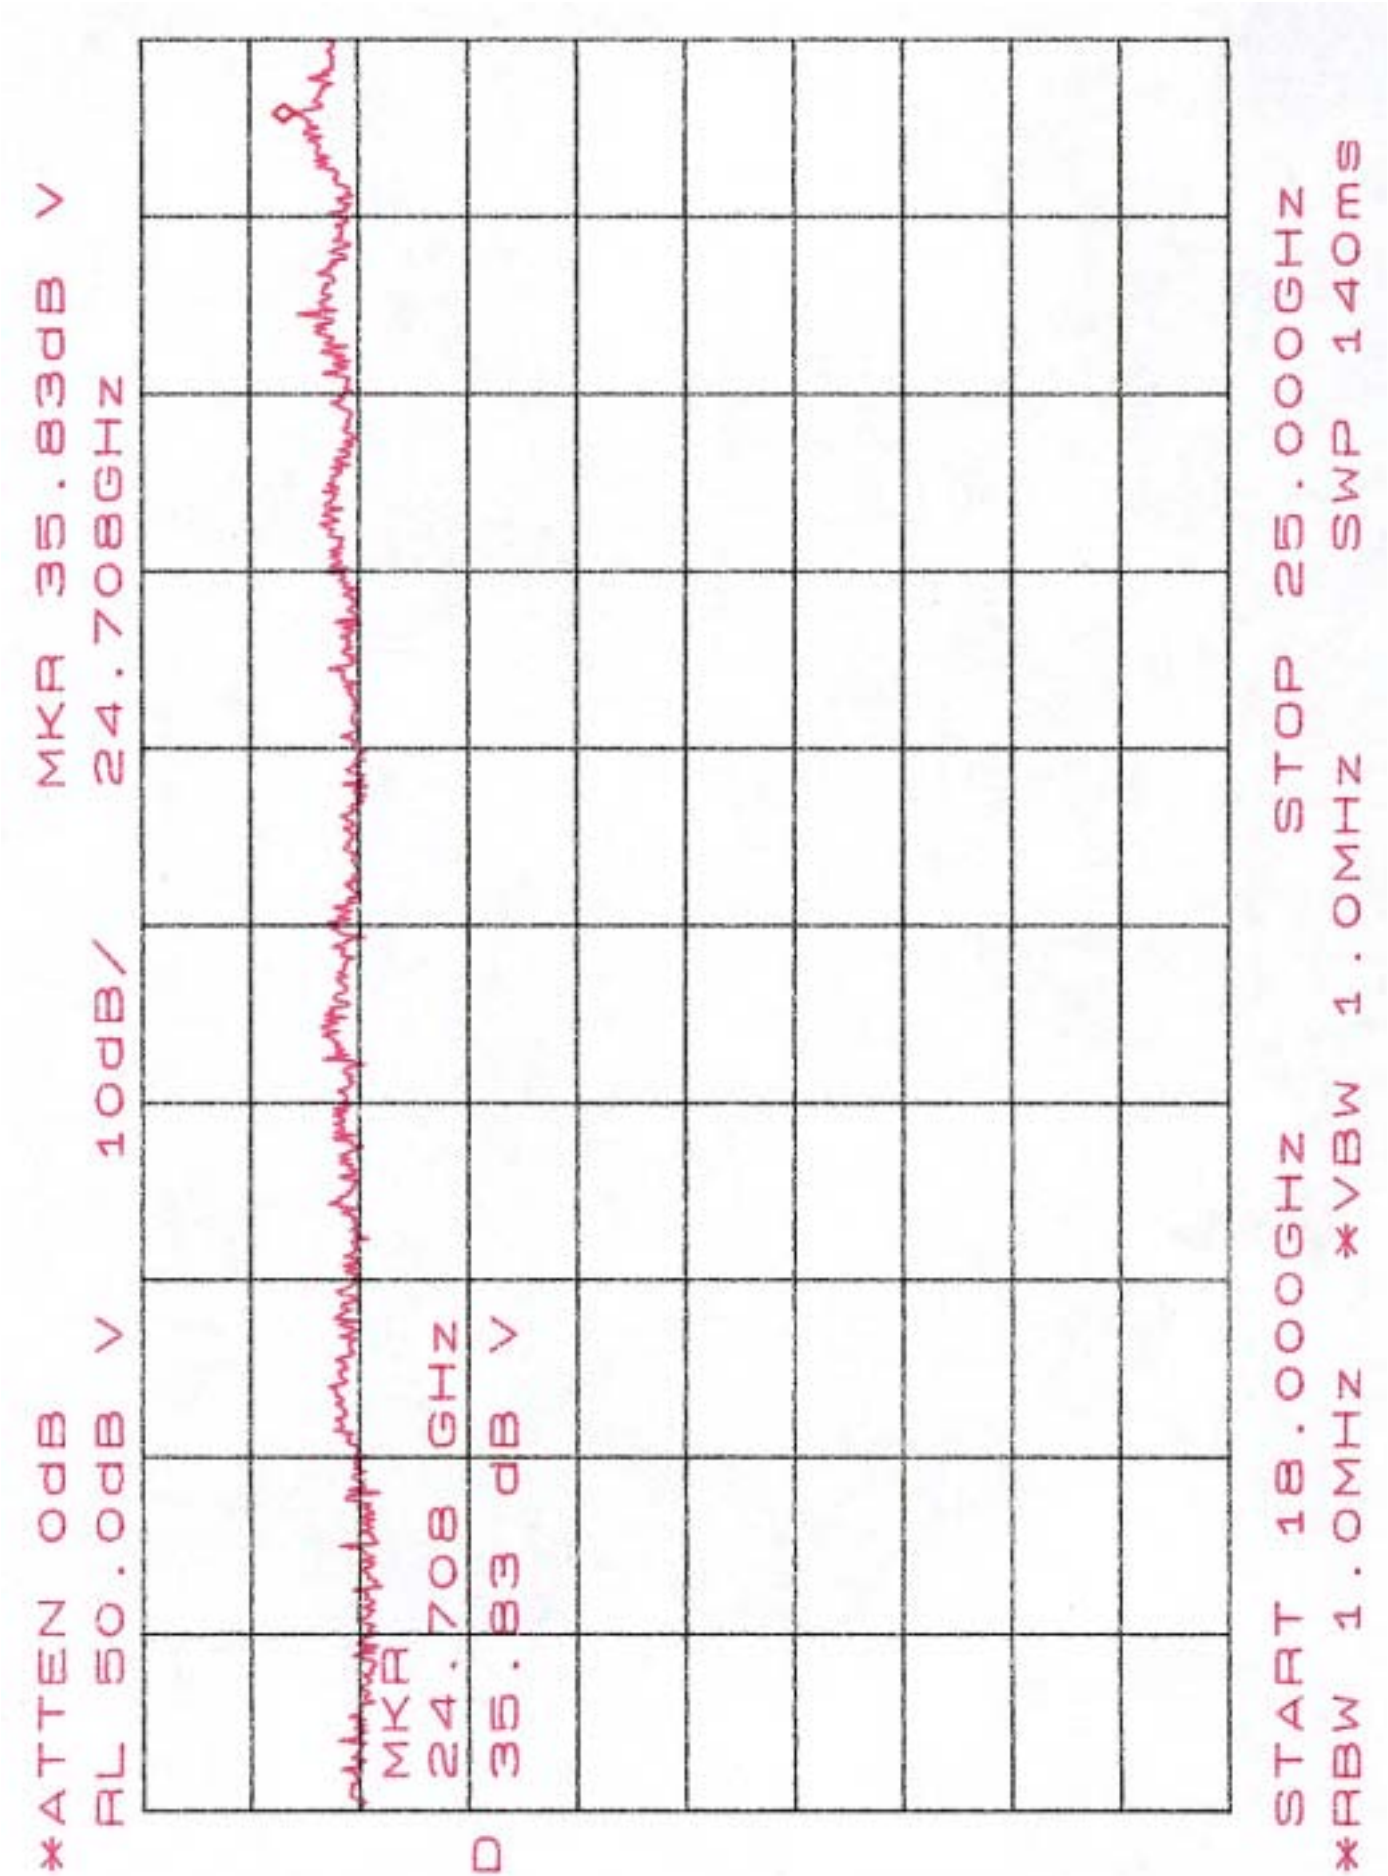

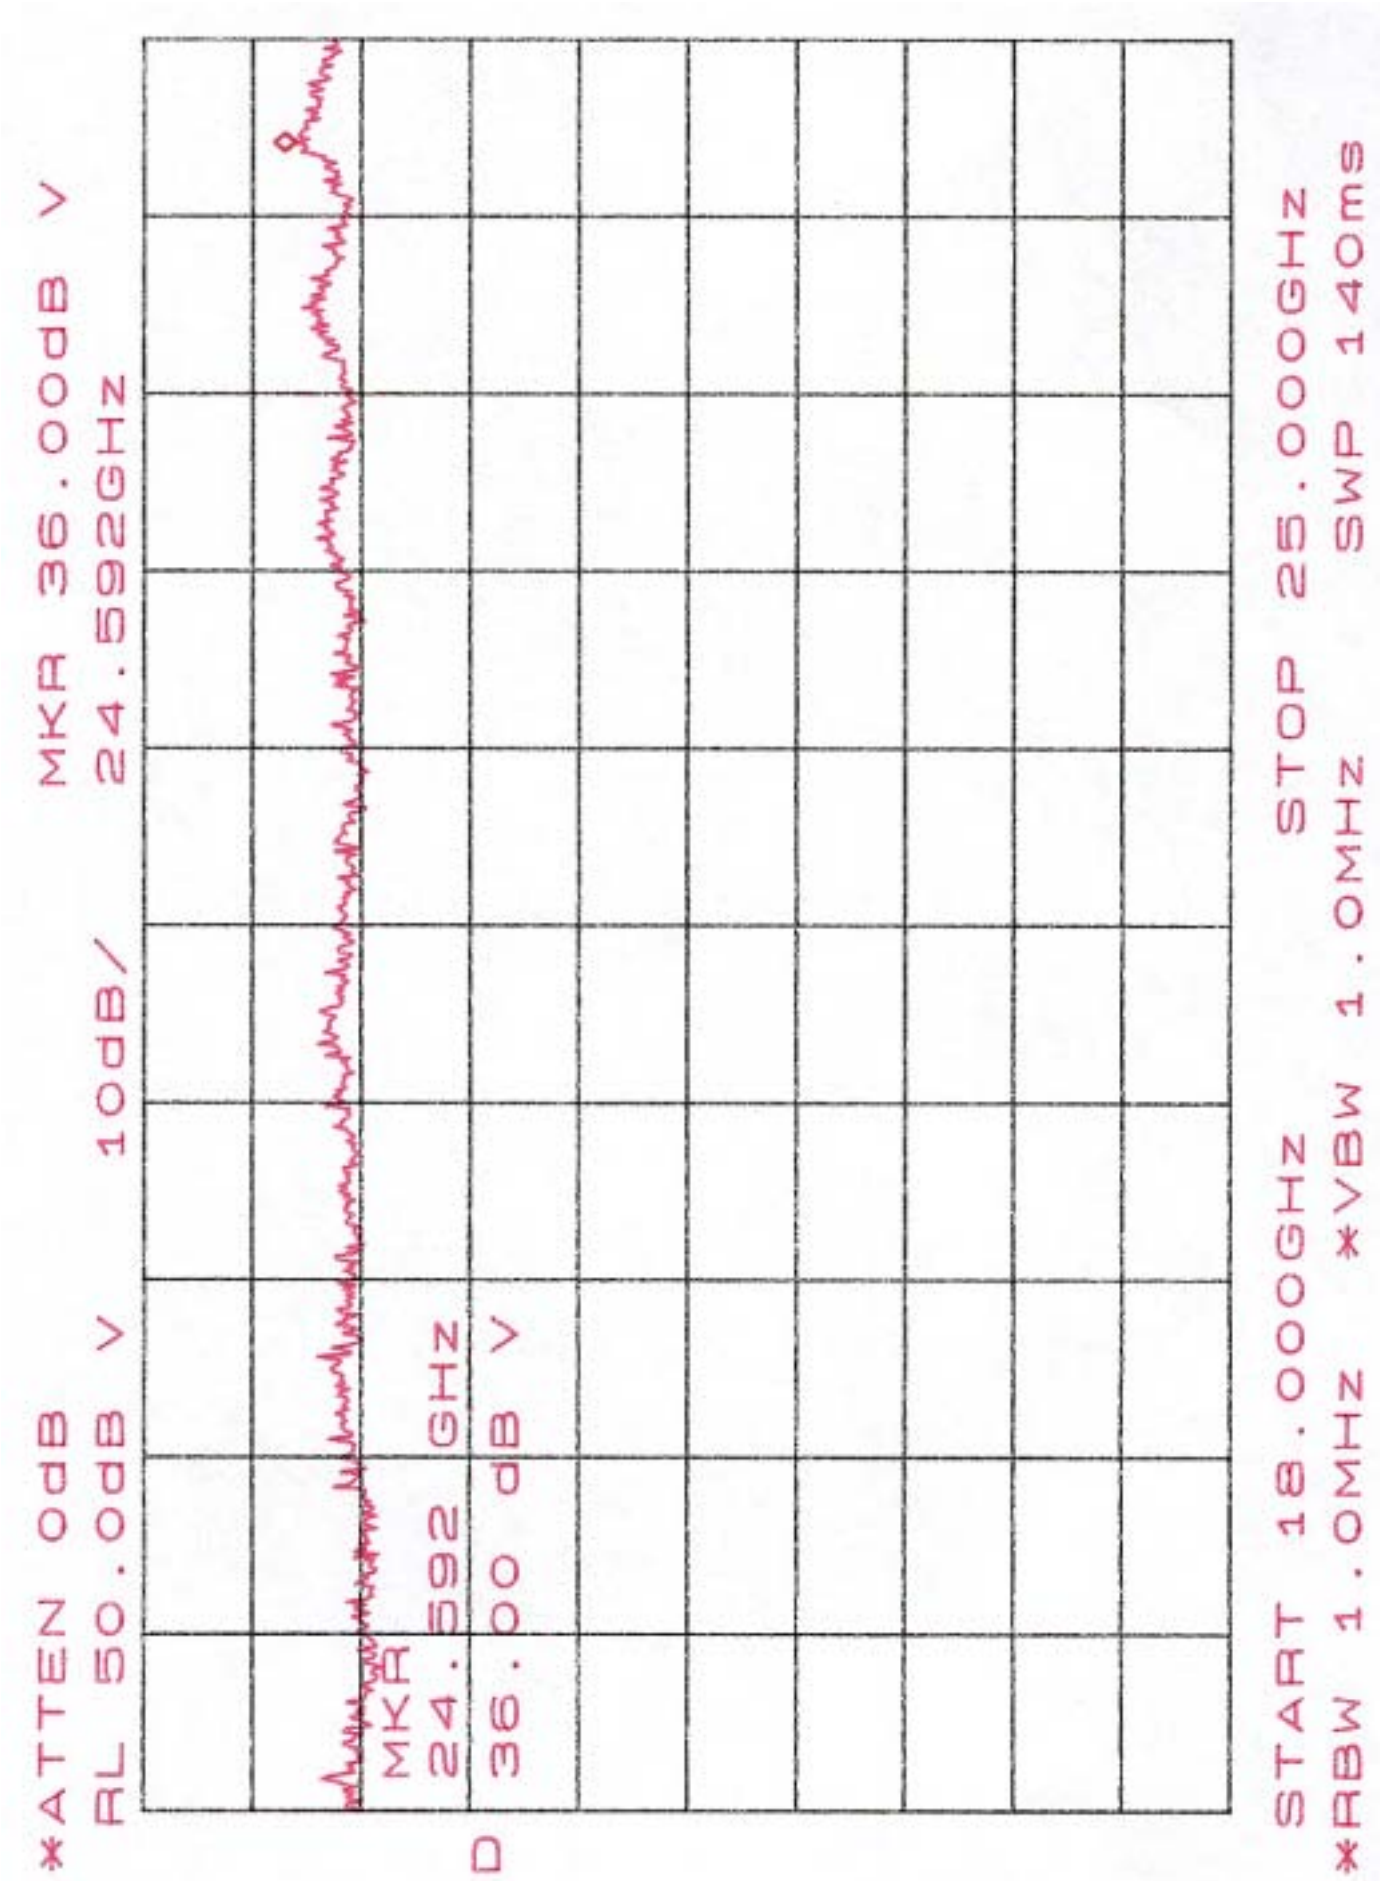


*ATTEN 0dB MKR 26.83dB V
RL 50.0dB V 10dB/ 2.388GHz

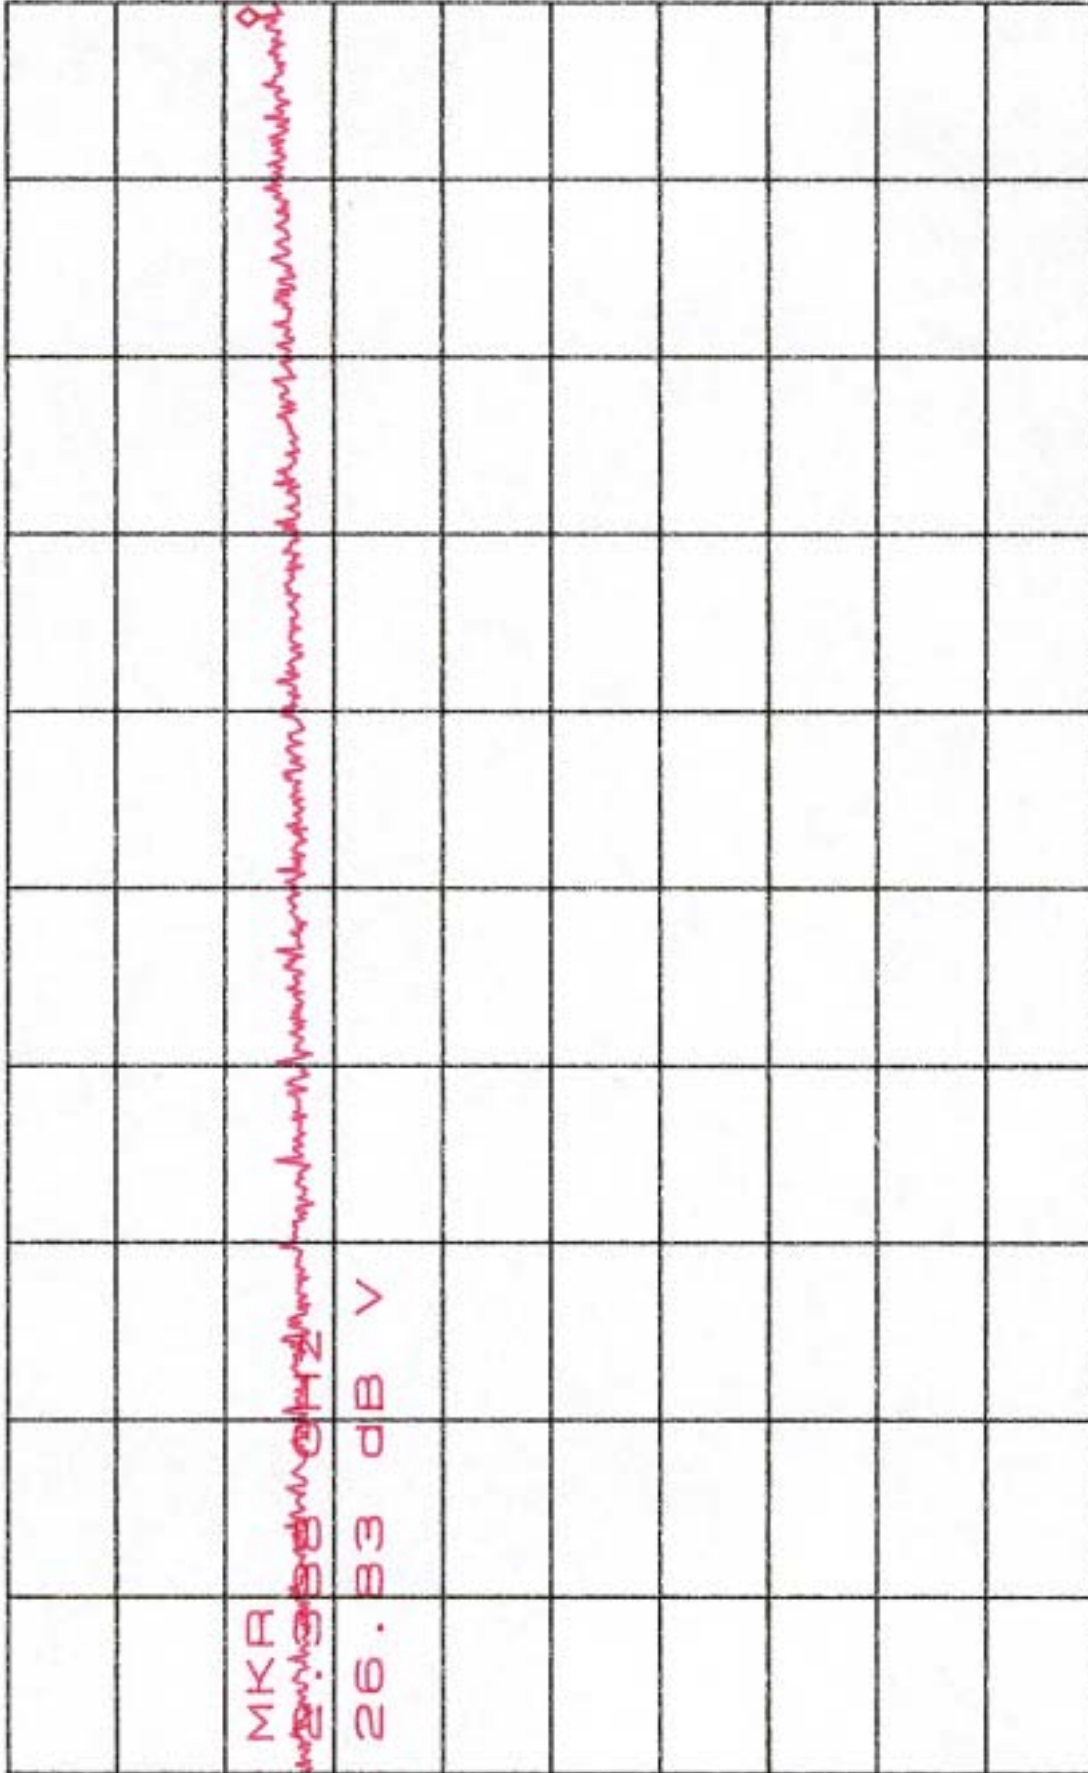



START 1.000GHz STOP 2.400GHz
*RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms

*ATTEN 0dB MKR 31.50dB V
RL 50.0dB V 2.400GHZ 10dB/

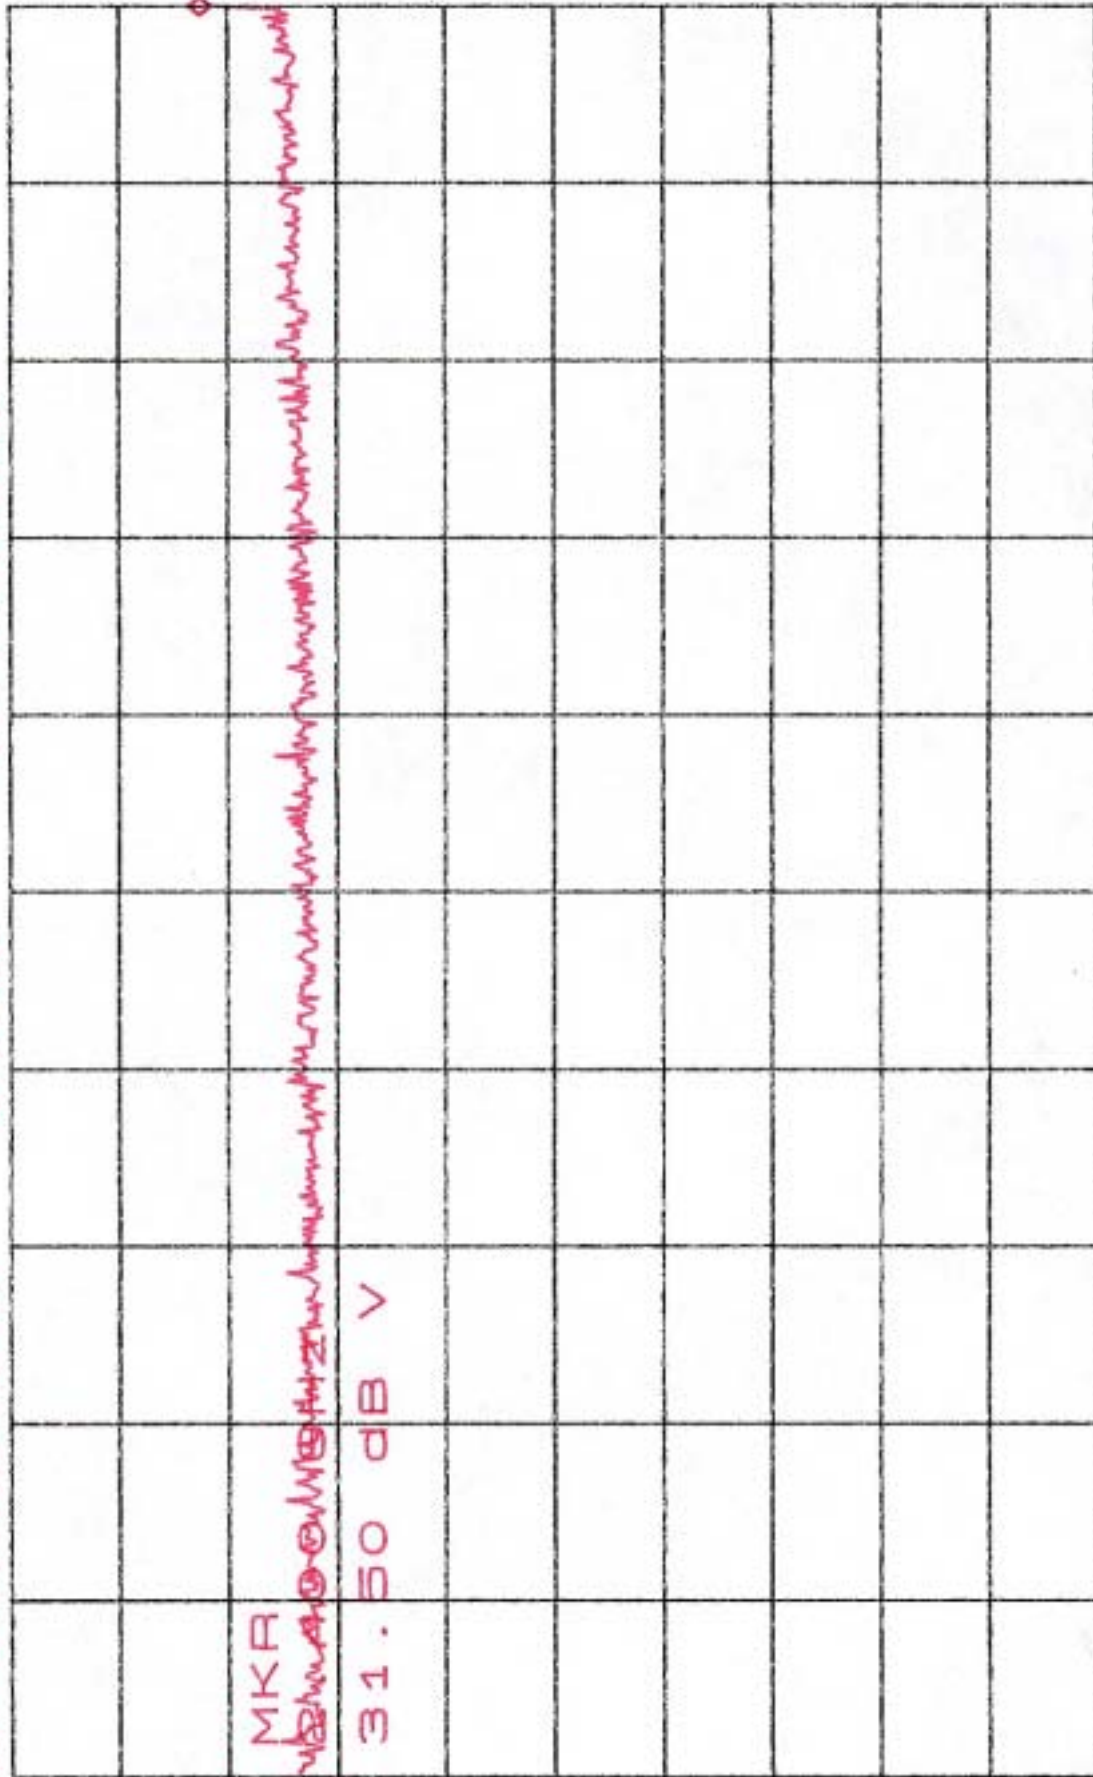


START 1.000GHZ STOP 2.400GHZ
*RBW 1.0MHZ *VBW 1.0MHZ SWP 50.0ms

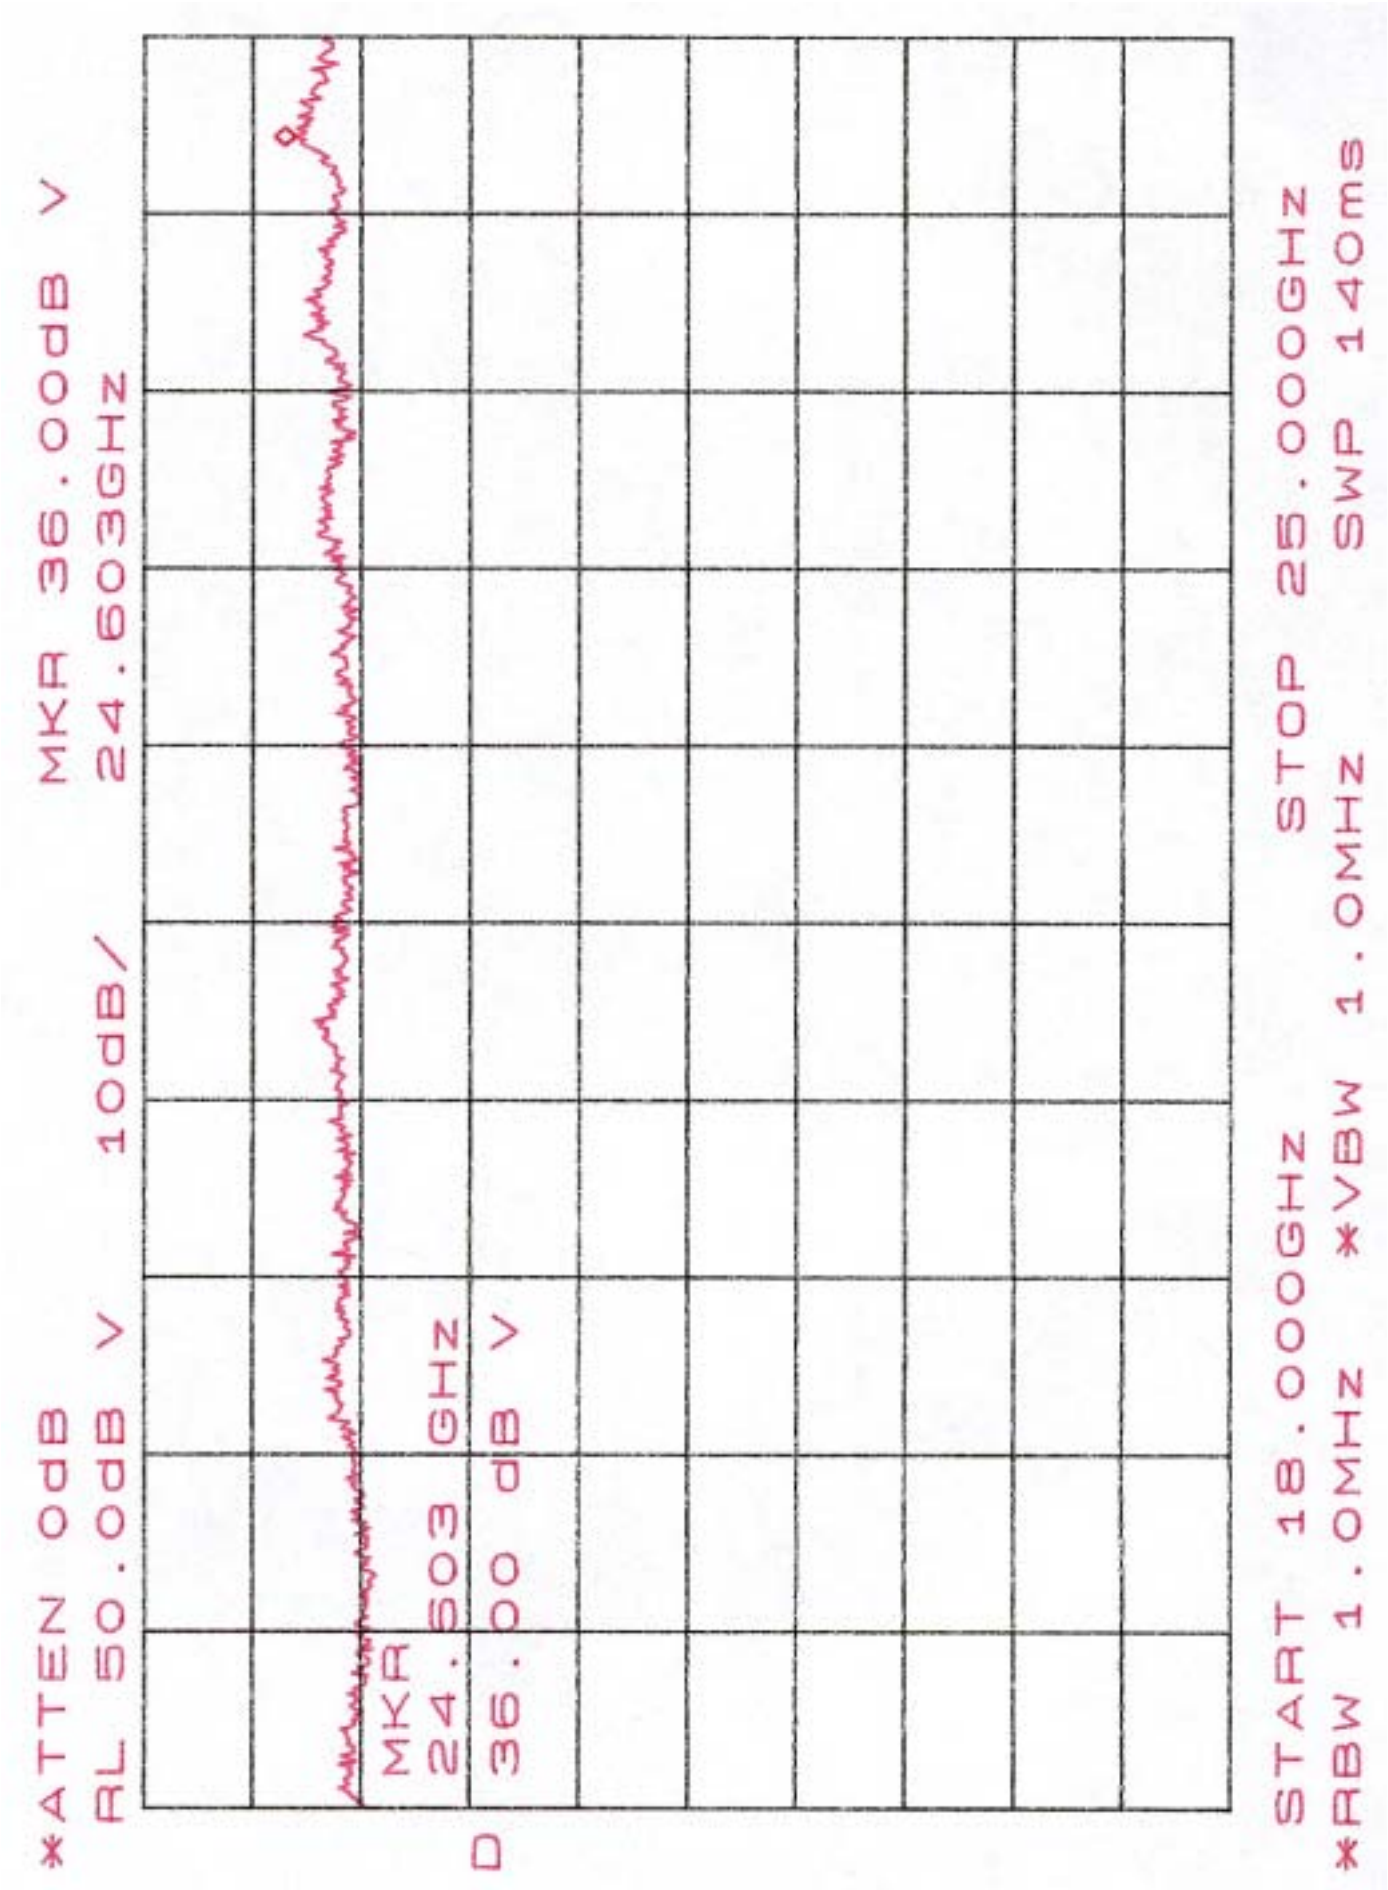


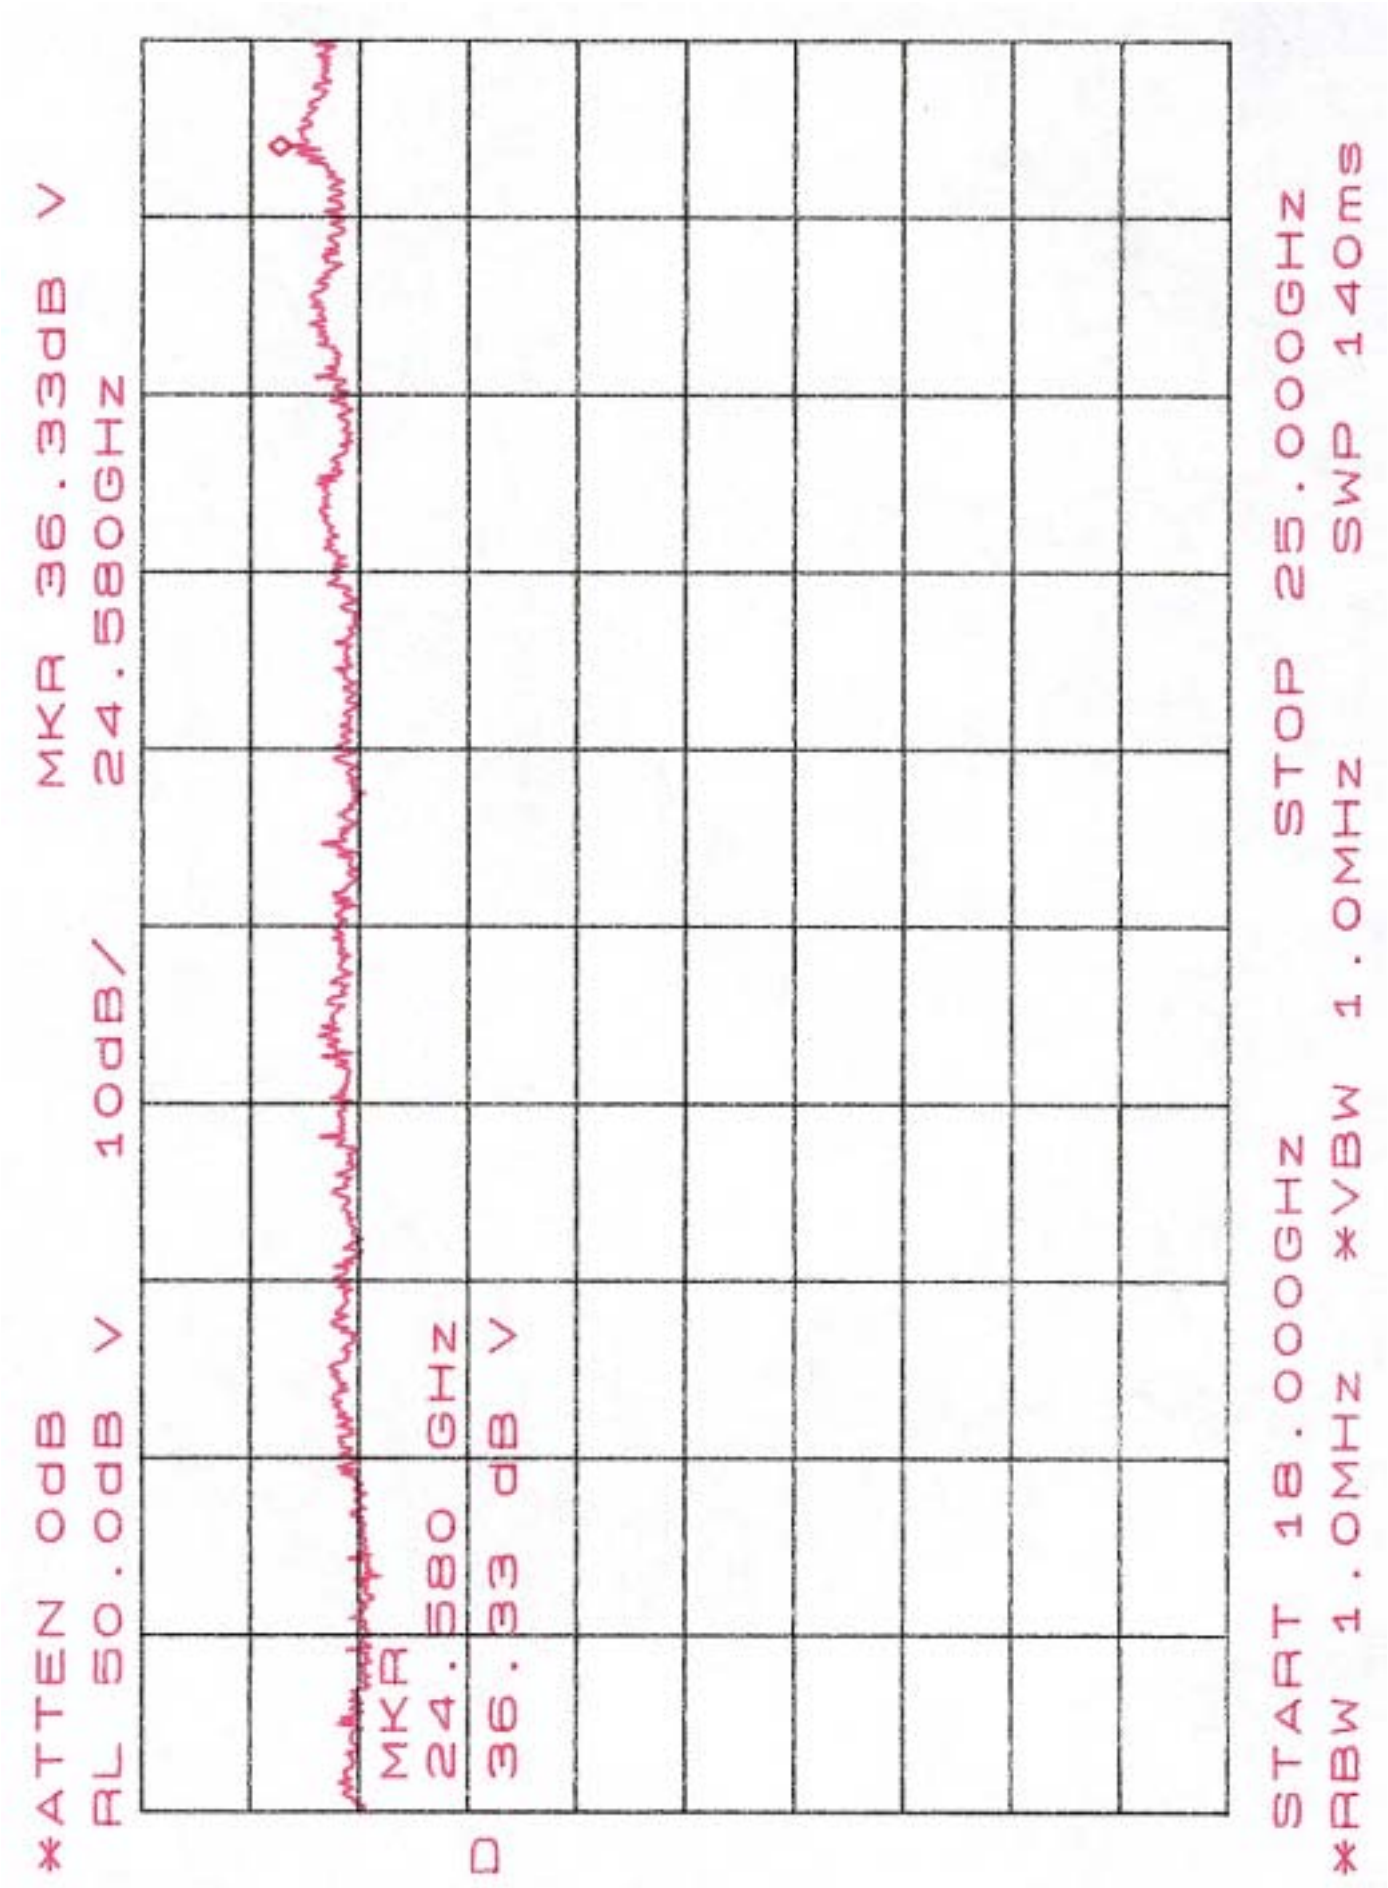

*ATTEN 0dB MKR 48.00dB V
RL 60.0dB V 10dB/ 9.83GHz

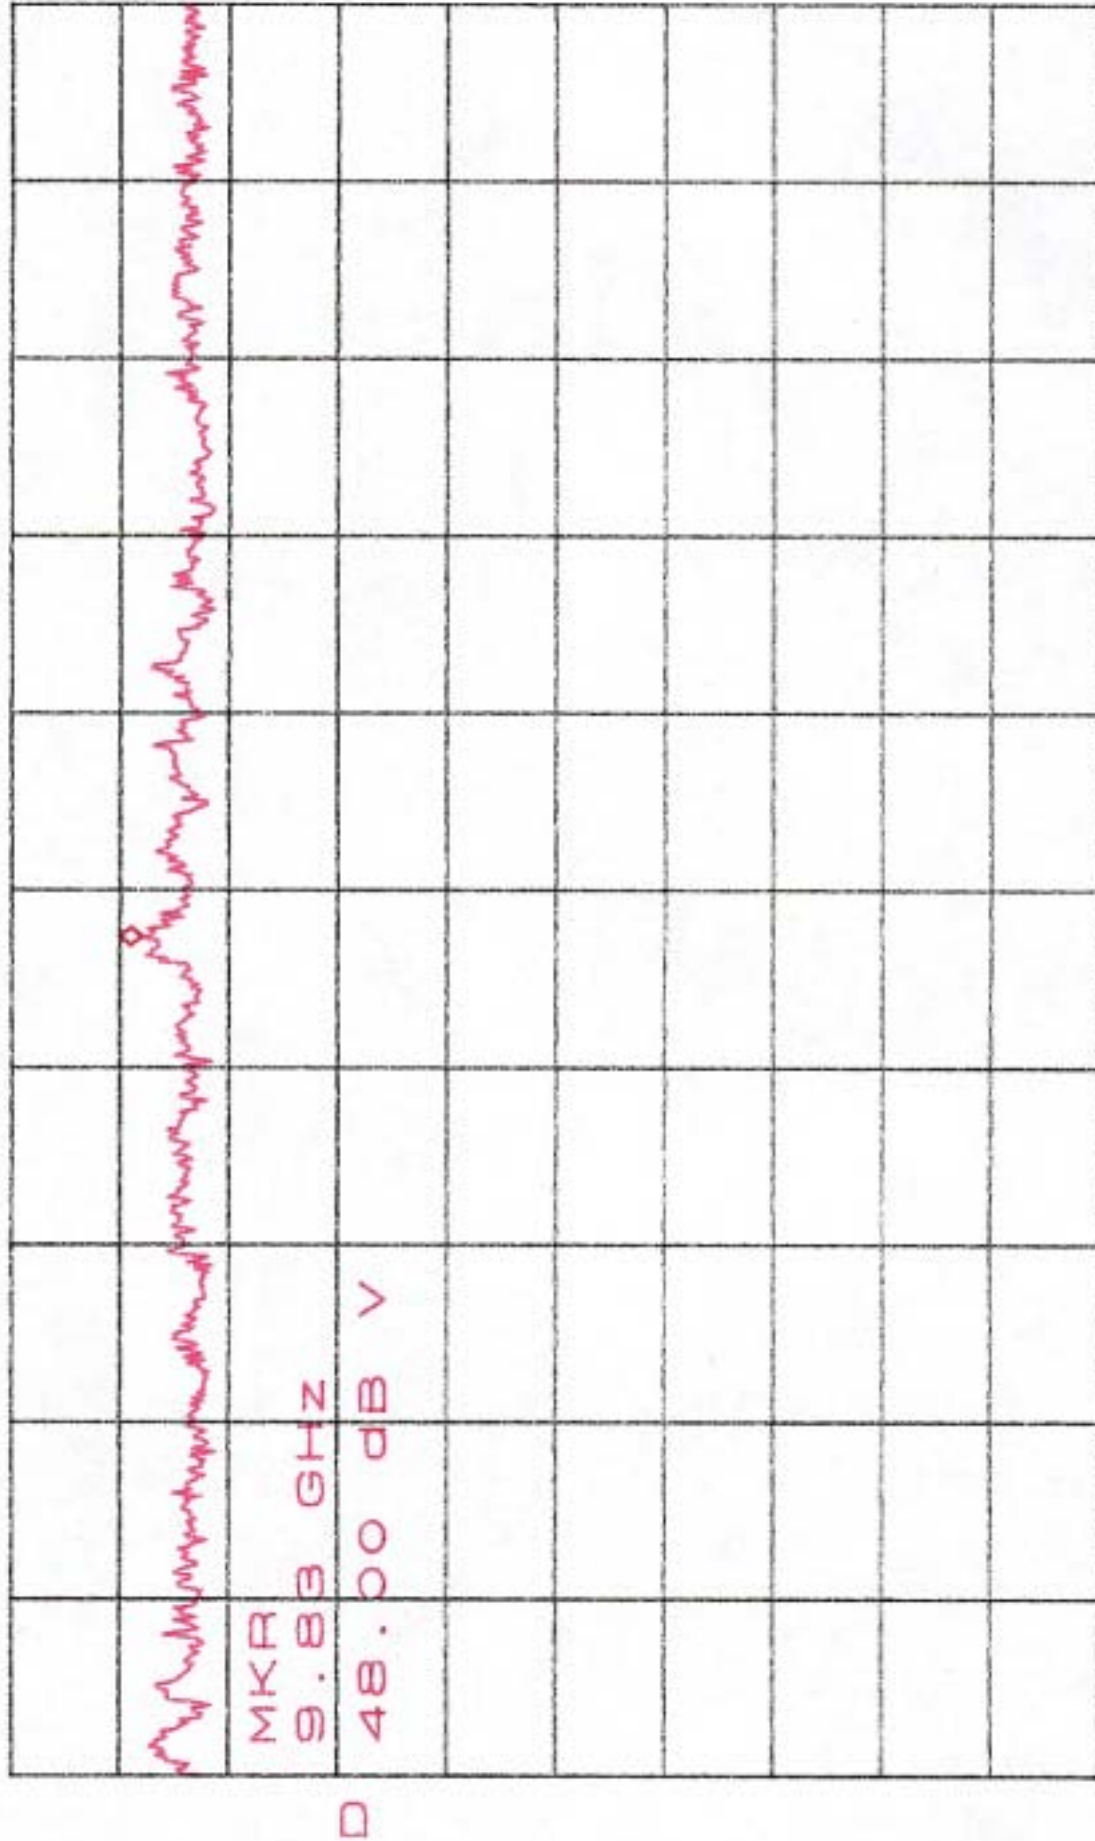

START 2.48GHz STOP 18.00GHz
*RBW 1.0MHz *VBW 1.0MHz SWP 320ms

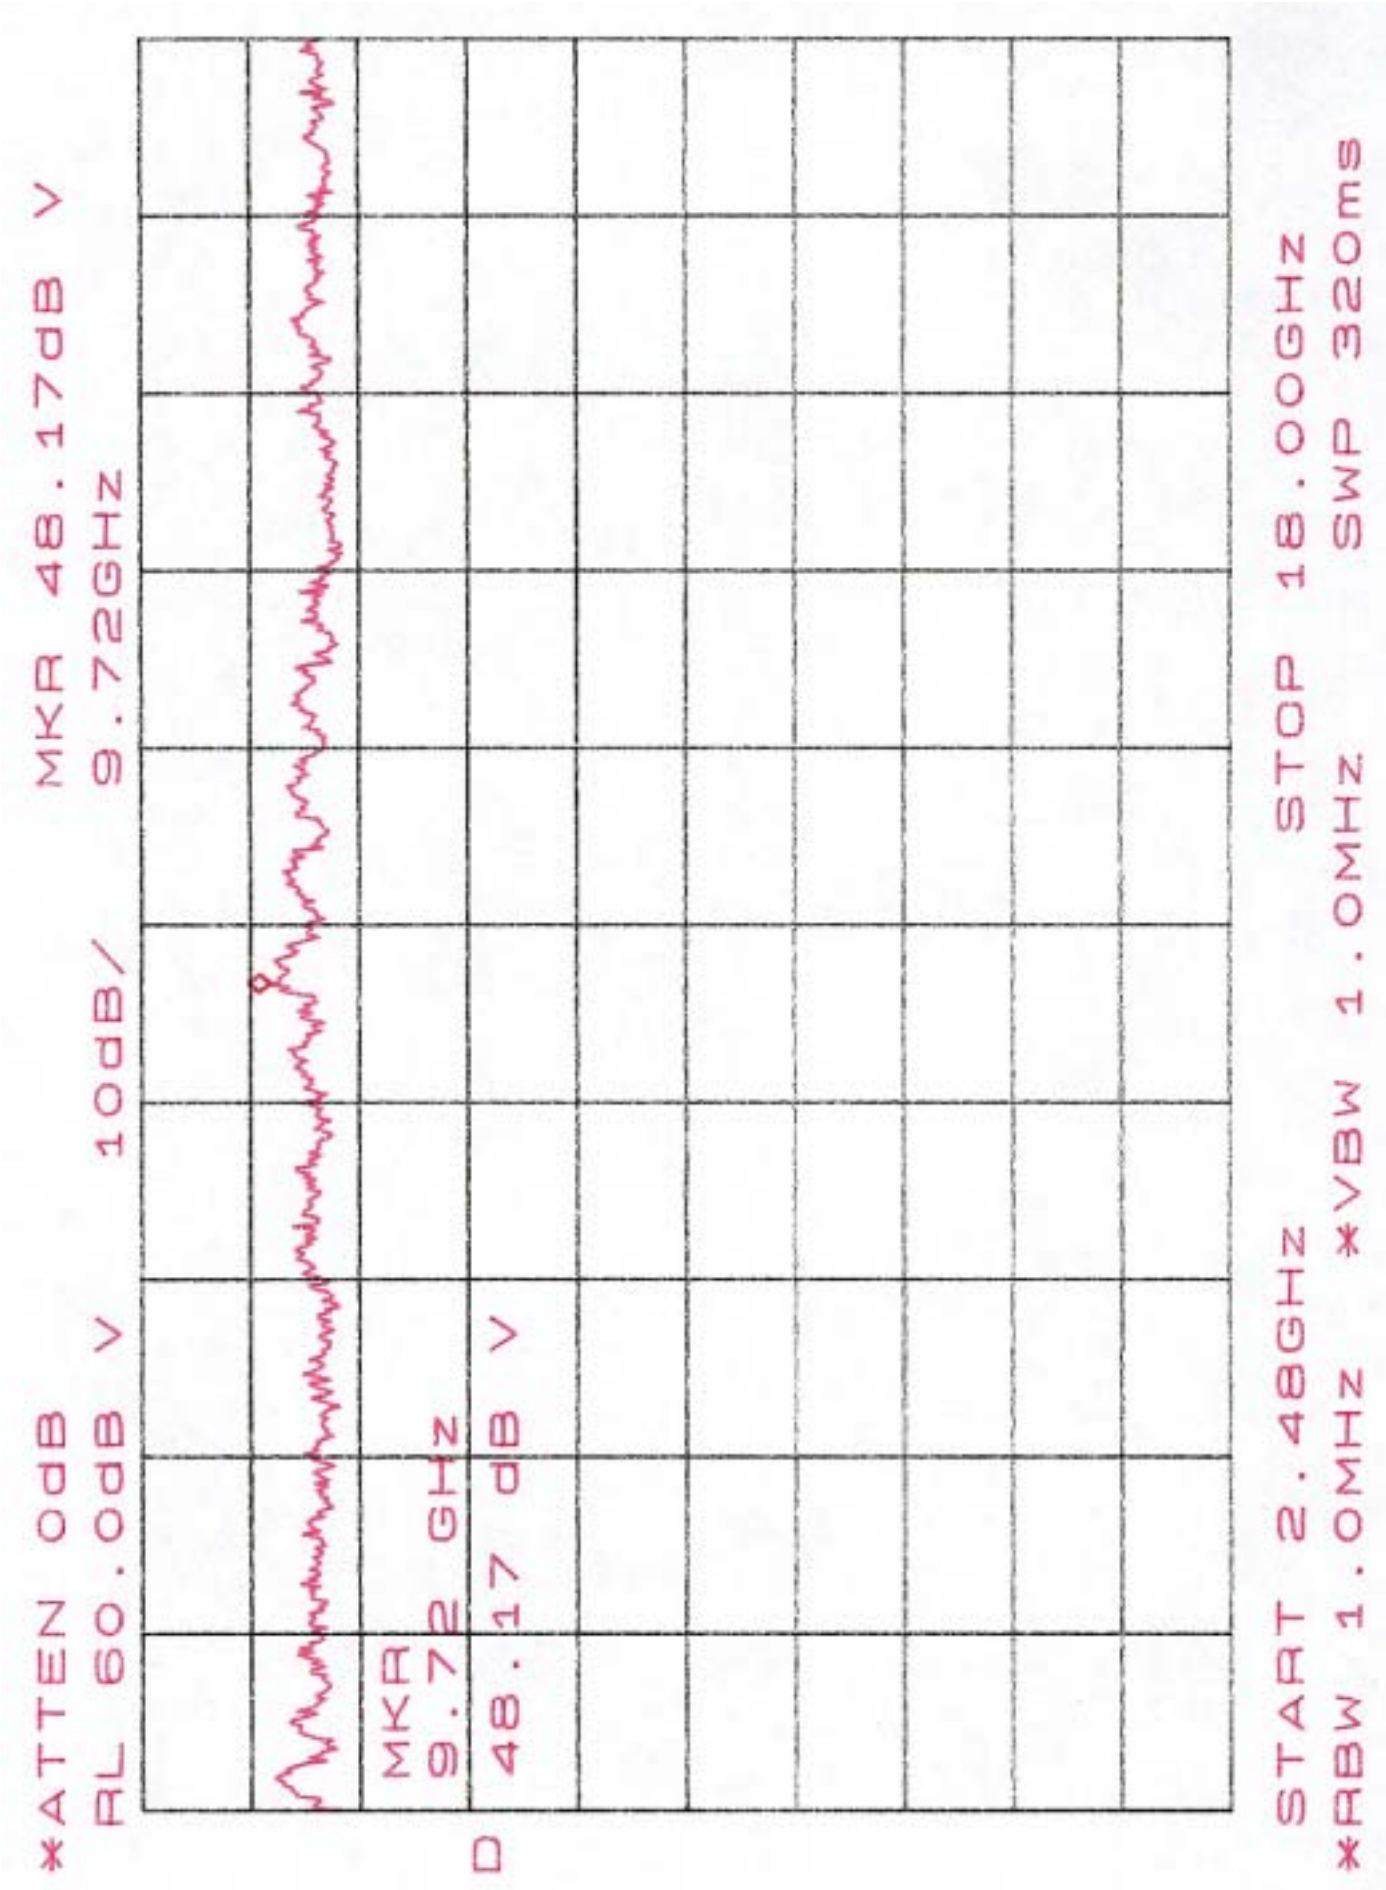

Appendix 2: Ploted Datas of Power Line Conducted Emissions


Conduction Emission Test

Peak Value

Operator: JERRY
Test Spec: FCC
Comment: L1
File name: 55022.RES
Date: 31. Oct 92 20:03

Overview Scan Settings (4 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	3.9k	9k	PK	0.05ms	10dBLN	OFF
1M	3M	3.9k	9k	PK	0.05ms	10dBLN	OFF
3M	10M	3.9k	9k	PK	1ms	10dBLN	OFF
10M	30M	3.9k	9k	PK	1ms	10dBLN	OFF

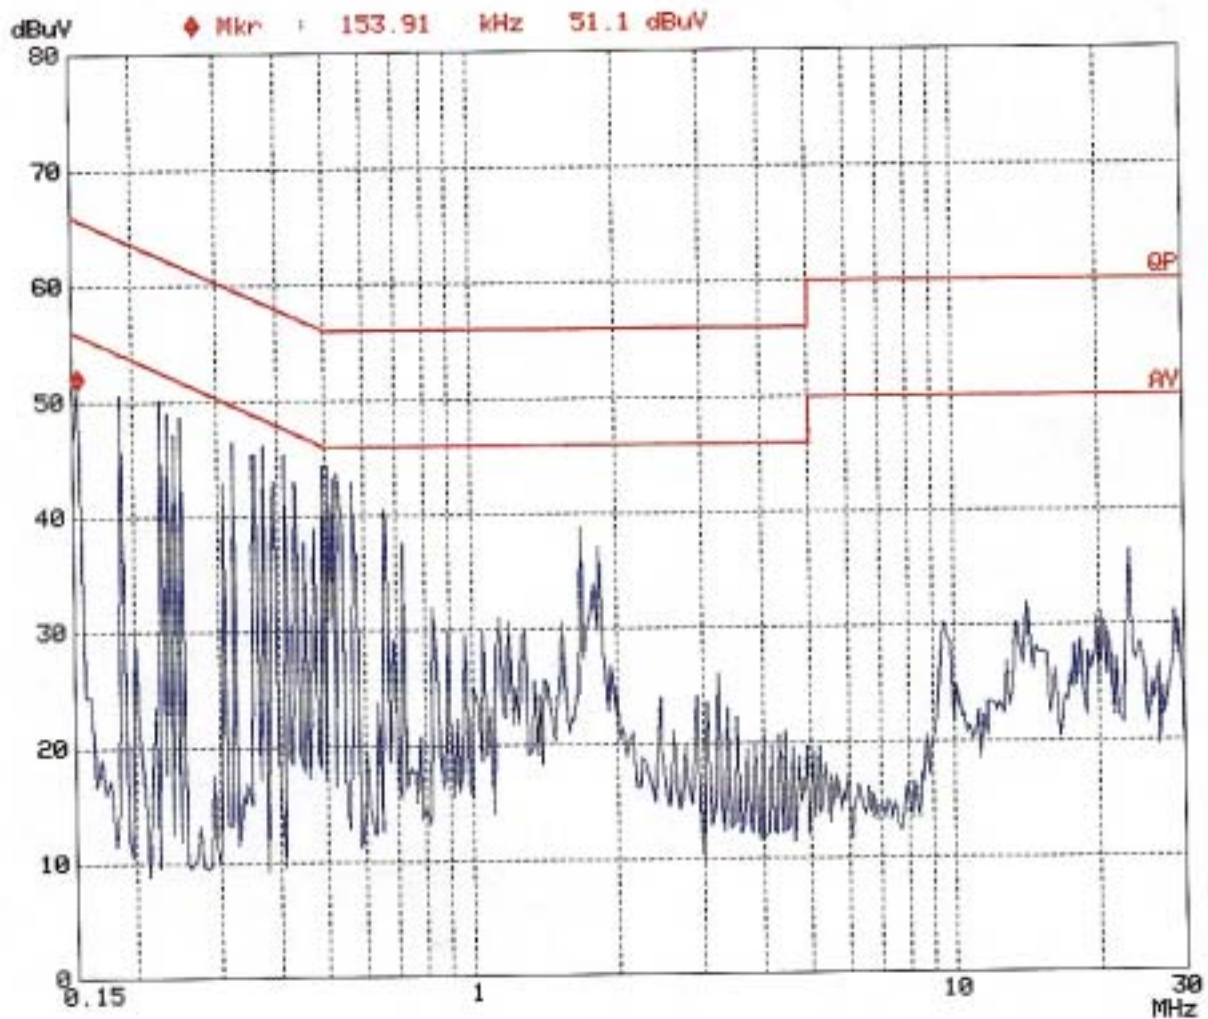

Conduction Emission Test

Peak Value

Operator: JERRY

Test Spec: FCC


Comment: L2

File name: 55022.RES


Date: 31. Oct 92 20:09


Overview Scan Settings (4 Ranges)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	3.9k	9k	PK	0.05ms	10dBLN	OFF	
1M	3M	3.9k	9k	PK	0.05ms	10dBLN	OFF	
3M	10M	3.9k	9k	PK	1ms	10dBLN	OFF	
10M	30M	3.9k	9k	PK	1ms	10dBLN	OFF	

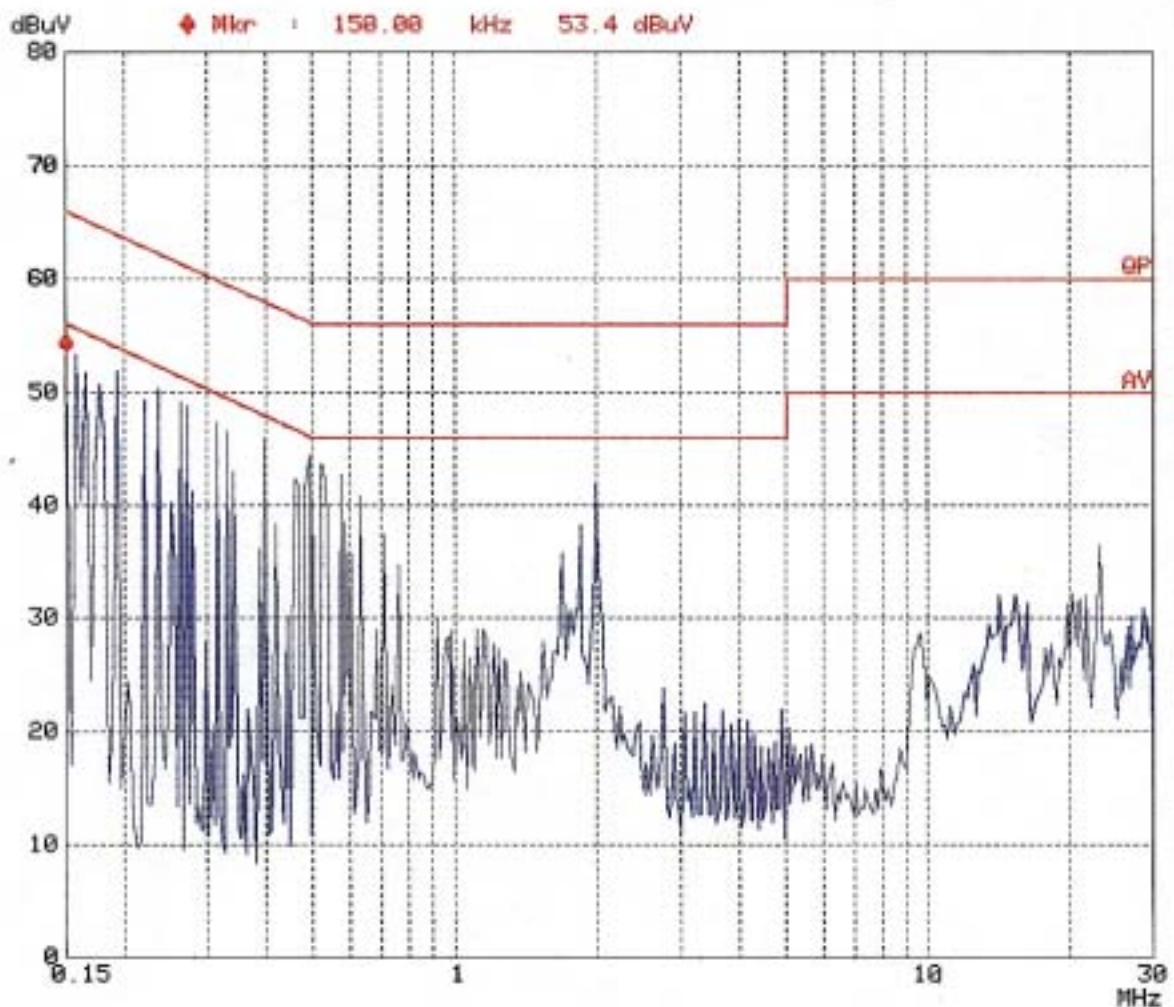



Appendix 3: Ploted Datas of Emissions Bandwidth

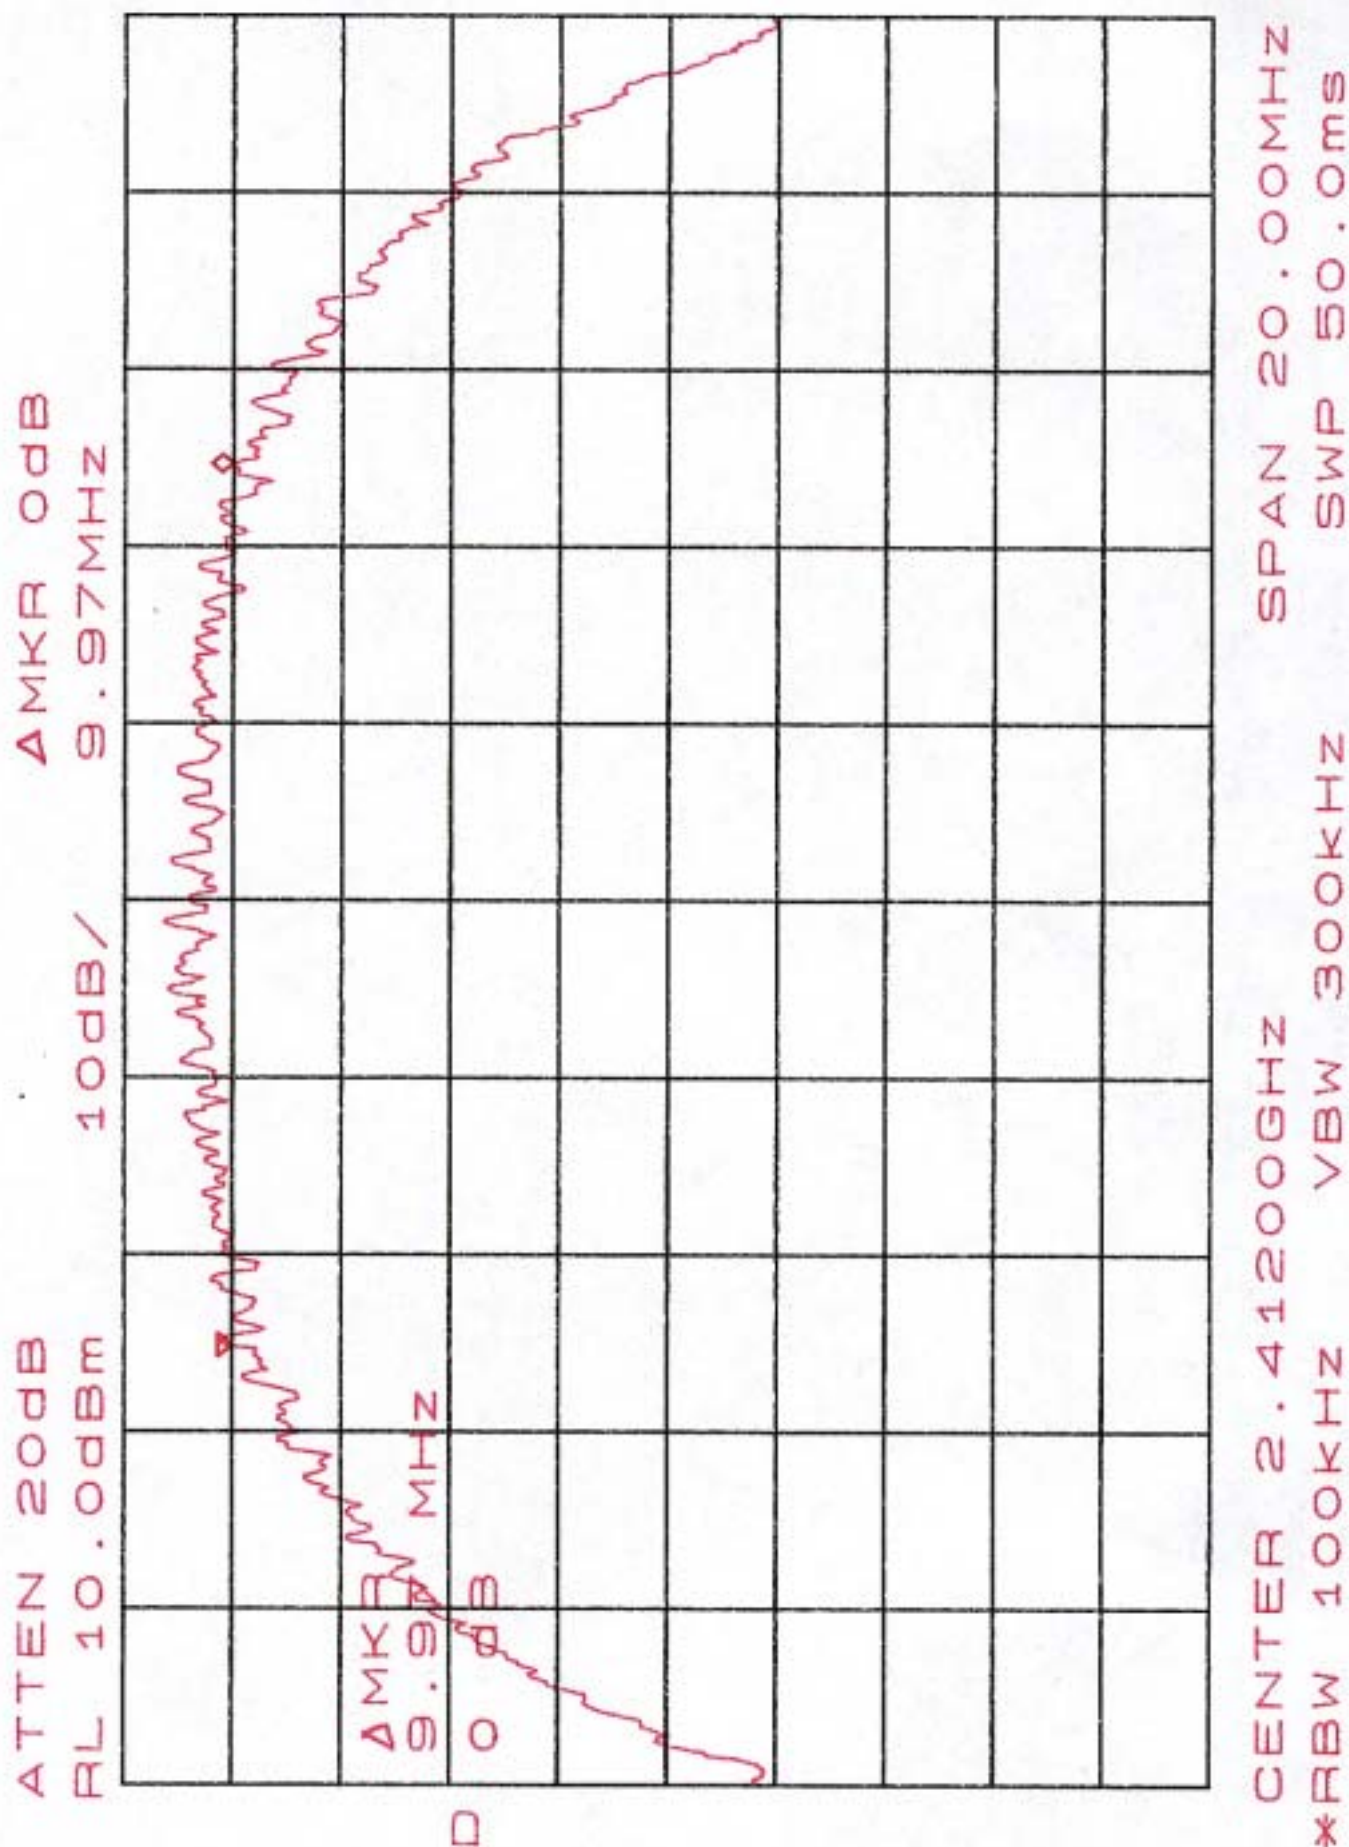


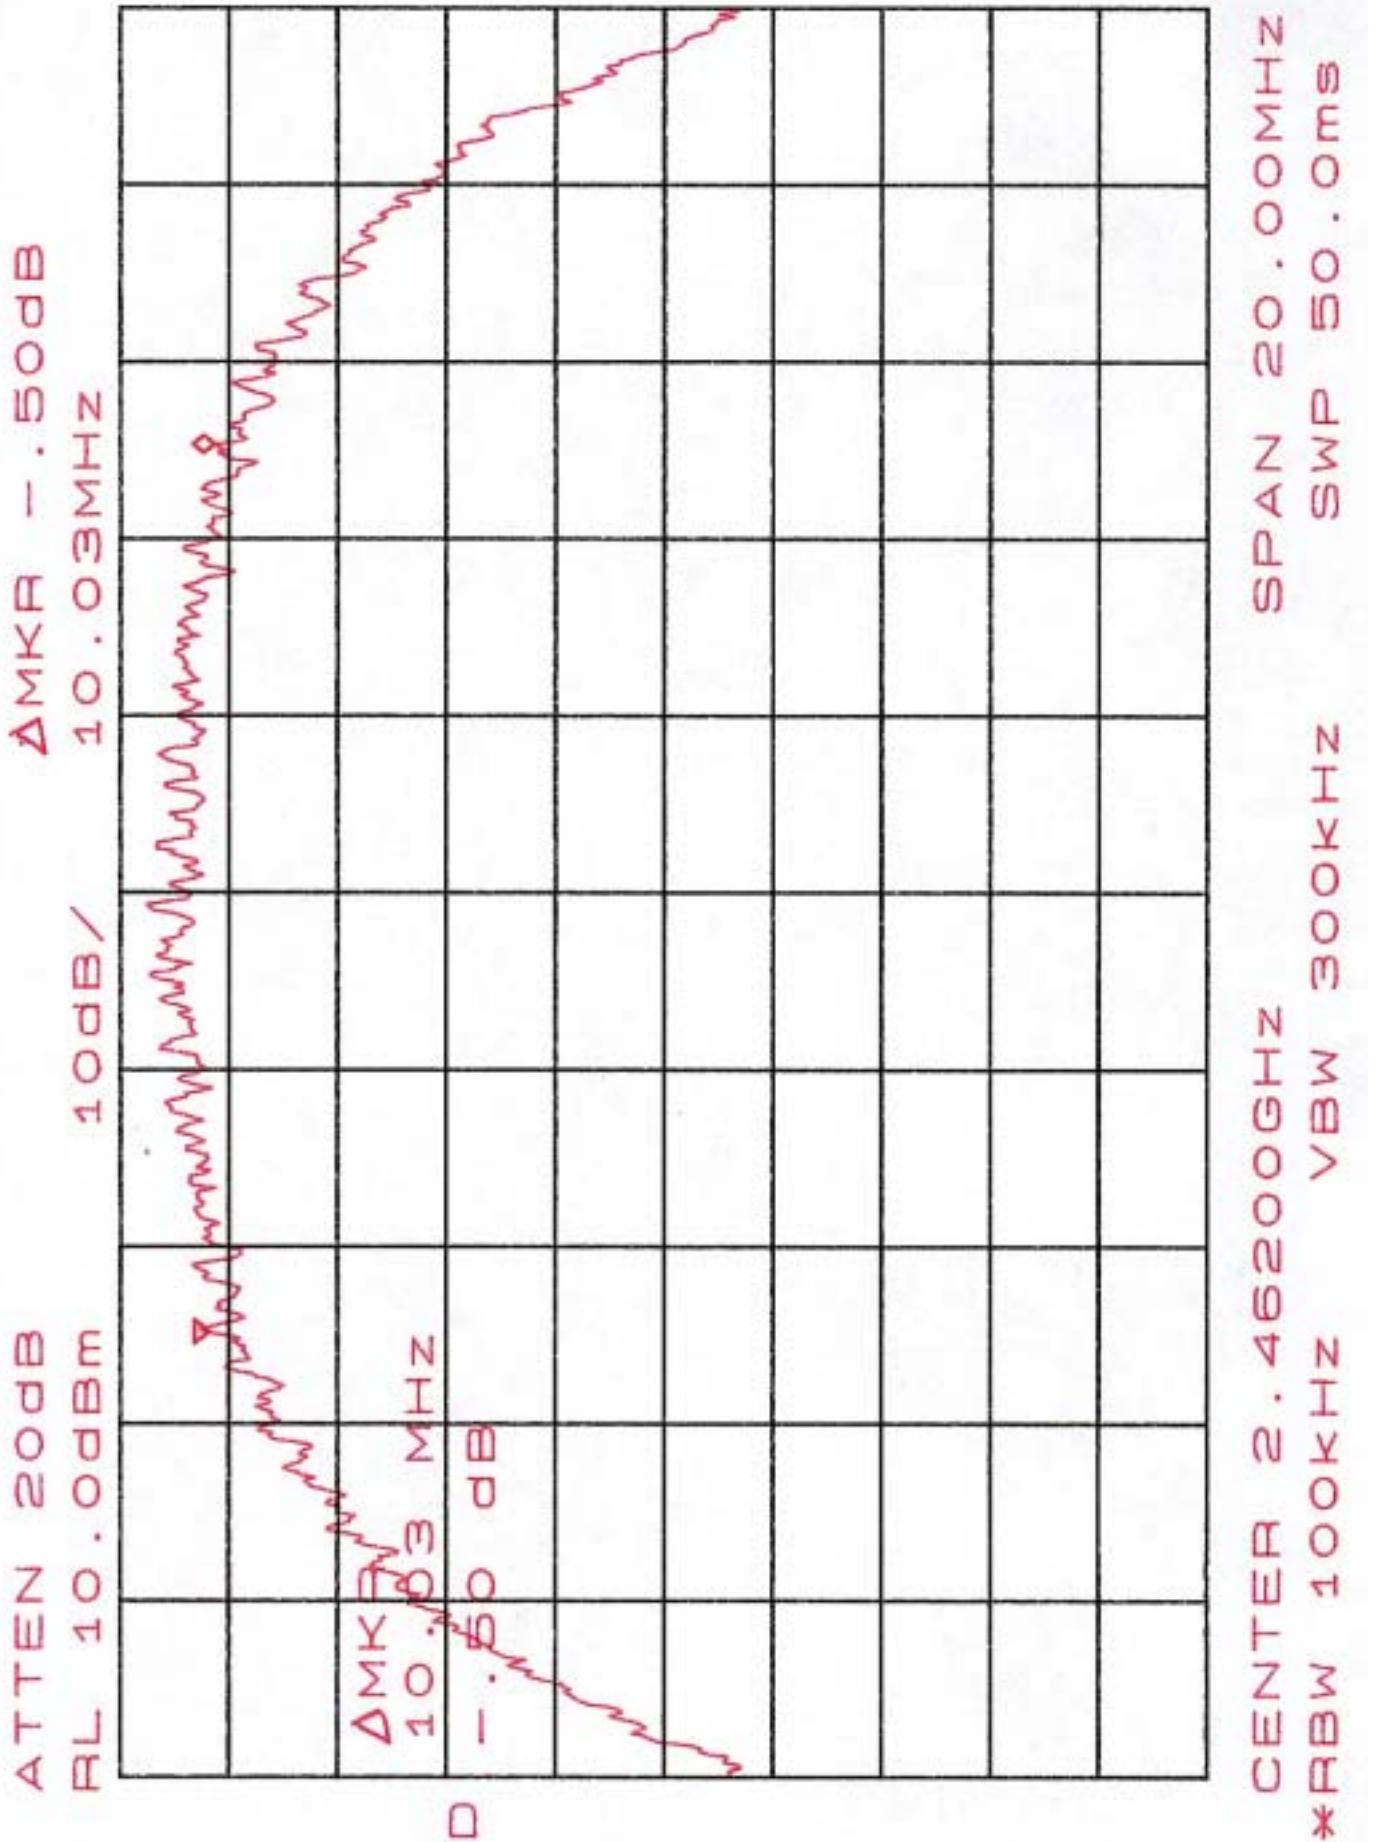

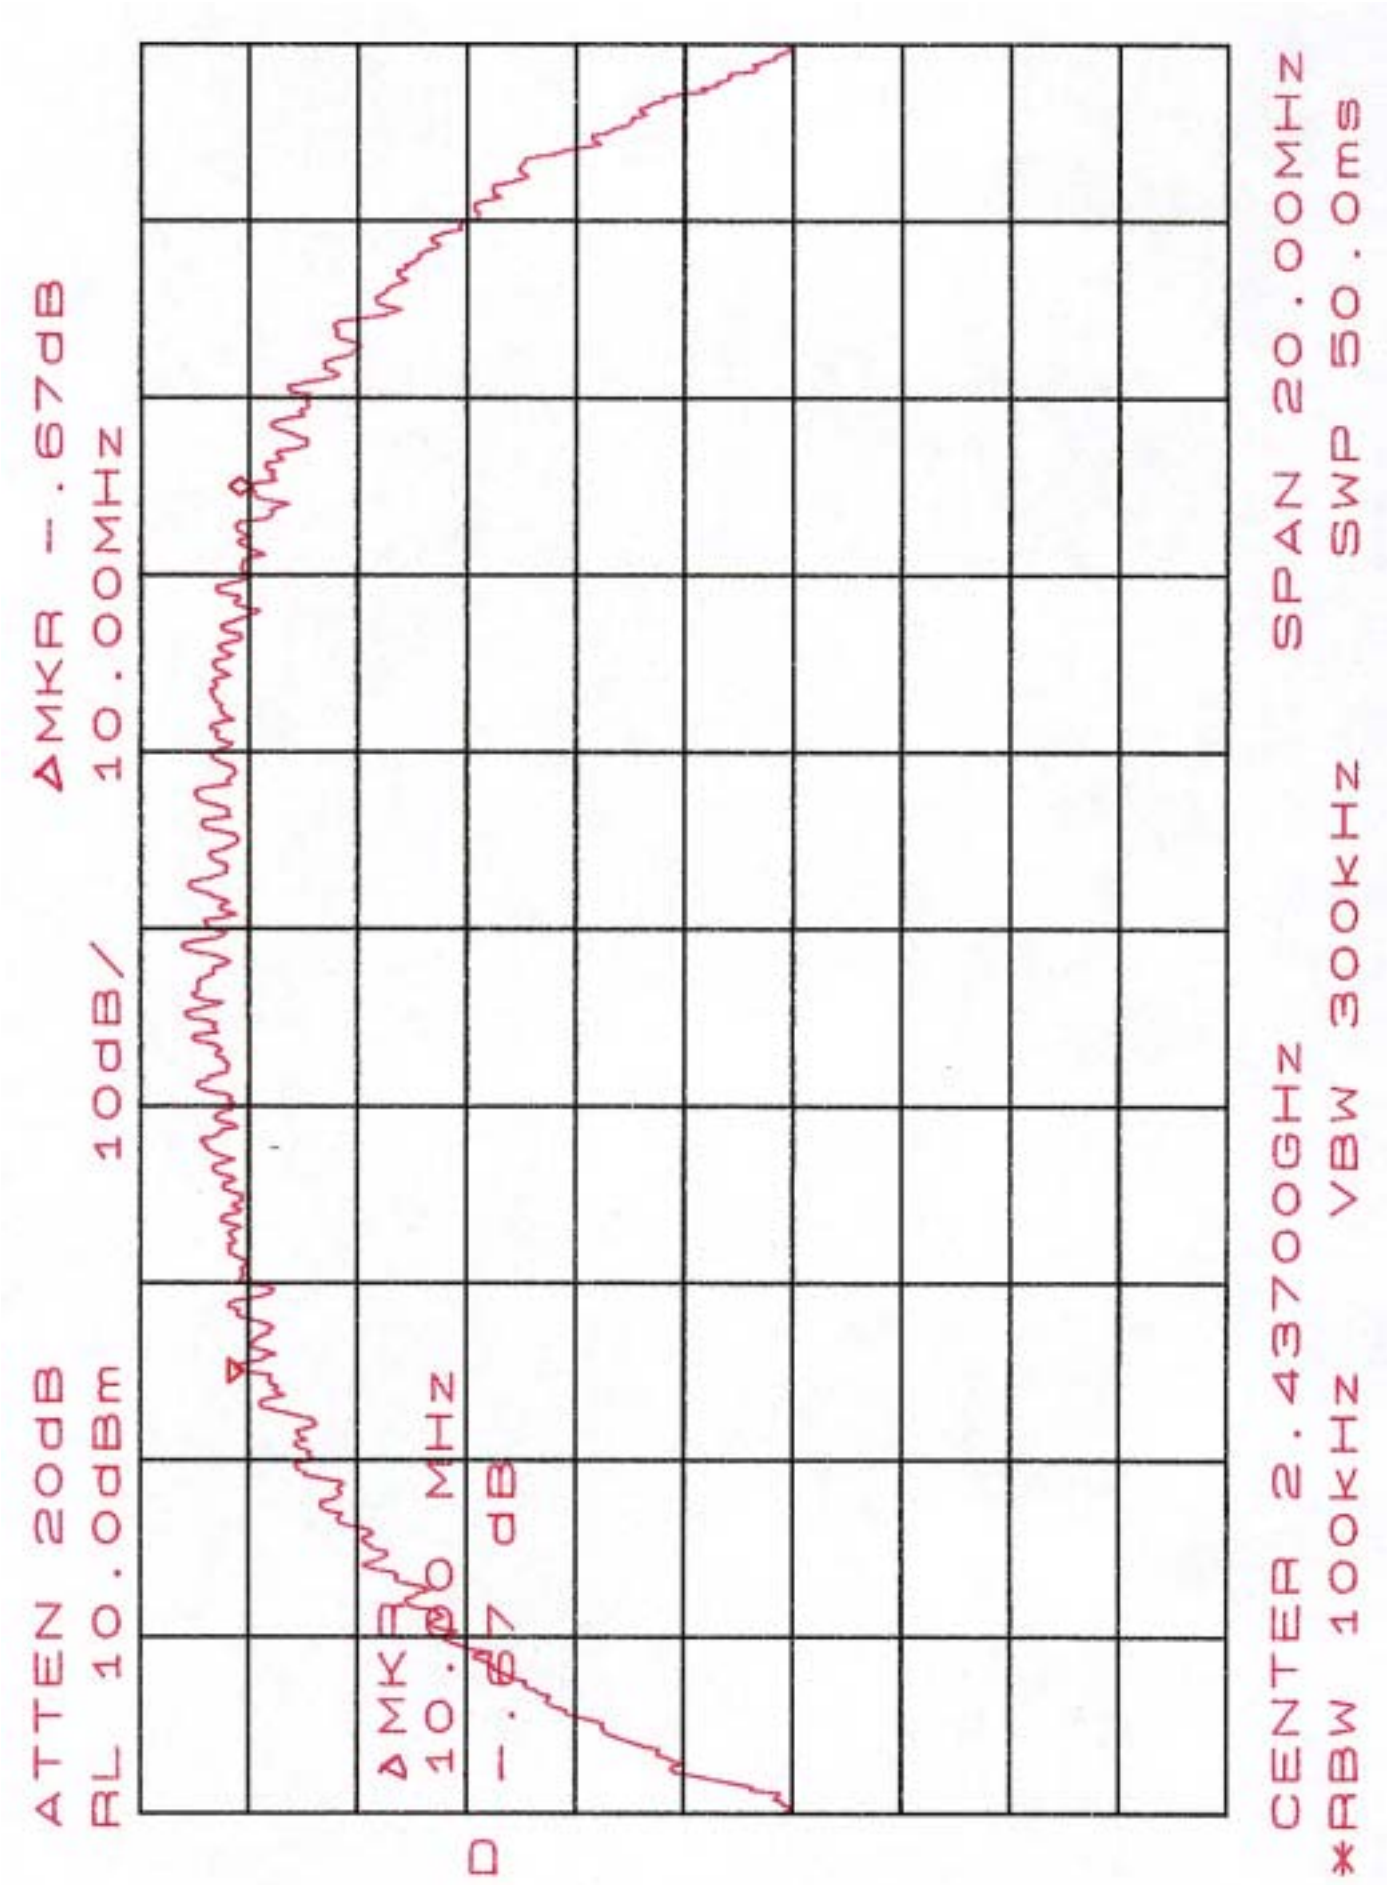


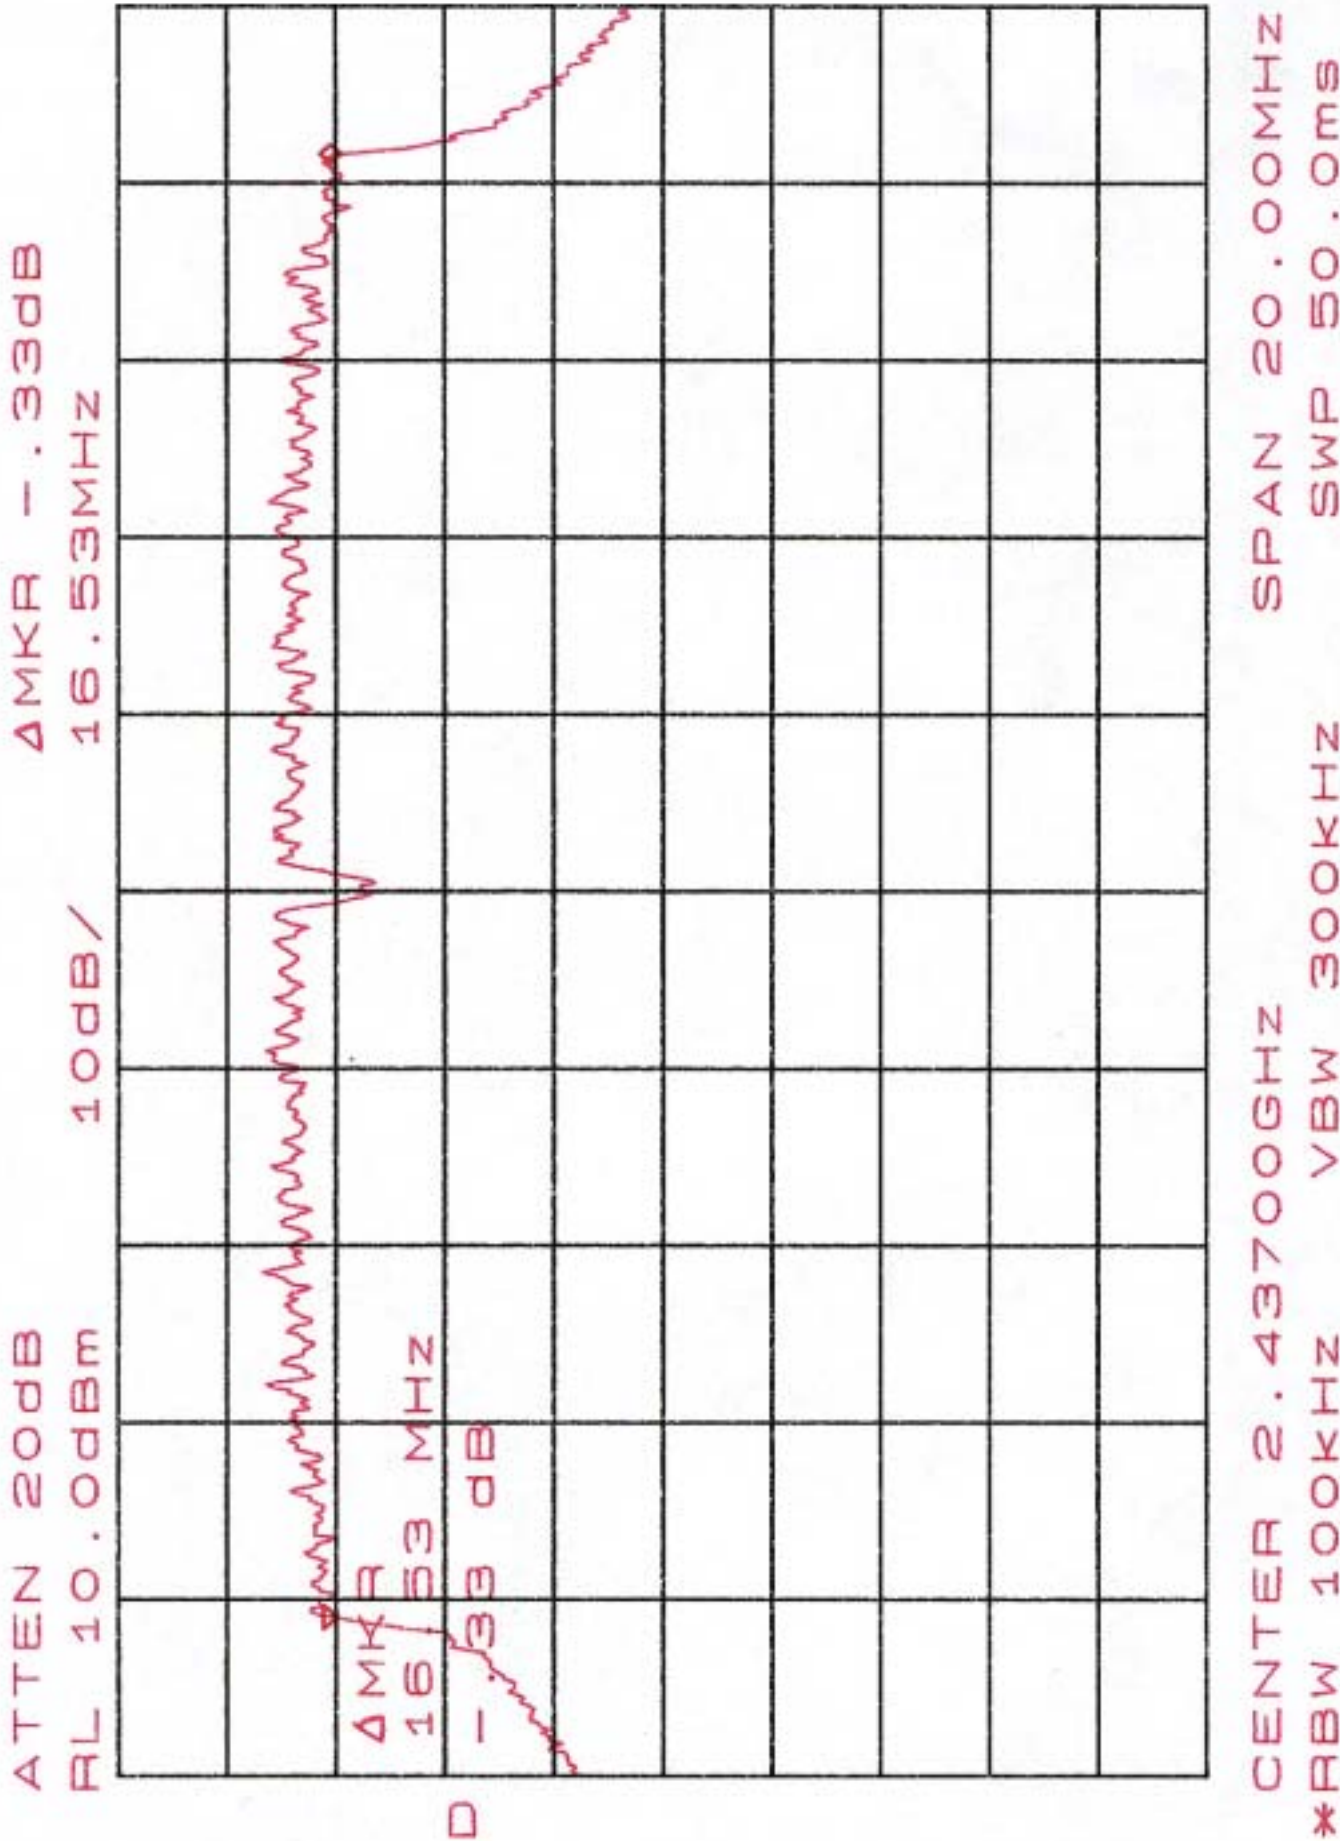

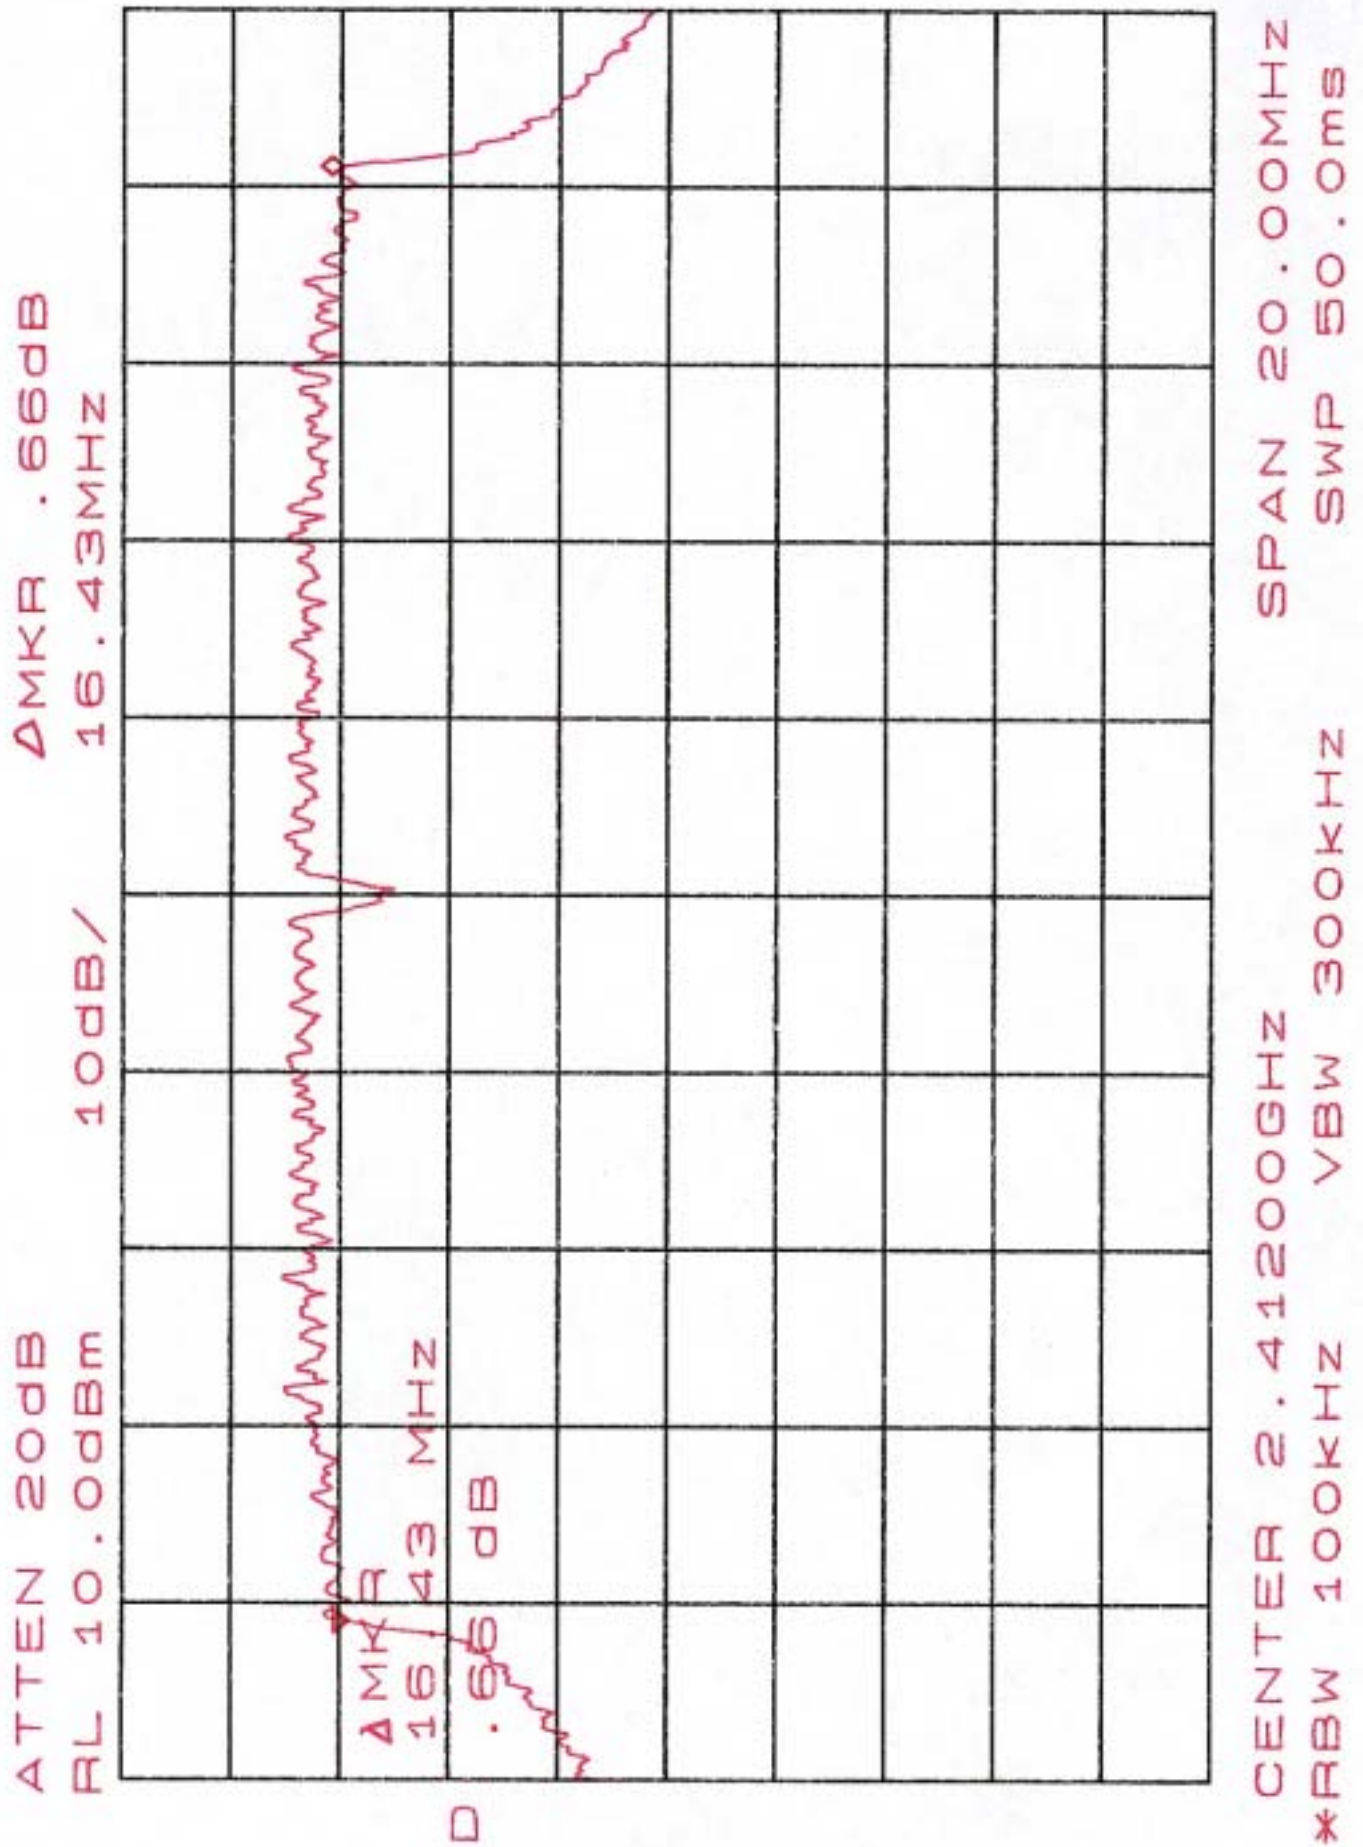


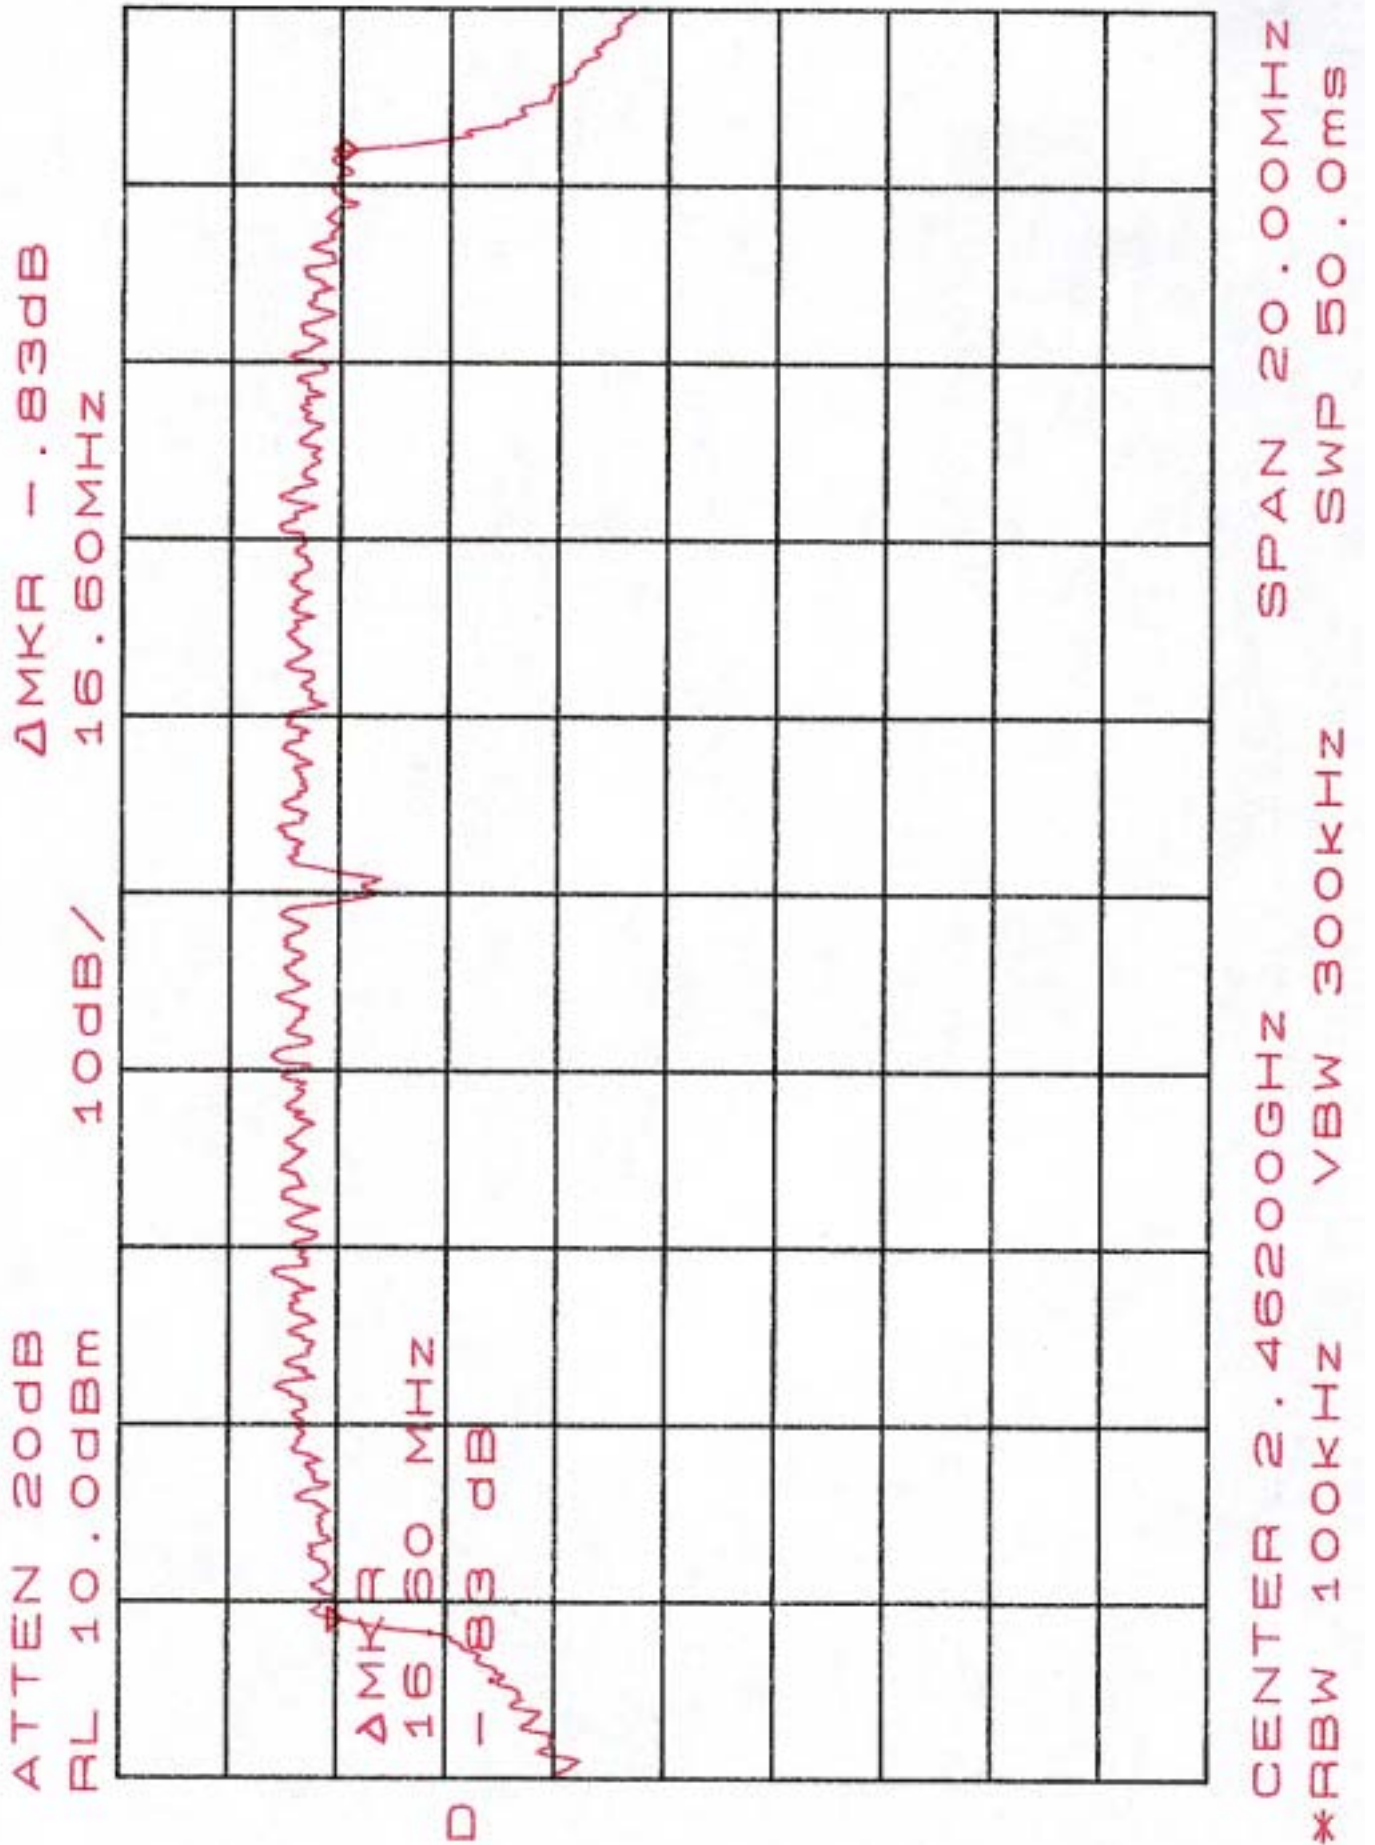


Appendix 4: Ploted Datas of Output Peak Power

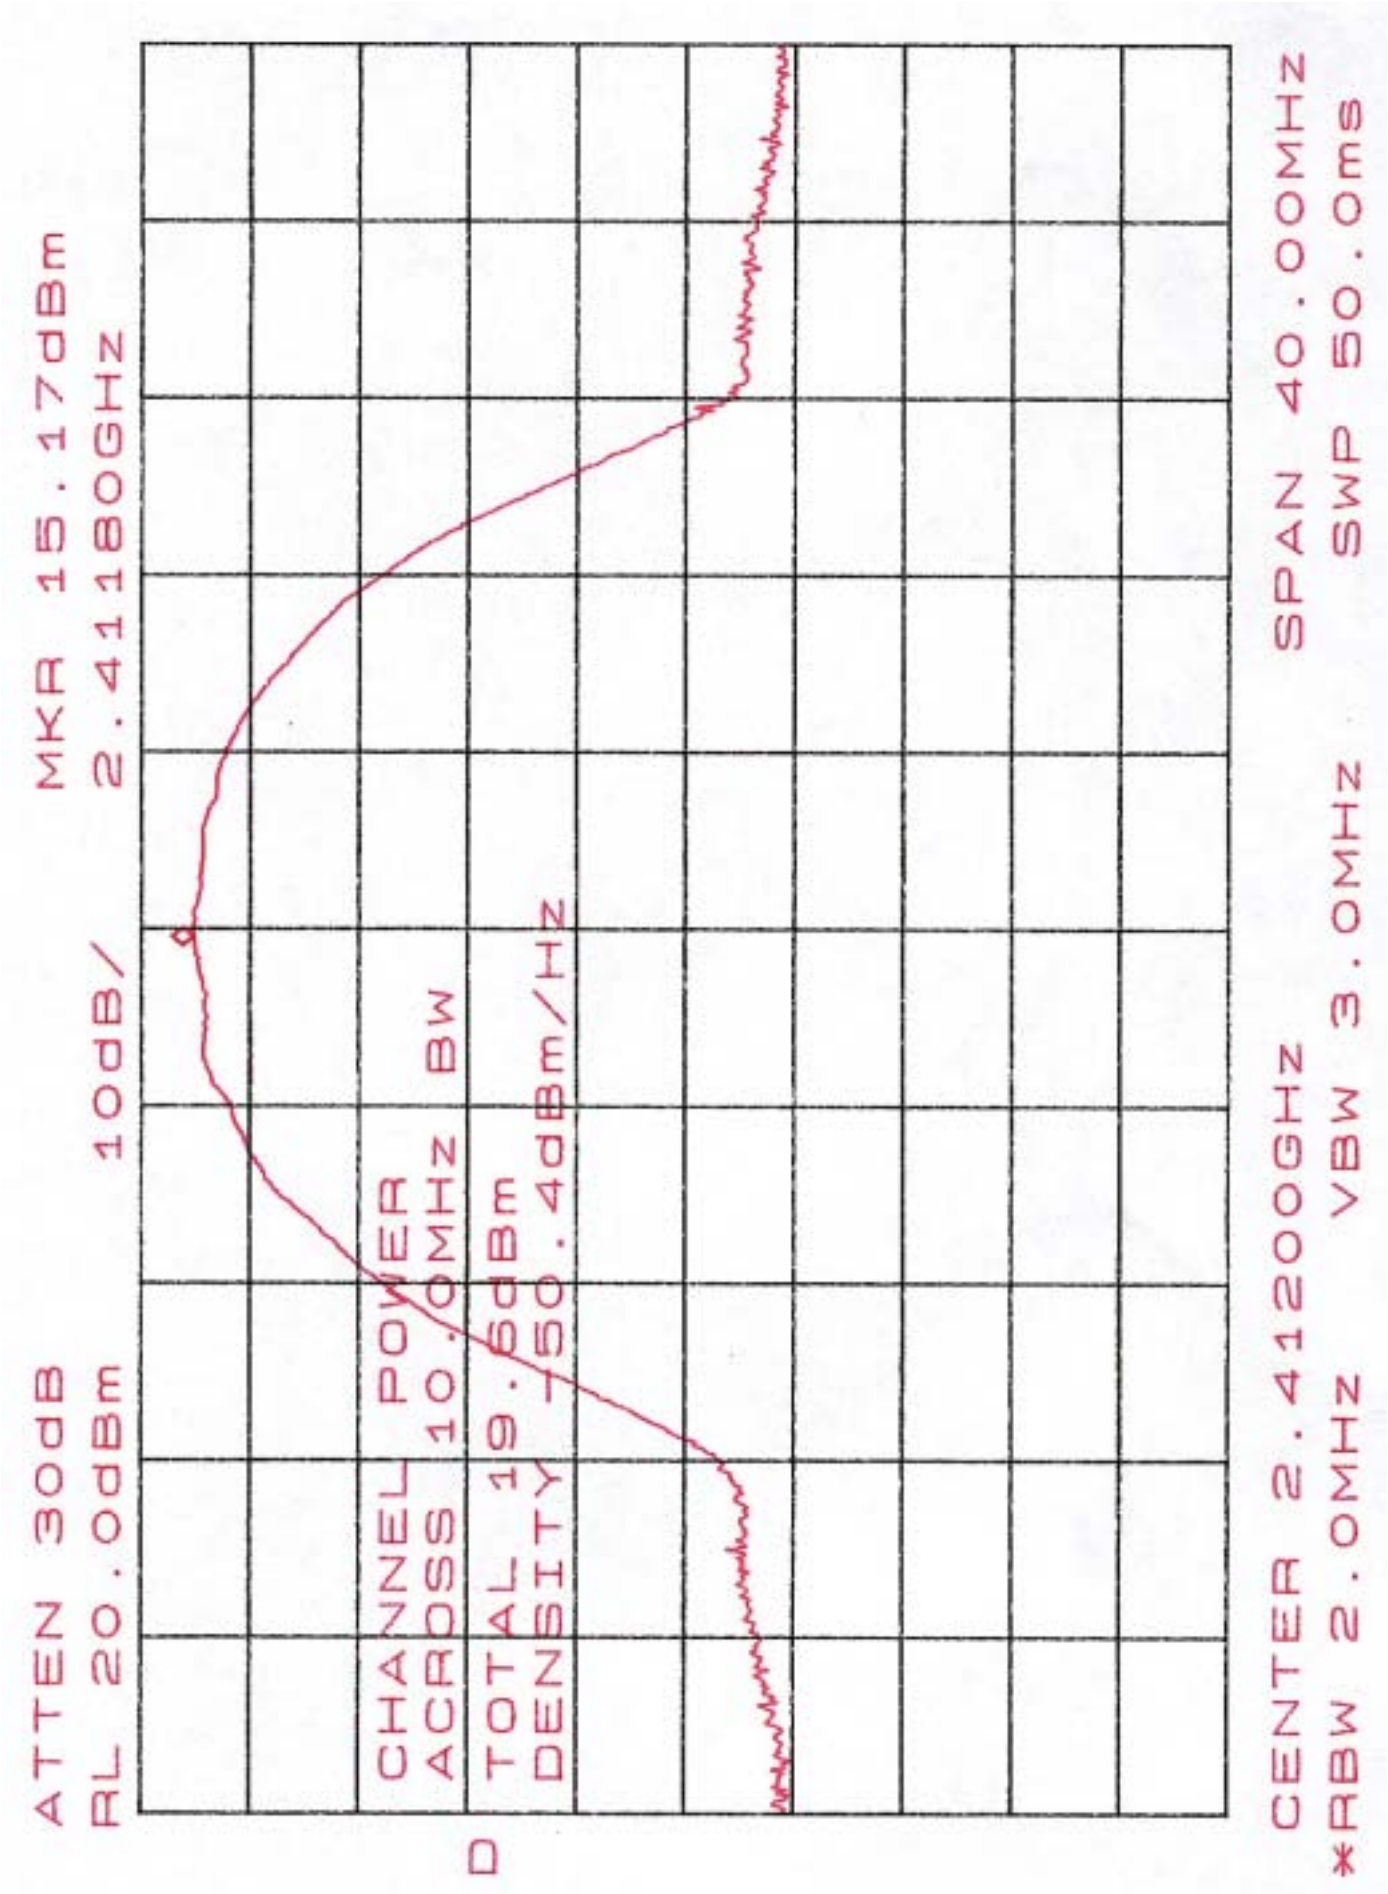

ATTEN 30dB MKR 15.83dBm
RL 20.0dBm 2.43720GHz

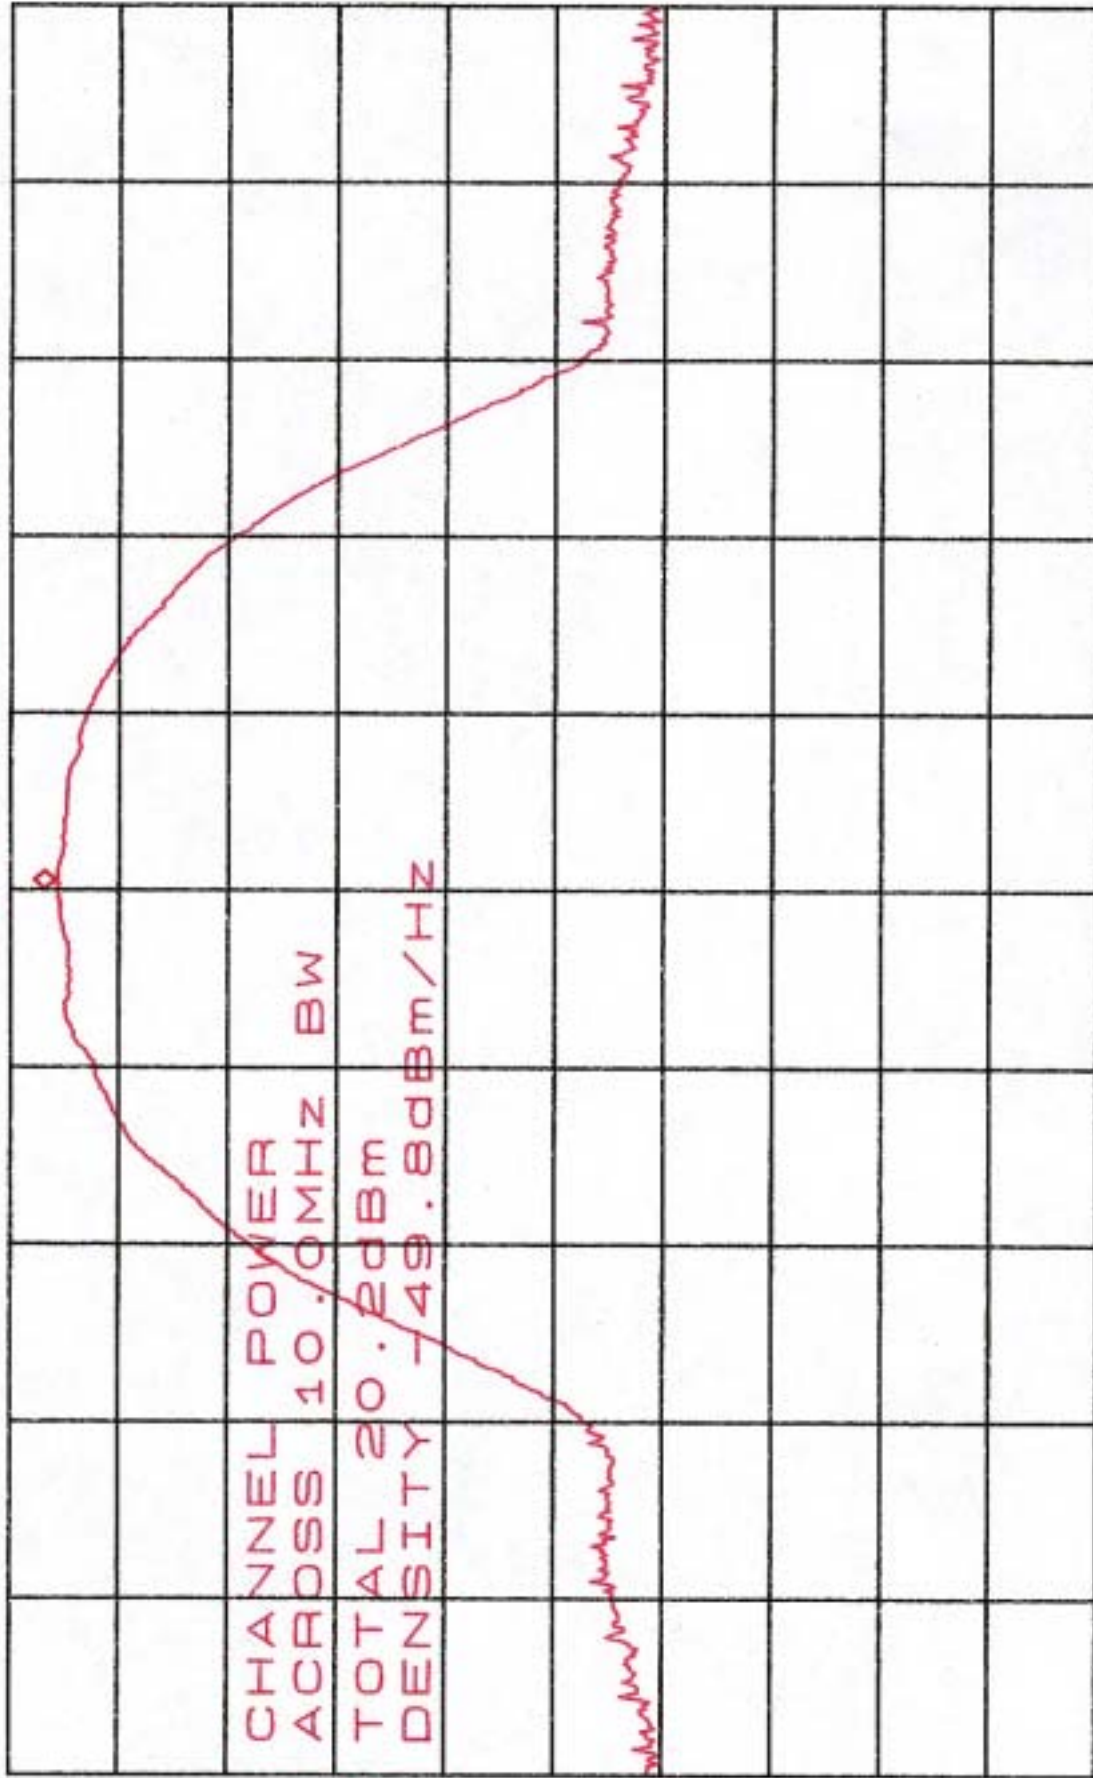

CENTER 2.43700GHz SPAN 40.00MHz
*RBW 2.0MHz VBW 3.0MHz SWP 50.0ms

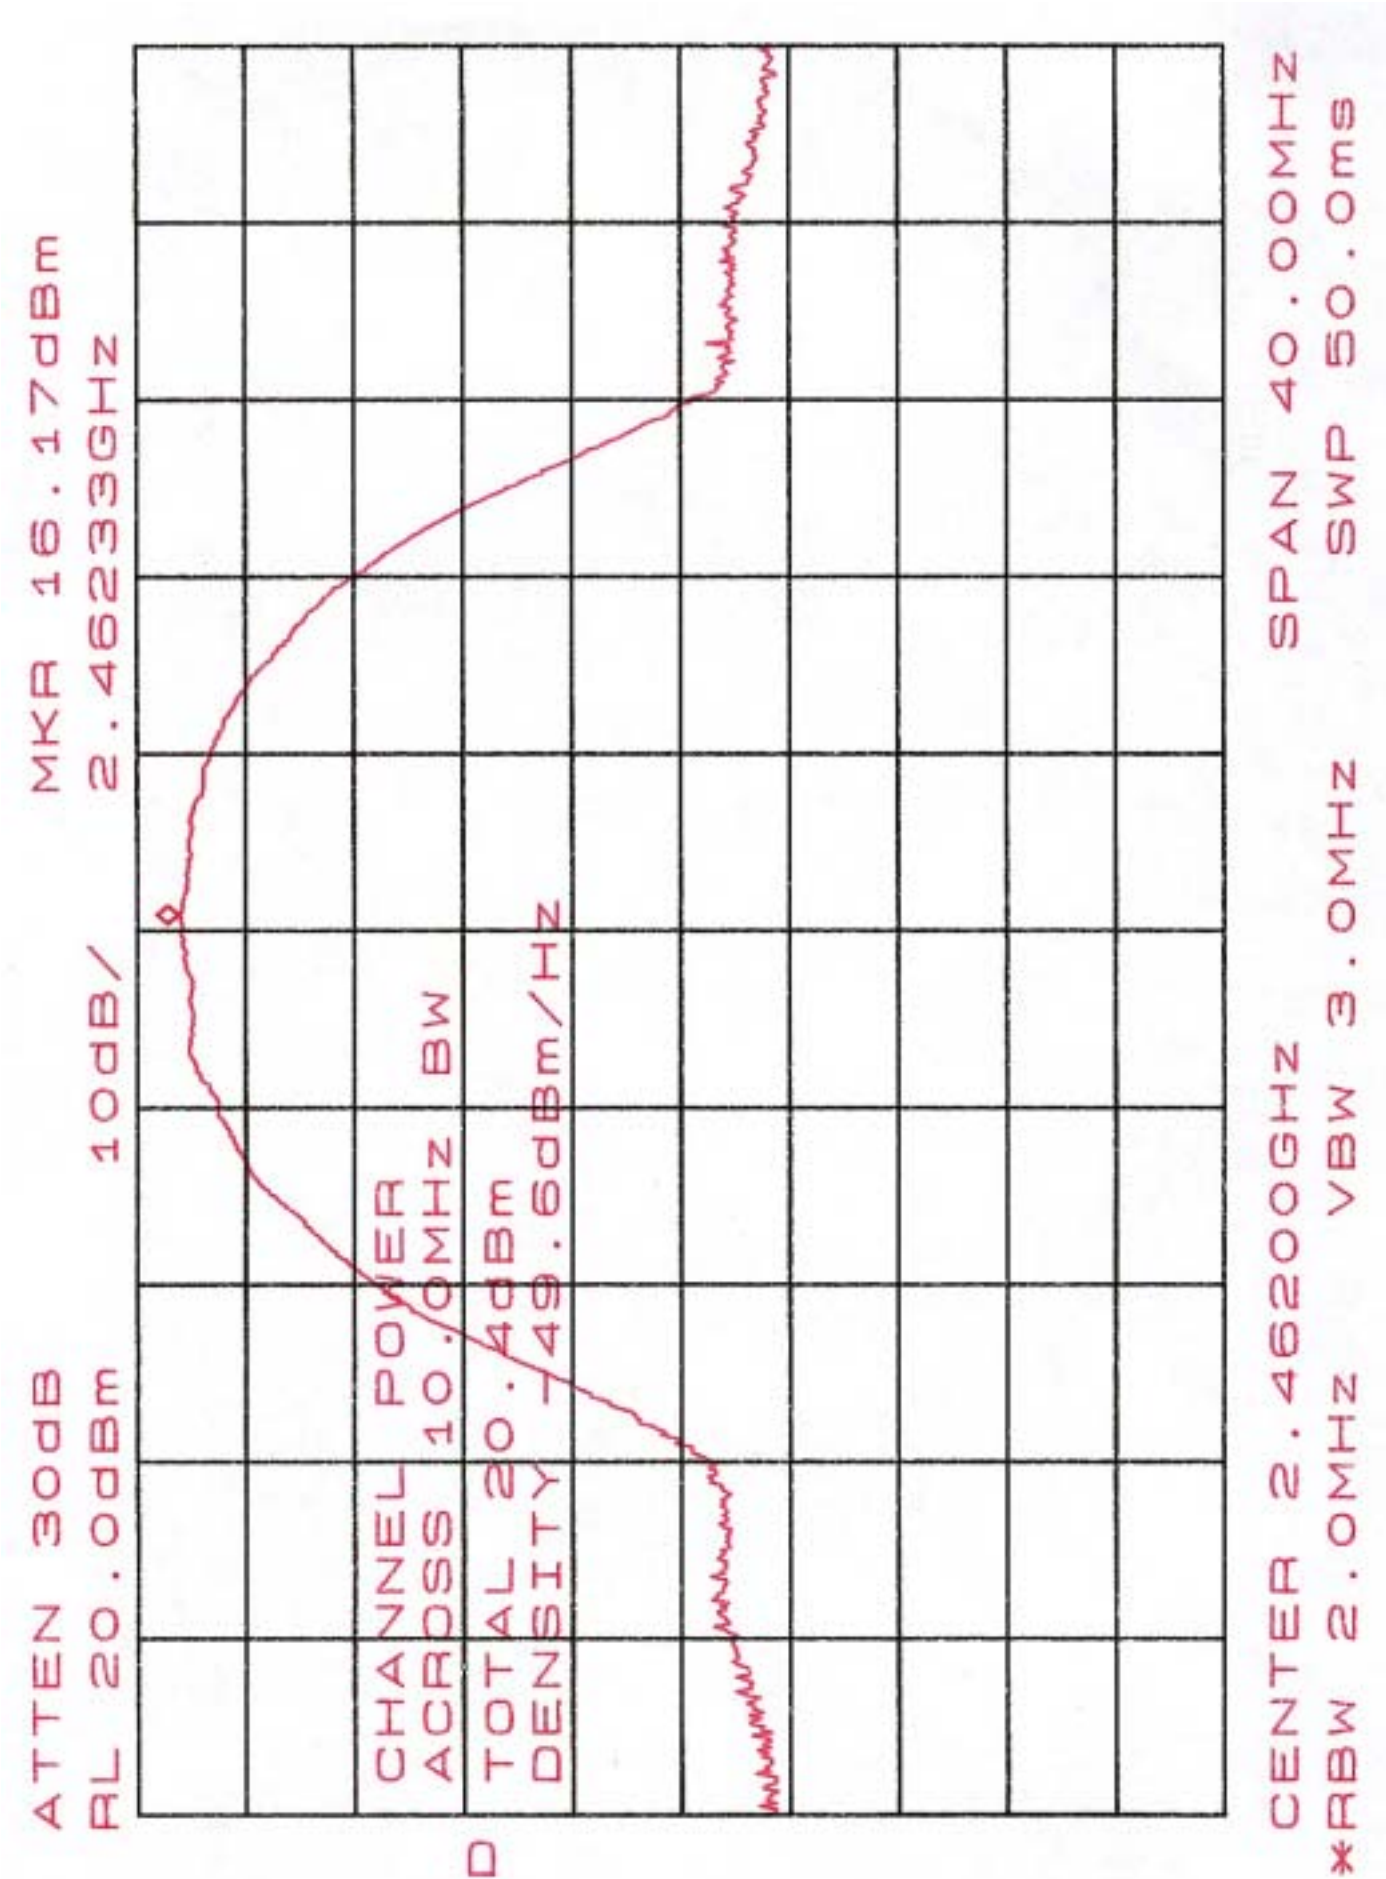

ATTEN 30dB
RL 20.0dBm
MKR 9.83dBm
2.43292GHz


10dB/

CHANNEL POWER
ACROSS 17.0MHz BW
TOTAL 16.8dBm
DENSITY -55.5dBm/Hz


D



CENTER 2.43700GHz
*RBW 2.0MHz
SPAN 50.00MHz
SWP 50.0ms
VBW 3.0MHz

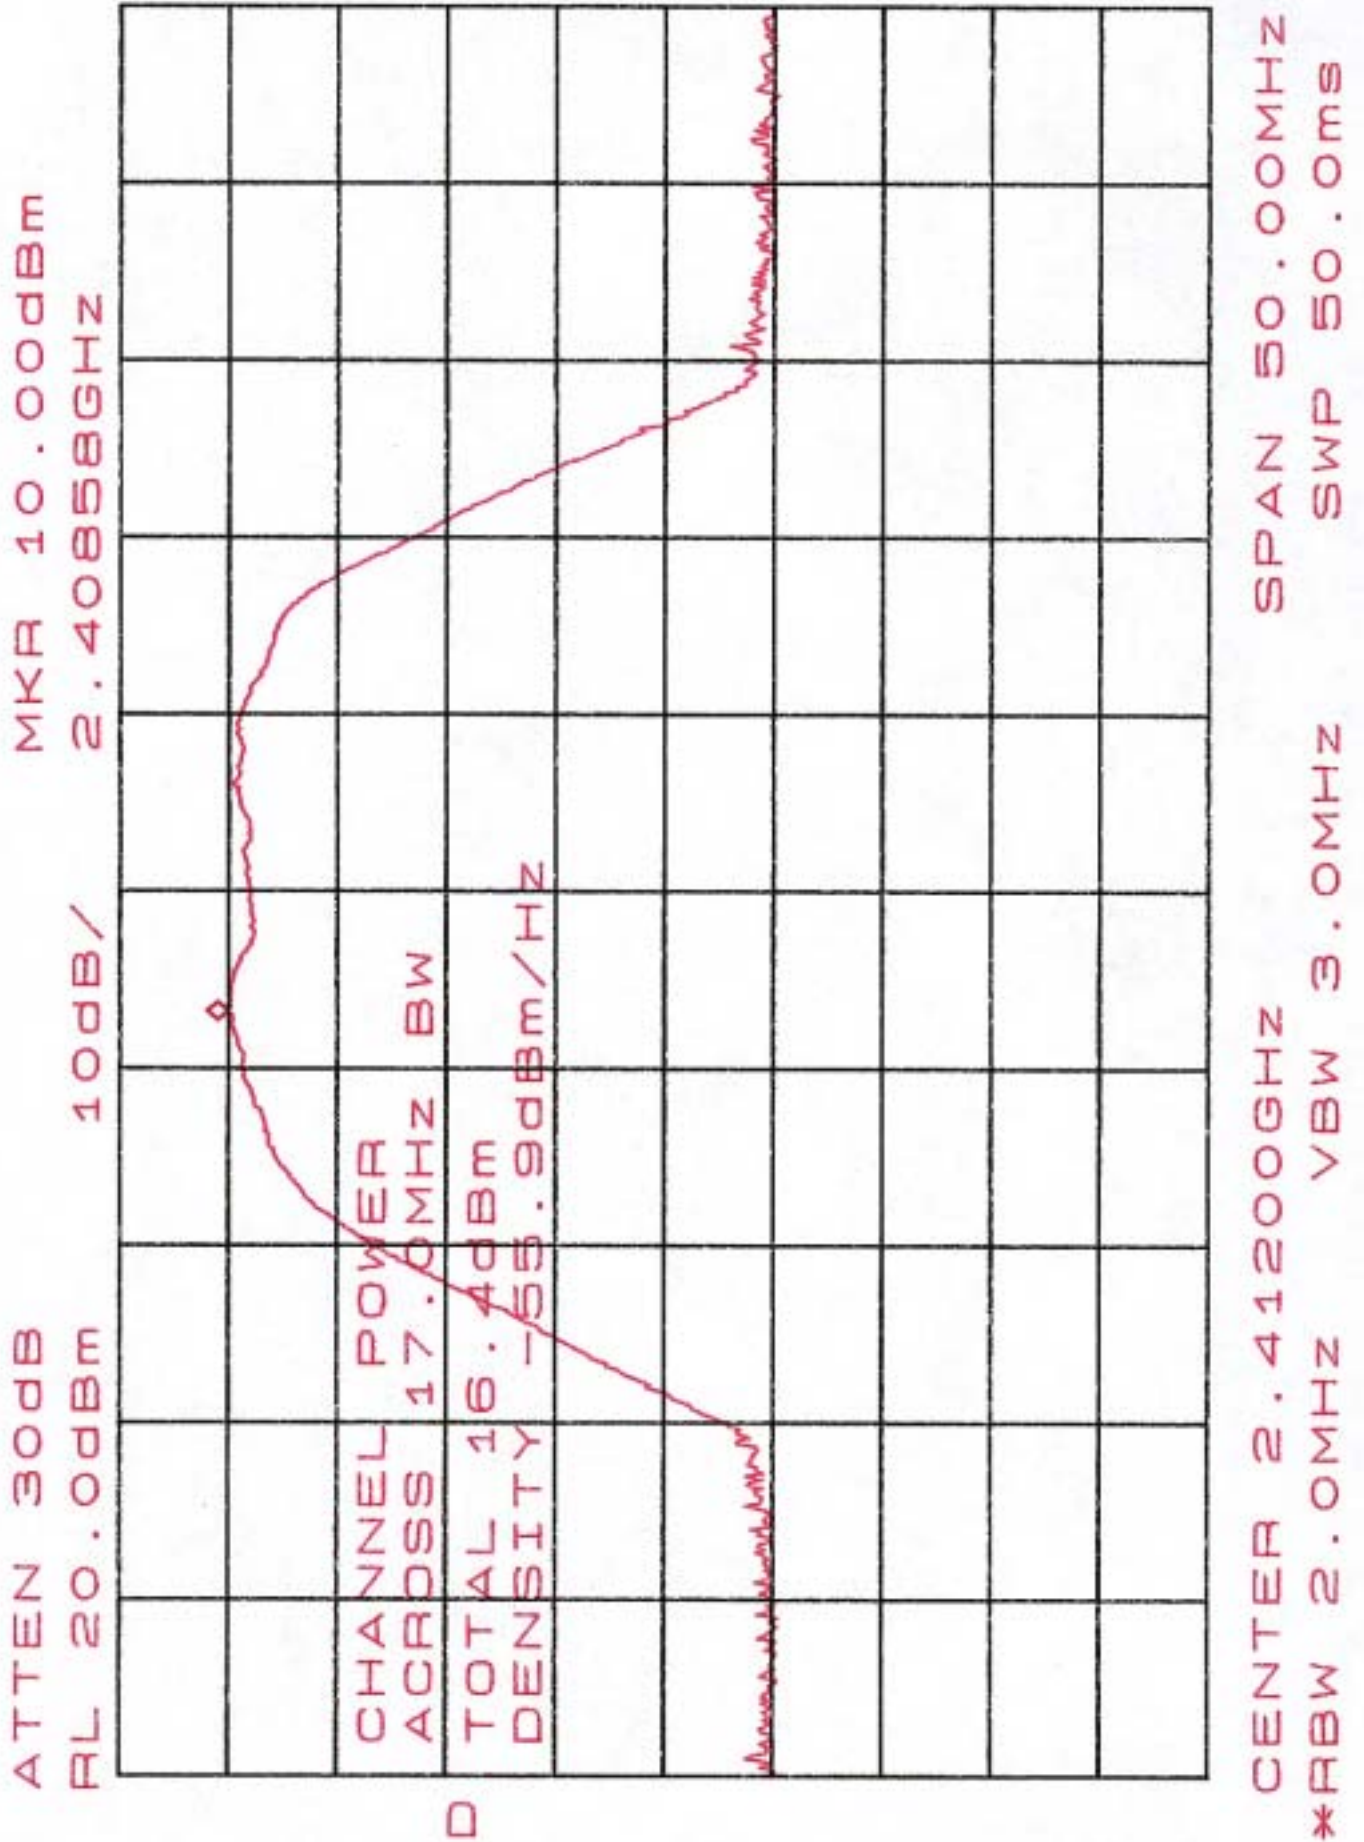



ATTEN 30dB
RL 20.0dBm
Δ MKR 10.33dBm
10dB/ 2.45925GHz

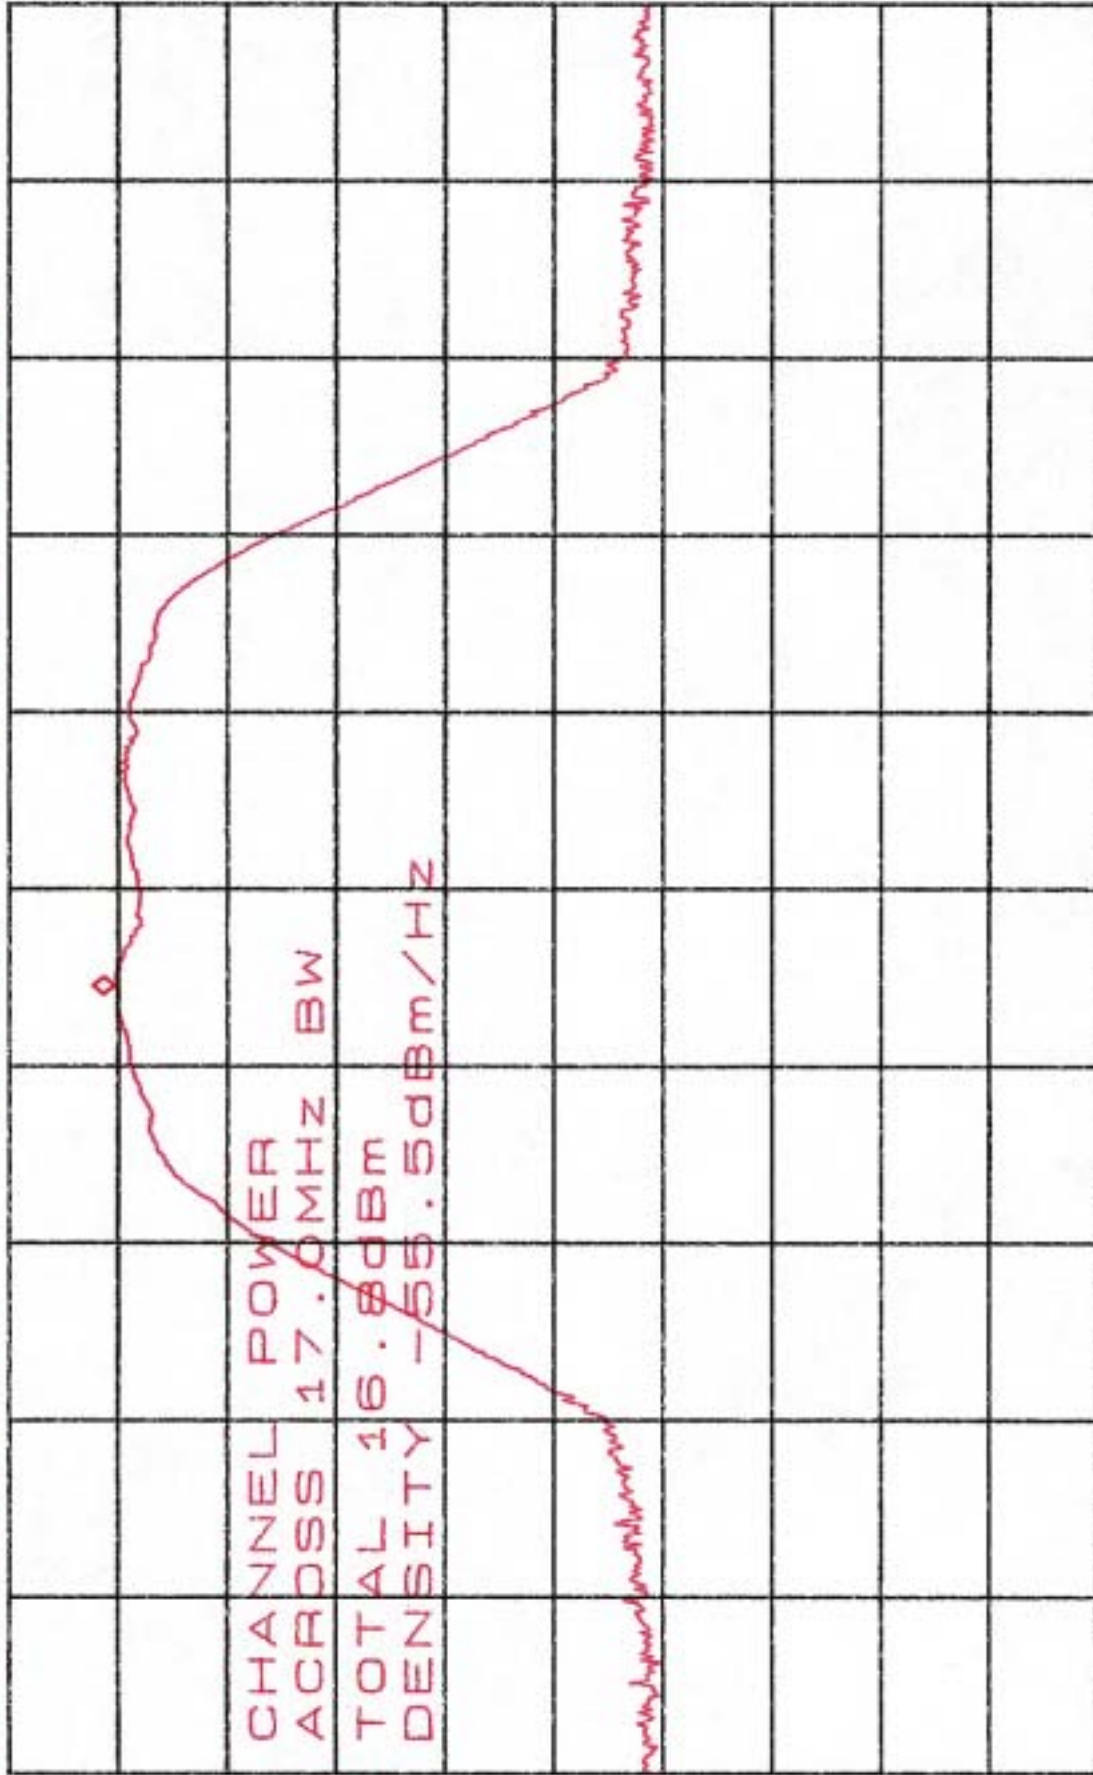



CENTER 2.46200GHz
*RBW 2.0MHz
SPAN 50.00MHz
SWP 50.0ms
VBW 3.0MHz


Appendix 5: Ploted Datas of Band Edge Emission

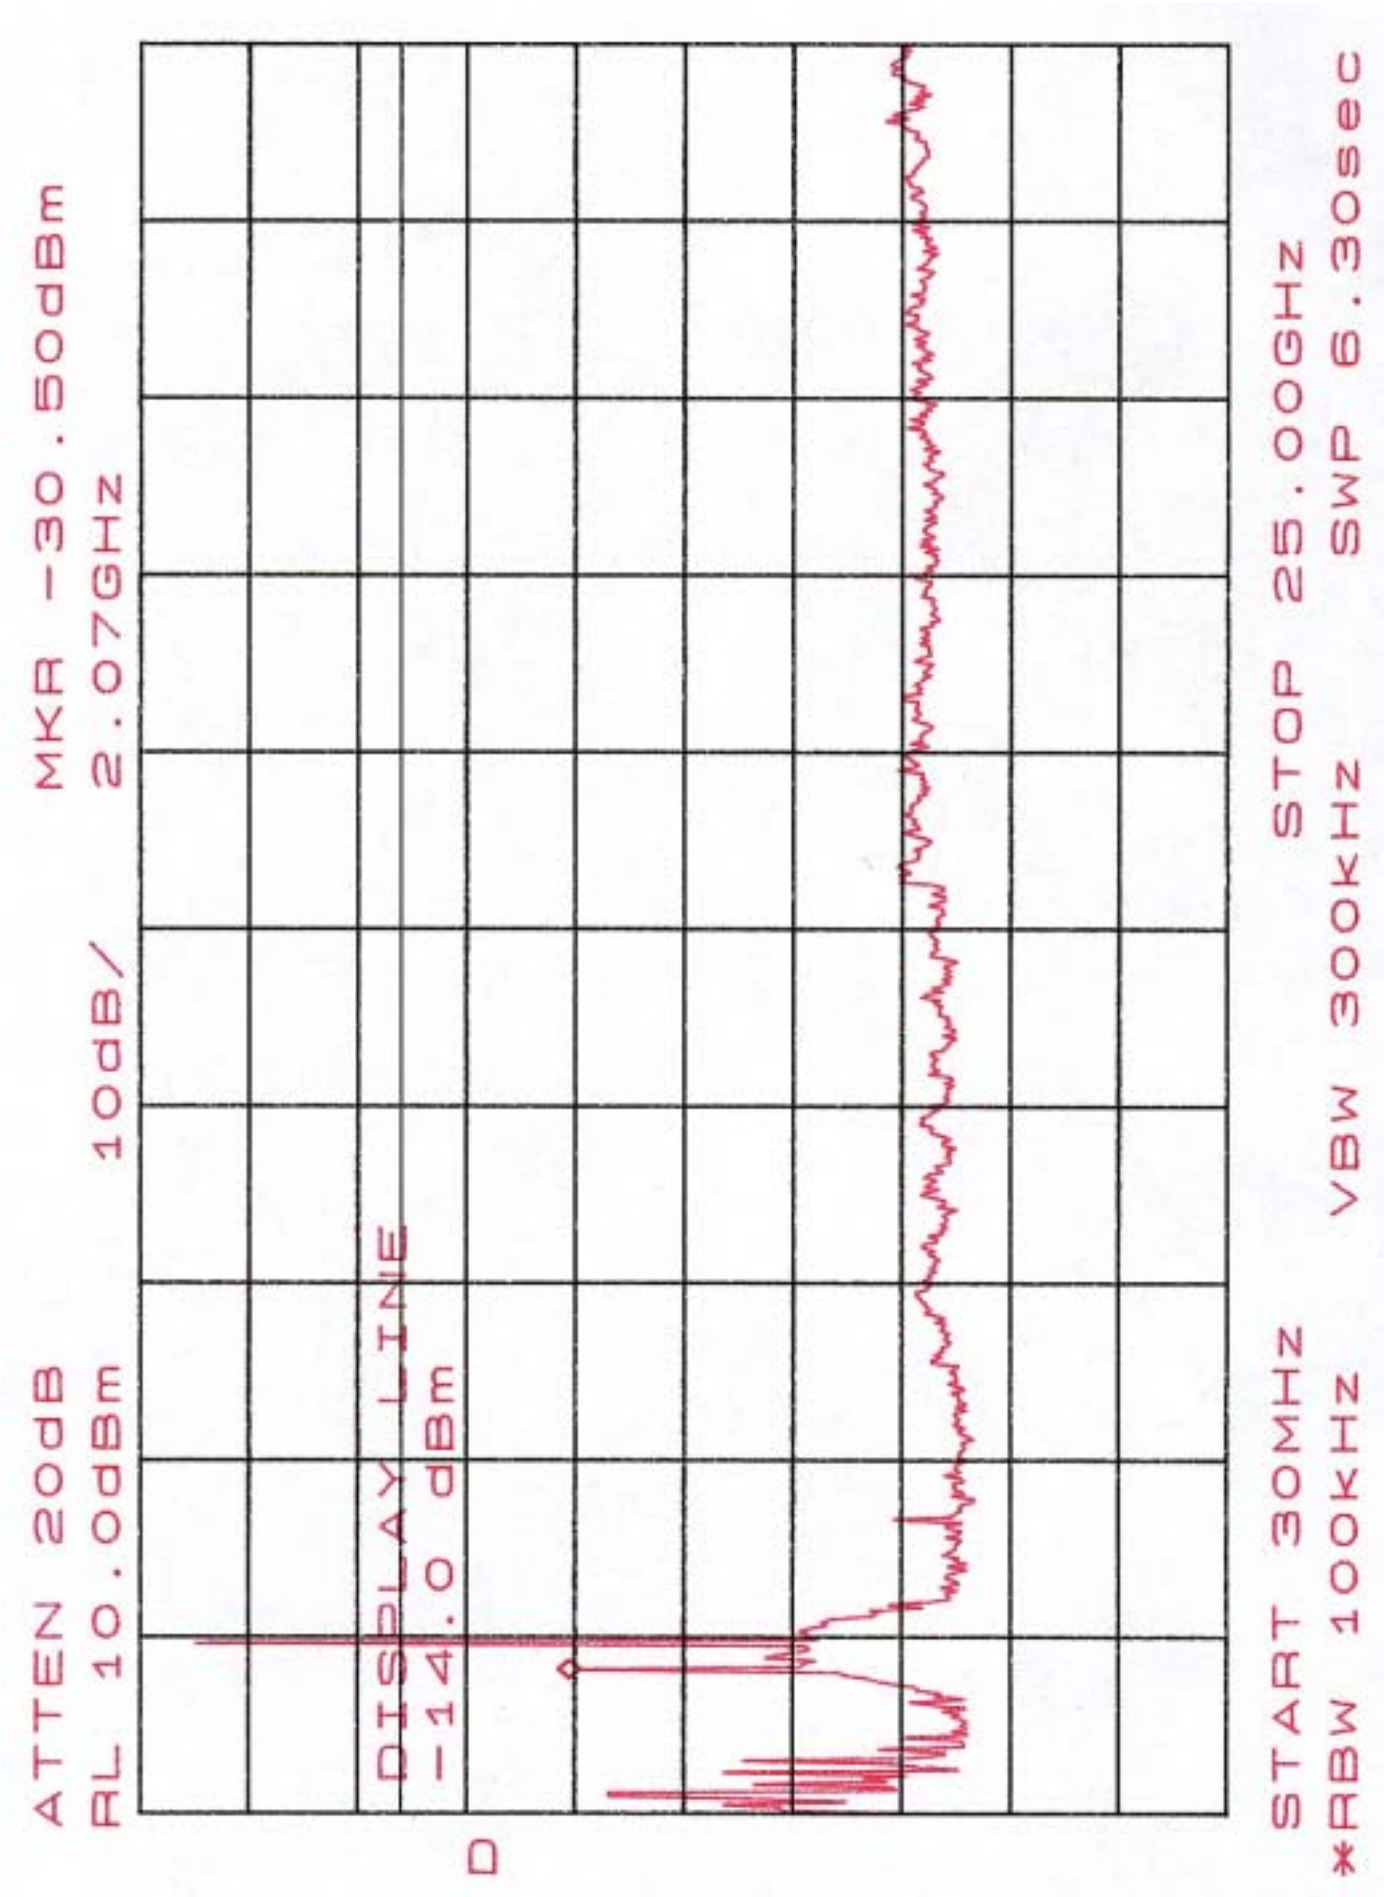


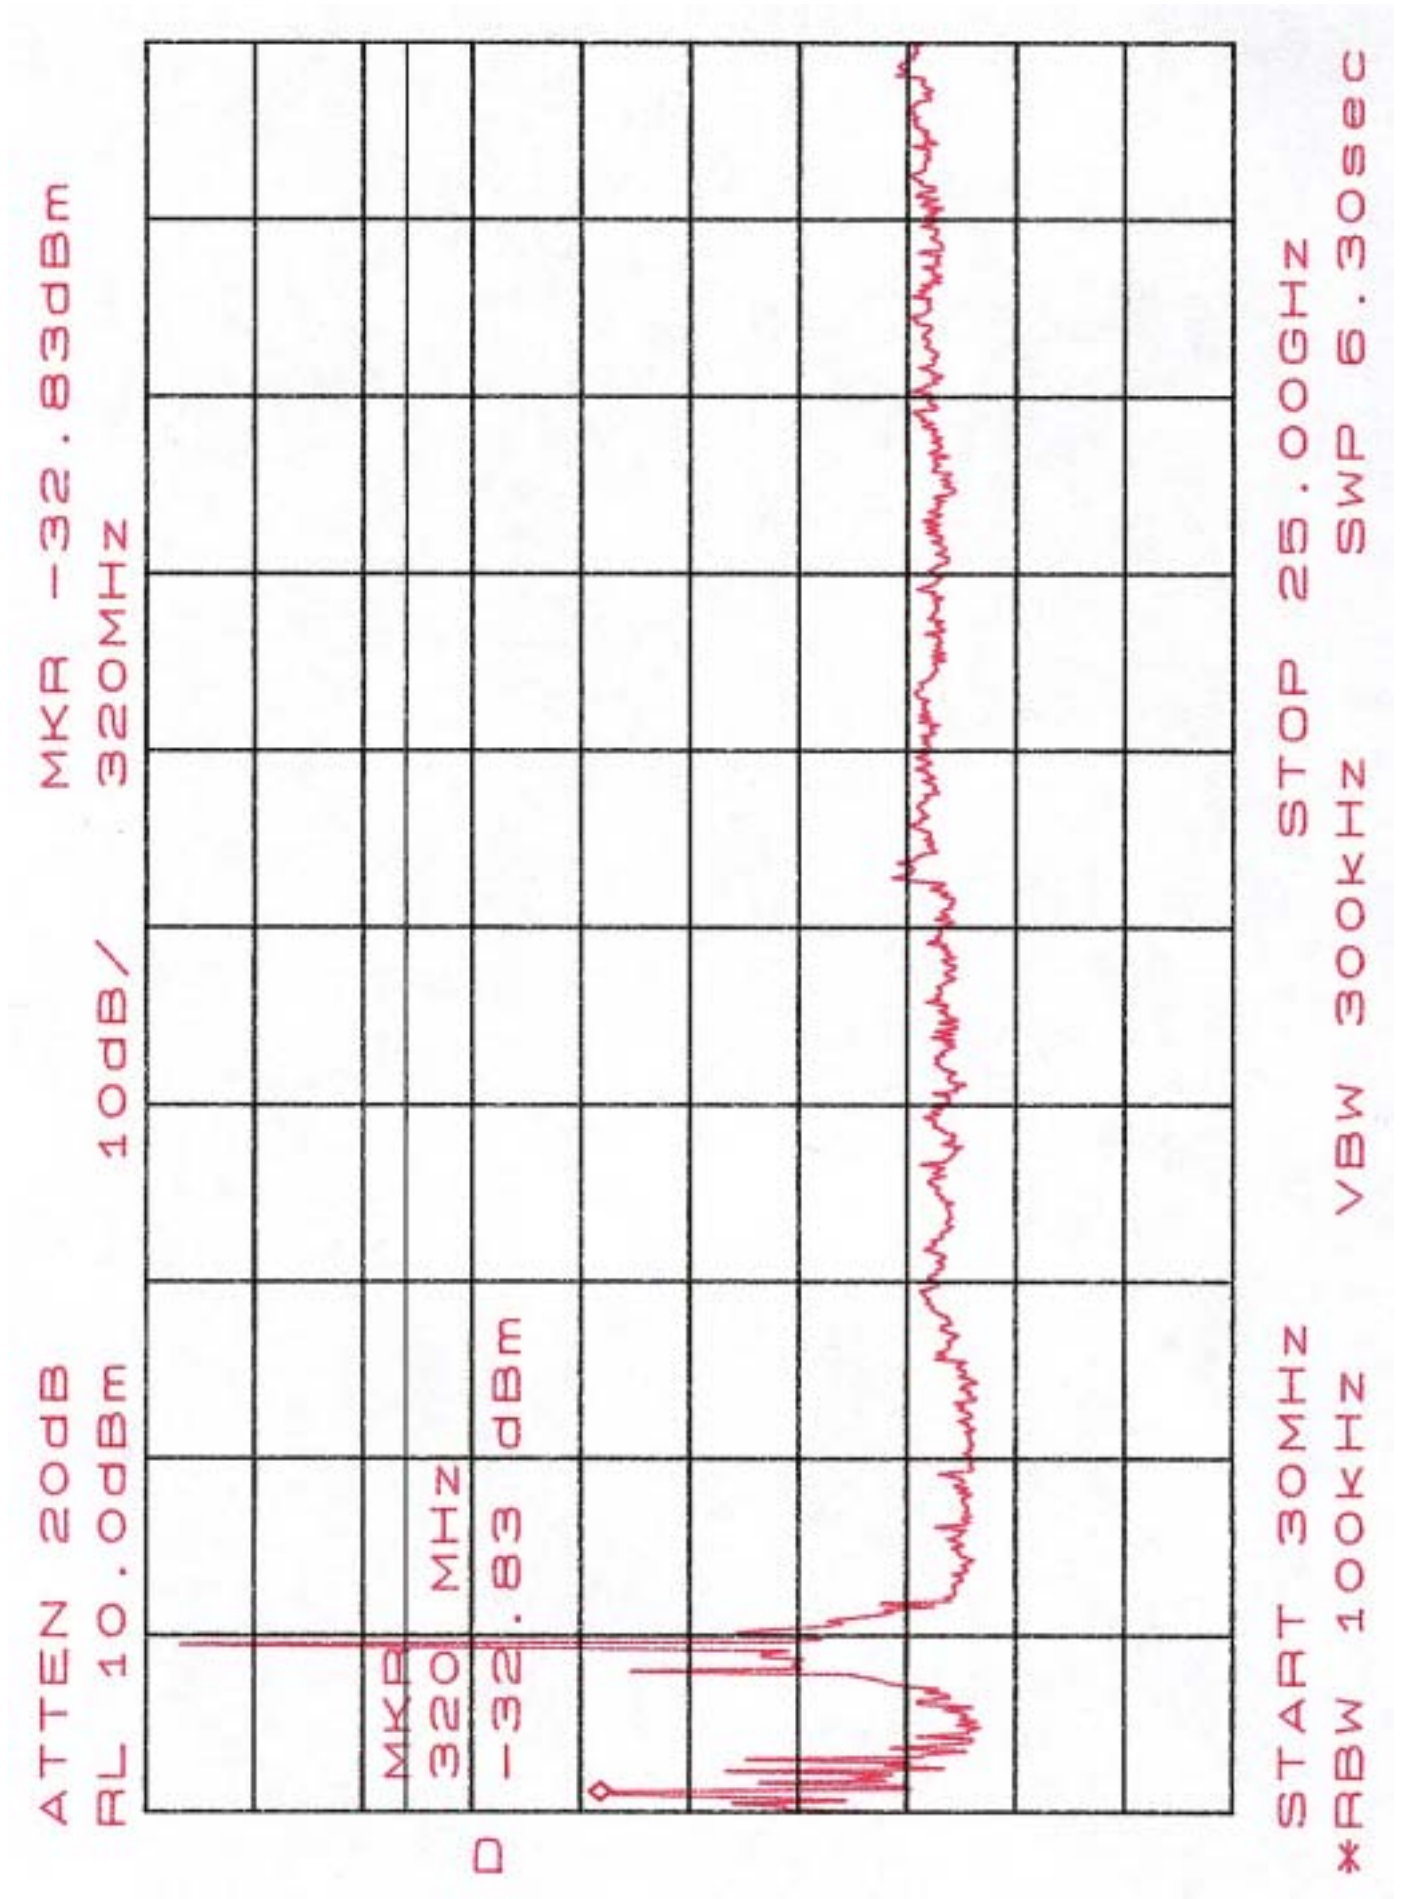


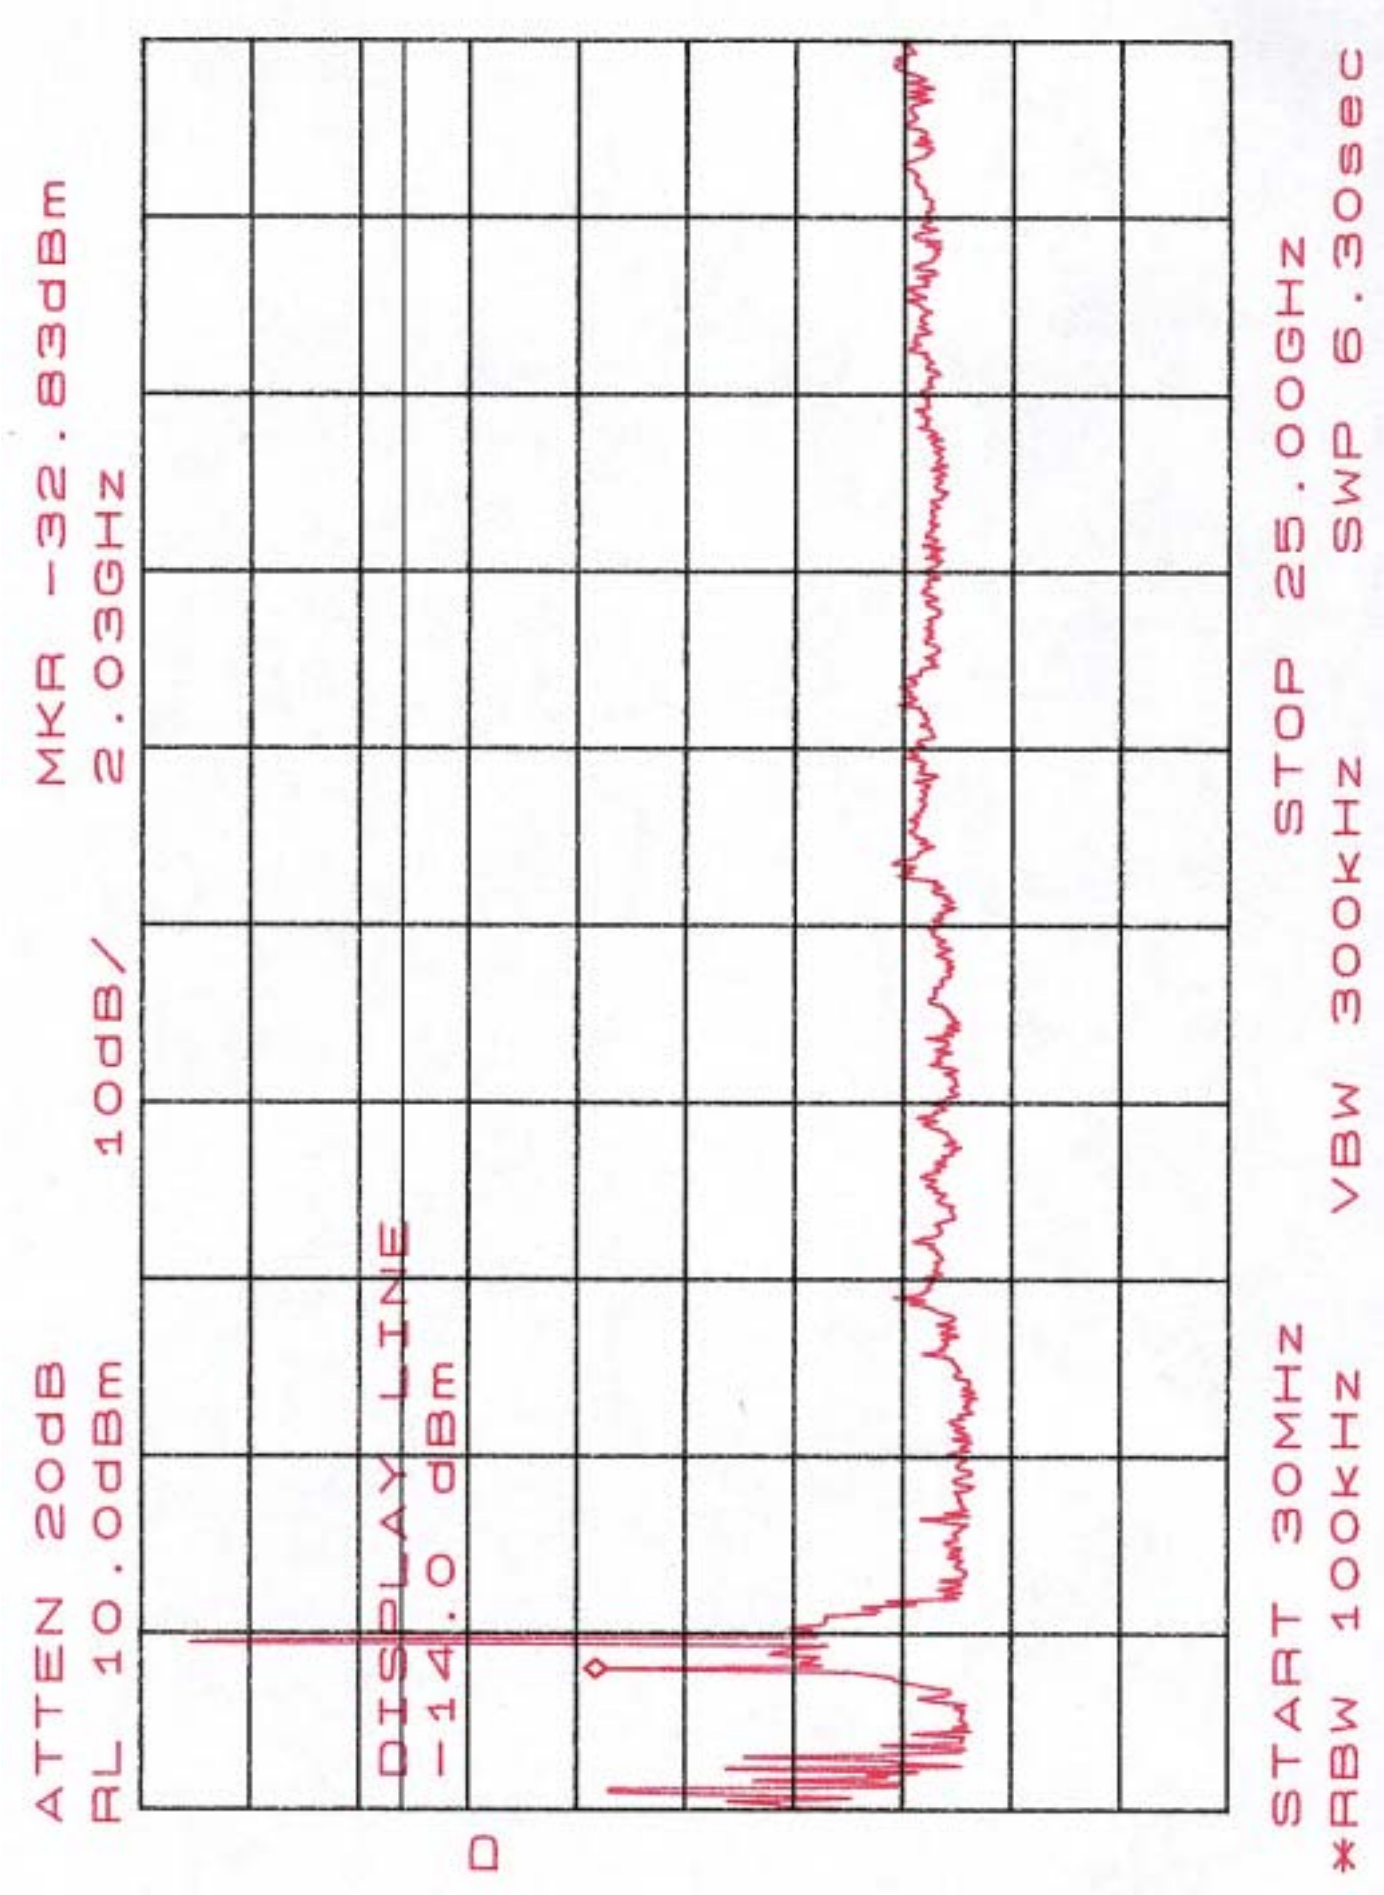


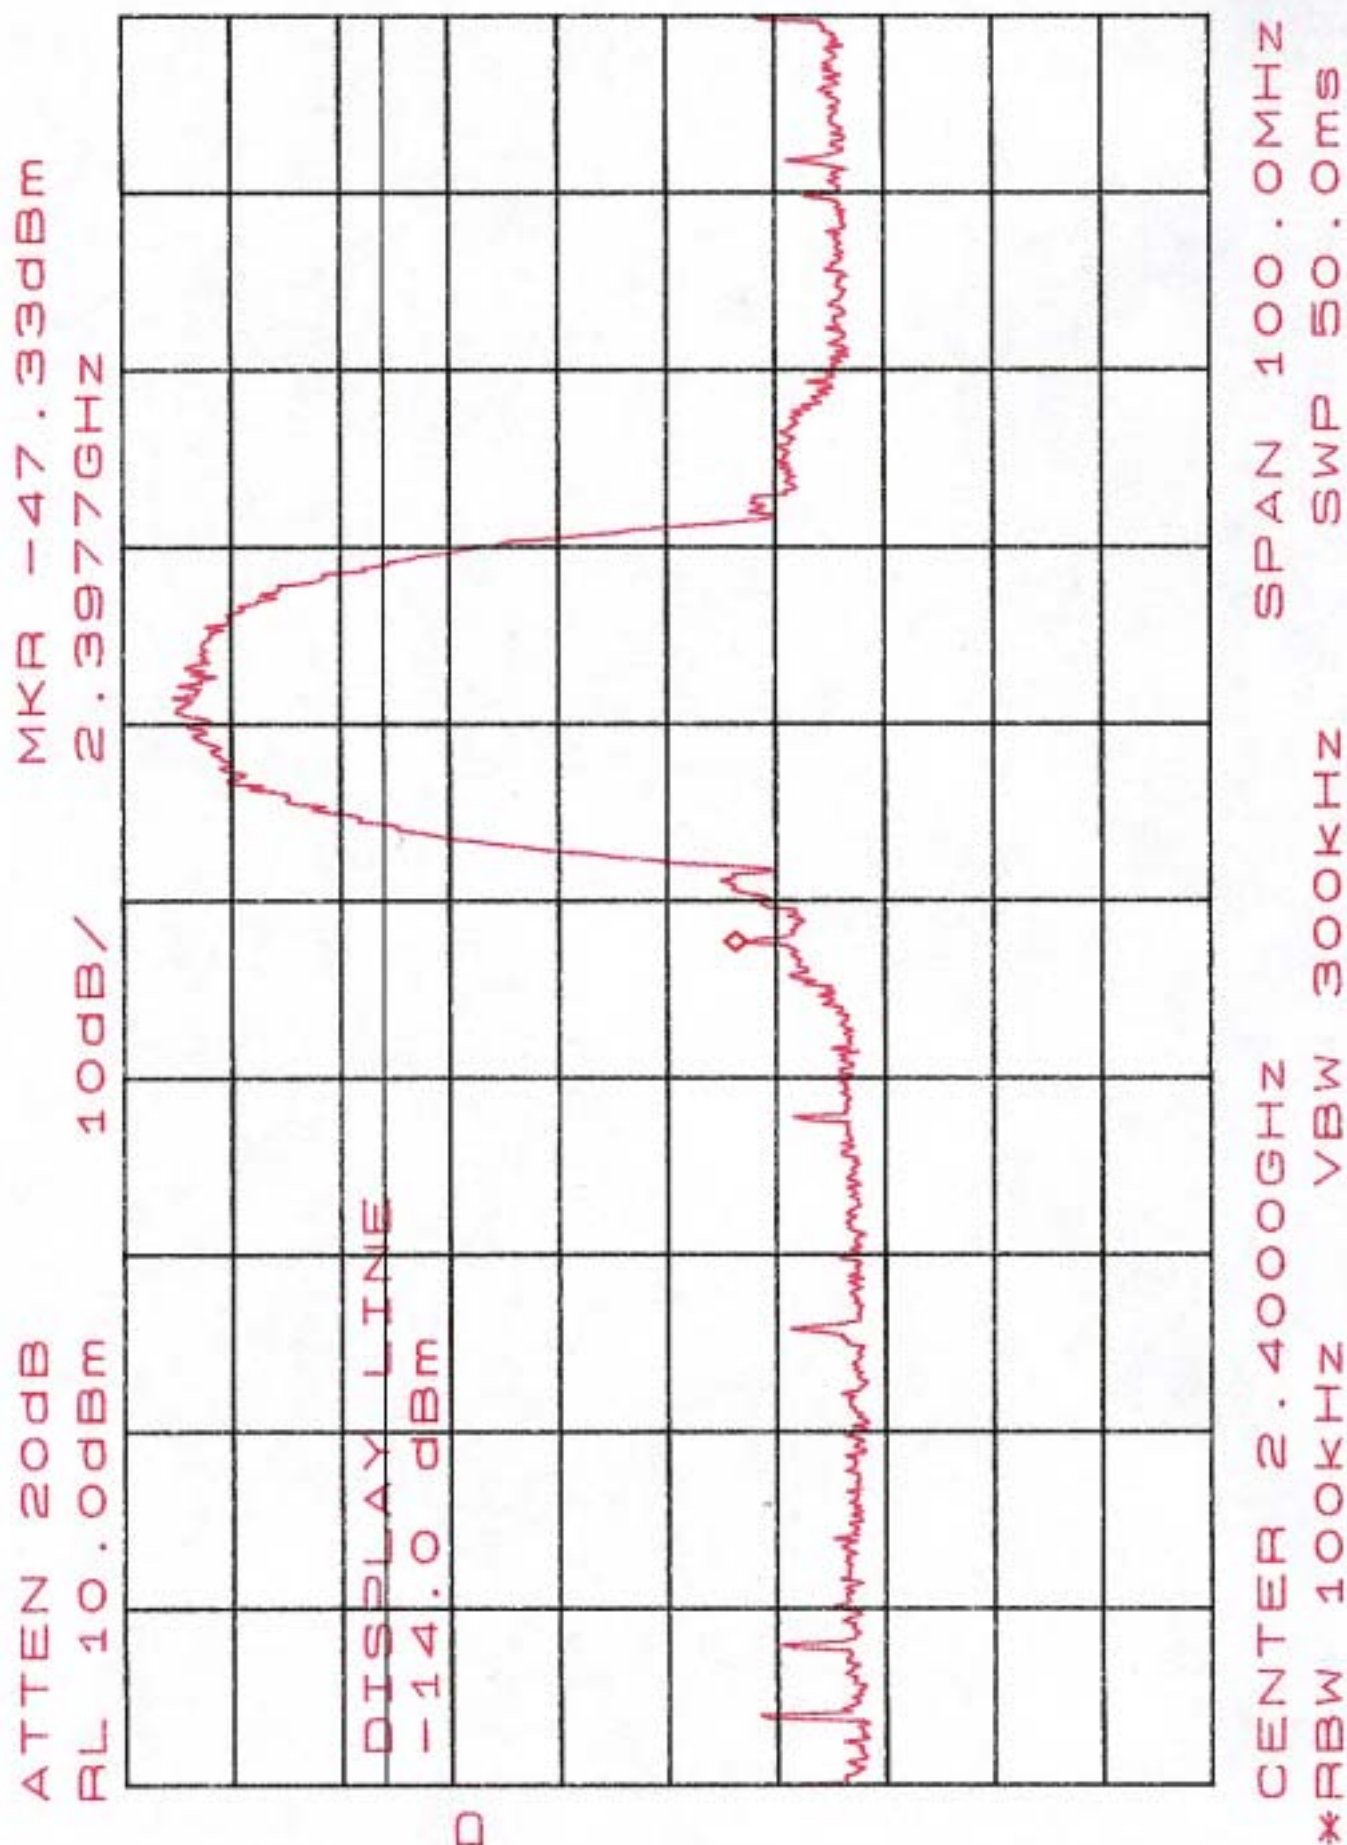


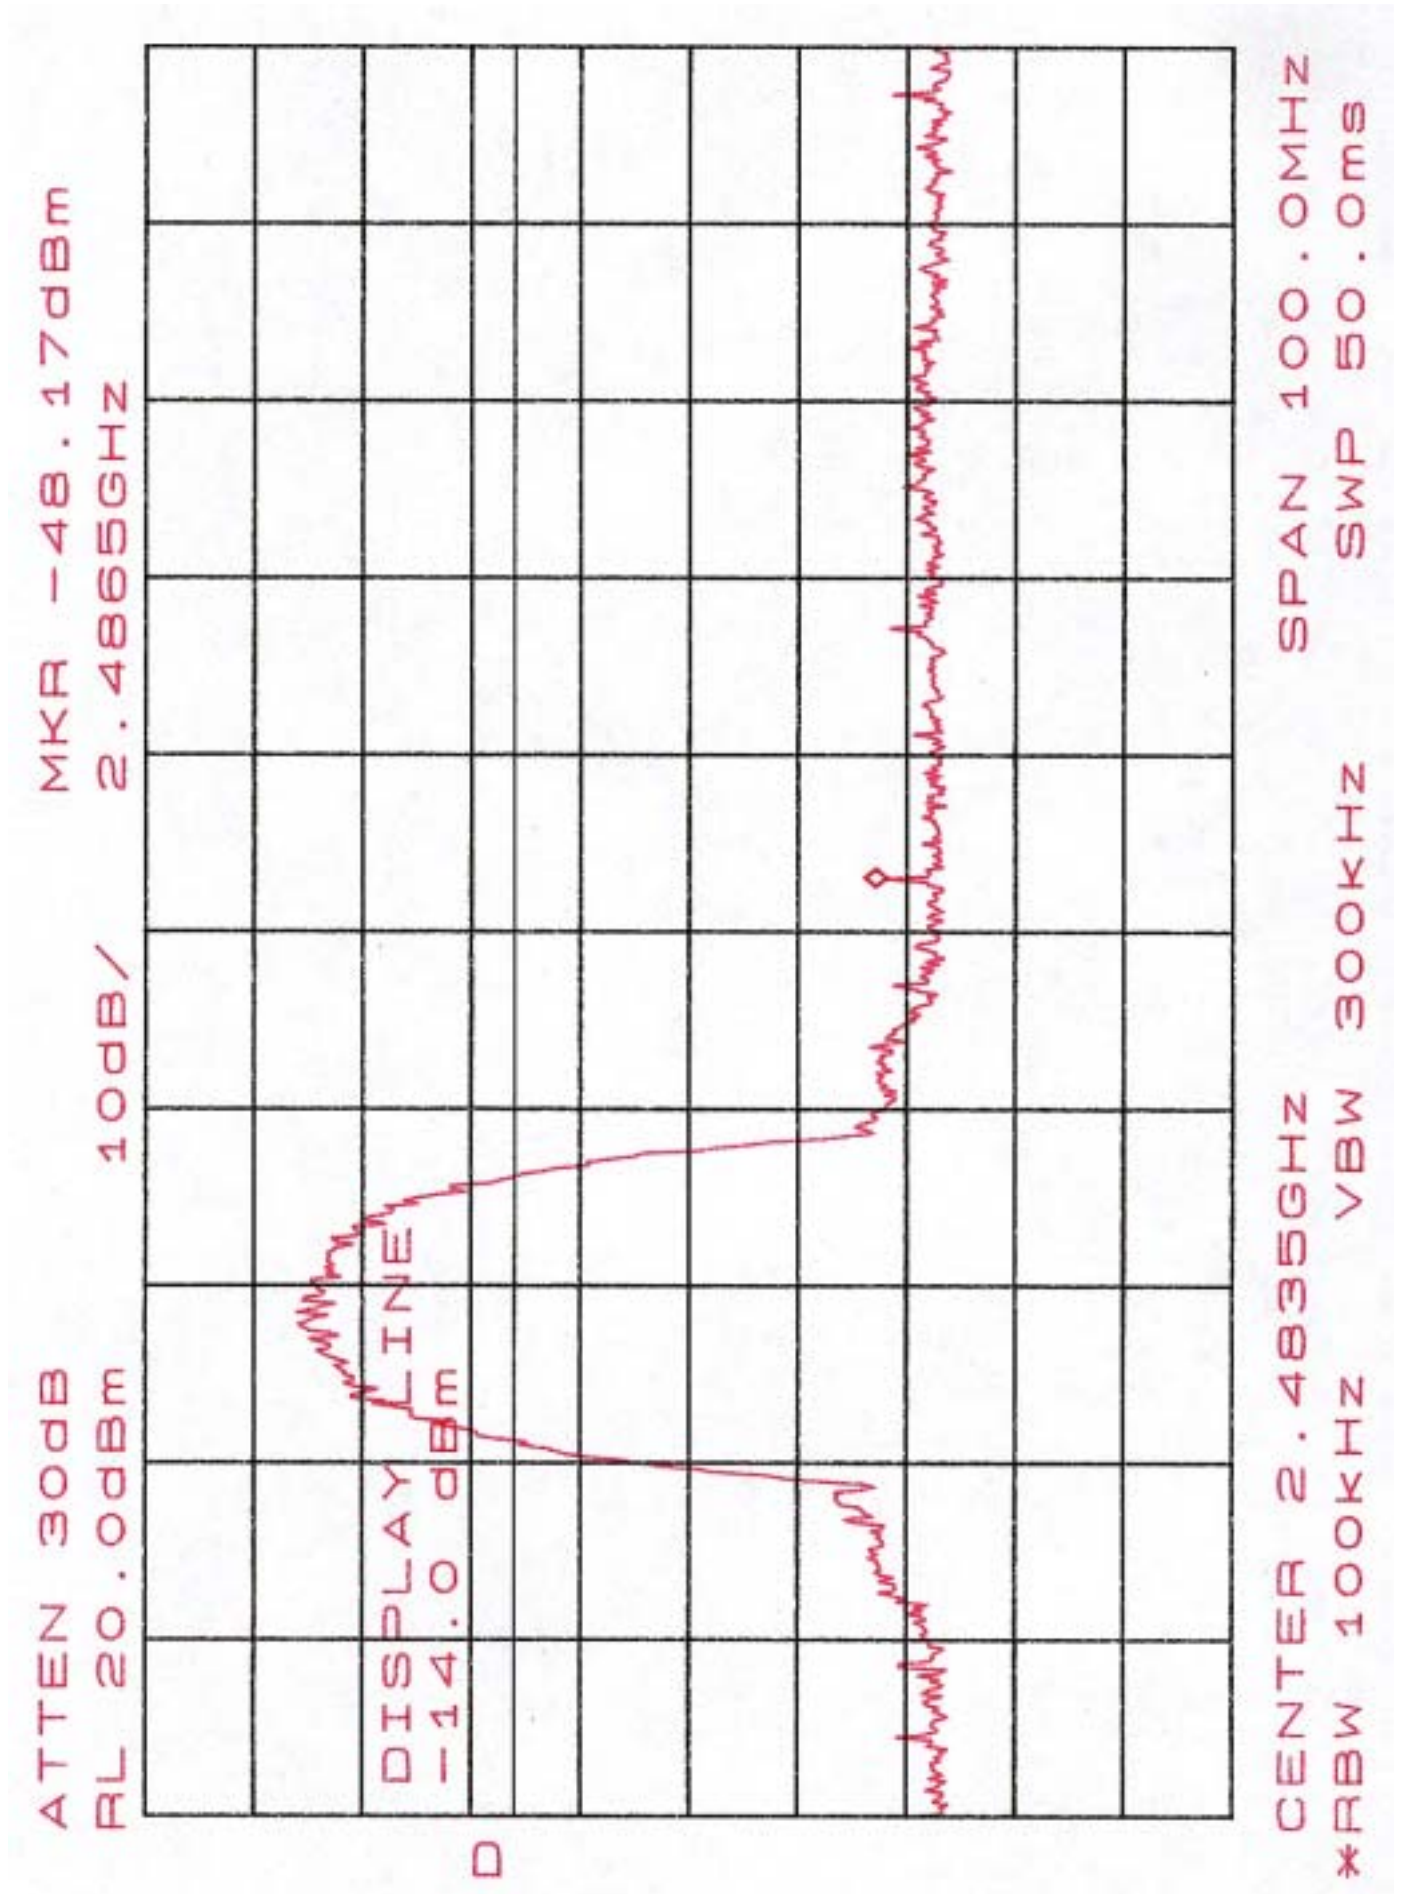


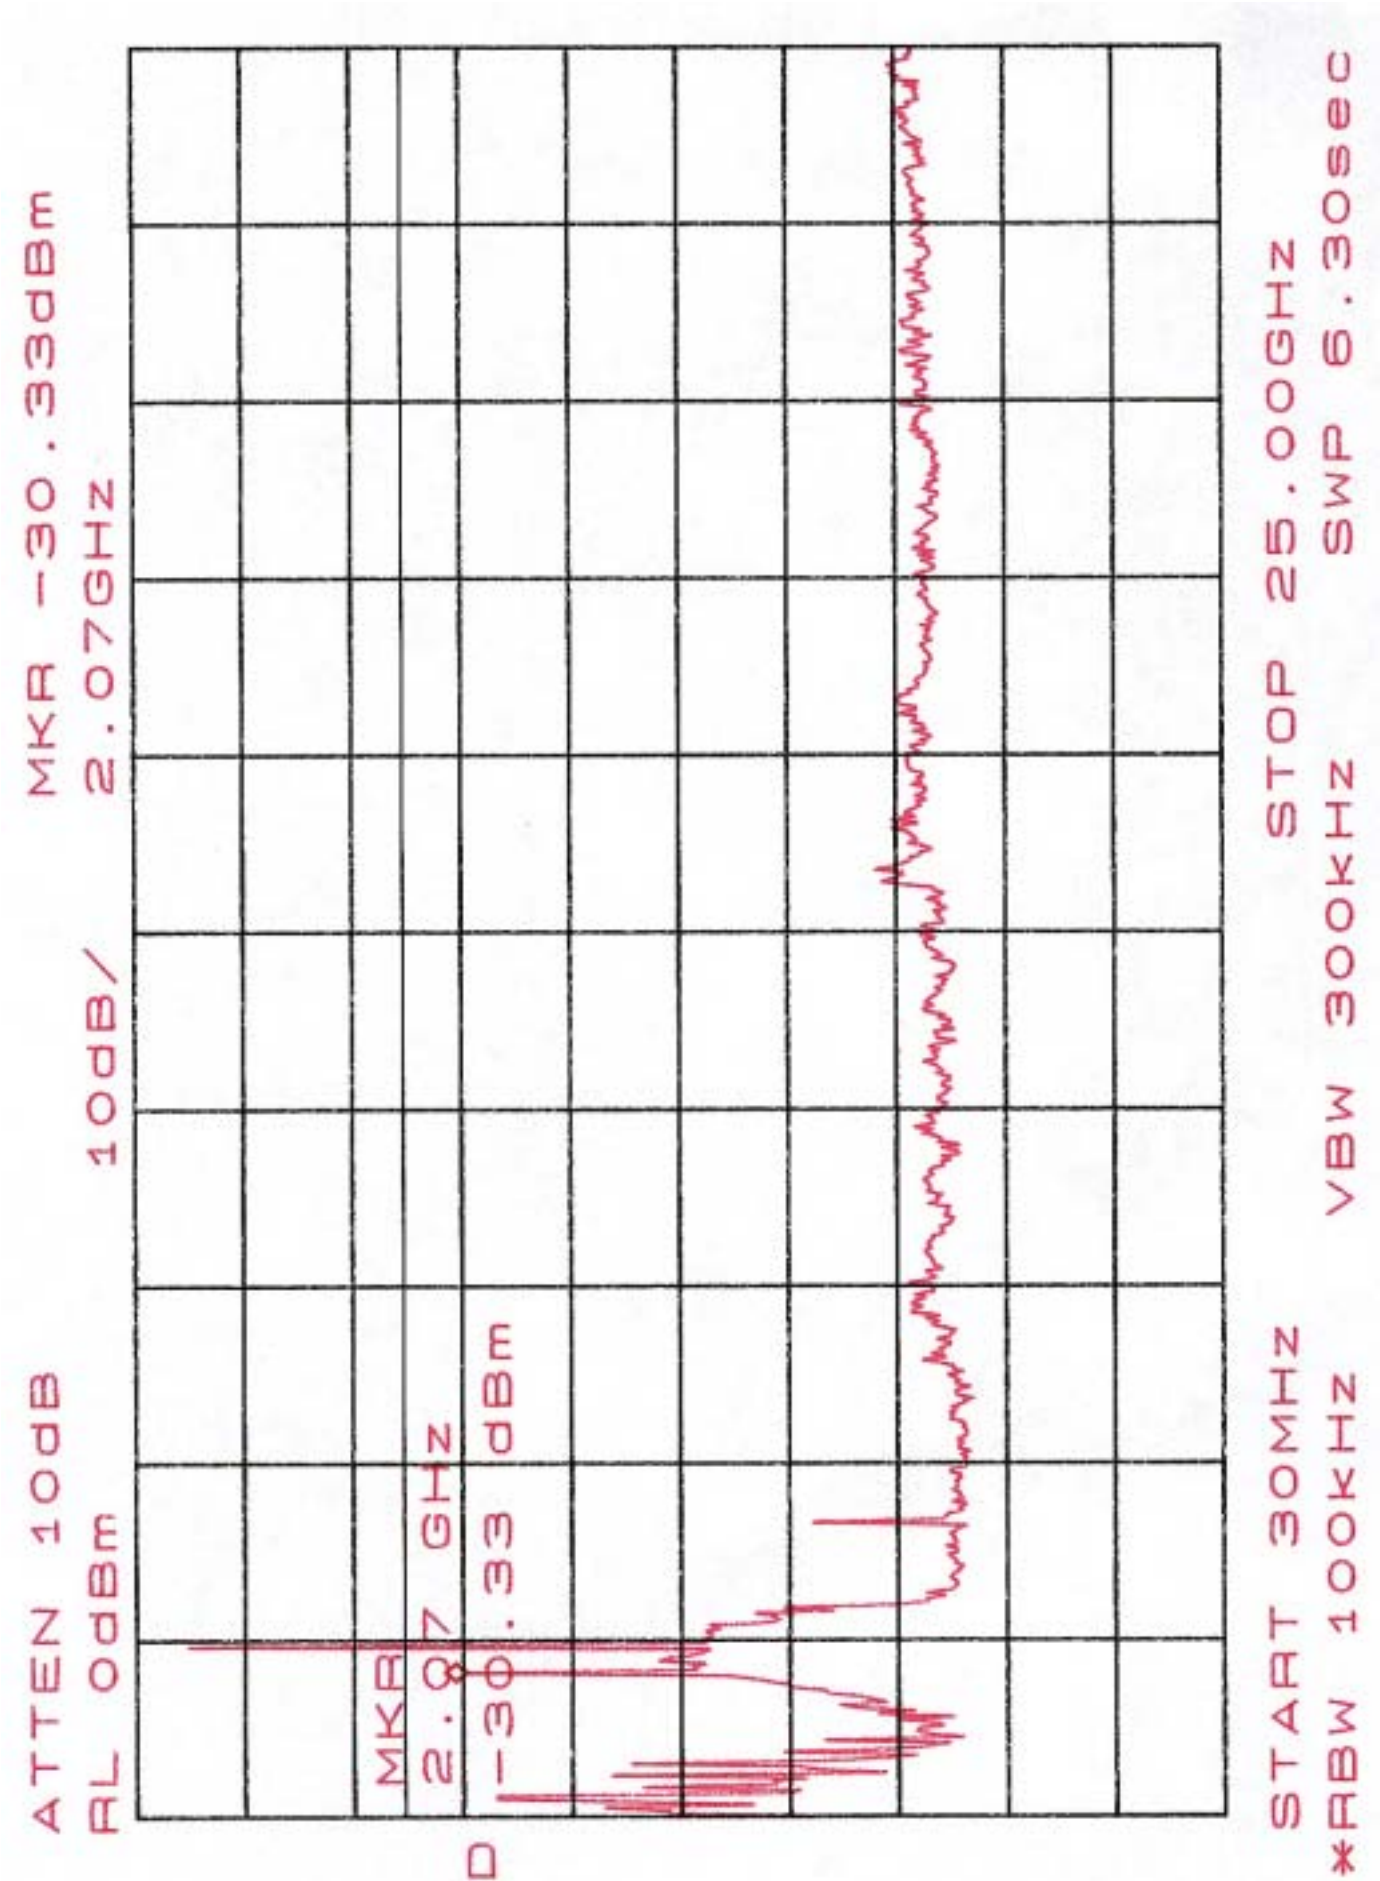

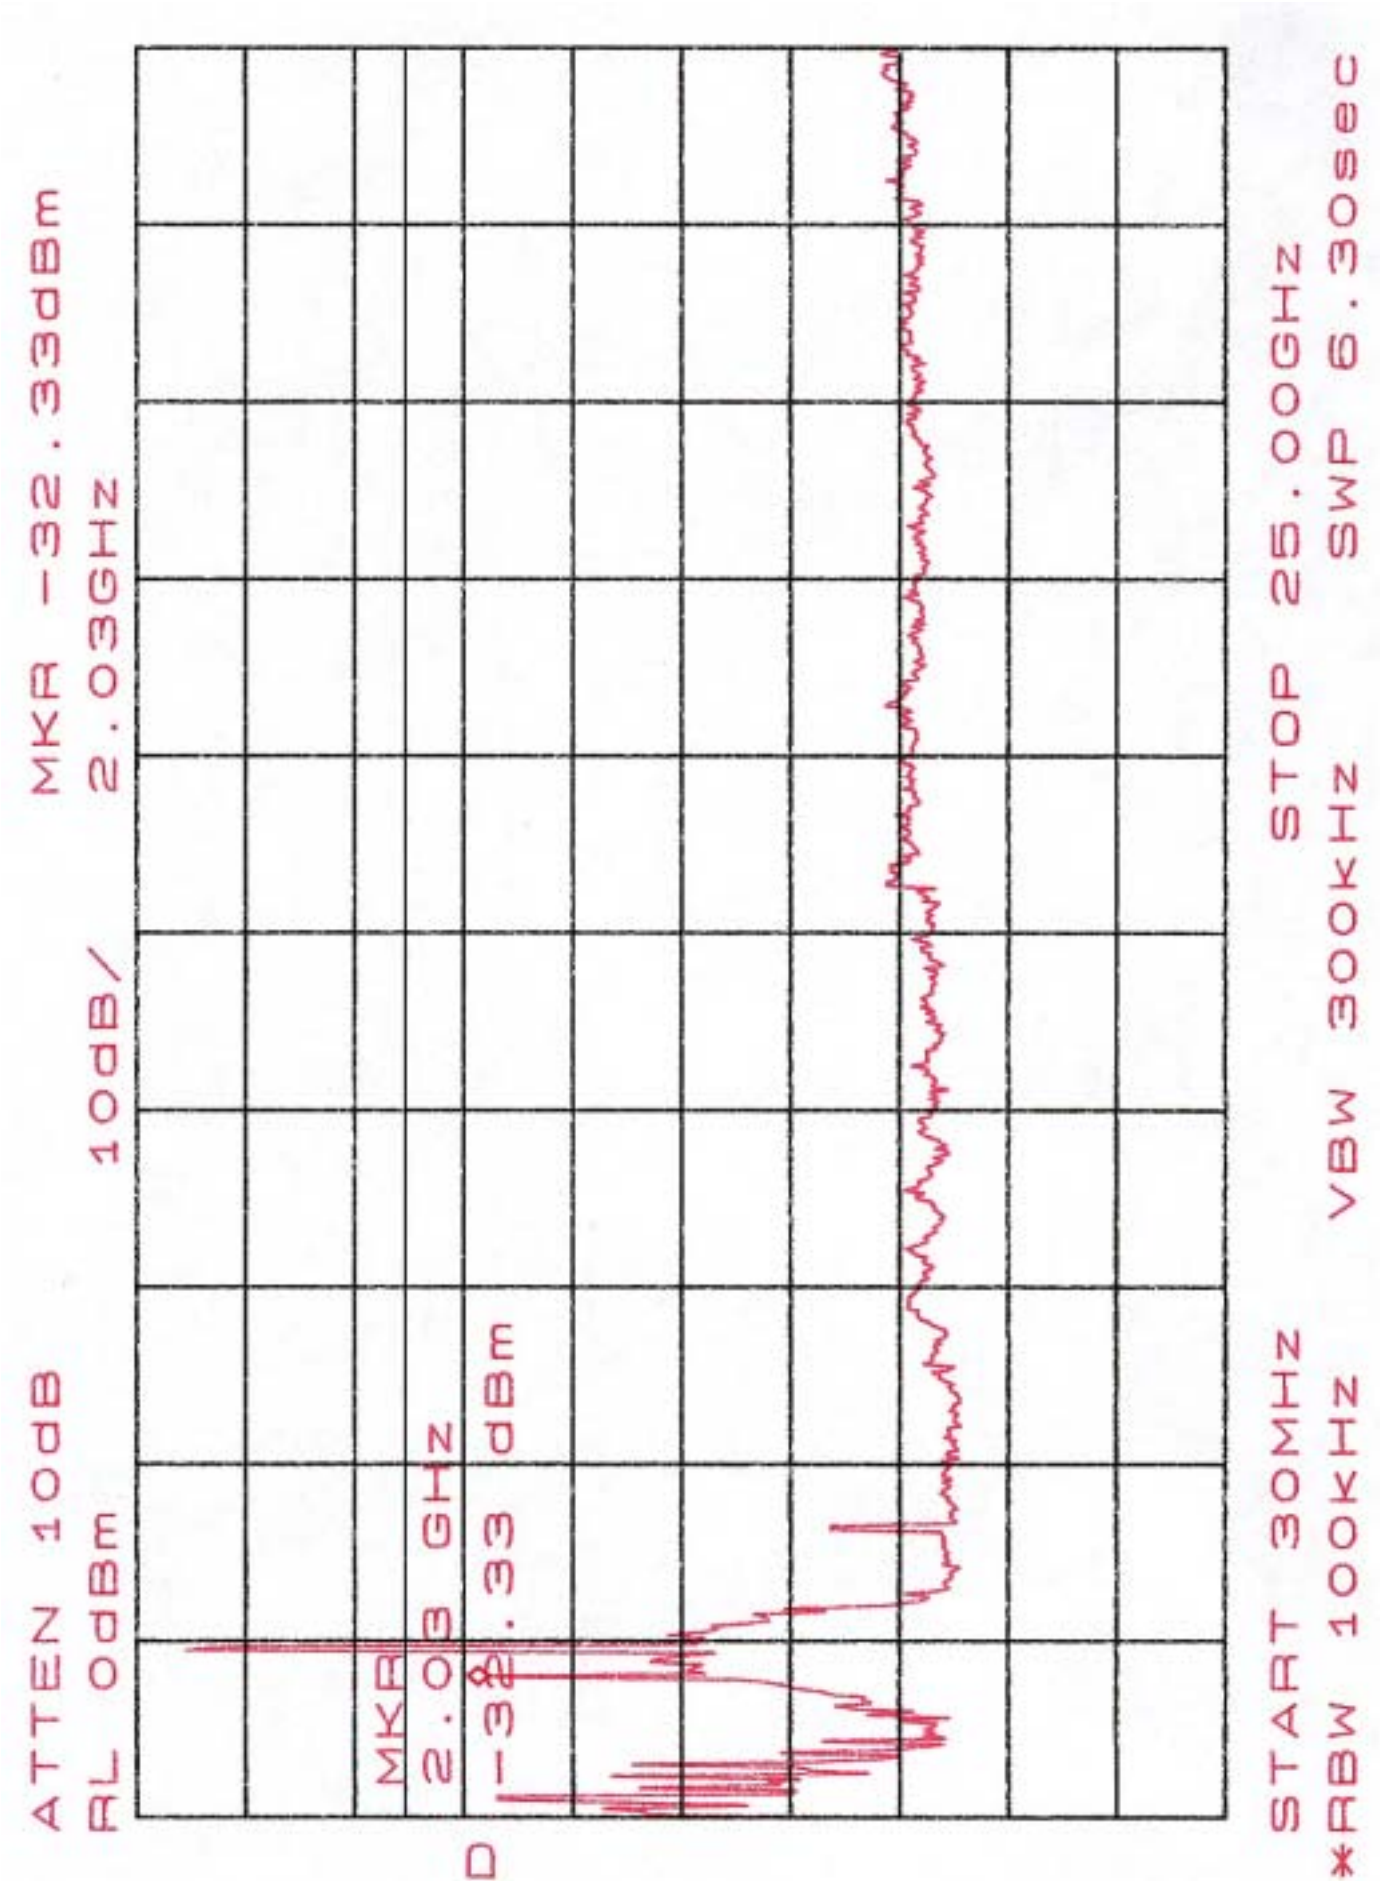

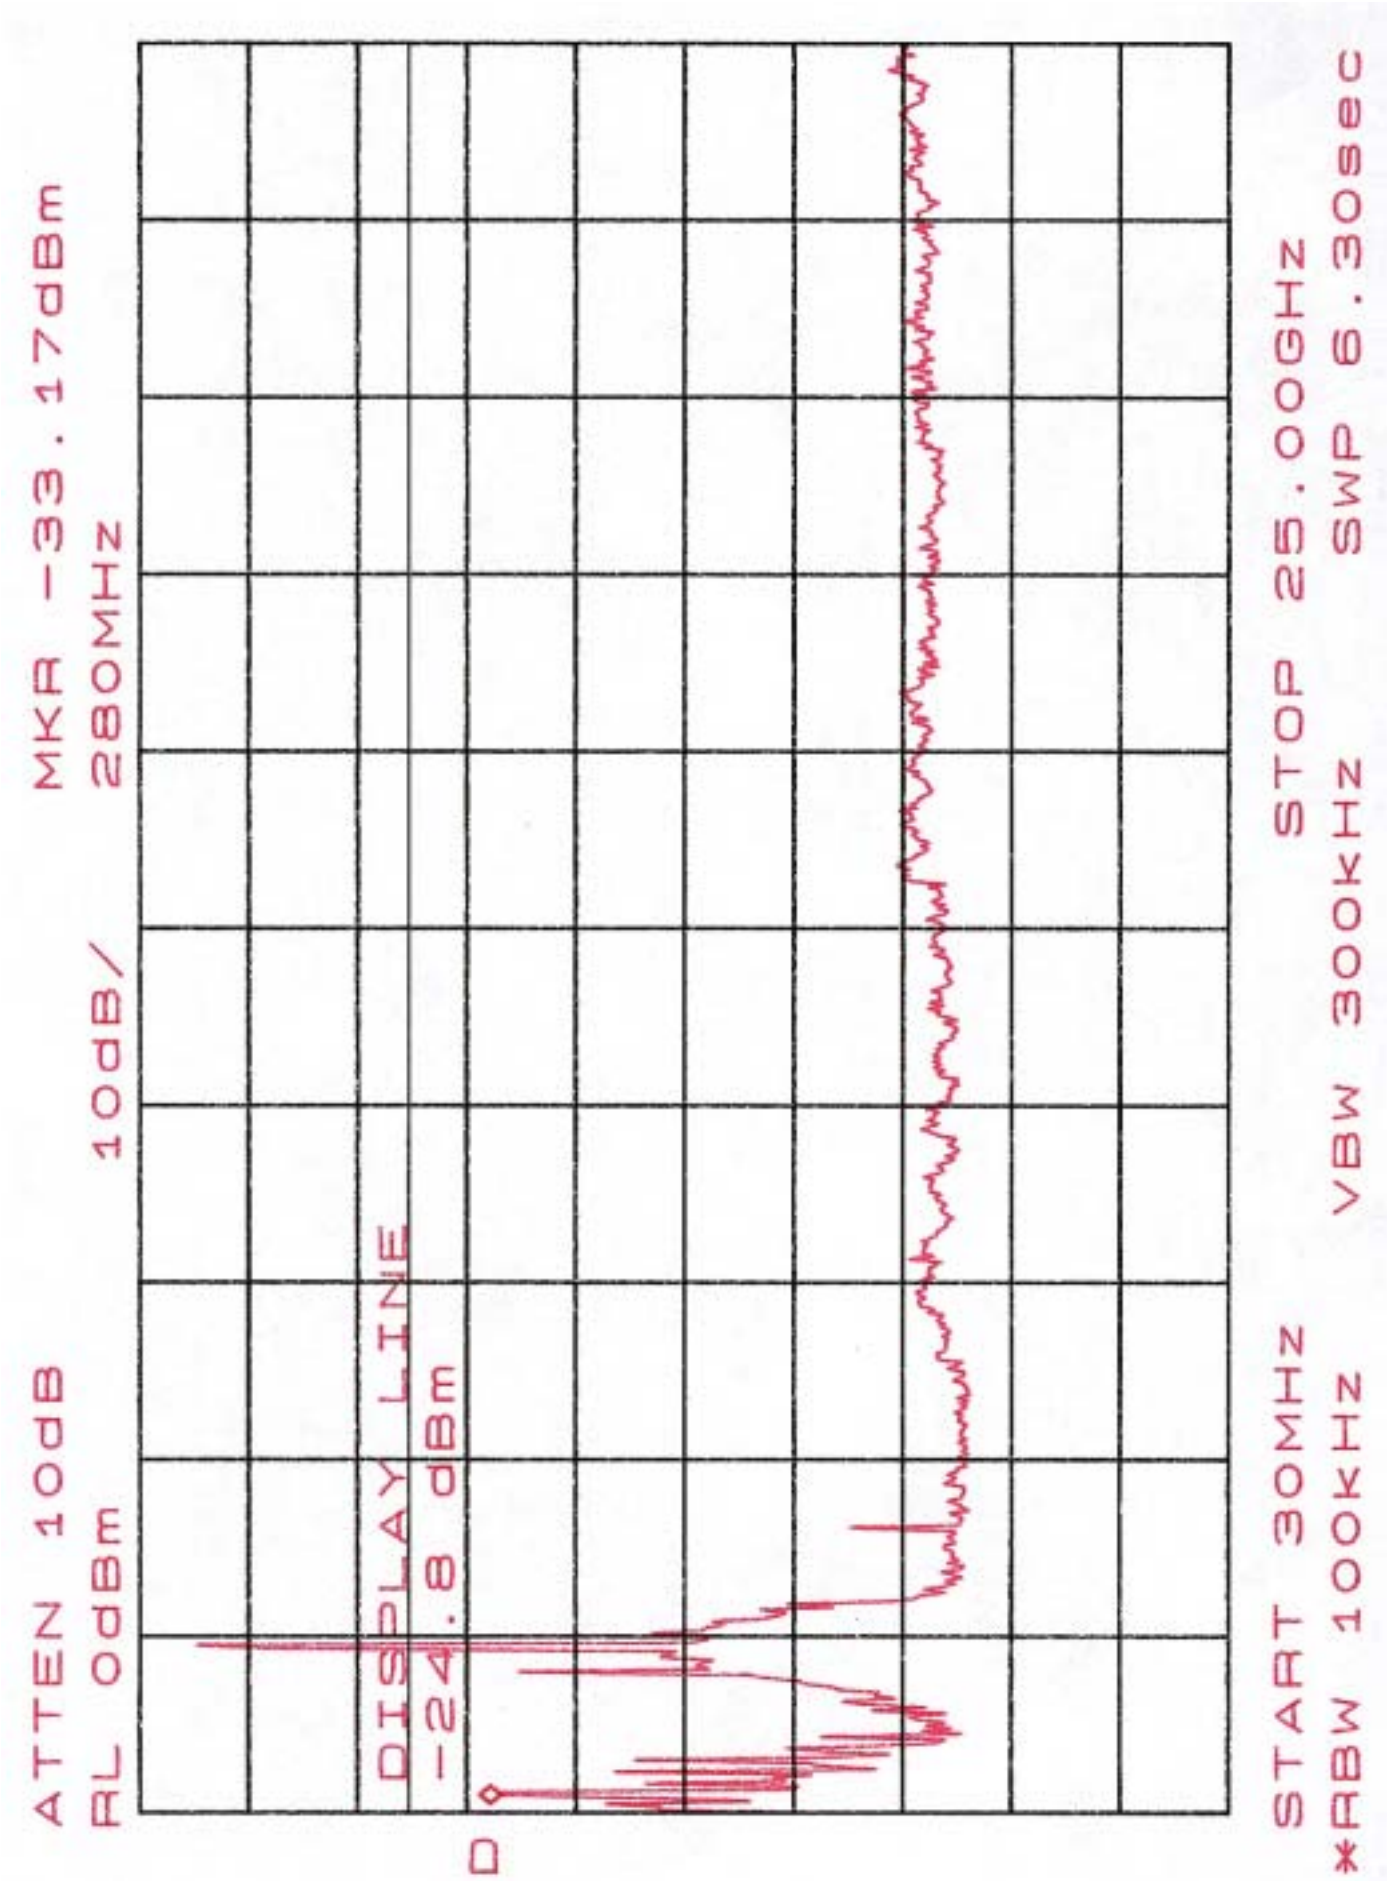

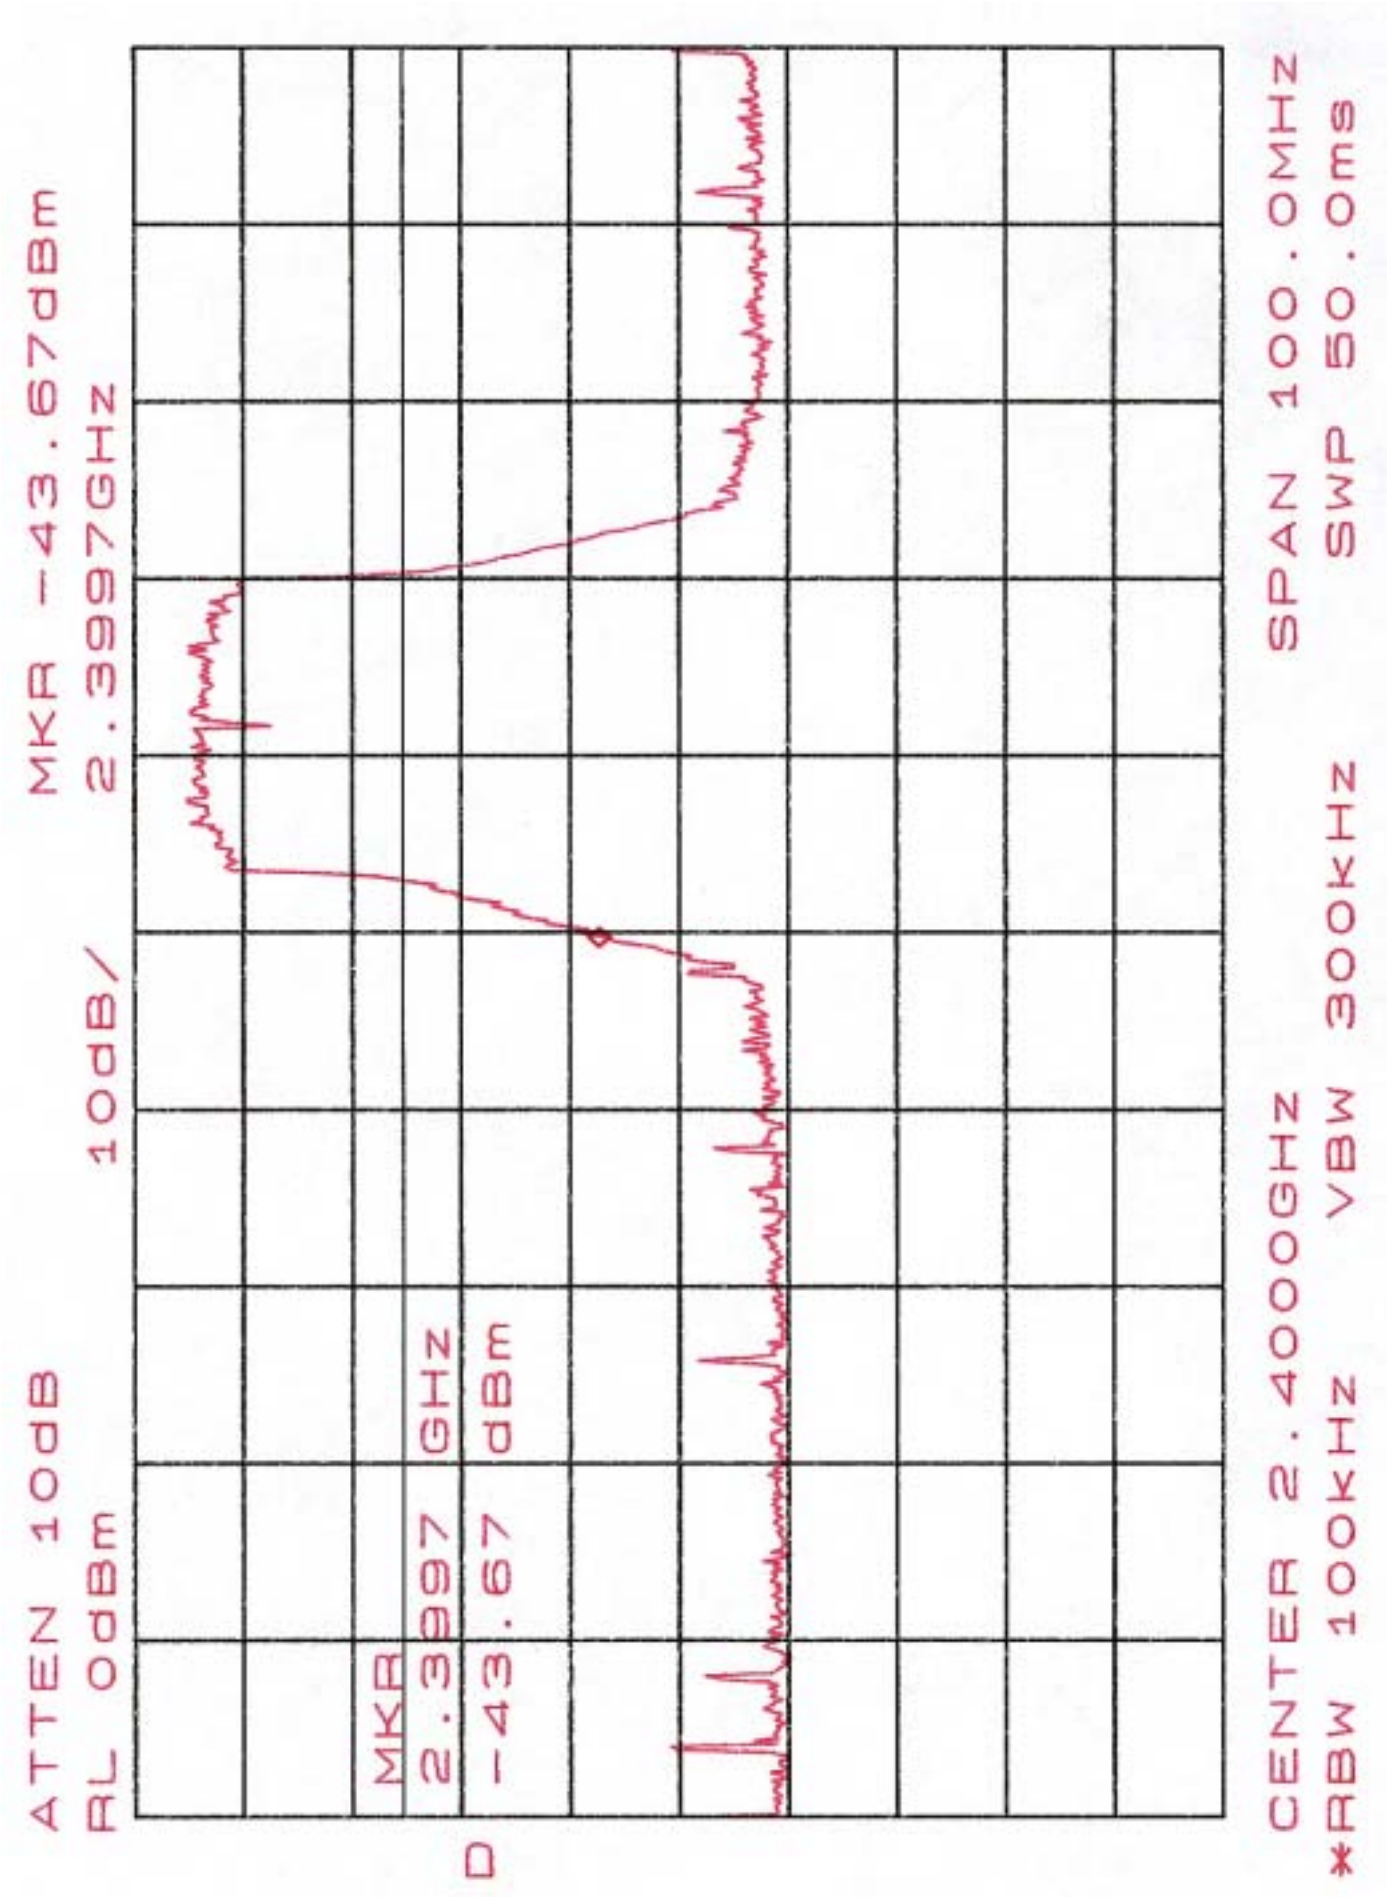

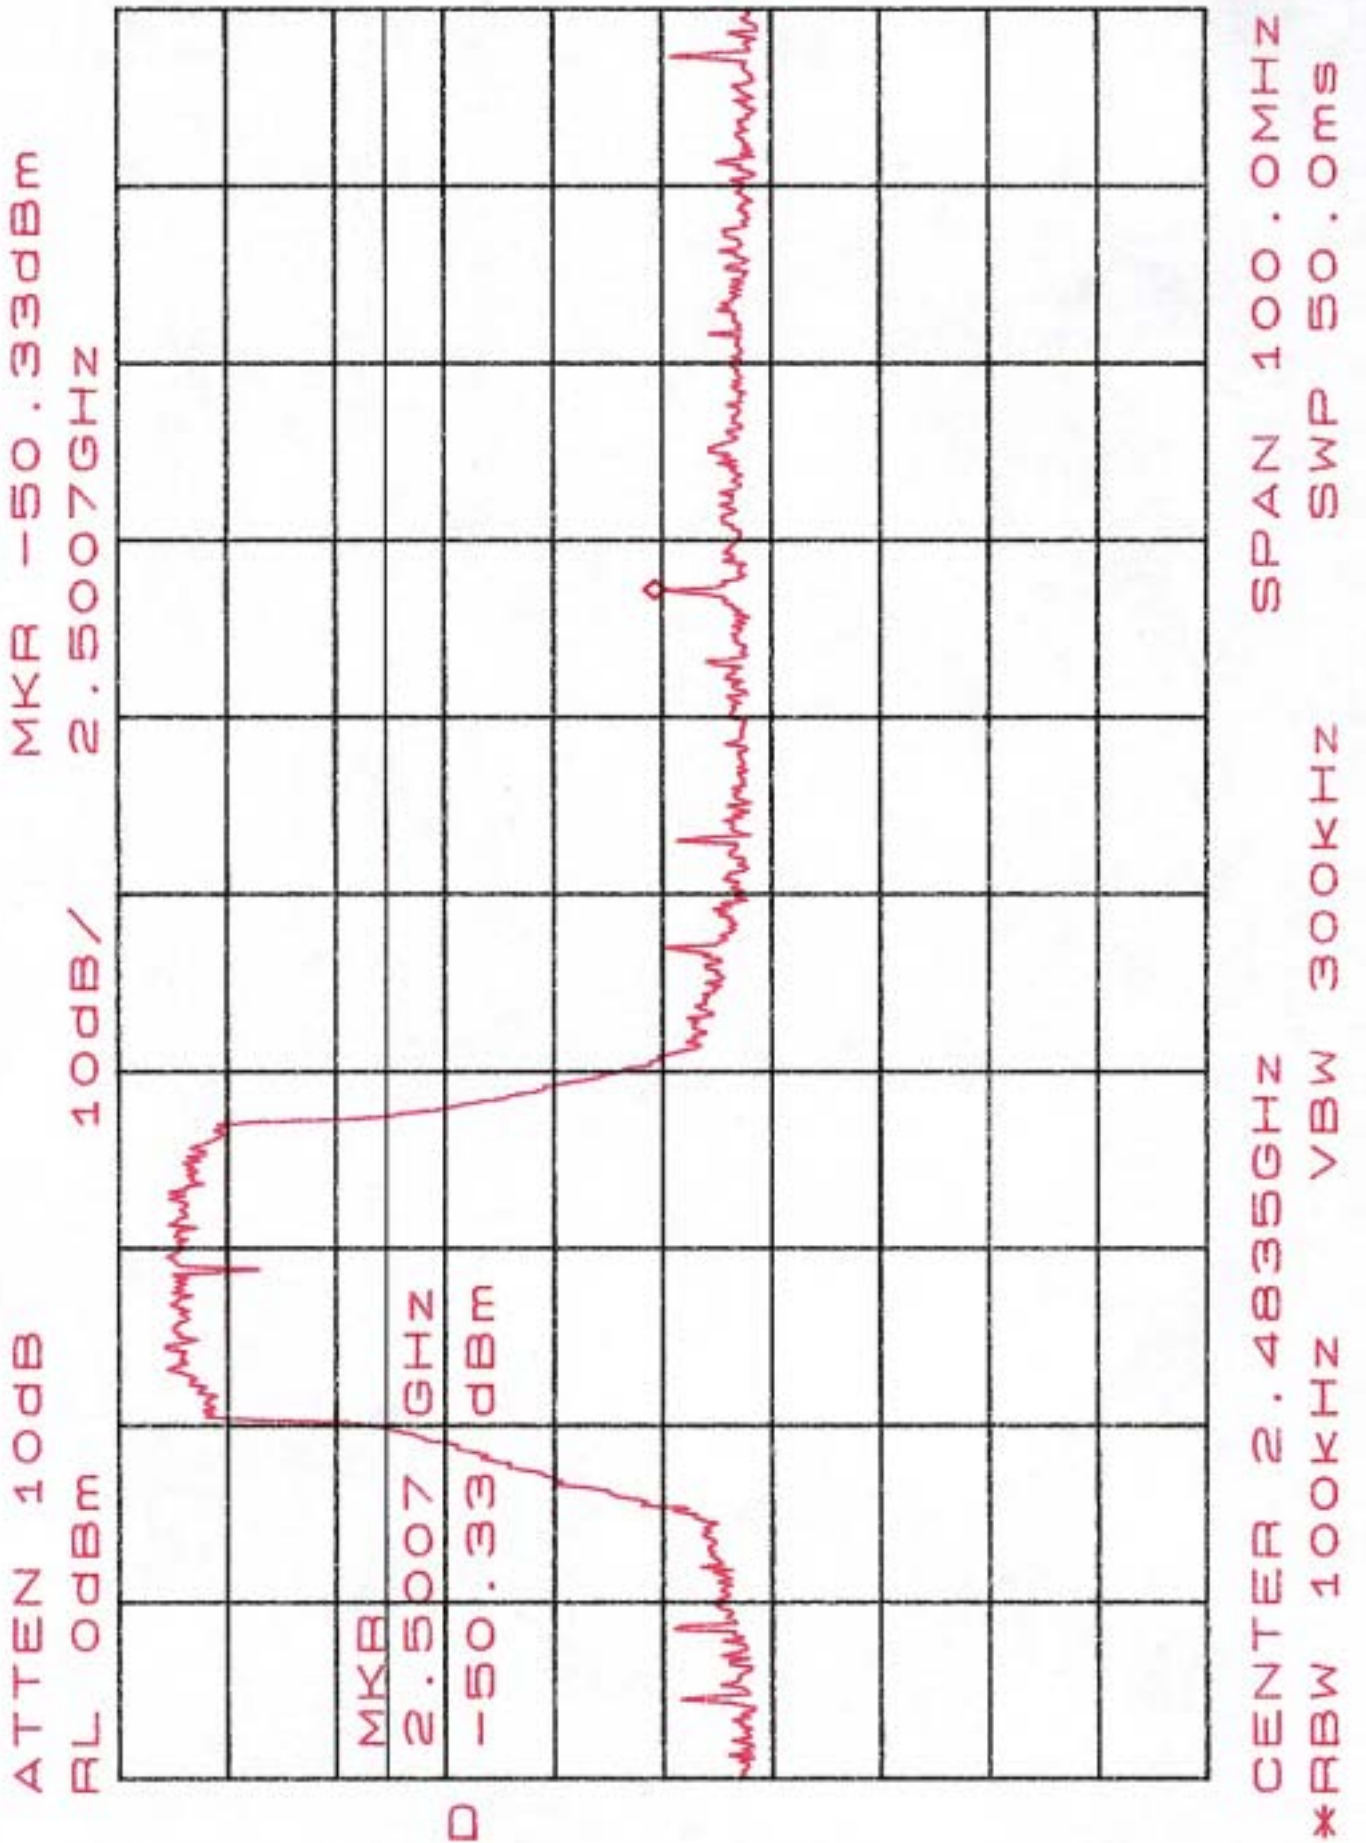

Appendix 6: Ploted Datas of Power Density

