

FCC Test Report

Report No.: AGC03709230501FR04

FCC ID : 2AI62-X7

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Rugged tablet

BRAND NAME : HUGEROCK

MODEL NAME : X7, X6, X60, X70, X71, X8, X80, X101

APPLICANT : SOTEN TECHNOLOGY (HONGKONG) CO., LIMITED

DATE OF ISSUE : Jan. 25, 2024

STANDARD(S)FCC Part 22 Subpart H
FCC Part 24 Subpart E

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 72

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 25, 2024	Valid	Initial Release






Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Related Submittal(S) / Grant (S)	8
2.3 Test Methodology	8
2.4 Device Capabilities	8
2.5 Special Accessories	8
2.6 Equipment Modifications	8
2.7 Emission Designator	9
3. Test Environment	10
3.1 Address of The Test Laboratory	10
3.2 Test Facility	10
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Test Equipment	12
4. System Test Configuration	13
4.1 EUT Configuration	13
4.2 EUT Exercise	13
4.3 Configuration of EUT System	13
4.4 Equipment Used in Tested System	13
5. Summary of Test Results	14
5.1 Test Condition: Conducted Test	14
5.2 Test Condition: Radiated Test	14
6. Description of Test Modes	15
7. Conducted Output Power	17
7.1 Provisions Applicable	17
7.2 Measurement Procedure	17
7.3 Measurement Setup	17
7.4 Measurement Result	18
8. Radiated Output Power	20
8.1 Provisions Applicable	20
8.2 Measurement Procedure	20
8.3 Measurement Setup	21
8.4 Measurement Result	23
9. Peak-to-Average Ratio	25
9.1 Provisions Applicable	25



Report No.: AGC03709230501FR04 Page 4 of 72

9.2 Measurement Procedure	25
9.3 Measurement Setup	26
9.4 Measurement Result	27
10. 99% Occupied Bandwidth and 26dB Emission Bandwidth	28
10.1 Provisions Applicable	28
10.2 Measurement Procedure	28
10.3 Measurement Setup	28
10.4 Measurement Result	29
11. Band Edge Emissions at Antenna Terminal	34
11.1 Provisions Applicable	34
11.2 Measurement Procedure	34
11.3 Measurement Setup	34
11.4 Measurement Result	35
12. Spurious Emissions at Antenna Terminal	38
12.1 Provisions Applicable	38
12.2 Measurement Procedure	38
12.3 Measurement Setup	38
12.4 Measurement Result	39
13. Radiated Spurious Emission	50
13.1. Provisions Applicable	50
13.2. Measurement Procedure	50
13.3. Measurement Setup	52
13.4 Measurement Result	53
14. Frequency Stability / Variation of Ambient Temperature	61
14.1 Provisions Applicable	61
14.2 Measurement Procedure	61
14.3 Measurement Setup	62
14.4 Measurement Result	63
Appendix I: Photographs of Test Setup	72
Appendix II: Photographs of EUT	72



Page 5 of 72

1. General Information

SOTEN TECHNOLOGY (HONGKONG) CO., LIMITED		
FLAT/RM A10 9/F SILVERCORP INTERNATIONAL TOWER 707-713 NATHAN ROAD MONGKOK KL HONG KONG		
Shenzhen SOTEN Technology Co., Ltd		
10th Floor, 2nd Building, BaiWang Research and development building, No. 5308 Shahe west road, Xili, Nanshan district, ShenZhen, China		
Shenzhen SOTEN Technology Co., Ltd		
10th Floor, 2nd Building, BaiWang Research and development building, No. 5308 Shahe west road, Xili, Nanshan district, ShenZhen, China		
Rugged tablet		
HUGEROCK		
X7		
X6, X60, X70, X71, X8, X80, X101		
Just the model name is different		
Jun. 02, 2023		
Jun. 02, 2023~Jan. 25, 2024		
No any deviation from the test method		
Normal		
Pass		
AGCER-FCC-GSM&WCDMA-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang		
	Bibo Zhang (Project Engineer)	Jan. 25, 2024	
Reviewed By	Calin Liu		
	Calvin Liu (Reviewer)	Jan. 25, 2024	
Approved By	Max Zhang		
	Max Zhang Authorized Officer	Jan. 25, 2024	



Page 6 of 72

2. Product Information

2.1 Product Technical Description

Support Networks	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA				
Hardware Version	X7V1-MainBoard_P4				
Software Version	X7_2021_PAD_EN_20240105_13_GMS				
	⊠GPRS 850	⊠PCS1900	⊠UMTS FDD Band II		
Cuppert Frequency Dand	☐UMTS FDD Band IV	⊠UMTS FDD Band V	(Non-U.S. Bands)		
Support Frequency Band	⊠GSM 900	⊠DCS 1800	☑UMTS FDD Band I		
	⊠UMTS FDD Band VIII	(Non-U.S. Bands)			
	824.2MHz-848.8MHz (GS	SM/GPRS/EDGE 850)			
Fraguency Dongs	1850.2MHz-1909.8MHz (GSM/GPRS/EDGE 1900)			
Frequency Range	1852.4MHz-1907.6MHz (WCDMA Band II)			
	826.4MHz-846.6 MHz (WCDMA Band V)				
Type of Modulation	GMSK/8PSK Modulation	For GSM/GPRS/EDGE			
Type of Modulation	BPSK/QPSK Modulation For WCDMA/HSDPA/HSUPA				
	GSM/GPRS 850:	247KGXW			
	EDGE 850:	250KG7W			
Emission Designator	GSM/GPRS 1900:	248KGXW			
Emission Designator	EDGE 1900:	253KG7W			
	WCDMA Band II:	4M19F9W			
	WCDMA Band V:	4M19F9W			
Antenna Designation	PIFA Antenna				
Antenna Gain	GSM850:-1.41dBi	PCS1900:2.26dBi			
Antenna Gain	WCDMA850:-1.41dBi	WCDMA1900:2.26dBi			
Power Supply	DC 3.7V by battery				
Dual Card	GSM /WCDMA Card Slot				
Extreme Vol. Limits DC 3.15V to 4.20V (Normal: DC 3.7V)					
Extreme Temp. Tolerance	Extreme Temp. Tolerance -30 °C to +50 °C				
Temperature Range -20°C to +50°C					



Page 7 of 72

GSM/WCDMA SLOT 1:

	Maximum ERP/EIRP	Max. Average		
	(dBm)	Burst Power (dBm)		
GSM 850	30.25	33.08		
PCS 1900	27.37	29.04		
UMTS BAND V	19.86	21.50		
UMTS BAND II	17.87	19.78		

GSM/WCDMA SLOT 2:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	29.87	31.25	
PCS 1900	25.19	27.33	
UMTS BAND V	17.19	19.31	
UMTS BAND II	15.45	17.62	



Page 8 of 72

2.2 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2Al62-X7**, filing to comply with Part 2, Part 22/24 of the Federal Communication Commission rules.

2.3 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.		
2	47 CFR FCC Part 22	Public Mobile Services.		
3	47 CFR FCC Part 24	Personal Communications Services.		
4	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters		
		Used in Licensed Radio Services		
5	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and		
5	ANSI/11A-603-E-2016	Performance Standards		
6	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital		
О		Transmitters.		

2.4 Device Capabilities

850/1900 GSM/GPRS/EGPRS,850/1900 WCDMA/HSPA, Multi-Band LTE,802.11 b/g/n for WLAN, Bluetooth (1X,EDR,LE).

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device supports dual-SIM communication, and only the data corresponding to the worst card slot (SIM Card 1) is reflected in the report.

2.5 Special Accessories

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 Equipment Modifications

Not available for this EUT intended for grant.



Page 9 of 72

2.7 Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



Page 10 of 72

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 72

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions	
Temperature range	15~35 ℃	-20℃~50℃	
Humidty range	20 % to 75 %.	20 % to 75 %.	
Pressure range	86-106kPa	86-106kPa	
Power supply	DC 3.7V	DC 3.15V or 4.2V	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

Test	Measurement Uncertainty	
Transmitter power conducted	±0.57 dB	
Transmitter power Radiated	±2.20 dB	
Conducted spurious emission 9kHz-40 GHz	±2.20 dB	
Occupied Bandwidth	±0.01ppm	
Radiated Emission 30~1000MHz	±4.10dB	
Radiated Emission Above 1GHz	±4.32dB	
Conducted Disturbance:0.15~30MHz	±3.20dB	
Radio Frequency	± 6.5 x 10-8	
RF Power, Conducted	± 0.9 dB	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 12 of 72

3.5 List of Test Equipment

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
\boxtimes	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2022-07-07	2023-07-06
	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2021-05-13	2023-05-12
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
\boxtimes	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2024-06-02
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-11-13	2024-11-12
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
\boxtimes	AGC-EM-A113	Band Stop Filter (825-850MHz)	MICRO-TRONICS	BRC50717	N/A	2023-06-01	2024-05-31
	AGC-EM-A114	Band Stop Filter (880-890MHz)	MICRO-TRONICS	BRC50718	N/A	2023-06-01	2024-05-31
	AGC-EM-A115	Band Stop Filter (1710-1785MHz)	MICRO-TRONICS	BRC50719	N/A	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A116	Band Stop Filter (1850-1950MHz)	MICRO-TRONICS	BRC50720	N/A	2023-06-01	2024-05-31
	AGC-EM-A117	Band Stop Filter (1920-1980MHz)	MICRO-TRONICS	BRC50721	N/A	2023-06-01	2024-05-31



Page 13 of 72

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of EUT System

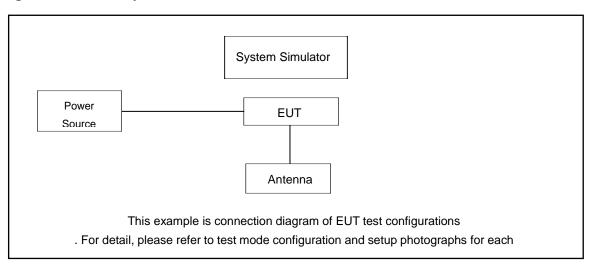


Table 2-1 Equipment Used in EUT System

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Huawei adapter	HW-200325CP0	huawei	Input: AC100-240V 50/60Hz,1.8A Output: DC 5V2A	1.0m unshielded

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Battery	608297P	SHENZHEN City Waitley Power CO.,LTD	DC 3.7V 7000mAh	
2	USB Cable	N/A	N/A	N/A	1.0m unshielded



Page 14 of 72

5. Summary of Test Results

5.1 Test Condition: Conducted Test

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a)	Pass
3	Conducted Output Power	§2.1046	Pass
4	Frequency stability / variation of ambient temperature	§2.1055, § 22.355, §24.235	Pass
5	Peak- to- Average Ratio	§24.232(d)	Pass

5.2 Test Condition: Radiated Test

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a),	Pass



Page 15 of 72

6. Description of Test Modes

		RF Channel			
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)	
GSM/GPRS/	TX	Channel 128	Channel 190	Channel 251	
EDGE850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz	
	TX	Channel 4132	Channel 4182	Channel 4233	
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz	

Bands	Tx/Rx Frequency	RF Channel			
Barras		Low(L)	Middle(M)	High(H)	
GSM/GPRS/	TX	Channel 512	Channel 661	Channel 810	
EDGE1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz	
TX		Channel 9262	Channel 9400	Channel 9538	
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz	

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
	GSM (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link
GSM/GPRS/	GPRS (GMSK, 1Tx-slot) Link	GPRS (GMSK, 1Tx-slot) Link
EDGE 850/1900	EDGE (8PSK, 1Tx-slot) Link	EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/V	RMC 12.2kbps Link	RMC 12.2kbps Link



Page 16 of 72

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)		
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAY(CM 1 O)		
HS-DPDCH,E-DPDCH and E-DPCCH	US CIVISS.S	MAX(CM-1,0)		
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{bc}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH.				

Note: CM=1 for β_c/β_d =12/15, β_{hs}/β_c =24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Page 17 of 72

7. Conducted Output Power

7.1 Provisions Applicable

The conduction test is carried out in a shielded room. According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)


7.2 Measurement Procedure

- ➤ The transmitter output port was connected to base station.
- > The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- > The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II,WCDMA/HSPA band V)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

7.3 Measurement Setup

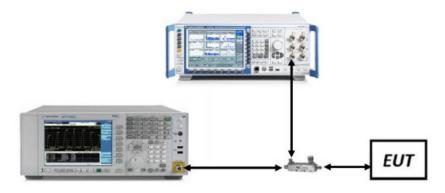




Report No.: AGC03709230501FR04 Page 18 of 72

7.4 Measurement Result

GSM 850 Maximum Average Power (dBm)					
Channel	128	190	251		
Frequency (MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
GSM (GMSK, 1Tx-slot)	32.33	33.08	33.01		
GPRS (GMSK, 1Tx-slot)	32.32	33.06	32.99		
GPRS (GMSK, 2Tx-slot)	30.15	30.58	30.74		
GPRS (GMSK, 3Tx-slot)	29.63	29.11	29.08		
GPRS (GMSK, 4Tx-slot)	27.53	27.42	27.48		
EDGE (8PSK, 1Tx-slot)	27.54	27.81	28.23		
EDGE (8PSK, 2Tx-slot)	25.52	25.77	25.15		
EDGE (8PSK, 3Tx-slot)	23.69	23.30	23.62		
EDGE (8PSK, 4Tx-slot)	20.53	20.44	20.27		

PCS 1900 Maximum Average Power (dBm)					
Channel	512	661	810		
Frequency (MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz		
GSM (GMSK, 1Tx-slot)	29.04	28.85	28.42		
GPRS (GMSK, 1Tx-slot)	29.02	28.83	28.39		
GPRS (GMSK, 2Tx-slot)	26.69	27.01	27.12		
GPRS (GMSK, 3Tx-slot)	24.25	24.33	24.19		
GPRS (GMSK, 4Tx-slot)	22.07	22.14	22.34		
EDGE (8PSK, 1Tx-slot)	25.74	26.04	26.16		
EDGE (8PSK, 2Tx-slot)	23.42	24.23	24.12		
EDGE (8PSK, 3Tx-slot)	21.38	22.05	22.07		
EDGE (8PSK, 4Tx-slot)	19.76	20.15	20.36		





WCDMA Band V Maximum Average Power (dBm)					
Channel	4132	4182	4233		
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz		
RMC 12.2kbps	21.50	21.46	21.36		
HSDPA Subtest-1	20.57	20.42	20.43		
HSDPA Subtest-2	20.03	19.88	19.94		
HSDPA Subtest-3	20.07	19.92	20.02		
HSDPA Subtest-4	20.04	19.85	19.91		
HSUPA Subtest-1	16.81	16.45	16.19		
HSUPA Subtest-2	17.35	16.96	16.69		
HSUPA Subtest-3	17.84	17.47	17.21		
HSUPA Subtest-4	16.87	16.48	16.20		
HSUPA Subtest-5	18.85	18.48	18.17		

WCDMA Band II Maximum Average Power (dBm)					
Channel	9262	9400	9538		
Frequency (MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz		
RMC 12.2kbps	19.78	19.39	19.14		
HSDPA Subtest-1	18.81	18.42	18.15		
HSDPA Subtest-2	18.34	17.94	17.65		
HSDPA Subtest-3	18.35	17.97	17.70		
HSDPA Subtest-4	18.35	17.96	17.68		
HSUPA Subtest-1	16.81	16.45	16.19		
HSUPA Subtest-2	17.35	16.96	16.69		
HSUPA Subtest-3	17.84	17.47	17.21		
HSUPA Subtest-4	16.87	16.48	16.20		
HSUPA Subtest-5	18.85	18.48	18.17		



Page 20 of 72

8. Radiated Output Power

8.1 Provisions Applicable

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

8.2 Measurement Procedure

- 1. Radiated power measurements are performed using the signal analyzer's "channel power"
- 2. measurement capability for signals with continuous operation.
- 3. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 4. VBW \geq 3 x RBW
- 5. Span = 1.5 times the OBW
- 6. No. of sweep points > 2 x span / RBW
- 7. Detector = RMS
- 8. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 9. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 10. Trace mode = trace averaging (RMS) over 100 sweeps
- 11. The trace was allowed to stabilize.





Radiation Construction Method:


- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 3. The power is calculated by the following formula:


Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)

- 4. Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
- 5. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 6. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 7. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.


8.3 Measurement Setup

Radiated Power 30MHz to 1GHz Test setup

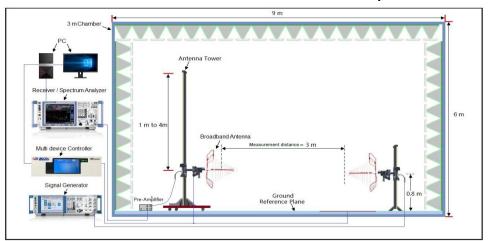







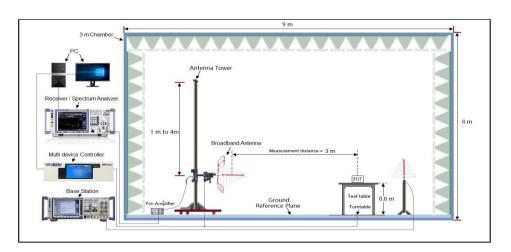

Radiated Power Above 1GHz Test setup

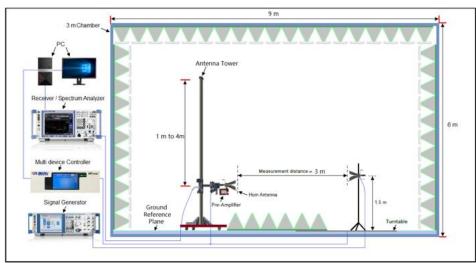

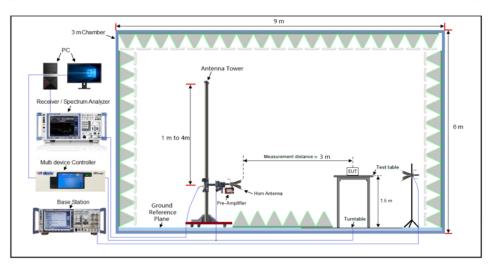

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 23 of 72

8.4 Measurement Result

	Ch./ Freq.		Substitute	Ant. Gain			Limit	ERP	
Mode	channel	Freq. (MHz)	Level (dBm)	(dBi)	C.L	Pol.	w	w	dBm
	128	824.2	25.56	5.90	1.21	Н		1.059	30.25
GSM850	190	836.6	25.49	5.90	1.22	Н		1.040	30.17
	251	848.8	25.57	5.90	1.25	Н		1.052	30.22
	128	824.2	20.49	5.90	1.21	Н		0.330	25.18
EDGE	190	836.6	20.49	5.90	1.22	Н		0.329	25.17
	251	848.8	20.68	5.90	1.25	Н		0.341	25.33
	4132	826.4	15.17	5.90	1.21	Н	< 7.00	0.097	19.86
WCDMA850	4183	836.6	15.09	5.90	1.25	Н		0.094	19.74
	4233	846.6	15.18	5.90	1.24	Н		0.096	19.84
HSPA	4132	826.4	12.94	5.90	1.21	Н		0.058	17.63
	4183	836.6	12.87	5.90	1.25	Н		0.056	17.52
	4233	846.6	13.04	5.90	1.24	Н		0.059	17.70





Mode	Ch./ Freq.		Substitute	Ant. Gain			Limit	EII	RP
	channel	Freq. (MHz)	Level (dBm)	(dBi)	C.L	Pol.	w	w	dBm
	512	1850.2	20.88	8.6	2.11	Н		0.546	27.37
PCS1900	661	1880.0	19.69	8.6	2.15	Н	0.00	0.411	26.14
	810	1909.8	19.90	8.6	2.15	Н		0.432	26.35
	512	1850.2	18.91	8.6	2.11	Н		0.347	25.40
EDGE	661	1880.0	19.36	8.6	2.15	Н		0.381	25.81
	810	1909.8	18.75	8.6	2.15	Н		0.331	25.20
MODMA	9262	1852.4	11.26	8.6	2.11	Н	< 2.00	0.060	17.75
WCDMA	9400	1880.0	11.15	8.6	2.15	Н		0.058	17.60
1900	9538	1907.6	11.42	8.6	2.15	Н		0.061	17.87
HSPA	9262	1852.4	10.26	8.6	2.11	Н		0.047	16.75
	9400	1880.0	10.15	8.6	2.15	Н		0.046	16.60
	9538	1907.6	10.42	8.6	2.15	Н		0.049	16.87

Note:

- 1. EIRP/ERP = Substitute Level (dBm) + Ant. Gain C.L (Cable Loss)
- 2. All polarizations and modes have been tested, only the worst mode is recorded in the report



Page 25 of 72

9. Peak-to-Average Ratio

9.1 Provisions Applicable

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

9.2 Measurement Procedure

CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
- 4. that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:

 $P.A.R(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) (P_{Avg} = Average Power + Duty cycle Factor)$


Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

■ Test Settings (Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW \geq 3 × RBW.

- 1. Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 × RBW.
- 3. Set span ≥ 2 × OBW.






- Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

Test Settings (Average Power)

- 1. Set span to 2 x to 3 x the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (Automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

9.3 Measurement Setup

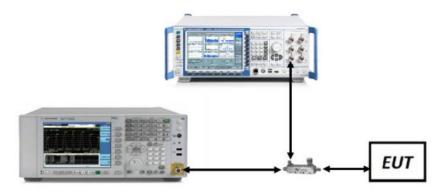



Page 27 of 72

9.4 Measurement Result

Bands	Modulation	Peak-t	o-average rat	Limit	Result	
Danus	Modulation	Lowest	Middle	Highest	(dB)	Result
OCM 050	GSM	2.62	2.62	2.61	13	Pass
GSM 850	EDGE	5.72	5.69	5.73	13	Pass
DCS 4000	GSM	2.65	2.64	2.64	13	Pass
PCS 1900	EDGE	5.43	5.25	5.05	13	Pass
WCDMA Band II	RMC 12.2kbps	2.80	2.75	2.81	13	Pass
WCDMA Band II	HSUPA	2.94	2.83	2.93	13	Pass
WCDMA Band II	HSDPA	4.22	4.55	4.62	13	Pass
WCDMA Band V	RMC 12.2kbps	2.65	2.70	2.61	13	Pass
WCDMA Band V	HSUPA	2.88	2.90	2.84	13	Pass
WCDMA Band V	HSDPA	4.23	4.80	4.83	13	Pass

Page 28 of 72

10. 99% Occupied Bandwidth and 26dB Emission Bandwidth

10.1 Provisions Applicable

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

10.2 Measurement Procedure

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99%
- 2. Occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by
- 3. any intermediate power nulls in the fundamental emission.
- 4. RBW = 1 5% of the expected OBW
- 5. VBW \geq 3 x RBW
- 6. Detector = Peak
- 7. Trace mode = max hold
- 8. Sweep = auto couple
- 9. The trace was allowed to stabilize
- 10. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
- 11. 1-5% of the 99% occupied bandwidth observed in Step 7

10.3 Measurement Setup

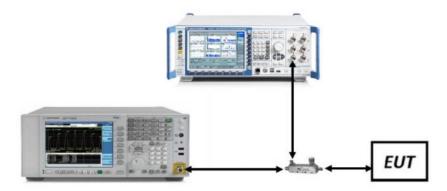



Page 29 of 72


10.4 Measurement Result

Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
GSM 850		LCH	247.2	316	Pass
	GSM	MCH	243.2	314	Pass
		HCH	246.8	316	Pass
		LCH	247.4	311	Pass
	EDGE	MCH	249.5	310	Pass
		HCH	246.3	310	Pass


Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
	GSM EDGE	LCH	244.1	313	Pass
		MCH	248.0	321	Pass
DCS 1000		HCH	245.4	310	Pass
PCS 1900		LCH	250.4	314	Pass
		MCH	252.1	321	Pass
		HCH	252.6	323	Pass


Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
WCDMA 850	UMTS	LCH	4.1792	4.728	Pass
		МСН	4.1904	4.728	Pass
		HCH	4.1819	4.723	Pass

Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
WCDMA 1900	UMTS	LCH	4.1861	4.732	Pass
		MCH	4.1889	4.737	Pass
		HCH	4.1931	4.748	Pass







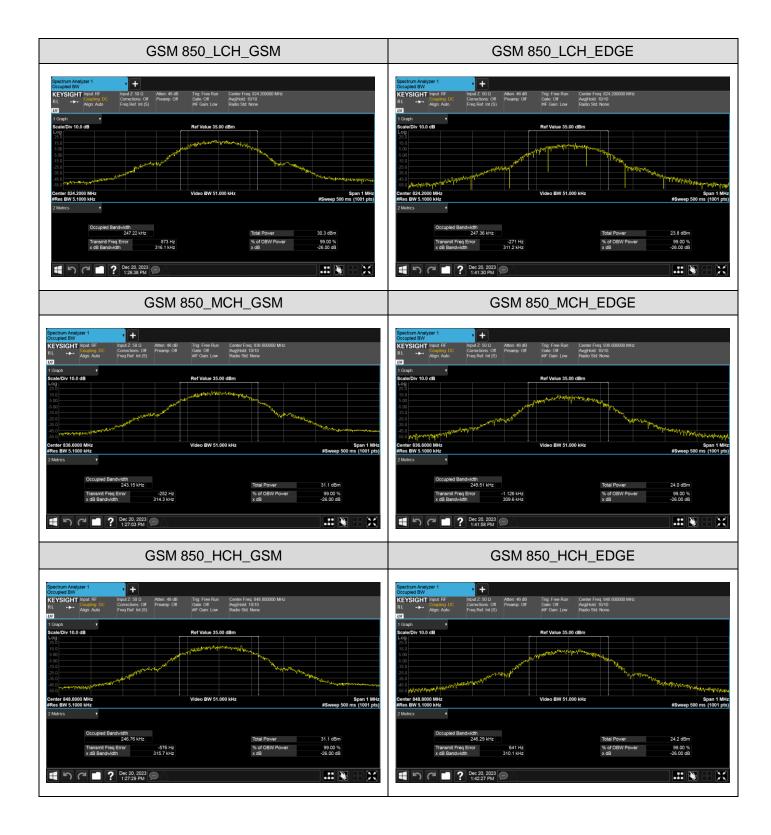







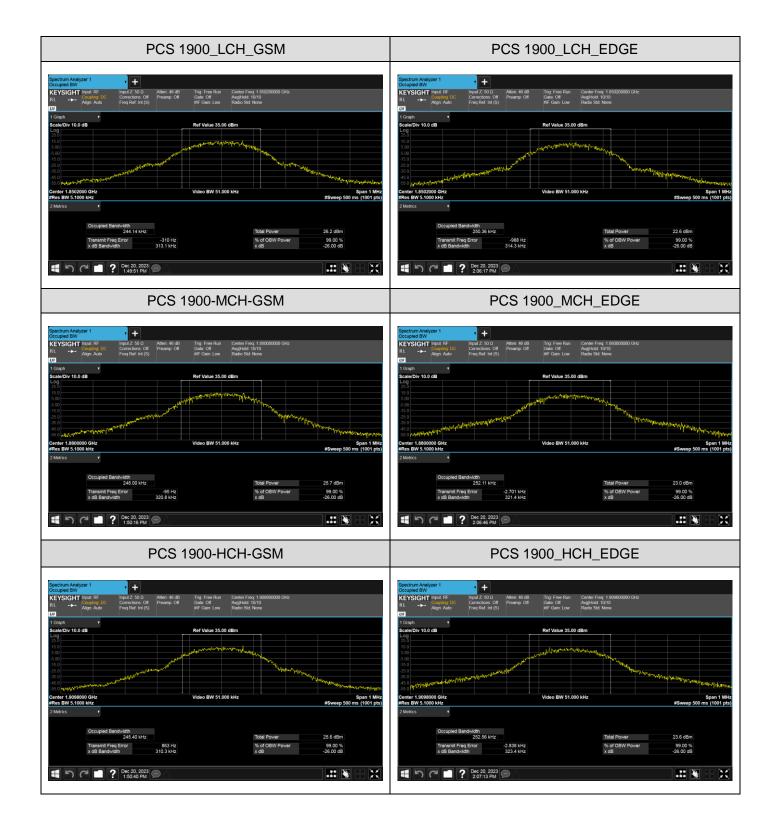






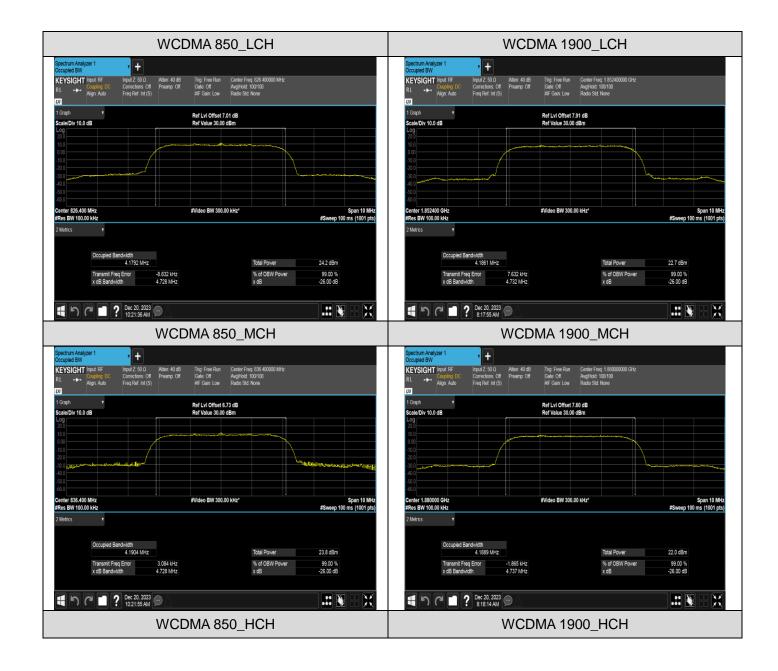











Page 34 of 72

11. Band Edge Emissions at Antenna Terminal

11.1 Provisions Applicable

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


11.2 Measurement Procedure


- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

Test Note

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


11.3 Measurement Setup

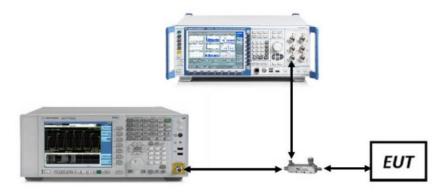








11.4 Measurement Result

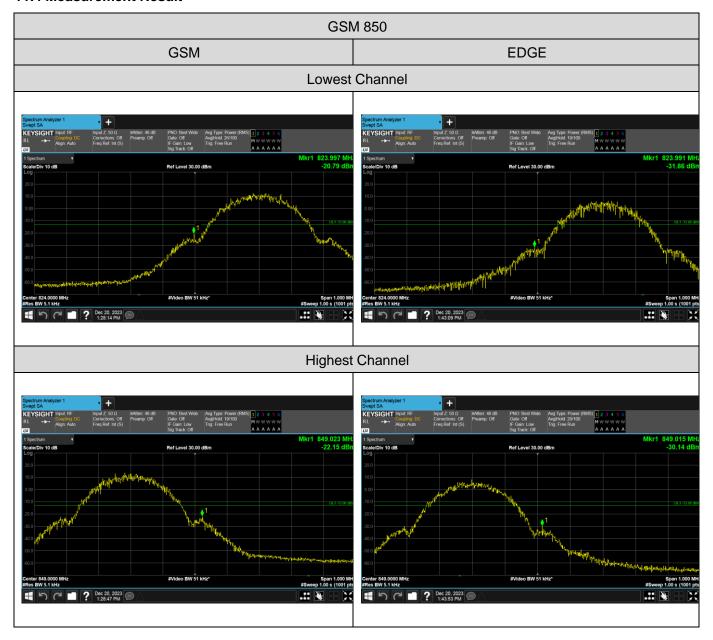






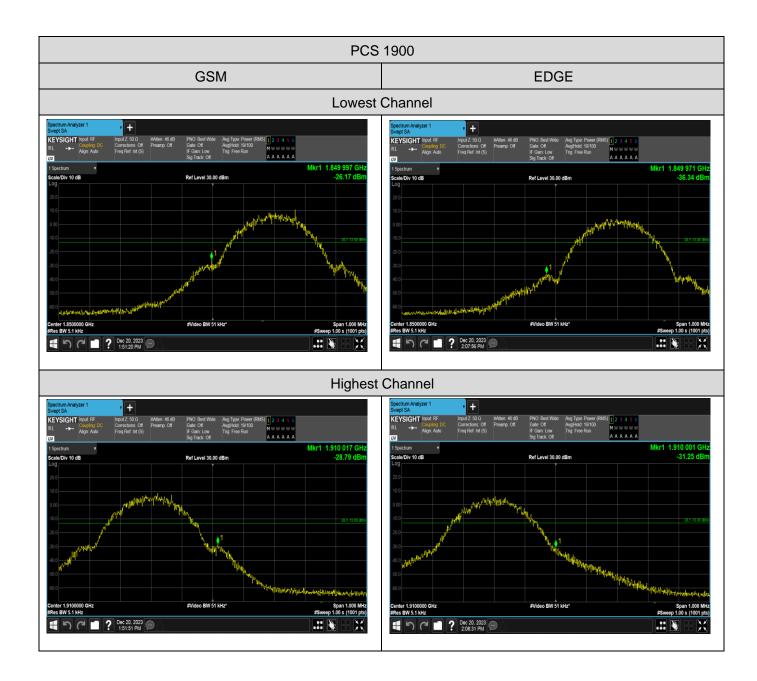





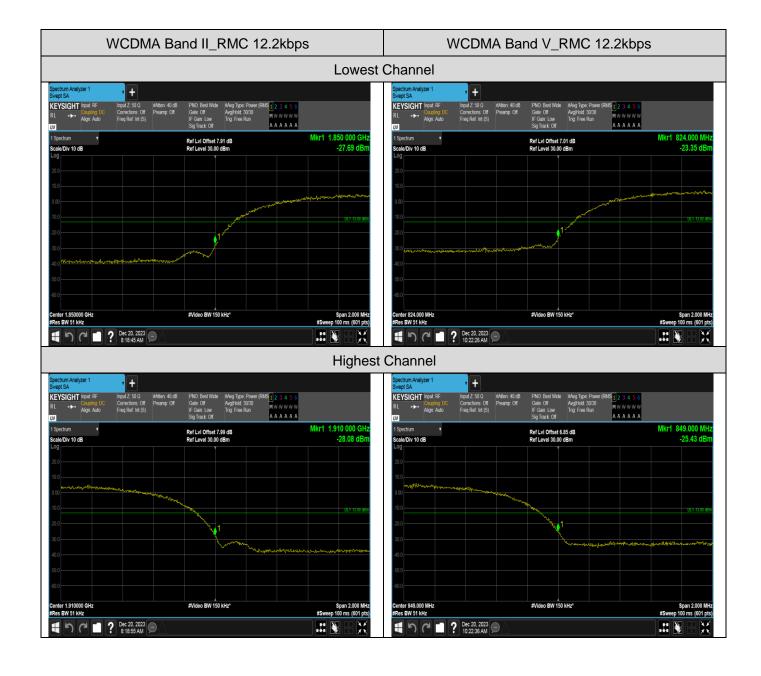



12. Spurious Emissions at Antenna Terminal

12.1 Provisions Applicable

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

12.2 Measurement Procedure


■ Test Settings (GSM)


- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

■ Test Settings (WCDMA)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

12.3 Measurement Setup

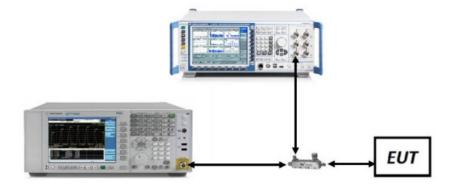





12.4 Measurement Result

