

FCC Test Report

Report No.: AGC01110240805FR02A

FCC ID	: 2AOKB-A3331R		
APPLICATION PURPOSE	:	Class II Permissive Change	
PRODUCT DESIGNATION	:	Wireless Headphone	
BRAND NAME	:	soundcore	
MODEL NAME	:	A3331R	
APPLICANT	:	Anker Innovations Limited	
DATE OF ISSUE	:	Apr. 21, 2025	
STANDARD(S)	:	FCC Part 15 Subpart C §15.247	
REPORT VERSION	:	V1.0	







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Apr. 21, 2025	Valid	Initial Release	

Note: The original test report AGC01110240805FR02 (dated Aug. 28, 2024 and tested from Aug. 05, 2024 to Aug. 27, 2024) was modified on Apr. 21, 2025, including the following changes and additions:

Changed the earphone battery, the batteries are the same except for the model name and manufacturer;

For the above described change(s) the following tests was considered to be necessary:

Clause	Testing
§15.209	Radiated Emission



Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	
3.5 List of Equipment Use	
4.System Test Configuration	11
4.1 EUT Configuration	11
4.2 EUT Exercise	11
4.3 Configuration of Tested System	11
4.4 Equipment Used In Tested System	11
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Radiated Spurious Emission	
6.1 Measurement Limit	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	Anker Innovations Limited		
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong		
Manufacturer	Anker Innovations Limited		
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong		
Factory	N/A		
Address	N/A		
Product Designation	Wireless Headphone		
Brand Name	soundcore		
Test Model	A3331R		
Date of receipt of test item	Mar. 26, 2025		
Date of Test	Apr. 08, 2025~ Apr. 21, 2025		
Deviation from Standard	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Test Report Form No	AGCER-FCC-BLE-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

XCI-Li Prepared By Cici Li Apr. 21, 2025 (Project Engineer) Calvin Lin

Reviewed By

Calvin Liu (Reviewer)

Apr. 21, 2025

Approved By

Angela Li (Authorized Officer)

Apr. 21, 2025



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): 1.416dBm Bluetooth LE (2Mbps): 1.518dBm
Hardware Version	V1.2
Software Version	V1.0
Antenna Designation	FPC Antenna
Antenna Gain	-2.7dBi
Power Supply	DC 3.85V, 70mAh by battery



2.2 Test Frequency List

Frequency Band	Channel Number	Frequency	
	0	2402 MHz	
	1	2404 MHz	
	:	:	
2400~2483.5MHz	19	2440MHz	
	:	:	
	38	2478 MHz	
	39	2480 MHz	
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.			



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A3331R**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -2.7dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions	
Temperature range (°C)	15 - 35	
Relative humidity range	20 % - 75 %	
Pressure range (kPa)	86 - 106	
Power supply	DC 3.85V	

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		



3.5 List of Equipment Use

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-03-27	2026-03-26	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

Test Software						
Used	ed Equipment No. Test Equipment Manufacturer Model No. Version Information					
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:

EUT

4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1				-	

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.209	Radiated Emission	Pass




5. Description of Test Modes

Summary Table of Test Cases					
Test Item	Data Rate / Modulation				
Test tieth	Bluetooth – LE(1Mbps/2Mbps) / GFSK				
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered)				
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered)				
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered)				
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered)				
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered)				
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered)				
AC Conducted Emission	Not applicable				

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

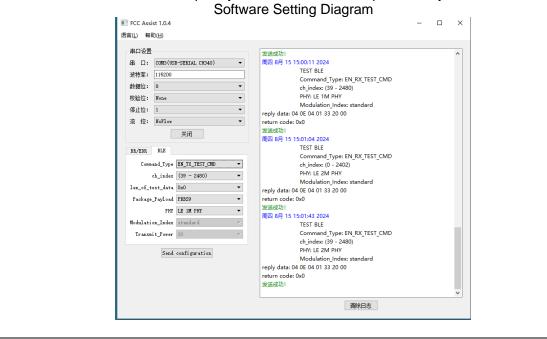



6. Radiated Spurious Emission

6.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

6.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. $VBW \ge [3 \times RBW]$
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




6.3 Measurement Setup (Block Diagram of Configuration)

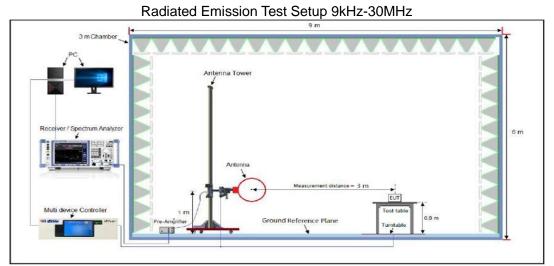

Radiated Emission Test Setup 30MHz-1000MHz

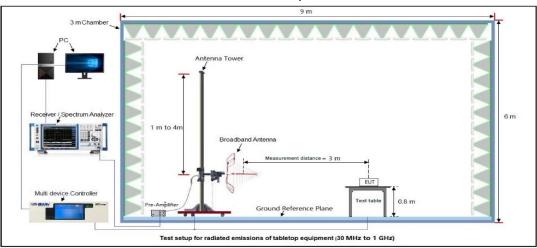

Radiated Emission Test Setup Above 1000MHz

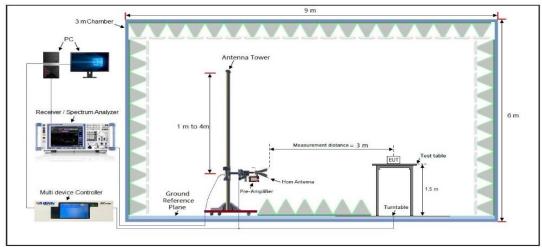

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com


 Web: http://www.agccert.com/



6.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

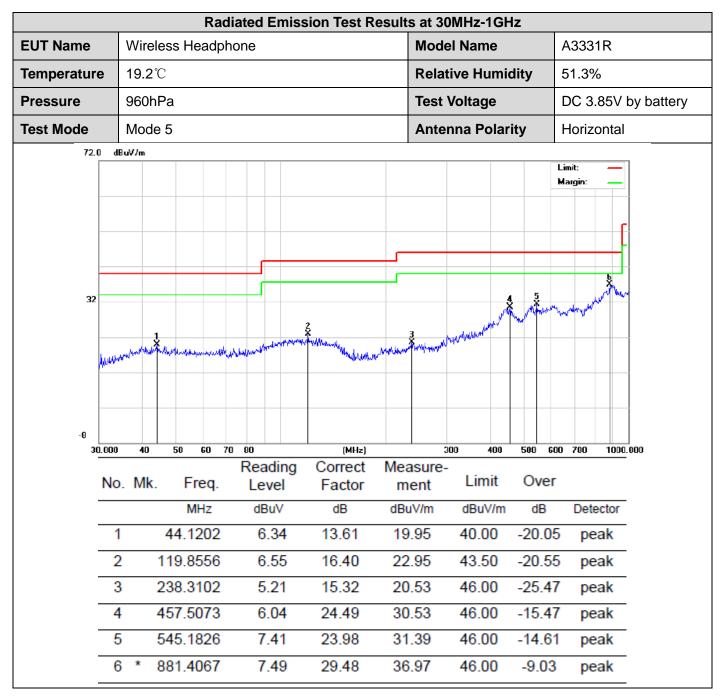

RESULT: Pass



		Rad	iated Emiss						
EUT Name	Wirele	ess Headph	one		Mode	el Name	/	A3331R	
Temperature	19.2°C	2		Rela	tive Humic	dity t	51.3%		
Pressure	960hF	Pa				Voltage	[DC 3.85V by battery	
Test Mode	Mode	5			Ante	nna Polari	ity \	Vertical	
72.0	dBuV/m								
32	Lugrand	hard meren and and		when have man the				Limit: — Margin: —	
-8 30.00	0 40	50 60 7	0 80	(MHz)		300 400	500 600	0 700 1000	
	o. Mk.	Freq.	Reading Level	Correct Factor	Measure ment		Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
	1	61.3462	7.87	17.09	24.96	40.00	-15.04	peak	
	2	139.3611	6.39	18.18	24.57	43.50	-18.93	peak	
	3 ;	345.5951	5.42	20.05	25.47	46.00	-20.53	peak	
	4 4	443.2943	0.27	25.95	26.22	46.00	-19.78	peak	
	5 (696.8567	3.80	28.04	31.84	46.00	-14.16	peak	
	6 * 9	952.0937	6.60	30.52	37.12	46.00	-8.88	peak	

RESULT: Pass

- **Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.
 - 2. All test modes had been pre-tested. The mode 5 is the worst case and recorded in the report.




EUT Name				Wireless	Wireless Headphone				odel N	lame			A3	3331R		
Temp	erat	ure		22.2 ℃				Re	Relative Humidity				60	60.9%		
Press	ure			960hPa				Tes	Test Voltage				D	DC 3.85V by battery		
Test N	Node	;		Mode 4					tenna	a Pola	arit	у	Н	orizontal		
		130					FCC Part	15C							· · · · · ·	
	120 110 100 90 80															
Image: Control of the second									-		.5		6			
		.	approved a start and a start as a	and a street way	and water and a start of the start of the	NAUNIKUMA	Manahahayahaha	WWWWWWW	walk	idelident piperiori	W	Service Street State	and the second			
		nturite stand	wije hulisistan gestiet in the second		A	a set a s	an a sur						1.11 ·			
		10														
		-10														
		1G			2G	30	6 4G Frequenc	y[Hz]	60	6	80	3			18G	
			 PK Limit AV Detect 	AV Limit tor	— Но	rizontal PK										
PK [Data	List														
NO.		Freq [MHz		Lev [dBµ\		Factor [dB]	Limit [dBµV/i			argin dB]		Heig [cm		Angle [°]	Polarity	
1	15	90.50	6034	35.2	26	-16.79	74.00)	38	3.74		150)	1	Horizontal	
2	25	78.83	8589	39.2	29	-12.17	74.00)	-	4.71		150)	105	Horizontal	
3	4803.720248			44.5		-7.81	74.00			9.49		150		11	Horizontal	
4		06.54		52.0		-3.65	74.00			2.00	150			154	Horizontal	
5			96907	49.2		2.51	74.00			4.72		150		37	Horizontal	
6	16	508.43	33896	48.5	8	5.63	74.00)	2	5.42		150)	304	Horizontal	
AV F	inal	Data I	List													
NO.		Freq. [MHz]		Factor [dB]	V	AV alue µV/m]	AV Limit [dBµV/m]		AV Ma [dE			Heigh [cm]	t	Angle [°]	Polarity	
1	720)5.898	35	-3.65		2.85	54.00		11.1	15		150		154	Horizontal	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



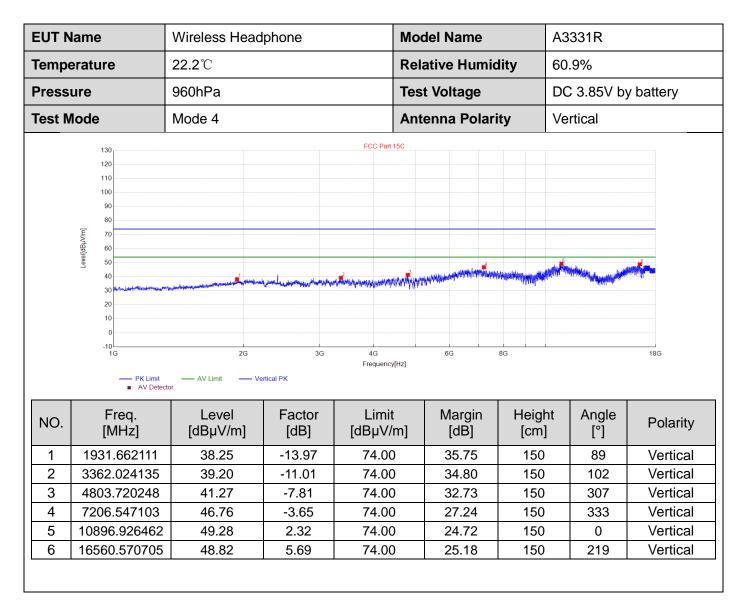

RESULT: Pass




	lame	Wireless Hea	dphone	Ν	lodel	Name		A3331R		
Temp	erature	22.2 °C	F	Relativ	e Humi	dity	60.9%			
Press	ure	960hPa	Test Voltage DC 3.85V by b					DC 3.85V by battery		
Test N	lode	Mode 5		A	ntenn	a Pola	rity	Horizontal		
_	130			FCC Part 15C						
	120									
	110									
	90									
	80									
	Image: Top of the second sec									
	50 50				2			a f a		
	40	and the state of the	water and an inder the angle the spectrum and a spe	unananan anan anan anan an	www.	have a faith of the second	with his in the particular			
	30 20									
	10									
	0									
	0 -10 1G	2G	3G	4G Frequency[Hz]		6G	8G		18G	
	-10	- AV Limit - Ho	3G rizontal PK	4G Frequency[Hz]		6G	8G			
	-10 1G PK Limit * AV Detecto	AV Limit Ho	rizontal PK	Frequency[Hz]						
NO.	-10 1G — PK Limit	- AV Limit - Ho			N	^{ag} Margin [dB]	^{8G} Heigł [cm]	•	18G Polarity	
NO. 1	-10 1G • PK Limit • AV Detecto Freq.	— AV Limit — Ho	rizontal PK	Frequency[Hz]]	<i>l</i> argin	Heigh			
	-10 1G PK Limit * AV Detecto Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Frequency[Hz] Limit [dBµV/m]	/largin [dB]	Heigl [cm]	[°] 31	Polarity	
1	-10 16 PK Limit * AV Detecto Freq. [MHz] 1570.104674	Level [dBµV/m] 35.04	Factor [dB] -16.96	Limit [dBµV/m 74.00]	Aargin [dB] 38.96	Heigl [cm] 150	[°] 31	Polarity Horizontal	
1 2	-10 16 -10 16 -10 16 -10 -10 -10 -10 -10 -10 -10 -10	Level [dBµV/m] 35.04 38.77	Factor [dB] -16.96 -12.12	Limit [dBµV/m 74.00 74.00]	Margin [dB] 38.96 35.23	Heigl [cm] 150	[°] 31 185 1	Polarity Horizontal Horizontal	
1 2 3	-10 1G PK Limit * AV Detecto Freq. [MHz] 1570.104674 2680.84539 4879.658644	Level He [dBμV/m] 35.04 38.77 43.12 46.31 46.31	Factor [dB] -16.96 -12.12 -7.80	Frequency[Hz]] N	Margin [dB] 38.96 35.23 30.88	Heigl [cm] 150 150	[°] 31 185 1 15	Polarity Horizontal Horizontal Horizontal	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



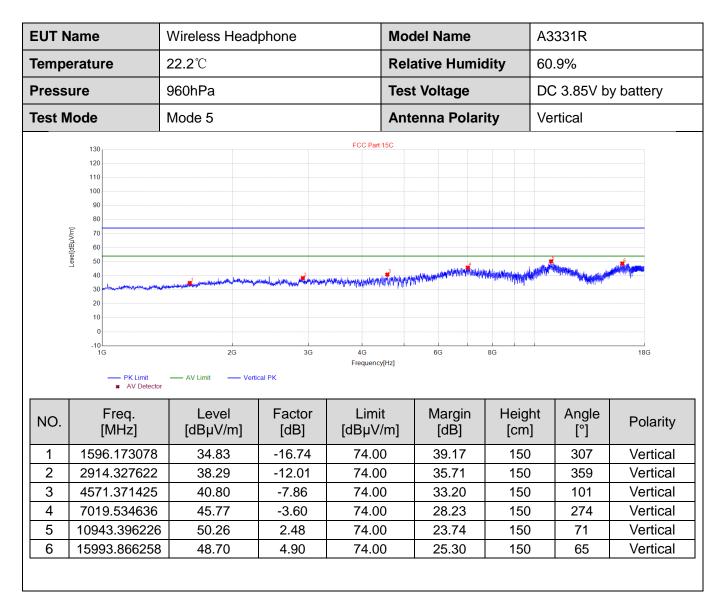

RESULT: Pass




EUT Name Temperature Pressure			Wireless Head	dphone	Mod	el Name	A	A3331R 60.9% DC 3.85V by battery			
			22.2 ℃		Rela	tive Humid	dity 60				
			960hPa		Test	Voltage	D				
Test Mode)	Mode 6		Ante	enna Polari	ity H	orizontal			
	1	130			FCC Part 15C		······				
		120									
		110									
		90									
		80									
	3	70 60									
	Level[c	50					4				
		40	and a constant stranger and a stranger and a stranger	an far an	ennergen angenergen angelegen angelegen a	al - shine and a second second second	where a subscription of the subscription of th	and an and the second			
		30 20									
		10									
		-10									
		1G	2G	3G	4G Frequency[Hz]	6G	8G		18G		
		PK Limit AV Dete		orizontal PK							
		Freq.	Level	Factor	Limit	Margin	Height	Angle			
NO.		[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity		
1	17	11.78078	5 35.79	-15.79	74.00	38.21	150	295	Horizontal		
2	26	26.44176	3 38.26	-12.14	74.00	35.74	150	282	Horizontal		
2		42.68284	39.79	-8.95	74.00	34.21	150	240	Horizontal		
2	42	42.00204			1	00.04	150	344	Horizontal		
		40.02933		-3.71	74.00	26.84	100	344	TIONZOIItai		
3	74		5 47.16	-3.71 2.47	74.00 74.00	26.84	150	223	Horizontal		

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



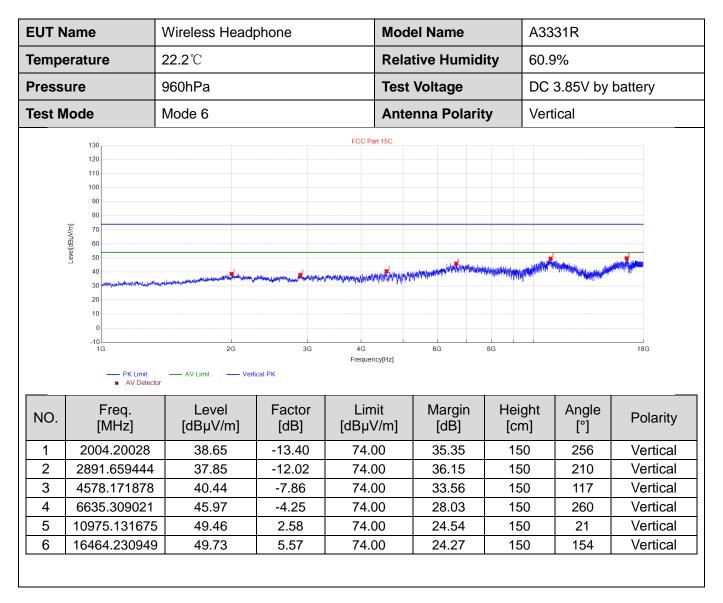

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been tested. The BLE GFSK 2Mbps modulation is the worst case and recorded in the report.
- 5. In the test diagram, the frequency point with a protrusion from 2 GHz to 3 GHz is the fundamental frequency of the EUT.



Report No.: AGC01110240805FR02A Page 26 of 27

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110240805AP01A

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110240805AP02A



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders. 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----