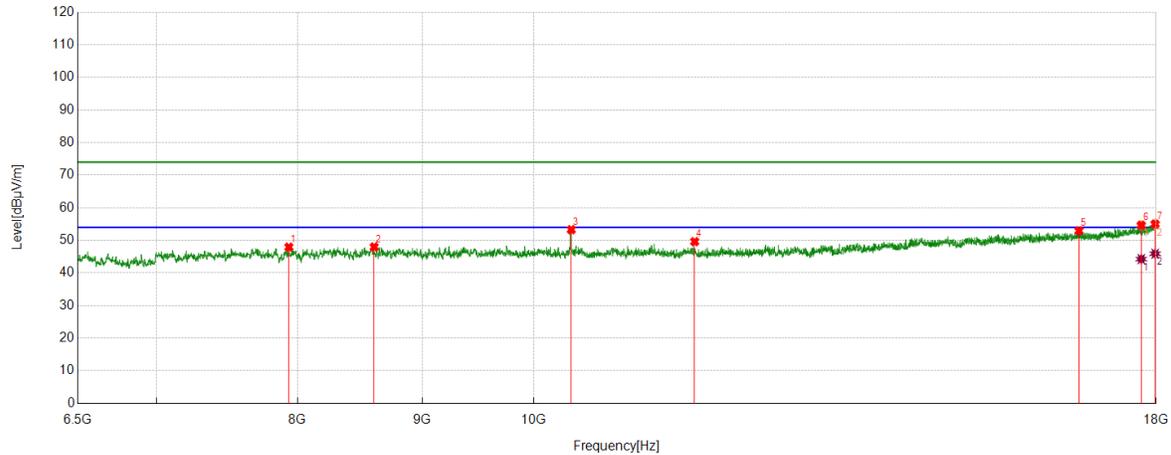


Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Horizontal	PASS


PK Result:

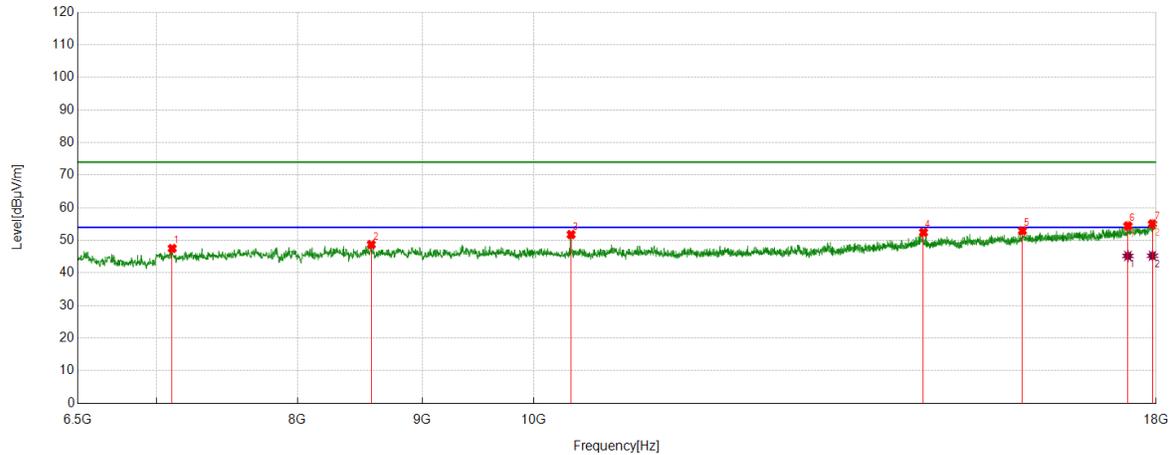
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7935.8226	42.34	5.58	47.92	74.00	-26.08	Horizontal
2	8601.0168	41.61	6.37	47.98	74.00	-26.02	Horizontal
3	10360.8101	46.58	6.70	53.28	74.00	-20.72	Horizontal
4	11641.3569	41.99	7.61	49.60	74.00	-24.40	Horizontal
5	16734.7891	36.91	16.04	52.95	74.00	-21.05	Horizontal
6	17748.8748	36.05	18.60	54.65	74.00	-19.35	Horizontal
7	17982.7471	35.20	19.81	55.01	74.00	-18.99	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17748.8748	25.66	18.60	44.26	54.00	-9.74	Horizontal
2	17982.7471	26.09	19.81	45.90	54.00	-8.10	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Vertical	PASS


PK Result:

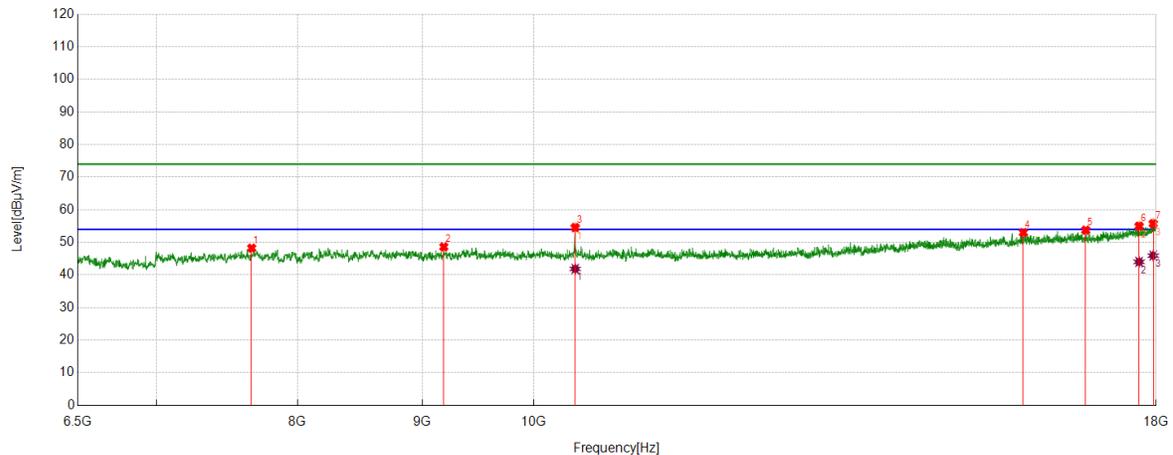
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7107.6846	43.62	3.89	47.51	74.00	-26.49	Vertical
2	8578.0130	42.30	6.40	48.70	74.00	-25.30	Vertical
3	10358.8931	45.08	6.70	51.78	74.00	-22.22	Vertical
4	14449.7416	39.49	12.93	52.42	74.00	-21.58	Vertical
5	15864.4774	38.28	14.66	52.94	74.00	-21.06	Vertical
6	17526.5044	36.84	17.59	54.43	74.00	-19.57	Vertical
7	17938.6564	35.62	19.44	55.06	74.00	-18.94	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17526.5044	27.62	17.59	45.21	54.00	-8.79	Vertical
2	17938.6564	25.83	19.44	45.27	54.00	-8.73	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7661.6936	43.07	5.14	48.21	74.00	-25.79	Horizontal
2	9185.6976	42.70	5.91	48.61	74.00	-25.39	Horizontal
3	10399.1499	47.84	6.72	54.56	74.00	-19.44	Horizontal
4	15877.8963	38.27	14.72	52.99	74.00	-21.01	Horizontal
5	16842.1404	37.49	16.25	53.74	74.00	-20.26	Horizontal
6	17712.4521	36.59	18.38	54.97	74.00	-19.03	Horizontal
7	17950.1584	36.26	19.49	55.75	74.00	-18.25	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10399.1499	35.13	6.72	41.85	54.00	-12.15	Horizontal
2	17712.4521	25.64	18.38	44.02	54.00	-9.98	Horizontal
3	17950.1584	26.44	19.49	45.93	54.00	-8.07	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

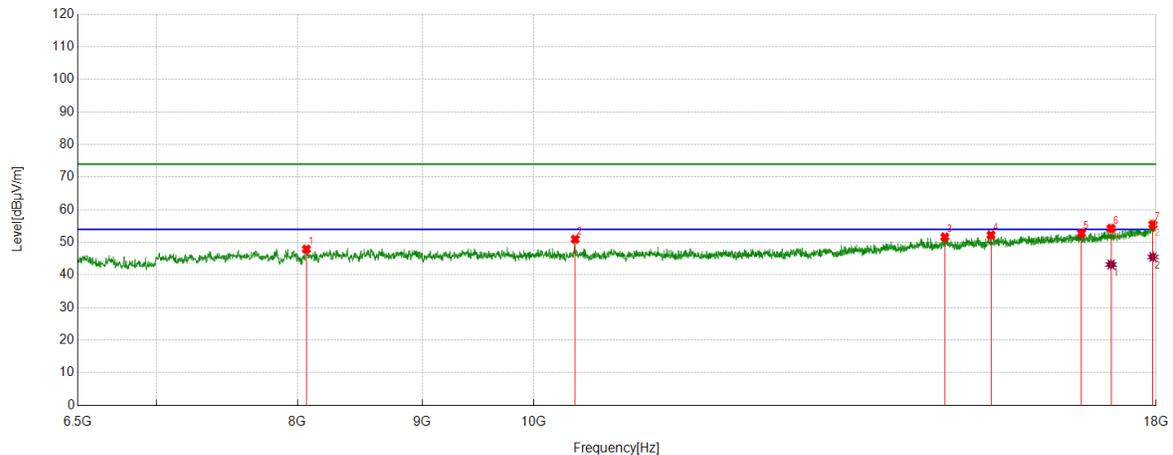
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Vertical	PASS


PK Result:

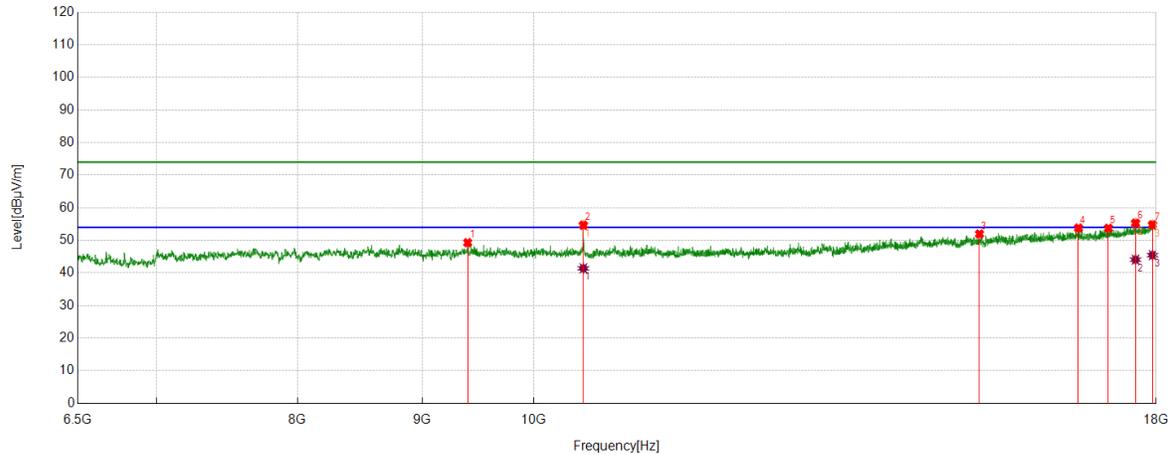
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8068.0947	42.27	5.63	47.90	74.00	-26.10	Vertical
2	10399.1499	44.25	6.72	50.97	74.00	-23.03	Vertical
3	14743.0405	38.76	12.89	51.65	74.00	-22.35	Vertical
4	15400.5668	38.58	13.67	52.25	74.00	-21.75	Vertical
5	16773.1289	36.71	16.09	52.80	74.00	-21.20	Vertical
6	17250.4584	37.53	16.76	54.29	74.00	-19.71	Vertical
7	17946.3244	36.01	19.48	55.49	74.00	-18.51	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17250.4584	26.45	16.76	43.21	54.00	-10.79	Vertical
2	17946.3244	26.04	19.48	45.52	54.00	-8.48	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9394.6491	42.72	6.58	49.30	74.00	-24.70	Horizontal
2	10479.6633	47.88	6.78	54.66	74.00	-19.34	Horizontal
3	15233.7890	38.54	13.40	51.94	74.00	-22.06	Horizontal
4	16727.1212	37.59	16.20	53.79	74.00	-20.21	Horizontal
5	17206.3677	37.00	16.71	53.71	74.00	-20.29	Horizontal
6	17653.0255	37.25	18.04	55.29	74.00	-18.71	Horizontal
7	17938.6564	35.35	19.44	54.79	74.00	-19.21	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10479.6633	34.63	6.78	41.41	54.00	-12.59	Horizontal
2	17653.0255	26.04	18.04	44.08	54.00	-9.92	Horizontal
3	17938.6564	26.02	19.44	45.46	54.00	-8.54	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

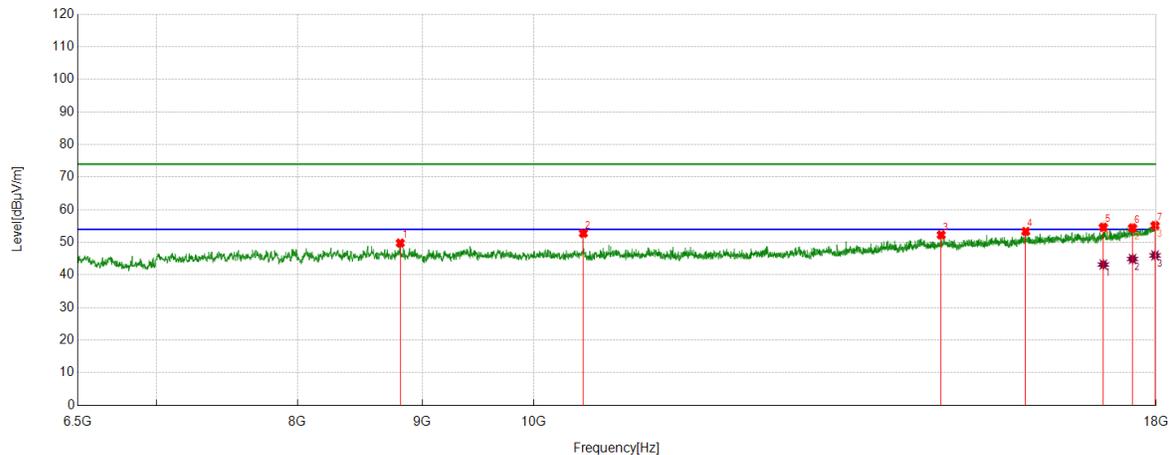
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8815.7193	43.52	6.27	49.79	74.00	-24.21	Vertical
2	10479.6633	45.97	6.78	52.75	74.00	-21.25	Vertical
3	14693.1989	39.47	12.81	52.28	74.00	-21.72	Vertical
4	15914.3191	38.79	14.54	53.33	74.00	-20.67	Vertical
5	17123.9373	38.11	16.52	54.63	74.00	-19.37	Vertical
6	17603.1839	36.39	18.04	54.43	74.00	-19.57	Vertical
7	17980.8301	35.35	19.81	55.16	74.00	-18.84	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17123.9373	26.68	16.52	43.20	54.00	-10.80	Vertical
2	17603.1839	26.86	18.04	44.90	54.00	-9.10	Vertical
3	17980.8301	26.19	19.81	46.00	54.00	-8.00	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

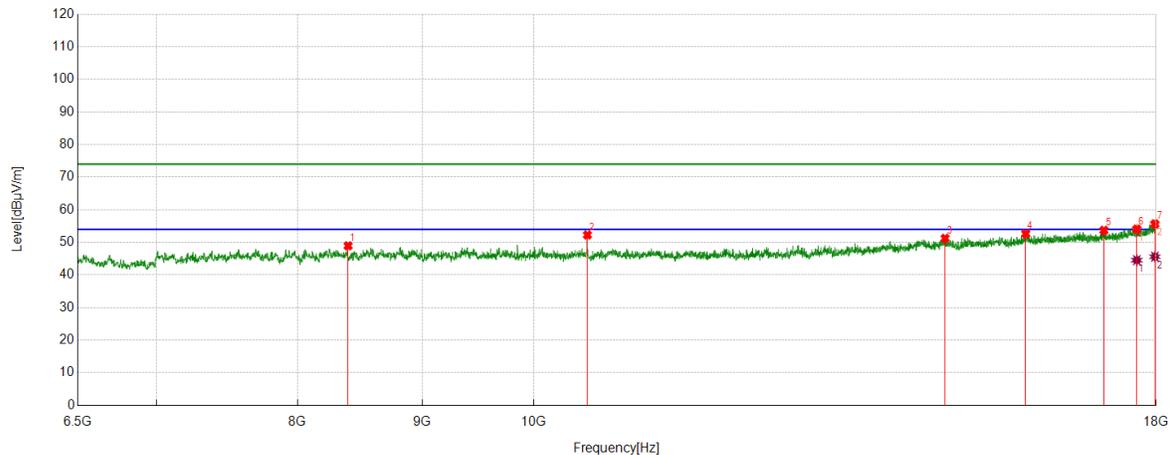
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Horizontal	PASS


PK Result:

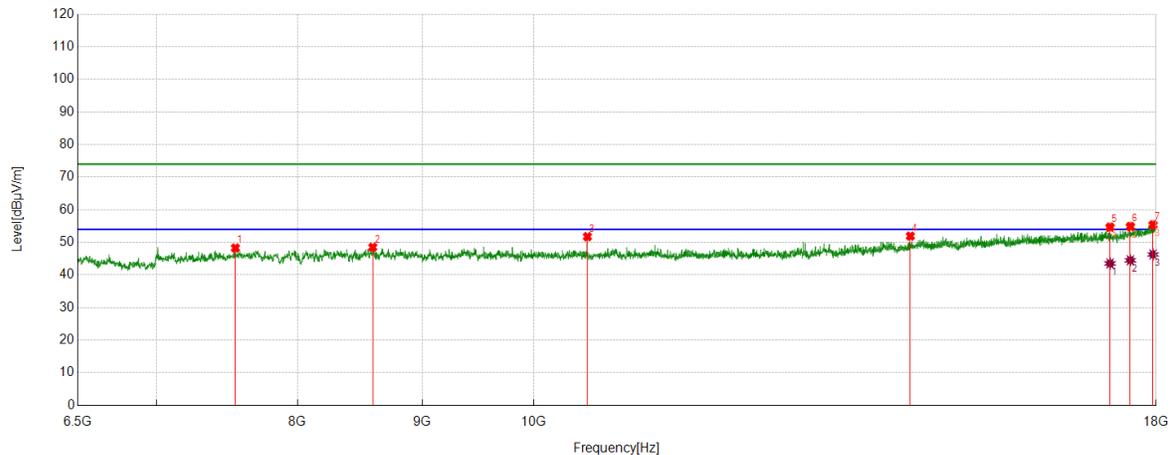
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8392.0653	43.02	5.91	48.93	74.00	-25.07	Horizontal
2	10519.9200	45.33	6.94	52.27	74.00	-21.73	Horizontal
3	14746.8745	38.37	12.87	51.24	74.00	-22.76	Horizontal
4	15914.3191	38.09	14.54	52.63	74.00	-21.37	Horizontal
5	17133.5223	37.15	16.54	53.69	74.00	-20.31	Horizontal
6	17674.1124	35.97	18.08	54.05	74.00	-19.95	Horizontal
7	17978.9132	35.84	19.79	55.63	74.00	-18.37	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17674.1124	26.46	18.08	44.54	54.00	-9.46	Horizontal
2	17978.9132	25.81	19.79	45.60	54.00	-8.40	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7544.7575	43.72	4.54	48.26	74.00	-25.74	Vertical
2	8589.5149	42.57	5.93	48.50	74.00	-25.50	Vertical
3	10519.9200	44.80	6.94	51.74	74.00	-22.26	Vertical
4	14271.4619	39.82	12.09	51.91	74.00	-22.09	Vertical
5	17233.2055	37.92	16.74	54.66	74.00	-19.34	Vertical
6	17566.7611	37.01	17.86	54.87	74.00	-19.13	Vertical
7	17948.2414	35.92	19.48	55.40	74.00	-18.60	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17233.2055	26.79	16.74	43.53	54.00	-10.47	Vertical
2	17566.7611	26.64	17.86	44.50	54.00	-9.50	Vertical
3	17948.2414	26.82	19.48	46.30	54.00	-7.70	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

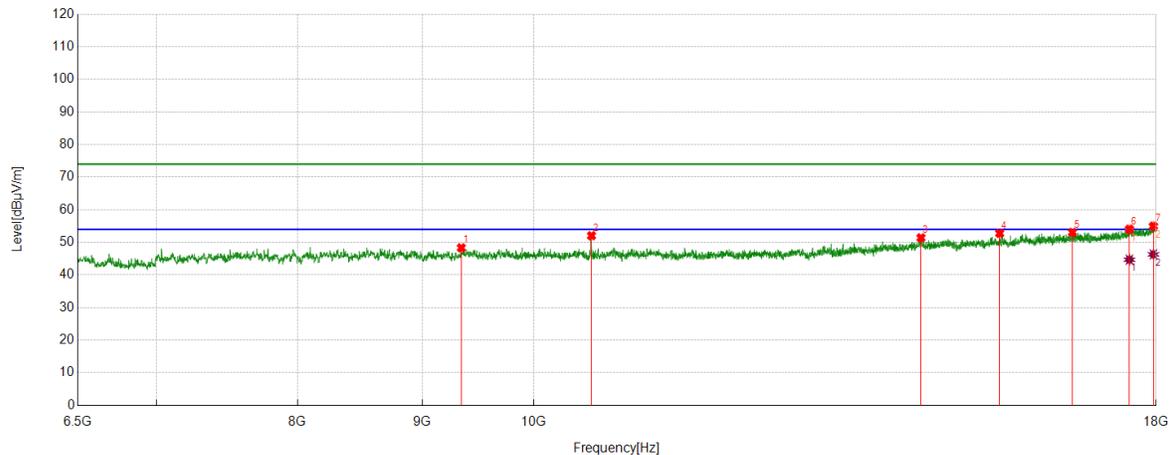
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Horizontal	PASS


PK Result:

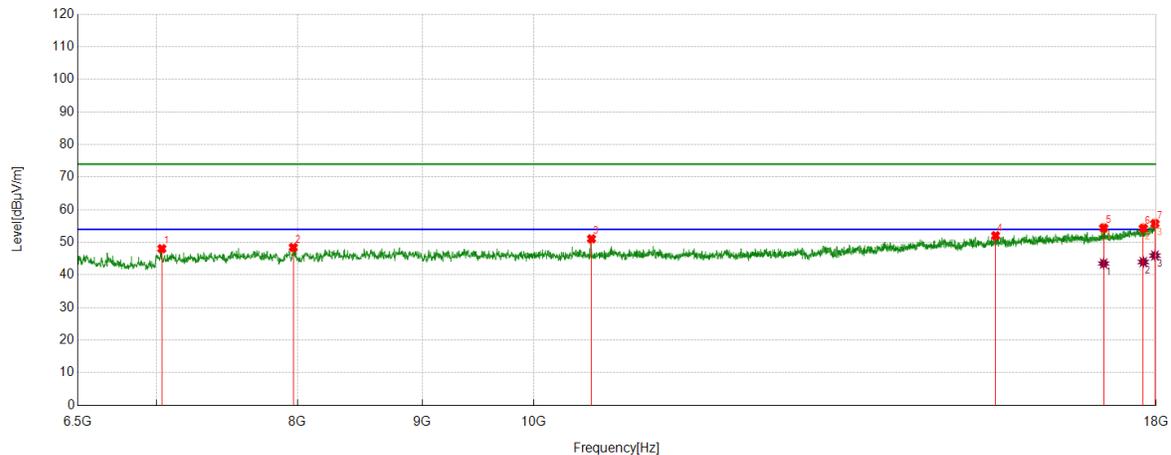
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9339.0565	41.99	6.34	48.33	74.00	-25.67	Horizontal
2	10560.1767	45.23	6.80	52.03	74.00	-21.97	Horizontal
3	14415.2359	38.48	12.91	51.39	74.00	-22.61	Horizontal
4	15527.0878	38.95	13.80	52.75	74.00	-21.25	Horizontal
5	16631.2719	37.24	15.81	53.05	74.00	-20.95	Horizontal
6	17551.4252	36.29	17.74	54.03	74.00	-19.97	Horizontal
7	17953.9923	35.42	19.54	54.96	74.00	-19.04	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17551.4252	26.95	17.74	44.69	54.00	-9.31	Horizontal
2	17953.9923	26.77	19.54	46.31	54.00	-7.69	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7038.6731	44.26	3.80	48.06	74.00	-25.94	Vertical
2	7968.4114	42.97	5.48	48.45	74.00	-25.55	Vertical
3	10560.1767	44.29	6.80	51.09	74.00	-22.91	Vertical
4	15467.6613	38.06	13.99	52.05	74.00	-21.95	Vertical
5	17129.6883	37.79	16.63	54.42	74.00	-19.58	Vertical
6	17783.3806	35.58	18.76	54.34	74.00	-19.66	Vertical
7	17978.9132	35.96	19.79	55.75	74.00	-18.25	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17129.6883	26.87	16.63	43.50	54.00	-10.50	Vertical
2	17783.3806	25.22	18.76	43.98	54.00	-10.02	Vertical
3	17978.9132	26.16	19.79	45.95	54.00	-8.05	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

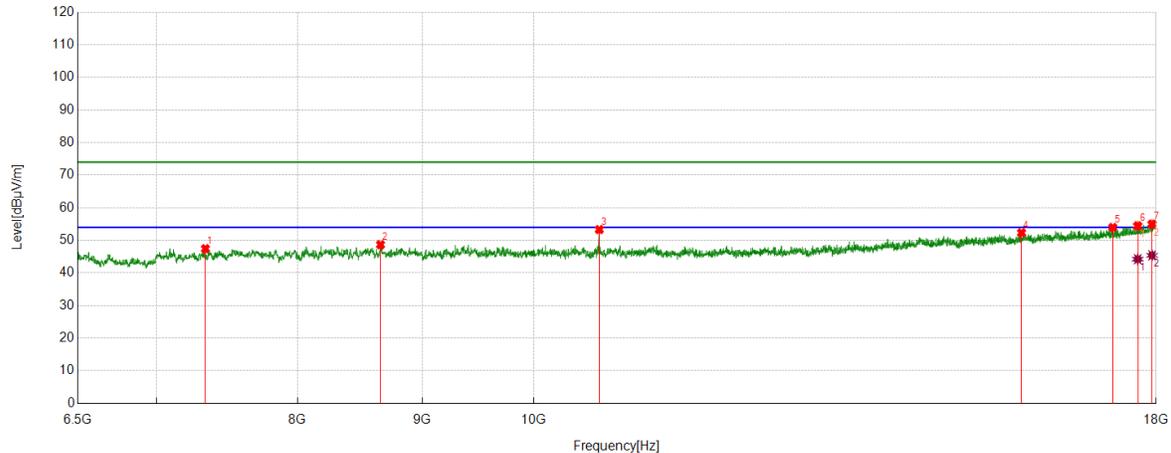
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Horizontal	PASS


PK Result:

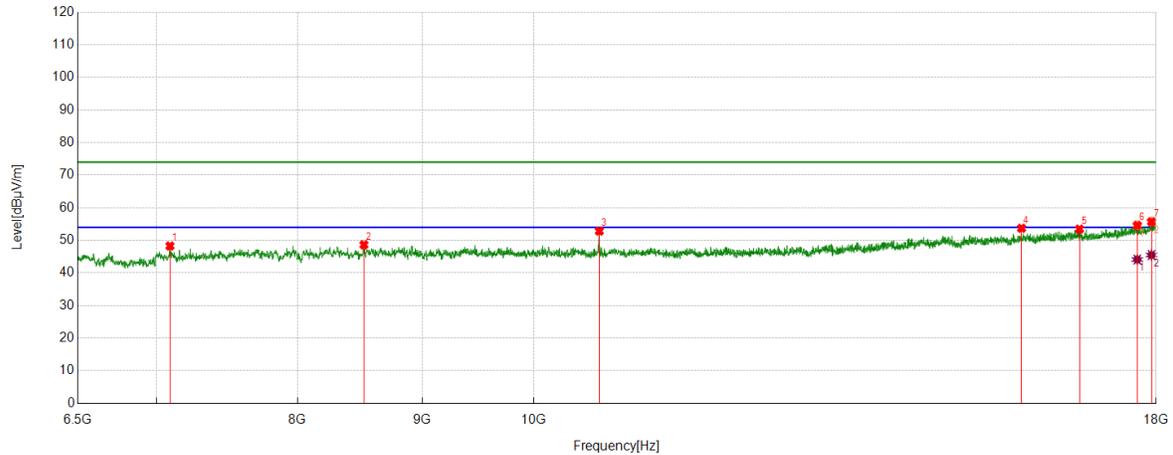
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7333.8890	43.52	3.92	47.44	74.00	-26.56	Horizontal
2	8652.7755	42.47	6.20	48.67	74.00	-25.33	Horizontal
3	10638.7731	46.43	6.87	53.30	74.00	-20.70	Horizontal
4	15851.0585	37.48	14.83	52.31	74.00	-21.69	Horizontal
5	17277.2962	37.05	16.90	53.95	74.00	-20.05	Horizontal
6	17689.4482	36.28	18.18	54.46	74.00	-19.54	Horizontal
7	17930.9885	35.61	19.37	54.98	74.00	-19.02	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17689.4482	26.05	18.18	44.23	54.00	-9.77	Horizontal
2	17930.9885	26.03	19.37	45.40	54.00	-8.60	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Vertical	PASS


PK Result:

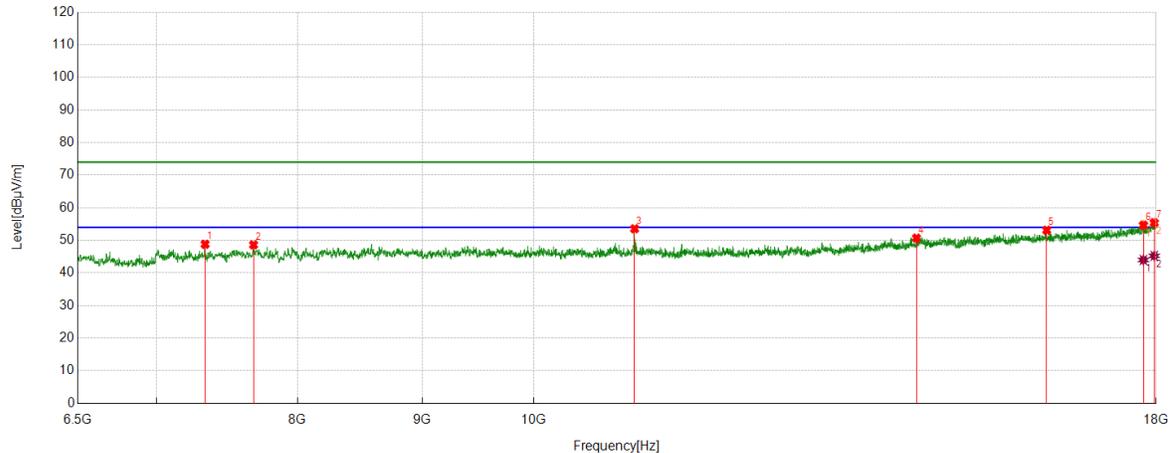
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7092.3487	44.42	3.85	48.27	74.00	-25.73	Vertical
2	8518.5864	42.20	6.44	48.64	74.00	-25.36	Vertical
3	10638.7731	45.96	6.87	52.83	74.00	-21.17	Vertical
4	15851.0585	38.88	14.83	53.71	74.00	-20.29	Vertical
5	16742.4571	37.42	16.03	53.45	74.00	-20.55	Vertical
6	17681.7803	36.49	18.12	54.61	74.00	-19.39	Vertical
7	17921.4036	36.35	19.36	55.71	74.00	-18.29	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17681.7803	26.00	18.12	44.12	54.00	-9.88	Vertical
2	17921.4036	26.14	19.36	45.50	54.00	-8.50	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Horizontal	PASS



PK Result:

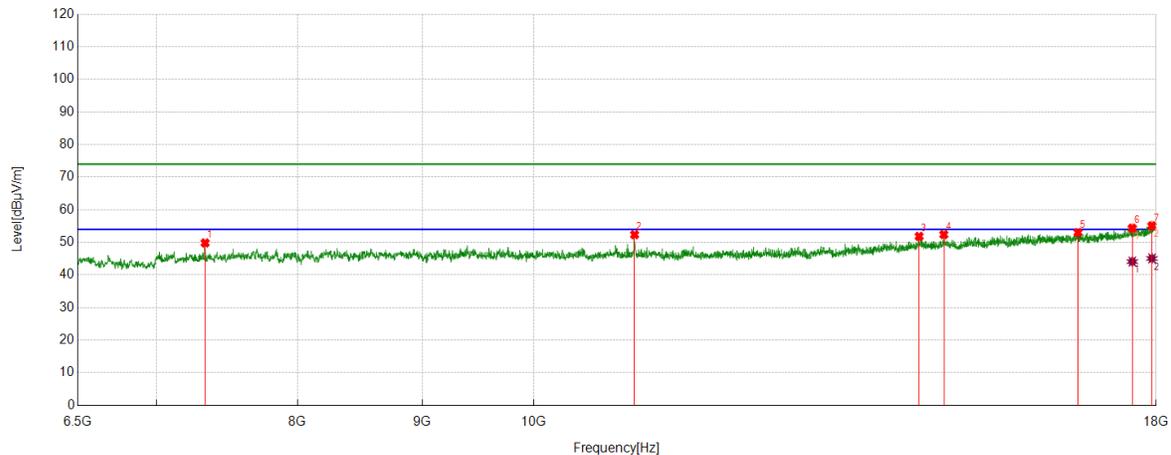
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7331.9720	44.91	3.89	48.80	74.00	-25.20	Horizontal
2	7675.1125	43.35	5.28	48.63	74.00	-25.37	Horizontal
3	10999.1665	46.27	7.28	53.55	74.00	-20.45	Horizontal
4	14353.8923	38.05	12.65	50.70	74.00	-23.30	Horizontal
5	16232.5388	37.85	15.27	53.12	74.00	-20.88	Horizontal
6	17785.2976	35.92	18.74	54.66	74.00	-19.34	Horizontal
7	17967.4112	35.77	19.63	55.40	74.00	-18.60	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17785.2976	25.24	18.74	43.98	54.00	-10.02	Horizontal
2	17967.4112	25.61	19.63	45.24	54.00	-8.76	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Vertical	PASS


PK Result:

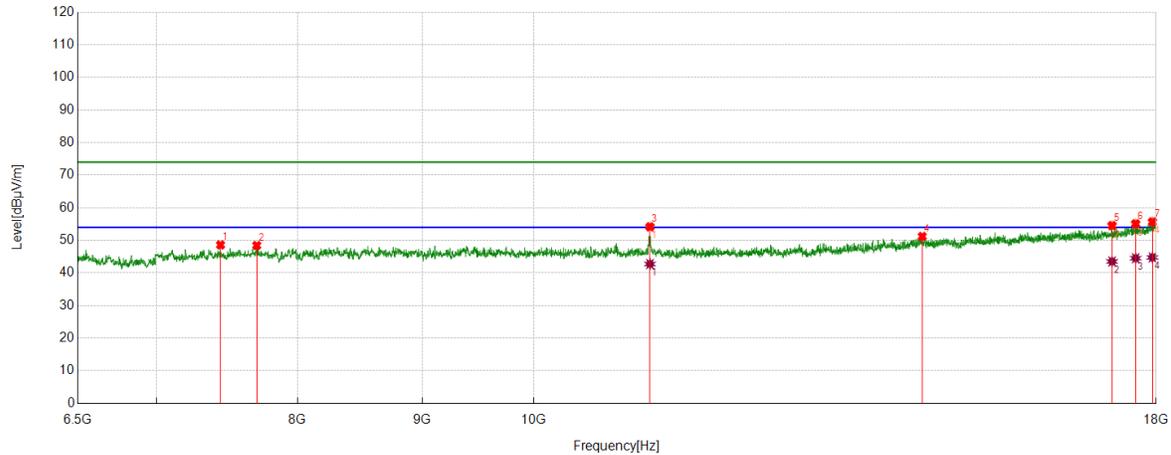
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7331.9720	45.94	3.89	49.83	74.00	-24.17	Vertical
2	10999.1665	45.07	7.28	52.35	74.00	-21.65	Vertical
3	14390.3151	39.04	12.79	51.83	74.00	-22.17	Vertical
4	14729.6216	39.60	12.79	52.39	74.00	-21.61	Vertical
5	16719.4532	36.71	16.30	53.01	74.00	-20.99	Vertical
6	17599.3499	36.32	18.03	54.35	74.00	-19.65	Vertical
7	17929.0715	35.70	19.37	55.07	74.00	-18.93	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17599.3499	26.07	18.03	44.10	54.00	-9.90	Vertical
2	17929.0715	25.70	19.37	45.07	54.00	-8.93	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7439.3232	44.41	4.20	48.61	74.00	-25.39	Horizontal
2	7698.1164	42.90	5.53	48.43	74.00	-25.57	Horizontal
3	11160.1934	46.94	7.21	54.15	74.00	-19.85	Horizontal
4	14432.4887	38.33	12.87	51.20	74.00	-22.80	Horizontal
5	17265.7943	37.67	16.87	54.54	74.00	-19.46	Horizontal
6	17654.9425	37.06	18.04	55.10	74.00	-18.90	Horizontal
7	17936.7395	36.25	19.42	55.67	74.00	-18.33	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11160.1934	35.54	7.21	42.75	54.00	-11.25	Horizontal
2	17265.7943	26.65	16.87	43.52	54.00	-10.48	Horizontal
3	17654.9425	26.49	18.04	44.53	54.00	-9.47	Horizontal
4	17936.7395	25.34	19.42	44.76	54.00	-9.24	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

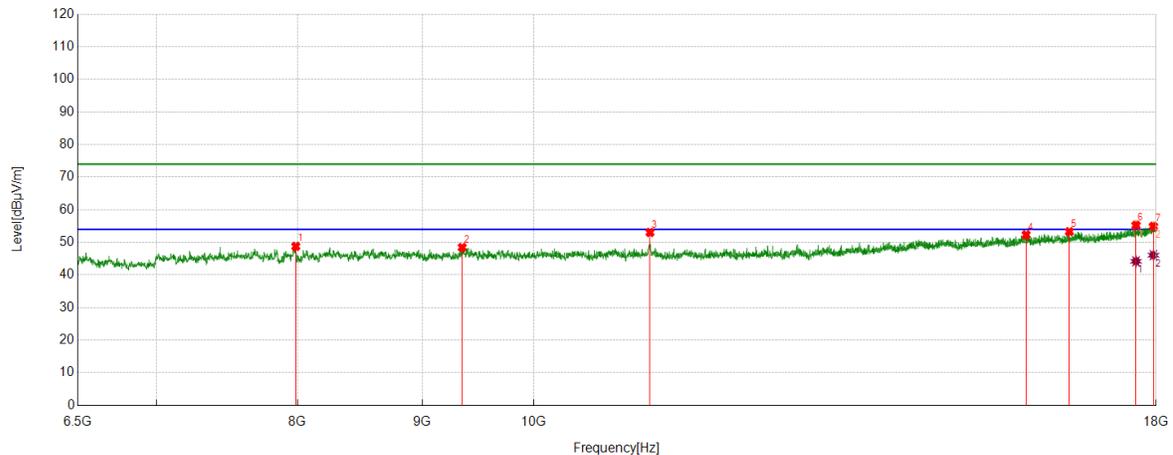
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Vertical	PASS


PK Result:

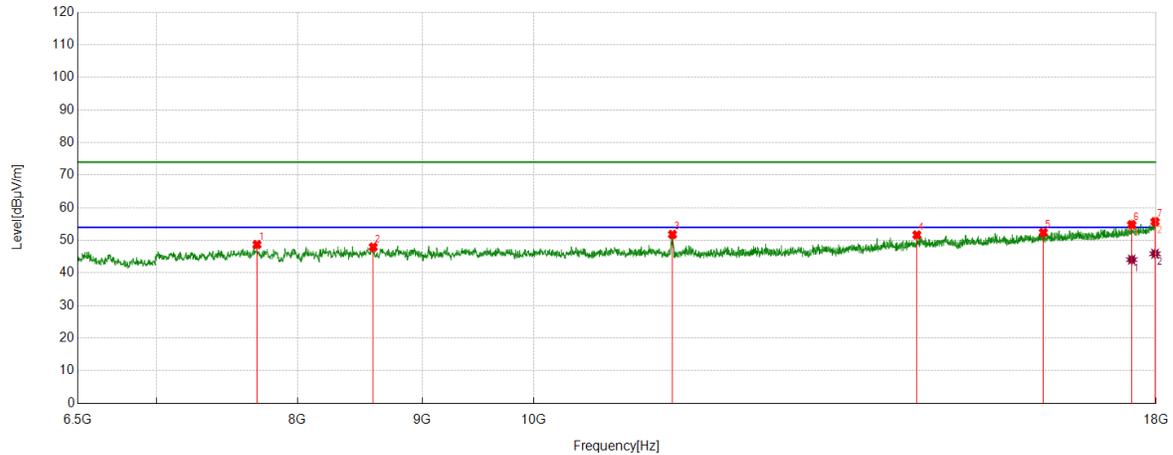
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7987.5813	43.22	5.55	48.77	74.00	-25.23	Vertical
2	9346.7245	42.02	6.42	48.44	74.00	-25.56	Vertical
3	11160.1934	45.83	7.21	53.04	74.00	-20.96	Vertical
4	15920.0700	37.87	14.44	52.31	74.00	-21.69	Vertical
5	16583.3472	37.41	15.88	53.29	74.00	-20.71	Vertical
6	17660.6934	37.19	18.07	55.26	74.00	-18.74	Vertical
7	17953.9923	35.38	19.54	54.92	74.00	-19.08	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17660.6934	26.12	18.07	44.19	54.00	-9.81	Vertical
2	17953.9923	26.53	19.54	46.07	54.00	-7.93	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Horizontal	PASS



PK Result:

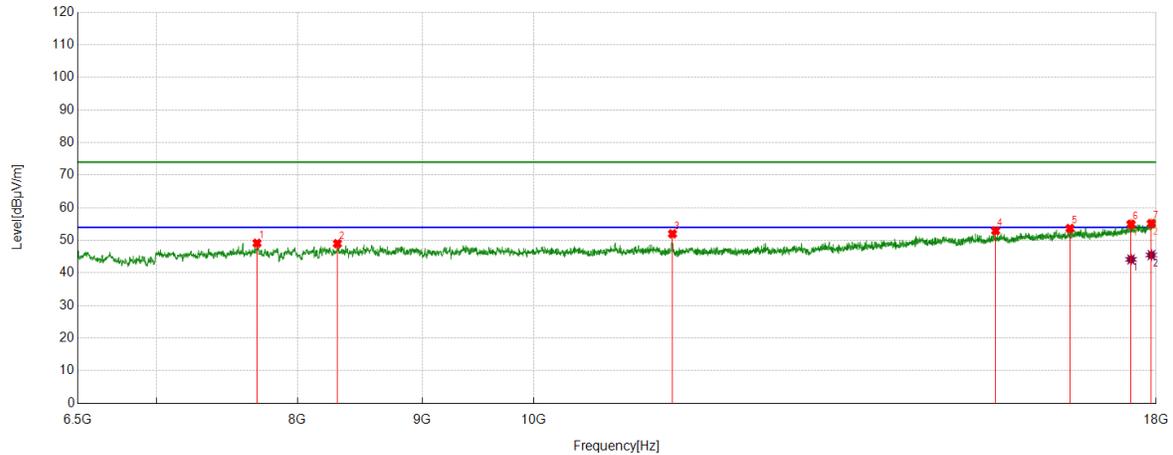
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7700.0333	43.08	5.62	48.70	74.00	-25.30	Horizontal
2	8593.3489	41.88	6.06	47.94	74.00	-26.06	Horizontal
3	11399.8166	44.40	7.41	51.81	74.00	-22.19	Horizontal
4	14359.6433	39.01	12.66	51.67	74.00	-22.33	Horizontal
5	16180.7801	37.37	15.02	52.39	74.00	-21.61	Horizontal
6	17589.7650	36.77	18.04	54.81	74.00	-19.19	Horizontal
7	17980.8301	35.91	19.81	55.72	74.00	-18.28	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17589.7650	26.04	18.04	44.08	54.00	-9.92	Horizontal
2	17980.8301	26.09	19.81	45.90	54.00	-8.10	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Vertical	PASS


PK Result:

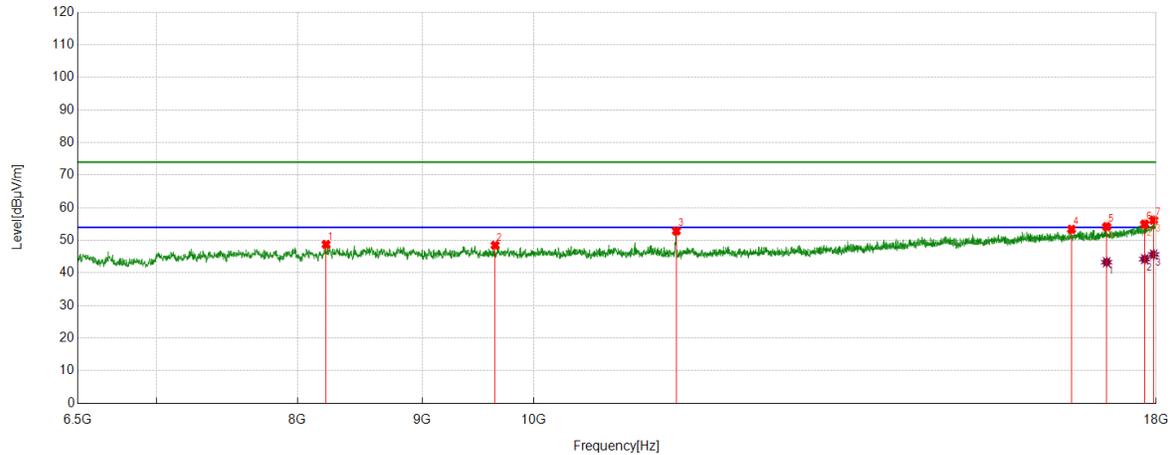
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7700.0333	43.52	5.62	49.14	74.00	-24.86	Vertical
2	8307.7180	42.66	6.33	48.99	74.00	-25.01	Vertical
3	11399.8166	44.59	7.41	52.00	74.00	-22.00	Vertical
4	15467.6613	38.95	13.99	52.94	74.00	-21.06	Vertical
5	16592.9322	37.64	16.01	53.65	74.00	-20.35	Vertical
6	17578.2630	37.02	17.94	54.96	74.00	-19.04	Vertical
7	17919.4866	35.81	19.36	55.17	74.00	-18.83	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17578.2630	26.22	17.94	44.16	54.00	-9.84	Vertical
2	17919.4866	26.14	19.36	45.50	54.00	-8.50	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8219.5366	42.61	6.13	48.74	74.00	-25.26	Horizontal
2	9641.9403	42.11	6.37	48.48	74.00	-25.52	Horizontal
3	11441.9903	45.49	7.39	52.88	74.00	-21.12	Horizontal
4	16617.8530	37.50	15.89	53.39	74.00	-20.61	Horizontal
5	17177.6129	37.65	16.56	54.21	74.00	-19.79	Horizontal
6	17806.3844	36.08	18.90	54.98	74.00	-19.02	Horizontal
7	17957.8263	36.61	19.60	56.21	74.00	-17.79	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17177.6129	26.75	16.56	43.31	54.00	-10.69	Horizontal
2	17806.3844	25.36	18.90	44.26	54.00	-9.74	Horizontal
3	17957.8263	26.07	19.60	45.67	54.00	-8.33	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

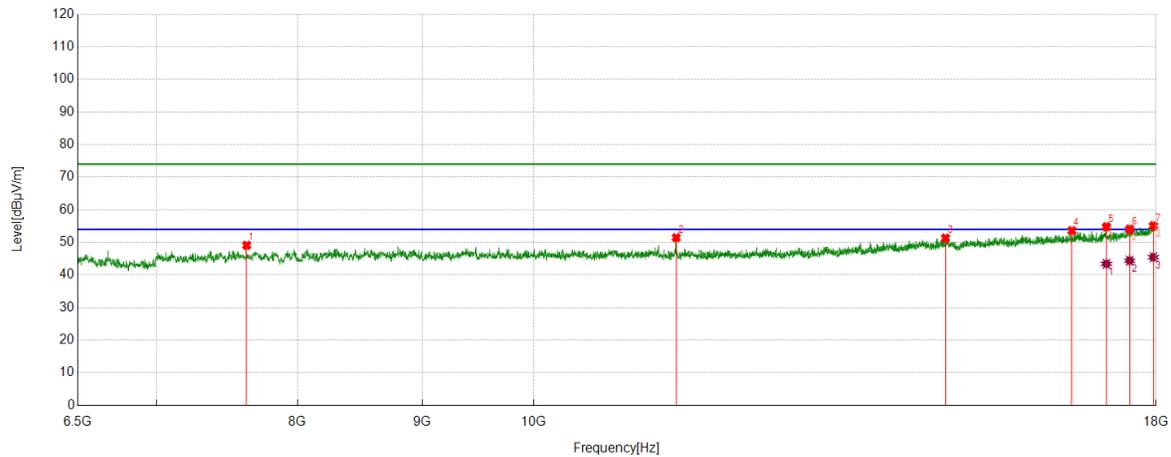
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7625.2709	43.92	5.18	49.10	74.00	-24.90	Vertical
2	11440.0733	44.08	7.37	51.45	74.00	-22.55	Vertical
3	14752.6254	38.42	12.89	51.31	74.00	-22.69	Vertical
4	16623.6039	37.74	15.86	53.60	74.00	-20.40	Vertical
5	17173.7790	38.28	16.51	54.79	74.00	-19.21	Vertical
6	17555.2592	36.27	17.77	54.04	74.00	-19.96	Vertical
7	17953.9923	35.55	19.54	55.09	74.00	-18.91	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17173.7790	26.90	16.51	43.41	54.00	-10.59	Vertical
2	17555.2592	26.62	17.77	44.39	54.00	-9.61	Vertical
3	17953.9923	25.90	19.54	45.44	54.00	-8.56	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

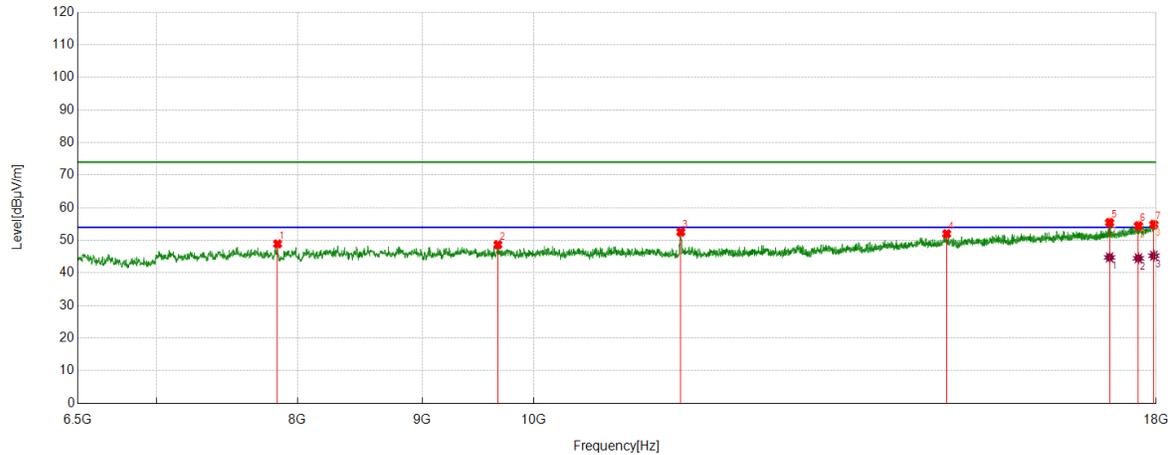
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7851.4752	43.53	5.39	48.92	74.00	-25.08	Horizontal
2	9666.8611	42.22	6.45	48.67	74.00	-25.33	Horizontal
3	11489.9150	45.02	7.53	52.55	74.00	-21.45	Horizontal
4	14769.8783	39.08	12.93	52.01	74.00	-21.99	Horizontal
5	17225.5376	38.77	16.71	55.48	74.00	-18.52	Horizontal
6	17700.9502	36.19	18.28	54.47	74.00	-19.53	Horizontal
7	17961.6603	35.26	19.63	54.89	74.00	-19.11	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17225.5376	28.06	16.71	44.77	54.00	-9.23	Horizontal
2	17700.9502	26.23	18.28	44.51	54.00	-9.49	Horizontal
3	17961.6603	25.66	19.63	45.29	54.00	-8.71	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

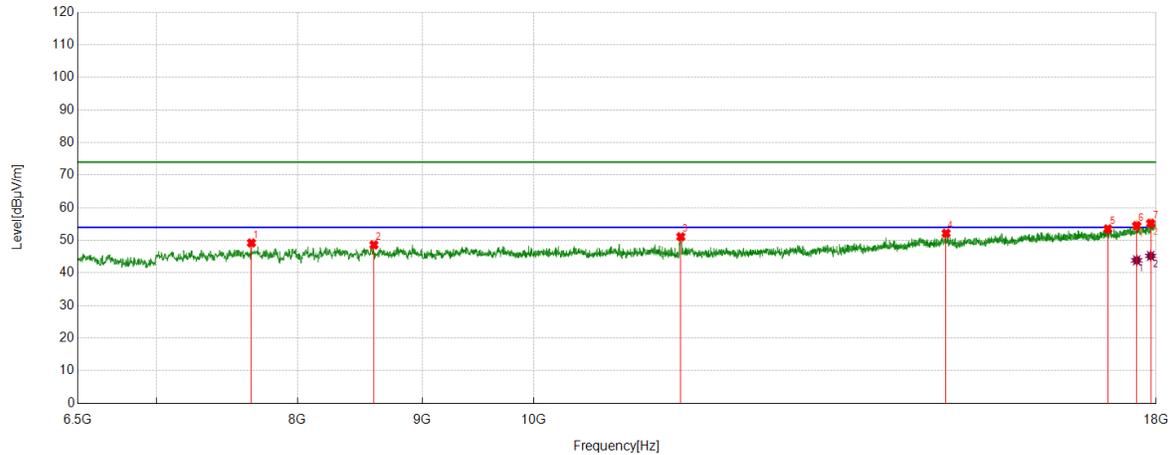
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Vertical	PASS



PK Result:

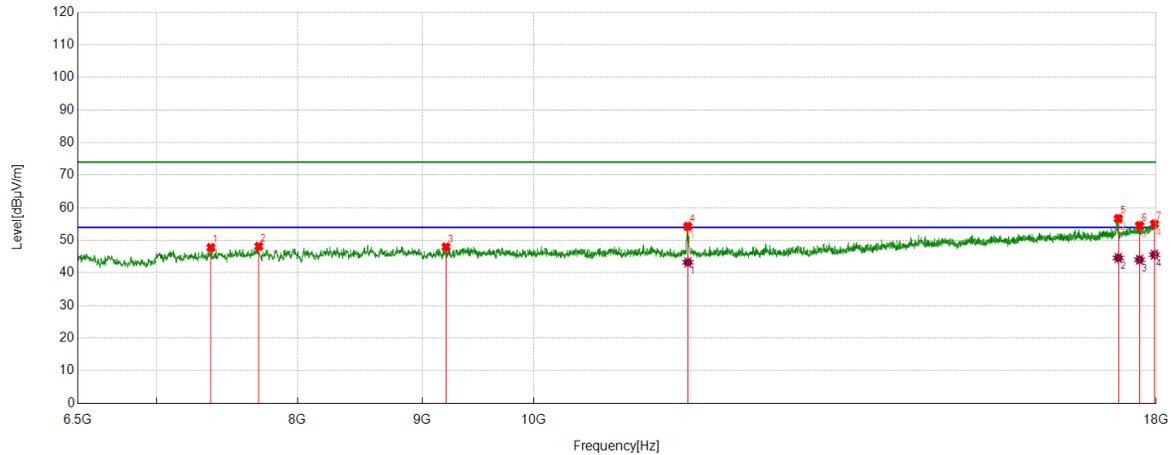
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7659.7766	44.08	5.13	49.21	74.00	-24.79	Vertical
2	8599.0998	42.28	6.34	48.62	74.00	-25.38	Vertical
3	11489.9150	43.57	7.53	51.10	74.00	-22.90	Vertical
4	14762.2104	39.21	12.95	52.16	74.00	-21.84	Vertical
5	17196.7828	36.91	16.59	53.50	74.00	-20.50	Vertical
6	17672.1954	36.41	18.08	54.49	74.00	-19.51	Vertical
7	17907.9847	35.99	19.23	55.22	74.00	-18.78	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17672.1954	25.79	18.08	43.87	54.00	-10.13	Vertical
2	17907.9847	25.99	19.23	45.22	54.00	-8.78	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7372.2287	43.50	4.30	47.80	74.00	-26.20	Horizontal
2	7713.4522	43.03	5.14	48.17	74.00	-25.83	Horizontal
3	9204.8675	41.93	6.03	47.96	74.00	-26.04	Horizontal
4	11566.5944	46.57	7.72	54.29	74.00	-19.71	Horizontal
5	17367.3946	39.37	17.32	56.69	74.00	-17.31	Horizontal
6	17720.1200	36.04	18.48	54.52	74.00	-19.48	Horizontal
7	17971.2452	35.37	19.65	55.02	74.00	-18.98	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11566.5944	35.55	7.72	43.27	54.00	-10.73	Horizontal
2	17367.3946	27.30	17.32	44.62	54.00	-9.38	Horizontal
3	17720.1200	25.58	18.48	44.06	54.00	-9.94	Horizontal
4	17971.2452	25.94	19.65	45.59	54.00	-8.41	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

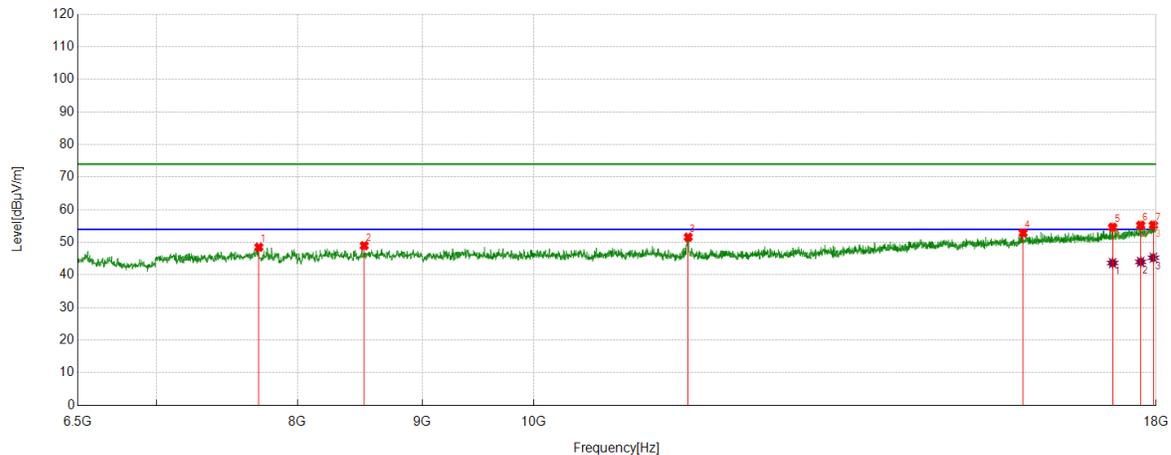
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7713.4522	43.37	5.14	48.51	74.00	-25.49	Vertical
2	8520.5034	42.46	6.51	48.97	74.00	-25.03	Vertical
3	11570.4284	43.87	7.72	51.59	74.00	-22.41	Vertical
4	15874.0623	38.19	14.70	52.89	74.00	-21.11	Vertical
5	17275.3792	37.74	16.90	54.64	74.00	-19.36	Vertical
6	17739.2899	36.72	18.54	55.26	74.00	-18.74	Vertical
7	17953.9923	35.75	19.54	55.29	74.00	-18.71	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17275.3792	26.76	16.90	43.66	54.00	-10.34	Vertical
2	17739.2899	25.48	18.54	44.02	54.00	-9.98	Vertical
3	17953.9923	25.73	19.54	45.27	54.00	-8.73	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

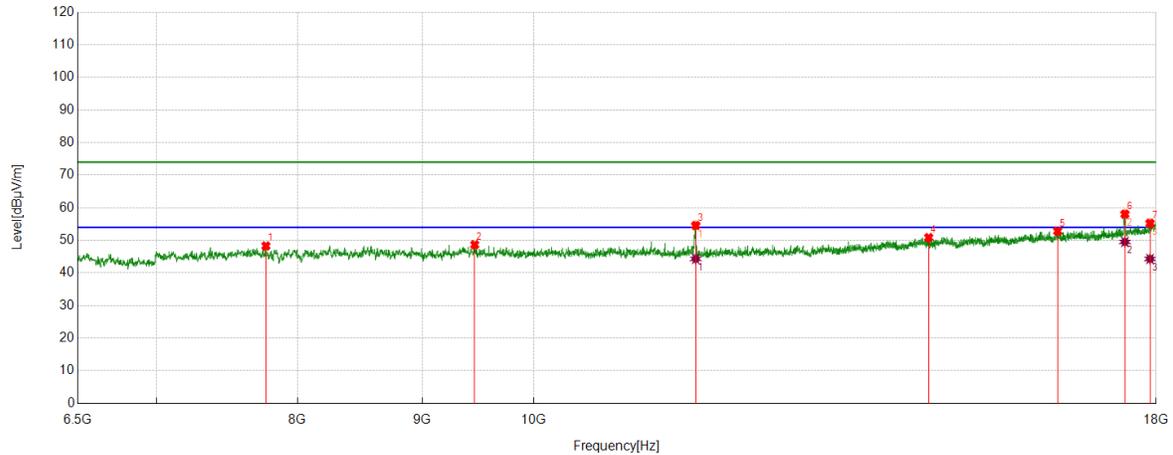
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7765.2109	43.21	5.08	48.29	74.00	-25.71	Horizontal
2	9457.9097	42.11	6.56	48.67	74.00	-25.33	Horizontal
3	11652.8588	46.86	7.71	54.57	74.00	-19.43	Horizontal
4	14520.6701	38.18	12.67	50.85	74.00	-23.15	Horizontal
5	16401.2335	37.79	15.03	52.82	74.00	-21.18	Horizontal
6	17476.6628	40.40	17.65	58.05	74.00	-15.95	Horizontal
7	17896.4827	36.02	19.23	55.25	74.00	-18.75	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11652.8588	36.61	7.71	44.32	54.00	-9.68	Horizontal
2	17476.6628	31.87	17.65	49.52	54.00	-4.48	Horizontal
3	17896.4827	25.08	19.23	44.31	54.00	-9.69	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

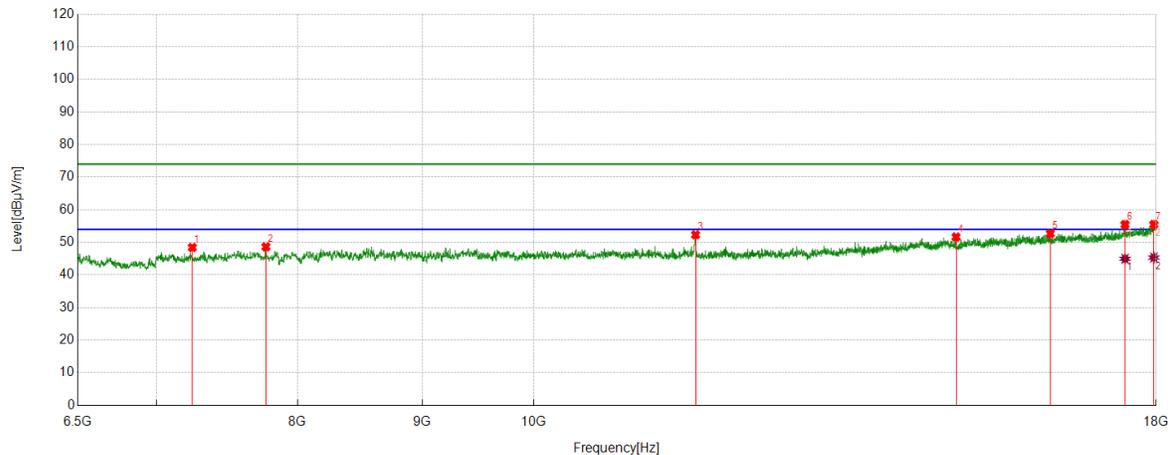
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Vertical	PASS


PK Result:

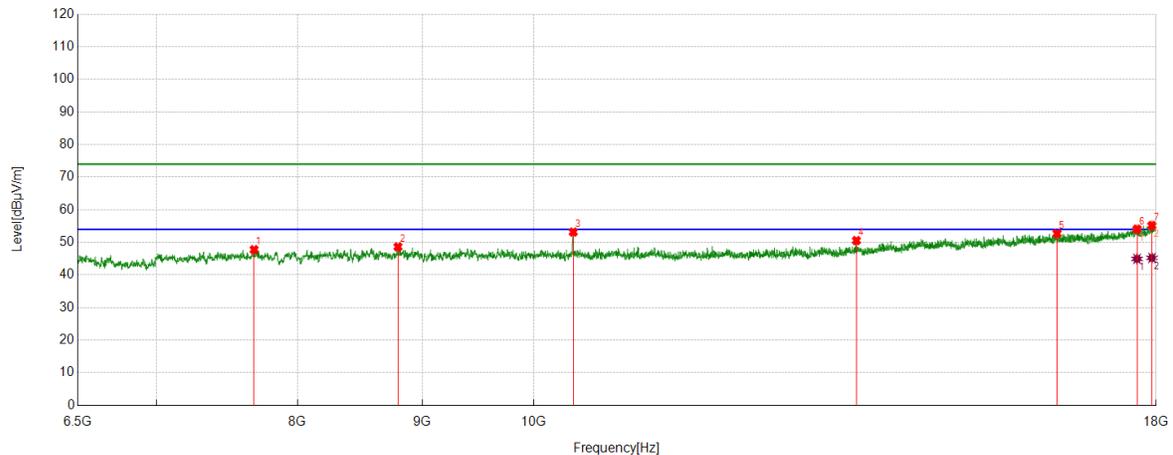
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7243.7906	44.62	3.82	48.44	74.00	-25.56	Vertical
2	7765.2109	43.55	5.08	48.63	74.00	-25.37	Vertical
3	11650.9418	44.58	7.74	52.32	74.00	-21.68	Vertical
4	14900.2334	38.81	12.83	51.64	74.00	-22.36	Vertical
5	16288.1314	37.69	14.98	52.67	74.00	-21.33	Vertical
6	17478.5798	37.83	17.65	55.48	74.00	-18.52	Vertical
7	17961.6603	35.88	19.63	55.51	74.00	-18.49	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17478.5798	27.31	17.65	44.96	54.00	-9.04	Vertical
2	17961.6603	25.70	19.63	45.33	54.00	-8.67	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Horizontal	PASS


PK Result:

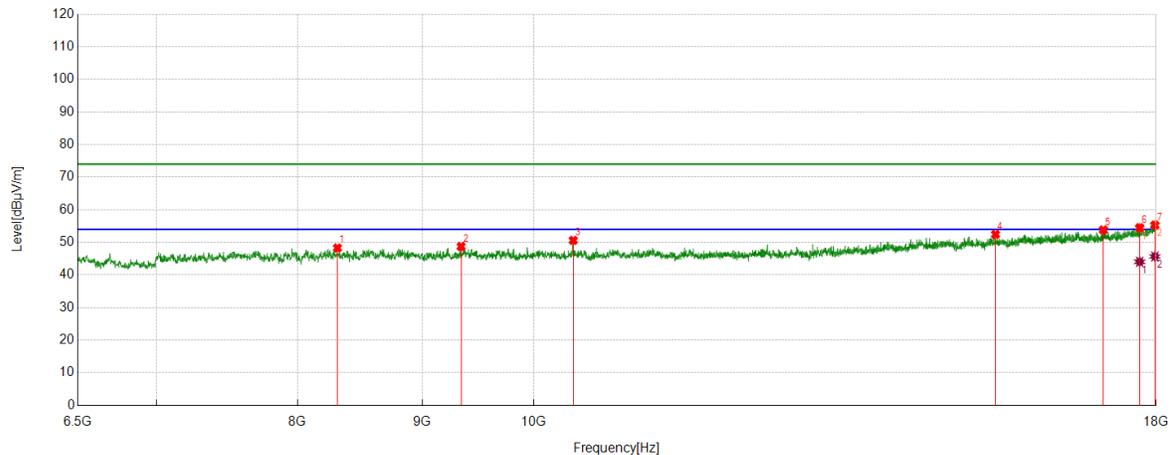
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7678.9465	42.43	5.33	47.76	74.00	-26.24	Horizontal
2	8796.5494	42.41	6.21	48.62	74.00	-25.38	Horizontal
3	10379.9800	46.57	6.59	53.16	74.00	-20.84	Horizontal
4	13562.1770	39.69	10.86	50.55	74.00	-23.45	Horizontal
5	16391.6486	37.72	14.99	52.71	74.00	-21.29	Horizontal
6	17677.9463	35.94	18.10	54.04	74.00	-19.96	Horizontal
7	17929.0715	35.80	19.37	55.17	74.00	-18.83	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17677.9463	26.84	18.10	44.94	54.00	-9.06	Horizontal
2	17929.0715	25.86	19.37	45.23	54.00	-8.77	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Vertical	PASS



PK Result:

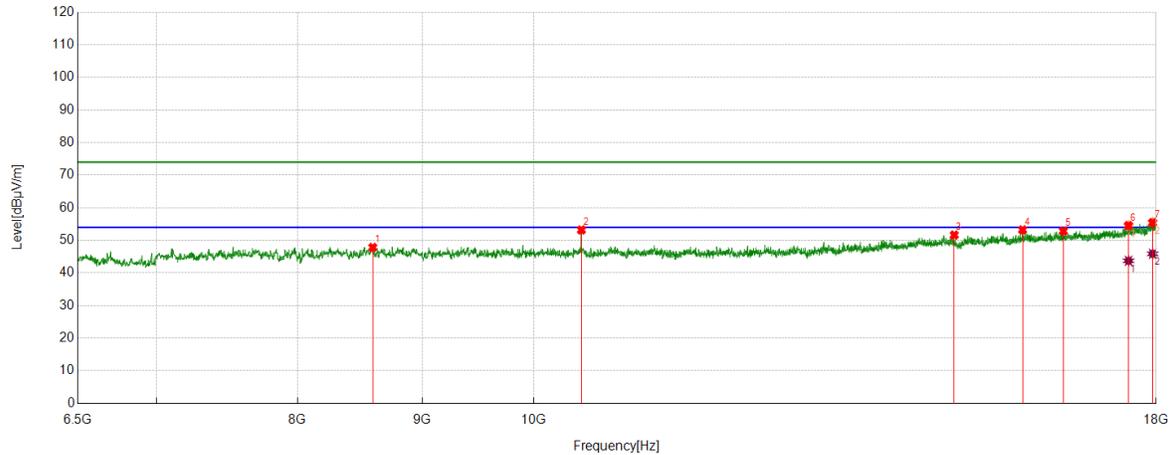
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8307.7180	41.94	6.33	48.27	74.00	-25.73	Vertical
2	9337.1395	42.38	6.34	48.72	74.00	-25.28	Vertical
3	10379.9800	44.01	6.59	50.60	74.00	-23.40	Vertical
4	15465.7443	38.45	13.98	52.43	74.00	-21.57	Vertical
5	17123.9373	37.30	16.52	53.82	74.00	-20.18	Vertical
6	17722.0370	36.00	18.49	54.49	74.00	-19.51	Vertical
7	17978.9132	35.49	19.79	55.28	74.00	-18.72	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17722.0370	25.55	18.49	44.04	54.00	-9.96	Vertical
2	17978.9132	25.87	19.79	45.66	54.00	-8.34	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Horizontal	PASS


PK Result:

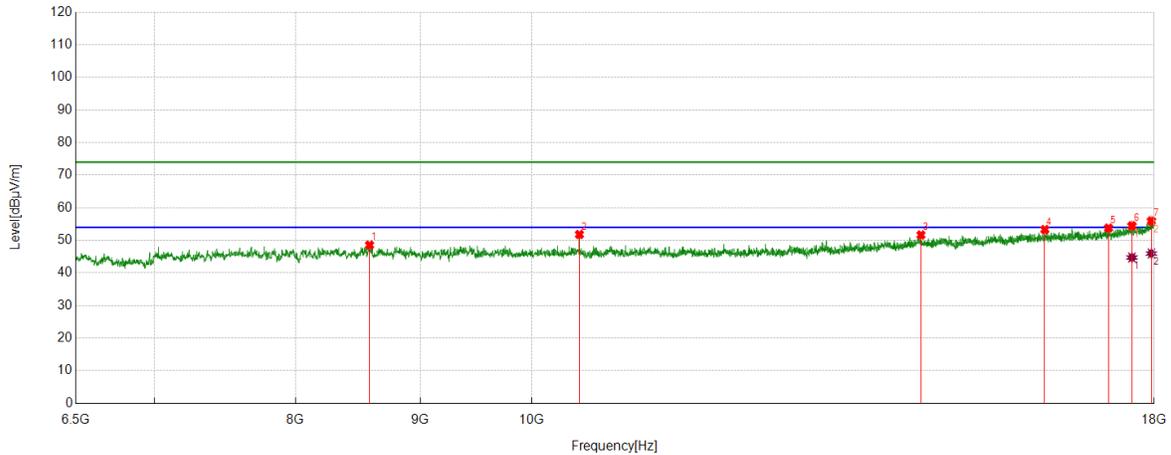
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8589.5149	41.90	5.93	47.83	74.00	-26.17	Horizontal
2	10460.4934	46.47	6.72	53.19	74.00	-20.81	Horizontal
3	14875.3126	38.81	12.82	51.63	74.00	-22.37	Horizontal
4	15866.3944	38.54	14.67	53.21	74.00	-20.79	Horizontal
5	16489.4149	36.93	15.92	52.85	74.00	-21.15	Horizontal
6	17536.0893	36.89	17.65	54.54	74.00	-19.46	Horizontal
7	17940.5734	36.01	19.45	55.46	74.00	-18.54	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17536.0893	26.07	17.65	43.72	54.00	-10.28	Horizontal
2	17940.5734	26.43	19.45	45.88	54.00	-8.12	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Vertical	PASS



PK Result:

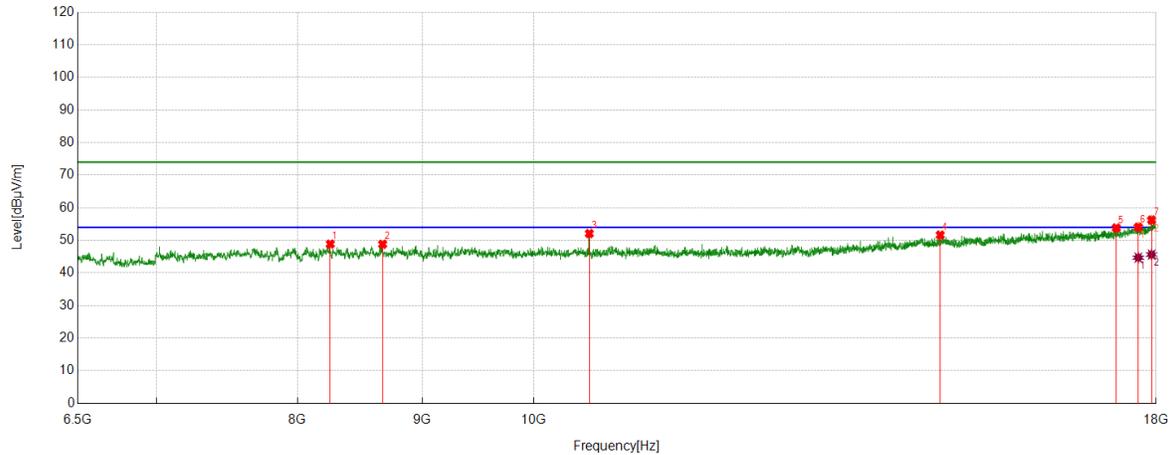
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8579.9300	42.10	6.45	48.55	74.00	-25.45	Vertical
2	10460.4934	45.08	6.72	51.80	74.00	-22.20	Vertical
3	14442.0737	38.77	12.88	51.65	74.00	-22.35	Vertical
4	16234.4557	38.07	15.24	53.31	74.00	-20.69	Vertical
5	17240.8735	36.99	16.78	53.77	74.00	-20.23	Vertical
6	17626.1877	36.42	18.06	54.48	74.00	-19.52	Vertical
7	17953.9923	36.42	19.54	55.96	74.00	-18.04	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17626.1877	26.67	18.06	44.73	54.00	-9.27	Vertical
2	17953.9923	26.43	19.54	45.97	54.00	-8.03	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Horizontal	PASS


PK Result:

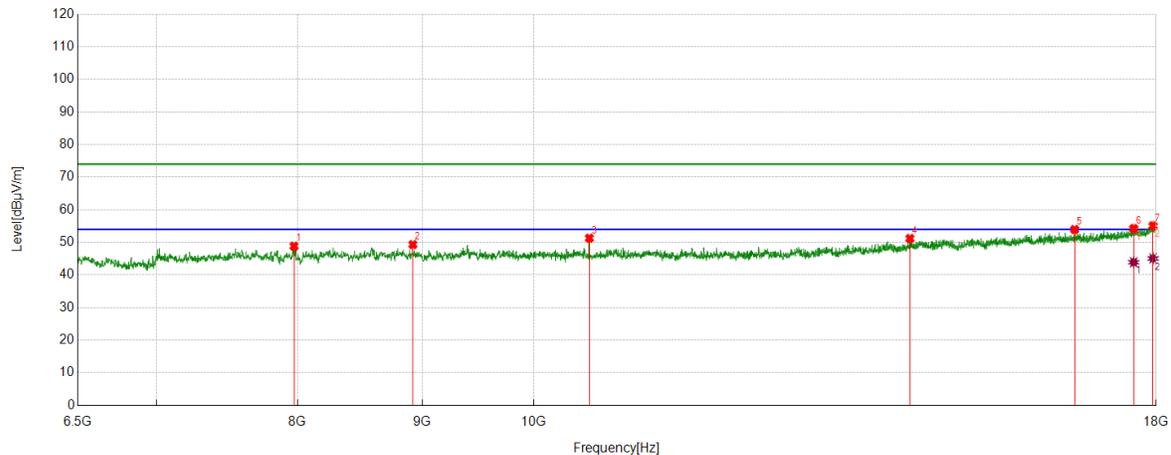
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8252.1254	42.60	6.27	48.87	74.00	-25.13	Horizontal
2	8670.0283	42.78	6.02	48.80	74.00	-25.20	Horizontal
3	10539.0898	45.25	6.83	52.08	74.00	-21.92	Horizontal
4	14679.7800	38.88	12.76	51.64	74.00	-22.36	Horizontal
5	17334.8058	36.68	17.15	53.83	74.00	-20.17	Horizontal
6	17699.0332	35.79	18.26	54.05	74.00	-19.95	Horizontal
7	17923.3206	36.89	19.36	56.25	74.00	-17.75	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17699.0332	26.44	18.26	44.70	54.00	-9.30	Horizontal
2	17923.3206	26.28	19.36	45.64	54.00	-8.36	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Vertical	PASS


PK Result:

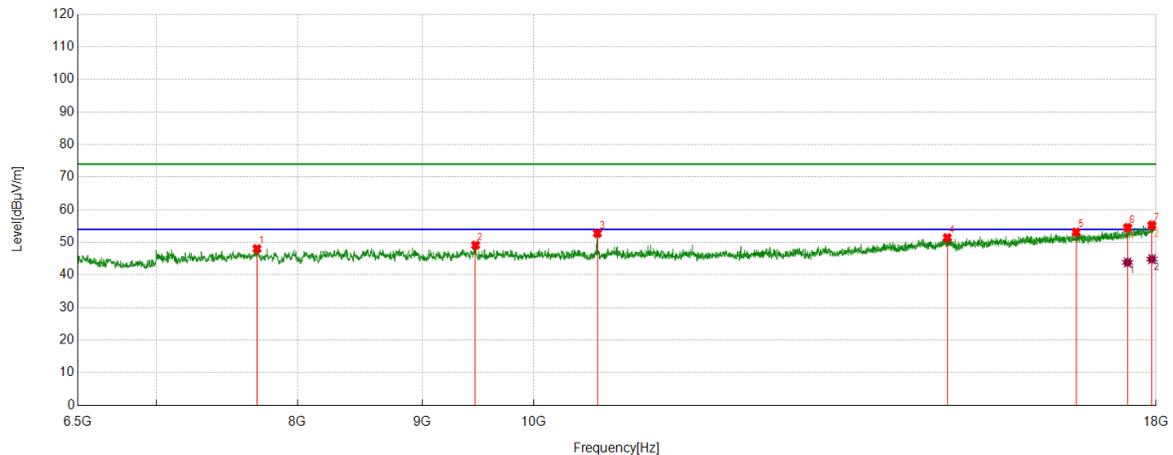
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7974.1624	43.45	5.38	48.83	74.00	-25.17	Vertical
2	8921.1535	43.08	6.24	49.32	74.00	-24.68	Vertical
3	10539.0898	44.46	6.83	51.29	74.00	-22.71	Vertical
4	14265.7110	39.12	12.07	51.19	74.00	-22.81	Vertical
5	16665.7776	38.22	15.72	53.94	74.00	-20.06	Vertical
6	17622.3537	36.16	18.06	54.22	74.00	-19.78	Vertical
7	17948.2414	35.60	19.48	55.08	74.00	-18.92	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17622.3537	25.83	18.06	43.89	54.00	-10.11	Vertical
2	17948.2414	25.59	19.48	45.07	54.00	-8.93	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Horizontal	PASS


PK Result:

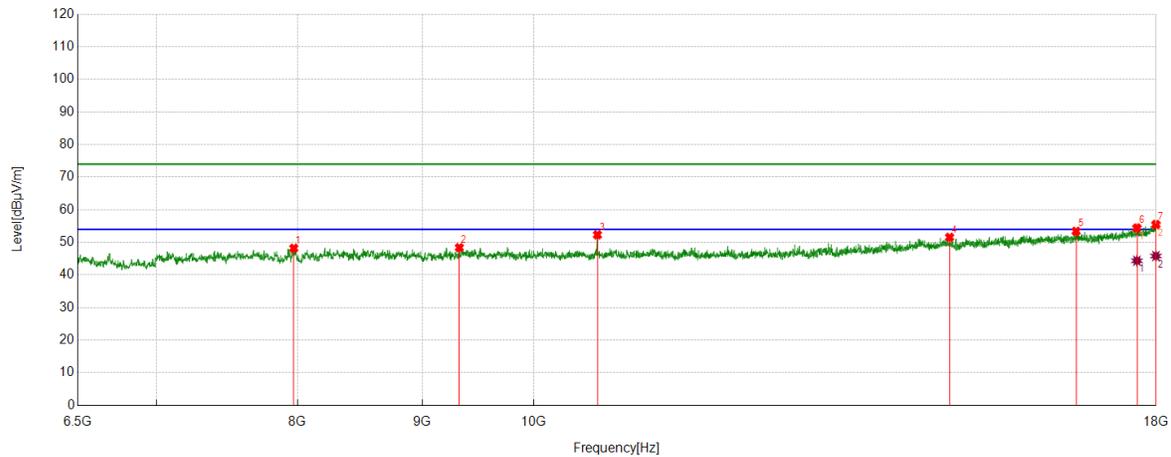
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7700.0333	42.44	5.62	48.06	74.00	-25.94	Horizontal
2	9465.5776	42.64	6.50	49.14	74.00	-24.86	Horizontal
3	10619.6033	45.91	6.85	52.76	74.00	-21.24	Horizontal
4	14777.5463	38.58	12.86	51.44	74.00	-22.56	Horizontal
5	16688.7815	37.46	15.71	53.17	74.00	-20.83	Horizontal
6	17520.7535	36.92	17.61	54.53	74.00	-19.47	Horizontal
7	17929.0715	35.91	19.37	55.28	74.00	-18.72	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17520.7535	26.24	17.61	43.85	54.00	-10.15	Horizontal
2	17929.0715	25.49	19.37	44.86	54.00	-9.14	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Vertical	PASS



PK Result:

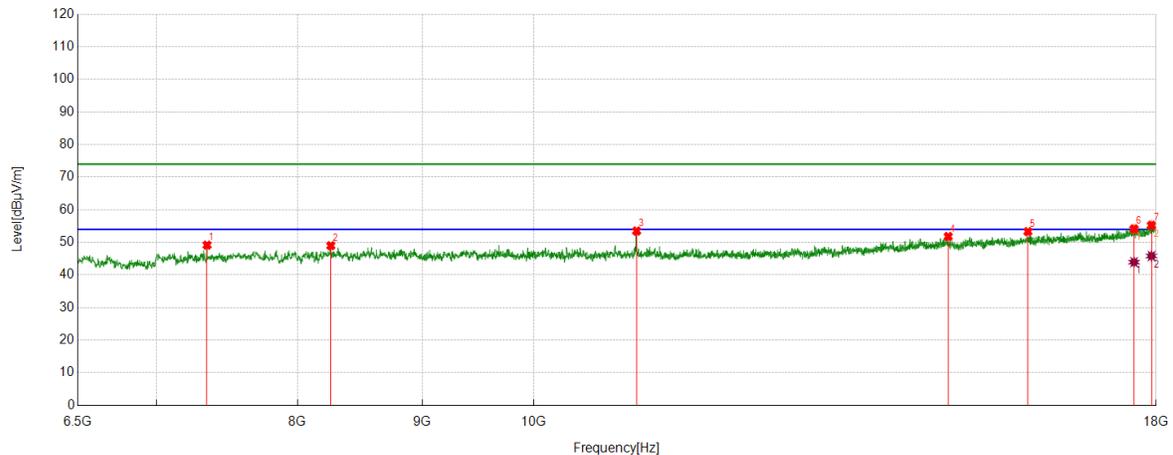
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7972.2454	42.80	5.39	48.19	74.00	-25.81	Vertical
2	9321.8036	42.06	6.32	48.38	74.00	-25.62	Vertical
3	10619.6033	45.46	6.85	52.31	74.00	-21.69	Vertical
4	14810.1350	38.71	12.84	51.55	74.00	-22.45	Vertical
5	16688.7815	37.68	15.71	53.39	74.00	-20.61	Vertical
6	17676.0293	36.30	18.10	54.40	74.00	-19.60	Vertical
7	17996.1660	35.73	19.76	55.49	74.00	-18.51	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17676.0293	26.26	18.10	44.36	54.00	-9.64	Vertical
2	17996.1660	26.05	19.76	45.81	54.00	-8.19	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Horizontal	PASS


PK Result:

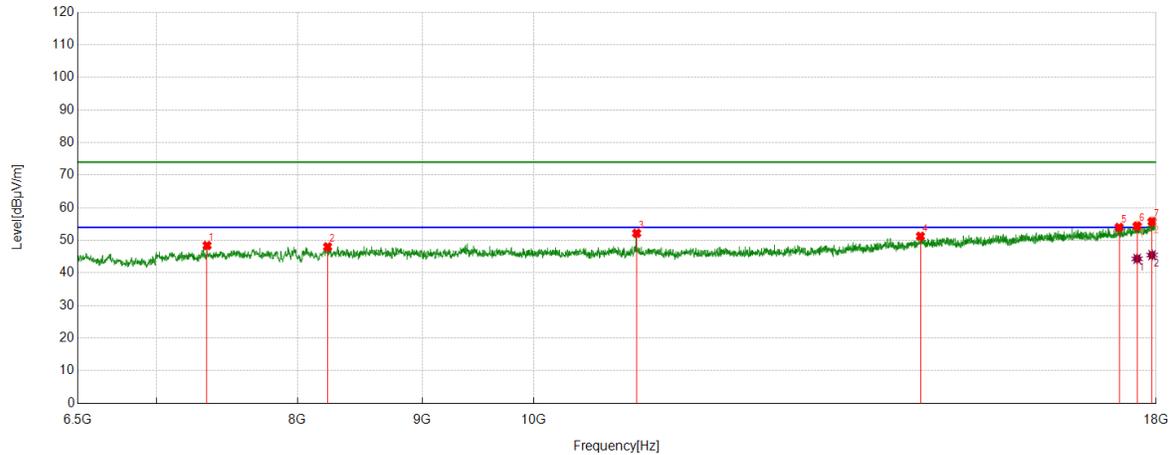
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7345.3909	45.13	4.03	49.16	74.00	-24.84	Horizontal
2	8255.9593	42.78	6.19	48.97	74.00	-25.03	Horizontal
3	11020.2534	46.29	7.18	53.47	74.00	-20.53	Horizontal
4	14790.9652	38.92	12.87	51.79	74.00	-22.21	Horizontal
5	15946.9078	38.83	14.47	53.30	74.00	-20.70	Horizontal
6	17628.1047	36.06	18.06	54.12	74.00	-19.88	Horizontal
7	17921.4036	35.89	19.36	55.25	74.00	-18.75	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17628.1047	25.86	18.06	43.92	54.00	-10.08	Horizontal
2	17921.4036	26.46	19.36	45.82	54.00	-8.18	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Vertical	PASS


PK Result:

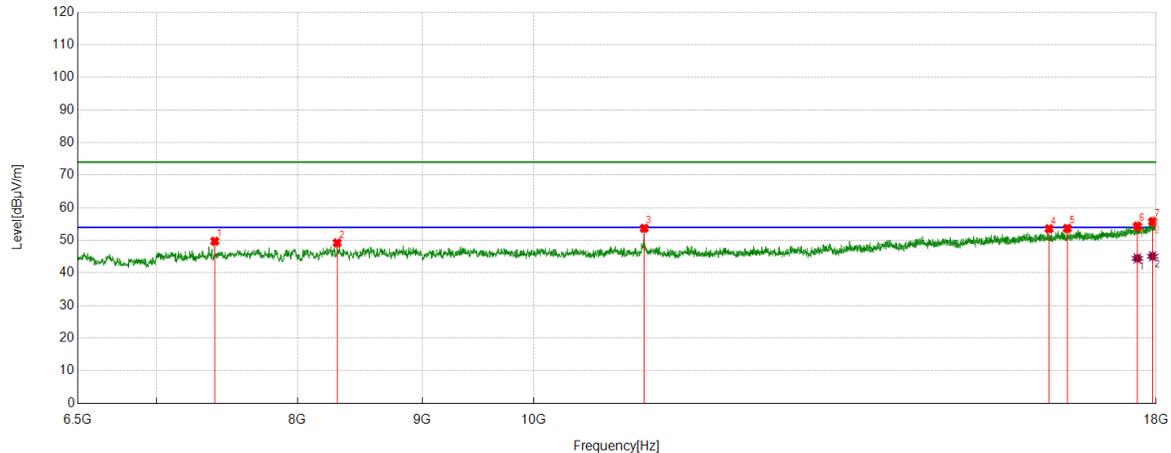
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7345.3909	44.40	4.03	48.43	74.00	-25.57	Vertical
2	8231.0385	41.97	6.06	48.03	74.00	-25.97	Vertical
3	11020.2534	44.99	7.18	52.17	74.00	-21.83	Vertical
4	14407.5679	38.41	12.85	51.26	74.00	-22.74	Vertical
5	17380.8135	36.65	17.34	53.99	74.00	-20.01	Vertical
6	17679.8633	36.31	18.11	54.42	74.00	-19.58	Vertical
7	17930.9885	36.39	19.37	55.76	74.00	-18.24	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17679.8633	26.22	18.11	44.33	54.00	-9.67	Vertical
2	17930.9885	26.11	19.37	45.48	54.00	-8.52	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Horizontal	PASS


PK Result:

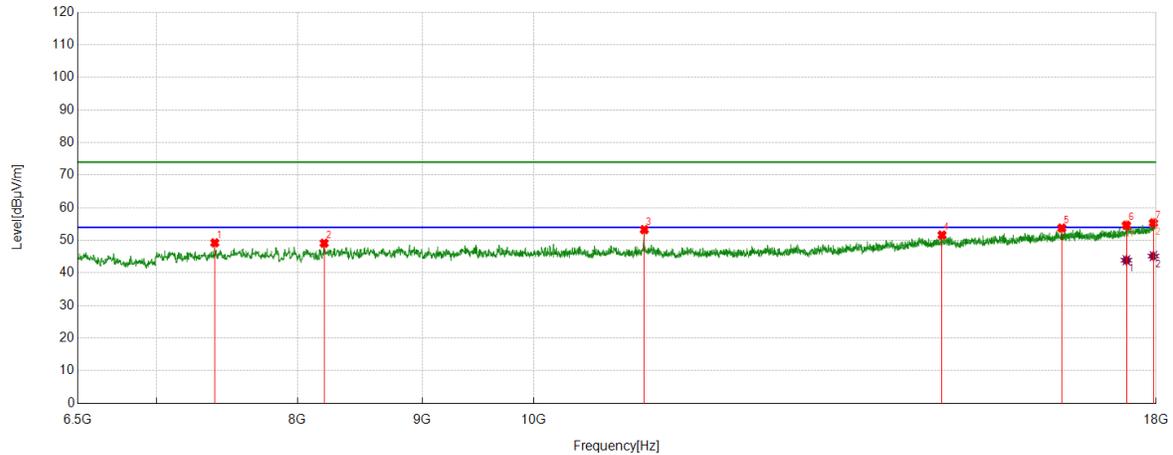
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7399.0665	45.49	4.25	49.74	74.00	-24.26	Horizontal
2	8305.8010	42.90	6.32	49.22	74.00	-24.78	Horizontal
3	11098.8498	46.35	7.35	53.70	74.00	-20.30	Horizontal
4	16268.9615	38.45	15.11	53.56	74.00	-20.44	Horizontal
5	16550.7585	37.81	15.85	53.66	74.00	-20.34	Horizontal
6	17683.6973	36.22	18.13	54.35	74.00	-19.65	Horizontal
7	17940.5734	36.33	19.45	55.78	74.00	-18.22	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17683.6973	26.35	18.13	44.48	54.00	-9.52	Horizontal
2	17940.5734	25.68	19.45	45.13	54.00	-8.87	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Vertical	PASS


PK Result:

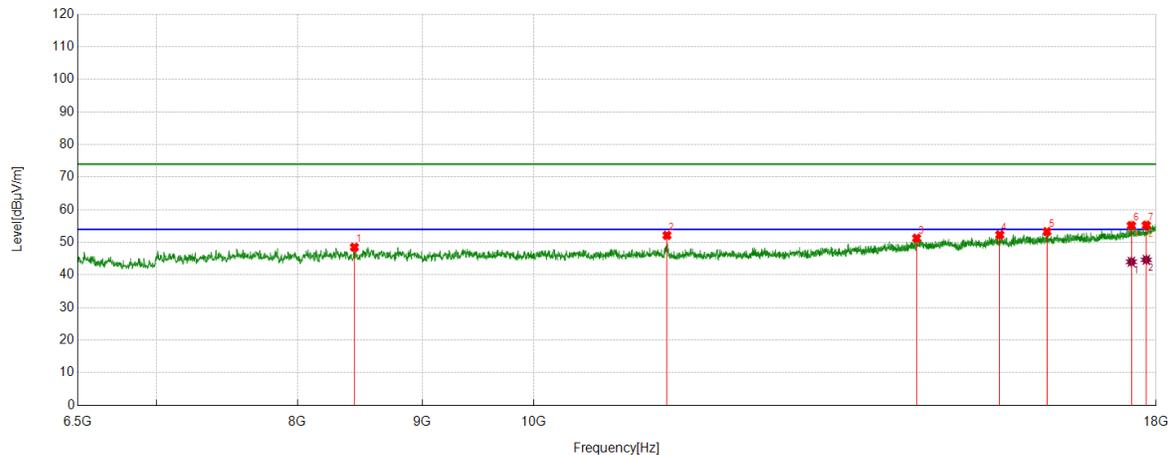
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7399.0665	45.00	4.25	49.25	74.00	-24.75	Vertical
2	8204.2007	43.07	6.05	49.12	74.00	-24.88	Vertical
3	11100.7668	45.93	7.35	53.28	74.00	-20.72	Vertical
4	14704.7008	38.90	12.73	51.63	74.00	-22.37	Vertical
5	16464.4941	38.01	15.77	53.78	74.00	-20.22	Vertical
6	17501.5836	37.01	17.62	54.63	74.00	-19.37	Vertical
7	17953.9923	35.81	19.54	55.35	74.00	-18.65	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17501.5836	26.28	17.62	43.90	54.00	-10.10	Vertical
2	17953.9923	25.62	19.54	45.16	54.00	-8.84	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Horizontal	PASS


PK Result:

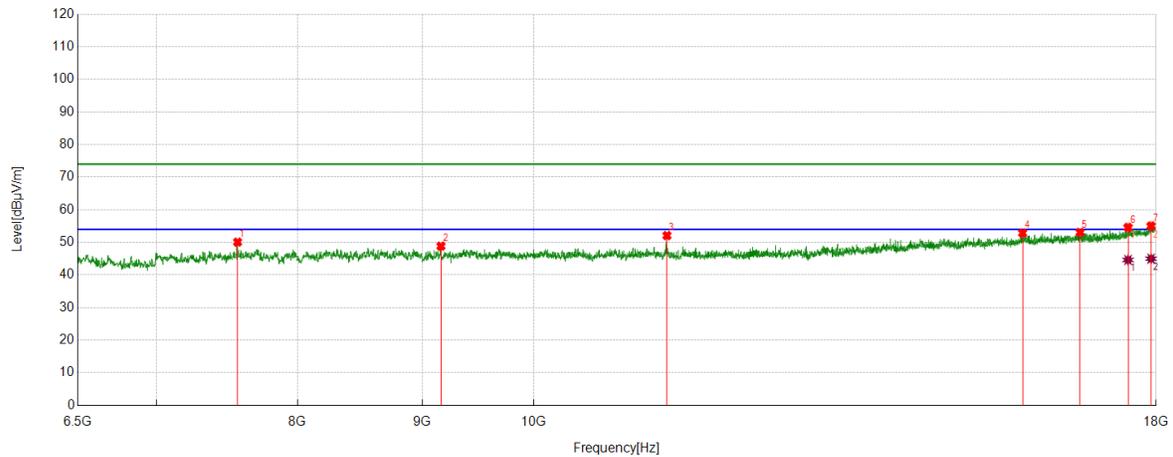
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8441.9070	42.40	6.11	48.51	74.00	-25.49	Horizontal
2	11340.3901	44.80	7.34	52.14	74.00	-21.86	Horizontal
3	14355.8093	38.63	12.65	51.28	74.00	-22.72	Horizontal
4	15529.0048	38.52	13.79	52.31	74.00	-21.69	Horizontal
5	16236.3727	38.07	15.22	53.29	74.00	-20.71	Horizontal
6	17584.0140	37.18	17.98	55.16	74.00	-18.84	Horizontal
7	17833.2222	36.15	19.11	55.26	74.00	-18.74	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17584.0140	26.06	17.98	44.04	54.00	-9.96	Horizontal
2	17833.2222	25.54	19.11	44.65	54.00	-9.35	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Vertical	PASS



PK Result:

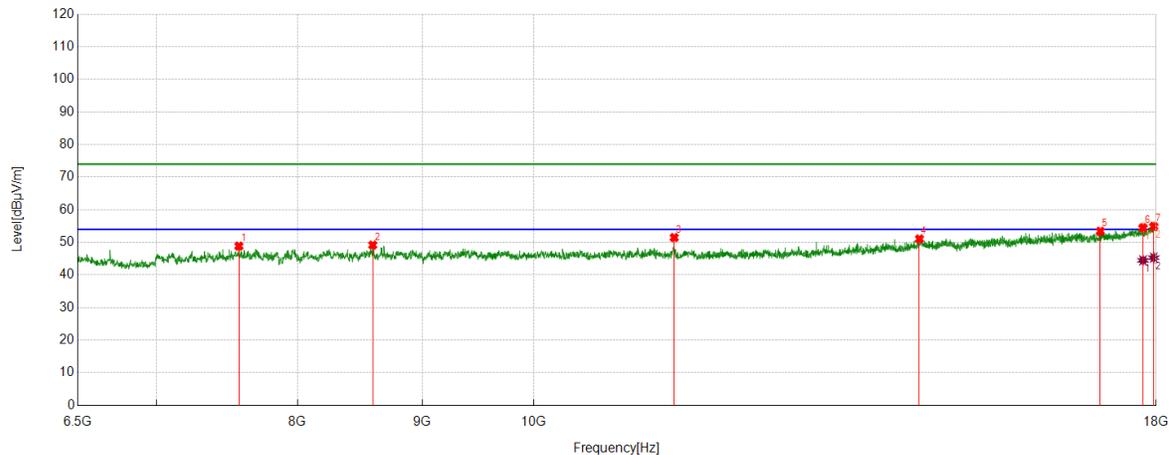
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7560.0933	45.57	4.51	50.08	74.00	-23.92	Vertical
2	9160.7768	42.95	5.88	48.83	74.00	-25.17	Vertical
3	11340.3901	44.74	7.34	52.08	74.00	-21.92	Vertical
4	15866.3944	38.19	14.67	52.86	74.00	-21.14	Vertical
5	16752.0420	36.73	16.32	53.05	74.00	-20.95	Vertical
6	17528.4214	37.00	17.58	54.58	74.00	-19.42	Vertical
7	17913.7356	35.73	19.29	55.02	74.00	-18.98	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17528.4214	27.03	17.58	44.61	54.00	-9.39	Vertical
2	17913.7356	25.70	19.29	44.99	54.00	-9.01	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Horizontal	PASS



PK Result:

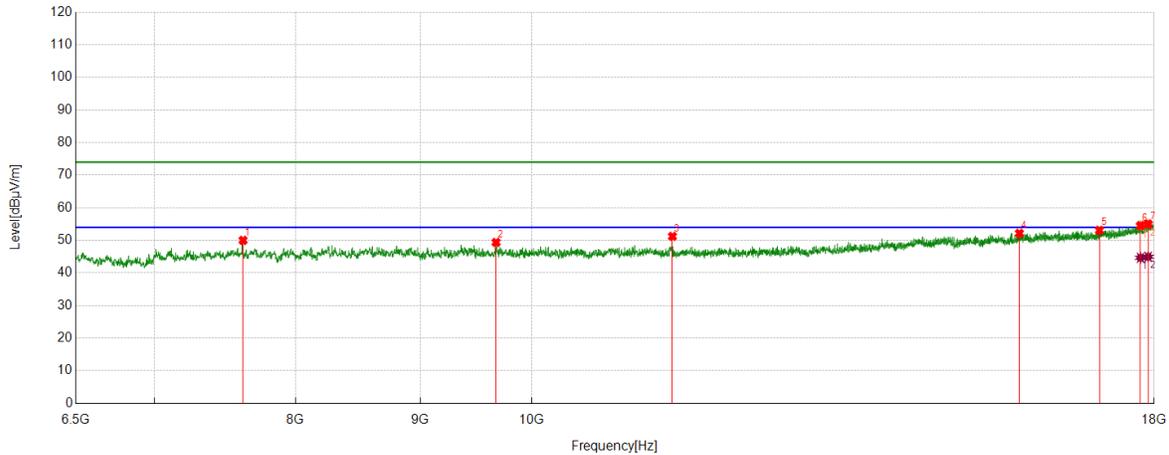
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7569.6783	43.99	4.86	48.85	74.00	-25.15	Horizontal
2	8589.5149	43.24	5.93	49.17	74.00	-24.83	Horizontal
3	11418.9865	44.09	7.38	51.47	74.00	-22.53	Horizontal
4	14394.1490	38.29	12.77	51.06	74.00	-22.94	Horizontal
5	17076.0127	37.04	16.35	53.39	74.00	-20.61	Horizontal
6	17777.6296	35.73	18.76	54.49	74.00	-19.51	Horizontal
7	17959.7433	35.28	19.63	54.91	74.00	-19.09	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17777.6296	25.72	18.76	44.48	54.00	-9.52	Horizontal
2	17959.7433	25.66	19.63	45.29	54.00	-8.71	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Vertical	PASS



PK Result:

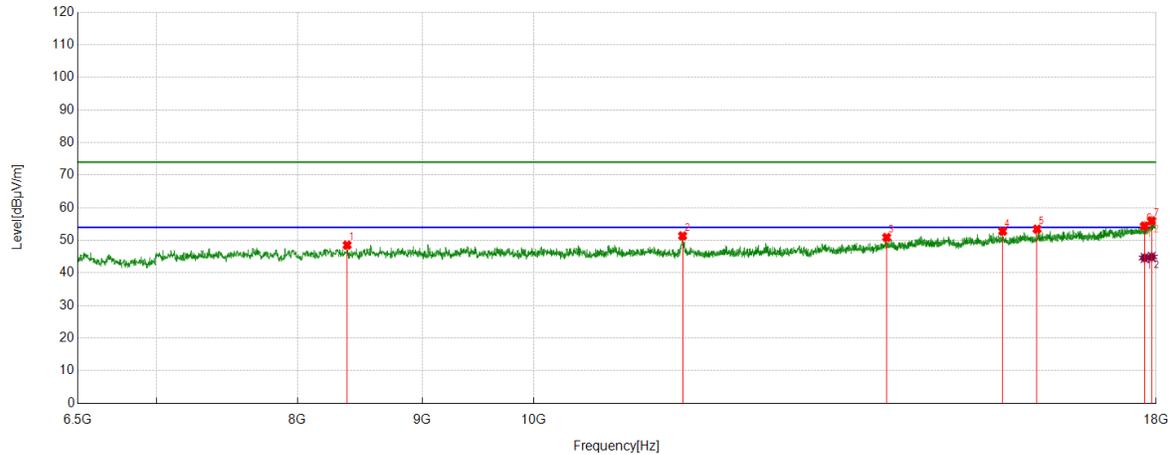
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7613.7690	45.00	5.01	50.01	74.00	-23.99	Vertical
2	9668.7781	42.90	6.48	49.38	74.00	-24.62	Vertical
3	11420.9035	43.84	7.38	51.22	74.00	-22.78	Vertical
4	15849.1415	37.32	14.82	52.14	74.00	-21.86	Vertical
5	17093.2655	36.64	16.44	53.08	74.00	-20.92	Vertical
6	17769.9617	35.90	18.65	54.55	74.00	-19.45	Vertical
7	17898.3997	35.82	19.21	55.03	74.00	-18.97	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17769.9617	26.00	18.65	44.65	54.00	-9.35	Vertical
2	17898.3997	25.76	19.21	44.97	54.00	-9.03	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Horizontal	PASS


PK Result:

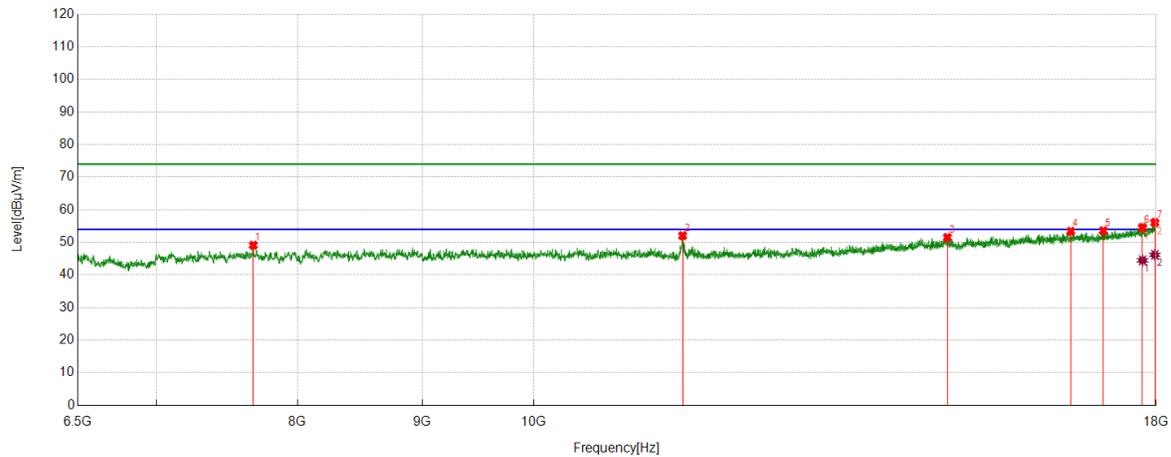
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8384.3974	42.70	5.85	48.55	74.00	-25.45	Horizontal
2	11509.0848	43.78	7.59	51.37	74.00	-22.63	Horizontal
3	13955.1592	39.45	11.45	50.90	74.00	-23.10	Horizontal
4	15571.1785	39.17	13.63	52.80	74.00	-21.20	Horizontal
5	16084.9308	38.78	14.67	53.45	74.00	-20.55	Horizontal
6	17802.5504	35.53	18.87	54.40	74.00	-19.60	Horizontal
7	17925.2375	36.62	19.37	55.99	74.00	-18.01	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17802.5504	25.75	18.87	44.62	54.00	-9.38	Horizontal
2	17925.2375	25.54	19.37	44.91	54.00	-9.09	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Vertical	PASS


PK Result:

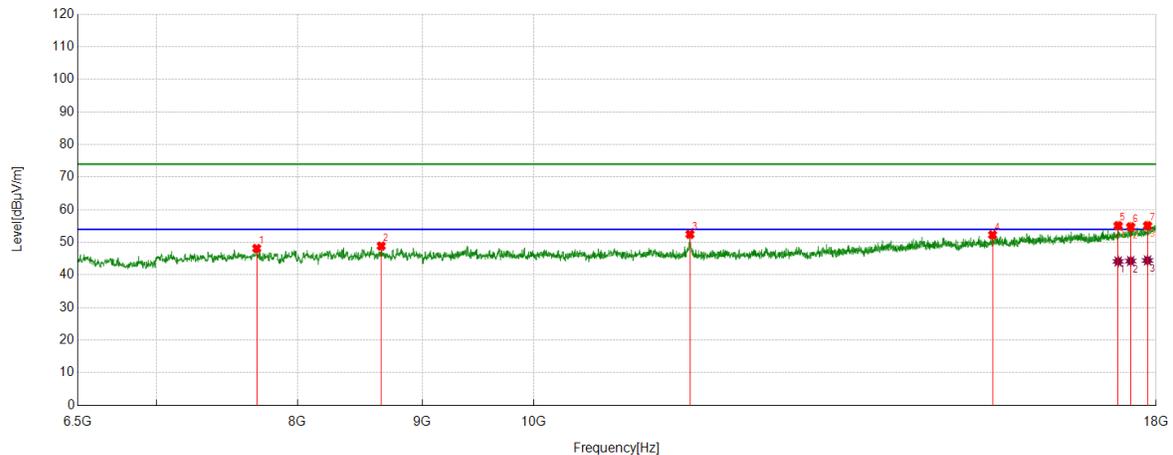
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7673.1955	43.86	5.25	49.11	74.00	-24.89	Vertical
2	11509.0848	44.46	7.59	52.05	74.00	-21.95	Vertical
3	14779.4632	38.67	12.84	51.51	74.00	-22.49	Vertical
4	16606.3511	37.48	15.89	53.37	74.00	-20.63	Vertical
5	17123.9373	37.04	16.52	53.56	74.00	-20.44	Vertical
6	17769.9617	35.91	18.65	54.56	74.00	-19.44	Vertical
7	17976.9962	36.34	19.75	56.09	74.00	-17.91	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17769.9617	25.83	18.65	44.48	54.00	-9.52	Vertical
2	17976.9962	26.43	19.75	46.18	54.00	-7.82	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7698.1164	42.60	5.53	48.13	74.00	-25.87	Horizontal
2	8658.5264	42.45	6.41	48.86	74.00	-25.14	Horizontal
3	11589.5983	44.71	7.75	52.46	74.00	-21.54	Horizontal
4	15423.5706	38.56	13.74	52.30	74.00	-21.70	Horizontal
5	17365.4776	37.81	17.31	55.12	74.00	-18.88	Horizontal
6	17572.5121	36.85	17.92	54.77	74.00	-19.23	Horizontal
7	17854.3091	35.94	19.19	55.13	74.00	-18.87	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17365.4776	26.83	17.31	44.14	54.00	-9.86	Horizontal
2	17572.5121	26.35	17.92	44.27	54.00	-9.73	Horizontal
3	17854.3091	25.27	19.19	44.46	54.00	-9.54	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

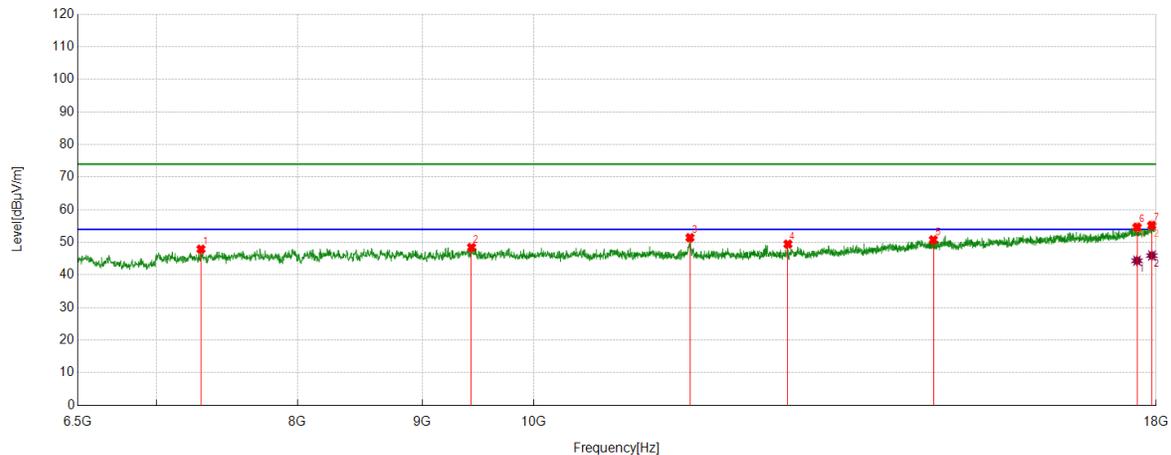
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Vertical	PASS


PK Result:

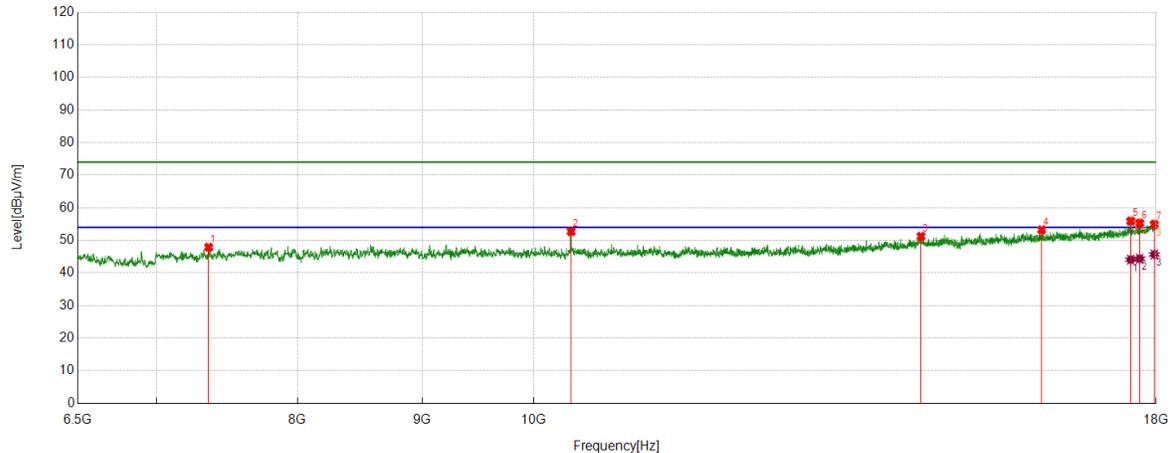
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7303.2172	44.17	3.74	47.91	74.00	-26.09	Vertical
2	9429.1549	41.84	6.60	48.44	74.00	-25.56	Vertical
3	11589.5983	43.69	7.75	51.44	74.00	-22.56	Vertical
4	12712.9522	40.44	9.02	49.46	74.00	-24.54	Vertical
5	14583.9307	38.07	12.71	50.78	74.00	-23.22	Vertical
6	17677.9463	36.56	18.10	54.66	74.00	-19.34	Vertical
7	17927.1545	35.85	19.37	55.22	74.00	-18.78	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17677.9463	26.27	18.10	44.37	54.00	-9.63	Vertical
2	17927.1545	26.59	19.37	45.96	54.00	-8.04	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7356.8928	43.76	4.13	47.89	74.00	-26.11	Horizontal
2	10358.8931	46.00	6.70	52.70	74.00	-21.30	Horizontal
3	14415.2359	38.32	12.91	51.23	74.00	-22.77	Horizontal
4	16155.8593	38.33	14.90	53.23	74.00	-20.77	Horizontal
5	17572.5121	37.99	17.92	55.91	74.00	-18.09	Horizontal
6	17722.0370	36.81	18.49	55.30	74.00	-18.70	Horizontal
7	17969.3282	35.31	19.63	54.94	74.00	-19.06	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17572.5121	26.16	17.92	44.08	54.00	-9.92	Horizontal
2	17722.0370	25.87	18.49	44.36	54.00	-9.64	Horizontal
3	17969.3282	26.03	19.63	45.66	54.00	-8.34	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

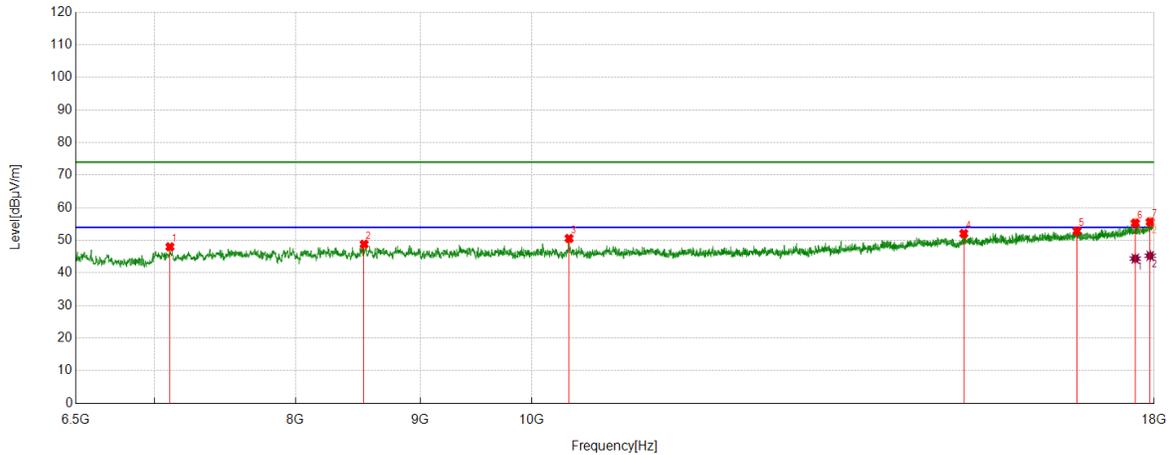
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Vertical	PASS



PK Result:

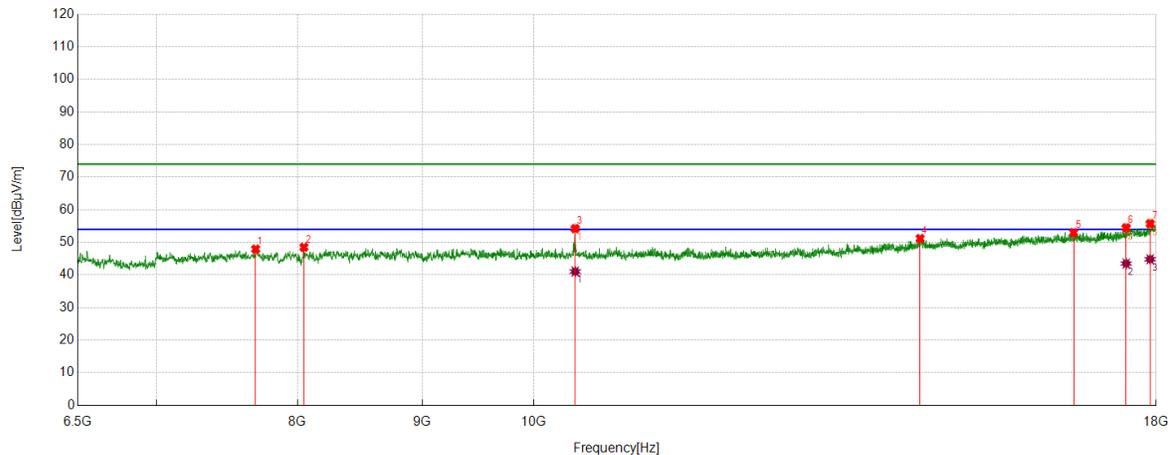
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7105.7676	44.12	3.89	48.01	74.00	-25.99	Vertical
2	8535.8393	42.74	6.06	48.80	74.00	-25.20	Vertical
3	10358.8931	43.89	6.70	50.59	74.00	-23.41	Vertical
4	15038.2564	39.07	13.02	52.09	74.00	-21.91	Vertical
5	16734.7891	36.83	16.04	52.87	74.00	-21.13	Vertical
6	17681.7803	37.19	18.12	55.31	74.00	-18.69	Vertical
7	17932.9055	36.27	19.39	55.66	74.00	-18.34	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17681.7803	26.28	18.12	44.40	54.00	-9.60	Vertical
2	17932.9055	25.88	19.39	45.27	54.00	-8.73	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7690.4484	42.79	5.14	47.93	74.00	-26.07	Horizontal
2	8048.9248	42.82	5.67	48.49	74.00	-25.51	Horizontal
3	10399.1499	47.50	6.72	54.22	74.00	-19.78	Horizontal
4	14403.7340	38.40	12.79	51.19	74.00	-22.81	Horizontal
5	16650.4417	37.29	15.70	52.99	74.00	-21.01	Horizontal
6	17497.7496	36.85	17.63	54.48	74.00	-19.52	Horizontal
7	17898.3997	36.54	19.21	55.75	74.00	-18.25	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10399.1499	34.33	6.72	41.05	54.00	-12.95	Horizontal
2	17497.7496	25.87	17.63	43.50	54.00	-10.50	Horizontal
3	17898.3997	25.60	19.21	44.81	54.00	-9.19	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

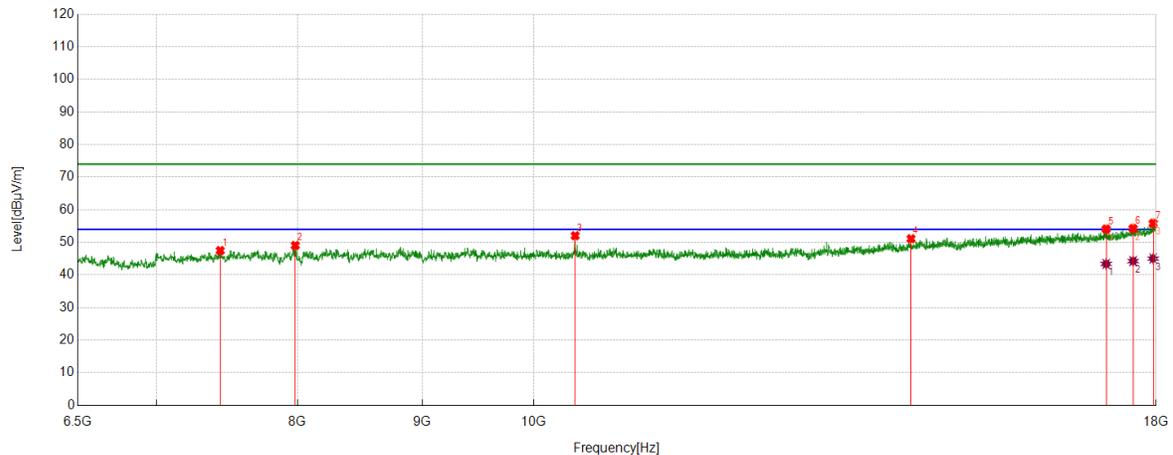
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7437.4062	43.27	4.21	47.48	74.00	-26.52	Vertical
2	7983.7473	43.59	5.45	49.04	74.00	-24.96	Vertical
3	10399.1499	45.31	6.72	52.03	74.00	-21.97	Vertical
4	14281.0468	38.95	12.16	51.11	74.00	-22.89	Vertical
5	17169.9450	37.62	16.46	54.08	74.00	-19.92	Vertical
6	17612.7688	36.19	18.06	54.25	74.00	-19.75	Vertical
7	17950.1584	36.36	19.49	55.85	74.00	-18.15	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17169.9450	26.92	16.46	43.38	54.00	-10.62	Vertical
2	17612.7688	26.19	18.06	44.25	54.00	-9.75	Vertical
3	17950.1584	25.54	19.49	45.03	54.00	-8.97	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

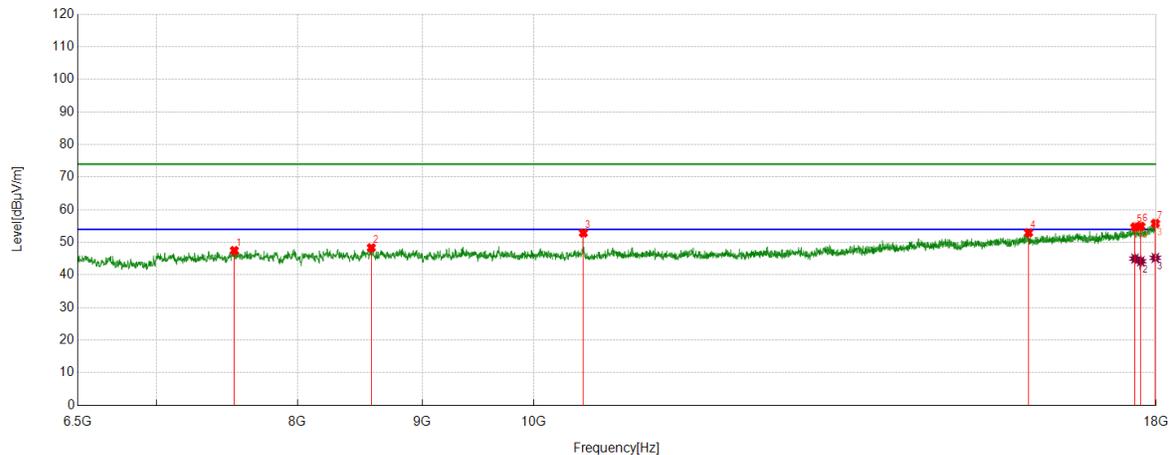
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7537.0895	42.97	4.51	47.48	74.00	-26.52	Horizontal
2	8578.0130	41.95	6.40	48.35	74.00	-25.65	Horizontal
3	10479.6633	46.09	6.78	52.87	74.00	-21.13	Horizontal
4	15956.4927	38.41	14.53	52.94	74.00	-21.06	Horizontal
5	17643.4406	36.71	18.01	54.72	74.00	-19.28	Horizontal
6	17741.2069	36.36	18.55	54.91	74.00	-19.09	Horizontal
7	17986.5811	36.01	19.80	55.81	74.00	-18.19	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17643.4406	26.99	18.01	45.00	54.00	-9.00	Horizontal
2	17741.2069	25.65	18.55	44.20	54.00	-9.80	Horizontal
3	17986.5811	25.43	19.80	45.23	54.00	-8.77	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

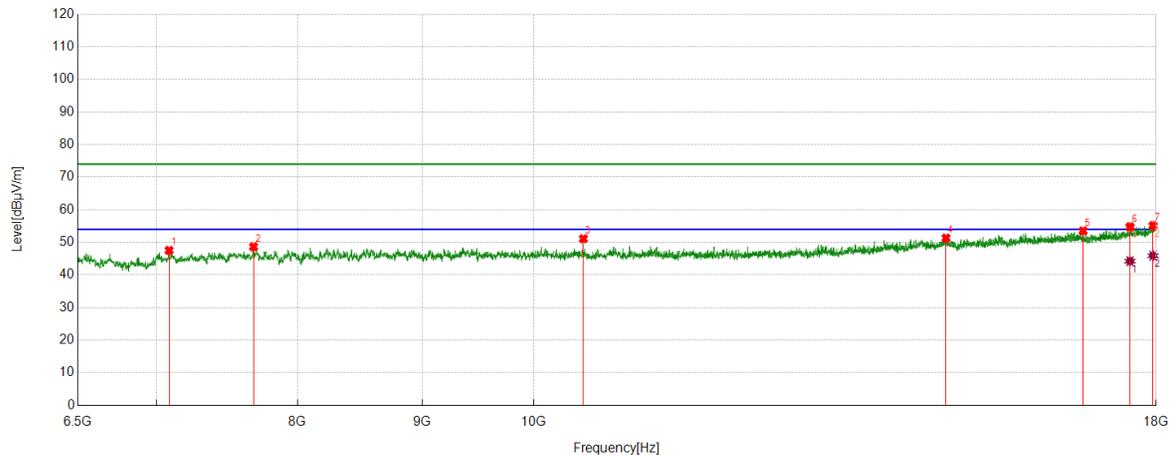
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS


PK Result:

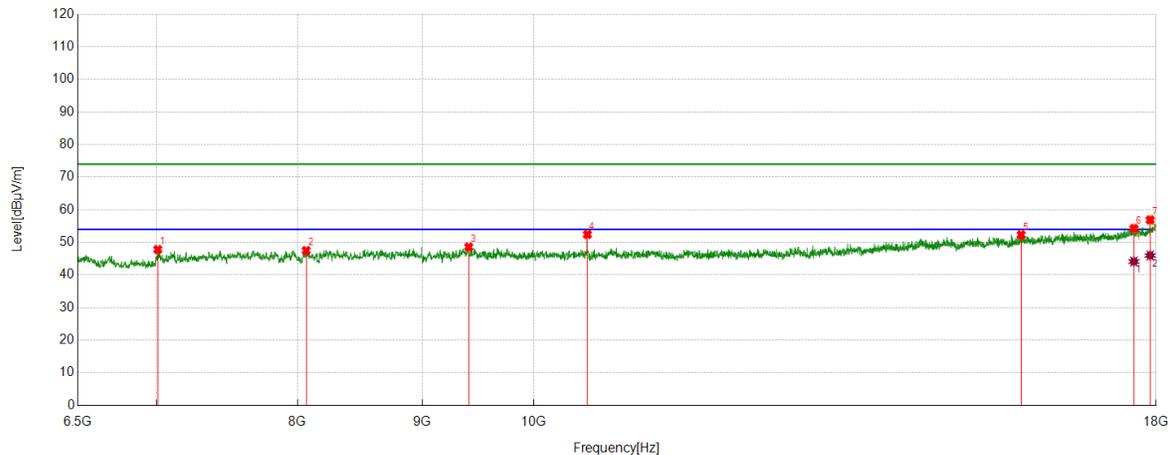
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7086.5978	43.71	3.82	47.53	74.00	-26.47	Vertical
2	7675.1125	43.36	5.28	48.64	74.00	-25.36	Vertical
3	10479.6633	44.33	6.78	51.11	74.00	-22.89	Vertical
4	14760.2934	38.35	12.96	51.31	74.00	-22.69	Vertical
5	16799.9667	37.43	16.10	53.53	74.00	-20.47	Vertical
6	17561.0102	36.97	17.79	54.76	74.00	-19.24	Vertical
7	17948.2414	35.67	19.48	55.15	74.00	-18.85	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17561.0102	26.45	17.79	44.24	54.00	-9.76	Vertical
2	17948.2414	26.42	19.48	45.90	54.00	-8.10	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS


PK Result:

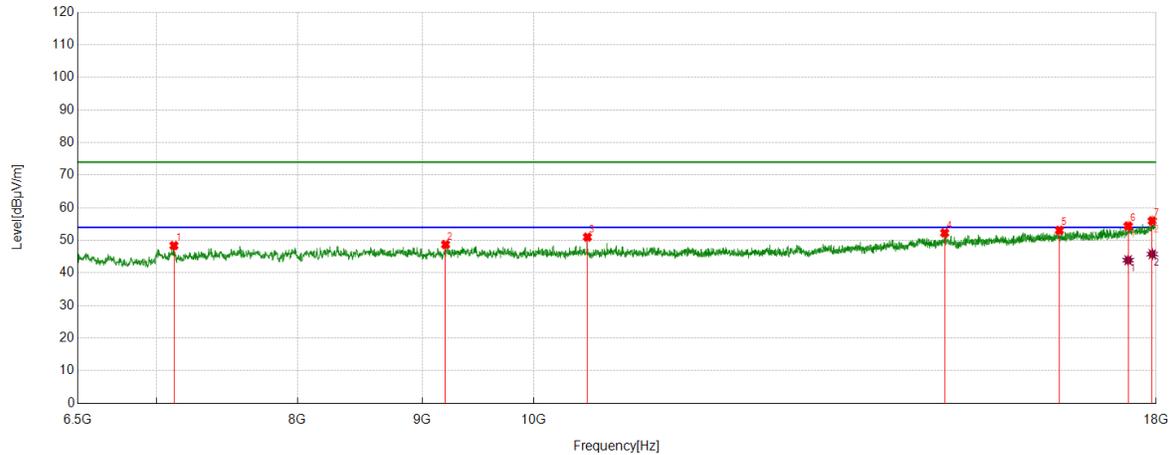
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7011.8353	44.24	3.57	47.81	74.00	-26.19	Horizontal
2	8066.1777	41.92	5.57	47.49	74.00	-26.51	Horizontal
3	9404.2340	42.02	6.57	48.59	74.00	-25.41	Horizontal
4	10519.9200	45.48	6.94	52.42	74.00	-21.58	Horizontal
5	15845.3076	37.62	14.69	52.31	74.00	-21.69	Horizontal
6	17626.1877	36.21	18.06	54.27	74.00	-19.73	Horizontal
7	17898.3997	37.69	19.21	56.90	74.00	-17.10	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17626.1877	26.05	18.06	44.11	54.00	-9.89	Horizontal
2	17898.3997	26.77	19.21	45.98	54.00	-8.02	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS



PK Result:

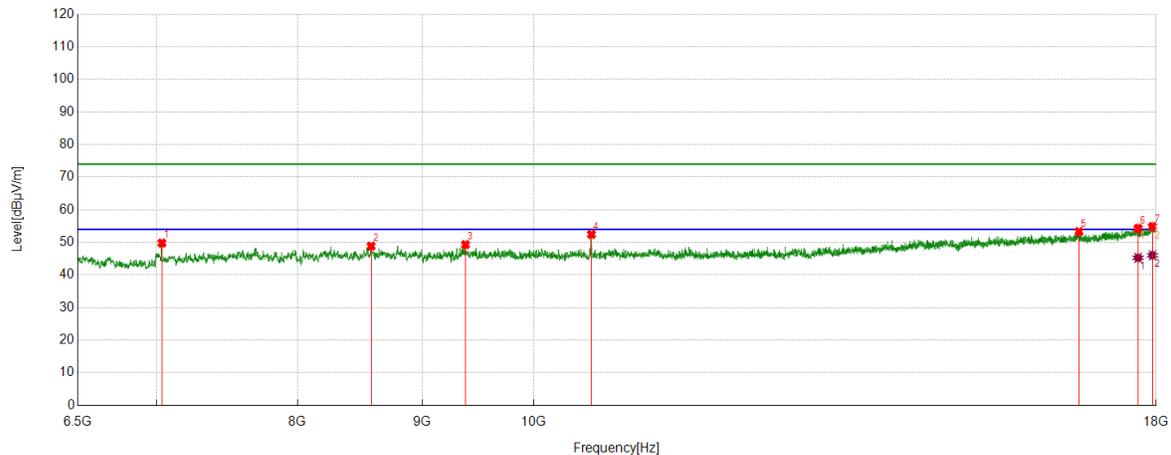
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7119.1865	44.42	3.97	48.39	74.00	-25.61	Vertical
2	9201.0335	42.66	6.04	48.70	74.00	-25.30	Vertical
3	10519.9200	44.06	6.94	51.00	74.00	-23.00	Vertical
4	14741.1235	39.37	12.90	52.27	74.00	-21.73	Vertical
5	16428.0713	37.71	15.38	53.09	74.00	-20.91	Vertical
6	17530.3384	36.83	17.57	54.40	74.00	-19.60	Vertical
7	17934.8225	36.58	19.40	55.98	74.00	-18.02	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17530.3384	26.33	17.57	43.90	54.00	-10.10	Vertical
2	17934.8225	26.38	19.40	45.78	54.00	-8.22	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS


PK Result:

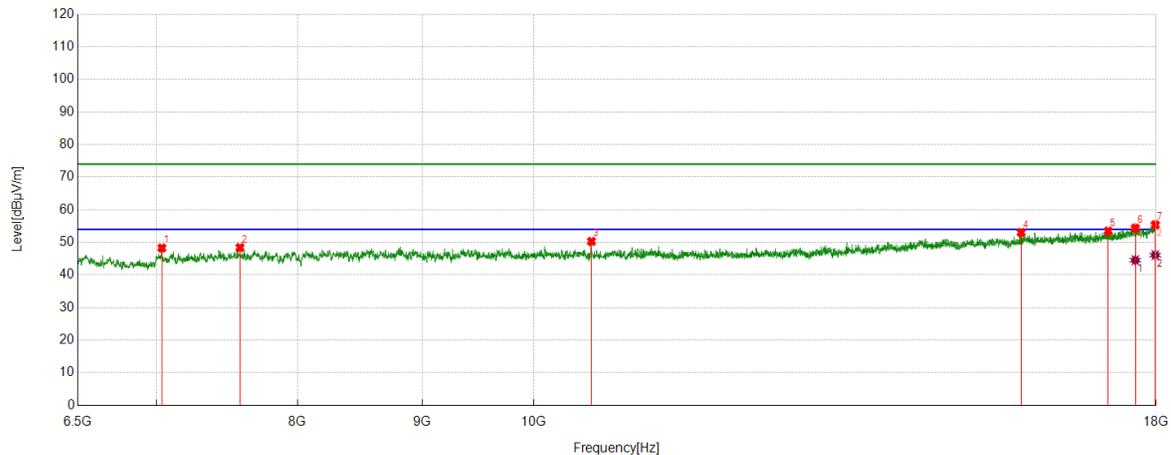
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7038.6731	45.99	3.80	49.79	74.00	-24.21	Horizontal
2	8576.0960	42.46	6.36	48.82	74.00	-25.18	Horizontal
3	9375.4792	42.83	6.48	49.31	74.00	-24.69	Horizontal
4	10560.1767	45.64	6.80	52.44	74.00	-21.56	Horizontal
5	16734.7891	37.25	16.04	53.29	74.00	-20.71	Horizontal
6	17695.1992	36.05	18.23	54.28	74.00	-19.72	Horizontal
7	17938.6564	35.39	19.44	54.83	74.00	-19.17	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17695.1992	27.03	18.23	45.26	54.00	-8.74	Horizontal
2	17938.6564	26.59	19.44	46.03	54.00	-7.97	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS


PK Result:

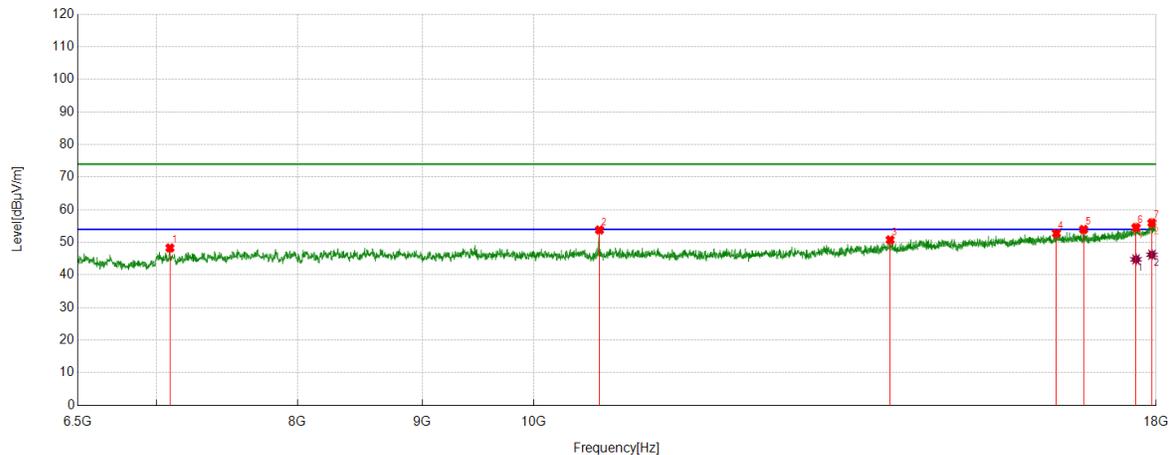
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7038.6731	44.47	3.80	48.27	74.00	-25.73	Vertical
2	7577.3462	43.63	4.78	48.41	74.00	-25.59	Vertical
3	10560.1767	43.49	6.80	50.29	74.00	-23.71	Vertical
4	15845.3076	38.34	14.69	53.03	74.00	-20.97	Vertical
5	17202.5338	36.82	16.64	53.46	74.00	-20.54	Vertical
6	17649.1915	36.35	18.03	54.38	74.00	-19.62	Vertical
7	17984.6641	35.60	19.80	55.40	74.00	-18.60	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17649.1915	26.50	18.03	44.53	54.00	-9.47	Vertical
2	17984.6641	26.30	19.80	46.10	54.00	-7.90	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS


PK Result:

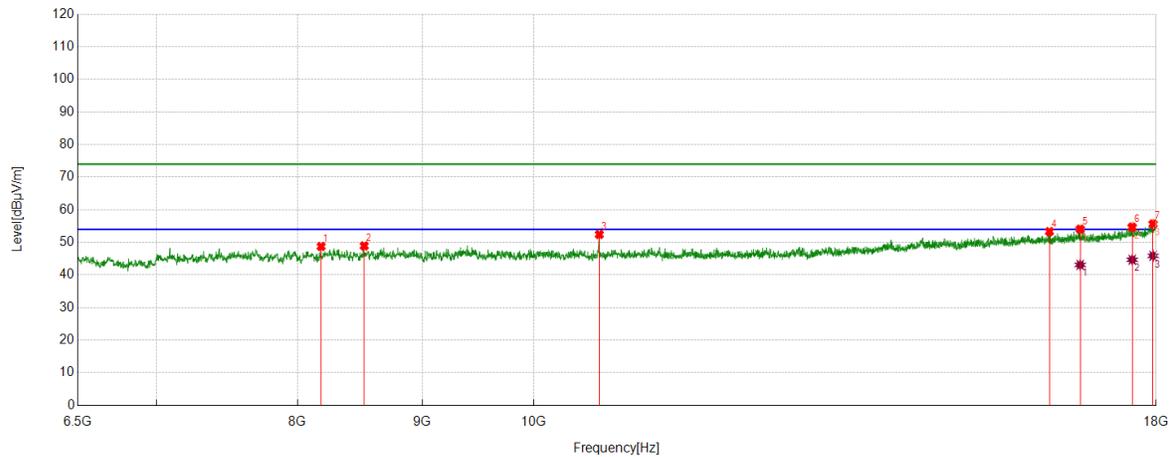
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7092.3487	44.43	3.85	48.28	74.00	-25.72	Horizontal
2	10640.6901	46.95	6.85	53.80	74.00	-20.20	Horizontal
3	14001.1669	38.99	11.76	50.75	74.00	-23.25	Horizontal
4	16382.0637	37.70	15.07	52.77	74.00	-21.23	Horizontal
5	16807.6346	37.65	16.30	53.95	74.00	-20.05	Horizontal
6	17660.6934	36.47	18.07	54.54	74.00	-19.46	Horizontal
7	17929.0715	36.60	19.37	55.97	74.00	-18.03	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17660.6934	26.71	18.07	44.78	54.00	-9.22	Horizontal
2	17929.0715	26.84	19.37	46.21	54.00	-7.79	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8181.1969	42.81	5.93	48.74	74.00	-25.26	Vertical
2	8520.5034	42.39	6.51	48.90	74.00	-25.10	Vertical
3	10638.7731	45.54	6.87	52.41	74.00	-21.59	Vertical
4	16274.7125	38.15	15.16	53.31	74.00	-20.69	Vertical
5	16753.9590	37.78	16.26	54.04	74.00	-19.96	Vertical
6	17597.4329	36.65	18.03	54.68	74.00	-19.32	Vertical
7	17948.2414	36.17	19.48	55.65	74.00	-18.35	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16753.9590	26.82	16.26	43.08	54.00	-10.92	Vertical
2	17597.4329	26.64	18.03	44.67	54.00	-9.33	Vertical
3	17948.2414	26.37	19.48	45.85	54.00	-8.15	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

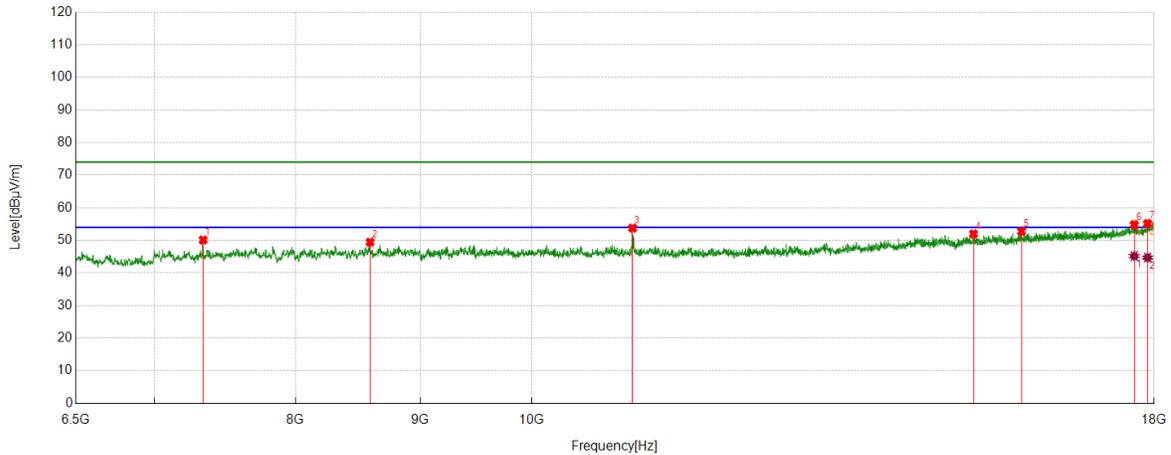
4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS



PK Result:

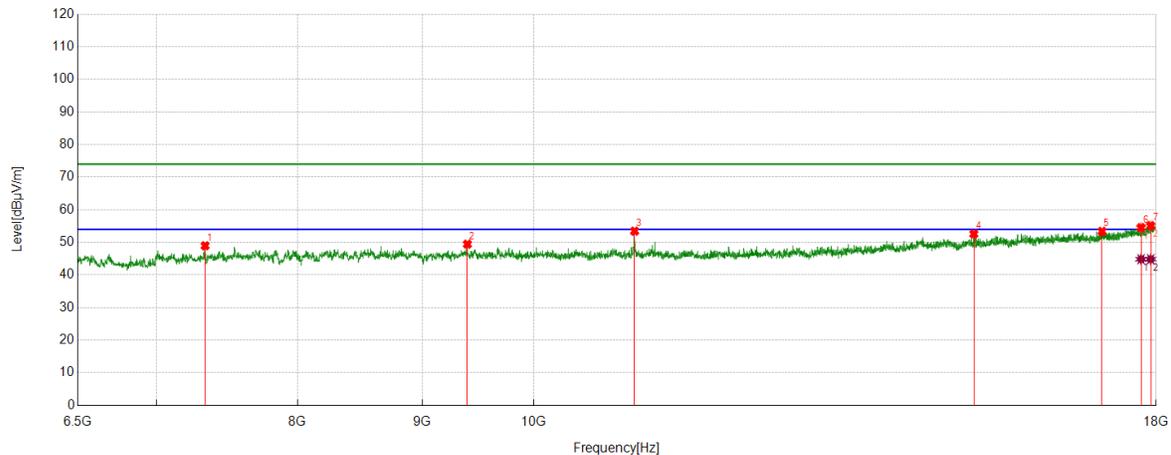
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7331.9720	46.22	3.89	50.11	74.00	-23.89	Horizontal
2	8583.7640	43.21	6.24	49.45	74.00	-24.55	Horizontal
3	10999.1665	46.49	7.28	53.77	74.00	-20.23	Horizontal
4	15176.2794	38.67	13.31	51.98	74.00	-22.02	Horizontal
5	15879.8133	38.05	14.73	52.78	74.00	-21.22	Horizontal
6	17664.5274	36.74	18.07	54.81	74.00	-19.19	Horizontal
7	17888.8148	35.85	19.30	55.15	74.00	-18.85	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17664.5274	27.09	18.07	45.16	54.00	-8.84	Horizontal
2	17888.8148	25.41	19.30	44.71	54.00	-9.29	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS


PK Result:

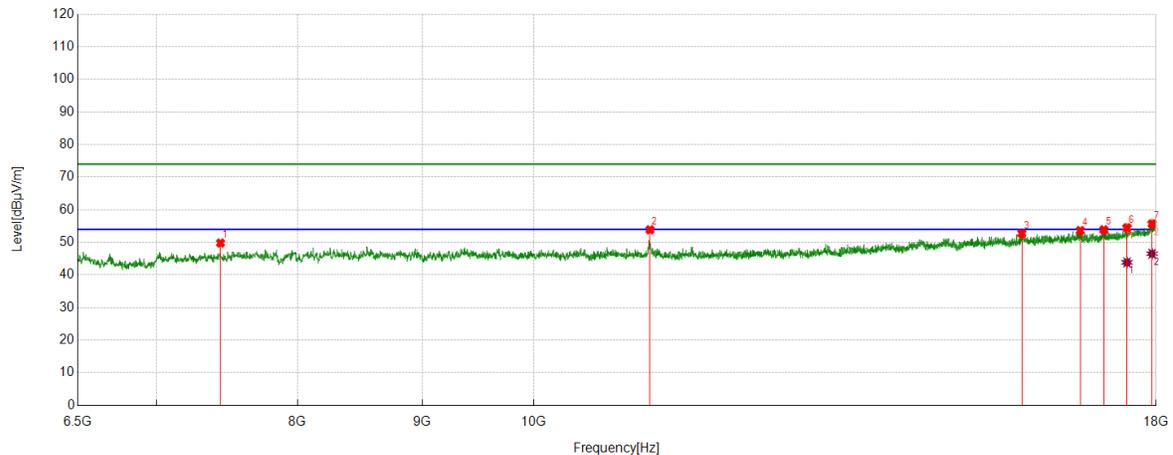
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7331.9720	45.06	3.89	48.95	74.00	-25.05	Vertical
2	9392.7321	42.87	6.57	49.44	74.00	-24.56	Vertical
3	10999.1665	46.16	7.28	53.44	74.00	-20.56	Vertical
4	15153.2755	39.32	13.25	52.57	74.00	-21.43	Vertical
5	17102.8505	36.90	16.47	53.37	74.00	-20.63	Vertical
6	17745.0408	35.94	18.58	54.52	74.00	-19.48	Vertical
7	17907.9847	35.88	19.23	55.11	74.00	-18.89	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17745.0408	26.25	18.58	44.83	54.00	-9.17	Vertical
2	17907.9847	25.60	19.23	44.83	54.00	-9.17	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS



PK Result:

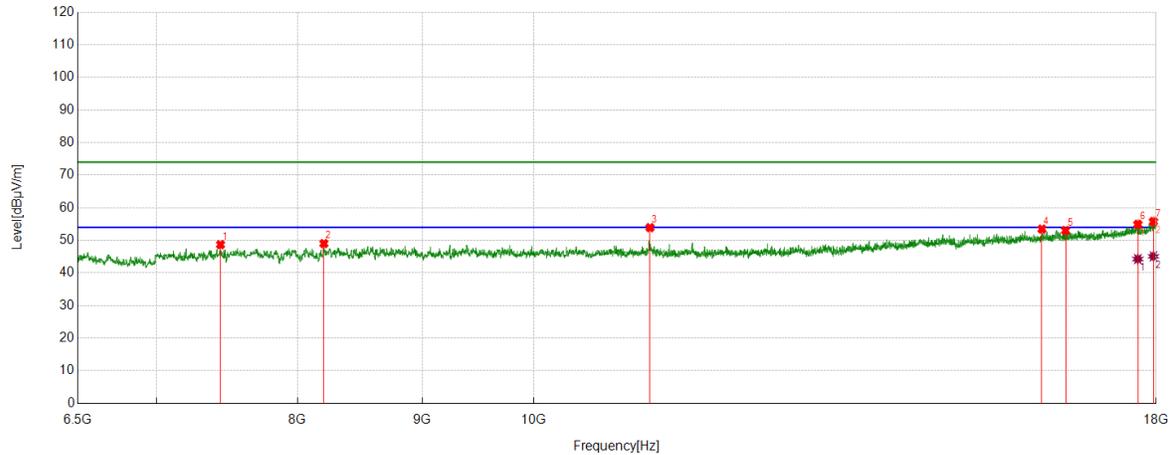
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7439.3232	45.60	4.20	49.80	74.00	-24.20	Horizontal
2	11160.1934	46.65	7.21	53.86	74.00	-20.14	Horizontal
3	15854.8925	37.95	14.75	52.70	74.00	-21.30	Horizontal
4	16753.9590	37.36	16.26	53.62	74.00	-20.38	Horizontal
5	17131.6053	37.28	16.59	53.87	74.00	-20.13	Horizontal
6	17511.1685	36.87	17.62	54.49	74.00	-19.51	Horizontal
7	17930.9885	36.33	19.37	55.70	74.00	-18.30	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17511.1685	26.23	17.62	43.85	54.00	-10.15	Horizontal
2	17930.9885	27.15	19.37	46.52	54.00	-7.48	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS


PK Result:

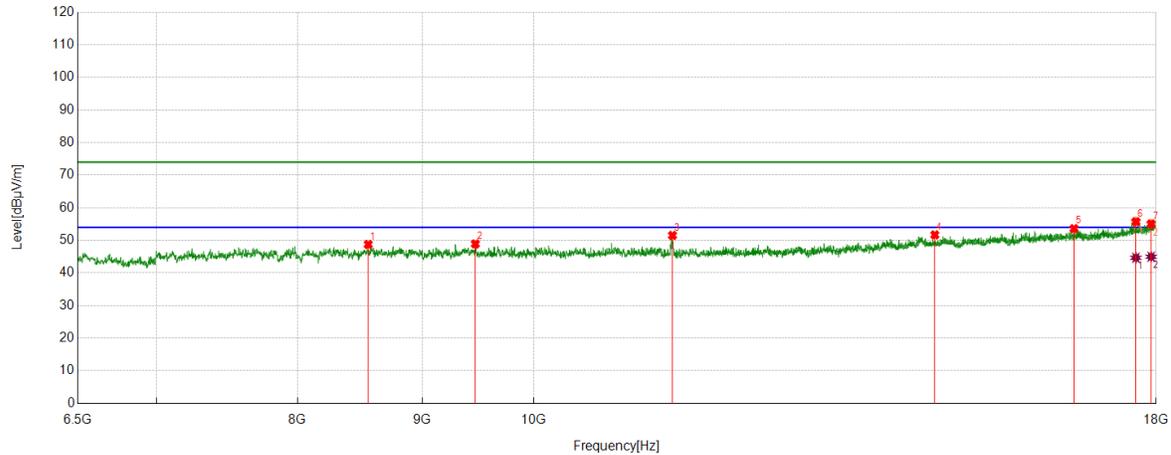
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7439.3232	44.49	4.20	48.69	74.00	-25.31	Vertical
2	8202.2837	42.91	6.10	49.01	74.00	-24.99	Vertical
3	11160.1934	46.69	7.21	53.90	74.00	-20.10	Vertical
4	16159.6933	38.54	14.92	53.46	74.00	-20.54	Vertical
5	16523.9207	37.21	15.80	53.01	74.00	-20.99	Vertical
6	17691.3652	36.72	18.19	54.91	74.00	-19.09	Vertical
7	17953.9923	36.24	19.54	55.78	74.00	-18.22	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17691.3652	26.08	18.19	44.27	54.00	-9.73	Vertical
2	17953.9923	25.55	19.54	45.09	54.00	-8.91	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS


PK Result:

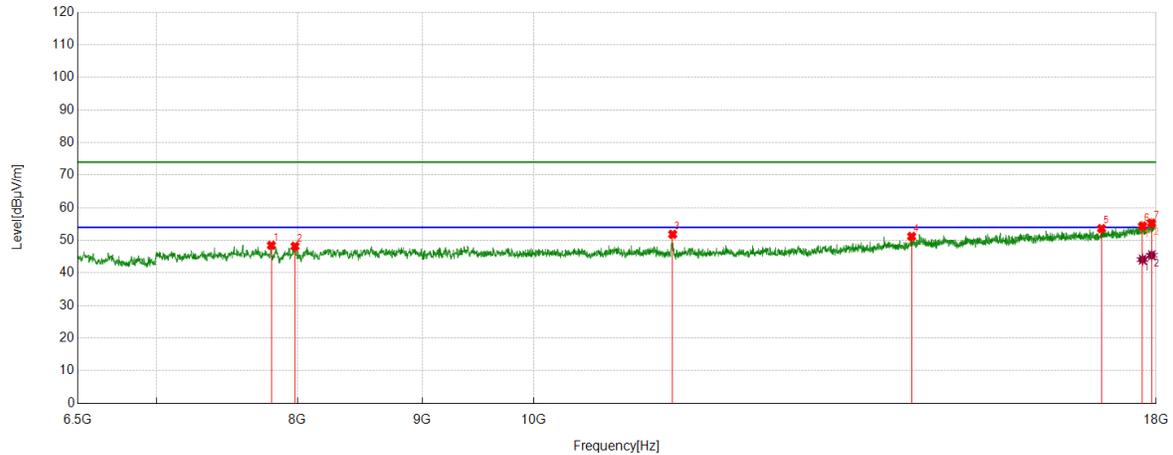
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8553.0922	42.41	6.33	48.74	74.00	-25.26	Horizontal
2	9463.6606	42.39	6.52	48.91	74.00	-25.09	Horizontal
3	11399.8166	44.11	7.41	51.52	74.00	-22.48	Horizontal
4	14605.0175	38.93	12.75	51.68	74.00	-22.32	Horizontal
5	16656.1927	37.95	15.65	53.60	74.00	-20.40	Horizontal
6	17658.7765	37.66	18.07	55.73	74.00	-18.27	Horizontal
7	17915.6526	35.72	19.32	55.04	74.00	-18.96	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17658.7765	26.59	18.07	44.66	54.00	-9.34	Horizontal
2	17915.6526	25.65	19.32	44.97	54.00	-9.03	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS


PK Result:

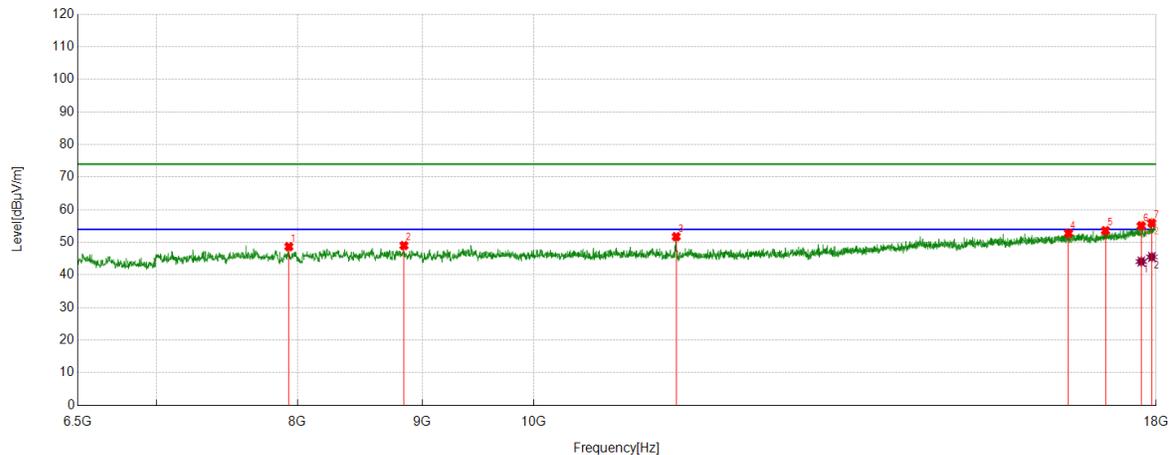
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7805.4676	43.13	5.34	48.47	74.00	-25.53	Vertical
2	7981.8303	42.78	5.41	48.19	74.00	-25.81	Vertical
3	11401.7336	44.43	7.42	51.85	74.00	-22.15	Vertical
4	14288.7148	39.02	12.19	51.21	74.00	-22.79	Vertical
5	17095.1825	37.15	16.46	53.61	74.00	-20.39	Vertical
6	17769.9617	35.75	18.65	54.40	74.00	-19.60	Vertical
7	17925.2375	35.91	19.37	55.28	74.00	-18.72	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17769.9617	25.45	18.65	44.10	54.00	-9.90	Vertical
2	17925.2375	26.06	19.37	45.43	54.00	-8.57	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS


PK Result:

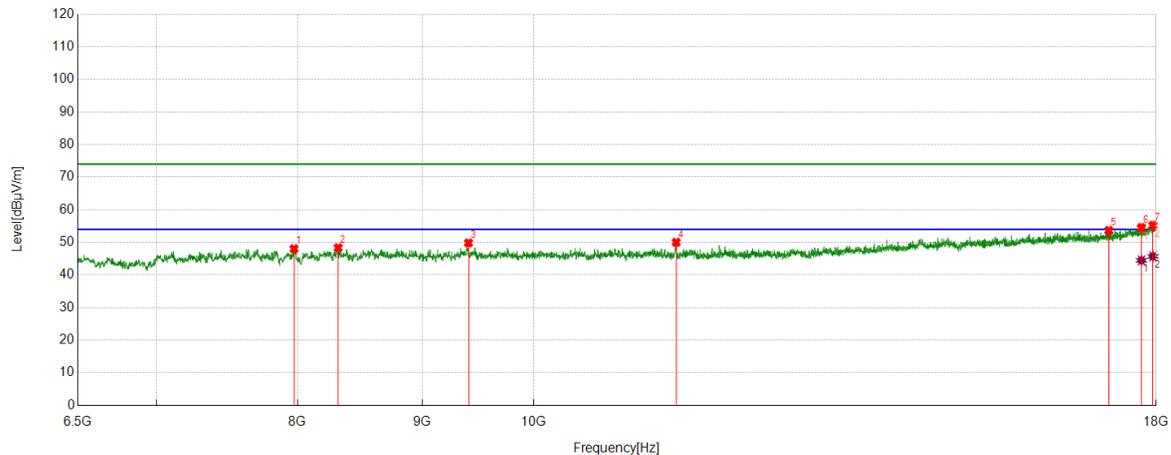
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7935.8226	43.10	5.58	48.68	74.00	-25.32	Horizontal
2	8846.3911	42.77	6.25	49.02	74.00	-24.98	Horizontal
3	11440.0733	44.38	7.37	51.75	74.00	-22.25	Horizontal
4	16569.9283	36.89	15.91	52.80	74.00	-21.20	Horizontal
5	17158.4431	37.13	16.47	53.60	74.00	-20.40	Horizontal
6	17748.8748	36.48	18.60	55.08	74.00	-18.92	Horizontal
7	17927.1545	36.54	19.37	55.91	74.00	-18.09	

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17748.8748	25.52	18.60	44.12	54.00	-9.88	Horizontal
2	17927.1545	26.15	19.37	45.52	54.00	-8.48	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7974.1624	42.64	5.38	48.02	74.00	-25.98	Vertical
2	8313.4689	42.14	6.19	48.33	74.00	-25.67	Vertical
3	9402.3171	43.24	6.59	49.83	74.00	-24.17	Vertical
4	11440.0733	42.65	7.37	50.02	74.00	-23.98	Vertical
5	17212.1187	36.88	16.77	53.65	74.00	-20.35	Vertical
6	17752.7088	35.94	18.58	54.52	74.00	-19.48	Vertical
7	17946.3244	35.74	19.48	55.22	74.00	-18.78	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17752.7088	25.90	18.58	44.48	54.00	-9.52	Vertical
2	17946.3244	26.21	19.48	45.69	54.00	-8.31	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.