

# FCC Test Report

**Equipment** : INFOTAG 2.9  
**Brand Name** : DIGI  
**Model No.** : IFT-4020  
**FCC ID** : SUFIFT4020  
**Standard** : 47 CFR FCC Part 15.249  
**Operating Band** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DXX  
**Applicant** : Teraoka Weigh System Pte Ltd  
**Manufacturer** : 4 Leng Kee Rd, #05-03/04/05&11, SIS Building,  
Singapore 159088

The product sample received on Oct. 14, 2014 and completely tested on Oct. 30, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
James Fan / Assistant Manager

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	6
1.3	Testing Applied Standards .....	6
1.4	Testing Location Information .....	6
1.5	Measurement Uncertainty .....	7
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>8</b>
2.1	The Worst Case Modulation Configuration .....	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration .....	8
2.4	Test Setup Diagram .....	9
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>10</b>
3.1	AC Power-line Conducted Emissions .....	10
3.2	Emission Bandwidth.....	12
3.3	Fundamental Emissions .....	14
3.4	Transmitter Radiated Unwanted Emissions .....	16
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>26</b>
	<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1-A2</b>

## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	See Note.	FCC 15.207	N/A
3.2	15.215(c)	Emission Bandwidth	2.81 MHz; fall in band	Information only	Complied
3.3	15.249(a)	Fundamental Emissions	[dBuV/m at 3m]: 88.54 (Margin 25.46dB) peak	[dBuV/m at 3m]: peak: 114	Complied
3.4	15.249(a)/(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 2400.00 MHz 66.68 (Margin 7.32dB) - peak	Harmonics: 40 dBuV/m@3m Other band: 50 dB or FCC 15.209, whichever is the lesser attenuation.	Complied

Note: The EUT consumes DC power from battery, therefore, conducted emission test is not applicable.



SPORTON INTERNATIONAL INC.  
TEL : 886-3-3273456  
FAX : 886-3-3270973

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)
2400-2483.5	GFSK	2402-2480	0-78 [79]	88.54
Note: Field strength performed peak level at 3m.				

### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas) ; Unique antenna connector

### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

### 1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] – (20 log x)
<input checked="" type="checkbox"/> 0.61304%	44.25
If worst duty < 100%, average emission = peak emission + 20 log x	

### 1.1.5 EUT Operational Condition

<b>Supply Voltage</b>	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC (3Vdc)	
<b>Type of DC Source</b>	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> Host	<input checked="" type="checkbox"/> Battery

## 1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	NOTEBOOK	DELL	Latitude E6440	8VXMD12
2	AP	DIGI	BS-03	--

Note: No.2 is provided by applicant.

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009

## 1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated Emission	03CH03-HY	Aaron Liang	24-25°C / 64-65%	Oct. 28 ~ Oct. 30, 2014
Test site registered number [643075] with FCC. Test site registered number [4086B-1] with IC.				

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth,		±1.42 %	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

## 2 Test Configuration of EUT




### 2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
GFSK-Transmit	88.54

### 2.2 Test Channel Frequencies Configuration


Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
GFSK-Transmit	2402-(F1), 2440-(F2), 2480-(F3)

### 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input checked="" type="checkbox"/> EUT will be a hand-held and battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is Y.		
Operating Mode	<input checked="" type="checkbox"/> 1. Transmit		
Test Mode	GFSK-Transmit		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			



## 2.4 Test Setup Diagram

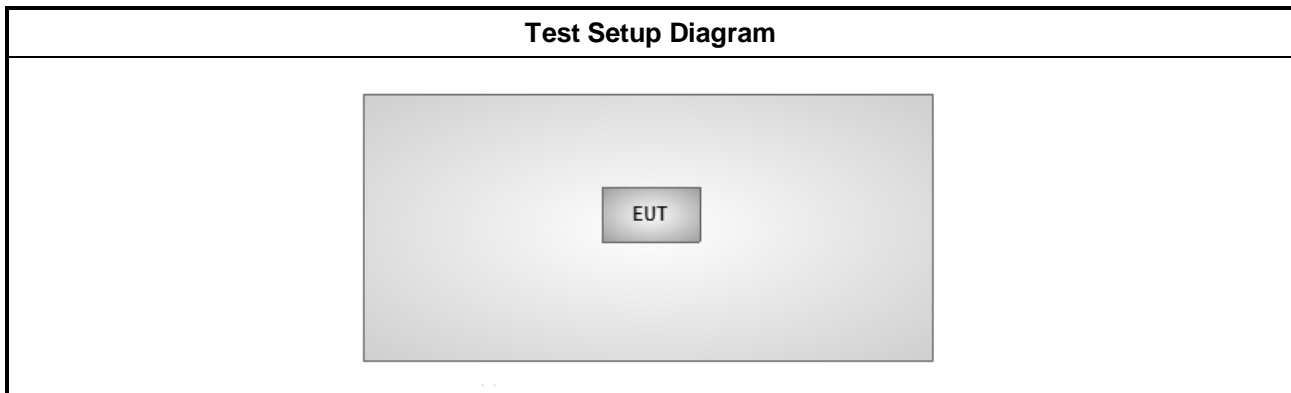

### 3 Transmitter Test Result

### 3.1 AC Power-line Conducted Emissions

### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

### 3.1.4 Test Setup

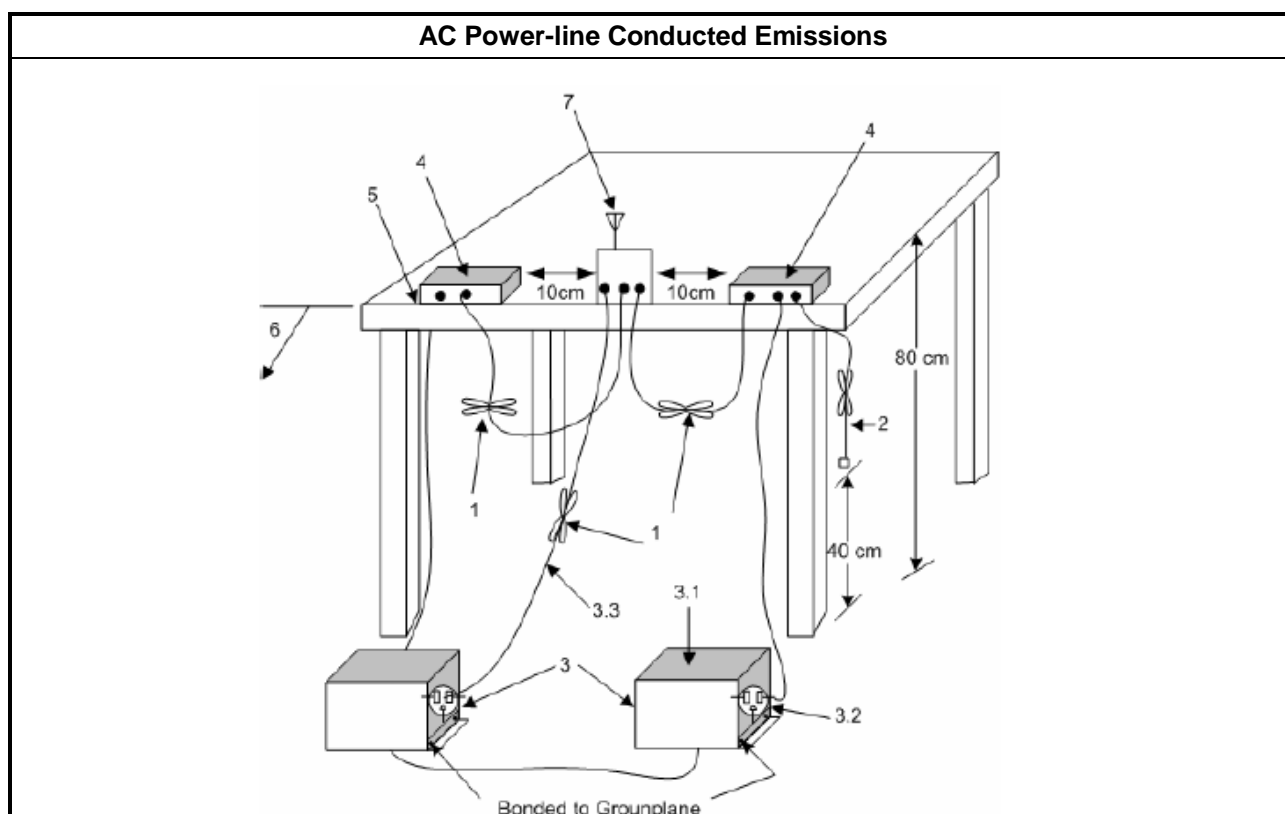



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

The EUT consumes DC power, therefore, conducted emission test is not applicable.

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
<input checked="" type="checkbox"/>	Emission bandwidth falls completely within authorized band.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.

### 3.2.4 Test Setup

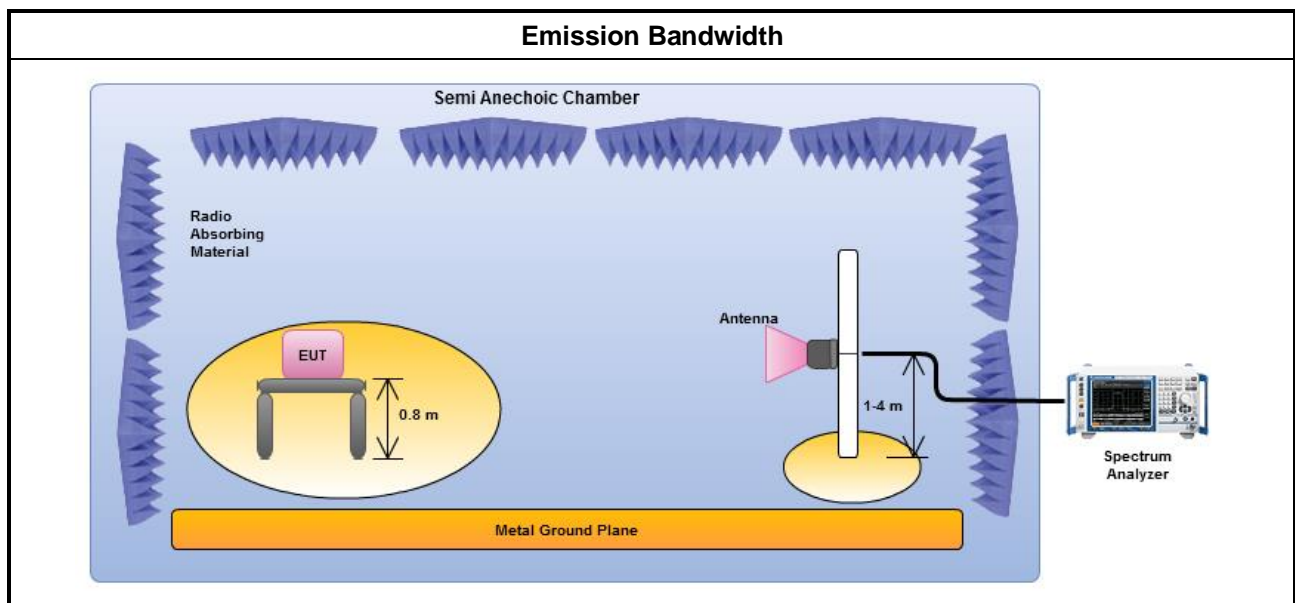

### 3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result					
Modulation Mode	Frequency (MHz)	99% Bandwidth (MHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dB BW (MHz)	20dB BW (MHz)
GFSK-Transmit	2402	2.66	2400.7844	-	2.81
GFSK-Transmit	2440	2.55	-	-	2.77
GFSK-Transmit	2480	2.24	-	2481.1867	2.48
Limit		N/A	2400	2483.5	N/A
Result		Complied			

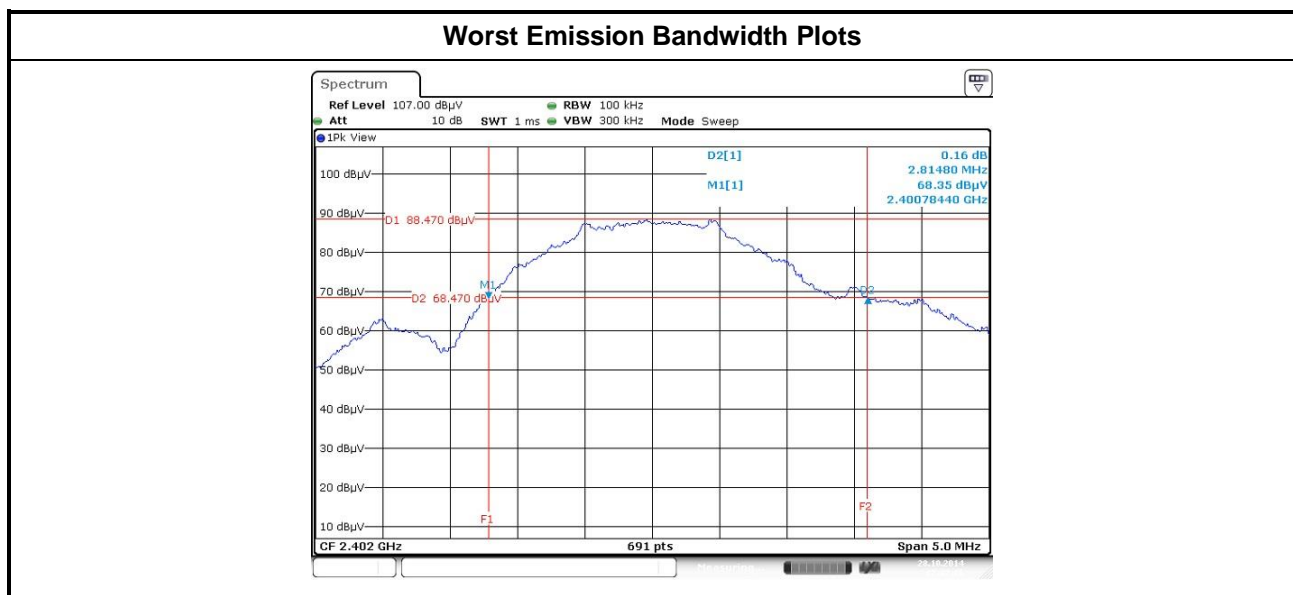

### 3.3 Fundamental Emissions

#### 3.3.1 Fundamental Emissions Limit

Fundamental Emissions E-Field Strength Limit (3m)	
<input type="checkbox"/>	902-928 MHz Band: 94 dBuV/m (quasi peak)
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band: 94 dBuV/m (average)
<input type="checkbox"/>	5725-5785 MHz Band: 94 dBuV/m (average)


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 100 or by duty cycle correction factor].
<input checked="" type="checkbox"/>	For the transmitter emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$ . Average emission = peak emission + 20 log (duty cycle).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions

#### 3.3.4 Test Setup

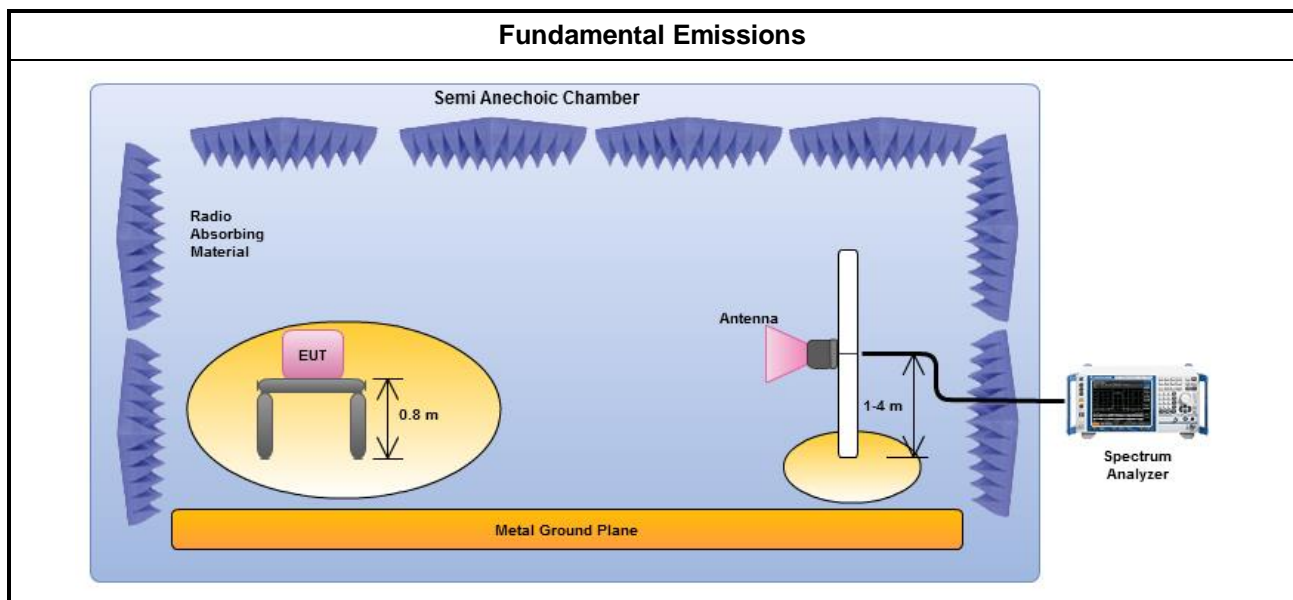

### 3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
GFSK-Transmit	2402	88.54	-25.46	114	peak
GFSK-Transmit	2402	44.29	-49.71	94	average
GFSK-Transmit	2440	88.41	-25.59	114	peak
GFSK-Transmit	2440	44.16	-49.84	94	average
GFSK-Transmit	2480	87.75	-26.25	114	peak
GFSK-Transmit	2480	43.50	-50.50	94	average
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: Horizontal. Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).					

### 3.4 Transmitter Radiated Unwanted Emissions

#### 3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit	
<b>Harmonics:</b>	
<input checked="" type="checkbox"/>	54 dBuV/m (average)
<b>Other Unwanted Emissions:</b>	
<input checked="" type="checkbox"/>	50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$ . Average emission = peak emission + $20 \log(\text{duty cycle})$ .
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.




### 3.4.4 Test Setup

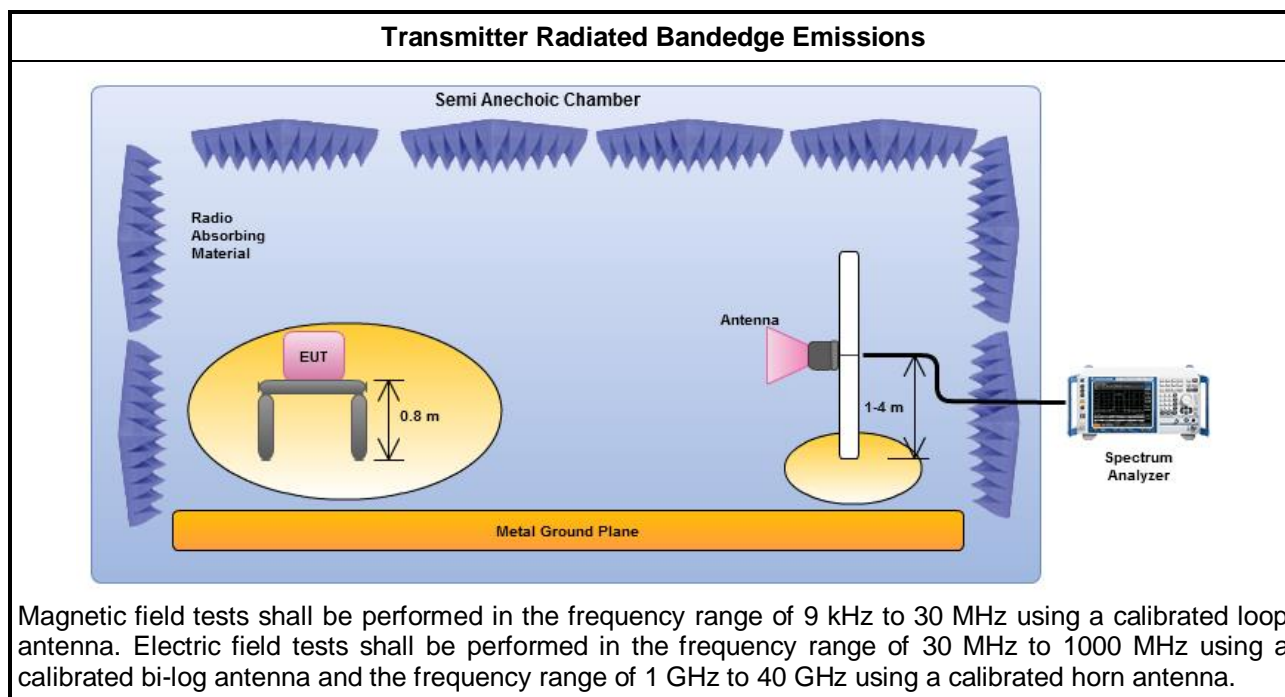


### 3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

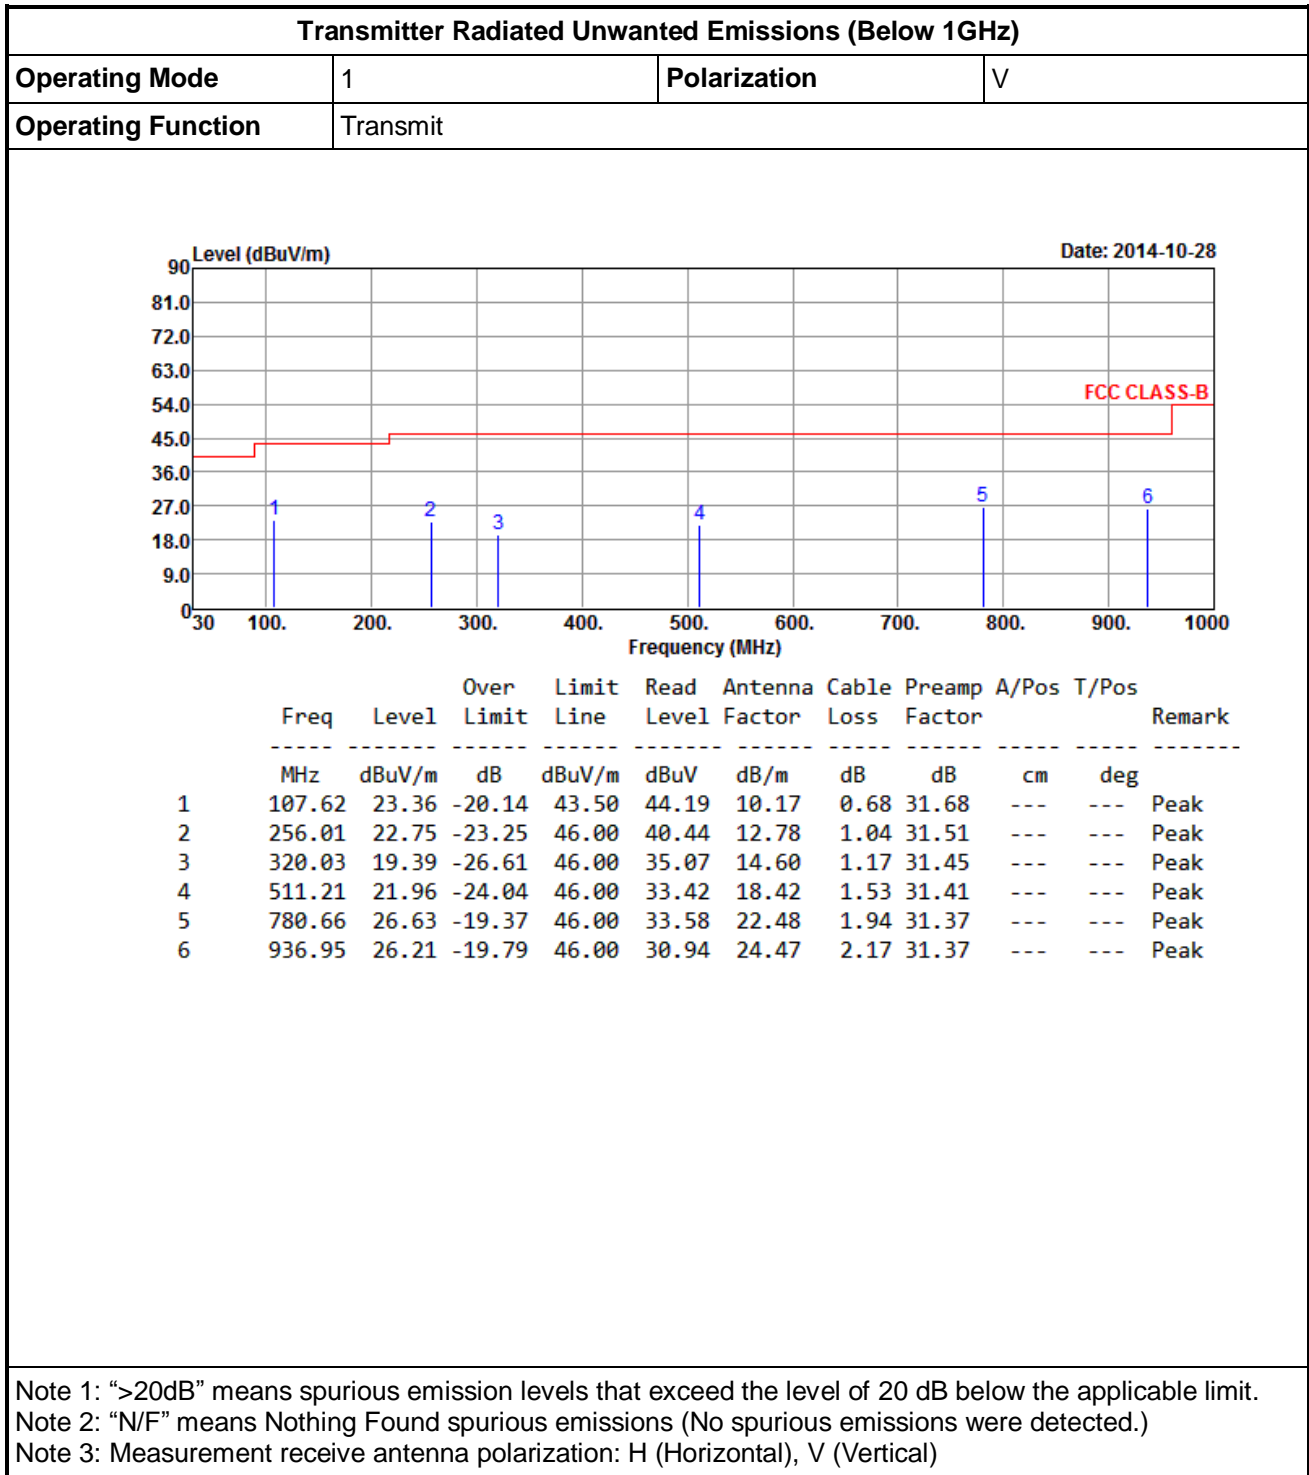**3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)**


**Transmitter Radiated Unwanted Emissions (Below 1GHz)**

Operating Mode	1	Polarization	H
Operating Function	Transmit		

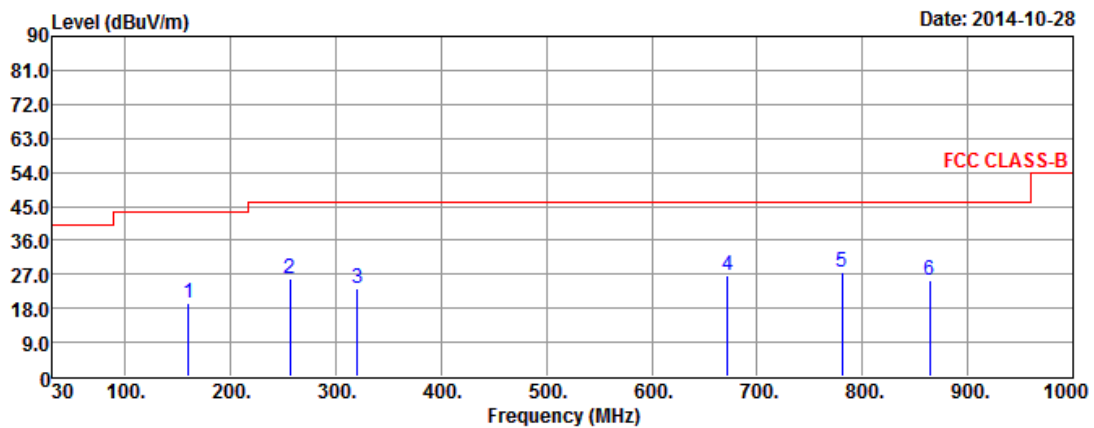

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	159.85	19.34	-24.16	43.50	36.35	13.80	0.81	31.62	---	---	Peak
2	256.09	25.88	-20.12	46.00	43.57	12.78	1.04	31.51	---	---	Peak
3	320.03	23.46	-22.54	46.00	39.14	14.60	1.17	31.45	---	---	Peak
4	672.18	26.55	-19.45	46.00	35.17	21.01	1.79	31.42	---	---	Peak
5	780.78	27.73	-18.27	46.00	34.68	22.48	1.94	31.37	---	---	Peak
6	864.25	25.44	-20.56	46.00	31.11	23.60	2.10	31.37	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

**3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)**

Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																																																																																																		
Modulation Mode	GFSK-Transmit				Test Freq. (MHz)		2402																																																																																																																																																																											
Operating Function	Transmit				Polarization		V																																																																																																																																																																											
<div><div><div><div>Level (dBuV/m)</div><div></div></div><div>Date: 2014-10-28</div></div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>Read Level</th><th>Antenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2390.00</td><td>36.83</td><td>-17.17</td><td>54.00</td><td>39.45</td><td>27.26</td><td>4.60</td><td>34.48</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>2</td><td>2390.00</td><td>49.31</td><td>-24.69</td><td>74.00</td><td>51.93</td><td>27.26</td><td>4.60</td><td>34.48</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>2398.00</td><td>44.19</td><td>-9.81</td><td>54.00</td><td>46.78</td><td>27.28</td><td>4.61</td><td>34.48</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>4</td><td>2398.00</td><td>57.25</td><td>-16.75</td><td>74.00</td><td>59.84</td><td>27.28</td><td>4.61</td><td>34.48</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>2400.00</td><td>22.43</td><td>-31.57</td><td>54.00</td><td>25.02</td><td>27.28</td><td>4.61</td><td>34.48</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>6</td><td>2400.00</td><td>66.68</td><td>-7.32</td><td>74.00</td><td>69.27</td><td>27.28</td><td>4.61</td><td>34.48</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>7</td><td>2402.00</td><td>44.29</td><td>-49.71</td><td>94.00</td><td>46.87</td><td>27.28</td><td>4.61</td><td>34.47</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>8</td><td>2402.00</td><td>88.54</td><td>-25.46</td><td>114.00</td><td>91.12</td><td>27.28</td><td>4.61</td><td>34.47</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>9</td><td>4804.00</td><td>11.65</td><td>-42.35</td><td>54.00</td><td>6.76</td><td>31.13</td><td>6.74</td><td>32.98</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>10</td><td>4804.00</td><td>55.90</td><td>-18.10</td><td>74.00</td><td>51.01</td><td>31.13</td><td>6.74</td><td>32.98</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>11</td><td>7206.00</td><td>7.33</td><td>-46.67</td><td>54.00</td><td>-3.09</td><td>35.74</td><td>8.92</td><td>34.24</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>12</td><td>7206.00</td><td>51.58</td><td>-22.42</td><td>74.00</td><td>41.16</td><td>35.74</td><td>8.92</td><td>34.24</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table></div>												Freq	Level	Over Limit	Limit	Read Level	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2390.00	36.83	-17.17	54.00	39.45	27.26	4.60	34.48	---	---	Average	2	2390.00	49.31	-24.69	74.00	51.93	27.26	4.60	34.48	---	---	Peak	3	2398.00	44.19	-9.81	54.00	46.78	27.28	4.61	34.48	---	---	Average	4	2398.00	57.25	-16.75	74.00	59.84	27.28	4.61	34.48	---	---	Peak	5	2400.00	22.43	-31.57	54.00	25.02	27.28	4.61	34.48	---	---	Average	6	2400.00	66.68	-7.32	74.00	69.27	27.28	4.61	34.48	---	---	Peak	7	2402.00	44.29	-49.71	94.00	46.87	27.28	4.61	34.47	---	---	Average	8	2402.00	88.54	-25.46	114.00	91.12	27.28	4.61	34.47	---	---	Peak	9	4804.00	11.65	-42.35	54.00	6.76	31.13	6.74	32.98	---	---	Average	10	4804.00	55.90	-18.10	74.00	51.01	31.13	6.74	32.98	---	---	Peak	11	7206.00	7.33	-46.67	54.00	-3.09	35.74	8.92	34.24	---	---	Average	12	7206.00	51.58	-22.42	74.00	41.16	35.74	8.92	34.24	---	---	Peak
	Freq	Level	Over Limit	Limit	Read Level	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	2390.00	36.83	-17.17	54.00	39.45	27.26	4.60	34.48	---	---	Average																																																																																																																																																																							
2	2390.00	49.31	-24.69	74.00	51.93	27.26	4.60	34.48	---	---	Peak																																																																																																																																																																							
3	2398.00	44.19	-9.81	54.00	46.78	27.28	4.61	34.48	---	---	Average																																																																																																																																																																							
4	2398.00	57.25	-16.75	74.00	59.84	27.28	4.61	34.48	---	---	Peak																																																																																																																																																																							
5	2400.00	22.43	-31.57	54.00	25.02	27.28	4.61	34.48	---	---	Average																																																																																																																																																																							
6	2400.00	66.68	-7.32	74.00	69.27	27.28	4.61	34.48	---	---	Peak																																																																																																																																																																							
7	2402.00	44.29	-49.71	94.00	46.87	27.28	4.61	34.47	---	---	Average																																																																																																																																																																							
8	2402.00	88.54	-25.46	114.00	91.12	27.28	4.61	34.47	---	---	Peak																																																																																																																																																																							
9	4804.00	11.65	-42.35	54.00	6.76	31.13	6.74	32.98	---	---	Average																																																																																																																																																																							
10	4804.00	55.90	-18.10	74.00	51.01	31.13	6.74	32.98	---	---	Peak																																																																																																																																																																							
11	7206.00	7.33	-46.67	54.00	-3.09	35.74	8.92	34.24	---	---	Average																																																																																																																																																																							
12	7206.00	51.58	-22.42	74.00	41.16	35.74	8.92	34.24	---	---	Peak																																																																																																																																																																							
<div>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div> <div>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</div> <div>Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div> <div>Note 4: If duty cycle &lt; 100%, average emission = peak emission + 20 log (duty cycle).</div>																																																																																																																																																																																		

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2402
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

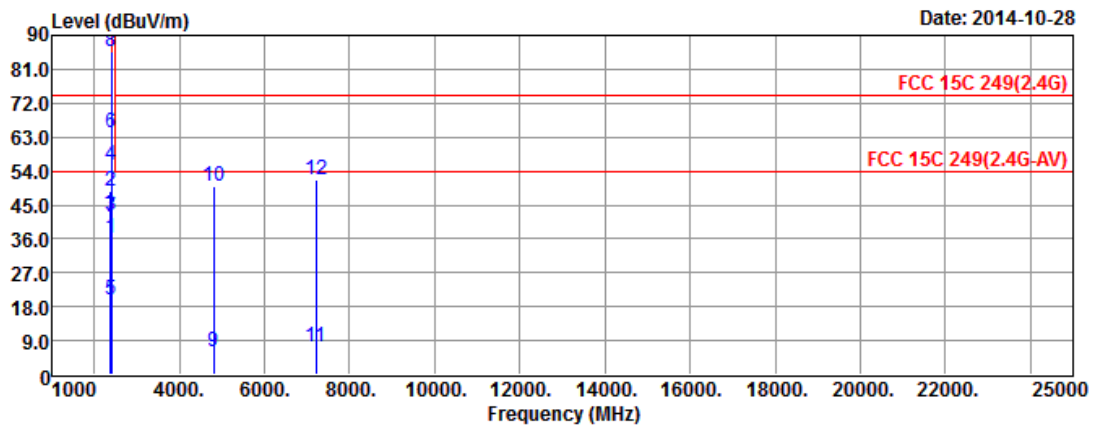

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	36.07	-17.93	54.00	38.69	27.26	4.60	34.48	---	---	Average
2	2390.00	48.78	-25.22	74.00	51.40	27.26	4.60	34.48	---	---	Peak
3	2398.00	42.17	-11.83	54.00	44.76	27.28	4.61	34.48	---	---	Average
4	2398.00	55.46	-18.54	74.00	58.05	27.28	4.61	34.48	---	---	Peak
5	2400.00	19.74	-34.26	54.00	22.33	27.28	4.61	34.48	---	---	Average
6	2400.00	63.99	-10.01	74.00	66.58	27.28	4.61	34.48	---	---	Peak
7	2402.00	41.60	-52.40	94.00	44.18	27.28	4.61	34.47	---	---	Average
8	2402.00	85.85	-28.15	114.00	88.43	27.28	4.61	34.47	---	---	Peak
9	4804.00	5.92	-48.08	54.00	1.03	31.13	6.74	32.98	---	---	Average
10	4804.00	50.17	-23.83	74.00	45.28	31.13	6.74	32.98	---	---	Peak
11	7206.00	7.29	-46.71	54.00	-3.13	35.74	8.92	34.24	---	---	Average
12	7206.00	51.54	-22.46	74.00	41.12	35.74	8.92	34.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2440
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

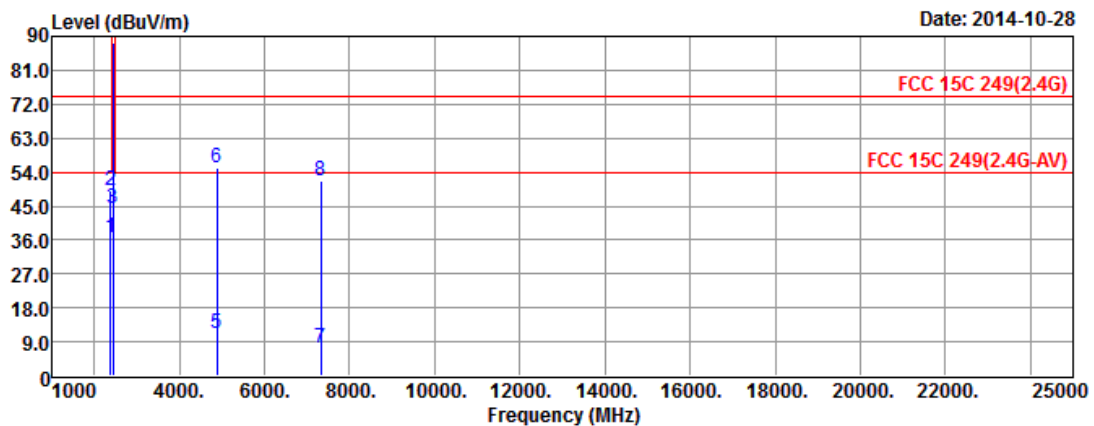

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	36.41	-17.59	54.00	39.03	27.26	4.60	34.48	---	---	Average
2	2390.00	49.25	-24.75	74.00	51.87	27.26	4.60	34.48	---	---	Peak
3	2440.00	44.16	-49.84	94.00	46.57	27.37	4.67	34.45	---	---	Average
4	2440.00	88.41	-25.59	114.00	90.82	27.37	4.67	34.45	---	---	Peak
5	4880.00	11.08	-42.92	54.00	6.07	31.23	6.73	32.95	---	---	Average
6	4880.00	55.33	-18.67	74.00	50.32	31.23	6.73	32.95	---	---	Peak
7	7320.00	7.24	-46.76	54.00	-3.37	36.03	8.98	34.40	---	---	Average
8	7320.00	51.49	-22.51	74.00	40.88	36.03	8.98	34.40	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2440
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

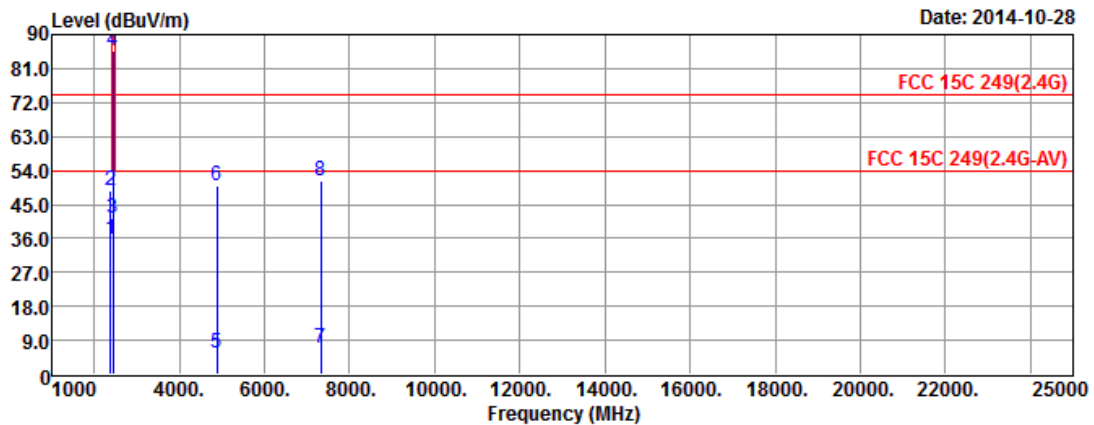

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	35.83	-18.17	54.00	38.45	27.26	4.60	34.48	---	---	Average
2	2390.00	48.61	-25.39	74.00	51.23	27.26	4.60	34.48	---	---	Peak
3	2440.00	41.39	-52.61	94.00	43.80	27.37	4.67	34.45	---	---	Average
4	2440.00	85.64	-28.36	114.00	88.05	27.37	4.67	34.45	---	---	Peak
5	4880.00	5.71	-48.29	54.00	0.70	31.23	6.73	32.95	---	---	Average
6	4880.00	49.96	-24.04	74.00	44.95	31.23	6.73	32.95	---	---	Peak
7	7320.00	7.07	-46.93	54.00	-3.54	36.03	8.98	34.40	---	---	Average
8	7320.00	51.32	-22.68	74.00	40.71	36.03	8.98	34.40	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2480
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

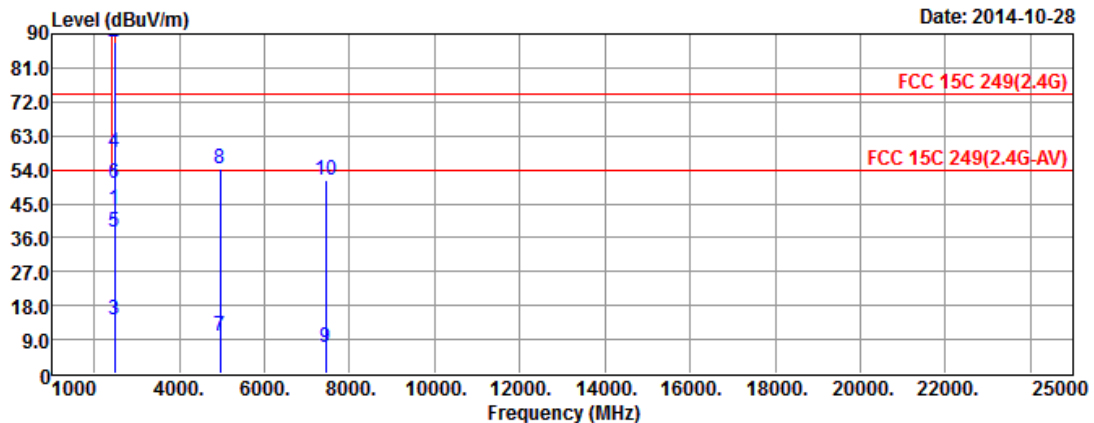

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	43.50	-50.50	94.00	45.73	27.46	4.73	34.42	---	---	Average
2	2480.00	87.75	-26.25	114.00	89.98	27.46	4.73	34.42	---	---	Peak
3	2483.50	14.28	-39.72	54.00	16.50	27.46	4.74	34.42	---	---	Average
4	2483.50	58.53	-15.47	74.00	60.75	27.46	4.74	34.42	---	---	Peak
5	2486.00	37.63	-16.37	54.00	39.84	27.47	4.74	34.42	---	---	Average
6	2486.00	50.59	-23.41	74.00	52.80	27.47	4.74	34.42	---	---	Peak
7	4960.00	9.84	-44.16	54.00	4.69	31.34	6.72	32.91	---	---	Average
8	4960.00	54.09	-19.91	74.00	48.94	31.34	6.72	32.91	---	---	Peak
9	7440.00	7.07	-46.93	54.00	-3.76	36.34	9.06	34.57	---	---	Average
10	7440.00	51.32	-22.68	74.00	40.49	36.34	9.06	34.57	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2480
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

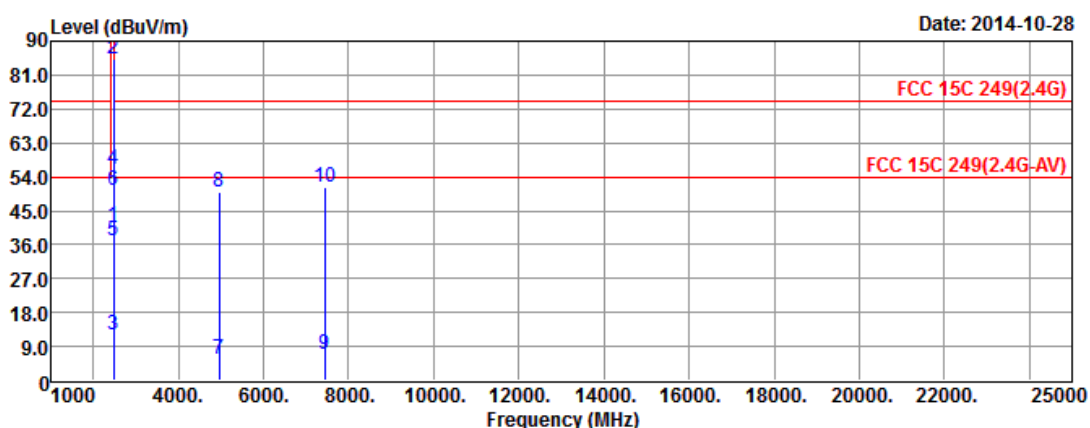

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	41.09	-52.91	94.00	43.32	27.46	4.73	34.42	---	---	Average
2	2480.00	85.34	-28.66	114.00	87.57	27.46	4.73	34.42	---	---	Peak
3	2483.50	11.87	-42.13	54.00	14.09	27.46	4.74	34.42	---	---	Average
4	2483.50	56.12	-17.88	74.00	58.34	27.46	4.74	34.42	---	---	Peak
5	2486.00	37.14	-16.86	54.00	39.35	27.47	4.74	34.42	---	---	Average
6	2486.00	50.21	-23.79	74.00	52.42	27.47	4.74	34.42	---	---	Peak
7	4960.00	5.57	-48.43	54.00	0.42	31.34	6.72	32.91	---	---	Average
8	4960.00	49.82	-24.18	74.00	44.67	31.34	6.72	32.91	---	---	Peak
9	7440.00	6.81	-47.19	54.00	-4.02	36.34	9.06	34.57	---	---	Average
10	7440.00	51.06	-22.94	74.00	40.23	36.34	9.06	34.57	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation (03CH03-HY)
Software	Audix	E3	4.03260c	Radiate	NCR	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation (03CH03-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.