

# Test Report

**Report No.:** MTi221130014-02E2

**Date of issue:** 2023-03-09

**Applicant:** JIANGSU SHUSHI TECHNOLOGY CO.LTD

**Product:** Smart Night Light-T

**Model(s):** 3RSNL02042TM

**FCC ID:** 2BAGQ-3RSNL02042TM

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

## Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

# Contents

<b>1</b>	<b>General Description .....</b>	<b>5</b>
1.1	Description of EUT .....	5
1.2	Description of test modes .....	5
1.3	Measurement uncertainty .....	6
<b>2</b>	<b>Summary of Test Result.....</b>	<b>7</b>
<b>3</b>	<b>Test Facilities and Accreditations .....</b>	<b>8</b>
3.1	Test laboratory .....	8
<b>4</b>	<b>Equipment List .....</b>	<b>9</b>
<b>5</b>	<b>Test Result .....</b>	<b>10</b>
5.1	Antenna requirement .....	10
5.2	AC power line conducted emissions.....	11
5.3	6dB occupied bandwidth .....	16
5.4	Conducted peak output power .....	18
5.5	Power spectral density test .....	20
5.6	Conducted emissions at the band edge .....	22
5.7	Conducted spurious emissions .....	24
5.8	Duty Cycle .....	27
5.9	Radiated spurious emission .....	28
	<b>Photographs of the Test Setup.....</b>	<b>37</b>
	<b>Photographs of the EUT.....</b>	<b>38</b>

Test Result Certification	
<b>Applicant:</b>	JIANGSU SHUSHI TECHNOLOGY CO.LTD
<b>Address:</b>	NO.9 NANXU ROAD RUNZHOU DISTRICT ZHENJIANG, JIANGSU, China
<b>Manufacturer:</b>	Shushi (Zhenjiang) Intelligent Technology Co., Ltd.
<b>Address:</b>	NO.9 NANXU ROAD RUNZHOU DISTRICT ZHENJIANG JIANGSU CHINA
<b>Product description</b>	
Product name:	Smart Night Light-T
Trademark:	N/A
Model name:	3RSNL02042TM
Series Model:	N/A
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
<b>Date of Test</b>	
Date of test:	2022-12-26~2023-01-13
Test result:	Pass

Test Engineer :



(Yanice Xie)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

## 1 General Description

### 1.1 Description of EUT

Product name:	Smart Night Light-T
Model name:	3RSNL02042TM
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: DC 5V/0.5A
Hardware version:	REV0.1
Software version:	V1.0
Accessories:	1. Adapter: Model: MF-05001000SA1 Input: 100-240V~ 50/60Hz 0.4A Output: 5V $\pm$ 1A
Test sample(s) number:	MTi221130014-02S1001
<b>RF specification:</b>	
Operation frequency:	2405 MHz ~ 2480 MHz
Modulation type:	Zigbee
Antenna designation:	Antenna type: PCB antenna Antenna gain: 2.1 dBi
Max. peak conducted output power:	14.05 dBm

### 1.2 Description of test modes

#### 1.2.1 Operation channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

### 1.2.2 Test channels

Chanel	Frequency
Lowest (CH11)	2405MHz
Middle (CH18)	2440MHz
Highest (CH26)	2480MHz

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

### 1.2.3 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/

### 1.3 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	$\pm 2.5$ dB
Occupied Bandwidth	$\pm 3$ %
Conducted RF output power	$\pm 0.16$ dB
Conducted spurious emissions	$\pm 0.21$ dB
Radiated emission (9 kHz ~ 30 MHz)	$\pm 4.0$ dB
Radiated emission (30 MHz~1 GHz)	$\pm 4.2$ dB
Radiated emission (above 1 GHz)	$\pm 4.3$ dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	15.247(a)(2)	6dB occupied bandwidth	Pass
4	15.247(b)(3)	Conducted peak output power	Pass
5	15.247(e)	Power Spectral Density	Pass
6	15.247(d)	Conducted emission at the band edge	Pass
7	15.247(d)	Conducted spurious emissions	Pass
8	/	Duty Cycle	Pass
9	15.247(d)	Radiated spurious emissions	Pass

**Note:** N/A means not applicable.

### 3 Test Facilities and Accreditations

#### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573



## 4 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2022/05/05	2023/05/04
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2022/05/05	2023/05/04
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2022/05/05	2023/05/04
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2022/05/05	2023/05/04
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2022/05/05	2023/05/04
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2022/05/05	2023/05/04
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2022/04/15	2023/04/14
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2022/05/05	2023/05/04
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2023/05/29
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840G-G45	210405001	2022/05/05	2023/05/04
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2022/05/05	2023/05/04
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2022/05/05	2023/05/04
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2022/05/05	2023/05/04
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2022/05/05	2023/05/04
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS®JS1120 V2.6.88.0330	/	/	/

## 5 Test Result

### 5.1 Antenna requirement

#### 15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### Description of the antenna of EUT

The antenna of EUT is PCB antenna (Antenna Gain: 2.1 dBi). which is no consideration of replacement.

## 5.2 AC power line conducted emissions

### 5.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB $\mu$ V	Limit-Average dB $\mu$ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

**Note 1:** the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

### 5.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

### 5.2.3 Test setup

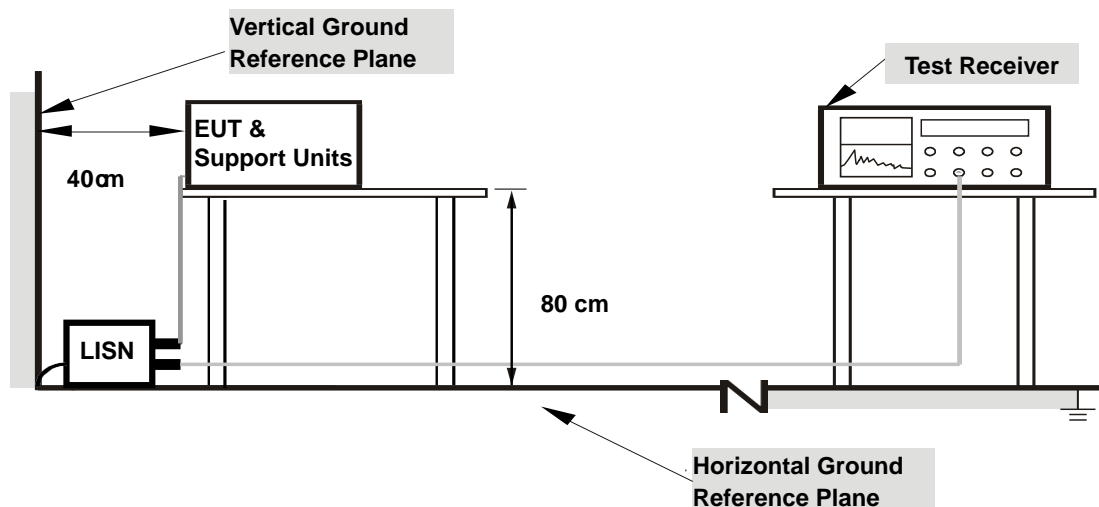

For the actual test configuration, please refer to the related item – Photographs of the test setup.

### 5.2.4 Test Result

#### Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported.

#### Calculation formula:

Measurement (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Correct Factor (dB)


Over (dB) = Measurement (dB $\mu$ V) – Limit (dB $\mu$ V)

Test mode:	TX	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

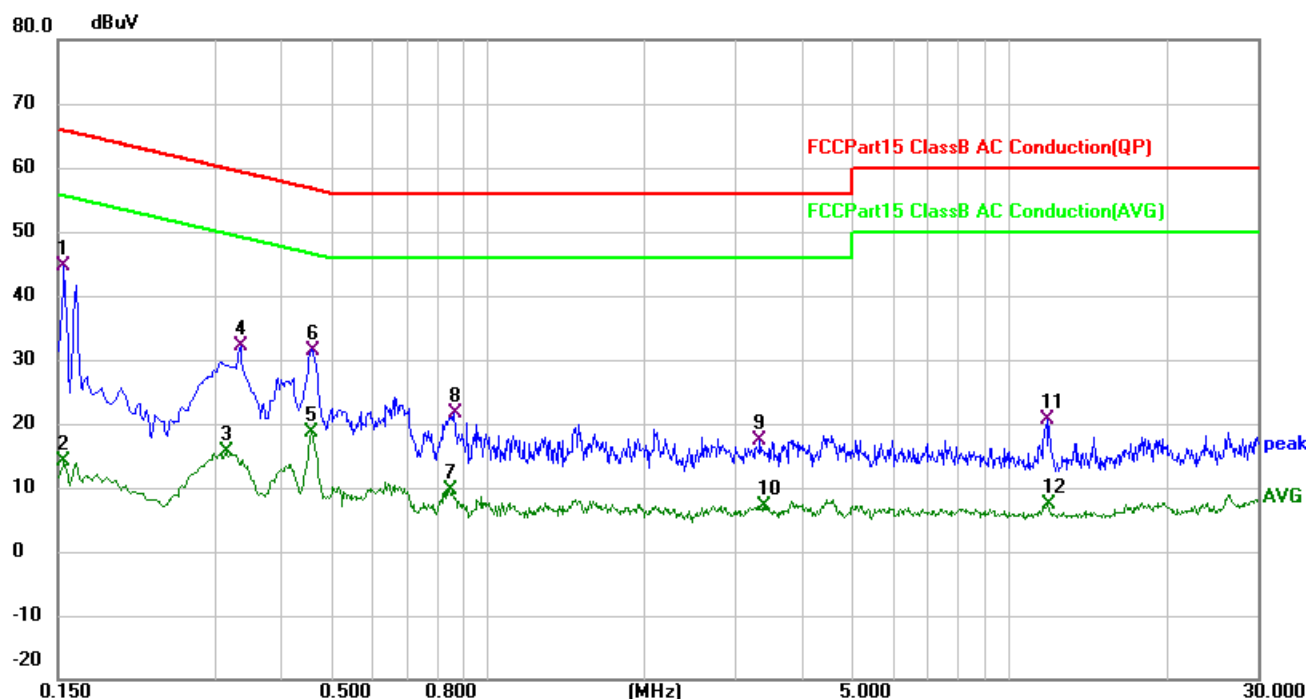


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	34.27	10.28	44.55	65.79	-21.24	QP
2		0.1539	3.89	10.28	14.17	55.79	-41.62	AVG
3		0.3140	4.78	10.89	15.67	49.86	-34.19	AVG
4		0.3339	21.12	10.94	32.06	59.35	-27.29	QP
5		0.4580	7.50	11.24	18.74	46.73	-27.99	AVG
6		0.4620	20.03	11.24	31.27	56.66	-25.39	QP
7		0.8460	-2.43	12.09	9.66	46.00	-36.34	AVG
8		0.8620	9.45	12.11	21.56	56.00	-34.44	QP
9		3.3340	6.99	10.27	17.26	56.00	-38.74	QP
10		3.3820	-3.02	10.27	7.25	46.00	-38.75	AVG
11		11.8420	10.21	10.45	20.66	60.00	-39.34	QP
12		11.9020	-3.12	10.45	7.33	50.00	-42.67	AVG

Test mode:	TX	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

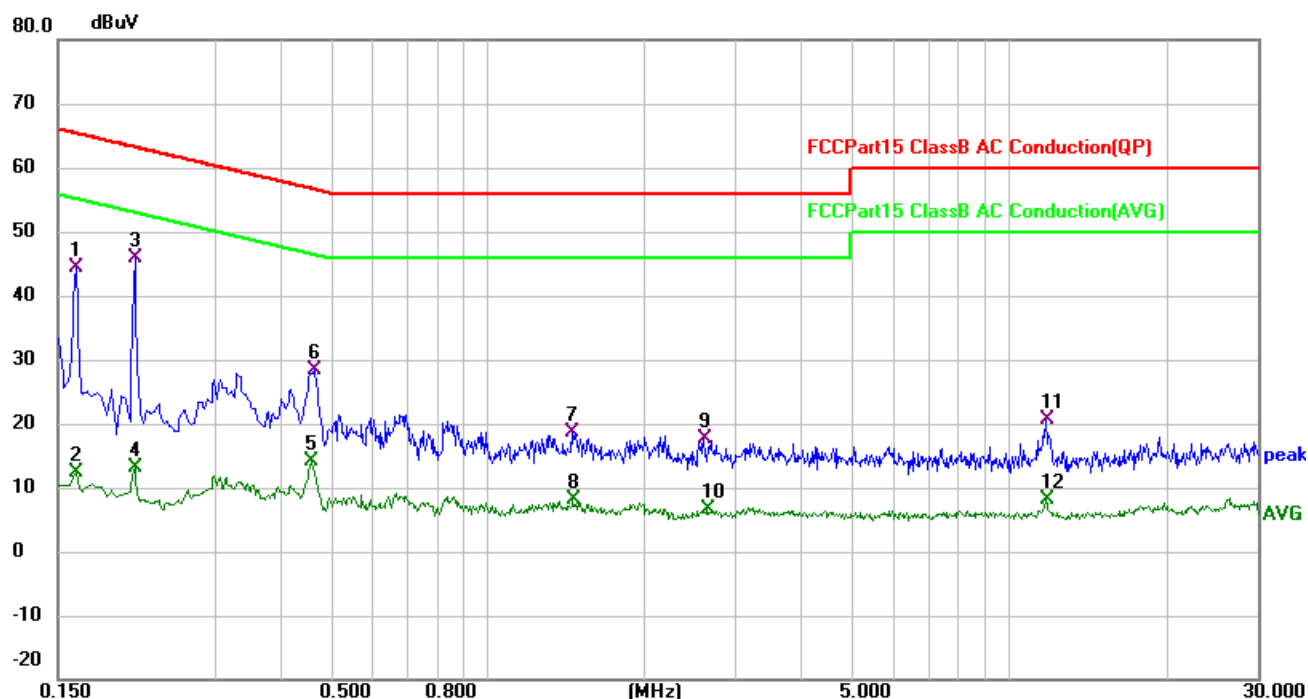


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	34.00	10.27	44.27	65.36	-21.09	QP
2		0.1620	2.09	10.27	12.36	55.36	-43.00	AVG
3	*	0.2100	35.16	10.62	45.78	63.21	-17.43	QP
4		0.2100	2.61	10.62	13.23	53.21	-39.98	AVG
5		0.4580	3.00	11.21	14.21	46.73	-32.52	AVG
6		0.4660	17.04	11.24	28.28	56.58	-28.30	QP
7		1.4540	5.24	13.29	18.53	56.00	-37.47	QP
8		1.4620	-5.26	13.31	8.05	46.00	-37.95	AVG
9		2.5980	7.16	10.36	17.52	56.00	-38.48	QP
10		2.6420	-3.69	10.36	6.67	46.00	-39.33	AVG
11		11.8060	10.29	10.38	20.67	60.00	-39.33	QP
12		11.8060	-2.36	10.38	8.02	50.00	-41.98	AVG

Test mode:	TX	Phase:	L
Power supply:	Power by AC/DC adapter (AC 240V/60Hz)	Test site:	CE chamber 1

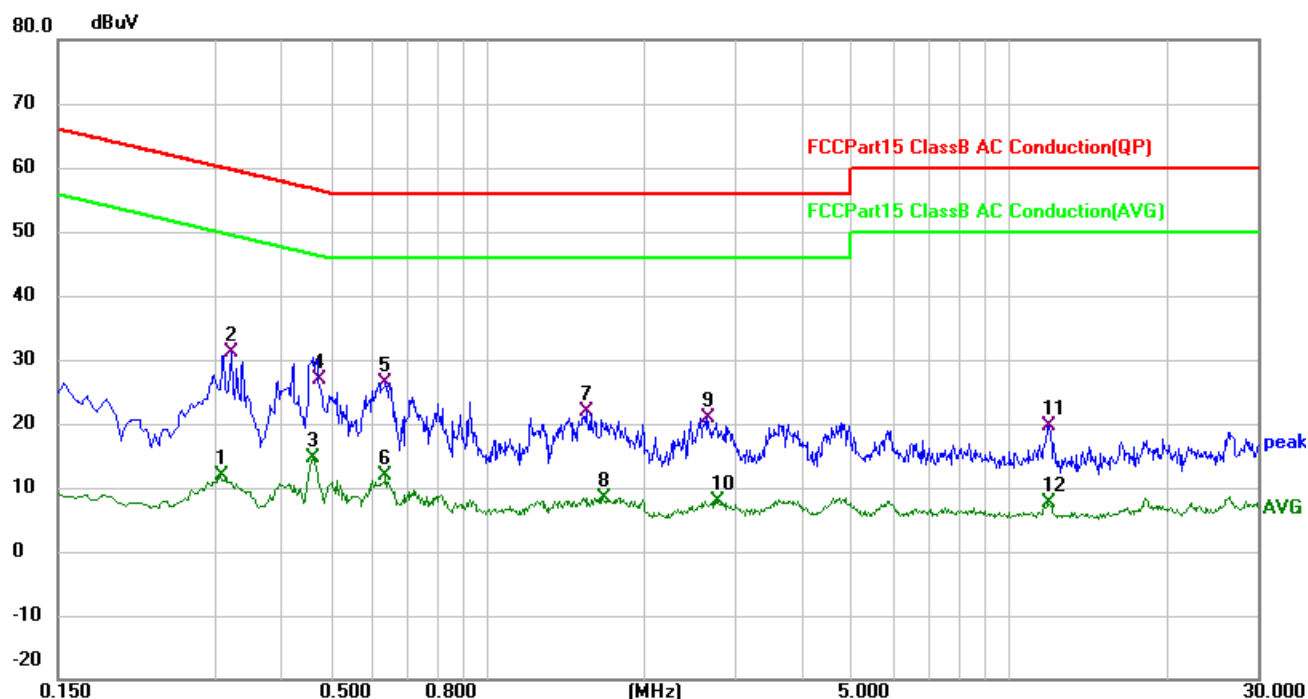

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3060	1.00	10.89	11.89	50.08	-38.19	AVG
2	*	0.3220	20.10	10.92	31.02	59.66	-28.64	QP
3		0.4620	3.30	11.24	14.54	46.66	-32.12	AVG
4		0.4740	15.61	11.26	26.87	56.44	-29.57	QP
5		0.6380	14.79	11.63	26.42	56.00	-29.58	QP
6		0.6380	0.28	11.63	11.91	46.00	-34.09	AVG
7		1.5460	8.49	13.29	21.78	56.00	-34.22	QP
8		1.6660	-5.05	13.47	8.42	46.00	-37.58	AVG
9		2.6420	10.75	10.18	20.93	56.00	-35.07	QP
10		2.7700	-2.29	10.21	7.92	46.00	-38.08	AVG
11		11.9180	9.25	10.45	19.70	60.00	-40.30	QP
12		11.9180	-2.76	10.45	7.69	50.00	-42.31	AVG

Test mode:	TX	Phase:	N
Power supply:	Power by AC/DC adapter (AC 240V/60Hz)	Test site:	CE chamber 1

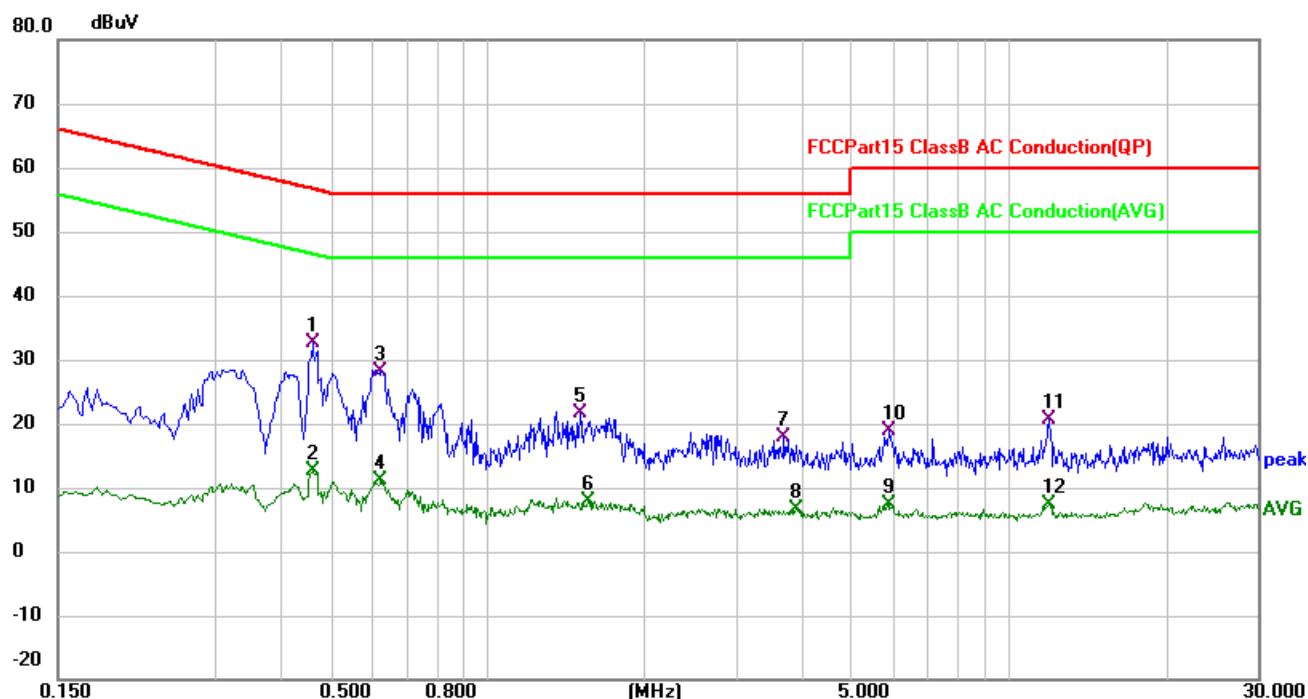


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.4620	21.35	11.21	32.56	56.66	-24.10	QP
2		0.4620	1.42	11.21	12.63	46.66	-34.03	AVG
3		0.6260	16.52	11.62	28.14	56.00	-27.86	QP
4		0.6260	-0.60	11.62	11.02	46.00	-34.98	AVG
5		1.5100	8.14	13.42	21.56	56.00	-34.44	QP
6		1.5620	-5.70	13.53	7.83	46.00	-38.17	AVG
7		3.7100	7.53	10.28	17.81	56.00	-38.19	QP
8		3.9220	-3.54	10.28	6.74	46.00	-39.26	AVG
9		5.8420	-2.98	10.27	7.29	50.00	-42.71	AVG
10		5.8940	8.60	10.27	18.87	60.00	-41.13	QP
11		11.9900	10.21	10.38	20.59	60.00	-39.41	QP
12		11.9900	-3.03	10.38	7.35	50.00	-42.65	AVG

### 5.3 6dB occupied bandwidth

#### 5.3.1 Limits

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.3.2 Test setup



#### 5.3.3 Test procedures

- Test method: ANSI C63.10-2013 Section 11.8.2.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, detector = Peak

#### 5.3.4 Test results

Mode	Test channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Zigbee	CH11	2405	1.520	≥ 0.5
	CH18	2440	1.570	≥ 0.5
	CH26	2480	1.540	≥ 0.5



## 6dB occupied bandwidth

### CH11



### CH18



### CH26




## 5.4 Conducted peak output power

### 5.4.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

### 5.4.2 Test setup



### 5.4.3 Test procedure


- Test method: ANSI C63.10-2013 Section 11.9.1.1.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW  $\geq$  6dB occupied bandwidth, VBW  $\geq$  3  $\times$  RBW, detector = Peak

### 5.4.4 Test results


Mode	Test channel	Frequency (MHz)	Conducted peak output power (dBm)	Limit (dBm)
Zigbee	CH11	2405	14.05	$\leq 30$
	CH18	2440	13.76	$\leq 30$
	CH26	2480	13.81	$\leq 30$

## Peak conducted output power


### CH11

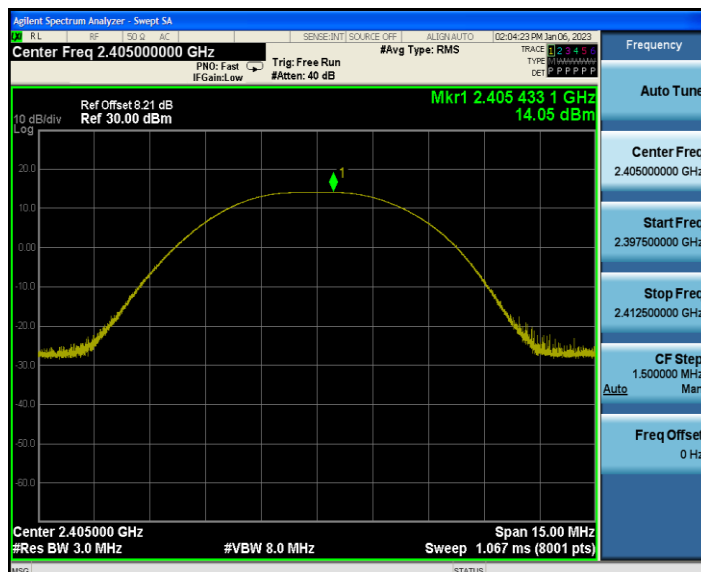

### CH18

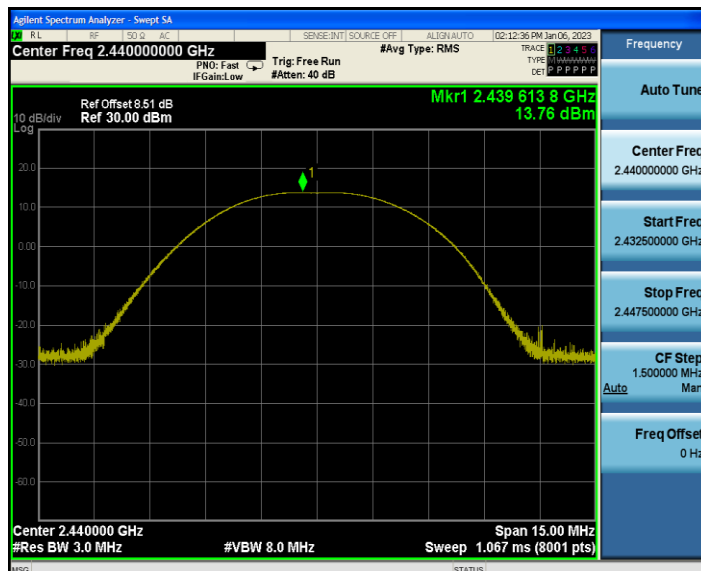

### CH26

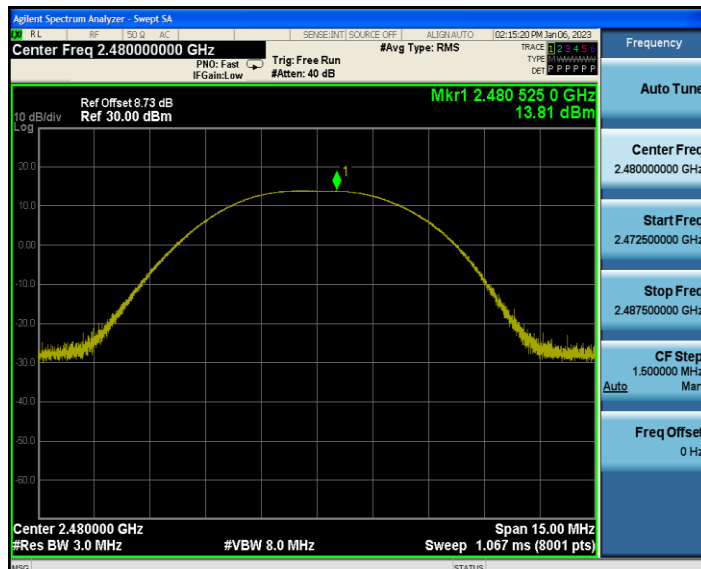


## 5.5 Power spectral density test

### 5.5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.5.2 Test setup






### 5.5.3 Test Procedure

- Test method: ANSI C63.10-2013 Section 11.10.2.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 3 kHz, VBW = 10 kHz, detector = Peak

### 5.5.4 Test Results

Mode	Test channel	Frequency (MHz)	Power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
Zigbee	CH11	2405	-0.19	≤ 8
	CH18	2440	-0.19	≤ 8
	CH26	2480	-0.23	≤ 8

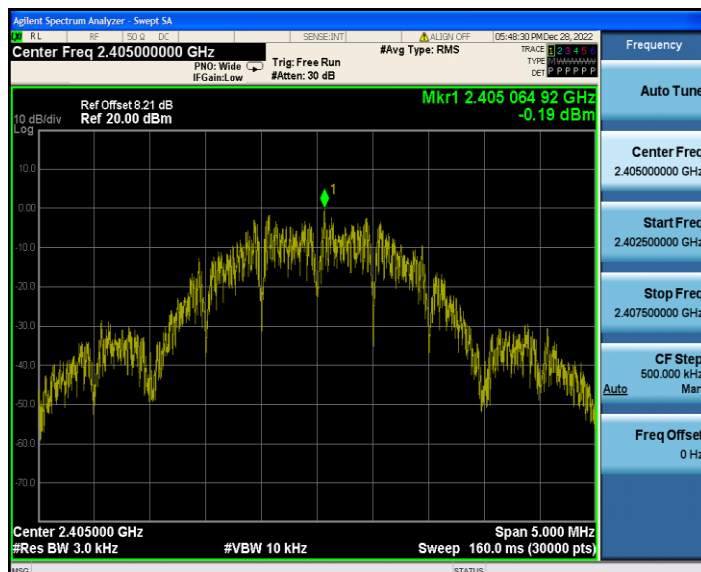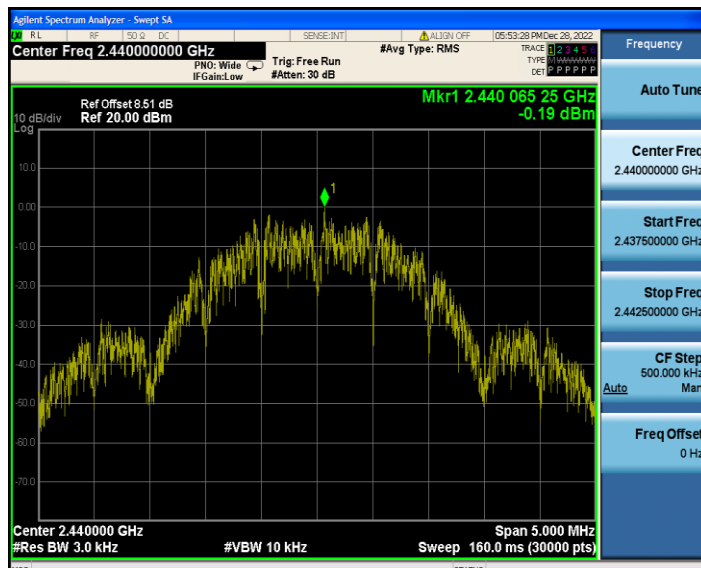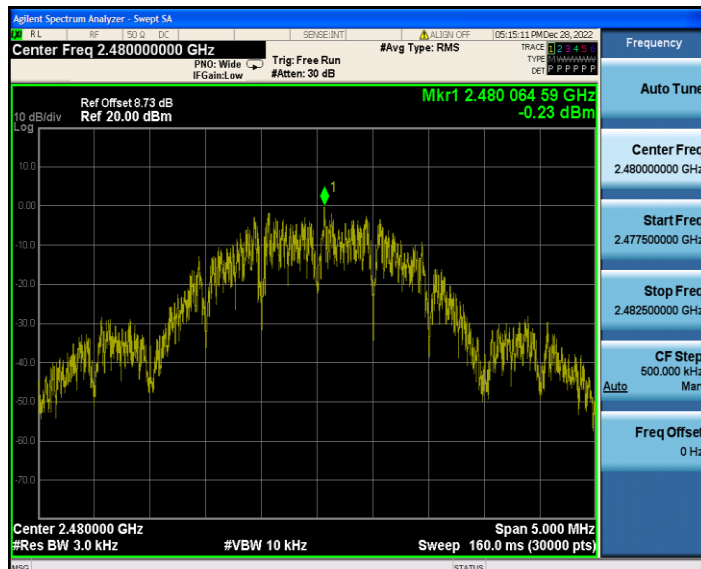
**Power spectral density**
**CH11**

**CH18**

**CH26**


## 5.6 Conducted emissions at the band edge

### 5.6.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.6.2 Test setup




### 5.6.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 11.13
- b) The EUT was set to continuously transmitting in the max power during the test.
- c) The transmitter output of EUT is connected to the spectrum analyzer.
- d) Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.


### 5.6.4 Test results

## Zigbee - conducted emissions at the band edge

### Low band-edge

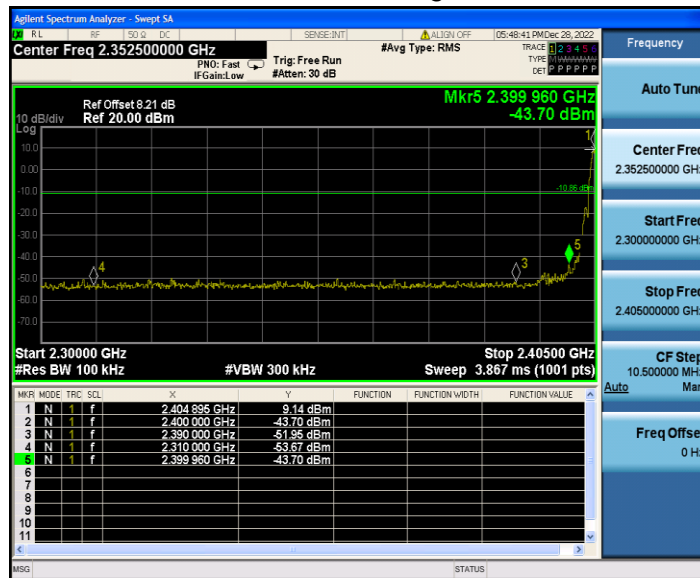

### High band-edge

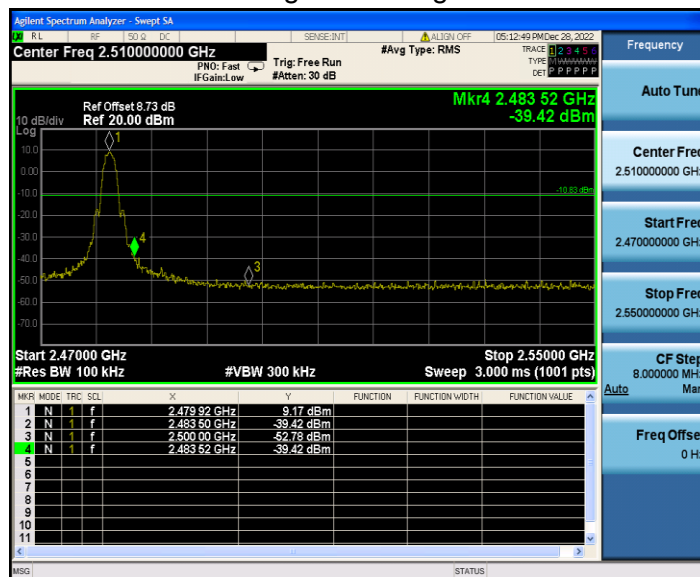


## 5.7 Conducted spurious emissions

### 5.7.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.7.2 Test setup



### 5.7.3 Test procedure

- Test method: ANSI C63.10-2013 Section 11.11 & 11.12.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

### 5.7.4 Test results




**Zigbee - conducted spurious emissions**


CH11



CH11

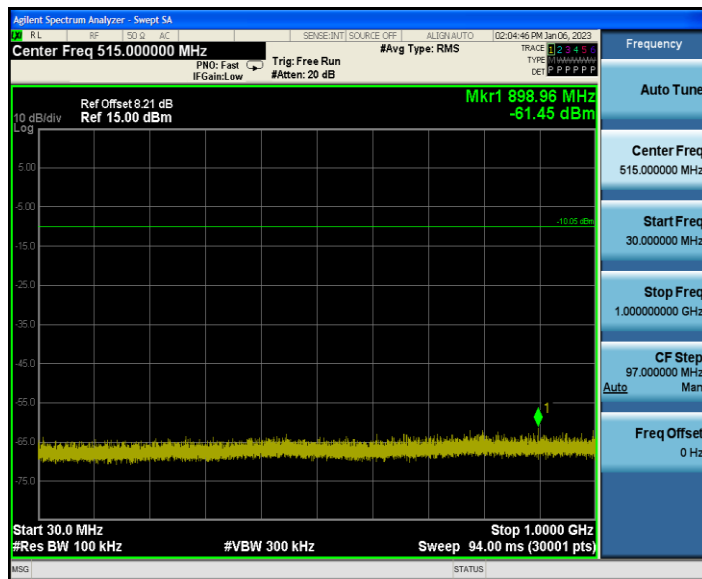


CH11

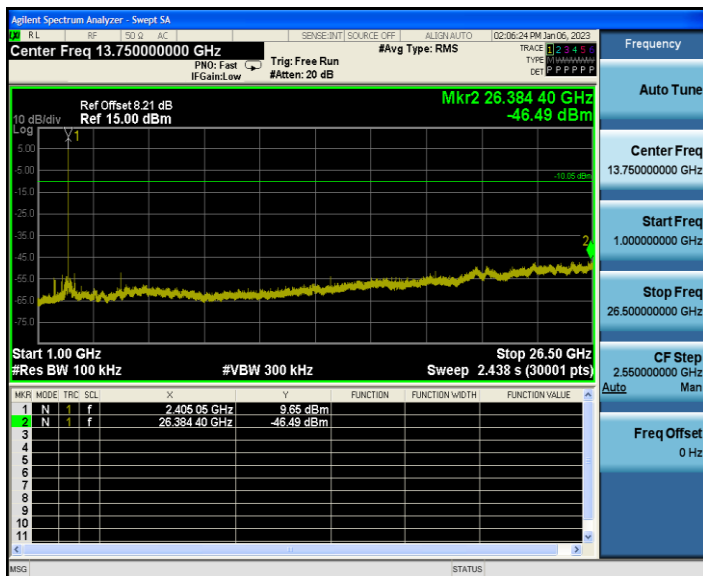

CH18



CH18

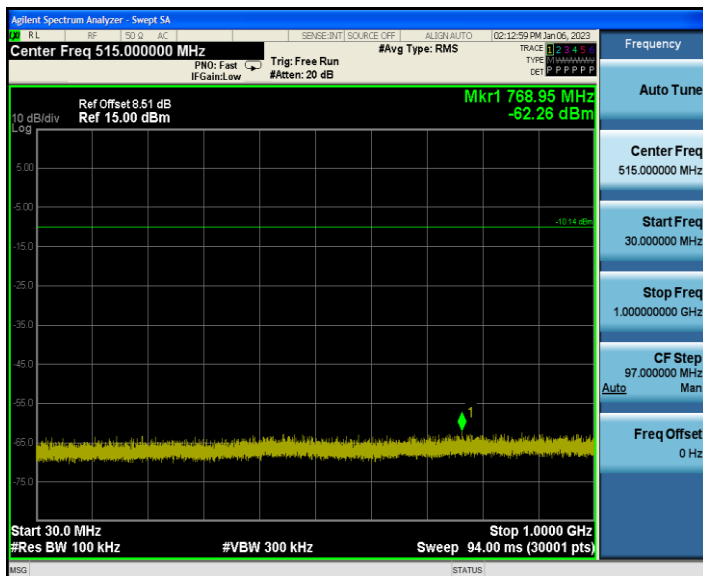

CH18




**Zigbee - conducted spurious emissions**


CH26



CH26

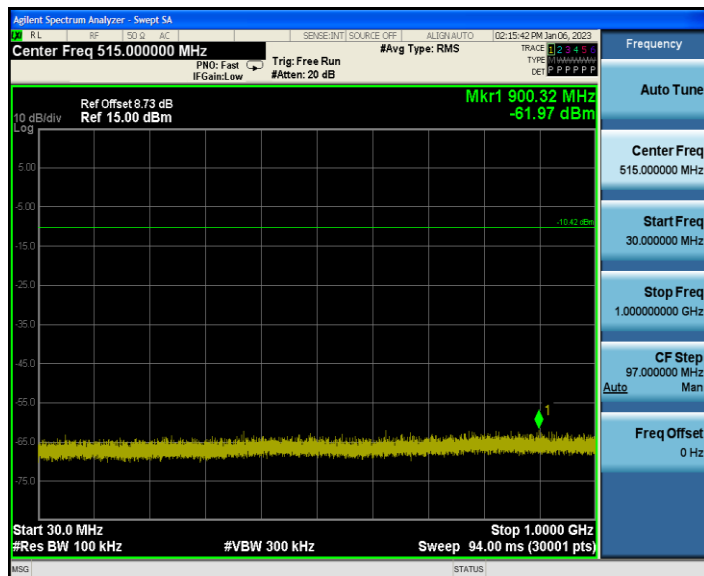

CH26

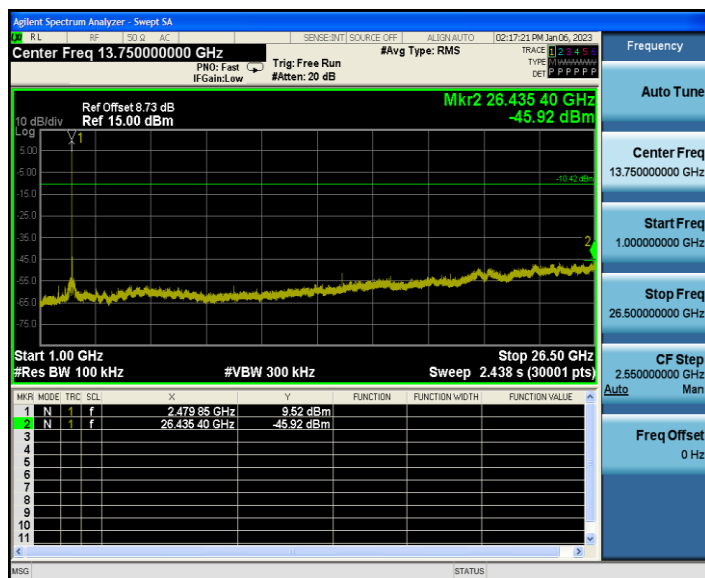


## 5.8 Duty Cycle

### 5.8.1 Conformance Limit

None, for reporting purposes only.

### 5.8.2 Test setup




### 5.8.3 Test procedure

- Test method: KDB 558074 Zero-span spectrum analyzer method.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

### 5.8.4 Test Results

TestMode	Transmission Duration (ms]	Transmission Period (ms]	Duty Cycle (%)
Zigbee	1.06	9.99	10.61

Zigbee

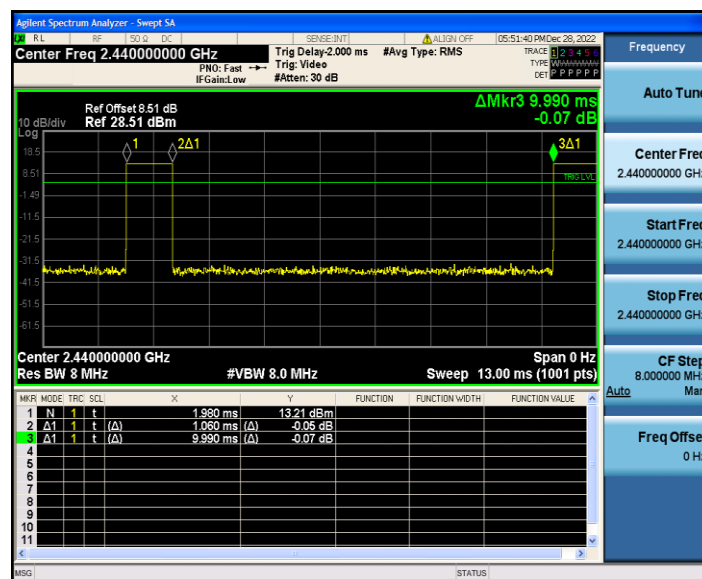

## 5.9 Radiated spurious emission

### 5.9.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### § 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Note 1:** the tighter limit applies at the band edges.

**Note 2:** the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

#### § 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

**Frequency range of measurements for unlicensed wireless device**


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

**Frequency range of measurements for unlicensed wireless device with digital device**


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 5.9.2 Test setup


Below 30MHz:

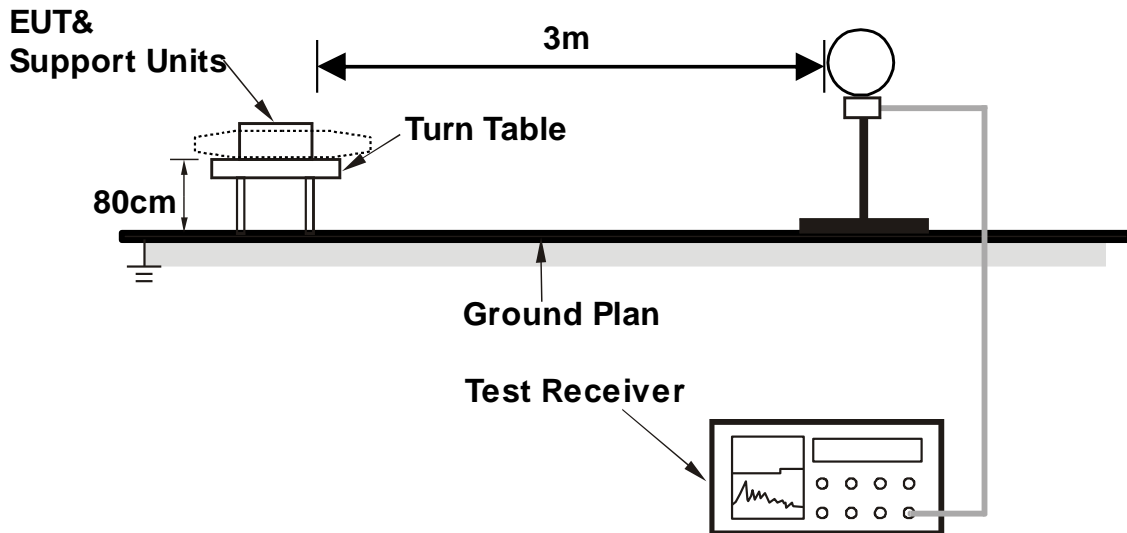

30MHz~1GHz:

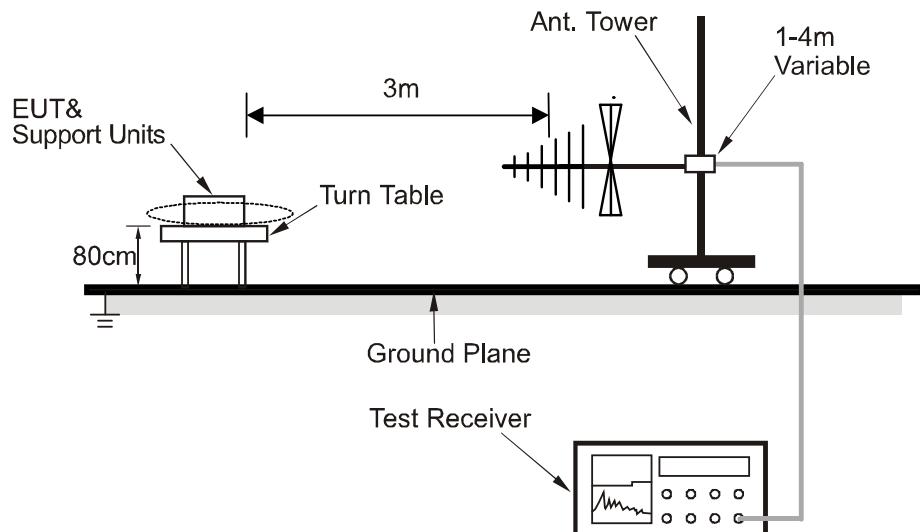

Above 1GHz:

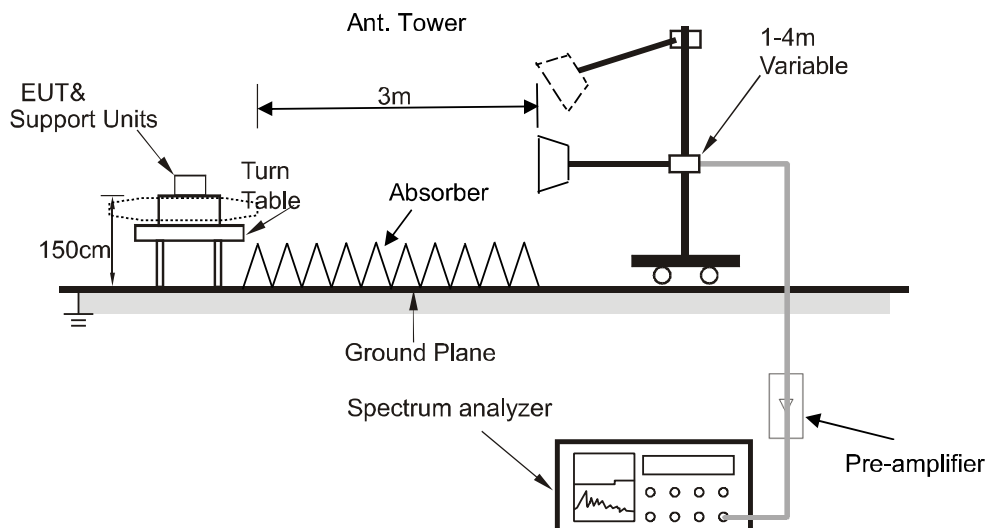

For the actual test configuration, please refer to the related item – Photographs of the test setup.

### 5.9.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 11.11, 11.12, 11.13.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

### Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

### 5.9.4 Test results

#### Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported.

There were no emissions found below 30MHz within 20dB of the limit.


#### Calculation formula:

Measurement (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB $\mu$ V/m) – Limit (dB $\mu$ V/m)

**Radiated emissions between 30MHz – 1GHz**

Test mode:	Zigbee – 2405 MHz TX mode	Polarization:	Horizontal
Power supply:	DC 5V	Test site:	RE chamber 2

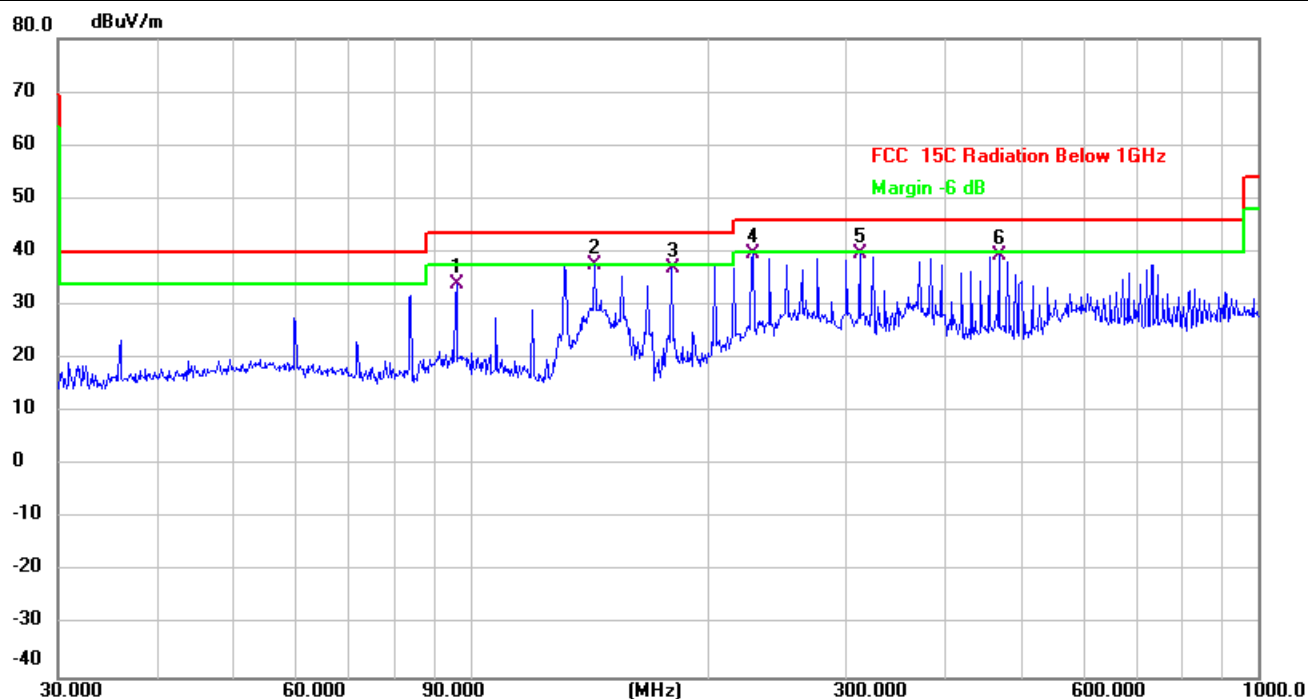


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		96.0986	44.57	-10.55	34.02	43.50	-9.48	QP
2	*	143.8295	50.40	-12.71	37.69	43.50	-5.81	QP
3		180.0165	48.01	-10.98	37.03	43.50	-6.47	QP
4		228.4904	48.67	-9.04	39.63	46.00	-6.37	QP
5		312.1794	47.26	-7.59	39.67	46.00	-6.33	QP
6		468.8762	45.47	-6.20	39.27	46.00	-6.73	QP



**Radiated emissions between 30MHz – 1GHz**

Test mode:	Zigbee – 2405 MHz TX mode	Polarization:	Vertical
Power supply:	DC 5V	Test site:	RE chamber 2

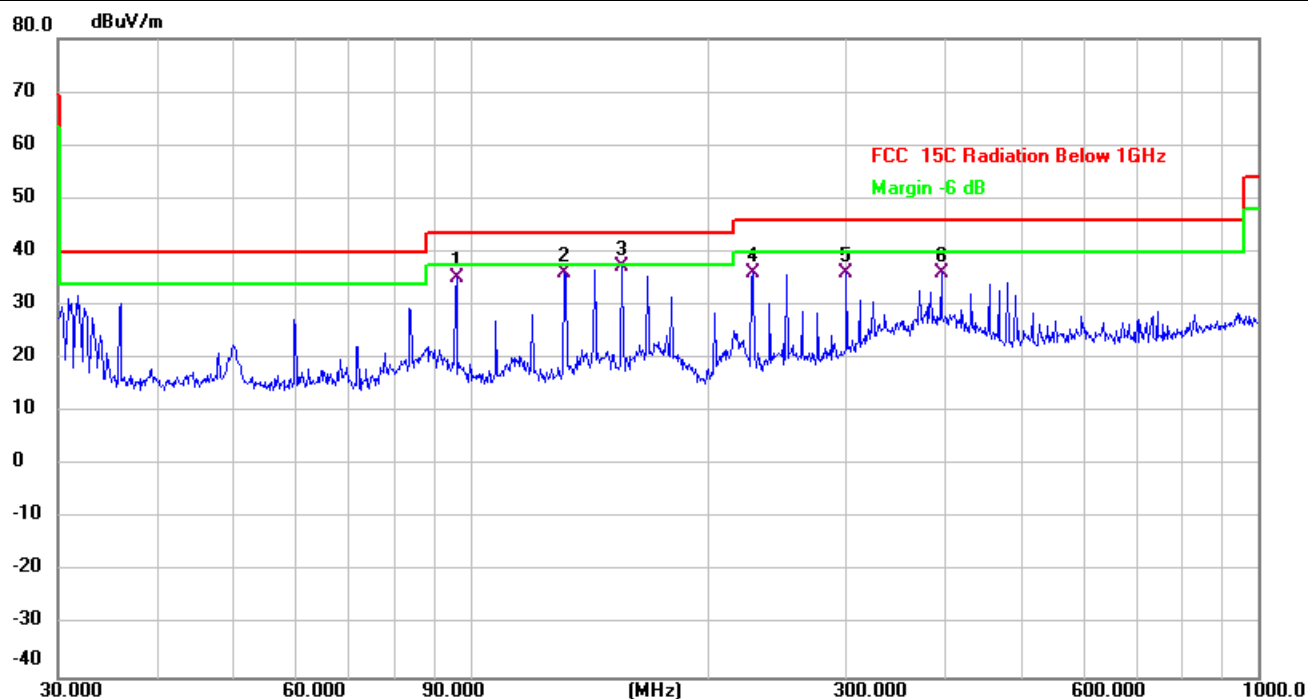

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		96.0986	45.65	-10.55	35.10	43.50	-8.40	QP
2		131.7577	48.82	-12.83	35.99	43.50	-7.51	QP
3	*	155.9101	49.31	-12.09	37.22	43.50	-6.28	QP
4		228.4904	44.95	-9.04	35.91	46.00	-10.09	QP
5		300.3672	44.12	-8.20	35.92	46.00	-10.08	QP
6		396.2415	43.06	-6.96	36.10	46.00	-9.90	QP

**Radiated emissions 1 GHz ~ 25 GHz**

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>Zigbee - 2405 MHz TX mode</b>							
4810.000	46.08	0.77	46.85	74.00	-27.15	Peak	V
4810.000	40.62	0.77	41.39	54.00	-12.61	AVG	V
7215.000	44.03	6.02	50.05	74.00	-23.95	Peak	V
7215.000	39.08	6.02	45.10	54.00	-8.90	AVG	V
9620.000	41.25	5.98	47.23	74.00	-26.77	Peak	V
9620.000	35.18	5.98	41.16	54.00	-12.84	AVG	V
4810.000	52.53	0.77	53.30	74.00	-20.70	Peak	H
4810.000	47.55	0.77	48.32	54.00	-5.68	AVG	H
7215.000	46.41	6.02	52.43	74.00	-21.57	Peak	H
7215.000	41.30	6.02	47.32	54.00	-6.68	AVG	H
9620.000	41.09	5.98	47.07	74.00	-26.93	Peak	H
9620.000	35.12	5.98	41.10	54.00	-12.90	AVG	H
<b>Zigbee - 2440 MHz TX mode</b>							
4880.000	50.15	1.04	51.19	74.00	-22.81	Peak	V
4880.000	45.06	1.04	46.10	54.00	-7.90	AVG	V
7320.000	45.93	5.93	51.86	74.00	-22.14	Peak	V
7320.000	40.45	5.93	46.38	54.00	-7.62	AVG	V
9760.000	41.42	6.55	47.97	74.00	-26.03	Peak	V
9760.000	35.03	6.55	41.58	54.00	-12.42	AVG	V
4880.000	52.92	1.04	53.96	74.00	-20.04	Peak	H
4880.000	47.52	1.04	48.56	54.00	-5.44	AVG	H
7320.000	44.92	5.93	50.85	74.00	-23.15	Peak	H
7320.000	39.54	5.93	45.47	54.00	-8.53	AVG	H
9760.000	41.01	6.55	47.56	74.00	-26.44	Peak	H
9760.000	34.80	6.55	41.35	54.00	-12.65	AVG	H

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>Zigbee - 2480 MHz TX mode</b>							
4960.000	49.63	1.50	51.13	74.00	-22.87	Peak	V
4960.000	44.52	1.50	46.02	54.00	-7.98	AVG	V
7440.000	44.05	5.61	49.66	74.00	-24.34	Peak	V
7440.000	38.71	5.61	44.32	54.00	-9.68	AVG	V
9920.000	43.19	6.10	49.29	74.00	-24.71	Peak	V
9920.000	37.06	6.10	43.16	54.00	-10.84	AVG	V
4960.000	50.83	1.50	52.33	74.00	-21.67	Peak	H
4960.000	45.65	1.50	47.15	54.00	-6.85	AVG	H
7440.000	45.70	5.61	51.31	74.00	-22.69	Peak	H
7440.000	40.52	5.61	46.13	54.00	-7.87	AVG	H
9920.000	41.80	6.10	47.90	74.00	-26.10	Peak	H
9920.000	35.25	6.10	41.35	54.00	-12.65	AVG	H

**Radiated emissions at band edge**

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>Zigbee – Low band-edge</b>							
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
2310.000	49.67	-8.08	41.59	74.00	-32.41	Peak	V
2310.000	40.23	-8.08	32.15	54.00	-21.85	AVG	V
2390.000	48.05	-7.71	40.34	74.00	-33.66	Peak	V
2390.000	39.07	-7.71	31.36	54.00	-22.64	AVG	V
2310.000	50.81	-8.08	42.73	74.00	-31.27	Peak	H
2310.000	39.53	-8.08	31.45	54.00	-22.55	AVG	H
2390.000	49.11	-7.71	41.40	74.00	-32.60	Peak	H
2390.000	39.10	-7.71	31.39	54.00	-22.61	AVG	H
<b>Zigbee – High band-edge</b>							
2483.500	72.05	-7.24	64.81	74.00	-9.19	Peak	V
2483.500	54.89	-7.24	47.65	54.00	-6.35	AVG	V
2500.000	49.09	-7.17	41.92	74.00	-32.08	Peak	V
2500.000	39.81	-7.17	32.64	54.00	-21.36	AVG	V
2483.500	72.55	-7.24	65.31	74.00	-8.69	Peak	H
2483.500	55.70	-7.24	48.46	54.00	-5.54	AVG	H
2500.000	49.83	-7.17	42.66	74.00	-31.34	Peak	H
2500.000	40.17	-7.17	33.00	54.00	-21.00	AVG	H

## Photographs of the Test Setup

See the appendix – Test Setup Photos.

## Photographs of the EUT

See the appendix - EUT Photos.

**---End of Report---**