



## MEASUREMENT REPORT

---

**FCC ID** : Z9G-EDF225  
**APPLICANT** : Edifier International Limited  
**Application Type** : Certification  
**Product** : True Wireless Earbuds with Active Noise Cancellation  
**Model No.** : EDF280027  
**Brand Name** : EDIFIER  
**FCC Classification** : (DSS) FCC Part 15 Spread Spectrum Transmitter  
**FCC Rule Part(s)** : Part 15.247  
**Test Procedure(s)** : ANSI C63.10-2013  
**Received Date** : December 8, 2023  
**Test Date** : December 12, 2023~ December 19, 2023

**Tested By** : *Kaunaz Lee*

( Kaunaz Lee )

**Reviewed By** : *Paddy Chen*  
( Paddy Chen )

**Approved By** : *Chenz Ker*  
( Chenz Ker )



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

### Revision History

| Report No.    | Version | Description     | Issue Date | Note |
|---------------|---------|-----------------|------------|------|
| 2312TW0106-U2 | 1.0     | Original Report | 2023-12-22 |      |

## CONTENTS

| Description                                                  | Page      |
|--------------------------------------------------------------|-----------|
| <b>1. INTRODUCTION .....</b>                                 | <b>7</b>  |
| 1.1. Scope .....                                             | 7         |
| 1.2. MRT Test Location .....                                 | 7         |
| <b>2. PRODUCT INFORMATION .....</b>                          | <b>8</b>  |
| 2.1. Equipment Description .....                             | 8         |
| 2.2. Product Specification Subjective to this Standard ..... | 8         |
| 2.3. Test Mode .....                                         | 8         |
| 2.4. Operation Frequency / Channel List .....                | 9         |
| 2.5. Test Configuration .....                                | 10        |
| 2.6. Test Software .....                                     | 10        |
| 2.7. EMI Suppression Device(s)/Modifications .....           | 10        |
| 2.8. Labeling Requirements .....                             | 10        |
| 2.9. Pseudorandom Frequency Hopping Sequence .....           | 11        |
| <b>3. DESCRIPTION of TEST .....</b>                          | <b>12</b> |
| 3.1. Evaluation Procedure .....                              | 12        |
| 3.2. AC Line Conducted Emissions .....                       | 12        |
| 3.3. Radiated Emissions .....                                | 13        |
| <b>4. ANTENNA REQUIREMENTS .....</b>                         | <b>14</b> |
| <b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>              | <b>15</b> |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>                      | <b>16</b> |
| <b>7. TEST RESULT .....</b>                                  | <b>17</b> |
| 7.1. Summary .....                                           | 17        |
| 7.2. 20dB Bandwidth Measurement .....                        | 18        |
| 7.2.1. Test Limit .....                                      | 18        |
| 7.2.2. Test Procedure used .....                             | 18        |
| 7.2.3. Test Setting .....                                    | 18        |
| 7.2.4. Test Setup .....                                      | 18        |
| 7.2.5. Test Result .....                                     | 19        |
| 7.3. Output Power Measurement .....                          | 21        |
| 7.3.1. Test Limit .....                                      | 21        |
| 7.3.2. Test Procedure Used .....                             | 21        |
| 7.3.3. Test Setting .....                                    | 22        |

|        |                                                            |    |
|--------|------------------------------------------------------------|----|
| 7.3.4. | Test Setup .....                                           | 22 |
| 7.3.5. | Test Result.....                                           | 23 |
| 7.4.   | Carrier Frequency Separation Measurement .....             | 24 |
| 7.4.1. | Test Limit .....                                           | 24 |
| 7.4.2. | Test Procedure Used .....                                  | 24 |
| 7.4.3. | Test Setting.....                                          | 24 |
| 7.4.4. | Test Setup .....                                           | 24 |
| 7.4.5. | Test Result.....                                           | 25 |
| 7.5.   | Number of Hopping Channels Measurement .....               | 27 |
| 7.5.1. | Test Limit .....                                           | 27 |
| 7.5.2. | Test Procedure Used .....                                  | 27 |
| 7.5.3. | Test Setting.....                                          | 27 |
| 7.5.4. | Test Setup .....                                           | 27 |
| 7.5.5. | Test Result.....                                           | 28 |
| 7.6.   | Time of Occupancy Measurement .....                        | 30 |
| 7.6.1. | Test Limit .....                                           | 30 |
| 7.6.2. | Test Procedure Used .....                                  | 30 |
| 7.6.3. | Test Setting.....                                          | 30 |
| 7.6.4. | Test Setup .....                                           | 30 |
| 7.6.5. | Test Result.....                                           | 31 |
| 7.7.   | Out-of-Band Spurious Emissions Emissions Measurement ..... | 34 |
| 7.7.1. | Test Limit .....                                           | 34 |
| 7.7.2. | Test Procedure Used .....                                  | 34 |
| 7.7.3. | Test Setting.....                                          | 35 |
| 7.7.4. | Test Setup .....                                           | 35 |
| 7.7.5. | Test Result.....                                           | 36 |
| 7.8.   | Radiated Spurious Emission Measurement .....               | 39 |
| 7.8.1. | Test Limit .....                                           | 39 |
| 7.8.2. | Test Procedure Used .....                                  | 39 |
| 7.8.3. | Test Setting.....                                          | 39 |
| 7.8.4. | Test Setup .....                                           | 41 |
| 7.8.5. | Test Result.....                                           | 43 |
| 7.9.   | Radiated Restricted Band Edge Measurement .....            | 58 |
| 7.9.1. | Test Limit .....                                           | 58 |
| 7.9.2. | Test Procedure Used .....                                  | 58 |
| 7.9.3. | Test Setting.....                                          | 58 |
| 7.9.4. | Test Setup .....                                           | 60 |
| 7.9.5. | Test Result.....                                           | 61 |

|                                                |           |
|------------------------------------------------|-----------|
| 7.10. AC Conducted Emissions Measurement ..... | 69        |
| 7.10.1. Test Limit .....                       | 69        |
| 7.10.2. Test Setup .....                       | 69        |
| 7.10.3. Test Result.....                       | 70        |
| <b>8. CONCLUSION .....</b>                     | <b>76</b> |
| <b>Appendix A : Test Photograph.....</b>       | <b>77</b> |
| <b>Appendix B : EUT Photograph.....</b>        | <b>77</b> |
| <b>Appendix C : Internal Photograph.....</b>   | <b>77</b> |

## §2.1033 General Information

|                                 |                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>                | Edifier International Limited                                                                                                    |
| <b>Applicant Address</b>        | P.O. Box 6264 General Post Office Hong Kong                                                                                      |
| <b>Manufacturer</b>             | Beijing Edifier Technology Co., Ltd                                                                                              |
| <b>Manufacturer Address</b>     | 815, Floor 8, Shuangqiao Building, No.68, North Fourth Ring West Road, Haidian District, Beijing 100080, P.R.China               |
| <b>Test Site</b>                | MRT Technology (Taiwan) Co., Ltd                                                                                                 |
| <b>Test Site Address</b>        | No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)                                                       |
| <b>MRT FCC Registration No.</b> | 291082                                                                                                                           |
| <b>FCC Rule Part(s)</b>         | Part 15.247                                                                                                                      |
| <b>Test Device Serial No.</b>   | #1-1 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |

### Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

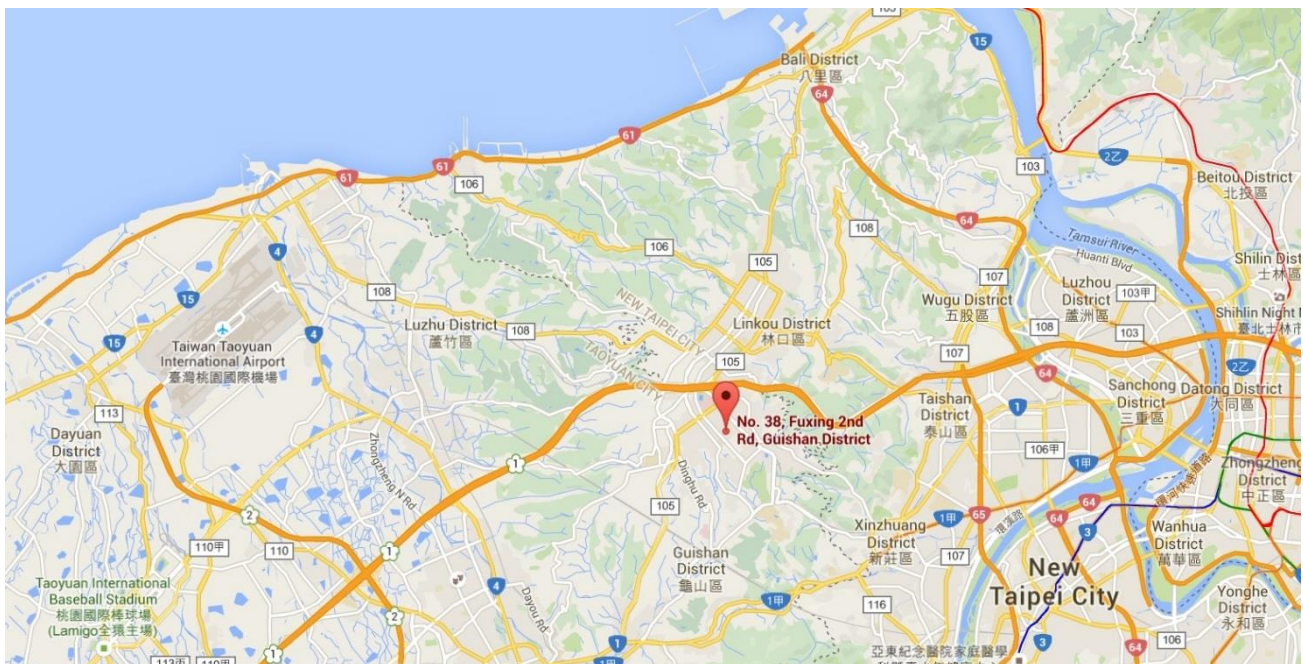

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| Product Name          | True Wireless Earbuds with Active Noise Cancellation |
| Model No.             | EDF280027                                            |
| Supports Radios Spec. | <b>WPAN:</b><br>Bluetooth Dual Mode                  |

Note: This headset has left and right ear, and their radio frequency layouts are identical.

### 2.2. Product Specification Subjective to this Standard

|                     |                                                     |
|---------------------|-----------------------------------------------------|
| Operating Frequency | 2402~2480MHz                                        |
| Type of modulation  | FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)                   |
| Data Rate           | 1Mbps (GFSK), 2Mbps ( $\pi/4$ DQPSK), 3Mbps (8DPSK) |

### 2.3. Test Mode

|           |                                                                     |
|-----------|---------------------------------------------------------------------|
| Test Mode | Mode 1: Transmit - 1Mbps (GFSK)<br>Mode 2: Transmit - 3Mbps (8DPSK) |
|-----------|---------------------------------------------------------------------|

Note:

1. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
2. Bluetooth operation was evaluated at both 1Mbps and 3Mbps data rates. Through pre-testing 2Mbps data rate was found, to produce emissions like those for 3Mbps.

## 2.4. Operation Frequency / Channel List

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 00      | 2402 MHz  | 01      | 2403 MHz  | 02      | 2404 MHz  |
| 03      | 2405 MHz  | 04      | 2406 MHz  | 05      | 2407 MHz  |
| 06      | 2408 MHz  | 07      | 2409 MHz  | 08      | 2410 MHz  |
| 09      | 2411 MHz  | 10      | 2412 MHz  | 11      | 2413 MHz  |
| 12      | 2414 MHz  | 13      | 2415 MHz  | 14      | 2416 MHz  |
| 15      | 2417 MHz  | 16      | 2418 MHz  | 17      | 2419 MHz  |
| 18      | 2420 MHz  | 19      | 2421 MHz  | 20      | 2422 MHz  |
| 21      | 2423 MHz  | 22      | 2424 MHz  | 23      | 2425 MHz  |
| 24      | 2426 MHz  | 25      | 2427 MHz  | 26      | 2428 MHz  |
| 27      | 2429 MHz  | 28      | 2430 MHz  | 29      | 2431 MHz  |
| 30      | 2432 MHz  | 31      | 2433 MHz  | 32      | 2434 MHz  |
| 33      | 2435 MHz  | 34      | 2436 MHz  | 35      | 2437 MHz  |
| 36      | 2438 MHz  | 37      | 2439 MHz  | 38      | 2440 MHz  |
| 39      | 2441 MHz  | 40      | 2442 MHz  | 41      | 2443 MHz  |
| 42      | 2444 MHz  | 43      | 2445 MHz  | 44      | 2446 MHz  |
| 45      | 2447 MHz  | 46      | 2448 MHz  | 47      | 2449 MHz  |
| 48      | 2450 MHz  | 49      | 2451 MHz  | 50      | 2452 MHz  |
| 51      | 2453 MHz  | 52      | 2454 MHz  | 53      | 2455 MHz  |
| 54      | 2456 MHz  | 55      | 2457 MHz  | 56      | 2458 MHz  |
| 57      | 2459 MHz  | 58      | 2460 MHz  | 59      | 2461 MHz  |
| 60      | 2462 MHz  | 61      | 2463 MHz  | 62      | 2464 MHz  |
| 63      | 2465 MHz  | 64      | 2466 MHz  | 65      | 2467 MHz  |
| 66      | 2468 MHz  | 67      | 2469 MHz  | 68      | 2470 MHz  |
| 69      | 2471 MHz  | 70      | 2472 MHz  | 71      | 2473 MHz  |
| 72      | 2474 MHz  | 73      | 2475 MHz  | 74      | 2476 MHz  |
| 75      | 2477 MHz  | 76      | 2478 MHz  | 77      | 2479 MHz  |
| 78      | 2480 MHz  | N/A     | N/A       | N/A     | N/A       |

## **2.5. Test Configuration**

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.6. Test Software**

The test utility software used during testing was “BQB.exe v20201012”.

## **2.7. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.8. Labeling Requirements**


Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

## 2.9. Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

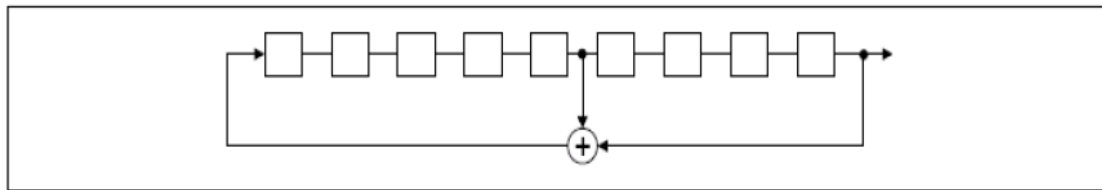

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

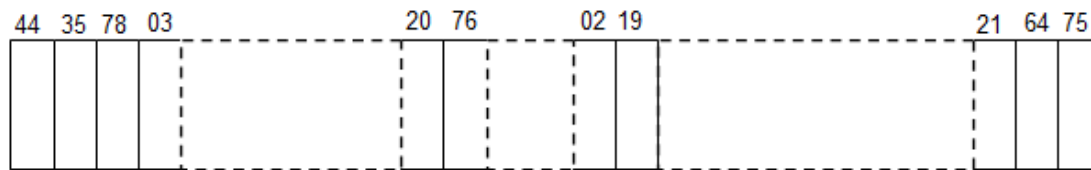

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) were used in the measurement of the **True Wireless Earbuds with Active Noise Cancellation**.

Deviation from measurement procedure.....None

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 $\Omega$ /50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beamwidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.8 & 7.9

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the True Wireless Earbuds with Active Noise Cancellation, is permanently attached.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

#### Antenna List

| No. | Brand | Part No.         | Antenna Type | Peak Gain |
|-----|-------|------------------|--------------|-----------|
| 1   | HEK   | ANT3216R24003KL0 | Chip         | 1.08dBi   |

## 5. TEST EQUIPMENT CALIBRATION DATE

### Radiated Emissions – AC2

| Instrument                 | Manufacturer                | Type No.          | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|-----------------------------|-------------------|-------------|----------------|----------------|
| Active Loop Antenna        | SCHWARZBECK                 | FMZB 1519B        | MRTTWA00002 | 1 year         | 2024/5/22      |
| Broadband TRILOG Antenna   | SCHWARZBECK                 | VULB 9162         | MRTTWA00001 | 1 year         | 2024/10/31     |
| Broadband Hornantenna      | RFSPIN                      | DRH18-E           | MRTTWA00087 | 1 year         | 2024/5/17      |
| Broadband Preamplifier     | EMC Instruments corporation | EMC118A45SE       | MRTTWA00088 | 1 year         | 2024/5/17      |
| Broadband Hornantenna      | SCHWARZBECK                 | BBHA 9170         | MRTTWA00004 | 1 year         | 2024/3/20      |
| Broadband Amplifier        | SCHWARZBECK                 | BBV 9721          | MRTTWA00006 | 1 year         | 2024/3/27      |
| EMI Test Receiver          | R&S                         | ESR3              | MRTTWA00009 | 1 year         | 2024/3/8       |
| Signal Analyzer            | R&S                         | FSVA3044          | MRTTWA00092 | 1 year         | 2024/6/29      |
| Antenna Cable              | HUBERSUHNER                 | SF106             | MRTTWE00034 | 1 year         | 2024/6/26      |
| Cable                      | HUBERSUHNER                 | EMC105-NM-NM-3000 | MRTTWE00035 | 1 year         | 2024/6/26      |
| Temperature/Humidity Meter | TFA                         | 35.1078.10.IT     | MRTTWA00032 | 1 year         | 2024/6/4       |

### Conducted Test Equipment – SR6

| Instrument                | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|---------------------------|--------------|----------|-------------|----------------|----------------|
| EXA Signal Analyzer       | KEYSIGHT     | N9010A   | MRTTWA00012 | 1 year         | 2024/10/17     |
| EXA Signal Analyzer       | KEYSIGHT     | N9010B   | MRTTWA00074 | 1 year         | 2024/7/19      |
| USB Wideband Power Sensor | KEYSIGHT     | U2021XA  | MRTTWA00015 | 1 year         | 2024/3/16      |

### Test Software

| Software | Version   | Function          |
|----------|-----------|-------------------|
| e3       | 9.160520a | EMI Test Software |
| EMI      | V3        | EMI Test Software |

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                          |
|----------------------------------------------------------------------------------------------------------|
| Conducted Emission- Power Line                                                                           |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 2.53\text{dB}$               |
| Radiated Spurious Emission                                                                               |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 3.92\text{dB}$ (Below 30M)   |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 4.25\text{dB}$ (30M~1G)      |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 4.40\text{dB}$ (1G~18G)      |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 4.45\text{dB}$ (18G~40G)     |
| Frequency Error                                                                                          |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 78.4\text{Hz}$               |
| Conducted Power                                                                                          |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.84\text{dB}$               |
| Conducted Spurious Emission                                                                              |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 2.65\text{ dB}$              |
| Occupied Bandwidth                                                                                       |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 3.3\%$                       |
| Temp. / Humidity                                                                                         |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.82^\circ\text{C}/ \pm 3\%$ |
| DC Voltage                                                                                               |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.3\%$                       |

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** True Wireless Earbuds with Active Noise Cancellation

**FCC Classification:** (DSS) FCC Part 15 Spread Spectrum Transmitter

| FCC Part Section(s) | Test Description                         | Test Limit                                              | Test Condition | Test Result | Reference    |
|---------------------|------------------------------------------|---------------------------------------------------------|----------------|-------------|--------------|
| 15.247(a)(1)        | 20dB Bandwidth                           | N/A                                                     | Conducted      | PASS        | Section 7.2  |
| 15.247(b)(1)        | Output Power                             | <1 Watt if > 75 non-overlapping channels used           |                | PASS        | Section 7.3  |
| 15.247(a)(1)        | Carrier Frequency Separation             | 25KHz or 20 dB BW for systems with Output Power < 125mW |                | PASS        | Section 7.4  |
| 15.247(a)(1)(iii)   | Number of Hopping Channels               | > 15 Channels                                           |                | PASS        | Section 7.5  |
| 15.247(a)(1)(iii)   | Time of Occupancy                        | < 0.4 sec in 31.6 sec period                            |                | PASS        | Section 7.6  |
| 15.247(d)           | Out-of-Band Emissions                    | Conducted $\geq$ 20dBc                                  |                | PASS        | Section 7.7  |
| 15.205<br>15.209    | Spurious Emission                        | < FCC 15.209 limits                                     | Radiated       | PASS        | Section 7.8  |
| 15.205<br>15.209    | Band Edge Measurement                    | $\leq$ 74dBuV/m(Peak)<br>$\leq$ 54dBuV/m(Average)       |                | PASS        | Section 7.9  |
| 15.207              | AC Conducted Emissions<br>150kHz - 30MHz | < FCC 15.207 limits                                     | Line Conducted | N/A         | Section 7.10 |

**Note:**

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 20dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.2

### 7.2.3. Test Setting

1. Set RBW  $\geq 1\% \sim 5\%$  of the 20dB bandwidth
2. VBW  $\geq 3 \times$  RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


### 7.2.4. Test Setup

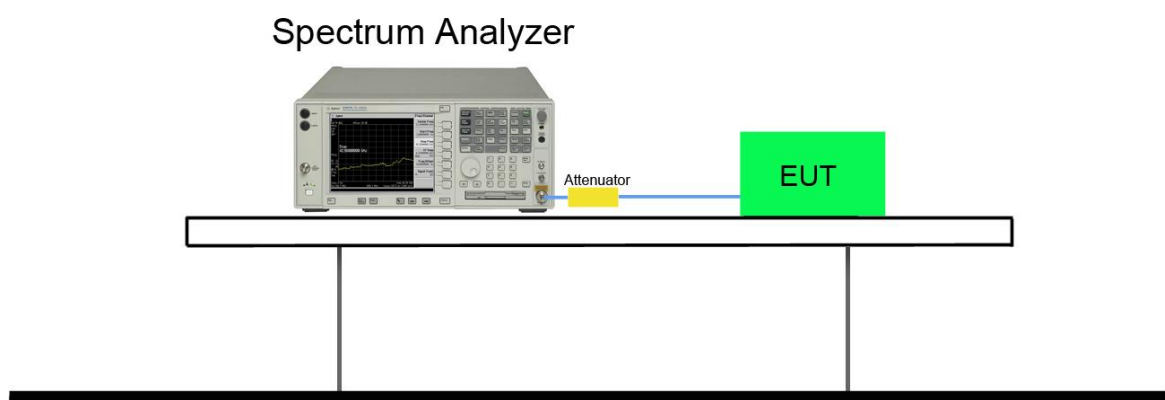


**7.2.5. Test Result**

| Test Mode | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | Result |
|-----------|-------------|-----------------|----------------------|--------|
| DH5       | 00          | 2402            | 1056                 | Pass   |
| DH5       | 39          | 2441            | 1044                 | Pass   |
| DH5       | 78          | 2480            | 1041                 | Pass   |
| 3-DH5     | 00          | 2402            | 1161                 | Pass   |
| 3-DH5     | 39          | 2441            | 1171                 | Pass   |
| 3-DH5     | 78          | 2480            | 1156                 | Pass   |


### CH00 (2402MHz) DH5(1Mbps)

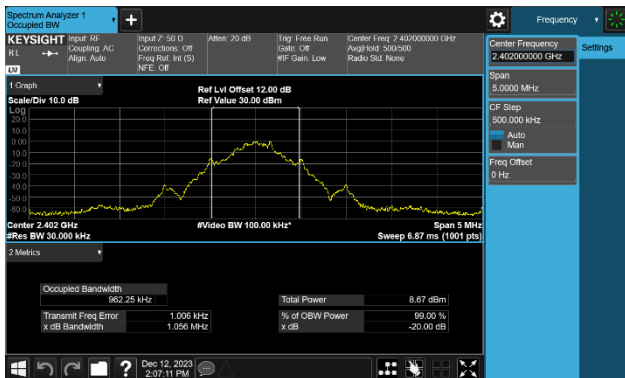


### CH39 (2441MHz) DH5(1Mbps)

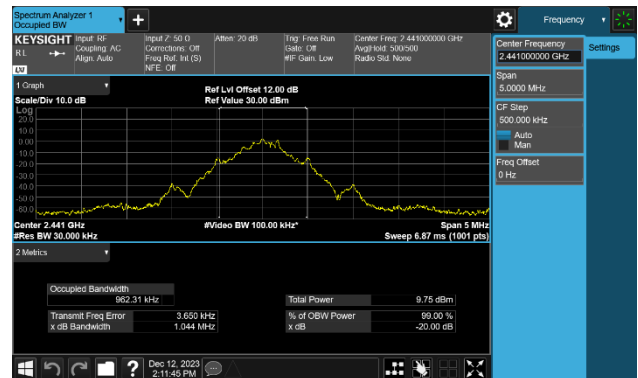


### CH78 (2480MHz) DH5(1Mbps)

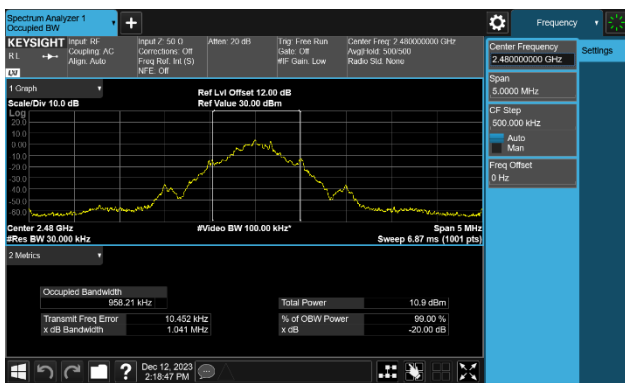


### CH00 (2402MHz) 3-DH5(3Mbps)

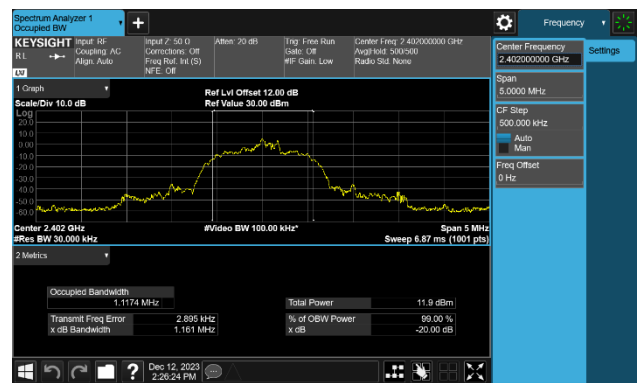

### CH39 (2441MHz) 3-DH5(3Mbps)

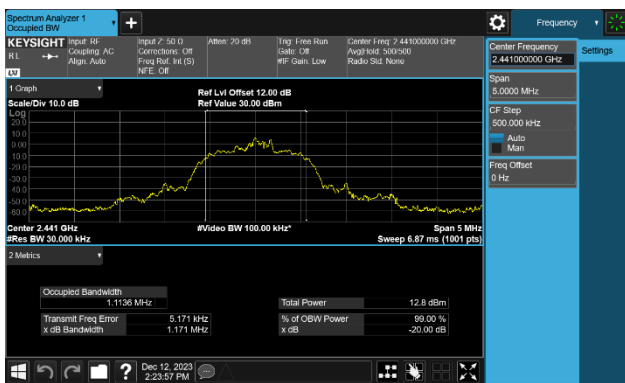

### CH78 (2480MHz) 3-DH5(3Mbps)

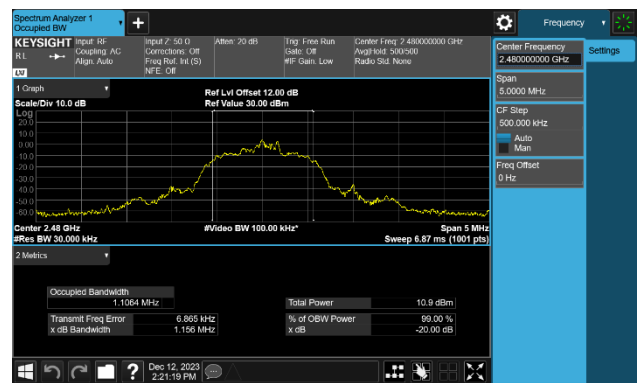

## **7.3. Output Power Measurement**

### **7.3.1. Test Limit**

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels: 1watt (30dBm). For all other frequency hopping systems in the 2400 - 2483.5MHz band: 0.125 watt (21dBm).

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.


### **7.3.2. Test Procedure Used**

ANSI C63.10-2013 - Section 7.8.5

### 7.3.3. Test Setting

1. Set RBW  $\geq$  the 20 dB bandwidth of the emission being measured.
2. VBW  $\geq 3 \times$  RBW
3. Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss)
8. Note: A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

### 7.3.4. Test Setup

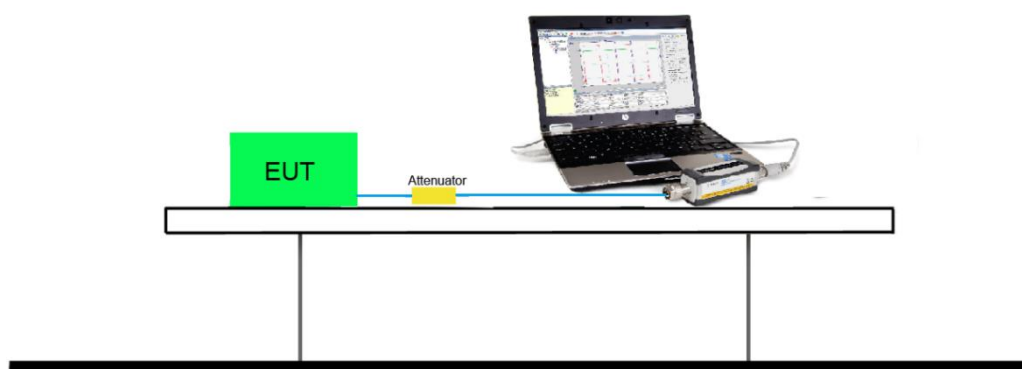

### 7.3.5. Test Result

| Test Mode | Channel No. | Frequency (MHz) | Average Power (dBm) | Peak Power (dBm) | Peak Power Limit (dBm) |
|-----------|-------------|-----------------|---------------------|------------------|------------------------|
| DH5       | 00          | 2402            | 0.74                | 3.78             | < 21                   |
| DH5       | 39          | 2441            | 1.87                | 4.70             | < 21                   |
| DH5       | 78          | 2480            | 3.60                | 6.45             | < 21                   |
| 2DH5      | 00          | 2402            | 1.84                | 6.88             | < 21                   |
| 2DH5      | 39          | 2441            | 2.95                | 7.89             | < 21                   |
| 2DH5      | 78          | 2480            | 0.57                | 6.35             | < 21                   |
| 3DH5      | 00          | 2402            | 1.88                | 7.05             | < 21                   |
| 3DH5      | 39          | 2441            | 3.04                | 8.04             | < 21                   |
| 3DH5      | 78          | 2480            | 0.65                | 6.31             | < 21                   |

Note:

1. The peak power of all test modes is less than 21dBm(125mW).
2. Peak Power Output Value =Reading value on power meter + cable loss.

## 7.4. Carrier Frequency Separation Measurement

### 7.4.1. Test Limit

The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


### 7.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.2

### 7.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. RBW  $\geq 1$  % of the span
3. VBW  $\geq$  RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 7.4.4. Test Setup

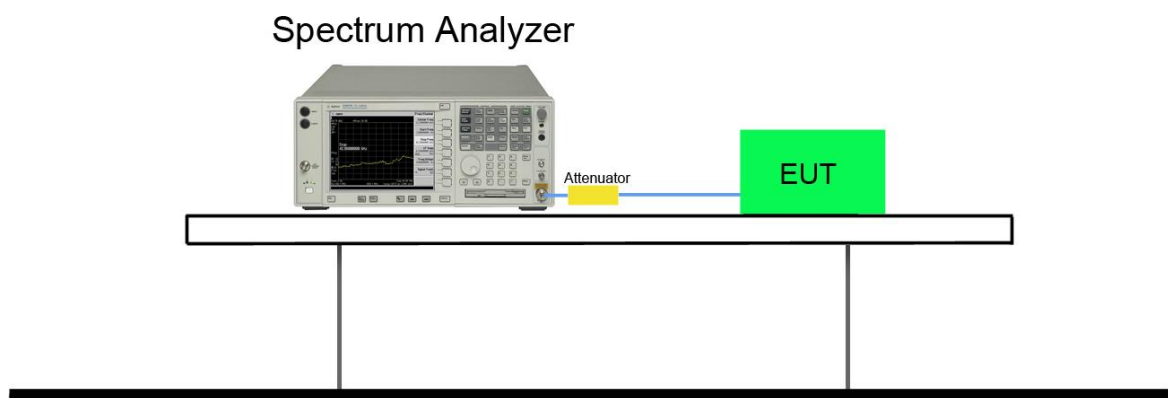


#### 7.4.5. Test Result

| Test Mode | Channel No. | Frequency (MHz) | Channel Separation (MHz) | Limit (kHz) | Limit of 2/3*20dB Bandwidth (kHz) | Result |
|-----------|-------------|-----------------|--------------------------|-------------|-----------------------------------|--------|
| DH5       | 00          | 2402            | 1.00                     | 25          | 704.000                           | Pass   |
| DH5       | 39          | 2441            | 1.00                     | 25          | 696.000                           | Pass   |
| DH5       | 78          | 2480            | 1.00                     | 25          | 694.000                           | Pass   |
| 3-DH5     | 00          | 2402            | 1.00                     | 25          | 774.000                           | Pass   |
| 3-DH5     | 39          | 2441            | 1.00                     | 25          | 780.667                           | Pass   |
| 3-DH5     | 78          | 2480            | 1.00                     | 25          | 770.667                           | Pass   |


Note:

1. The limit is 25 kHz or 2/3 the value of the 20dB bandwidth of the hopping channel, whichever is greater.
2. The 20dB Bandwidth is refer to section 7.2.


### CH00 (2402MHz) DH5(1Mbps)

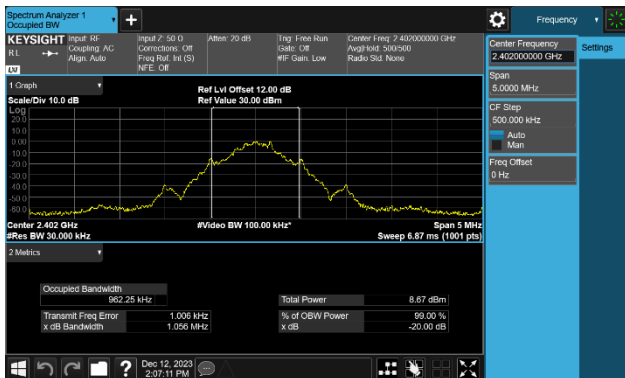


### CH39 (2441MHz) DH5(1Mbps)

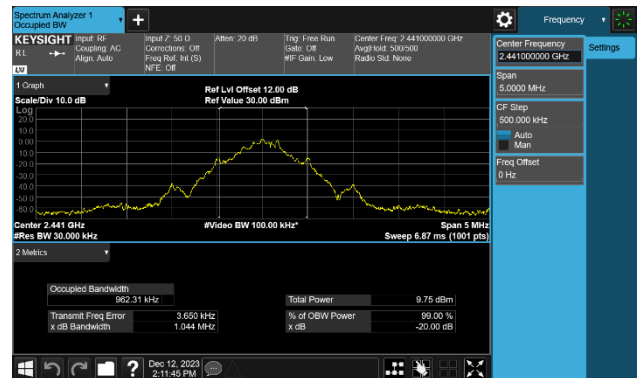


### CH78 (2480MHz) DH5(1Mbps)

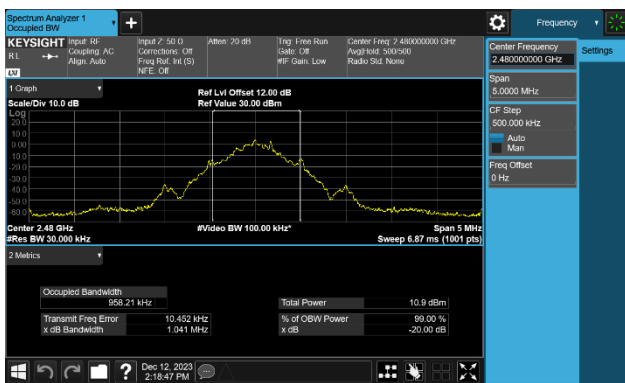


### CH00 (2402MHz) 3-DH5(3Mbps)

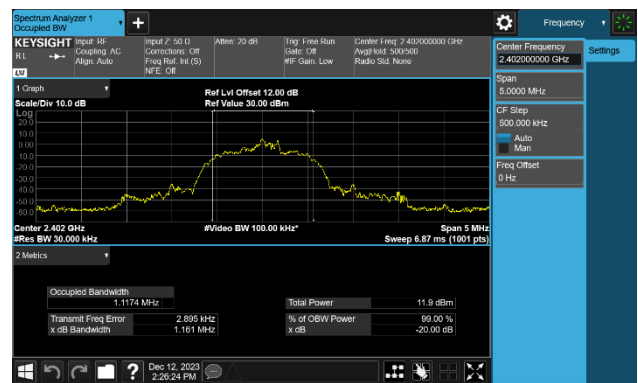

### CH39 (2441MHz) 3-DH5(3Mbps)

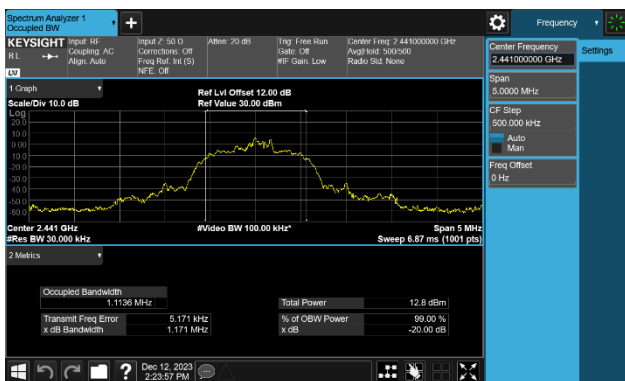

### CH78 (2480MHz) 3-DH5(3Mbps)

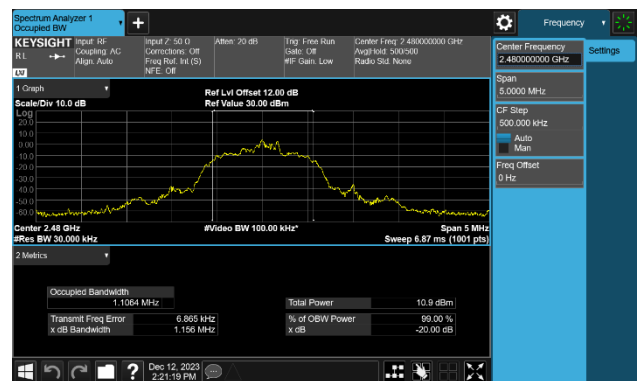

## 7.5. Number of Hopping Channels Measurement

### 7.5.1. Test Limit

This frequency hopping system must employ a minimum of 15 hopping channels.


### 7.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.3

### 7.5.3. Test Setting

1. Span = the frequency band of operation.
2. RBW  $\geq$  1 % of the span
3. VBW  $\geq$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize


### 7.5.4. Test Setup

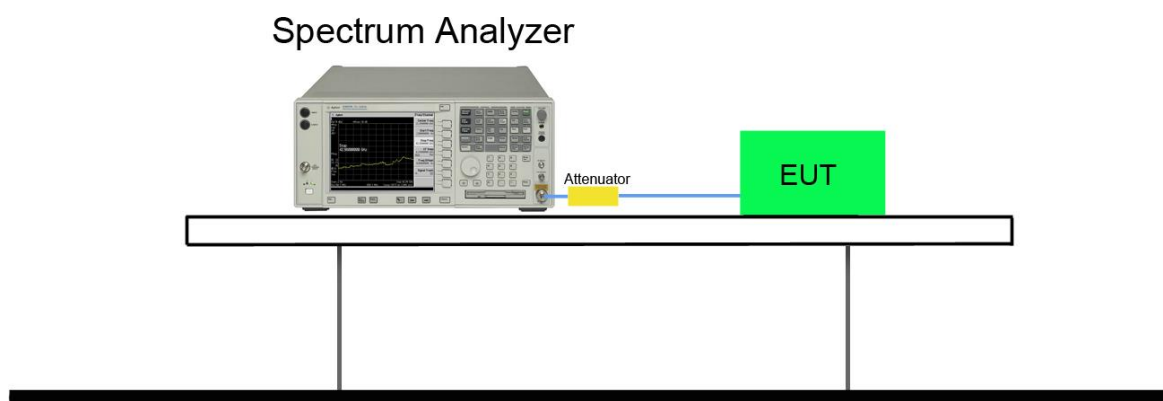


**7.5.5. Test Result**

| Test Mode<br>(Hopping) | Channel Numbers | Frequency<br>(MHz) | Limit<br>(Hopping Channels) | Result |
|------------------------|-----------------|--------------------|-----------------------------|--------|
| DH5                    | 79              | 2402~2480          | $\geq 15$                   | Pass   |
| 3DH5                   | 79              | 2402~2480          | $\geq 15$                   | Pass   |


### DH5(1Mbps)-2400~2441MHz

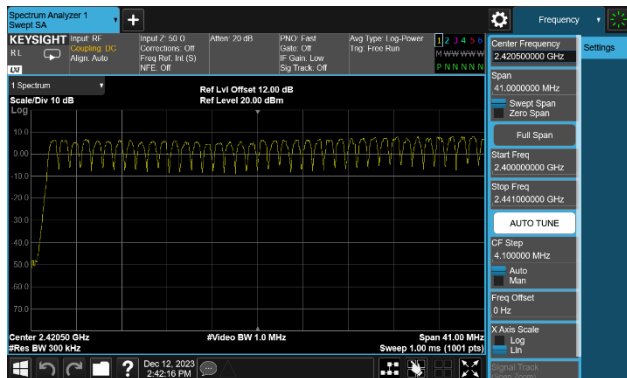


### DH5(1Mbps)-2441~2483.5MHz

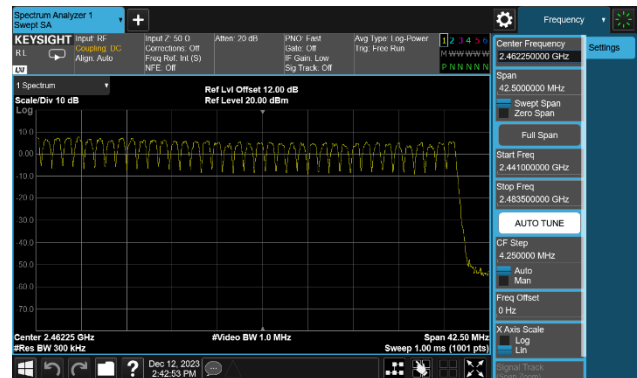

### 3-DH5(3Mbps)-2400~2441MHz

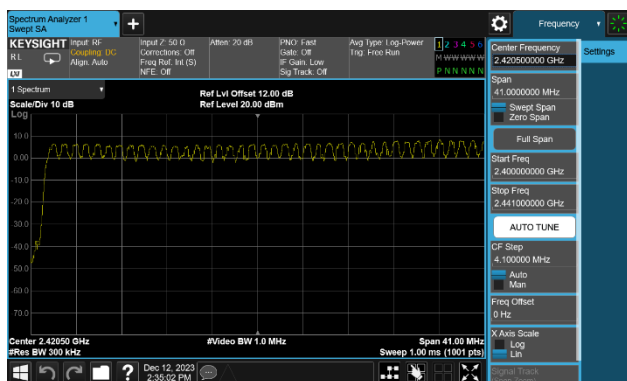

### 3-DH5(3Mbps)-2441~2483.5MHz

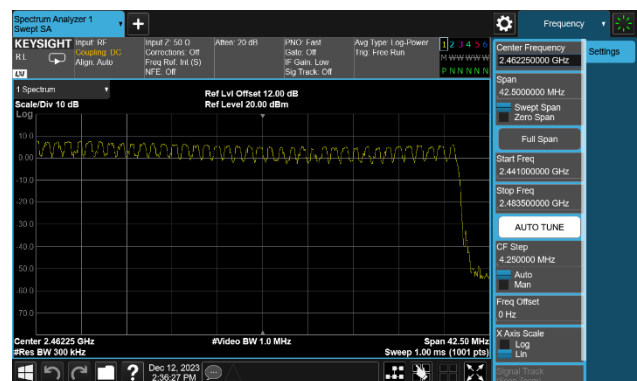

## 7.6. Time of Occupancy Measurement

### 7.6.1. Test Limit

The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

### 7.6.2. Test Procedure Used


ANSI C63.10-2013 - Section 7.8.4

### 7.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW = 1MHz
3. VBW  $\geq$  RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (data rate, modulation format, etc.), repeat this test for each variation. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

### 7.6.4. Test Setup

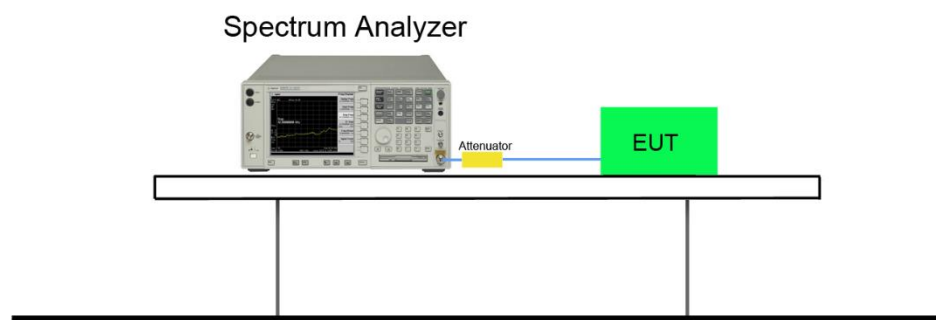


### 7.6.5. Test Result

| Test Mode | Frequency (MHz) | Time of Occupancy (ms) | Hopping of Numbers | Sweep time (ms) | Duty cycle | Dwell Time (Sec) | Limit (Sec) | Result |
|-----------|-----------------|------------------------|--------------------|-----------------|------------|------------------|-------------|--------|
| DH5       | 2402            | 2.877                  | 10                 | 50              | 0.58       | 0.23             | 0.4         | Pass   |
|           | 2441            | 2.873                  | 10                 | 50              | 0.57       | 0.23             | 0.4         | Pass   |
|           | 2480            | 2.880                  | 10                 | 50              | 0.58       | 0.23             | 0.4         | Pass   |
| 3-DH5     | 2402            | 2.880                  | 10                 | 50              | 0.58       | 0.23             | 0.4         | Pass   |
|           | 2441            | 2.884                  | 10                 | 50              | 0.58       | 0.23             | 0.4         | Pass   |
|           | 2480            | 2.869                  | 10                 | 50              | 0.57       | 0.23             | 0.4         | Pass   |


Note:

1. Duty cycle = ((Time slot length (ms)\*Hopping of Number) / Sweep time (ms)) °
2. Dwell time = ((Duty cycle \*(Time Period <0.4\*79>)) / (Total Hopping of Number<79>)) °
3. The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


### CH00 (2402MHz) DH5(1 Mbps)- Duty Cycle

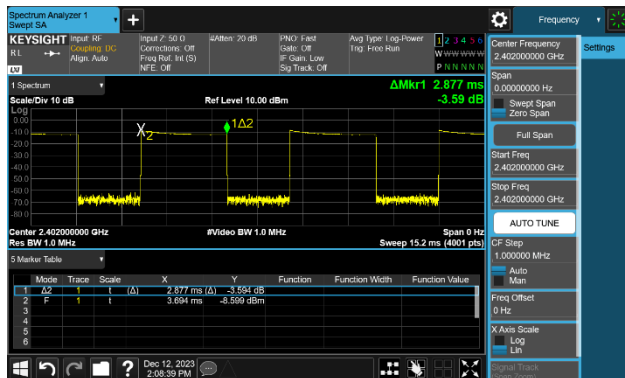


### CH00 (2402MHz) DH5(1 Mbps)- Dwell time

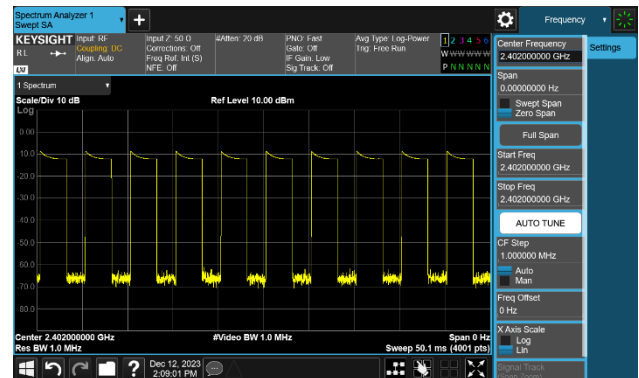


### CH39 (2441MHz) DH5(1 Mbps)- Duty Cycle

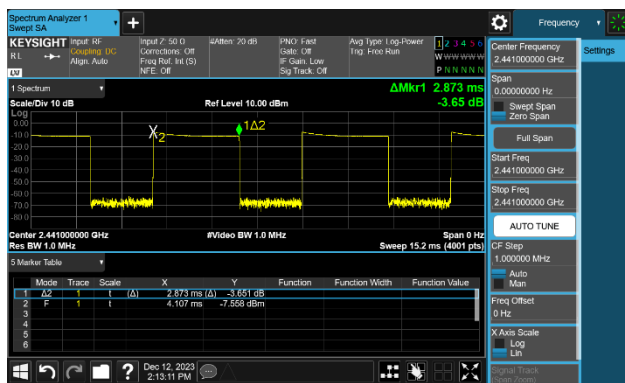


### CH39 (2441MHz) DH5(1 Mbps)- Dwell time

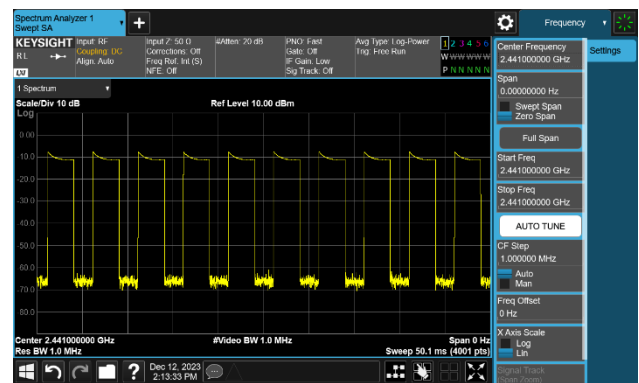


### CH78 (2480MHz) DH5(1 Mbps)- Duty Cycle

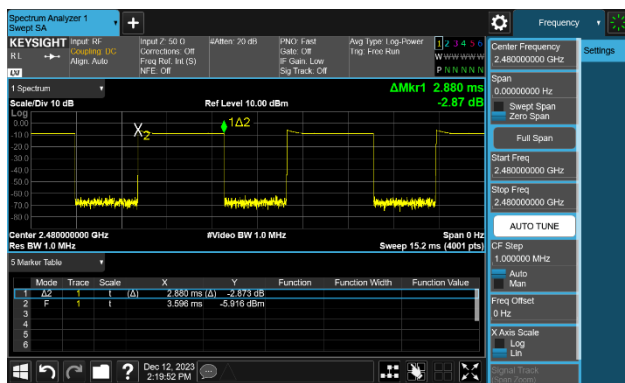


### CH78 (2480MHz) DH5(1 Mbps)- Dwell time

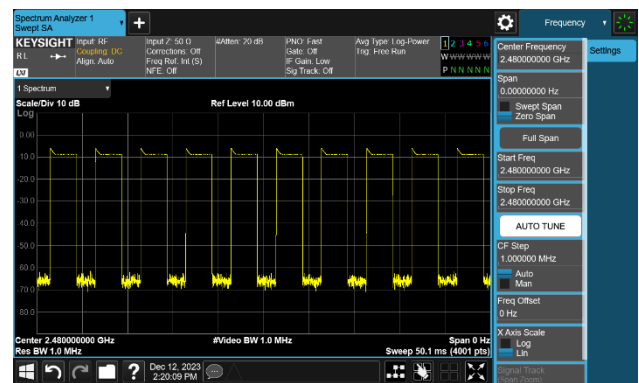


### CH00 (2402MHz) 3-DH5(3 Mbps)- Duty Cycle

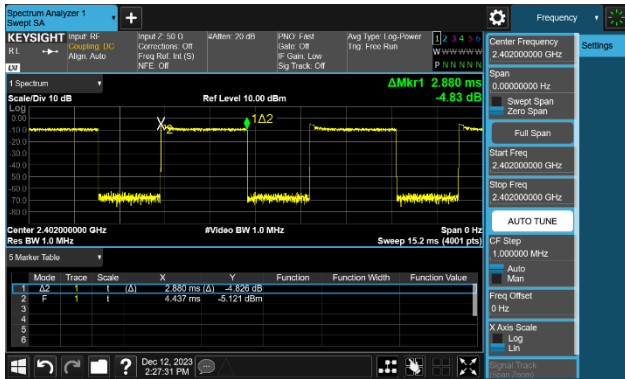


### CH00 (2402MHz) 3-DH5(3 Mbps)- Dwell time

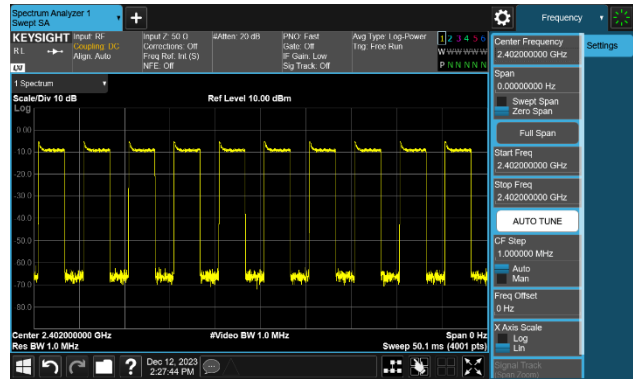


### CH39 (2441MHz) 3-DH5(3 Mbps)- Duty Cycle

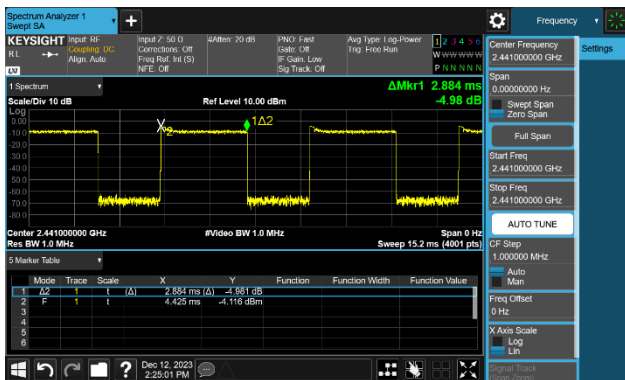


### CH39 (2441MHz) 3-DH5(3 Mbps)- Dwell time

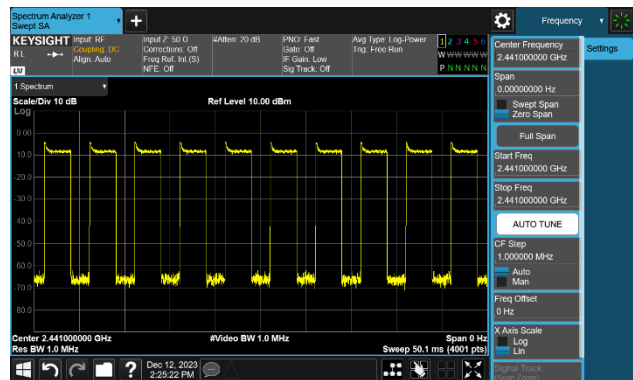

### CH78 (2480MHz) 3-DH5(3 Mbps)- Duty Cycle

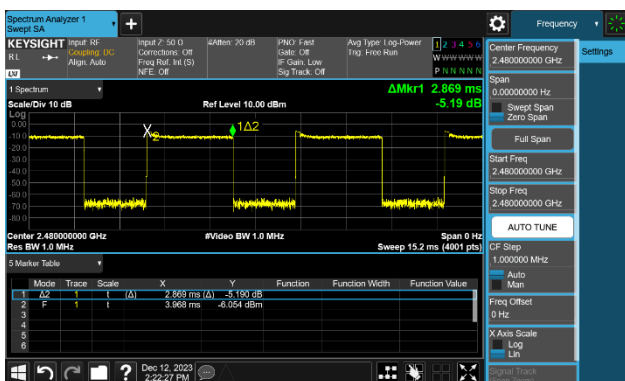

### CH78 (2480MHz) 3-DH5(3 Mbps)- Dwell time

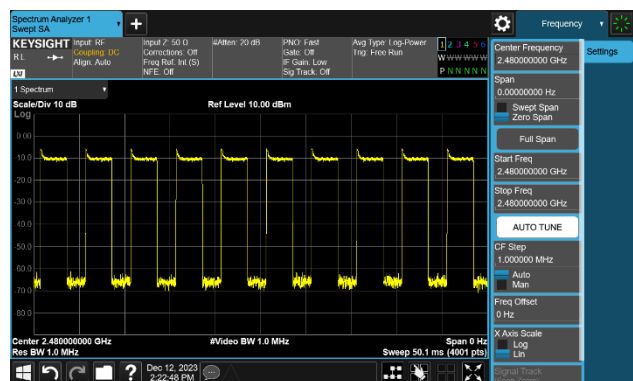

## **7.7. Out-of-Band Spurious Emissions Emissions Measurement**

### **7.7.1. Test Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **7.7.2. Test Procedure Used**


ANSI C63.10-2013 - Section 7.8.8

### 7.7.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW  $\geq$  RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


### 7.7.4. Test Setup

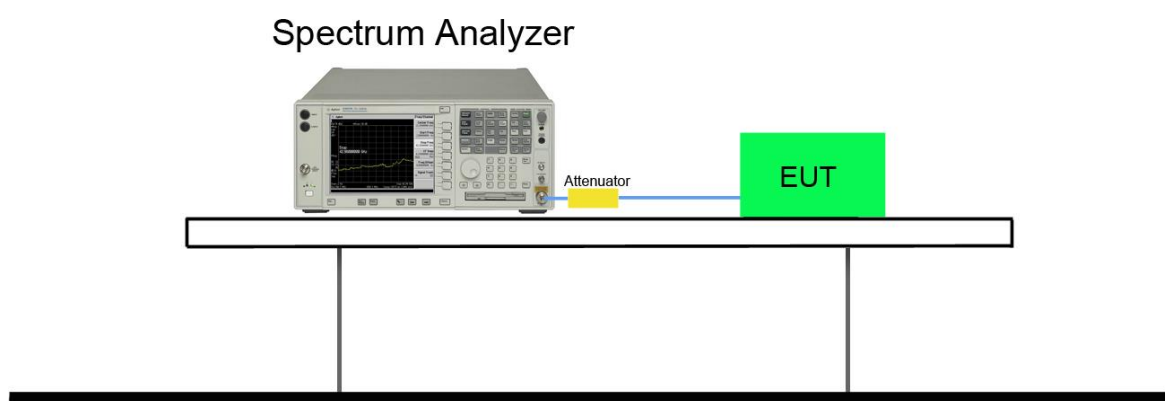


### 7.7.5. Test Result

| Test Mode | Channel No. | Frequency (MHz) | Limit (MHz) | Result |
|-----------|-------------|-----------------|-------------|--------|
| DH5       | 00          | 2402            | 20dBc       | Pass   |
| DH5       | 39          | 2441            | 20dBc       | Pass   |
| DH5       | 78          | 2480            | 20dBc       | Pass   |
| 3DH5      | 00          | 2402            | 20dBc       | Pass   |
| 3DH5      | 39          | 2441            | 20dBc       | Pass   |
| 3DH5      | 78          | 2480            | 20dBc       | Pass   |


### CH00 (2402MHz) DH5(1Mbps)

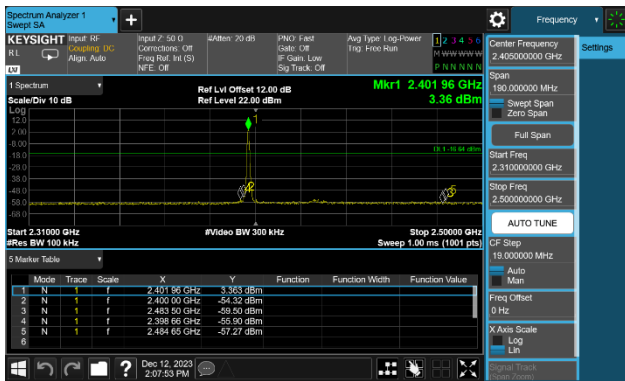


### CH00 (2402MHz) DH5(1Mbps)

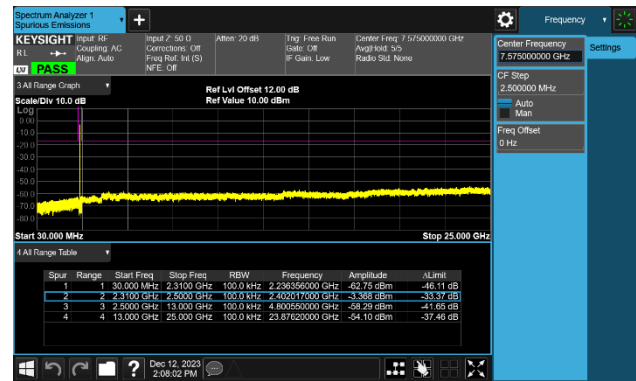


### CH39 (2441MHz) DH5(1Mbps)

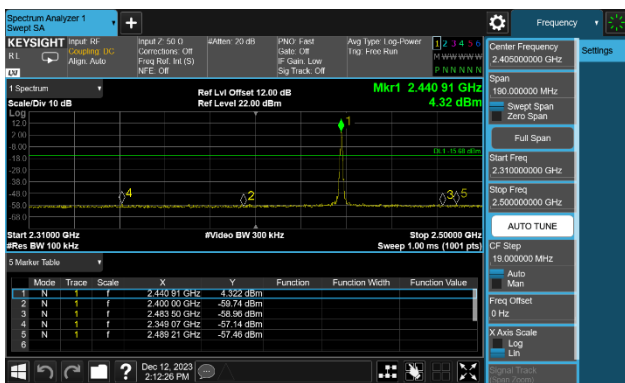


### CH39 (2441MHz) DH5(1Mbps)

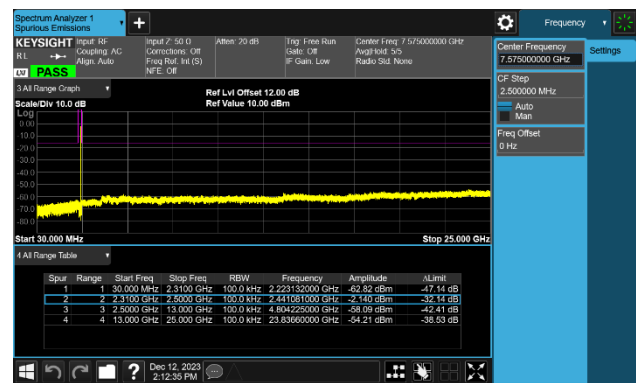


### CH78 (2480MHz) DH5(1Mbps)

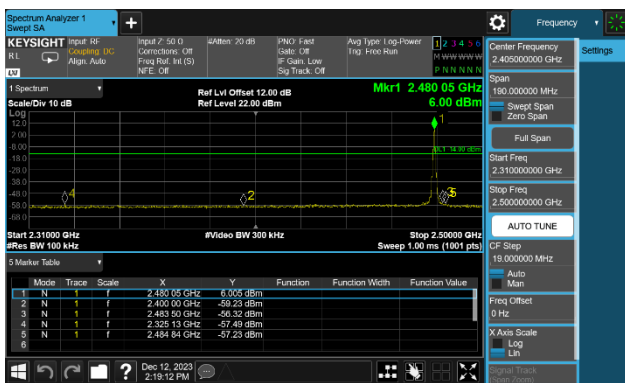


### CH78 (2480MHz) DH5(1Mbps)

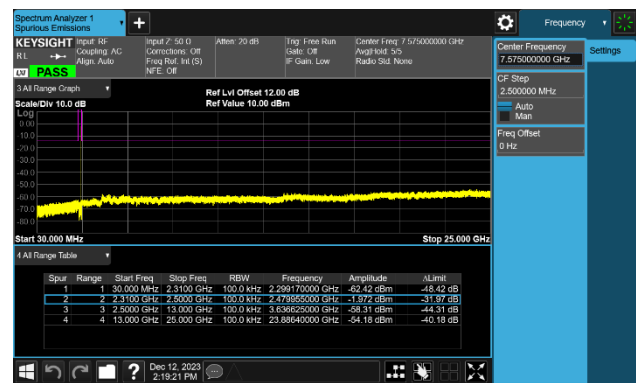


### CH00 (2402MHz) 3-DH5(3Mbps)

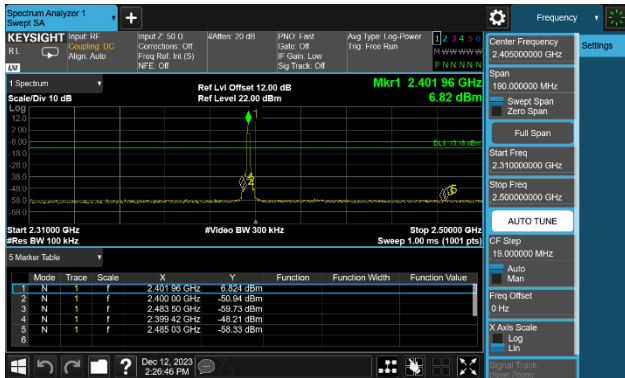


### CH00 (2402MHz) 3-DH5(3Mbps)

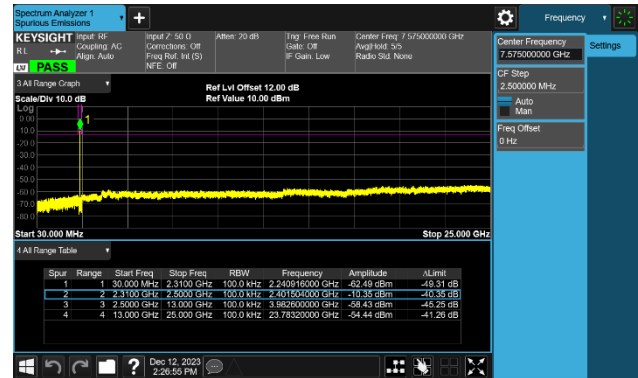


### CH39 (2441MHz) 3-DH5(3Mbps)

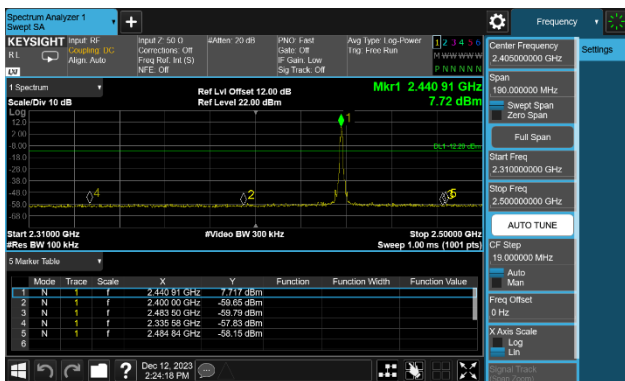


### CH39 (2441MHz) 3-DH5(3Mbps)

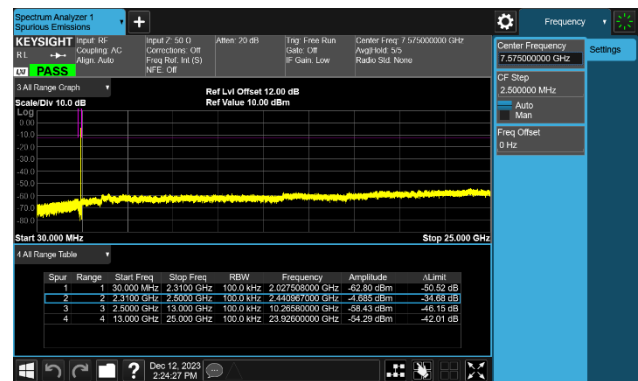

### CH78 (2480MHz) 3-DH5(3Mbps)

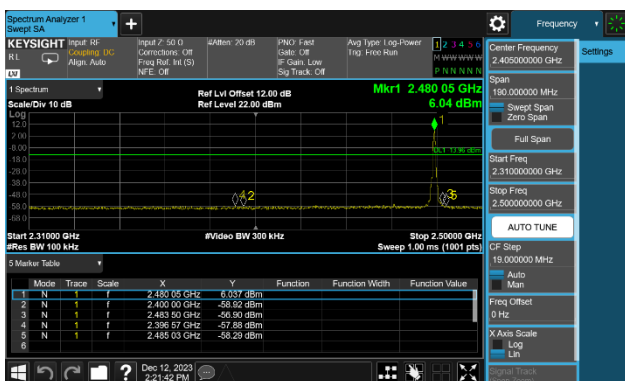

### CH78 (2480MHz) 3-DH5(3Mbps)

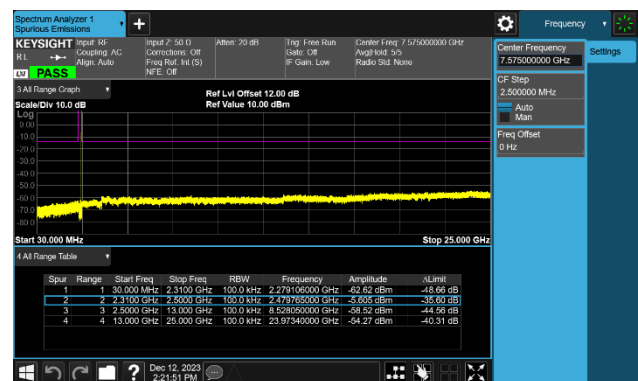

## 7.8. Radiated Spurious Emission Measurement

### 7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                         |                               |
|----------------------------------------|-------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[V/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)            | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)           | 30                            |
| 1.705 – 30                             | 30                      | 30                            |
| 30 – 88                                | 100                     | 3                             |
| 88 – 216                               | 150                     | 3                             |
| 216 – 960                              | 200                     | 3                             |
| Above 960                              | 500                     | 3                             |

### 7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

### 7.8.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 \* RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

**Average Field Strength Measurements**


- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- $VBW \geq 1/T$
- De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold
- Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.8.4. Test Setup


##### 9kHz ~ 30MHz Test Setup:

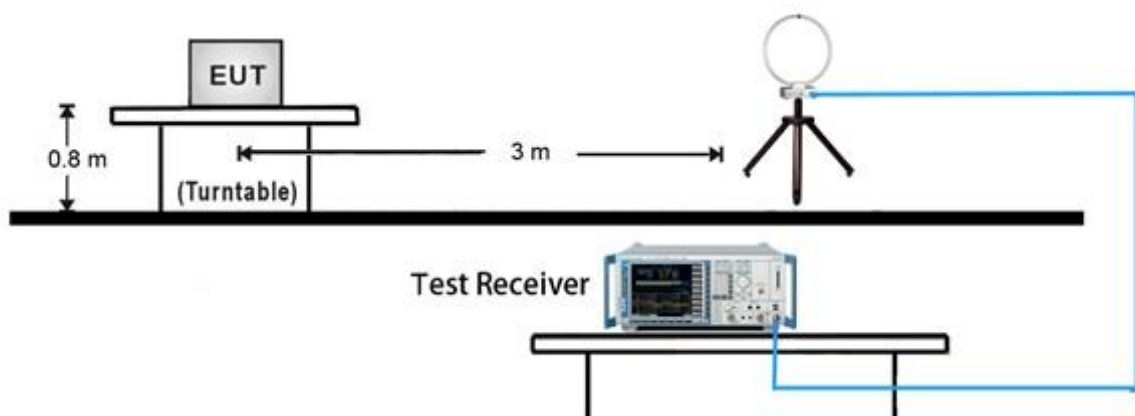


##### 30MHz ~ 1GHz Test Setup:

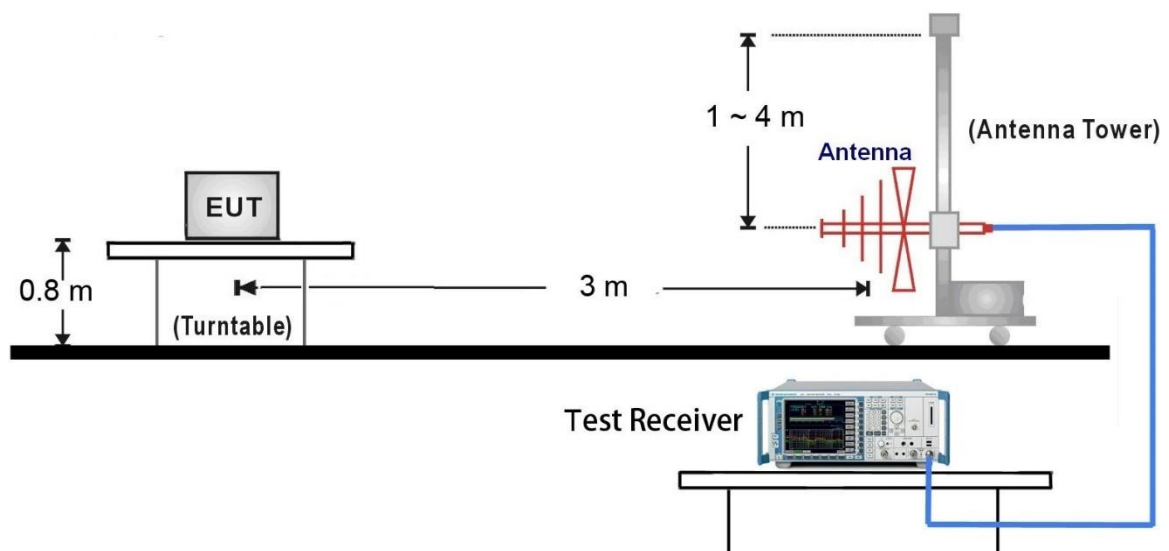

### 1GHz ~ 18GHz Test Setup:

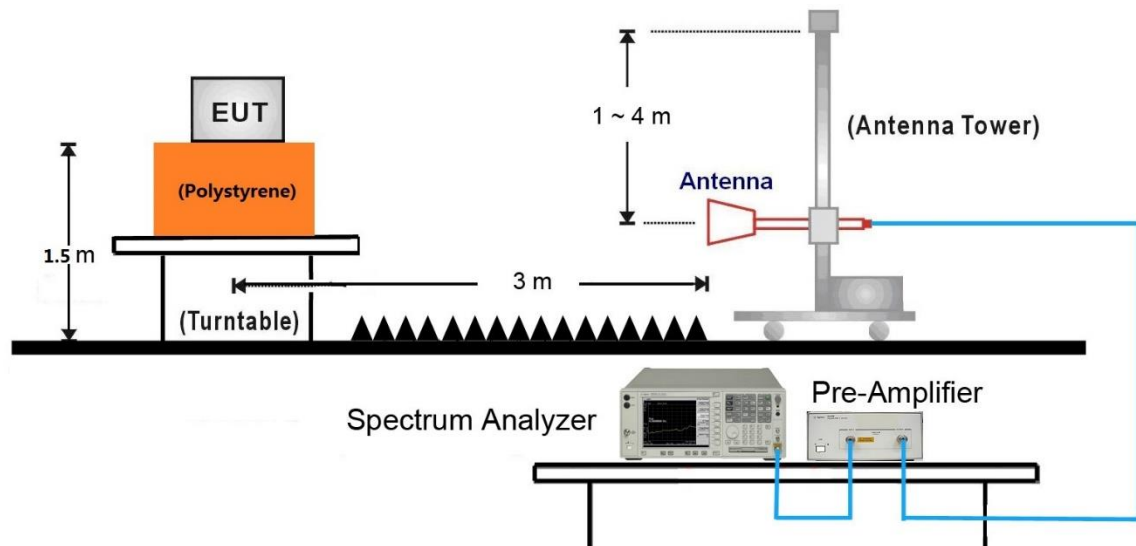


### 18GHz ~40GHz Test Setup:

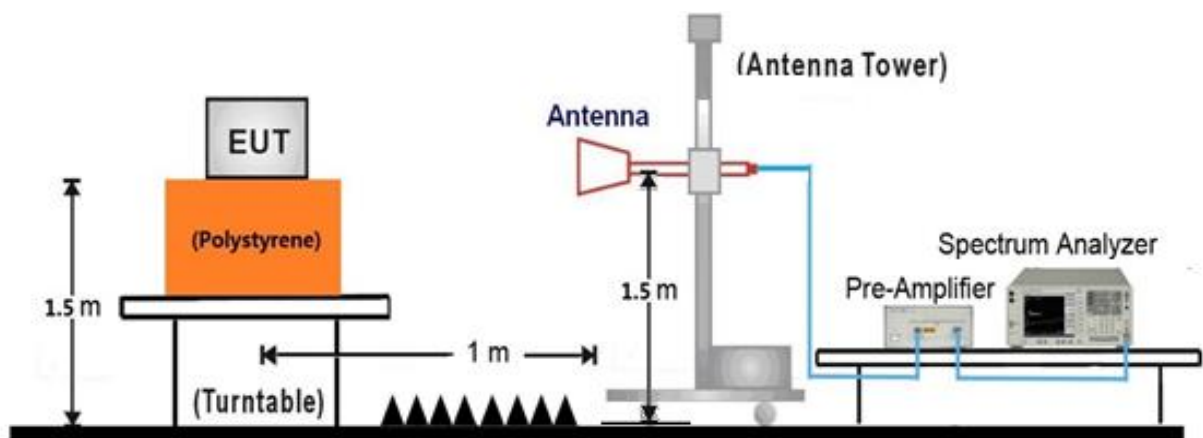

### 7.8.5. Test Result

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | VULB 9162                                            | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | By Notebook PC |

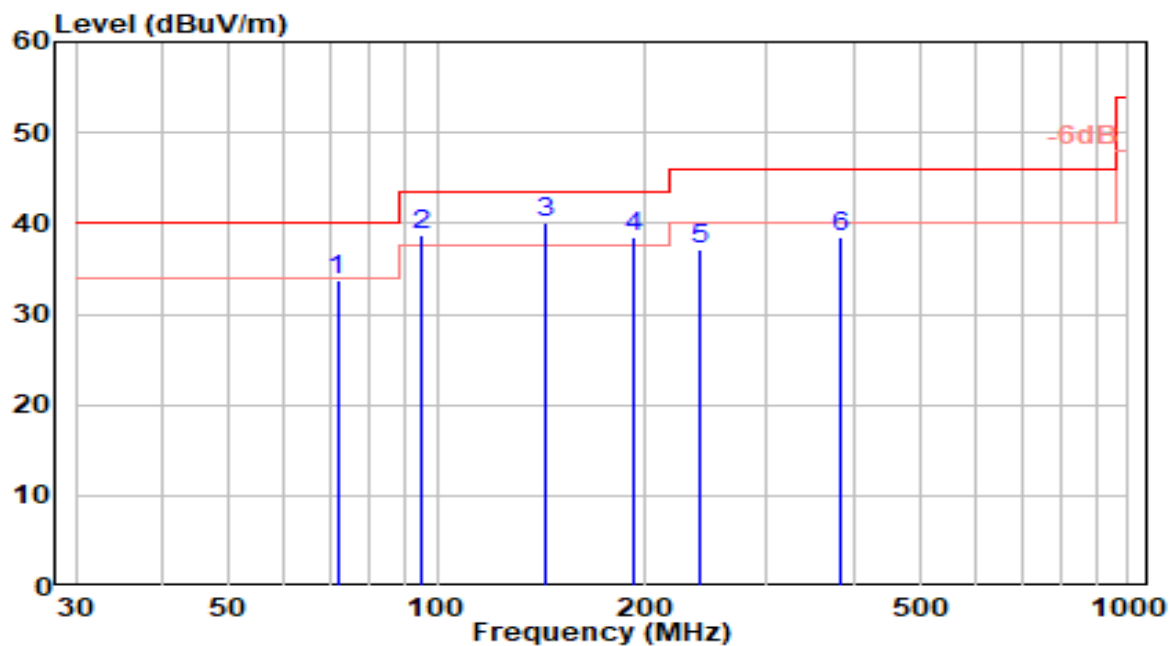


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 71.710          | 18.44          | 15.30      | 33.74                | -6.26       | 40.00          | 200         | 324         | QP                |
| 2  | 94.990          | 21.25          | 17.57      | 38.82                | -4.68       | 43.50          | 200         | 309         | QP                |
| 3  | * 143.490       | 25.25          | 14.88      | 40.14                | -3.36       | 43.50          | 150         | 286         | QP                |
| 4  | 191.990         | 20.93          | 17.58      | 38.51                | -4.99       | 43.50          | 150         | 17          | QP                |
| 5  | 239.520         | 17.81          | 19.35      | 37.16                | -8.84       | 46.00          | 104         | 360         | QP                |
| 6  | 383.080         | 15.57          | 23.03      | 38.60                | -7.40       | 46.00          | 100         | 275         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | VULB 9162                                            | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | By Notebook PC |

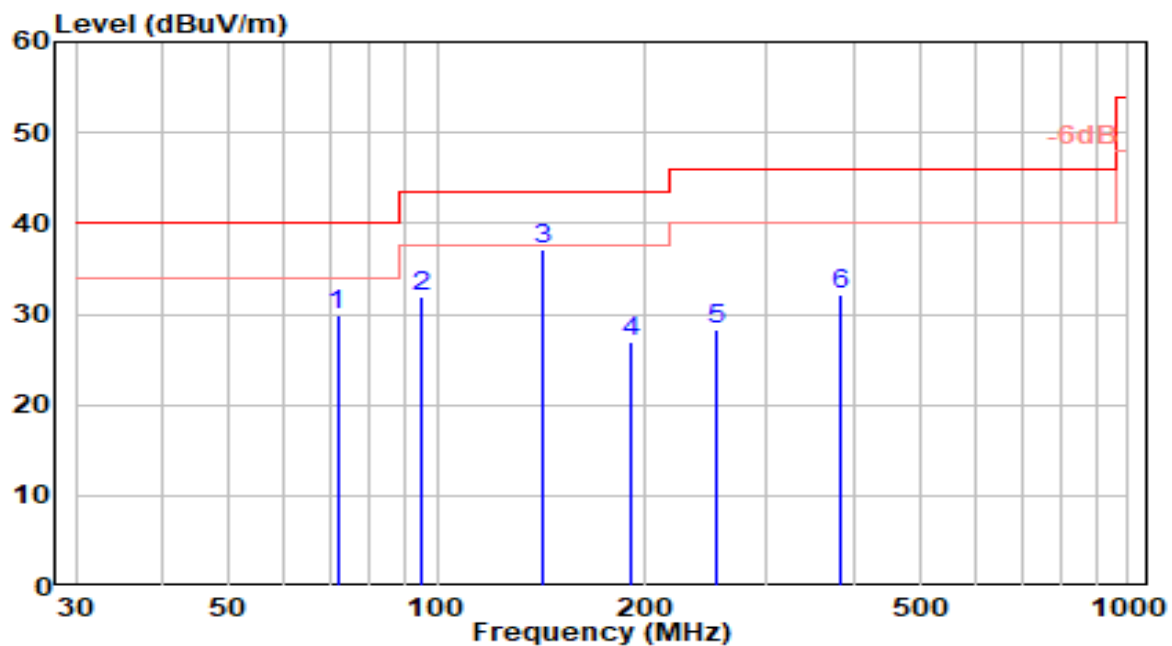


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 71.710          | 14.67          | 15.30      | 29.97                | -10.03      | 40.00          | 200         | 33          | QP                |
| 2  | 94.990          | 14.44          | 17.57      | 32.00                | -11.50      | 43.50          | 200         | 12          | QP                |
| 3  | * 142.520       | 22.29          | 14.84      | 37.14                | -6.36       | 43.50          | 200         | 0           | QP                |
| 4  | 191.020         | 9.45           | 17.53      | 26.98                | -16.52      | 43.50          | 200         | 327         | QP                |
| 5  | 253.100         | 8.32           | 19.93      | 28.26                | -17.74      | 46.00          | 150         | 360         | QP                |
| 6  | 384.050         | 9.18           | 23.05      | 32.23                | -13.77      | 46.00          | 200         | 338         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 00                                      | Test Voltage         | By Notebook PC |

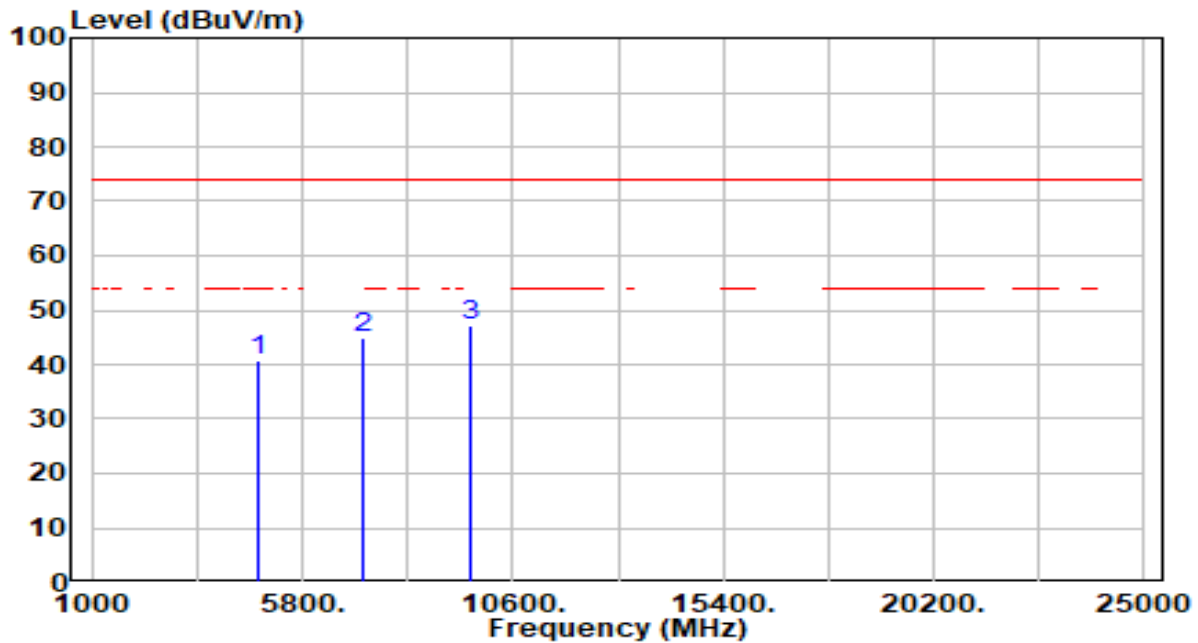


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 40.44          | 0.18       | 40.62                | -33.38      | 74.00          | 300         | 0           | Peak              |
| 2  | 7206.000        | 39.38          | 5.53       | 44.91                | -29.09      | 74.00          | 300         | 125         | Peak              |
| 3  | * 9608.000      | 41.89          | 5.29       | 47.17                | -26.83      | 74.00          | 300         | 97          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 00                                      | Test Voltage         | By Notebook PC |

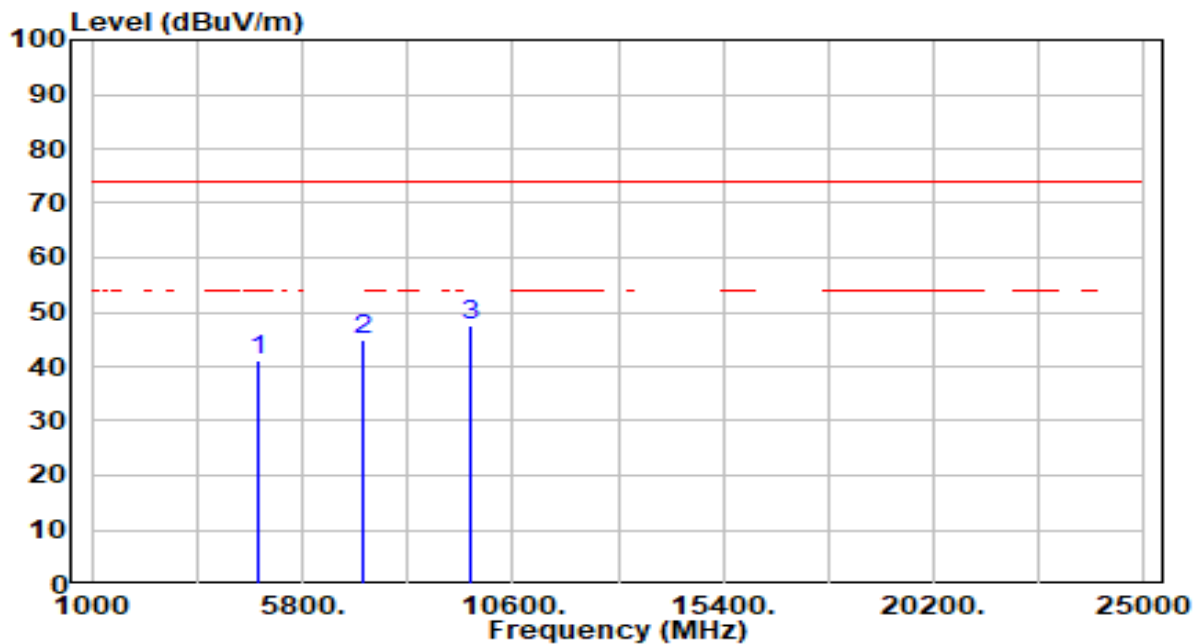


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 40.88          | 0.18       | 41.06                | -32.94      | 74.00          | 300         | 107         | Peak              |
| 2  | 7206.000        | 39.28          | 5.53       | 44.80                | -29.20      | 74.00          | 300         | 215         | Peak              |
| 3  | * 9608.000      | 42.10          | 5.29       | 47.39                | -26.61      | 74.00          | 300         | 326         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | By Notebook PC |

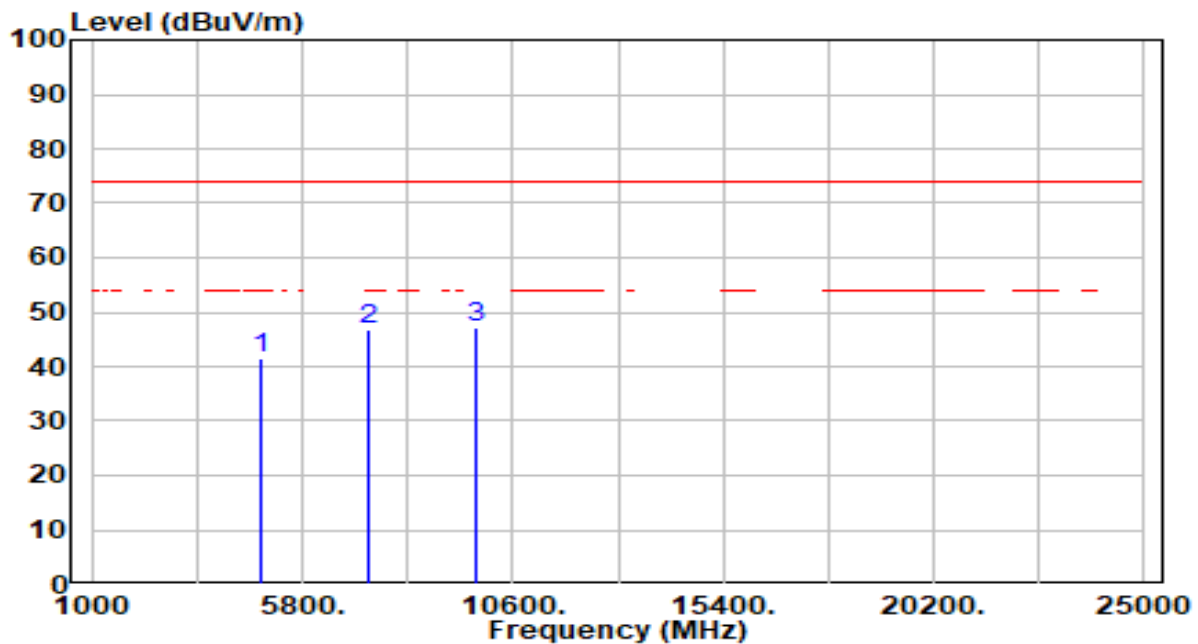


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 40.97          | 0.38       | 41.35                | -32.65      | 74.00          | 100         | 0           | Peak              |
| 2  | 7323.000        | 41.12          | 5.60       | 46.71                | -27.29      | 74.00          | 300         | 258         | Peak              |
| 3  | * 9764.000      | 41.90          | 5.35       | 47.25                | -26.75      | 74.00          | 300         | 333         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | By Notebook PC |

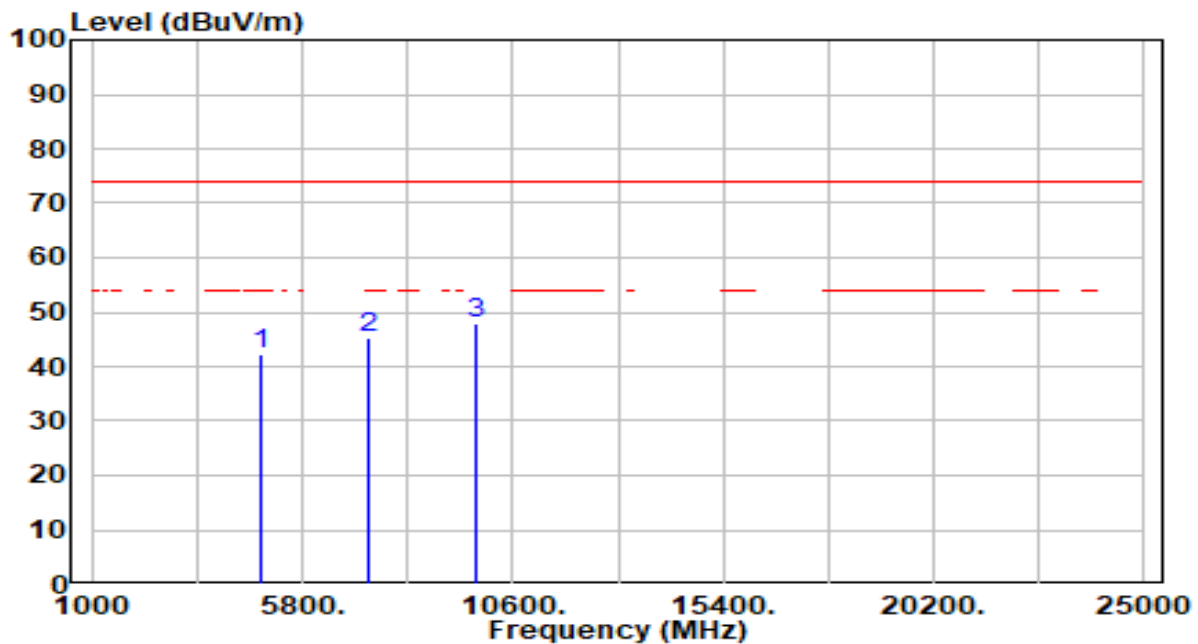


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 41.77          | 0.38       | 42.16                | -31.84      | 74.00          | 200         | 256         | Peak              |
| 2  | 7323.000        | 39.78          | 5.60       | 45.37                | -28.63      | 74.00          | 300         | 255         | Peak              |
| 3  | * 9764.000      | 42.44          | 5.35       | 47.79                | -26.21      | 74.00          | 100         | 148         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 78                                      | Test Voltage         | By Notebook PC |

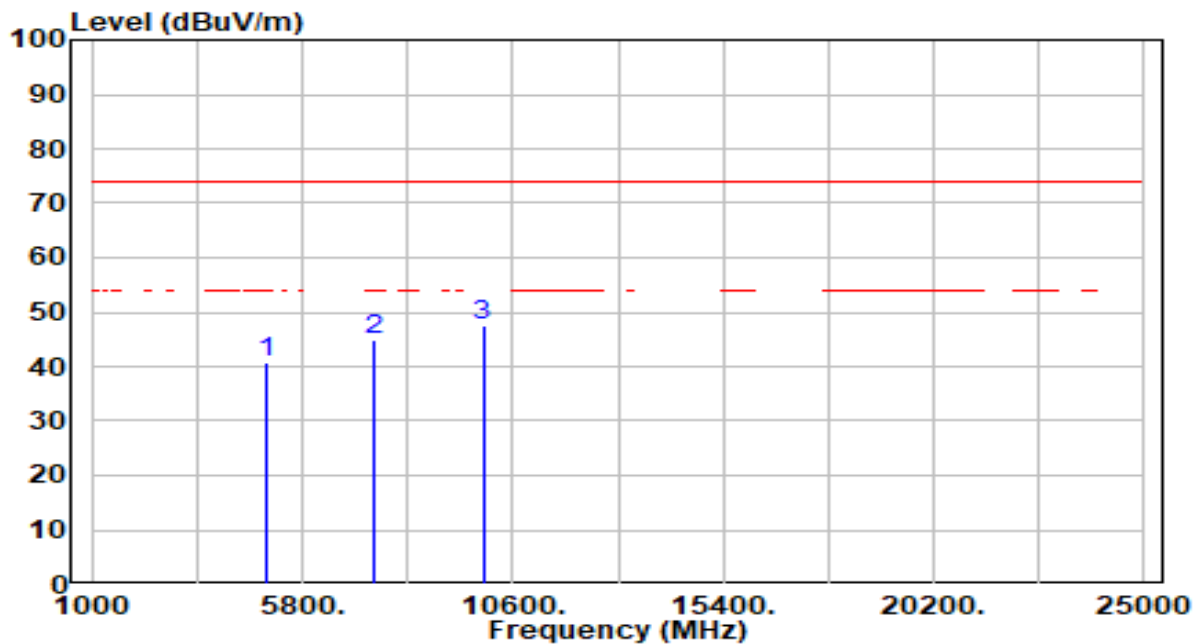


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 40.09          | 0.59       | 40.68                | -33.32      | 74.00          | 300         | 108         | Peak              |
| 2  | 7440.000        | 39.27          | 5.63       | 44.90                | -29.10      | 74.00          | 300         | 222         | Peak              |
| 3  | * 9920.000      | 41.98          | 5.42       | 47.40                | -26.60      | 74.00          | 300         | 105         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 78                                      | Test Voltage         | By Notebook PC |

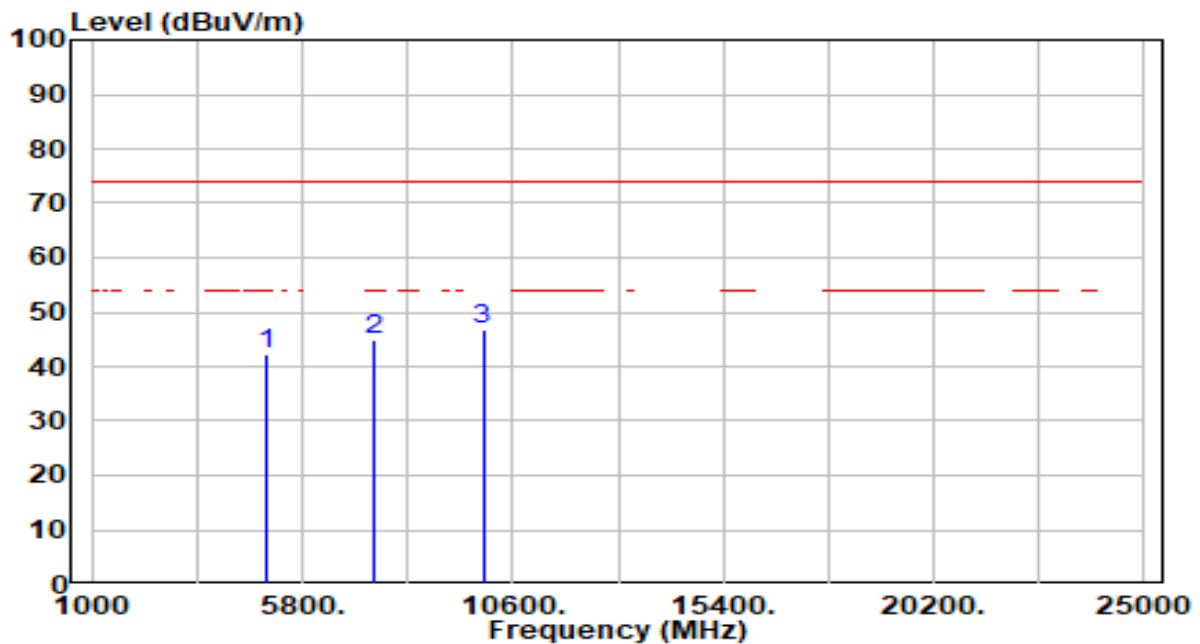


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 41.52          | 0.59       | 42.11                | -31.89      | 74.00          | 300         | 284         | Peak              |
| 2  | 7440.000        | 39.16          | 5.63       | 44.79                | -29.21      | 74.00          | 300         | 31          | Peak              |
| 3  | * 9920.000      | 41.56          | 5.42       | 46.98                | -27.02      | 74.00          | 300         | 182         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 00                                     | Test Voltage         | By Notebook PC |

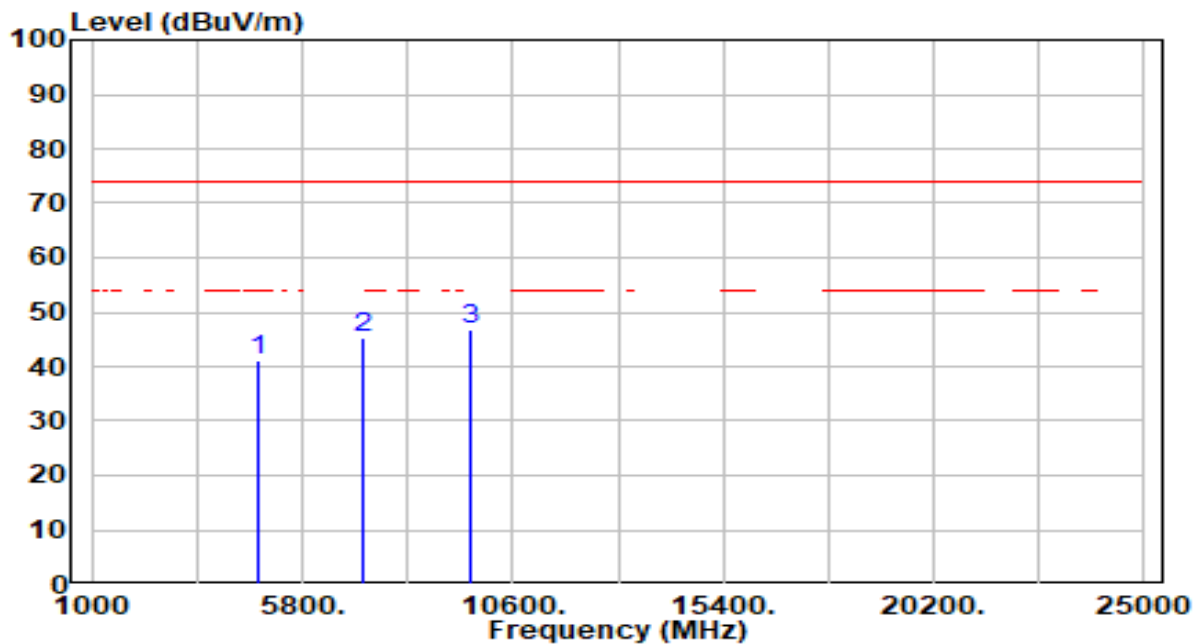


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 40.78          | 0.18       | 40.96                | -33.04      | 74.00          | 300         | 257         | Peak              |
| 2  | 7206.000        | 39.76          | 5.53       | 45.29                | -28.71      | 74.00          | 300         | 128         | Peak              |
| 3  | * 9608.000      | 41.34          | 5.29       | 46.62                | -27.38      | 74.00          | 300         | 320         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 00                                     | Test Voltage         | By Notebook PC |

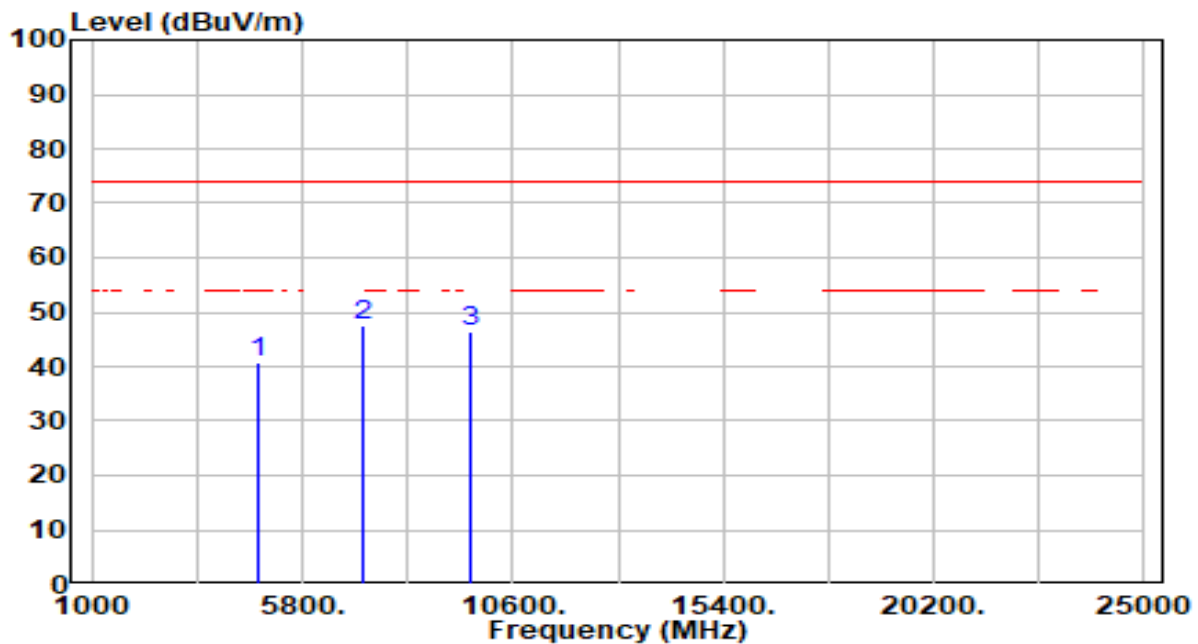


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4804.000        | 40.61          | 0.18       | 40.79                | -33.21      | 74.00          | 300         | 220         | Peak              |
| 2  | * 7206.000      | 41.99          | 5.53       | 47.51                | -26.49      | 74.00          | 300         | 252         | Peak              |
| 3  | 9608.000        | 41.30          | 5.29       | 46.59                | -27.41      | 74.00          | 300         | 223         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 39                                     | Test Voltage         | By Notebook PC |

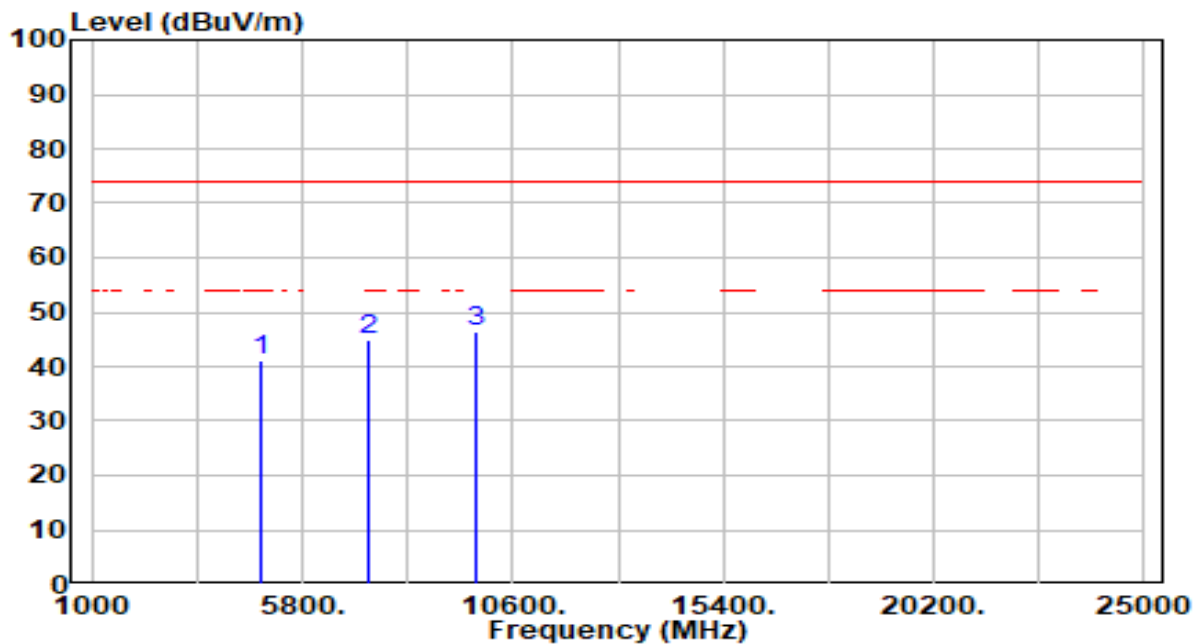


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 40.68          | 0.38       | 41.06                | -32.94      | 74.00          | 300         | 114         | Peak              |
| 2  | 7323.000        | 39.37          | 5.60       | 44.97                | -29.03      | 74.00          | 300         | 360         | Peak              |
| 3  | * 9764.000      | 41.16          | 5.35       | 46.51                | -27.49      | 74.00          | 300         | 268         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 39                                     | Test Voltage         | By Notebook PC |

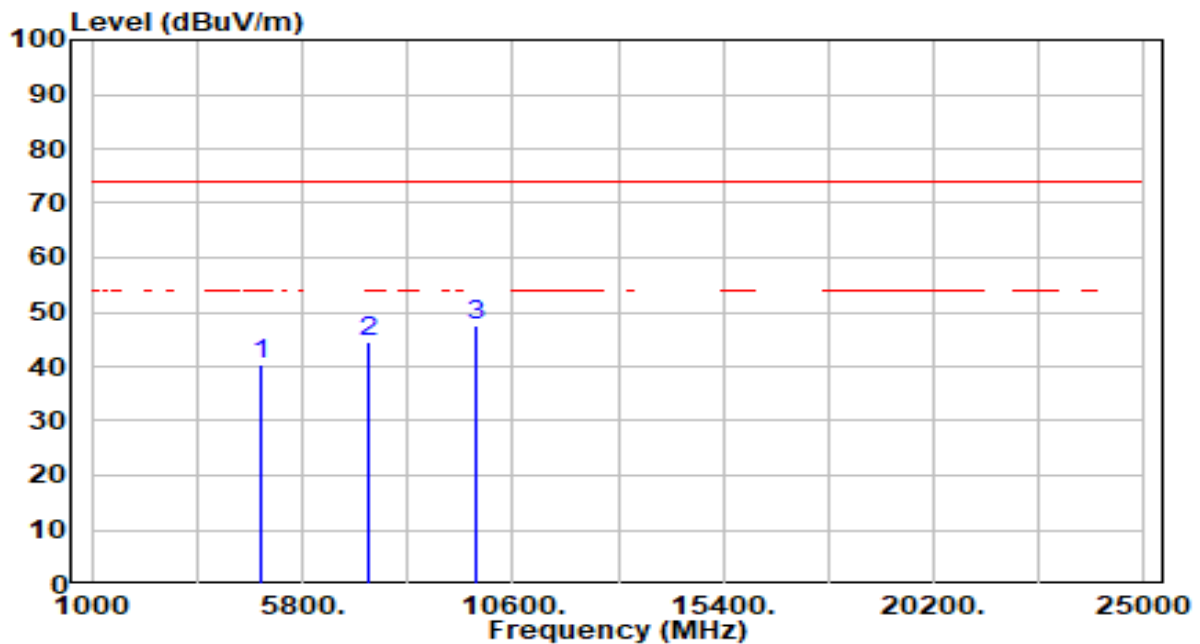


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4882.000        | 40.07          | 0.38       | 40.45                | -33.55      | 74.00          | 300         | 175         | Peak              |
| 2  | 7323.000        | 38.82          | 5.60       | 44.41                | -29.59      | 74.00          | 300         | 252         | Peak              |
| 3  | * 9764.000      | 42.16          | 5.35       | 47.51                | -26.49      | 74.00          | 300         | 23          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 78                                     | Test Voltage         | By Notebook PC |

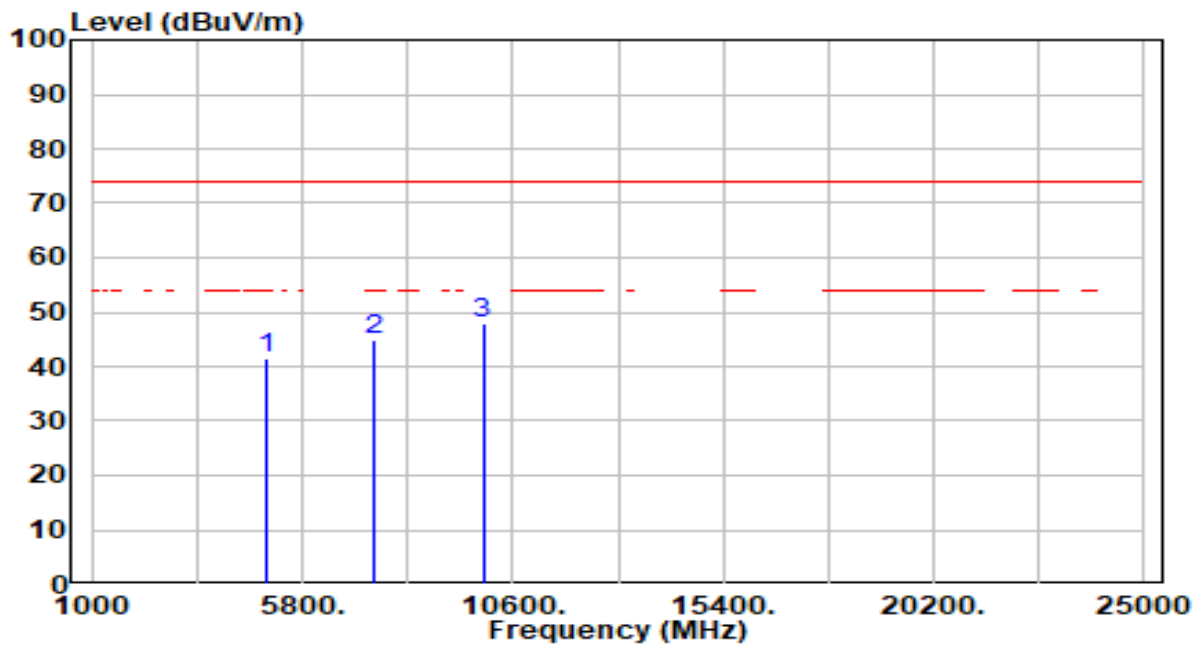


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 40.99          | 0.59       | 41.57                | -32.43      | 74.00          | 300         | 168         | Peak              |
| 2  | 7440.000        | 39.23          | 5.63       | 44.86                | -29.14      | 74.00          | 300         | 114         | Peak              |
| 3  | * 9920.000      | 42.59          | 5.42       | 48.01                | -25.99      | 74.00          | 300         | 117         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E & BBHA 9170                                  | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 78                                     | Test Voltage         | By Notebook PC |

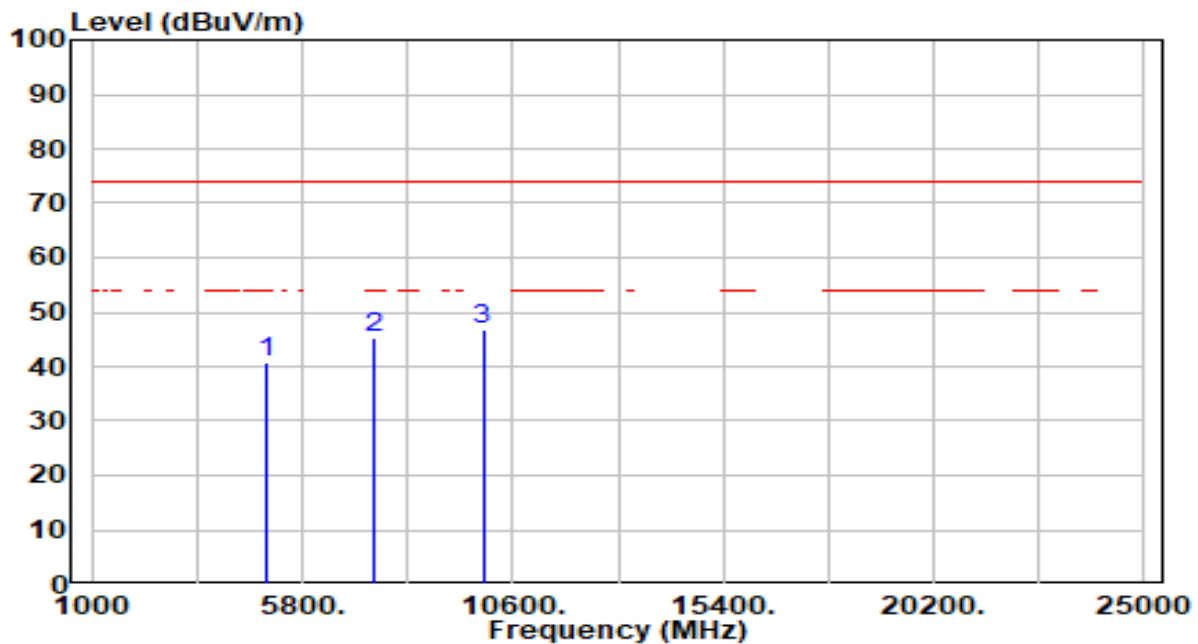

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4960.000        | 40.17          | 0.59       | 40.75                | -33.25      | 74.00          | 300         | 81          | Peak              |
| 2  | 7440.000        | 39.53          | 5.63       | 45.16                | -28.84      | 74.00          | 300         | 220         | Peak              |
| 3  | * 9920.000      | 41.50          | 5.42       | 46.91                | -27.09      | 74.00          | 300         | 193         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. Radiated Restricted Band Edge Measurement

### 7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                         |                               |
|----------------------------------------|-------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[V/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)            | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)           | 30                            |
| 1.705 – 30                             | 30                      | 30                            |
| 30 – 88                                | 100                     | 3                             |
| 88 – 216                               | 150                     | 3                             |
| 216 – 960                              | 200                     | 3                             |
| Above 960                              | 500                     | 3                             |

### 7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

### 7.9.3. Test Setting

#### Peak Field Strength Measurements

8. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
9. RBW = as specified in Table 1
10. VBW = 3 \* RBW
11. Detector = peak
12. Sweep time = auto couple
13. Trace mode = max hold
14. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

**Average Field Strength Measurements**


9. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
10. RBW = 1MHz
11. VBW  $\geq 1/T$
12. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
13. Detector = Peak
14. Sweep time = auto
15. Trace mode = max hold
16. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.9.4. Test Setup

##### 1GHz ~ 18GHz Test Setup:

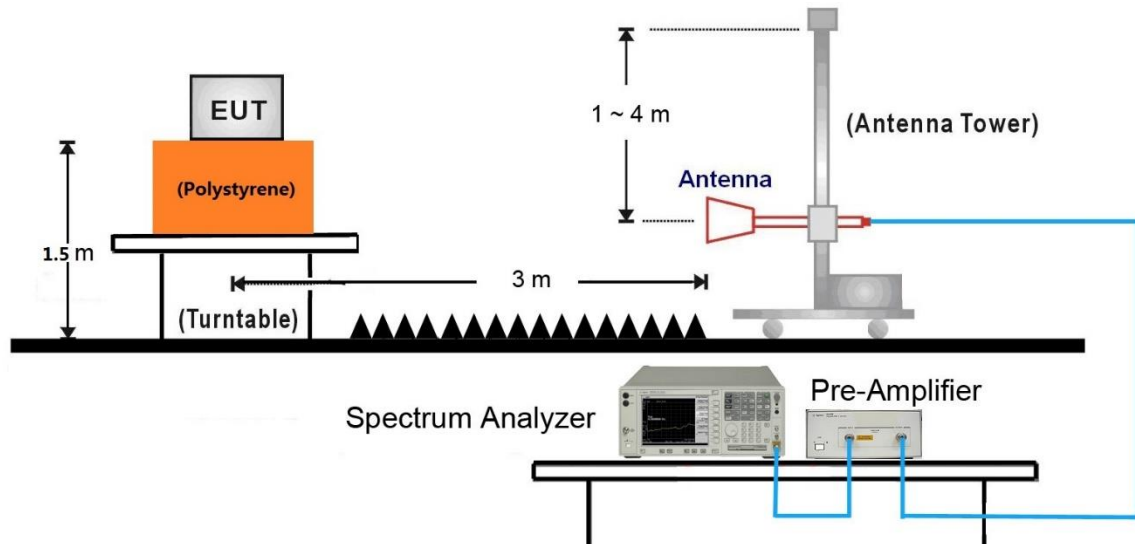


##### 18GHz ~40GHz Test Setup:

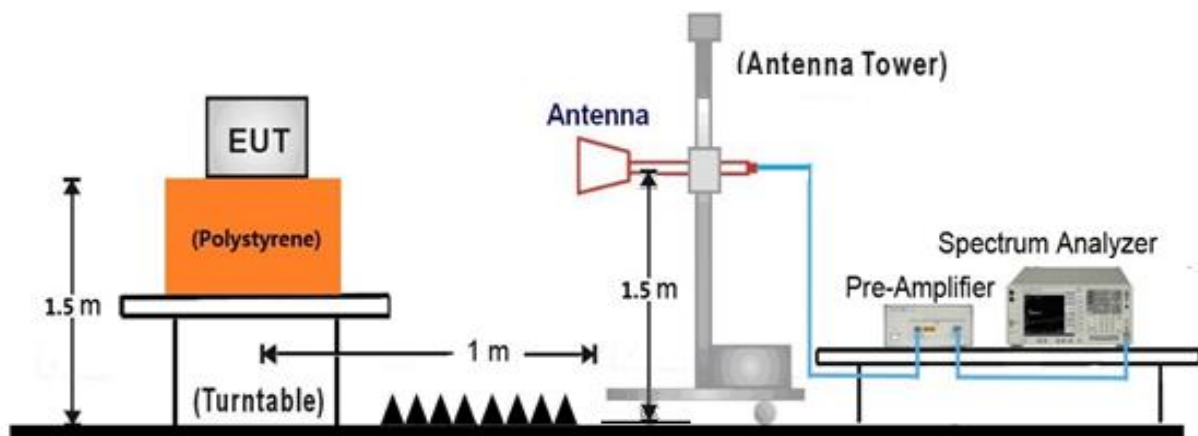

### 7.9.5. Test Result

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 00                                      | Test Voltage         | By Notebook PC |

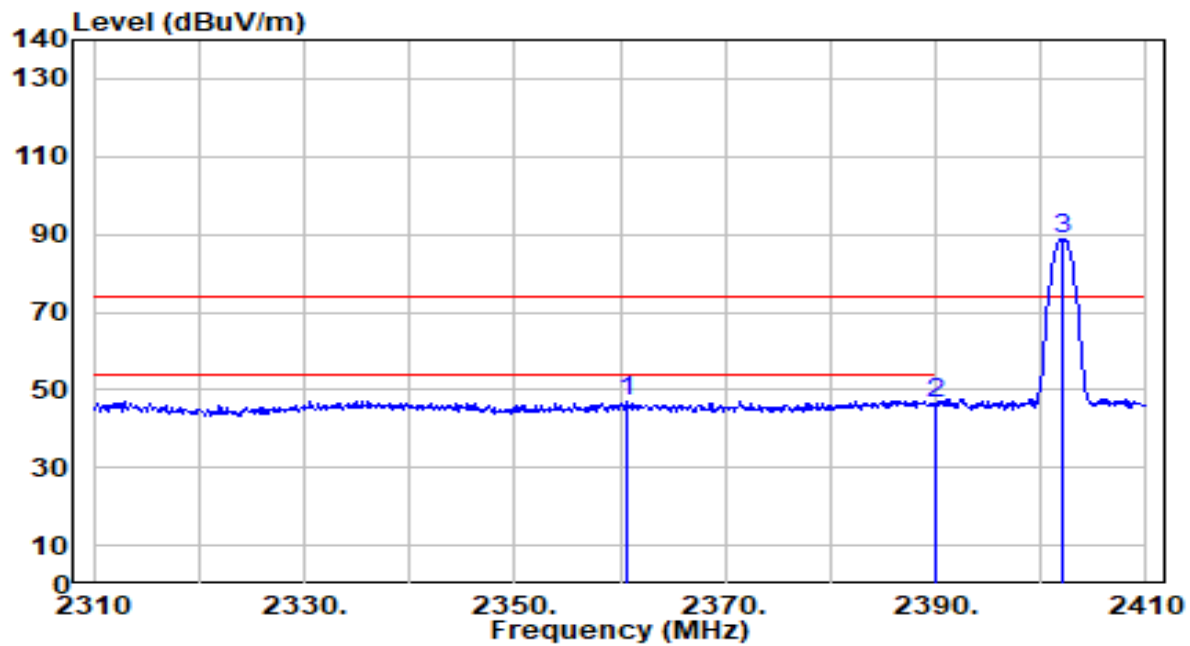


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2360.600      | 52.47          | -5.20      | 47.27                | -26.73      | 74.00          | 100         | 269         | Peak              |
| 2  | 2390.000        | 51.40          | -5.14      | 46.25                | -27.75      | 74.00          | 100         | 269         | Peak              |
| 3  | 2402.100        | 93.95          | -5.13      | 88.83                | N/A         | N/A            | 100         | 269         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 00                                      | Test Voltage         | By Notebook PC |

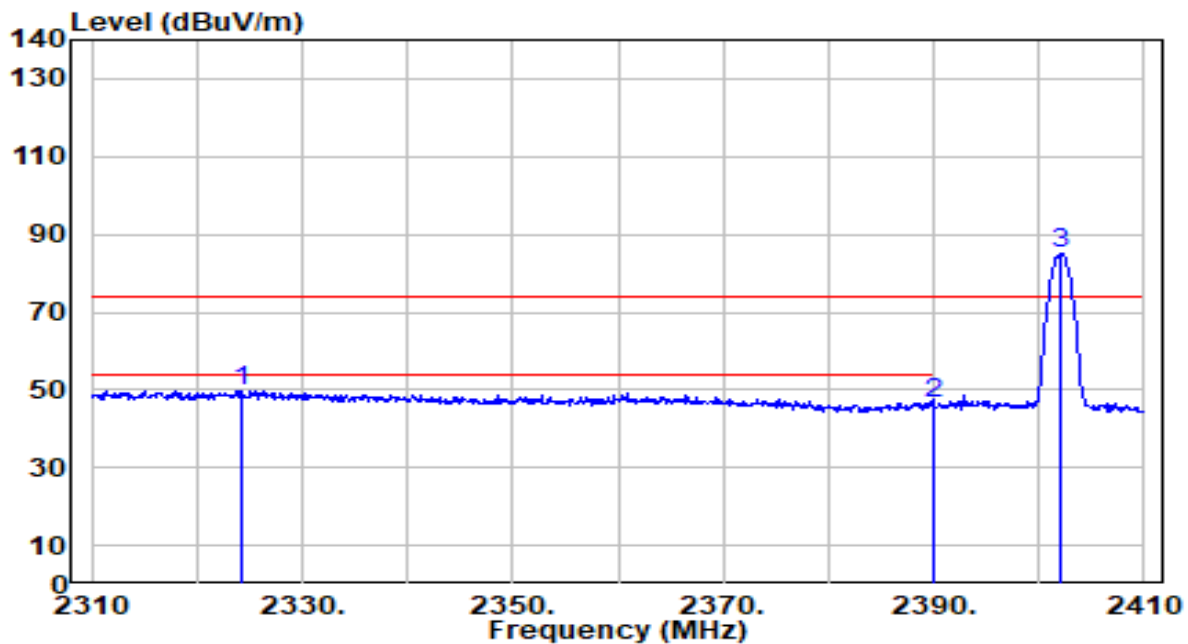


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2324.300        | 55.18          | -5.27      | 49.91                | -24.09      | 74.00          | 100         | 192         | Peak              |
| 2  |   | 2390.000        | 51.38          | -5.14      | 46.24                | -27.76      | 74.00          | 100         | 192         | Peak              |
| 3  |   | 2402.100        | 90.08          | -5.13      | 84.95                | N/A         | N/A            | 100         | 192         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 78                                      | Test Voltage         | By Notebook PC |

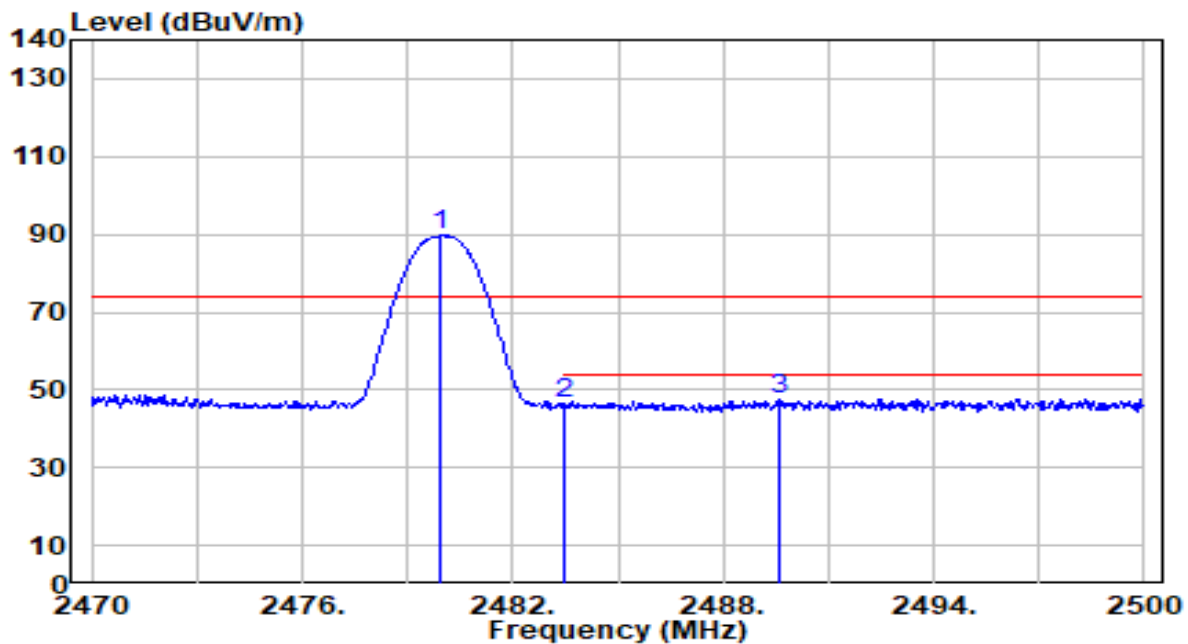


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2479.960        | 94.73          | -5.10      | 89.64                | N/A         | N/A            | 100         | 269         | Peak              |
| 2  | 2483.500        | 51.77          | -5.10      | 46.67                | -27.33      | 74.00          | 100         | 269         | Peak              |
| 3  | * 2489.620      | 52.83          | -5.09      | 47.74                | -26.26      | 74.00          | 100         | 269         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_DH5_CH 78                                      | Test Voltage         | By Notebook PC |

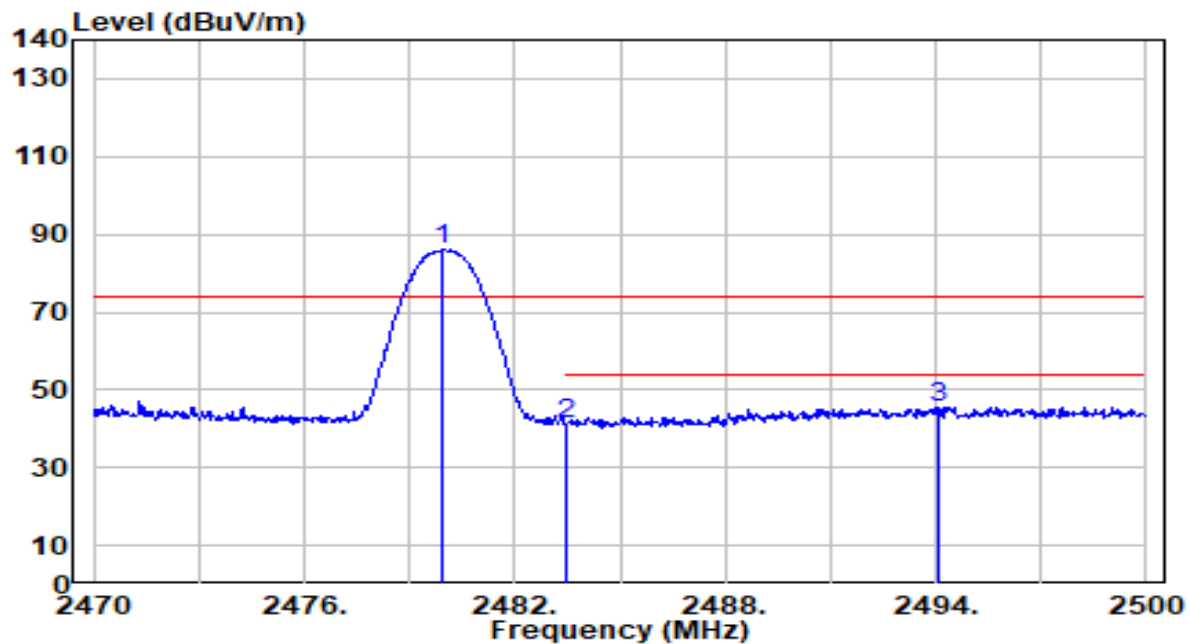


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2479.960        | 91.02          | -5.10      | 85.93                | N/A         | N/A            | 100         | 193         | Peak              |
| 2  | 2483.500        | 46.39          | -5.10      | 41.29                | -32.71      | 74.00          | 100         | 193         | Peak              |
| 3  | * 2494.090      | 50.70          | -5.09      | 45.61                | -28.39      | 74.00          | 100         | 193         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 00                                     | Test Voltage         | By Notebook PC |

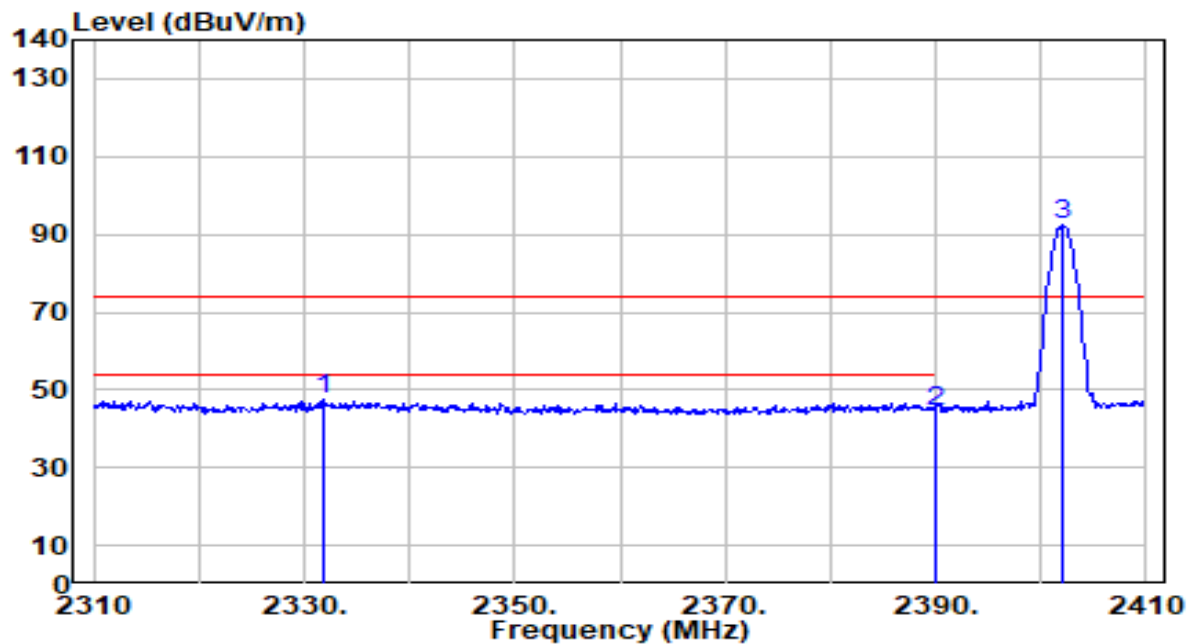


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2331.800        | 52.68          | -5.25      | 47.43                | -26.57      | 74.00          | 100         | 268         | Peak              |
| 2  |   | 2390.000        | 49.66          | -5.14      | 44.52                | -29.48      | 74.00          | 100         | 268         | Peak              |
| 3  |   | 2402.000        | 97.33          | -5.13      | 92.20                | N/A         | N/A            | 100         | 268         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 00                                     | Test Voltage         | By Notebook PC |

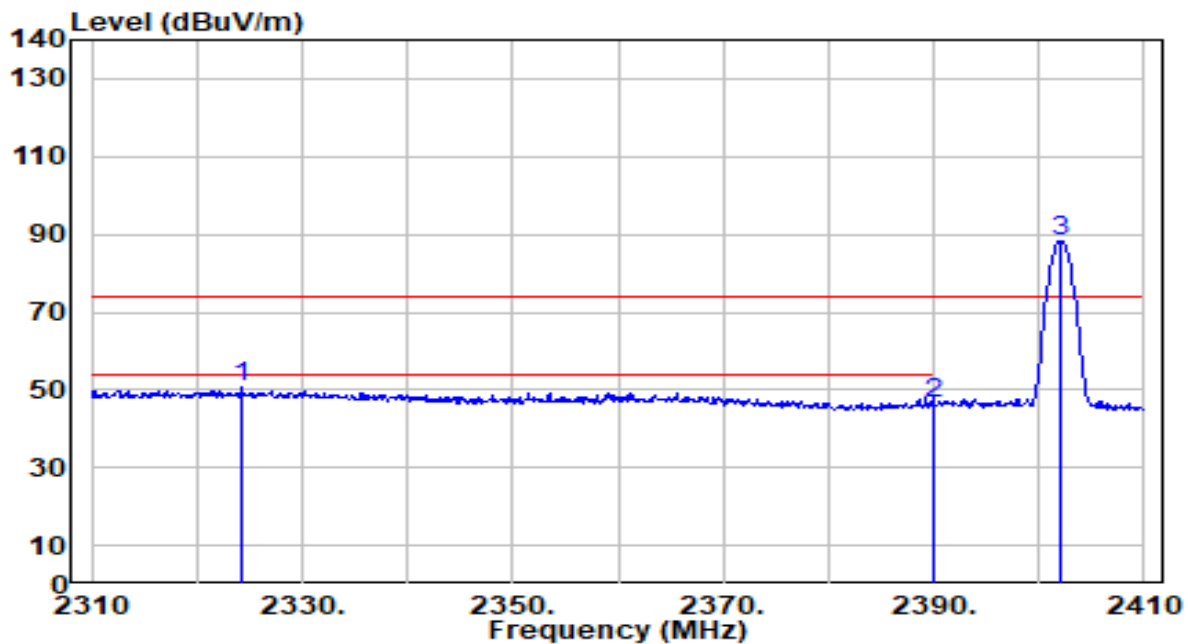


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2324.300        | 55.97          | -5.27      | 50.70                | -23.30      | 74.00          | 100         | 192         | Peak              |
| 2  |   | 2390.000        | 51.79          | -5.14      | 46.65                | -27.35      | 74.00          | 100         | 192         | Peak              |
| 3  |   | 2402.000        | 93.39          | -5.13      | 88.26                | N/A         | N/A            | 100         | 192         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C /61%      |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 78                                     | Test Voltage         | By Notebook PC |

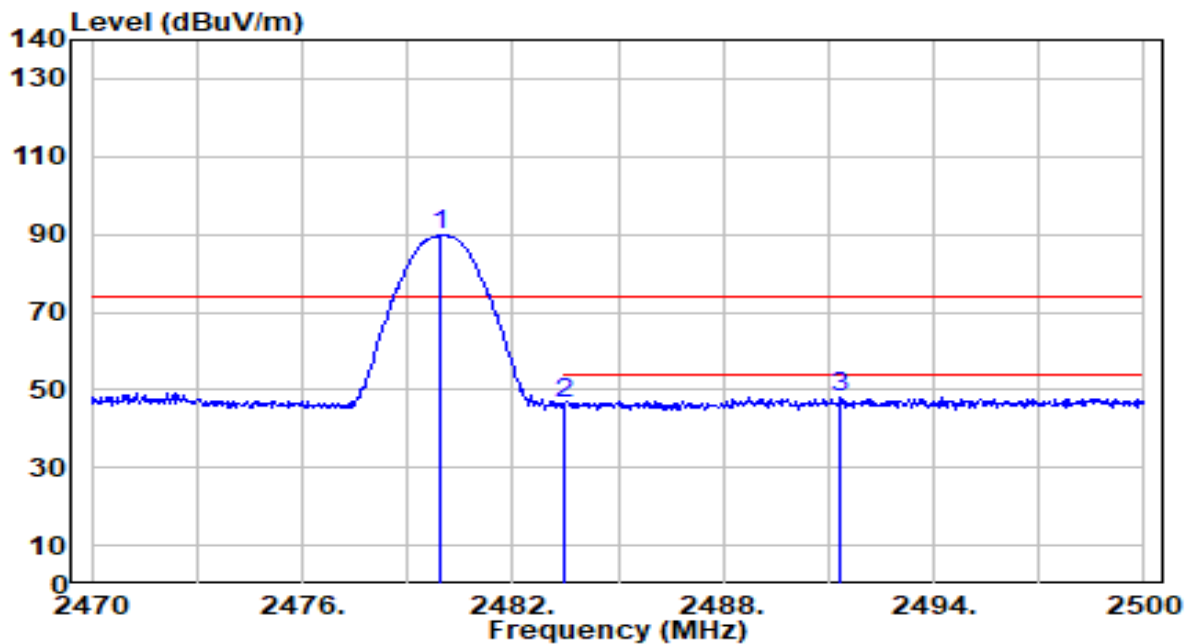


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2479.960        | 94.77          | -5.10      | 89.67                | N/A         | N/A            | 100         | 271         | Peak              |
| 2  | 2483.500        | 51.62          | -5.10      | 46.53                | -27.47      | 74.00          | 100         | 271         | Peak              |
| 3  | * 2491.360      | 52.98          | -5.09      | 47.88                | -26.12      | 74.00          | 100         | 271         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                |
|-----------|------------------------------------------------------|----------------------|----------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-12     |
| Factor    | DRH18-E                                              | Temp. / Humidity     | 22°C / 61%     |
| Polarity  | Vertical                                             | Site / Test Engineer | AC2 / Marvin   |
| Test Mode | BT_TX_3DH5_CH 78                                     | Test Voltage         | By Notebook PC |

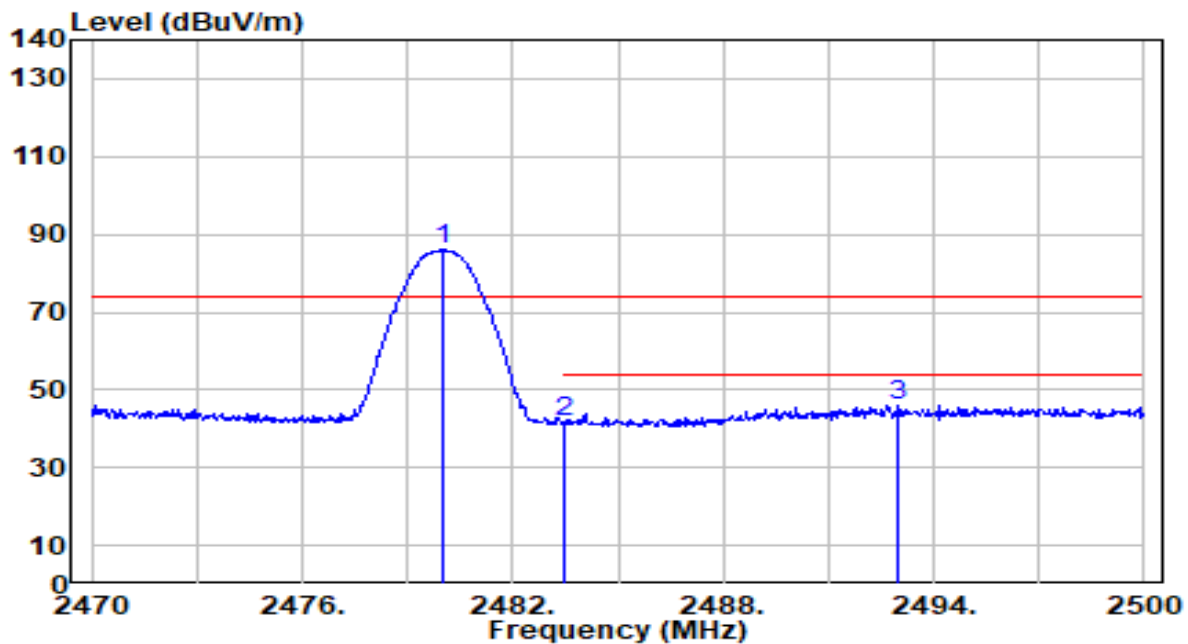

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2479.990        | 90.97          | -5.10      | 85.87                | N/A         | N/A            | 100         | 193         | Peak              |
| 2  | 2483.500        | 46.82          | -5.10      | 41.72                | -32.28      | 74.00          | 100         | 193         | Peak              |
| 3  | * 2492.980      | 51.24          | -5.09      | 46.15                | -27.85      | 74.00          | 100         | 193         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.10. AC Conducted Emissions Measurement


### 7.10.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits |                 |                      |
|---------------------------------------------------------|-----------------|----------------------|
| Frequency (MHz)                                         | QP (dB $\mu$ V) | Average (dB $\mu$ V) |
| 0.15 - 0.50                                             | 66 - 56         | 56 - 46              |
| 0.50 - 5.0                                              | 56              | 46                   |
| 5.0 - 30                                                | 60              | 50                   |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.10.2. Test Setup

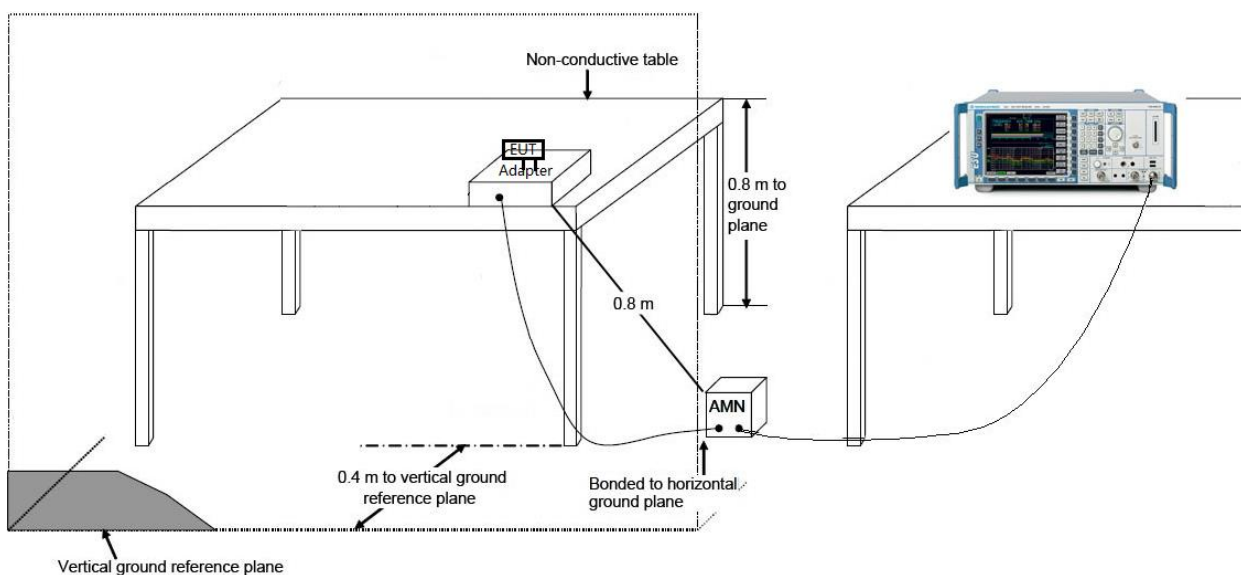

### 7.10.3. Test Result

|           |                                                      |                      |              |
|-----------|------------------------------------------------------|----------------------|--------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-13   |
| Factor    | CE_ENV216-L1 (Filter ON)                             | Temp. / Humidity     | 22.2°C / 53% |
| Polarity  | Line1                                                | Site / Test Engineer | SR2 / Bob    |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | AC 120V/60Hz |

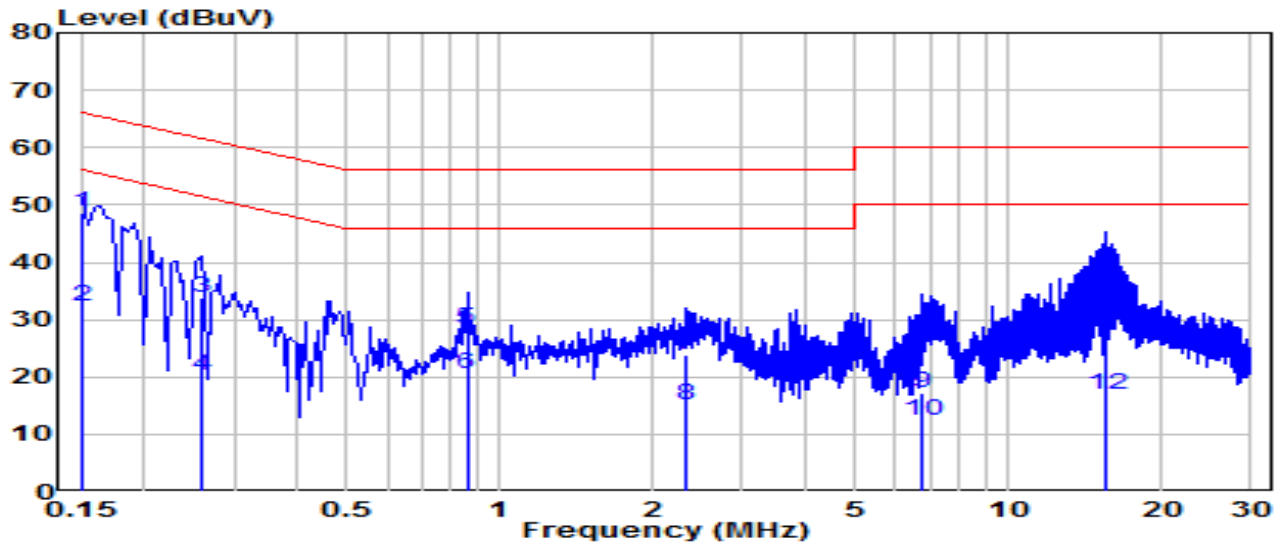


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.150           | 39.12          | 9.62     | 48.74              | -17.26      | 66.00        | QP                |
| 2  | * | 0.150           | 22.57          | 9.62     | 32.19              | -23.81      | 56.00        | Average           |
| 3  |   | 0.258           | 24.11          | 9.63     | 33.74              | -27.76      | 61.50        | QP                |
| 4  |   | 0.258           | 10.62          | 9.63     | 20.25              | -31.25      | 51.50        | Average           |
| 5  |   | 0.861           | 18.61          | 9.66     | 28.27              | -27.73      | 56.00        | QP                |
| 6  |   | 0.861           | 10.79          | 9.66     | 20.45              | -25.55      | 46.00        | Average           |
| 7  |   | 2.323           | 14.13          | 9.70     | 23.82              | -32.18      | 56.00        | QP                |
| 8  |   | 2.323           | 5.41           | 9.70     | 15.11              | -30.89      | 46.00        | Average           |
| 9  |   | 6.751           | 7.28           | 9.79     | 17.06              | -42.94      | 60.00        | QP                |
| 10 |   | 6.751           | 2.46           | 9.79     | 12.24              | -37.76      | 50.00        | Average           |
| 11 |   | 15.646          | 19.97          | 9.90     | 29.86              | -30.14      | 60.00        | QP                |
| 12 |   | 15.646          | 7.14           | 9.90     | 17.03              | -32.97      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                                      |                      |              |
|-----------|------------------------------------------------------|----------------------|--------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-13   |
| Factor    | CE_ENV216-N (Filter ON)                              | Temp. / Humidity     | 22.2°C /53%  |
| Polarity  | Neutral                                              | Site / Test Engineer | SR2 / Bob    |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | AC 120V/60Hz |

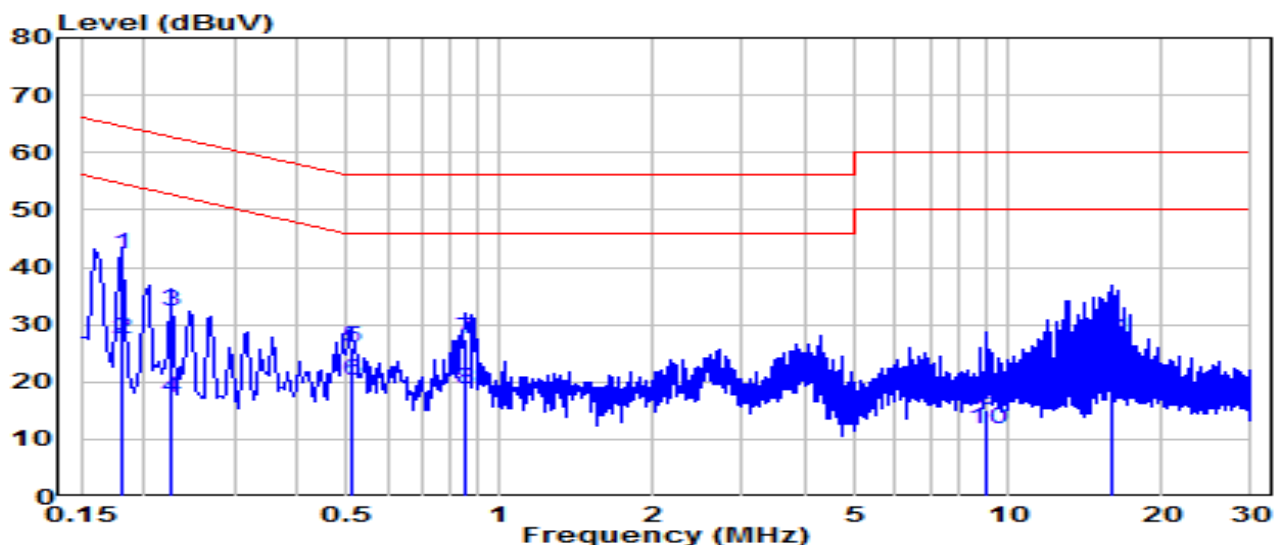

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.181           | 32.78          | 9.62     | 42.40              | -22.02      | 64.42        | QP                |
| 2  | * | 0.181           | 17.92          | 9.62     | 27.54              | -26.87      | 54.42        | Average           |
| 3  |   | 0.226           | 22.74          | 9.62     | 32.36              | -30.21      | 62.58        | QP                |
| 4  |   | 0.226           | 7.54           | 9.62     | 17.17              | -35.41      | 52.58        | Average           |
| 5  |   | 0.510           | 16.43          | 9.64     | 26.07              | -29.93      | 56.00        | QP                |
| 6  |   | 0.510           | 10.58          | 9.64     | 20.22              | -25.78      | 46.00        | Average           |
| 7  |   | 0.856           | 17.92          | 9.66     | 27.58              | -28.42      | 56.00        | QP                |
| 8  |   | 0.856           | 8.95           | 9.66     | 18.61              | -27.39      | 46.00        | Average           |
| 9  |   | 9.073           | 5.16           | 9.85     | 15.01              | -44.99      | 60.00        | QP                |
| 10 |   | 9.073           | 1.86           | 9.85     | 11.70              | -38.30      | 50.00        | Average           |
| 11 |   | 15.939          | 17.39          | 9.94     | 27.33              | -32.67      | 60.00        | QP                |
| 12 |   | 15.939          | 7.47           | 9.94     | 17.42              | -32.58      | 50.00        | Average           |


Note:

1. " \*", means this data is the worst emission level.

2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                                      |                      |              |
|-----------|------------------------------------------------------|----------------------|--------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-13   |
| Factor    | CE_ENV216-L1 (Filter ON)                             | Temp. / Humidity     | 22.2°C /53%  |
| Polarity  | Line1                                                | Site / Test Engineer | SR2 / Bob    |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | AC 240V/60Hz |

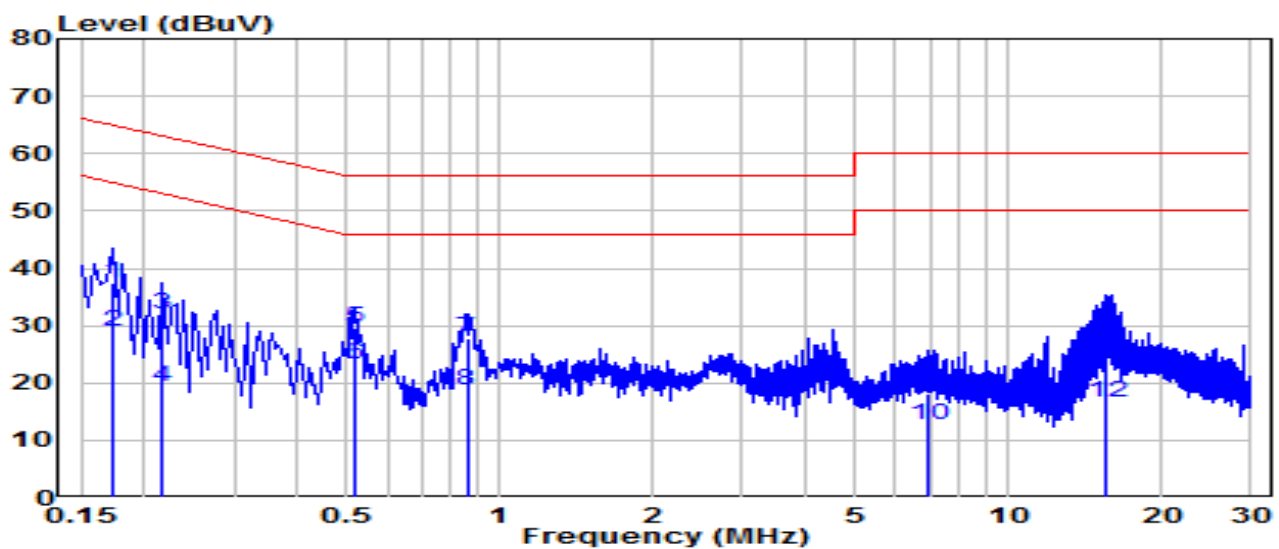

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  |   | 0.172           | 27.77          | 9.62     | 37.39              | -27.45      | 64.84        | QP                |
| 2  |   | 0.172           | 19.45          | 9.62     | 29.07              | -25.77      | 54.84        | Average           |
| 3  |   | 0.217           | 22.40          | 9.62     | 32.03              | -30.89      | 62.91        | QP                |
| 4  |   | 0.217           | 9.56           | 9.62     | 19.18              | -33.73      | 52.91        | Average           |
| 5  | * | 0.519           | 19.93          | 9.64     | 29.57              | -26.43      | 56.00        | QP                |
| 6  | * | 0.519           | 13.49          | 9.64     | 23.13              | -22.87      | 46.00        | Average           |
| 7  |   | 0.861           | 18.22          | 9.66     | 27.88              | -28.12      | 56.00        | QP                |
| 8  |   | 0.861           | 9.18           | 9.66     | 18.85              | -27.15      | 46.00        | Average           |
| 9  |   | 6.994           | 8.22           | 9.79     | 18.01              | -41.99      | 60.00        | QP                |
| 10 |   | 6.994           | 2.79           | 9.79     | 12.58              | -37.42      | 50.00        | Average           |
| 11 |   | 15.543          | 17.82          | 9.89     | 27.72              | -32.28      | 60.00        | QP                |
| 12 |   | 15.543          | 6.71           | 9.89     | 16.60              | -33.40      | 50.00        | Average           |


Note:

1. " \*", means this data is the worst emission level.

2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                                      |                      |              |
|-----------|------------------------------------------------------|----------------------|--------------|
| EUT       | True Wireless Earbuds with Active Noise Cancellation | Date of Test         | 2023-12-13   |
| Factor    | CE_ENV216-N (Filter ON)                              | Temp. / Humidity     | 22.2°C /53%  |
| Polarity  | Neutral                                              | Site / Test Engineer | SR2 / Bob    |
| Test Mode | BT_TX_DH5_CH 39                                      | Test Voltage         | AC 240V/60Hz |

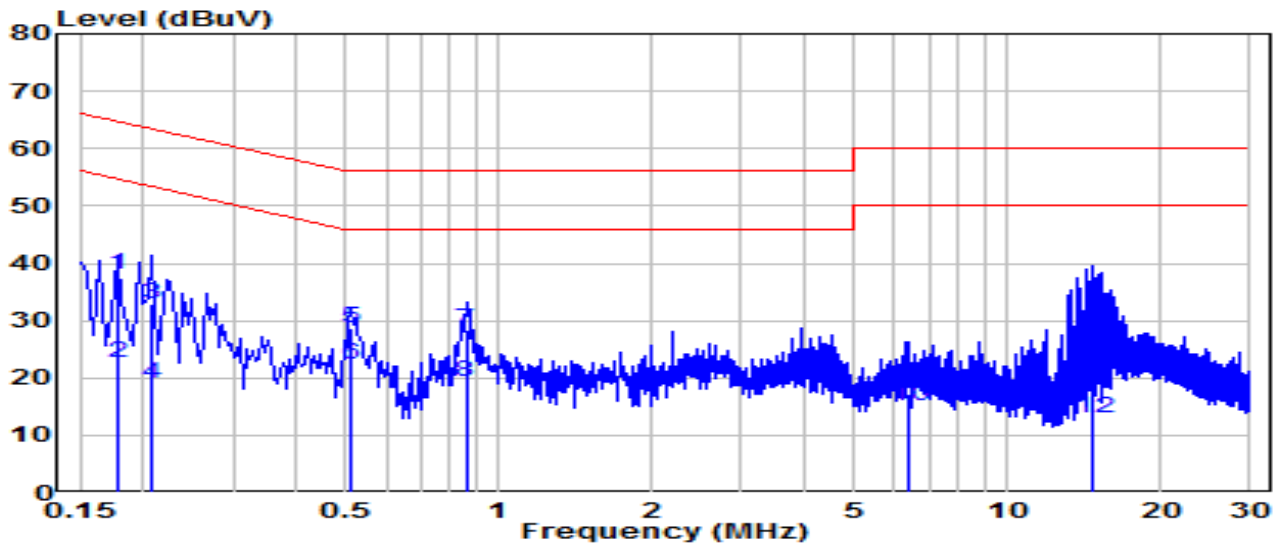

| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.177           | 28.45          | 9.62     | 38.07              | -26.56      | 64.63        | QP                |
| 2  | 0.177           | 12.99          | 9.62     | 22.61              | -32.01      | 54.63        | Average           |
| 3  | 0.208           | 23.33          | 9.62     | 32.95              | -30.31      | 63.27        | QP                |
| 4  | 0.208           | 9.44           | 9.62     | 19.06              | -34.20      | 53.27        | Average           |
| 5  | * 0.514         | 19.06          | 9.64     | 28.70              | -27.30      | 56.00        | QP                |
| 6  | * 0.514         | 12.76          | 9.64     | 22.40              | -23.60      | 46.00        | Average           |
| 7  | 0.861           | 18.63          | 9.66     | 28.30              | -27.70      | 56.00        | QP                |
| 8  | 0.861           | 9.72           | 9.66     | 19.38              | -26.62      | 46.00        | Average           |
| 9  | 6.386           | 7.51           | 9.78     | 17.29              | -42.71      | 60.00        | QP                |
| 10 | 6.386           | 5.18           | 9.78     | 14.96              | -35.04      | 50.00        | Average           |
| 11 | 14.679          | 14.92          | 9.93     | 24.84              | -35.16      | 60.00        | QP                |
| 12 | 14.679          | 3.15           | 9.93     | 13.08              | -36.92      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).



## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **True Wireless Earbuds with Active Noise Cancellation** is in compliance with Part 15C of the FCC Rules.

## **Appendix A : Test Photograph**

Refer to “2312TW0106-UT” file.

## **Appendix B : EUT Photograph**

Refer to “2312TW0106-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2312TW0106-UI” file.

\_\_\_\_\_ The End \_\_\_\_\_