

GSM850_GPRS10_Right Cheek_251**DUT: EUT**

Communication System: GPRS 850-2solt; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 849$ MHz; $\sigma = 0.939$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.404 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.95 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.400 mW/g

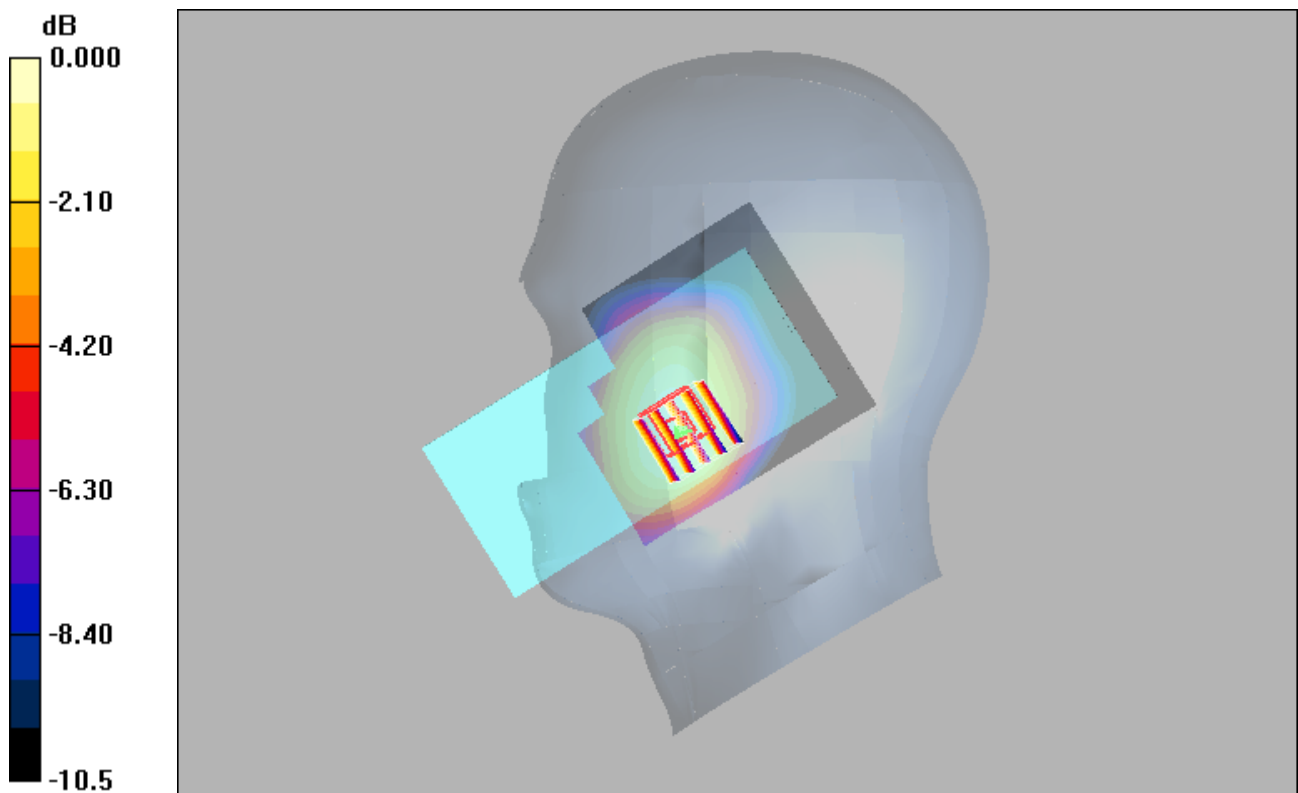

0 dB = 0.400mW/g

GSM1900_GPRS11_Left Cheek_512**DUT: EUT**

Communication System: GPRS1900-3slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.67


Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.234 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.51 V/m; Power Drift = 0.093 dB
Peak SAR (extrapolated) = 0.312 W/kg
SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.123 mW/g
Maximum value of SAR (measured) = 0.232 mW/g

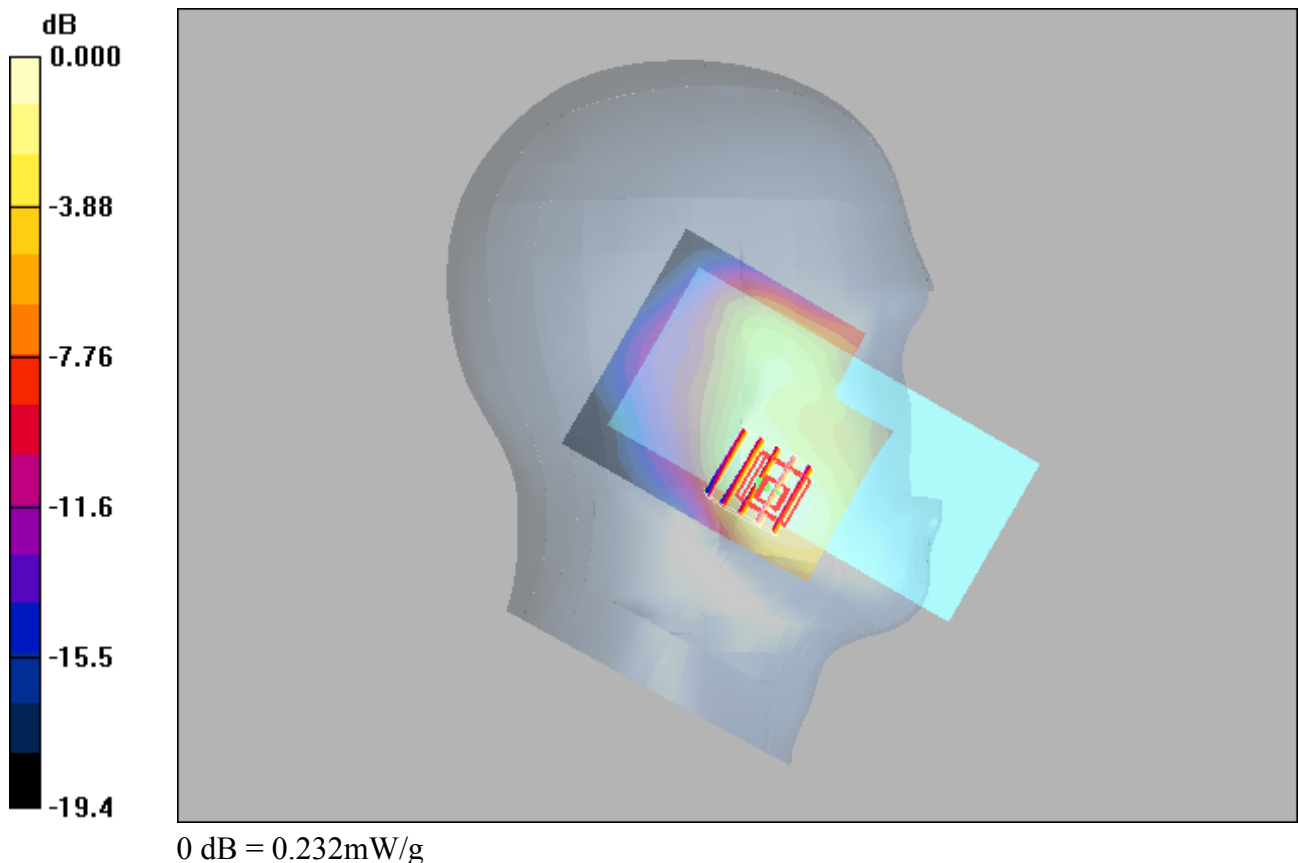

WCDMA II_RMC12.2K_Left Cheek_9262**DUT: EUT**


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.321 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.15 V/m; Power Drift = 0.075 dB
Peak SAR (extrapolated) = 0.428 W/kg
SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.167 mW/g
Maximum value of SAR (measured) = 0.317 mW/g

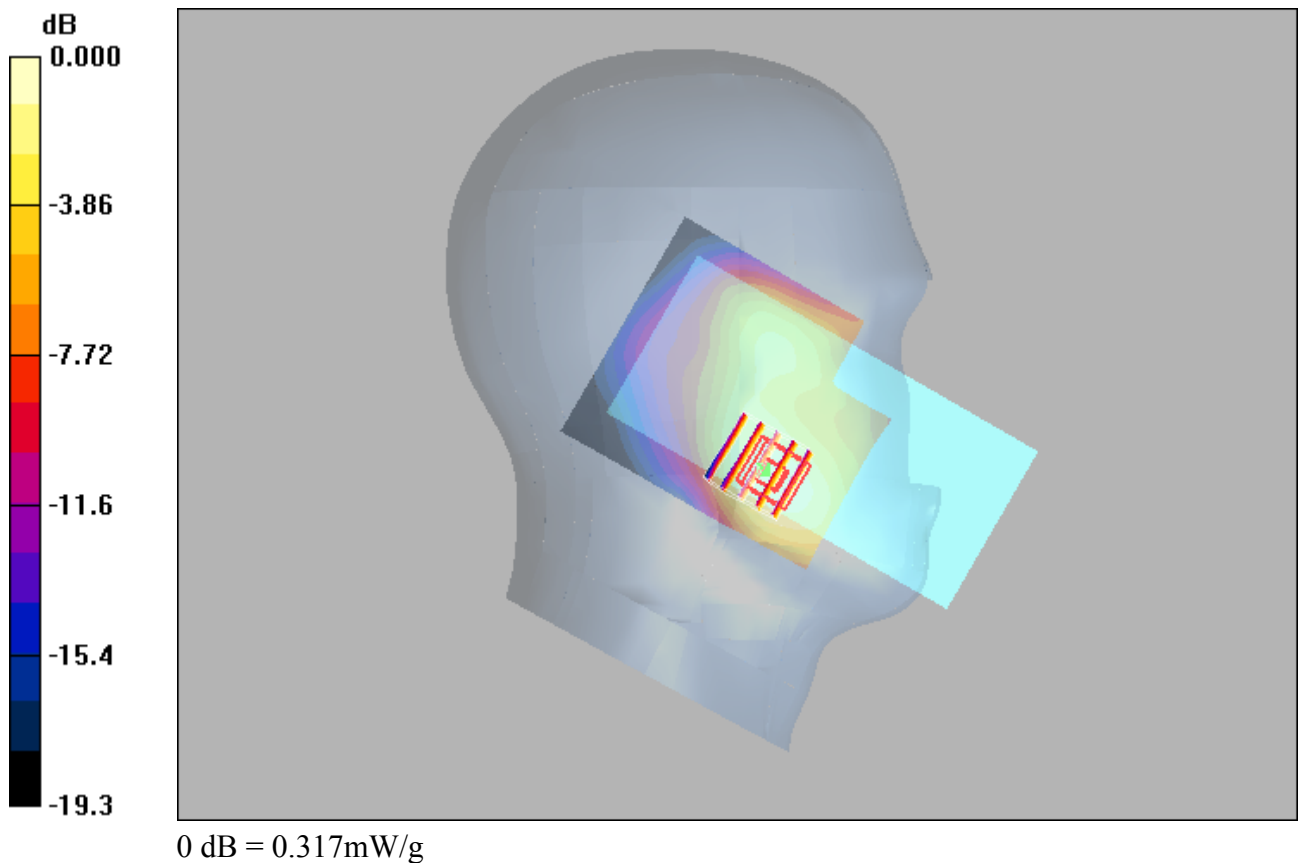

WCDMA IV_RMC12.2K_Left Cheek_1513**DUT: EUT**

Communication System: WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.107 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.37 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

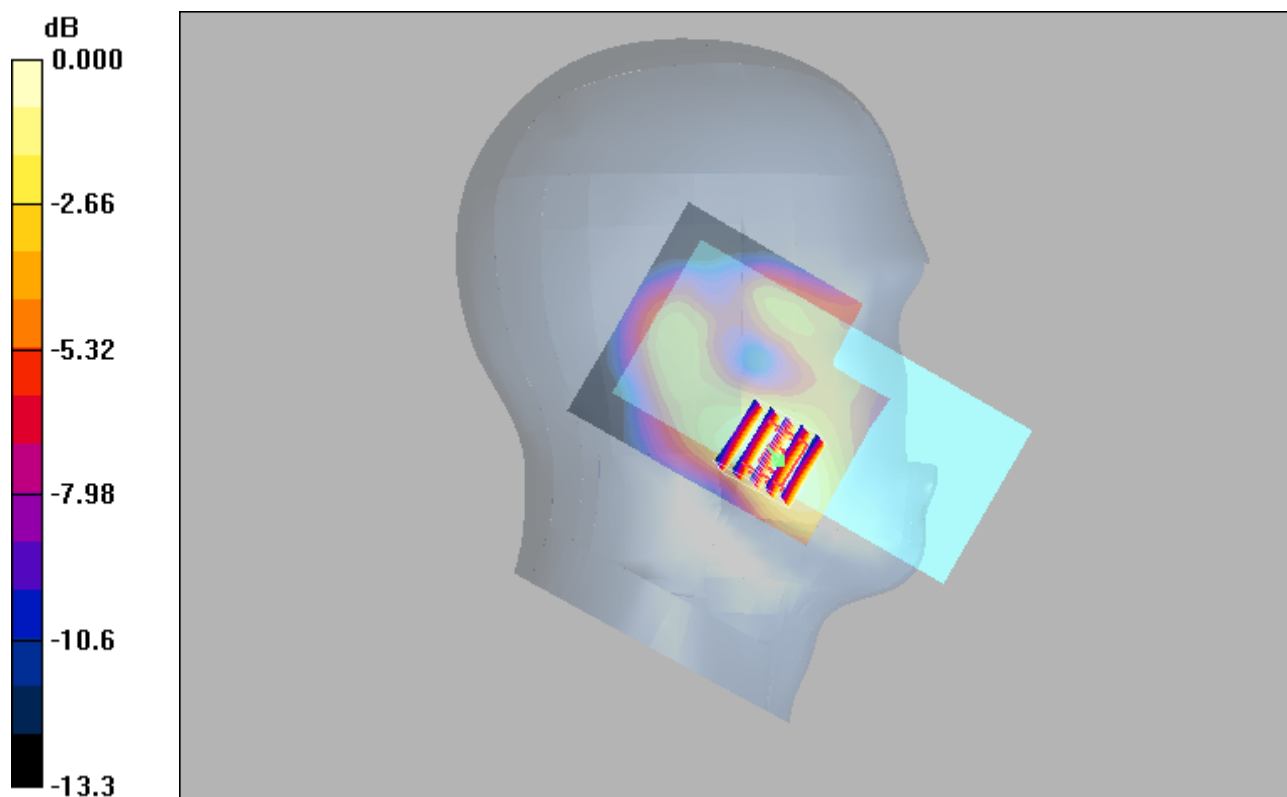

0 dB = 0.107mW/g

WCDMA V_RMC12.2K_Left Cheek_4182**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: H835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.124 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.41 V/m; Power Drift = 0.192 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.089 mW/g
Maximum value of SAR (measured) = 0.125 mW/g

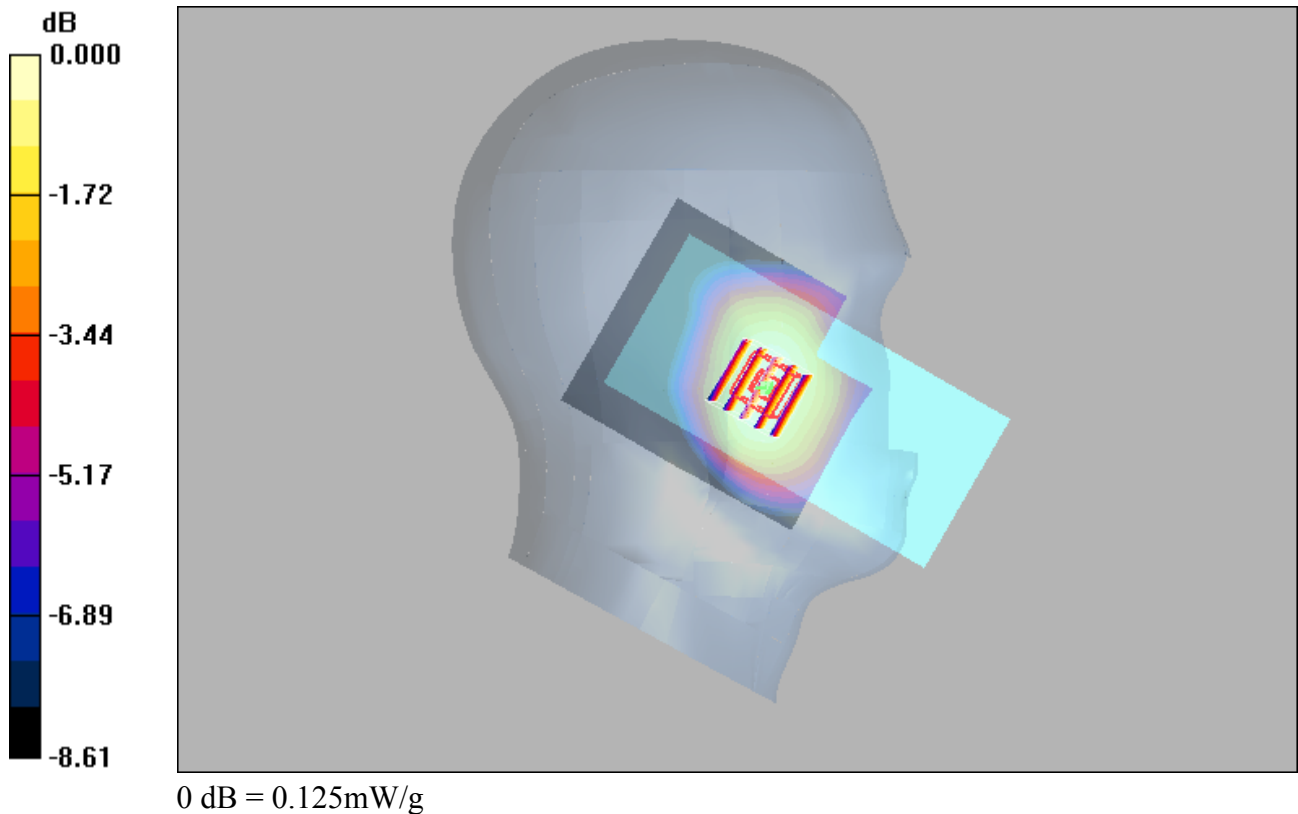

LTE 2_QPSK20M_1_0_Left Cheek_18700**DUT: EUT**

Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.442 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.61 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

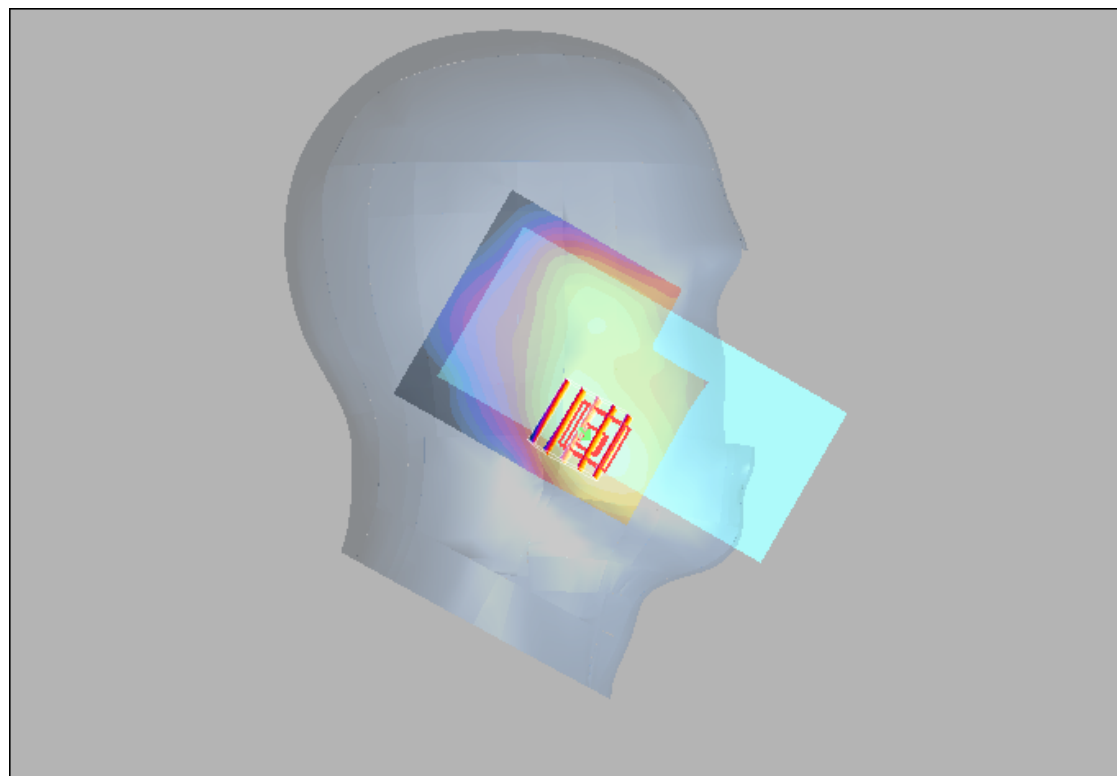

0 dB = 0.449mW/g

LTE 5_QPSK10M_1_0_Right Cheek_20600**DUT: EUT**

Communication System: LTE Band5; Frequency: 844 MHz;Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.935 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.119 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.74 V/m ; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.108 mW/g ; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

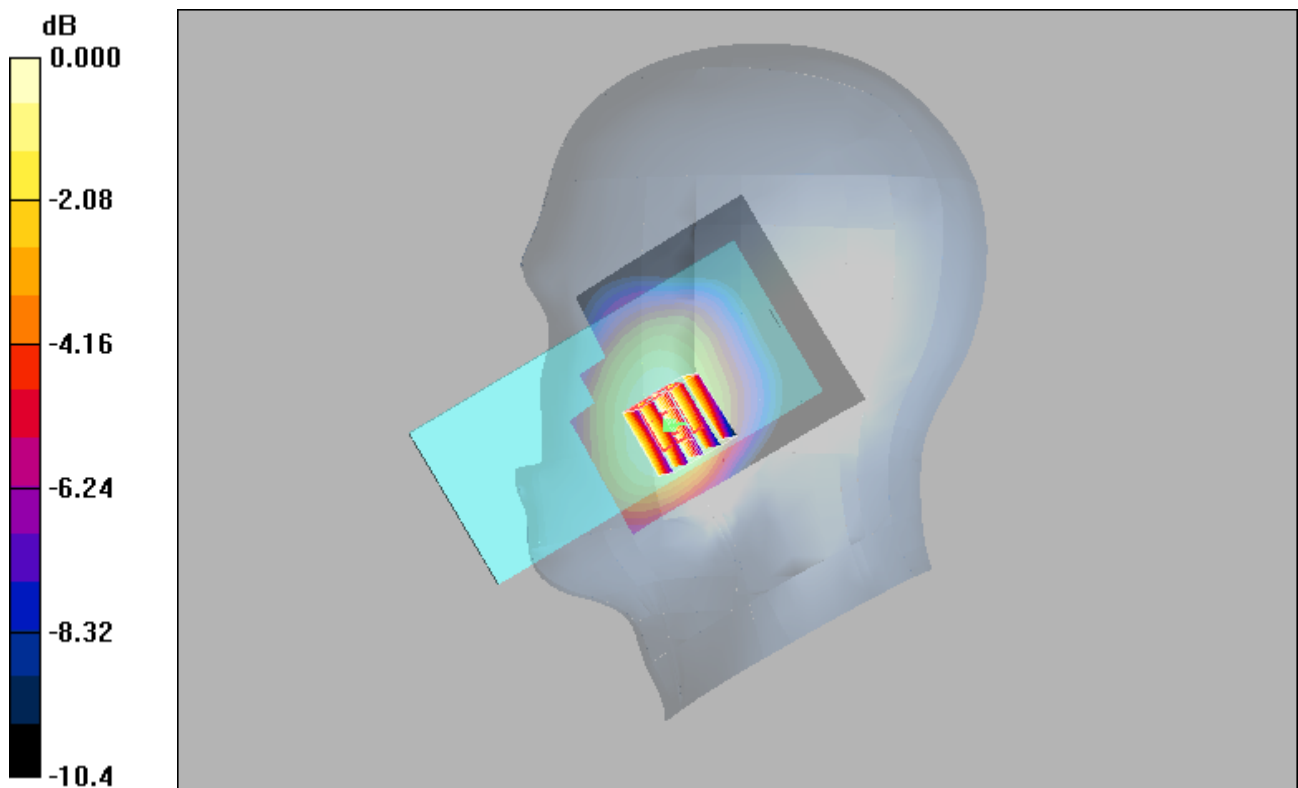

0 dB = 0.119mW/g

LTE 7_QPSK20M_1_99_Left Cheek_21100**DUT: EUT**

Communication System: LTE Band 7&20M; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.029 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.562 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.042 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

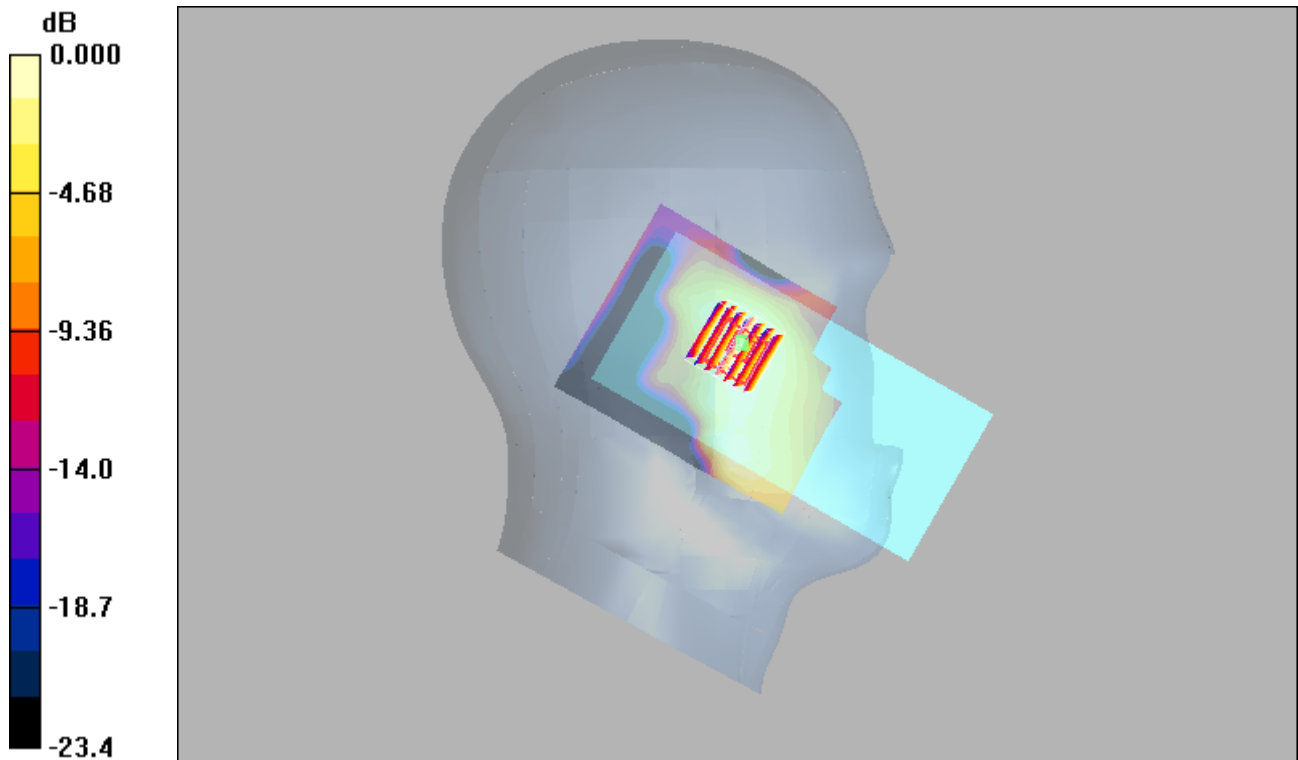

0 dB = 0.028mW/g

LTE 12_QPSK10M_1_49_Right Cheek_23130**DUT: EUT**

Communication System: LTE Band 12; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.37, 6.37, 6.37); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.157 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.50 V/m ; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.143 mW/g ; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.156 mW/g

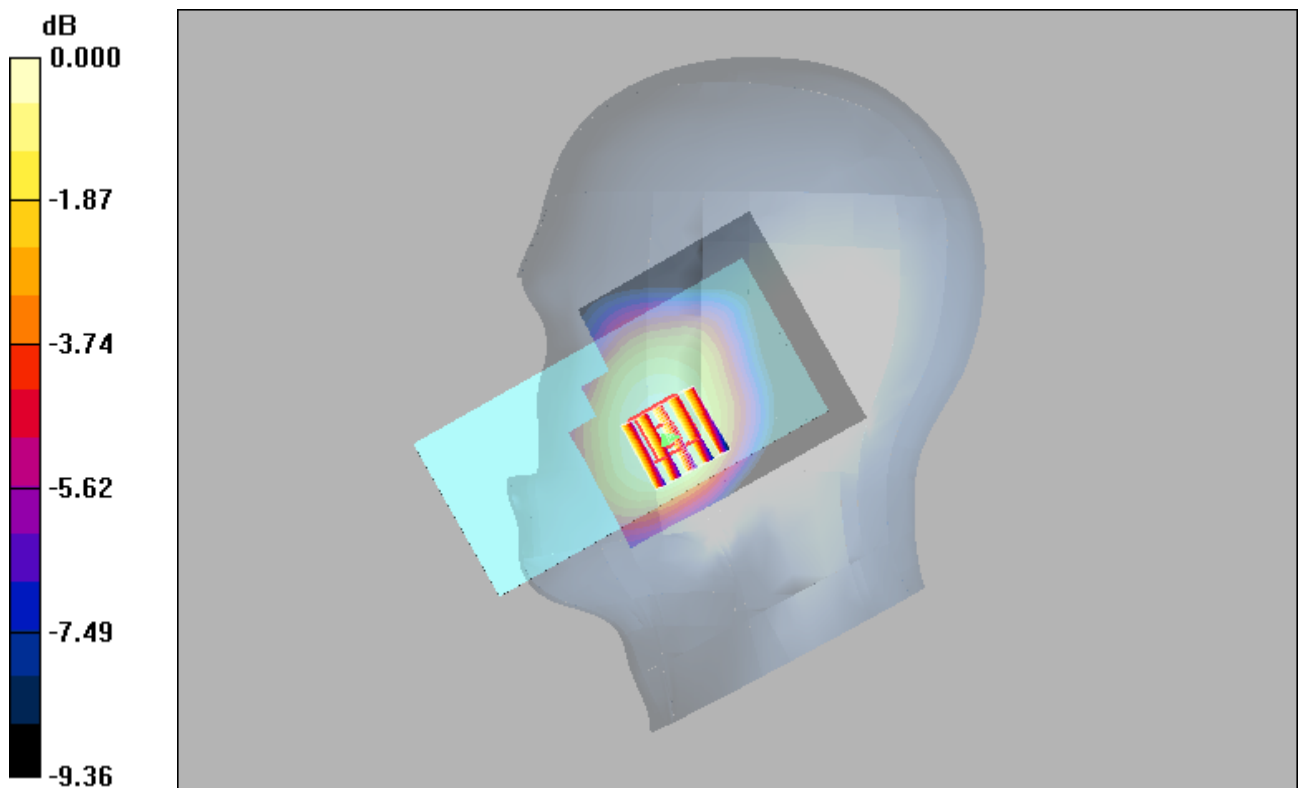

0 dB = 0.156 mW/g

LTE 66_QPSK20M_50_50_Left Cheek_132572**DUT: EUT**

Communication System: LTE Band 66&QPSK20M; Frequency: 1770 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.120 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.21 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.121 mW/g

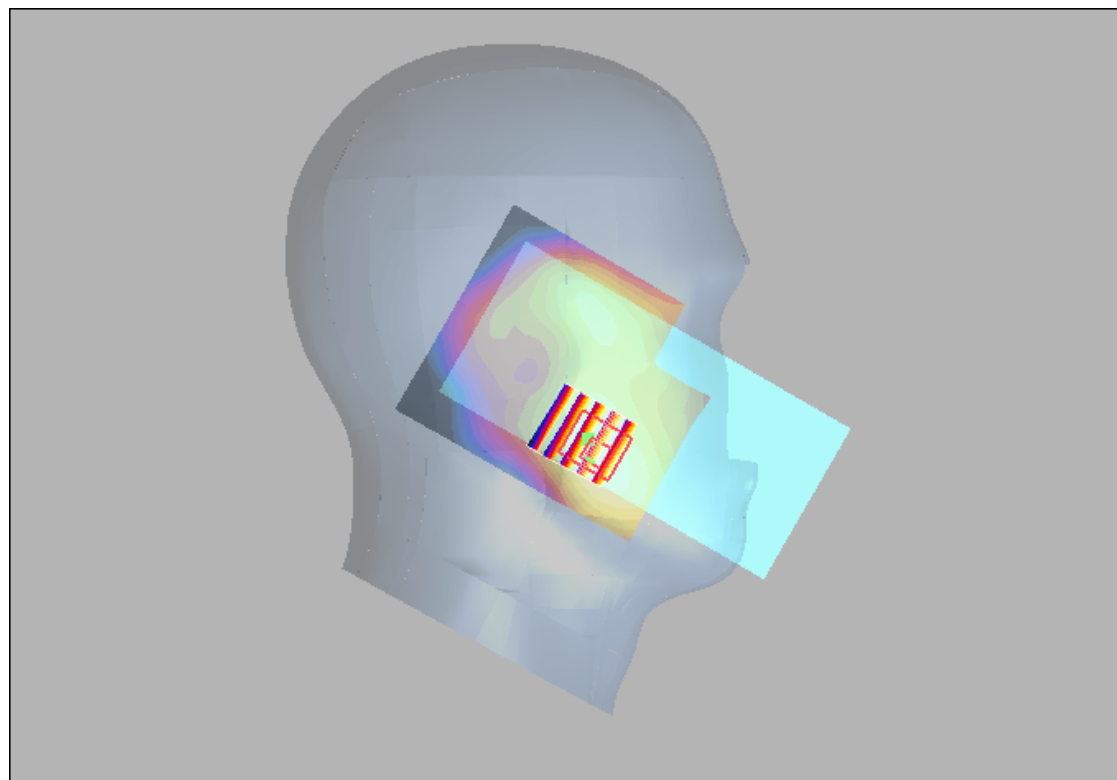

0 dB = 0.121mW/g

LTE 71_QPSK20M_1_99_Right Cheek_133372**DUT: EUT**

Communication System: LTE Band 71&QPSK20M; Frequency: 688 MHz;Duty Cycle: 1:1

Medium: H750 Medium parameters used : $f = 688 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.37, 6.37, 6.37); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.137 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.34 V/m ; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.126 mW/g ; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.136 mW/g

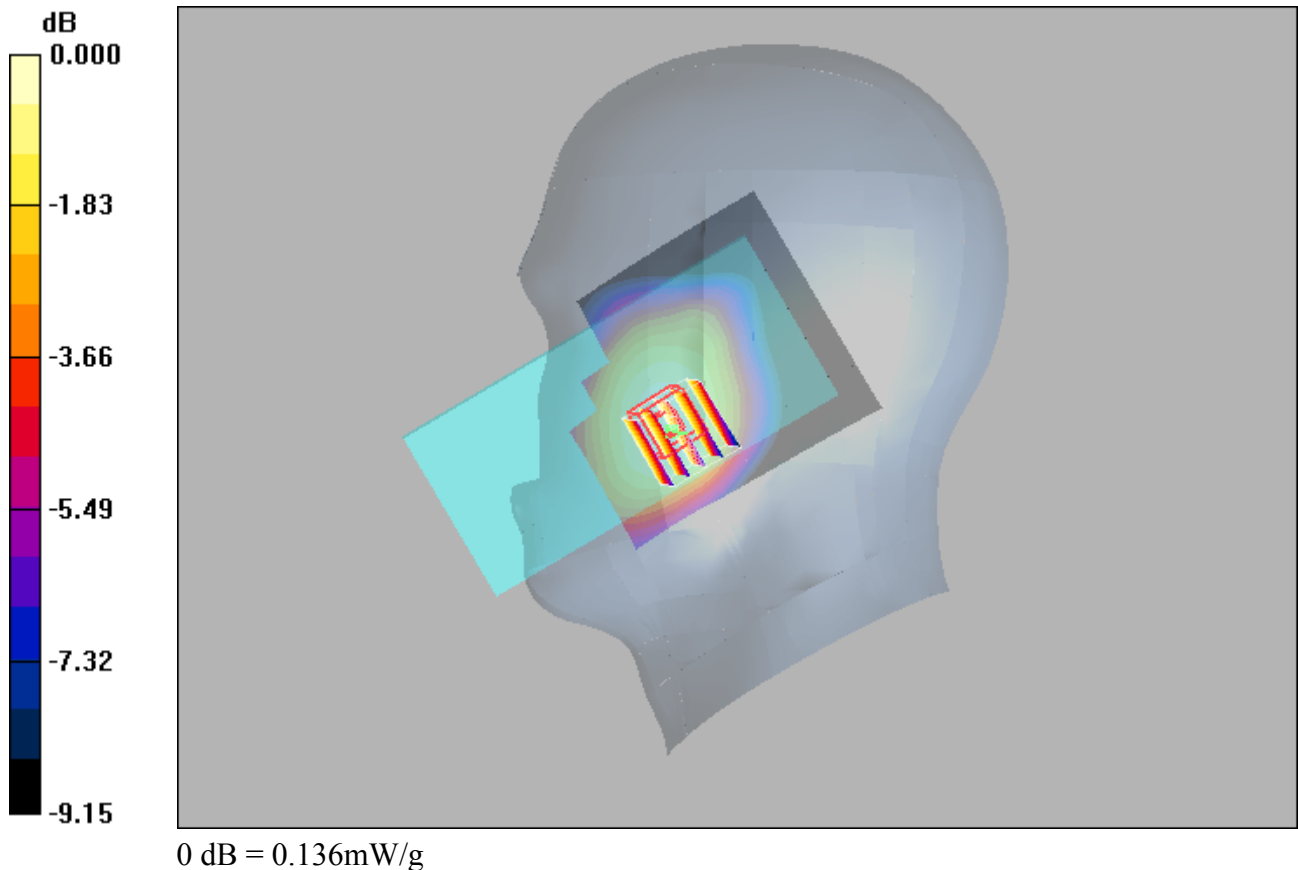

EDR_DH5_Right Cheek_39**DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1


Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.040 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.53 V/m; Power Drift = 0.146 dB
Peak SAR (extrapolated) = 0.055 W/kg
SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.037 mW/g

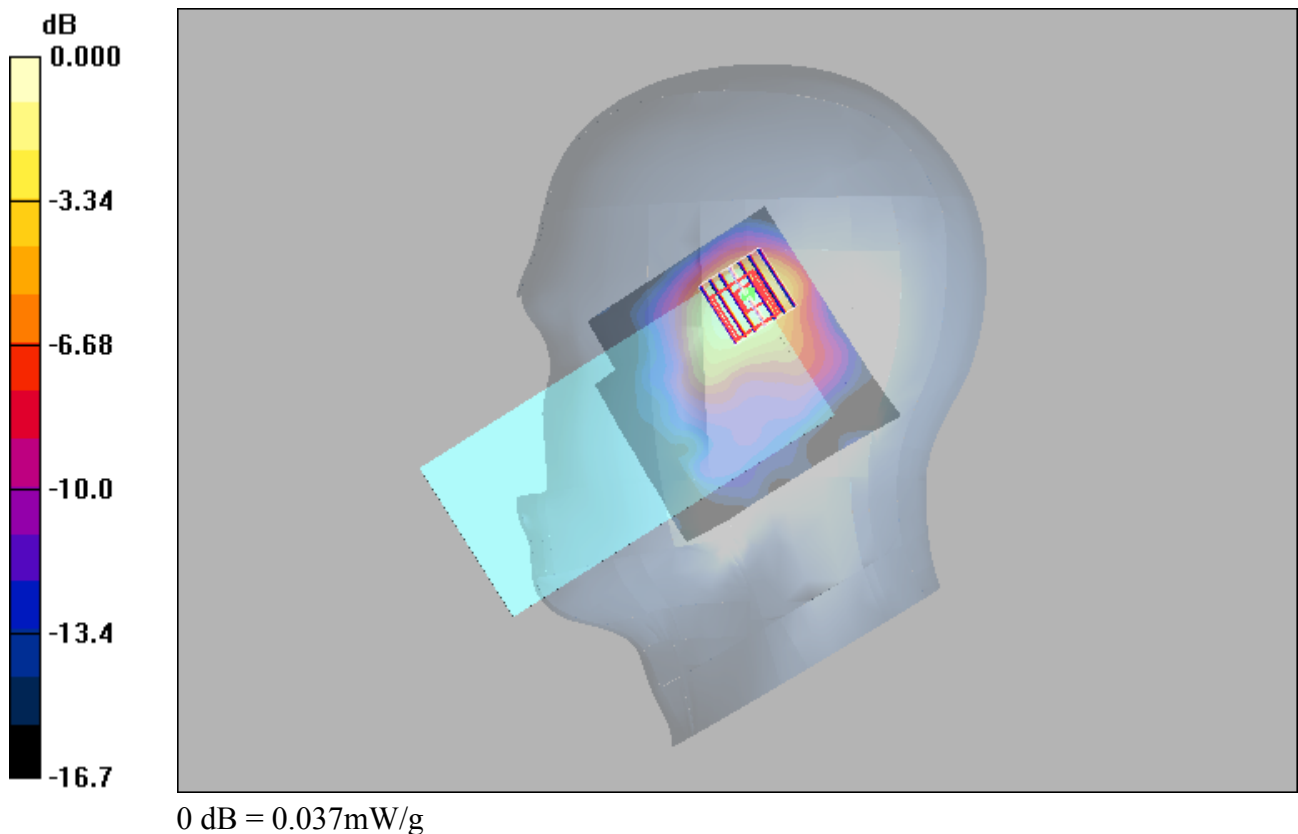

WIFI 2.4G_802.11b_Right Cheek_11**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1


Medium: H2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.760 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.9 V/m; Power Drift = 0.052 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.548 mW/g; SAR(10 g) = 0.280 mW/g
Maximum value of SAR (measured) = 0.684 mW/g

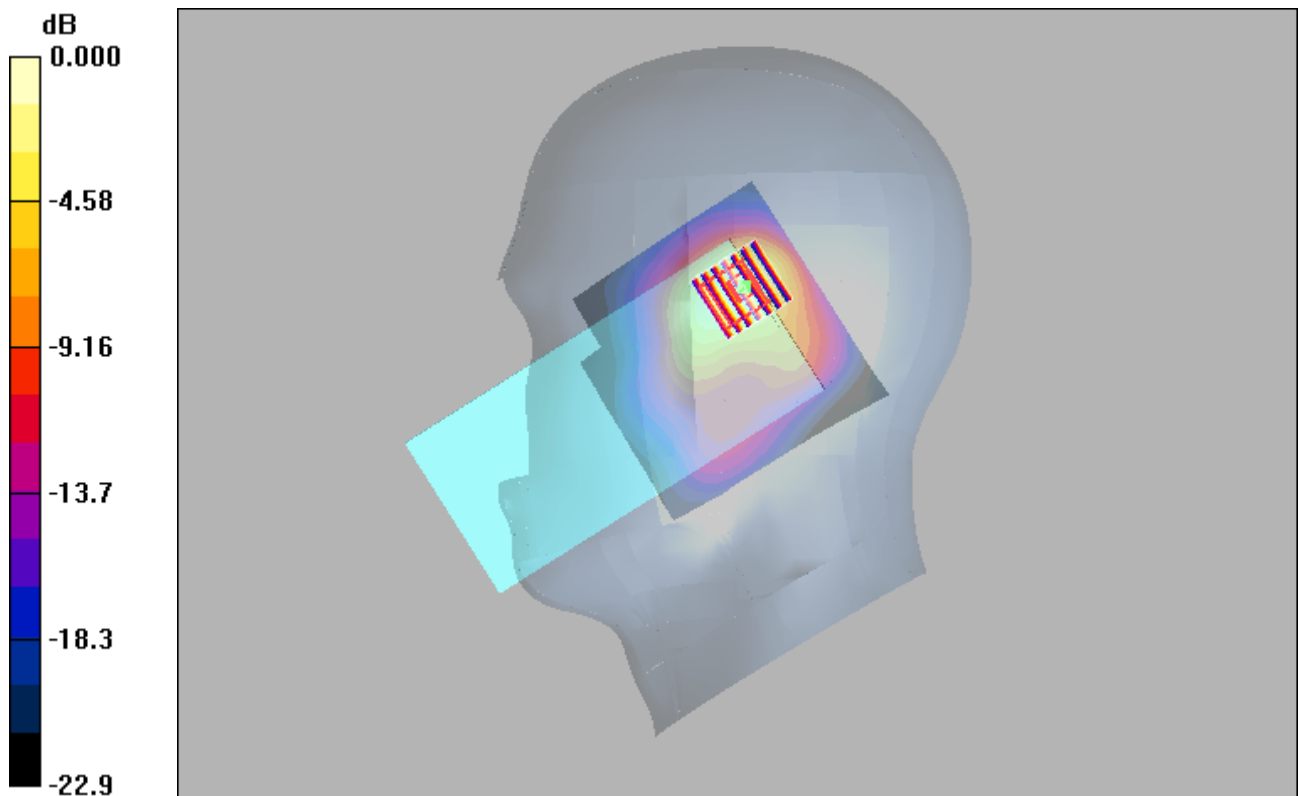

0 dB = 0.684mW/g

GSM850_GPRS10_Rear Face_10mm_251**DUT: EUT**

Communication System: GPRS 850-2solt; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.939 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.651 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.0 V/m ; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.521 mW/g ; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

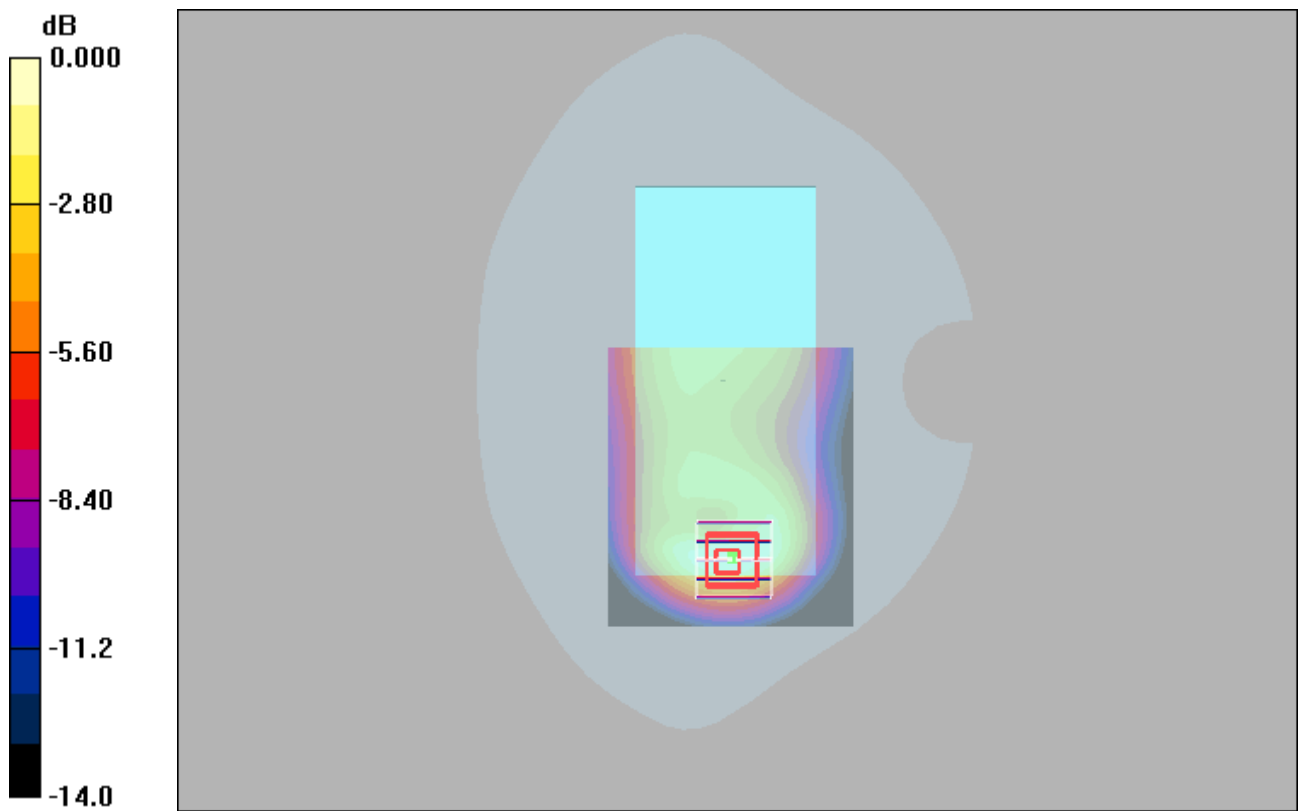

0 dB = 0.643 mW/g

GSM1900_GPRS11_Rear Face_10mm_512**DUT: EUT**

Communication System: GPRS1900-3slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.781 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.741 mW/g

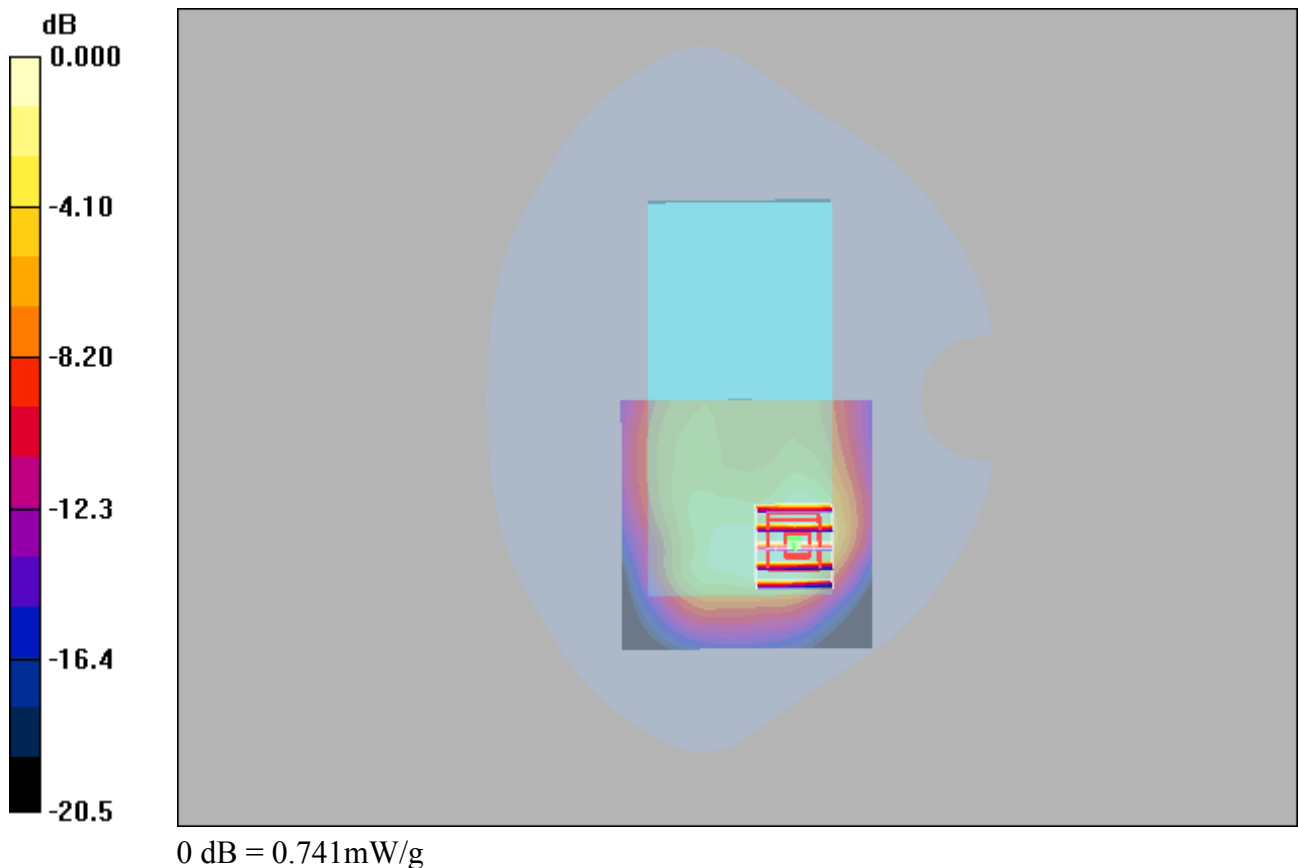

WCDMA II_RMC12.2K_Rear Face_10mm_9400**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.436 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

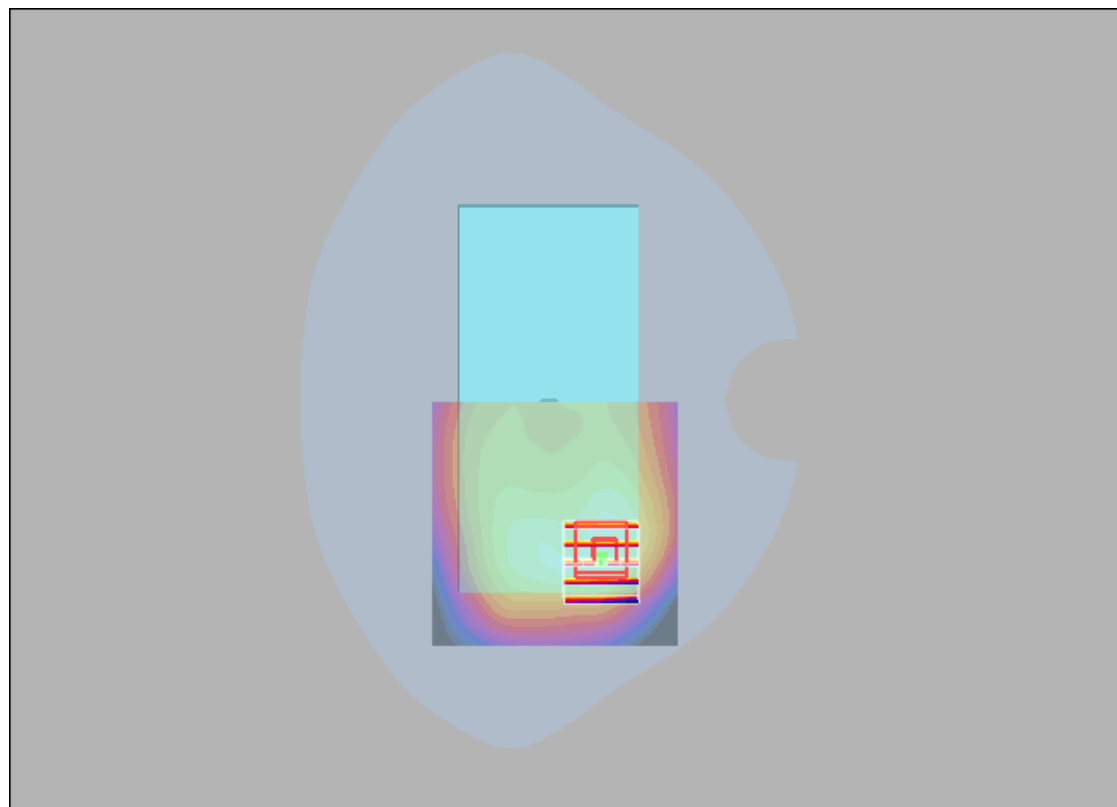

0 dB = 1.00mW/g

WCDMA IV_RMC12.2K_Rear Face_10mm_1513**DUT: EUT**

Communication System: WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.555 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.23 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.478 mW/g

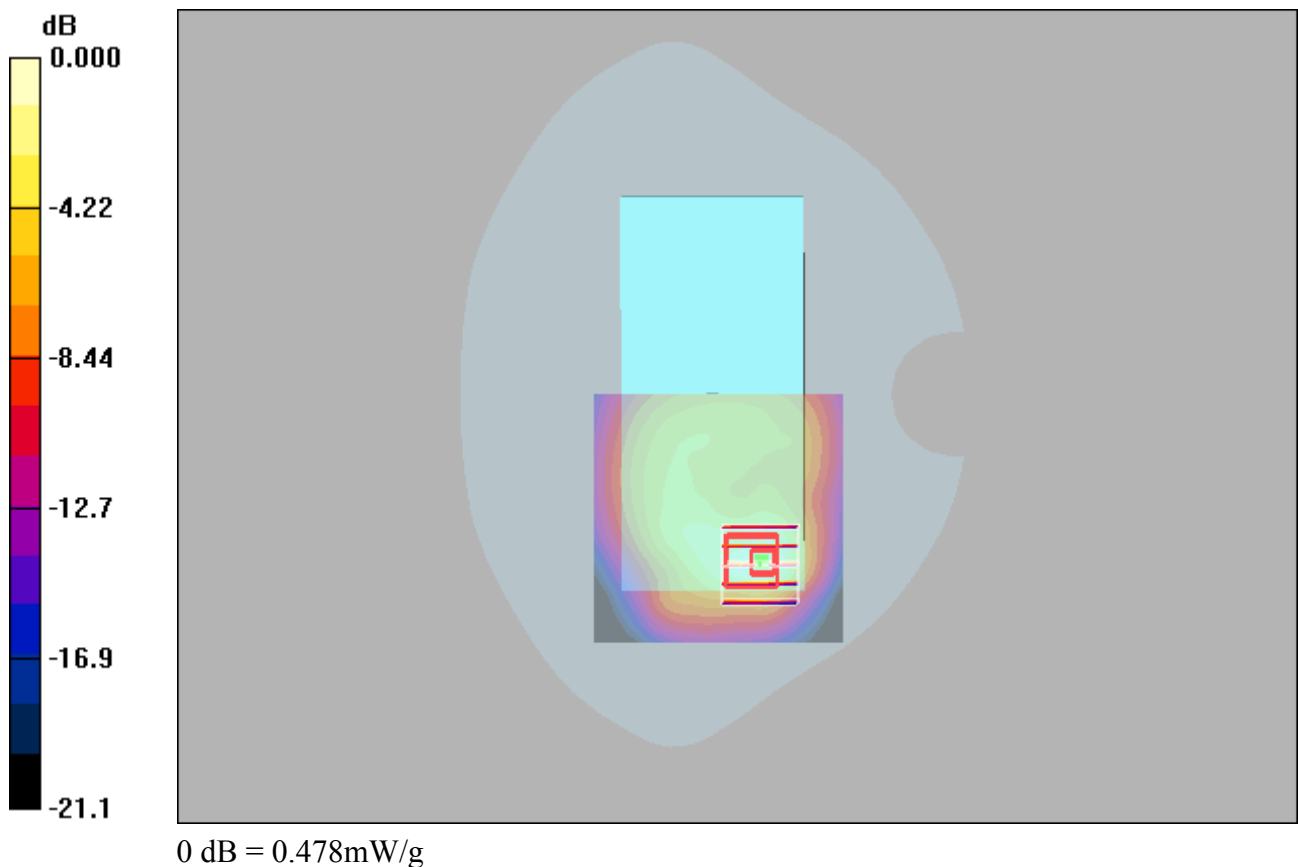

WCDMA V_RMC12.2K_Rear Face_10mm_4182**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.234 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.242 mW/g

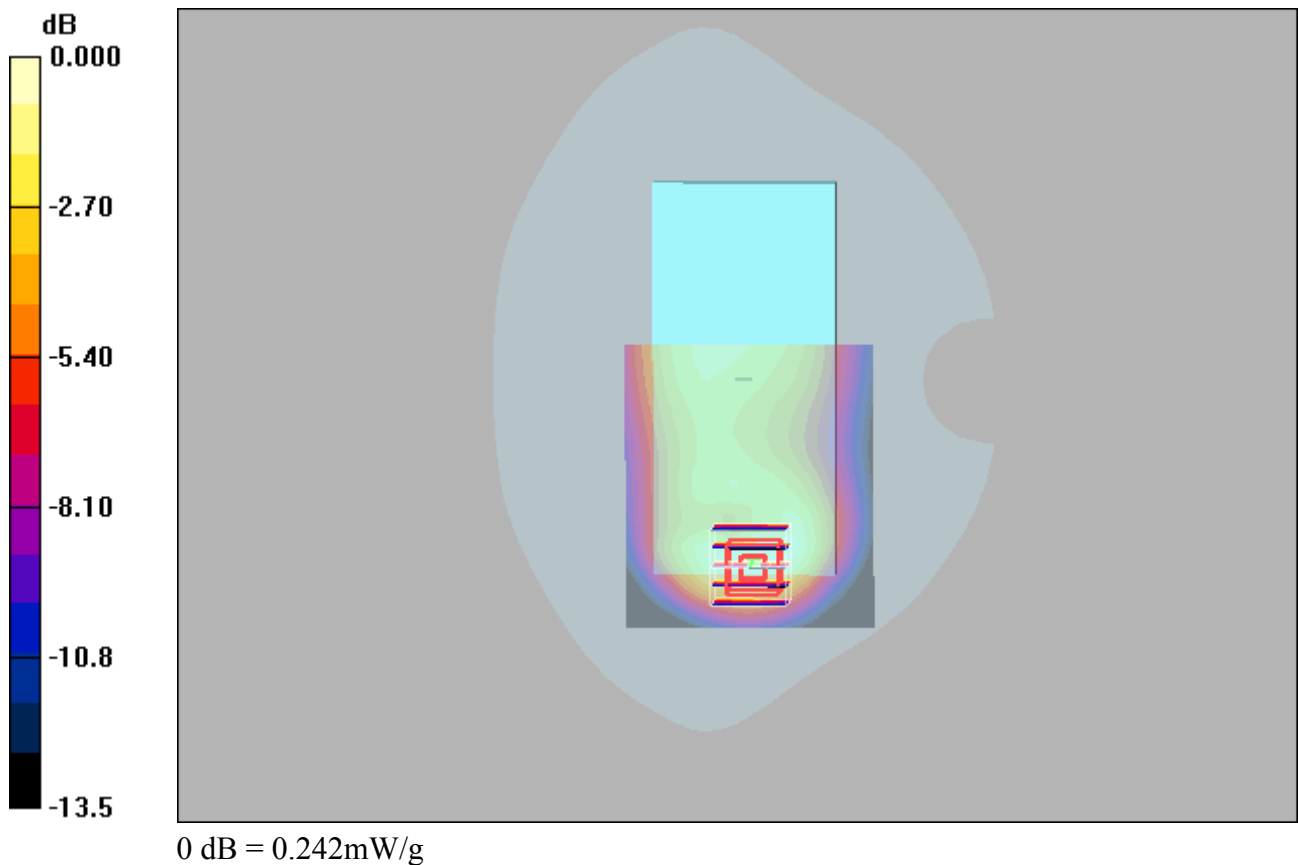

LTE 2_QPSK20M_1_0_Rear Face_10mm_19100**DUT: EUT**

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.910 mW/g; SAR(10 g) = 0.487 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

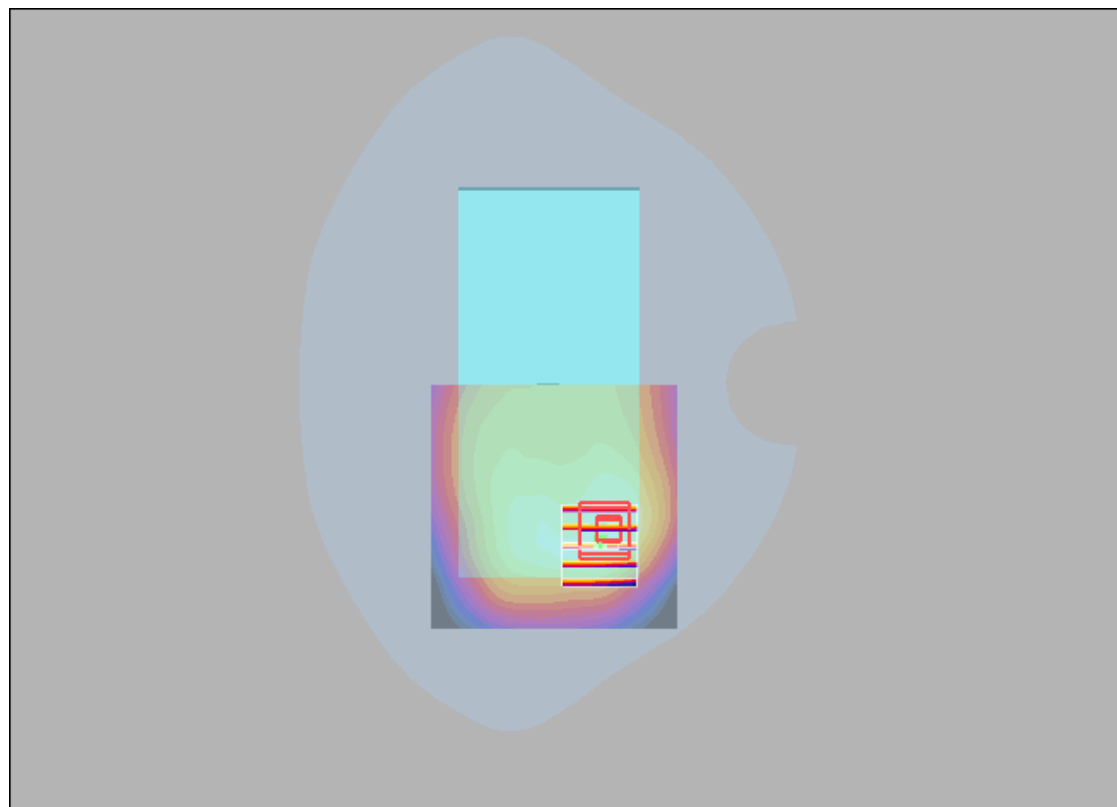

0 dB = 1.11mW/g

LTE 5_QPSK10M_1_0_Rear Face_10mm_20600**DUT: EUT**

Communication System: LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.935 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.276 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.6 V/m ; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.240 mW/g ; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

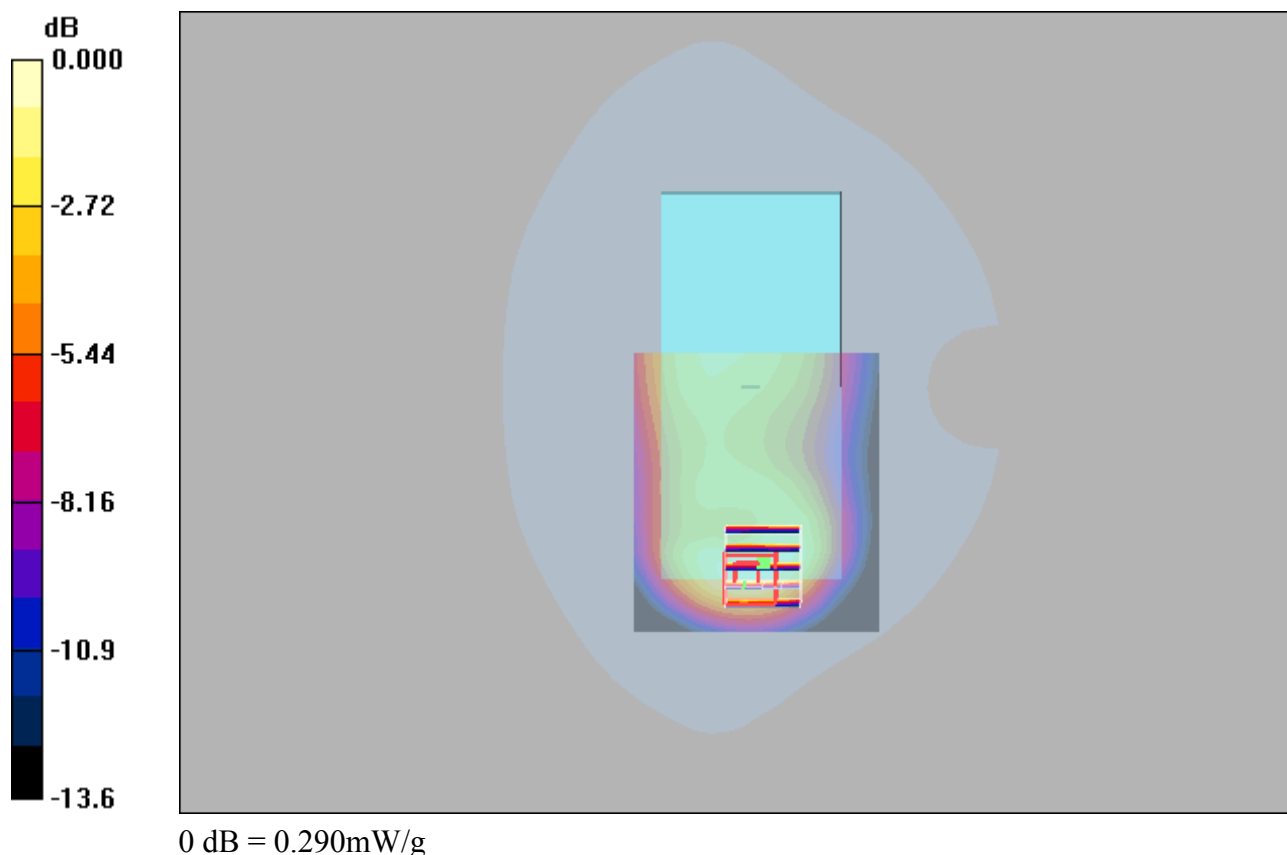

LTE 7_QPSK20M_1_99_Rear Face_10mm_20850**DUT: EUT**

Communication System: LTE Band 7&20M; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.46 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.73 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.934 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

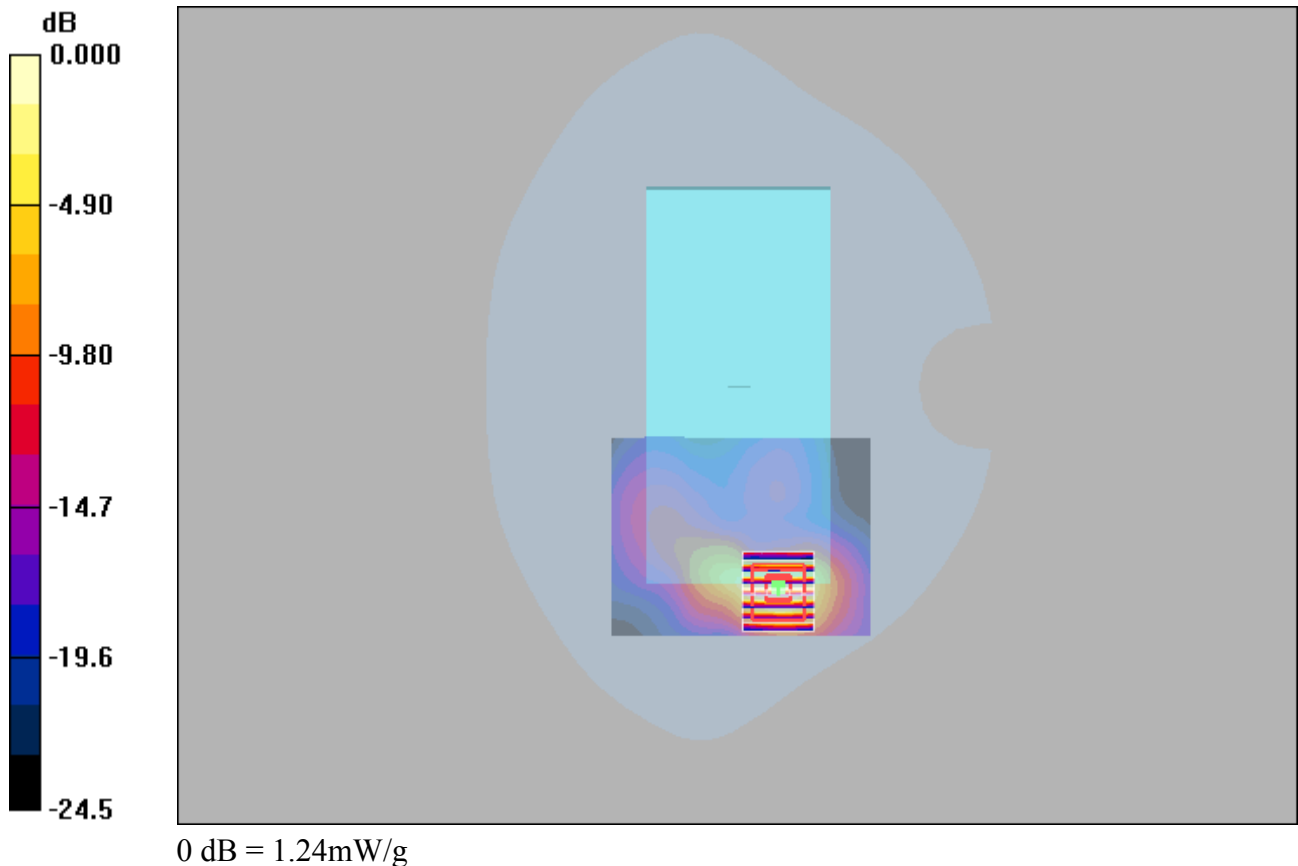

LTE 12_QPSK10M_1_49_Rear Face_10mm_23130**DUT: EUT**

Communication System: LTE Band 12; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 711$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.37, 6.37, 6.37); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

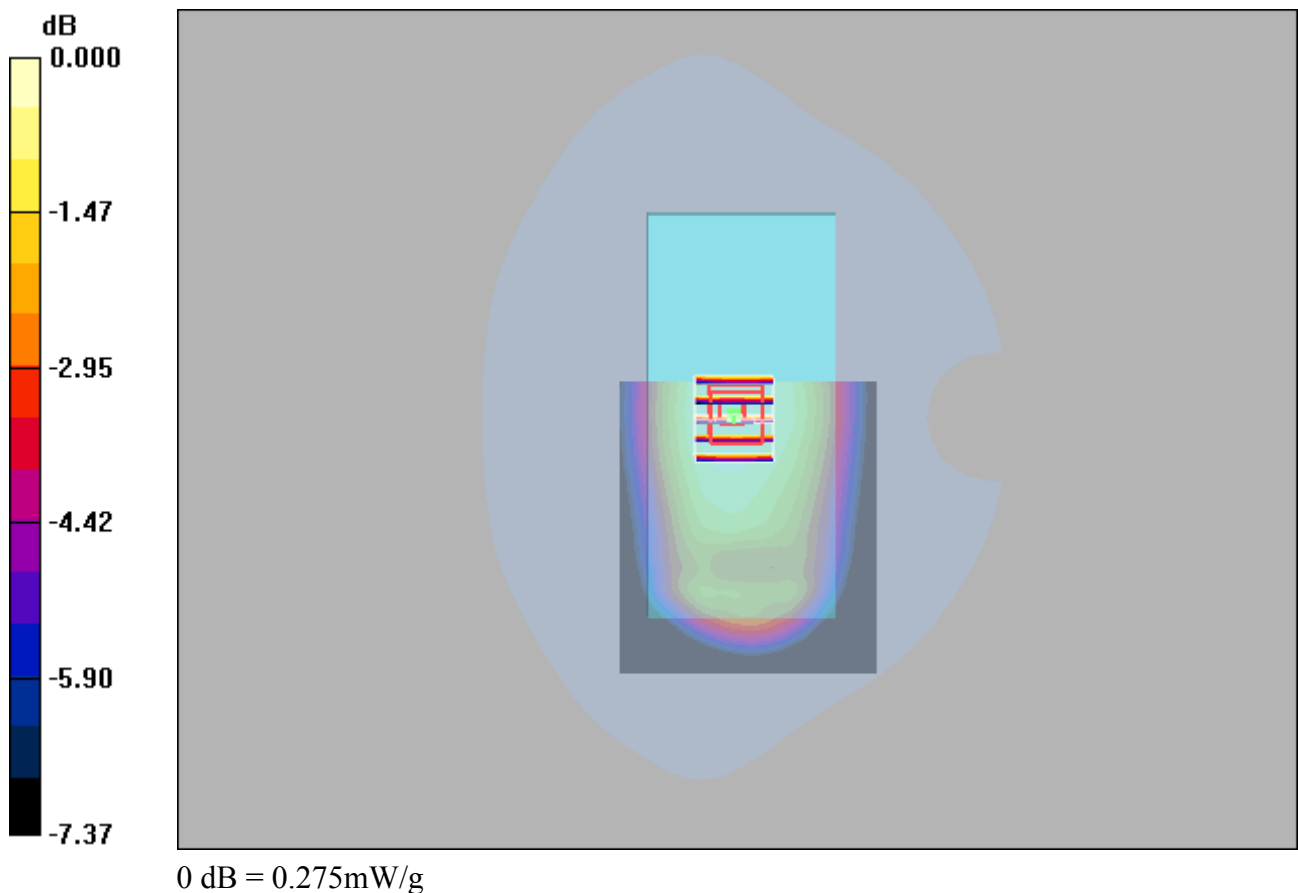

LTE 66_QPSK20M_1_49_Rear Face_10mm_132322**DUT: EUT**

Communication System: LTE Band 66&QPSK20M; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.611 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.535 mW/g



LTE 71_QPSK20M_1_99_Rear Face_10mm_133372**DUT: EUT**

Communication System: LTE Band 71&QPSK20M; Frequency: 688 MHz;Duty Cycle: 1:1

Medium: H750 Medium parameters used : $f = 688 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.37, 6.37, 6.37); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.232 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.7 V/m ; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.212 mW/g ; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.230 mW/g

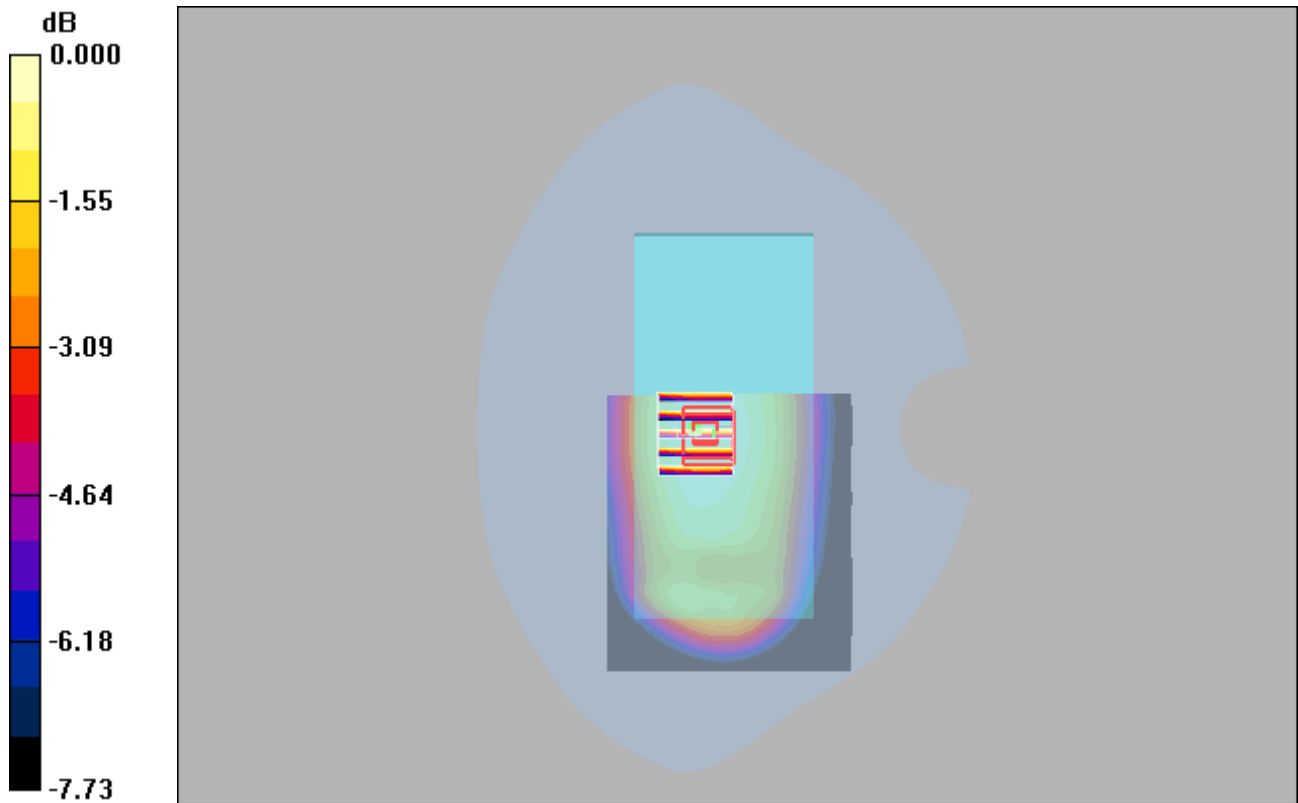

0 dB = 0.230mW/g

EDR_DH5_Rear Face_10mm_39**DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.016 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.06 V/m; Power Drift = 0.165 dB

Peak SAR (extrapolated) = 0.027 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00574 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

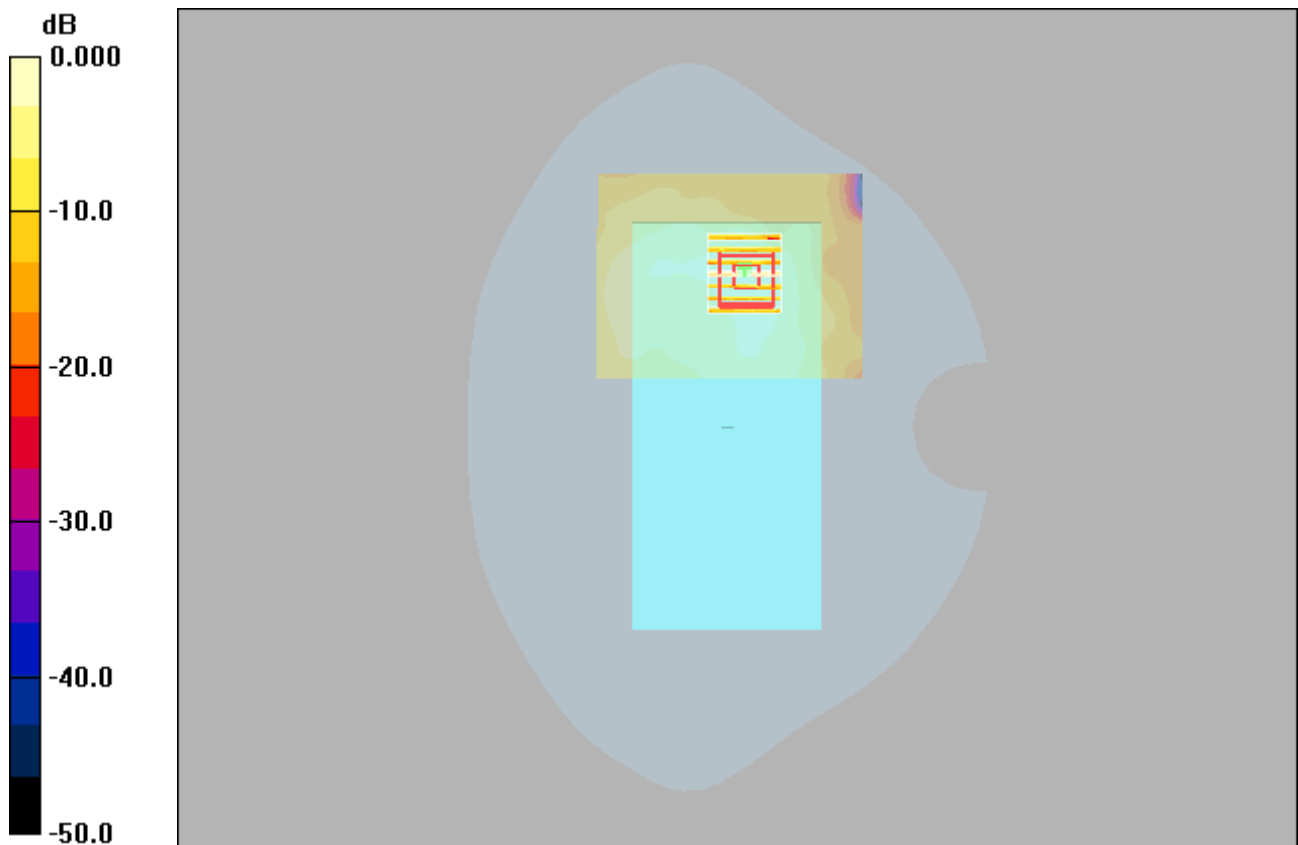

0 dB = 0.015mW/g

WIFI 2.4G_802.11b_Rear Face_10mm_11**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.252 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.98 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

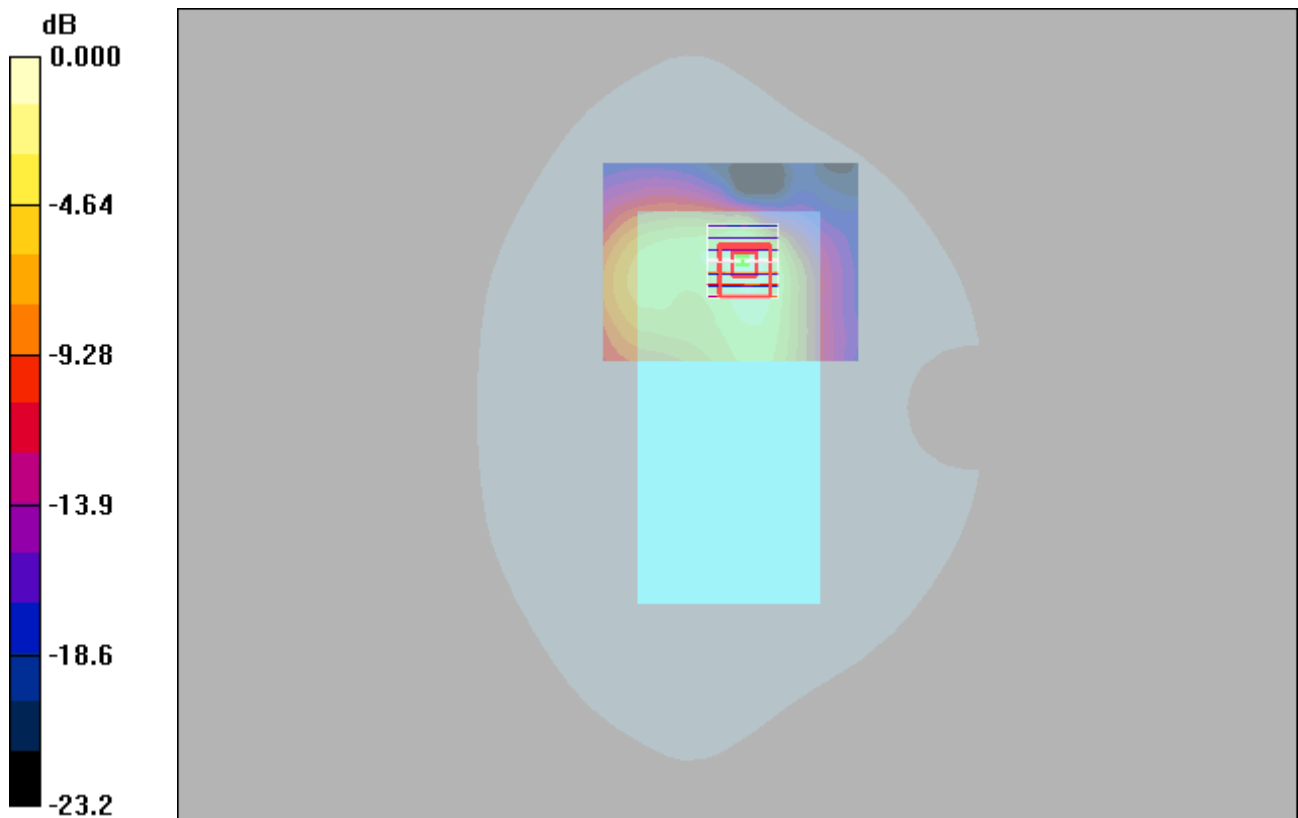

0 dB = 0.236mW/g

LTE 7_QPSK20M_1_99_Bottom Side_10mm_20850**DUT: EUT**

Communication System: LTE Band 7&20M; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.33 mW/g



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.29 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

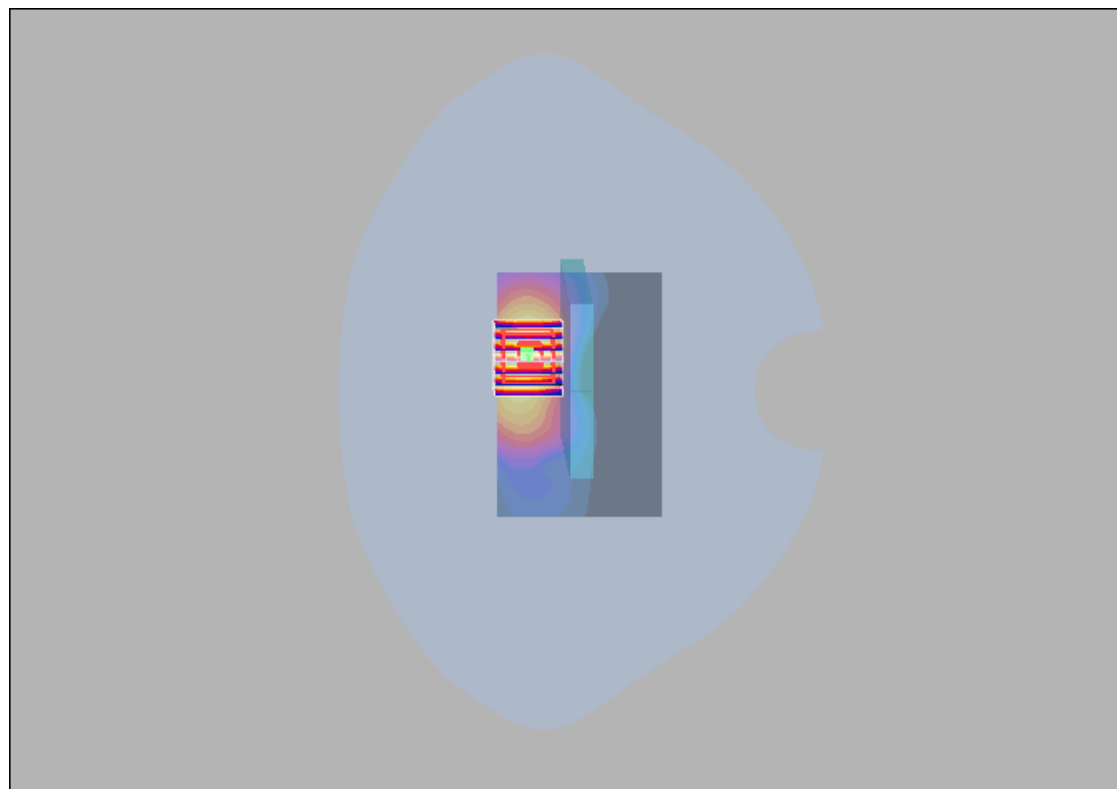

0 dB = 1.37mW/g

LTE 71_QPSK20M_1_99_Right Side_10mm_133372**DUT: EUT**

Communication System: LTE Band 71&QPSK20M; Frequency: 688 MHz;Duty Cycle: 1:1

Medium: H750 Medium parameters used : $f = 688 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.37, 6.37, 6.37); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.285 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.4 V/m ; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.251 mW/g ; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.285 mW/g

