



System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	10/1/2004 10:28:36 AM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Thales	Relative Permittivity:	53.27
Relative Humidity:	50%	Conductivity:	1.557
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	53.00 mm
DUT Position:	antenna 5 mm from phantom	Max SAR Z-axis Location:	-172.90 mm
Antenna Configuration:	Integral	Max E Field:	13.66 V/m
Test Frequency:	1880MHz	SAR 1g:	0.221 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.113 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.059 W/kg
Type of Modulation:		SAR End:	0.060 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.07 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	9/10/2004
Input Power Level:	maximum	Extrapolation:	poly4

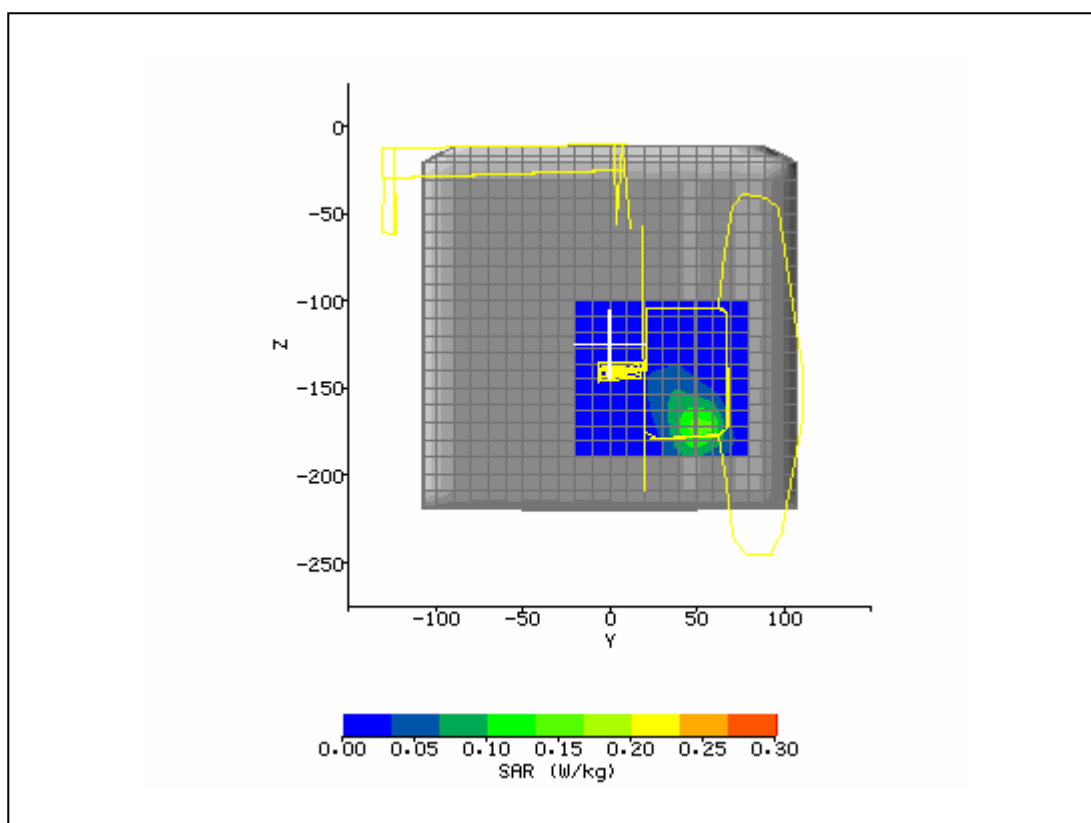

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	10/1/2004 9:49:03 AM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Thales	Relative Permittivity:	53.46
Relative Humidity:	50%	Conductivity:	1.539
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	52.00 mm
DUT Position:	antenna 5 mm from phantom	Max SAR Z-axis Location:	-172.00 mm
Antenna Configuration:	Integral	Max E Field:	16.96 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.343 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.179 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.096 W/kg
Type of Modulation:		SAR End:	0.096 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	9/10/2004
Input Power Level:	maximum	Extrapolation:	poly4

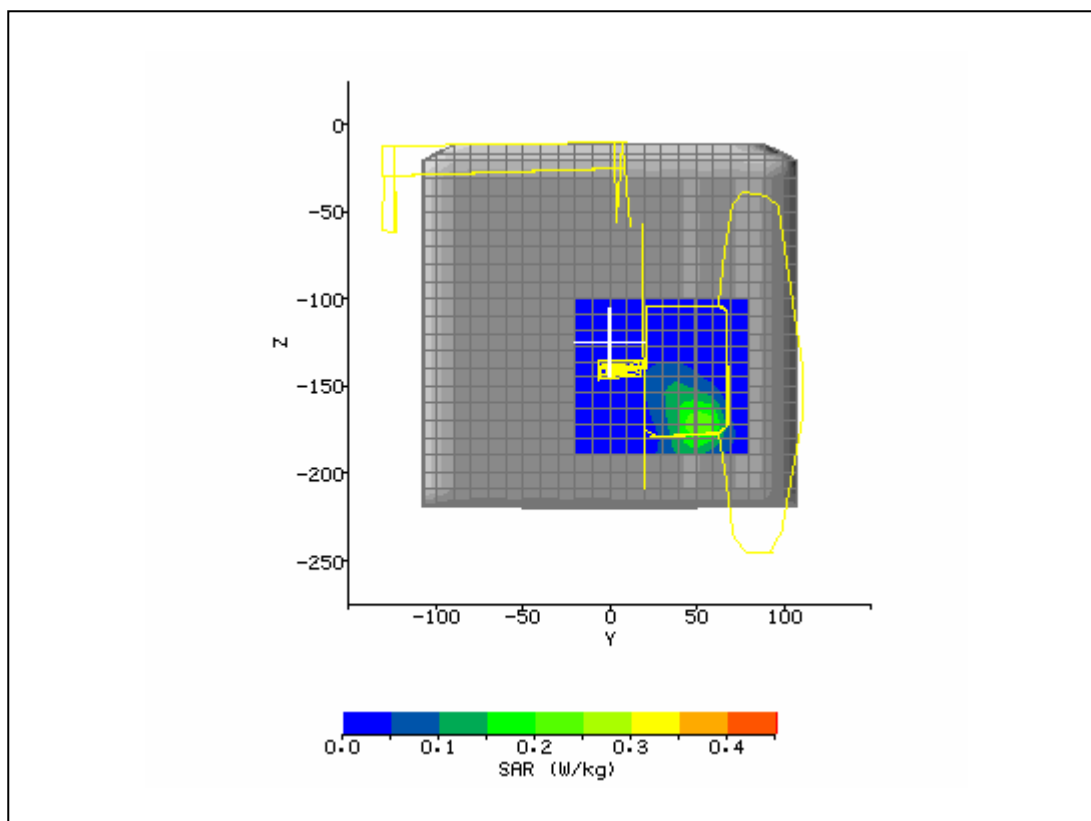

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	10/1/2004 11:08:32 AM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Thales	Relative Permittivity:	52.96
Relative Humidity:	50%	Conductivity:	1.571
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	53.00 mm
DUT Position:	antenna 5 mm from phantom	Max SAR Z-axis Location:	-172.90 mm
Antenna Configuration:	Integral	Max E Field:	10.38 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.130 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.066 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	9/10/2004
Input Power Level:	maximum	Extrapolation:	poly4

