



TEST REPORT

No. I22N00674-RF-LTE

for

TCL Communication Ltd.

LTE/WCDMA/GSM mobile phone

Model Name: T676J

FCC ID: 2ACCJH157

with

Hardware Version: PIO

Software Version: v2B51

Issued Date: 2022-03-11

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,
Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@saict.ac.cn www.saict.ac.cn



No. I22N00674-RF-LTE

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22N00674-RF-LTE	Rev.0	1st edition	2022-03-11

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. STATEMENT.....	13
8. TEST EQUIPMENTS UTILIZED.....	14
ANNEX A: MEASUREMENT RESULTS	15
A.1 OUTPUT POWER.....	15
A.2 FIELD STRENGTH OF SPURIOUS RADIATION.....	48
A.3 FREQUENCY STABILITY	66
A.4 OCCUPIED BANDWIDTH.....	71
A.5 EMISSION BANDWIDTH	107
A.6 BAND EDGE COMPLIANCE.....	143
A.7 CONDUCTED SPURIOUS EMISSION	160
A.8 PEAK-TO-AVERAGE POWER RATIO	167

1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	LTE/WCDMA/GSM mobile phone
Model Name	T676J
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

1.2. Test Standards

FCC Part 2/22/24/27/90	10-1-19 Edition
ANSI C63.26	2015
KDB971168 D01	v03r01

1.3. Test Result

All test items are passed. Please refer to "6 Summary of Test Results" for detail.

1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project Data


Testing Start Date: 2021-12-26

Testing End Date: 2022-01-25


1.6. Signature



Tan Pei
(Prepared this test report)



Huang Qiuqin
(Reviewed this test report)



Zhang Hao
(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
Contact Person: Peter yang
Contact Email: peter.yang@tcl.com
Telephone: +86 755 3664 5759
Fax: 0086-755-36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
Contact Person: Peter yang
Contact Email: peter.yang@tcl.com
Telephone: +86 755 3664 5759
Fax: 0086-755-36612000-81722

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT

(AE)

3.1. About EUT

Description	LTE/WCDMA/GSM mobile phone
Model Name	T676J
FCC ID	2ACCJH157
Frequency Bands	LTE Bands 2,4,5 7,12,13,17,26, 38 ,66
Antenna	Integrated
Extreme vol. Limits	3.5V to 4.4V (nominal: 3.85V)
Condition of EUT as received	No abnormality in appearance

Note1: Components list, please refer to documents of the manufacturer; it is also included in the original test record of SAICT.

Note2: The Declaration of changes from initial T676J to variant T676J are as below:

- 1) The number of card slots is different. The initial T676J is Single SIM. The variant T676J is Dual SIM.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
UT01aa	/	PIO	v2B51	2021-12-23
UT04aa	/	PIO	v2B51	2021-12-23

*EUT ID: is used to identify the test sample in the lab internally.

UT01aa is used for conduction test, UT04aa is used for radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE3	RF Cable

AE1

Model	TLp049B7
Manufacturer	VEKEN
Capacity	5010mAh
Nominal Voltage	3.87V

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model LTE/WCDMA/GSM mobile phone with Integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-19 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-19 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-19 Edition
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01

5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.4 of this report

NOTE: As the frequency band range of LTE Band 26(814-849MHz) overlaps the range of LTE Band 5(824-849MHz),LTE Band 12(699-716MHz) overlaps the range of LTE Band 17 (704-716MHz).LTE Band 66(1710-1780MHz) overlaps the range of LTE Band 4(1710-1755MHz). The channel bandwidth and other perating parameters for LTE Band 4 are fully supported by LTE Band 66, the channel bandwidth and other perating parameters for LTE Band 5 are fully supported by LTE Band 26, the channel bandwidth and other perating parameters for LTE Band 17 are fully supported by LTE Band 12 and the maximum output power of LTE Band 66 is larger than the LTE Band 4, the maximum output power of LTE Band 26 is larger than the LTE Band 5, the maximum output power of LTE Band 12 is larger than the LTE Band 17, we just need to test all the cases of LTE Band 66, LTE Band 26, LTE Band 12.

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/ KDB971168 D01	A.8	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P

4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.5	P
6	Band Edge Compliance	2.1051/27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(c)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(g)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(g)	A.4	P
5	Emission Bandwidth	2.1049/27.53(g)	A.5	P
6	Band Edge Compliance	2.1051/27.53(g)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(g)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 13

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(b)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(c)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(c)	A.4	P
5	Emission Bandwidth	2.1049/27.53(c)	A.5	P
6	Band Edge Compliance	2.1051/27.53(c)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(c)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 26(814MHz-824MHz)

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/90.635	A.1	P
2	Field Strength of Spurious Radiation	2.1053/90.691	A.2	P
3	Frequency Stability	2.1055/90.213	A.3	P
4	Occupied Bandwidth	2.1049/90.1215	A.4	P

5	Emission Bandwidth	2.1049/90.1215	A.5	P
6	Band Edge Compliance	2.1051/90.691	A.6	P
7	Conducted Spurious Emission	2.1051/90.691	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P

LTE band 26(824MHz-849MHz)

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P

LTE Band 38

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.5	P
6	Band Edge Compliance	2.1051/27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 66

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(d)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(h)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(h)	A.4	P
5	Emission Bandwidth	2.1049/27.53(h)	A.5	P
6	Band Edge Compliance	2.1051/27.53(h)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(h)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P



No. I22N00674-RF-LTE

7. STATEMENT

This report is the same as No.I21N03521-RF-LTE. All the original values are quoted directly. We did not perform any additional test case.

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

8. TEST EQUIPMENTS UTILIZED

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101676	2022-11-24
2	BiLog Antenna	3142E	ETS-Lindgren	0224831	2024-05-27
3	Horn Antenna	3117	ETS-Lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2023-07-15
7	Antenna	QWH-SL-18 -40-K-SG	Q-par	15979	2023-01-06
8		83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2022-11-24
10	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2023-05-29
11	Spectrum Analyzer	FSV40	R&S	101192	2023-01-12
12	Universal Radio Communication Tester	CMW500	R&S	152499	2022-07-15
13	Universal Radio Communication Tester	CMW500	R&S	129146	2022-04-24
14	Spectrum Analyzer	FSU	R&S	101506	2022-12-13
15	Temperature Chamber	SH-241	ESPEC	92007516	2022-10-15
16	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2022-11-13
17	Spectrum Analyzer	FSW26	R&S	102197	2022-11-24

Test software

Item	Name	Vesion
Radiated	EMC32	V10.50.40

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 2.1046, 22.913, 24.232, 27.50, 90.542

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1909.3	23.32	22.60
		1880.0	23.29	22.55
		1850.7	23.24	22.51
	1 RB low	1909.3	23.35	22.57
		1880.0	23.27	22.50
		1850.7	23.26	22.52
	50% RB mid	1909.3	23.43	22.51
		1880.0	23.41	22.44
		1850.7	23.44	22.43
	100% RB	1909.3	22.45	21.49
		1880.0	22.39	21.43
		1850.7	22.42	21.46
3MHz	1 RB high	1908.5	23.35	22.66
		1880.0	23.32	22.59
		1851.5	23.31	22.61
	1 RB low	1908.5	23.34	22.67
		1880.0	23.33	22.64
		1851.5	23.28	22.63
	50% RB mid	1908.5	22.46	21.50
		1880.0	22.39	21.40
		1851.5	22.42	21.42
	100% RB	1908.5	22.44	21.42

5MHz	1 RB high	1880.0	22.38	21.37
		1851.5	22.42	21.43
		1907.5	23.26	22.48
	1 RB low	1880.0	23.17	22.39
		1852.5	23.19	22.49
		1907.5	23.24	22.44
	50% RB mid	1880.0	23.18	22.51
		1852.5	23.19	22.49
		1907.5	22.49	21.48
	100% RB	1880.0	22.44	21.42
		1852.5	22.41	21.42
		1907.5	22.47	21.47
	1 RB high	1880.0	22.38	21.35
		1852.5	22.38	21.41
		1907.5	22.47	21.47
10MHz	1 RB high	1905.0	23.34	22.62
		1880.0	23.29	22.69
		1855.0	23.25	22.58
	1 RB low	1905.0	23.34	22.64
		1880.0	23.27	22.60
		1855.0	23.31	22.63
	50% RB mid	1905.0	22.44	21.41
		1880.0	22.40	21.35
		1855.0	22.41	21.41
	100% RB	1905.0	22.45	21.45
		1880.0	22.42	21.35
		1855.0	22.39	21.35
	1 RB high	1902.5	23.24	22.49
		1880.0	23.19	22.50
		1857.5	23.14	22.37
15MHz	1 RB low	1902.5	23.18	22.50
		1880.0	23.21	22.47
		1857.5	23.24	22.51
	50% RB mid	1902.5	22.38	21.37
		1880.0	22.34	21.30
		1857.5	22.45	21.32
	100% RB	1902.5	22.40	21.36
		1880.0	22.39	21.34
		1857.5	22.37	21.37
20MHz	1 RB high	1900.0	23.04	22.39

		1880.0	23.00	22.31
		1860.0	22.94	22.14
	1 RB low	1900.0	22.99	22.37
		1880.0	23.01	22.33
		1860.0	23.03	22.26
	50% RB mid	1900.0	22.40	21.39
		1880.0	22.37	21.34
		1860.0	22.39	21.36
	100% RB	1900.0	22.33	21.34
		1880.0	22.34	21.36
		1860.0	22.38	21.33

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	23.21	22.31
		2535.0	23.20	22.37
		2502.5	23.21	22.34
	1 RB low	2567.5	23.15	22.36
		2535.0	23.20	22.38
		2502.5	23.14	22.28
	50% RB mid	2567.5	22.40	21.45
		2535.0	22.42	21.47
		2502.5	22.38	21.37
	100% RB	2567.5	22.37	21.41
		2535.0	22.37	21.39
		2502.5	22.30	21.31
10MHz	1 RB high	2565.0	23.31	22.47
		2535.0	23.31	22.46
		2505.0	23.36	22.59
	1 RB low	2565.0	23.26	22.52
		2535.0	23.30	22.55
		2505.0	23.23	22.47
	50% RB mid	2565.0	22.37	21.45
		2535.0	22.42	21.45
		2505.0	22.42	21.38
	100% RB	2565.0	22.42	21.48
		2535.0	22.47	21.48
		2505.0	22.33	21.34
15MHz	1 RB high	2562.5	23.31	22.37
		2535.0	23.26	22.39
		2507.5	23.32	22.63
	1 RB low	2562.5	23.17	22.31
		2535.0	23.21	22.53
		2507.5	23.18	22.35
	50% RB mid	2562.5	22.44	21.45
		2535.0	22.46	21.45
		2507.5	22.52	21.43
	100% RB	2562.5	22.43	21.45
		2535.0	22.46	21.47
		2507.5	22.46	21.40

20MHz	1 RB high	2560.0	23.19	22.32
		2535.0	23.11	22.27
		2510.0	23.21	22.45
	1 RB low	2560.0	23.00	22.30
		2535.0	23.05	22.33
		2510.0	22.96	22.11
	50% RB mid	2560.0	22.48	21.51
		2535.0	22.46	21.48
		2510.0	22.51	21.52
	100% RB	2560.0	22.44	21.50
		2535.0	22.43	21.41
		2510.0	22.43	21.41

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	715.3	23.19	22.35
		707.5	23.15	22.43
		699.7	23.19	22.41
	1 RB low	715.3	23.13	22.27
		707.5	23.12	22.33
		699.7	23.09	22.40
	50% RB mid	715.3	23.35	22.20
		707.5	23.36	22.34
		699.7	23.13	22.30
	100% RB	715.3	22.26	21.42
		707.5	22.24	21.37
		699.7	22.29	21.36
3MHz	1 RB high	714.5	23.20	22.37
		707.5	23.21	22.31
		700.5	23.34	22.35
	1 RB low	714.5	23.20	22.40
		707.5	23.19	22.38
		700.5	23.19	22.52
	50% RB mid	714.5	22.29	21.35
		707.5	22.24	21.45
		700.5	22.29	21.23
	100% RB	714.5	22.18	21.27
		707.5	22.19	21.26
		700.5	22.22	21.23
5MHz	1 RB high	713.5	23.16	22.37
		707.5	23.12	22.31
		701.5	23.18	22.46
	1 RB low	713.5	23.08	22.32
		707.5	23.10	22.36
		701.5	23.07	22.30
	50% RB mid	713.5	22.29	21.30
		707.5	22.26	21.33
		701.5	22.31	21.33
	100% RB	713.5	22.22	21.23
		707.5	22.20	21.25
		701.5	22.30	21.36

10MHz	1 RB high	711.0	23.29	22.49
		707.5	23.28	22.45
		704.0	23.19	22.45
	1 RB low	711.0	23.12	22.40
		707.5	23.19	22.43
		704.0	23.15	22.35
	50% RB mid	711.0	22.26	21.35
		707.5	22.27	21.34
		704.0	22.33	21.39
	100% RB	711.0	22.26	21.27
		707.5	22.28	21.30
		704.0	22.45	21.43

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 13

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	784.5	23.11	22.27
		782.0	23.07	22.34
		779.5	23.12	22.34
	1 RB low	784.5	23.06	22.29
		782.0	23.10	22.31
		779.5	23.03	22.39
	50% RB mid	784.5	22.29	21.24
		782.0	22.29	21.19
		779.5	22.32	21.22
	100% RB	784.5	22.29	21.22
		782.0	22.24	21.18
		779.5	22.29	21.24
10MHz	1 RB high	782.0	23.10	22.39
	1 RB low	782.0	22.92	22.16
	50% RB mid	782.0	22.22	21.31
	100% RB	782.0	22.27	21.27

Note: Expanded measurement uncertainty is U = 0.49dB, k = 1.96

LTE band 26(814MHz-824MHz)

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	823.3	23.32	22.50
		819.0	23.30	22.55
		814.7	23.39	22.50
	1 RB low	823.3	23.33	22.23
		819.0	23.32	22.26
		814.7	23.41	22.33
	50% RB mid	823.3	23.34	22.20
		819.0	23.36	22.28
		814.7	23.37	22.31
	100% RB	823.3	23.20	22.38
		819.0	23.25	22.42
		814.7	23.24	22.51
3MHz	1 RB high	822.5	23.33	22.53
		819.0	23.42	22.56
		815.5	22.22	22.62
	1 RB low	822.5	22.23	21.32
		819.0	22.24	21.27
		815.5	23.17	21.39
	50% RB mid	822.5	22.25	21.32
		819.0	22.22	21.29
		815.5	23.22	21.35
	100% RB	822.5	22.28	21.26
		819.0	22.34	21.30
		815.5	22.30	21.28
5MHz	1 RB high	821.5	23.50	22.55
		819.0	23.43	22.59
		816.5	23.41	22.65
	1 RB low	821.5	22.27	21.25
		819.0	22.24	21.18
		816.5	22.27	21.20
	50% RB mid	821.5	22.21	21.20
		819.0	22.21	21.16
		816.5	22.27	21.22
	100% RB	821.5	22.25	21.25
		819.0	22.28	21.25
		816.5	22.23	21.17

10MHz	1 RB high	819.0	23.21	22.63
		819.0	23.37	22.63
		819.0	23.32	22.58
	1 RB low	819.0	22.32	21.31
		821.5	22.35	21.35
		819.0	22.23	21.24
	50% RB mid	816.5	22.34	21.35
		821.5	22.30	21.26
		819.0	22.25	21.26
	100% RB	816.5	22.23	21.54
		821.5	22.55	21.66
		819.0	22.36	21.26

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 26(824MHz-849MHz)

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	23.22	22.42
		836.5	23.24	22.40
		824.7	23.30	22.39
	1 RB low	848.3	23.21	22.43
		836.5	23.22	22.48
		824.7	23.25	22.40
	50% RB mid	848.3	23.39	22.26
		836.5	23.44	22.34
		824.7	23.40	22.40
	100% RB	848.3	22.32	21.29
		836.5	22.35	21.37
		824.7	22.37	21.38
3MHz	1 RB high	847.5	23.19	22.33
		836.5	23.21	22.43
		825.5	22.21	22.42
	1 RB low	847.5	23.16	22.37
		836.5	23.21	22.48
		825.5	22.23	22.44
	50% RB mid	847.5	22.26	21.32
		836.5	22.27	21.33
		825.5	23.19	21.41
	100% RB	847.5	22.25	21.26
		836.5	22.20	21.26
		825.5	22.20	21.28
5MHz	1 RB high	846.5	23.10	22.26
		836.5	23.14	22.39
		826.5	23.10	22.41
	1 RB low	846.5	23.02	22.33
		836.5	23.11	22.42
		826.5	23.15	22.43
	50% RB mid	846.5	22.26	21.25
		836.5	22.29	21.30
		826.5	22.32	21.21
	100% RB	846.5	22.27	21.26
		836.5	22.27	21.25
		826.5	22.28	21.28
10MHz	1 RB high	844.0	23.21	22.47

		836.5	23.22	22.50
		829.0	23.25	22.50
		844.0	23.17	22.49
	1 RB low	836.5	23.20	22.50
		829.0	23.20	22.47
		844.0	22.30	21.28
	50% RB mid	836.5	22.32	21.31
		829.0	22.27	21.28
		844.0	22.33	21.29
	100% RB	836.5	22.35	21.28
		829.0	22.25	21.26
		841.5	23.16	22.30
15MHz	1 RB high	836.5	23.14	22.37
		831.5	23.21	22.46
		841.5	23.05	22.21
	1 RB low	836.5	23.06	22.31
		831.5	23.11	22.33
		841.5	22.27	21.24
	50% RB mid	836.5	22.31	21.29
		831.5	22.28	21.29
		841.5	22.29	21.26
	100% RB	836.5	22.32	21.28
		831.5	22.25	21.24

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 38

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2617.5	23.10	22.18
		2595.0	23.09	22.17
		2572.5	23.10	22.19
	1 RB low	2617.5	23.09	22.17
		2595.0	23.08	22.16
		2572.5	23.12	22.22
	50% RB mid	2617.5	22.28	21.27
		2595.0	22.23	21.24
		2572.5	22.30	21.28
	100% RB	2617.5	22.18	21.28
		2595.0	22.20	21.25
		2572.5	22.27	21.31
10MHz	1 RB high	2615.0	23.18	22.26
		2595.0	23.20	22.28
		2575.0	23.19	22.28
	1 RB low	2615.0	23.20	22.29
		2595.0	23.17	22.28
		2575.0	23.23	22.34
	50% RB mid	2615.0	22.23	21.30
		2595.0	22.25	21.30
		2575.0	22.28	21.33
	100% RB	2615.0	22.22	21.26
		2595.0	22.21	21.27
		2575.0	22.24	21.32
15MHz	1 RB high	2612.5	23.13	22.19
		2595.0	23.12	22.20
		2577.5	23.15	22.23
	1 RB low	2612.5	23.13	22.21
		2595.0	23.13	22.22
		2577.5	23.12	22.27
	50% RB mid	2612.5	22.27	21.22
		2595.0	22.26	21.22
		2577.5	22.28	21.24
	100% RB	2612.5	22.17	21.23
		2595.0	22.21	21.22
		2577.5	22.24	21.28

20MHz	1 RB high	2610.0	22.98	22.00
		2595.0	22.96	22.02
		2580.0	22.97	22.04
	1 RB low	2610.0	23.00	22.05
		2595.0	22.99	22.05
		2580.0	23.01	22.09
	50% RB mid	2610.0	22.20	21.25
		2595.0	22.21	21.24
		2580.0	22.23	21.29
	100% RB	2610.0	22.23	21.27
		2595.0	22.25	21.31
		2580.0	22.27	21.34

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 66

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1779.3	23.13	22.51
		1745.0	23.13	22.52
		1710.7	23.12	22.37
	1 RB low	1779.3	23.11	22.48
		1745.0	23.13	22.53
		1710.7	23.11	22.36
	50% RB mid	1779.3	23.28	22.27
		1745.0	23.30	22.36
		1710.7	23.27	22.26
	100% RB	1779.3	22.29	21.40
		1745.0	22.29	21.38
		1710.7	22.27	21.33
3MHz	1 RB high	1778.5	23.16	22.43
		1745.0	23.25	22.48
		1711.5	23.14	22.41
	1 RB low	1778.5	23.17	22.45
		1745.0	23.24	22.53
		1711.5	23.20	22.46
	50% RB mid	1778.5	22.32	21.34
		1745.0	22.34	21.37
		1711.5	22.31	21.31
	100% RB	1778.5	22.29	21.30
		1745.0	22.29	21.28
		1711.5	22.29	21.29
5MHz	1 RB high	1777.5	23.05	22.37
		1745.0	23.13	22.38
		1712.5	23.07	22.25
	1 RB low	1777.5	23.14	22.46
		1745.0	23.13	22.42
		1712.5	23.07	22.28
	50% RB mid	1777.5	22.35	21.32
		1745.0	22.36	21.36
		1712.5	22.34	21.33
	100% RB	1777.5	22.30	21.32
		1745.0	22.35	21.31
		1712.5	22.30	21.26
10MHz	1 RB high	1775.0	23.17	22.47

		1745.0	23.23	22.52
		1715.0	23.17	22.45
		1775.0	23.25	22.61
	1 RB low	1745.0	23.27	22.53
		1715.0	23.26	22.49
		1775.0	22.37	21.33
	50% RB mid	1745.0	22.37	21.36
		1715.0	22.32	21.30
		1775.0	22.36	21.32
	100% RB	1745.0	22.36	21.34
		1715.0	22.36	21.32
15MHz	1 RB high	1772.5	23.10	22.39
		1745.0	23.17	22.46
		1717.5	23.10	22.36
	1 RB low	1772.5	23.23	22.55
		1745.0	23.22	22.57
		1717.5	23.17	22.44
	50% RB mid	1772.5	22.35	21.32
		1745.0	22.31	21.29
		1717.5	22.30	21.26
	100% RB	1772.5	22.32	21.31
		1745.0	22.34	21.28
		1717.5	22.29	21.27
20MHz	1 RB high	1770.0	22.93	22.22
		1745.0	22.96	22.22
		1720.0	22.92	22.30
	1 RB low	1770.0	23.07	22.40
		1745.0	23.05	22.37
		1720.0	22.96	22.31
	50% RB mid	1770.0	22.37	21.36
		1745.0	22.39	21.35
		1720.0	22.32	21.28
	100% RB	1770.0	22.28	21.28
		1745.0	22.33	21.33
		1720.0	22.23	21.20

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


Rule Part 27.50(a)(3) specifies "For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth." Rule Part 90.635(b) specifies "The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw)."

A.1.3.2 Method of Measurement

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

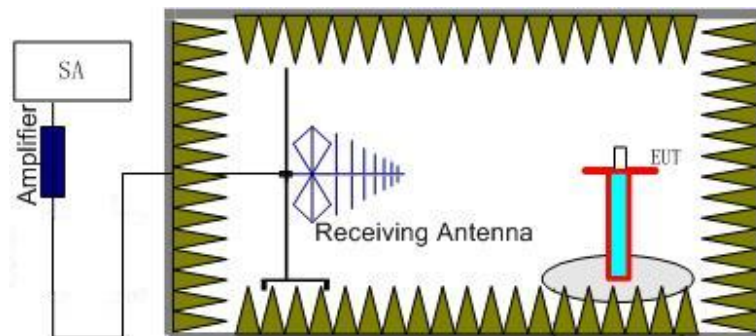

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

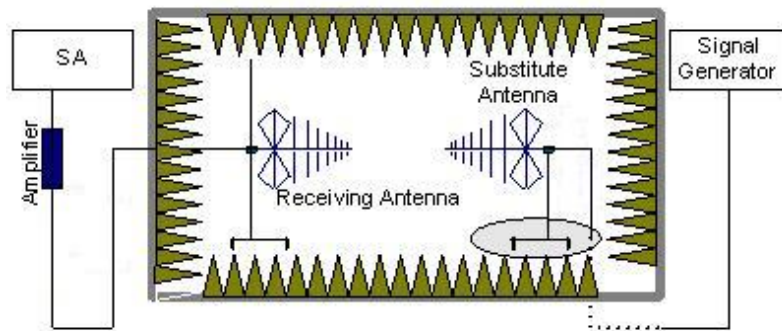

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss (P_{cl}), the substitution Antenna Gain(dBi) (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.1.3.3 Measurement result

LTE Band 2- EIRP Part 24. 232(b)

Limits: ≤33dBm (2W)

LTE Band 2_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-14.10	-29.30	8.10	23.30	33.00	H
1880.00	-14.09	-29.40	8.10	23.41	33.00	H
1909.30	-14.06	-29.30	8.10	23.34	33.00	H

LTE Band 2_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-13.67	-29.30	8.10	23.73	33.00	H
1880.00	-13.39	-29.40	8.10	24.11	33.00	H
1908.50	-13.63	-29.30	8.10	23.77	33.00	H

LTE Band 2_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-14.81	-29.30	8.10	22.59	33.00	H
1880.00	-15.20	-29.40	8.10	22.30	33.00	H
1907.50	-15.13	-29.30	8.10	22.27	33.00	H

LTE Band 2_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-15.14	-29.30	8.10	22.26	33.00	H
1880.00	-15.46	-29.40	8.10	22.04	33.00	H
1905.00	-15.01	-29.30	8.10	22.39	33.00	H

LTE Band 2_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-16.26	-29.30	8.10	21.14	33.00	H
1880.00	-15.79	-29.40	8.10	21.71	33.00	H
1902.50	-15.61	-29.30	8.10	21.79	33.00	H

LTE Band 2_20 MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-14.88	-29.30	8.10	22.52	33.00	H
1880.00	-15.34	-29.40	8.10	22.16	33.00	H
1900.00	-15.53	-29.30	8.10	21.87	33.00	H

LTE Band 2_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-14.27	-29.30	8.10	23.13	33.00	H
1880.00	-14.72	-29.40	8.10	22.78	33.00	H
1909.30	-14.79	-29.30	8.10	22.61	33.00	H

LTE Band 2_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-15.10	-29.30	8.10	22.30	33.00	H
1880.00	-14.88	-29.40	8.10	22.62	33.00	H
1908.50	-14.42	-29.30	8.10	22.98	33.00	H

LTE Band 2_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-14.87	-29.30	8.10	22.53	33.00	H
1880.00	-15.06	-29.40	8.10	22.44	33.00	H
1907.50	-15.05	-29.30	8.10	22.35	33.00	H

LTE Band 2_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-15.10	-29.30	8.10	22.30	33.00	H
1880.00	-15.38	-29.40	8.10	22.12	33.00	H
1905.00	-15.81	-29.30	8.10	21.59	33.00	H

LTE Band 2_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-16.14	-29.30	8.10	21.26	33.00	H
1880.00	-15.75	-29.40	8.10	21.75	33.00	H
1902.50	-15.66	-29.30	8.10	21.74	33.00	H

LTE Band 2_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-15.56	-29.30	8.10	21.84	33.00	H
1880.00	-15.79	-29.40	8.10	21.71	33.00	H
1900.00	-15.83	-29.30	8.10	21.57	33.00	H

Peak EIRP (dBm)=P_{Mea}(-13.39dBm)-(P_{cl}+P_{Ag})(-29.40dB)+G_a(8.10dB) =24.11dBm

LTE Band 7- EIRP Part 27.50(h)(2)
Limits: ≤33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-19.48	-28.70	10.70	19.92	33.00	H
2535.00	-19.59	-28.60	10.70	19.71	33.00	H
2567.50	-19.63	-28.60	10.70	19.67	33.00	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-19.76	-28.70	10.70	19.64	33.00	H
2535.00	-19.25	-28.60	10.70	20.05	33.00	H
2565.00	-19.92	-28.60	10.70	19.38	33.00	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-19.41	-28.70	10.70	19.99	33.00	H
2535.00	-19.45	-28.60	10.70	19.85	33.00	H
2562.50	-19.48	-28.60	10.70	19.82	33.00	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-19.02	-28.70	10.70	20.38	33.00	H
2535.00	-19.00	-28.60	10.70	20.30	33.00	H
2560.00	-18.46	-28.60	10.70	20.84	33.00	H

LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-20.18	-28.70	10.70	19.22	33.00	H
2535.00	-19.60	-28.60	10.70	19.70	33.00	H
2567.50	-20.14	-28.60	10.70	19.16	33.00	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-19.29	-28.70	10.70	20.11	33.00	H
2535.00	-19.59	-28.60	10.70	19.71	33.00	H
2565.00	-19.21	-28.60	10.70	20.09	33.00	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-20.05	-28.70	10.70	19.35	33.00	H
2535.00	-19.32	-28.60	10.70	19.98	33.00	H
2562.50	-19.18	-28.60	10.70	20.12	33.00	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-18.80	-28.70	10.70	20.60	33.00	H
2535.00	-18.50	-28.60	10.70	20.80	33.00	H
2560.00	-18.81	-28.60	10.70	20.49	33.00	H

Peak EIRP (dBm)=P_{Mea}(-18.26dBm)-(P_{cl}+P_{Ag})(-28.60dB)+G_a(10.70dB) =20.84dBm

LTE Band 12 - ERP Part 27.50(c)(10)
Limits: ≤34.77dBm (3W)

LTE Band 12 1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-12.91	-34.80	-0.93	2.15	18.81	34.77	V
707.50	-12.91	-34.70	-0.91	2.15	18.73	34.77	V
715.30	-13.44	-34.70	-0.68	2.15	18.43	34.77	V

LTE Band 12 3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-13.19	-34.80	-0.97	2.15	18.49	34.77	V
707.50	-12.73	-34.70	-0.91	2.15	18.91	34.77	V
714.50	-12.92	-34.70	-0.64	2.15	18.99	34.77	V

LTE Band 12 5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-12.73	-34.80	-0.97	2.15	18.95	34.77	V
707.50	-12.72	-34.70	-0.91	2.15	18.92	34.77	V
713.50	-12.95	-34.70	-0.64	2.15	18.96	34.77	V

LTE Band 12 10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-13.04	-34.80	-0.97	2.15	18.64	34.77	V
707.50	-13.33	-34.70	-0.91	2.15	18.31	34.77	V
711.00	-12.83	-34.70	-0.64	2.15	19.08	34.77	V

LTE Band 12_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-13.54	-34.80	-0.93	2.15	18.18	34.77	V
707.50	-13.36	-34.70	-0.91	2.15	18.28	34.77	V
715.30	-13.66	-34.70	-0.68	2.15	18.21	34.77	V

LTE Band 12_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-13.36	-34.80	-0.97	2.15	18.32	34.77	V
707.50	-12.91	-34.70	-0.91	2.15	18.73	34.77	V
714.50	-13.10	-34.70	-0.64	2.15	18.81	34.77	V

LTE Band 12_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-12.96	-34.80	-0.97	2.15	18.72	34.77	V
707.50	-12.90	-34.70	-0.91	2.15	18.74	34.77	V
713.50	-13.10	-34.70	-0.64	2.15	18.81	34.77	V

LTE Band 12_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-13.16	-34.80	-0.97	2.15	18.52	34.77	V
707.50	-13.41	-34.70	-0.91	2.15	18.23	34.77	V
711.00	-13.10	-34.70	-0.64	2.15	18.81	34.77	V

Peak ERP (dBm)=P_{Mea}(-12.83Bm)-(P_{cl}+P_{Ag})(-34.70dB)+G_a(-0.64dB) -2.15dB =19.08dBm

LTE Band 13- ERP Part 27.50(b)(10)
Limits: ≤34.77dBm (3W)

LTE Band 13_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-12.95	-34.00	-0.08	2.15	18.82	34.77	V
782.00	-13.09	-34.00	-0.13	2.15	18.63	34.77	V
784.50	-13.35	-34.00	-0.13	2.15	18.37	34.77	V

LTE Band 13_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-12.58	-34.00	-0.13	2.15	19.14	34.77	V

LTE Band 13_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-13.04	-34.00	-0.08	2.15	18.73	34.77	V
782.00	-13.20	-34.00	-0.13	2.15	18.52	34.77	V
784.50	-13.57	-34.00	-0.13	2.15	18.15	34.77	V

LTE Band 13_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-12.81	-34.00	-0.13	2.15	18.91	34.77	V

Peak ERP (dBm)=P_{Mea}(-12.58dBm)-(P_{cl}+P_{Ag})(-34.00dB)+G_a(-0.13dB) -2.15dB =19.14dBm

LTE band 26(814MHz-824MHz)- ERP Part 90.635(b)
Limits: ≤50.00dBm (100W)

LTE band 26(814MHz-824MHz)_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-11.14	-33.70	-0.80	2.15	19.61	50.00	H
819.00	-11.32	-33.60	-0.75	2.15	19.38	50.00	H
823.30	-11.83	-33.60	-0.79	2.15	18.83	50.00	H

LTE band 26(814MHz-824MHz)_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-11.21	-33.70	-0.80	2.15	19.54	50.00	H
819.00	-11.28	-33.60	-0.75	2.15	19.42	50.00	H
822.50	-11.70	-33.60	-0.79	2.15	18.96	50.00	H

LTE band 26(814MHz-824MHz)_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-11.13	-33.70	-0.80	2.15	19.62	50.00	H
819.00	-11.24	-33.60	-0.75	2.15	19.46	50.00	H
821.50	-11.27	-33.60	-0.79	2.15	19.39	50.00	H

LTE band 26(814MHz-824MHz)_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
819.00	-11.60	-33.60	-0.80	2.15	19.05	50.00	H
819.00	-11.65	-33.60	-0.75	2.15	19.05	50.00	H
819.00	-11.61	-33.60	-0.79	2.15	19.05	50.00	H

LTE band 26(814MHz-824MHz)_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-11.96	-33.70	-0.80	2.15	18.79	50.00	H
819.00	-11.30	-33.60	-0.75	2.15	19.40	50.00	H
823.30	-11.19	-33.60	-0.79	2.15	19.47	50.00	H

LTE band 26(814MHz-824MHz)_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-11.94	-33.70	-0.80	2.15	18.81	50.00	H
819.00	-11.33	-33.60	-0.75	2.15	19.37	50.00	H
822.50	-11.35	-33.60	-0.79	2.15	19.31	50.00	H

LTE band 26(814MHz-824MHz)_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-11.48	-33.70	-0.80	2.15	19.27	50.00	H
819.00	-11.35	-33.60	-0.75	2.15	19.35	50.00	H
821.50	-11.15	-33.60	-0.79	2.15	19.51	50.00	H

LTE band 26(814MHz-824MHz)_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
819.00	-11.74	-33.60	-0.80	2.15	18.91	50.00	H
819.00	-11.79	-33.60	-0.75	2.15	18.91	50.00	H
819.00	-11.75	-33.60	-0.79	2.15	18.91	50.00	H

Peak ERP (dBm)=P_{Mea}(-11.13dBm)-(P_{cl}+P_{Ag})(-33.70dB)+G_a(-0.80dB) -2.15 =19.62dBm

LTE band 26(824MHz-849MHz)- ERP Part 22.913(a)
Limits: ≤38.45dBm (7W)

LTE band 26(824MHz-849MHz)_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-11.27	-33.60	-0.79	2.15	19.39	38.45	H
836.50	-10.83	-33.50	-0.74	2.15	19.78	38.45	H
848.30	-11.03	-33.50	-0.73	2.15	19.59	38.45	H

LTE band 26(824MHz-849MHz)_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-11.20	-33.60	-0.79	2.15	19.46	38.45	H
836.50	-10.73	-33.50	-0.74	2.15	19.88	38.45	H
847.50	-11.04	-33.50	-0.73	2.15	19.58	38.45	H

LTE band 26(824MHz-849MHz)_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-11.36	-33.60	-0.79	2.15	19.30	38.45	H
836.50	-10.88	-33.50	-0.74	2.15	19.73	38.45	H
846.50	-10.97	-33.50	-0.73	2.15	19.65	38.45	H

LTE band 26(824MHz-849MHz)_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-10.75	-33.60	-0.79	2.15	19.91	38.45	H
836.50	-10.68	-33.50	-0.74	2.15	19.93	38.45	H
844.00	-10.96	-33.50	-0.73	2.15	19.66	38.45	H

LTE band 26(824MHz-849MHz)_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
831.50	-11.31	-33.60	-0.79	2.15	19.35	38.45	H
836.50	-11.39	-33.50	-0.74	2.15	19.22	38.45	H
841.50	-11.47	-33.50	-0.73	2.15	19.15	38.45	H

LTE band 26(824MHz-849MHz)_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-11.26	-33.60	-0.79	2.15	19.40	38.45	H
836.50	-11.02	-33.50	-0.74	2.15	19.59	38.45	H
848.30	-11.57	-33.50	-0.73	2.15	19.05	38.45	H

LTE band 26(824MHz-849MHz)_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-11.31	-33.60	-0.79	2.15	19.35	38.45	H
836.50	-10.91	-33.50	-0.74	2.15	19.70	38.45	H
847.50	-11.31	-33.50	-0.73	2.15	19.31	38.45	H

LTE band 26(824MHz-849MHz)_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-11.24	-33.60	-0.79	2.15	19.42	38.45	H
836.50	-11.06	-33.50	-0.74	2.15	19.55	38.45	H
846.50	-11.41	-33.50	-0.73	2.15	19.21	38.45	H

LTE band 26(824MHz-849MHz)_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-11.09	-33.60	-0.79	2.15	19.57	38.45	H
836.50	-10.90	-33.50	-0.74	2.15	19.71	38.45	H
844.00	-10.89	-33.50	-0.73	2.15	19.73	38.45	H

LTE band 26(824MHz-849MHz)_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
831.50	-11.75	-33.60	-0.79	2.15	18.91	38.45	H
836.50	-11.51	-33.50	-0.74	2.15	19.10	38.45	H
841.50	-11.33	-33.50	-0.73	2.15	19.29	38.45	H

Peak ERP (dBm)=P_{Mea}(-10.68dBm)-(P_{cl}+P_{Ag})(-33.50dB)+G_a(-0.74dB) -2.15=19.93dBm

LTE Band 38 - EIRP Part 27.50(h)(2)
Limits: ≤33dBm (2W)

LTE Band 38_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2572.50	-19.61	-28.60	10.70	19.69	33.00	H
2595.00	-20.01	-28.60	10.70	19.29	33.00	H
2617.50	-20.12	-28.60	10.70	19.18	33.00	H

LTE Band 38_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2575.00	-19.88	-28.60	10.70	19.42	33.00	H
2595.00	-19.67	-28.60	10.70	19.63	33.00	H
2615.00	-19.41	-28.60	10.70	19.89	33.00	H

LTE Band 38_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2577.50	-19.27	-28.60	10.70	20.03	33.00	H
2595.00	-19.89	-28.60	10.70	19.41	33.00	H
2612.50	-19.99	-28.60	10.70	19.31	33.00	H

LTE Band 38_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2580.00	-18.39	-28.60	10.70	20.91	33.00	H
2595.00	-18.21	-28.60	10.70	21.09	33.00	H
2610.00	-18.62	-28.60	10.70	20.68	33.00	H

LTE Band 38_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2572.50	-19.06	-28.60	10.70	20.24	33.00	H
2595.00	-19.58	-28.60	10.70	19.72	33.00	H
2617.50	-19.88	-28.60	10.70	19.42	33.00	H

LTE Band 38_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2575.00	-19.33	-28.60	10.70	19.97	33.00	H
2595.00	-20.12	-28.60	10.70	19.18	33.00	H
2615.00	-19.71	-28.60	10.70	19.59	33.00	H

LTE Band 38_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2577.50	-19.42	-28.60	10.70	19.88	33.00	H
2595.00	-19.38	-28.60	10.70	19.92	33.00	H
2612.50	-19.47	-28.60	10.70	19.83	33.00	H

LTE Band 38_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2580.00	-18.92	-28.60	10.70	20.38	33.00	H
2595.00	-18.50	-28.60	10.70	20.80	33.00	H
2610.00	-18.73	-28.60	10.70	20.57	33.00	H

Peak EIRP (dBm)=P_{Mea}(-18.21dBm)-(P_{cl}+P_{Ag}) (-28.60dB)+G_a(10.70dB) =21.09dBm

LTE Band 66- EIRP Part 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 66_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-14.59	-29.60	8.10	23.11	30.00	H
1745.00	-15.19	-29.50	8.10	22.41	30.00	H
1779.30	-15.14	-29.50	8.10	22.46	30.00	H

LTE Band 66_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-14.83	-29.60	8.10	22.87	30.00	H
1745.00	-16.15	-29.50	8.10	21.45	30.00	H
1778.50	-13.91	-29.50	8.10	23.69	30.00	H

LTE Band 66_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-15.77	-29.60	8.10	21.93	30.00	H
1745.00	-16.89	-29.50	8.10	20.71	30.00	H
1777.50	-15.54	-29.50	8.10	22.06	30.00	H

LTE Band 66_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-17.72	-29.60	8.10	19.98	30.00	H
1745.00	-17.54	-29.50	8.10	20.06	30.00	H
1775.00	-16.57	-29.50	8.10	21.03	30.00	H

LTE Band 66_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-17.76	-29.60	8.10	19.94	30.00	H
1745.00	-18.18	-29.50	8.10	19.42	30.00	H
1772.53	-17.27	-29.50	8.10	20.33	30.00	H

LTE Band 66_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-15.21	-29.60	8.10	22.49	30.00	H
1745.00	-14.42	-29.50	8.10	23.18	30.00	H
1770.00	-16.59	-29.50	8.10	21.01	30.00	H

LTE Band 66_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-15.38	-29.60	8.10	22.32	30.00	H
1745.00	-15.11	-29.50	8.10	22.49	30.00	H
1779.30	-14.88	-29.50	8.10	22.72	30.00	H

LTE Band 66_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-15.41	-29.60	8.10	22.29	30.00	H
1745.00	-15.56	-29.50	8.10	22.04	30.00	H
1778.50	-15.28	-29.50	8.10	22.32	30.00	H

LTE Band 66_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-15.43	-29.60	8.10	22.27	30.00	H
1745.00	-16.33	-29.50	8.10	21.27	30.00	H
1777.50	-14.89	-29.50	8.10	22.71	30.00	H

LTE Band 66_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-17.58	-29.60	8.10	20.12	30.00	H
1745.00	-17.20	-29.50	8.10	20.40	30.00	H
1775.00	-17.04	-29.50	8.10	20.56	30.00	H

LTE Band 66_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-17.73	-29.60	8.10	19.97	30.00	H
1745.00	-17.75	-29.50	8.10	19.85	30.00	H
1772.53	-16.84	-29.50	8.10	20.76	30.00	H

LTE Band 66_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-15.83	-29.60	8.10	21.87	30.00	H
1745.00	-15.11	-29.50	8.10	22.49	30.00	H
1770.00	-17.02	-29.50	8.10	20.58	30.00	H

Peak EIRP (dBm)=P_{Mea}(-13.91dBm)-(P_{cl}+P_{Ag})(-29.50dB)+G_a(8.10dB) =23.69dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: The maximum value of expanded measurement uncertainty for this test item is U =

2.87dB(30MHz-3GHz)/3.35dB(3GHz-18GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference

FCC: CFR 2.1053, 22.917, 24.238, 27.53, 90.543(e), 90.691.


A.2.1 Measurement Method

This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, 24.238, 27.53(h) and 90.691. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2,4,5,7,12,13,17,26 ,38, 66.

The procedure of radiated spurious emissions is as follows:

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

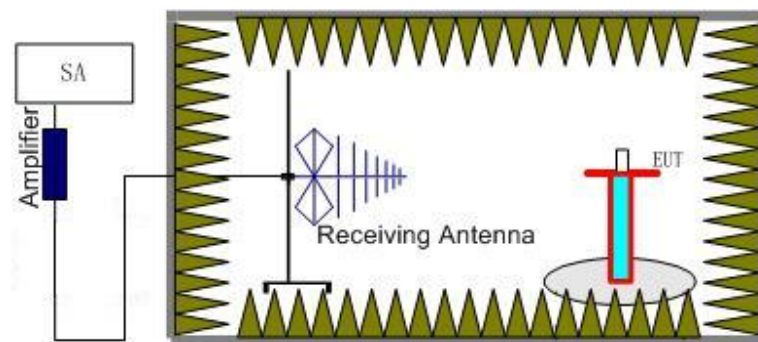

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

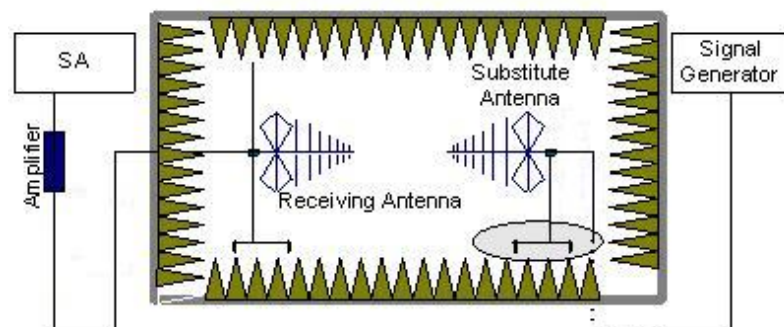

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2,4,5,7,12,13,17,26 ,38, 66. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2,4,5,7,12,13,17,26 ,38, 66 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Only worst case result is given below.

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2878.80	-63.52	1.00	10.70	-51.67	-13.00	H
3700.40	-66.46	1.20	12.20	-55.46	-13.00	V
5550.40	-67.06	1.40	13.10	-55.36	-13.00	H
8081.30	-63.58	2.00	11.30	-54.28	-13.00	V
11156.90	-57.17	2.50	10.50	-49.17	-13.00	V
14881.50	-53.86	2.70	11.20	-45.36	-13.00	H

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2791.60	-60.90	1.00	10.70	-51.20	-13.00	V
3758.80	-68.45	1.10	12.20	-57.35	-13.00	V
5638.80	-64.56	1.30	13.10	-52.76	-13.00	V
9952.40	-59.96	2.20	11.20	-50.96	-13.00	H
15290.70	-54.93	2.70	12.40	-45.23	-13.00	H
17748.10	-52.53	3.60	12.80	-43.33	-13.00	H

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2790.80	-61.23	1.00	10.70	-51.53	-13.00	V
3818.00	-67.32	1.20	12.20	-56.32	-13.00	V
5727.20	-63.77	1.50	13.10	-52.17	-13.00	V
7104.50	-65.06	1.90	12.00	-54.96	-13.00	H
10055.80	-60.32	2.20	11.30	-51.22	-13.00	V
14800.10	-54.42	2.50	11.20	-45.72	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2808.40	-62.88	1.00	10.70	-51.03	-13.00	V
3700.80	-64.69	1.20	12.20	-53.69	-13.00	V
5550.80	-67.80	1.40	13.10	-56.10	-13.00	V
7413.60	-64.56	1.90	12.00	-54.46	-13.00	H
11262.50	-57.18	2.60	10.50	-49.28	-13.00	V
14818.80	-53.85	2.50	11.20	-45.15	-13.00	V

LTE Band 2, 1.4MHz, 16QAM, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2791.20	-61.07	1.00	10.70	-51.37	-13.00	V
3759.20	-70.16	1.10	12.20	-59.06	-13.00	V
5638.80	-65.97	1.30	13.10	-54.17	-13.00	V
7102.30	-64.62	1.90	12.00	-54.52	-13.00	V
11057.90	-57.22	2.30	10.50	-49.02	-13.00	V
14805.60	-54.07	2.50	11.20	-45.37	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2788.80	-60.76	1.00	10.70	-51.06	-13.00	V
3817.20	-67.10	1.20	12.20	-56.10	-13.00	V
5726.40	-61.33	1.50	13.10	-49.73	-13.00	V
7997.70	-63.62	1.90	11.30	-54.22	-13.00	H
14884.80	-54.22	2.70	11.20	-45.72	-13.00	H
17745.90	-53.29	3.60	12.80	-44.09	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2796.00	-61.27	1.00	10.70	-51.57	-25.00	V
3926.80	-72.36	1.30	12.20	-61.46	-25.00	V
4822.40	-69.42	1.30	12.50	-58.22	-25.00	H
6494.00	-67.94	1.70	13.10	-56.54	-25.00	H
9907.30	-59.59	2.20	11.20	-50.59	-25.00	V
14847.40	-53.78	2.70	11.20	-45.28	-25.00	H

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2798.00	-61.13	1.00	10.70	-51.43	-25.00	V
3940.80	-72.46	1.30	12.20	-61.56	-25.00	H
4769.20	-69.90	1.30	12.50	-58.70	-25.00	H
7091.30	-65.02	1.80	12.00	-54.82	-25.00	V
9961.20	-59.42	2.20	11.20	-50.42	-25.00	V
14750.60	-54.49	2.50	11.20	-45.79	-25.00	H

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2852.40	-62.09	1.00	10.70	-52.39	-25.00	H
3939.20	-72.36	1.30	12.20	-61.46	-25.00	H
5139.60	-68.53	1.30	12.50	-57.33	-25.00	V
7118.80	-64.82	1.90	12.00	-54.72	-25.00	V
11060.10	-57.70	2.30	10.50	-49.50	-25.00	V
14847.40	-54.16	2.70	11.20	-45.66	-25.00	H

LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2912.40	-61.29	1.00	10.70	-51.59	-25.00	V
4120.80	-72.03	1.20	12.40	-60.83	-25.00	H
4760.40	-69.42	1.30	12.50	-58.22	-25.00	H
7102.30	-64.33	1.90	12.00	-54.23	-25.00	V
11193.20	-57.26	2.50	10.50	-49.26	-25.00	V
2912.40	-61.29	1.00	10.70	-51.59	-25.00	V

LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2953.60	-60.88	1.00	10.70	-51.18	-25.00	H
4840.40	-69.70	1.30	12.50	-58.50	-25.00	H
7086.90	-65.29	1.80	12.00	-55.09	-25.00	H
9904.00	-60.42	2.20	11.20	-51.42	-25.00	V
14773.70	-54.46	2.50	11.20	-45.76	-25.00	V
17745.90	-52.58	3.60	12.80	-43.38	-25.00	H

LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2910.40	-61.07	1.00	10.70	-51.37	-25.00	V
4826.00	-69.46	1.30	12.50	-58.26	-25.00	V
7112.20	-65.16	1.90	12.00	-55.06	-25.00	V
9906.20	-59.83	2.20	11.20	-50.83	-25.00	V
14796.80	-53.92	2.50	11.20	-45.22	-25.00	H
17640.30	-52.86	3.30	12.80	-43.36	-25.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1398.40	-47.50	0.70	6.00	-44.35	-13.00	V
2098.00	-60.85	0.90	9.80	-54.10	-13.00	H
2794.40	-62.19	1.00	10.70	-54.64	-13.00	V
4195.60	-71.37	1.20	12.40	-62.32	-13.00	V
4755.20	-71.36	1.30	12.50	-62.31	-13.00	H
5932.70	-72.12	1.50	13.10	-62.67	-13.00	H

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1414.00	-47.47	0.70	6.00	-44.32	-13.00	V
2121.20	-61.06	0.90	9.80	-54.31	-13.00	H
2786.00	-62.32	1.00	10.70	-54.77	-13.00	V
3943.60	-74.63	1.30	12.20	-65.88	-13.00	H
4756.40	-71.43	1.30	12.50	-62.38	-13.00	H
5933.30	-71.76	1.50	13.10	-62.31	-13.00	H

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1429.60	-46.99	0.70	6.00	-43.84	-13.00	H
2144.40	-60.62	0.90	9.80	-53.87	-13.00	H
2403.20	-59.39	0.90	9.80	-52.64	-13.00	V
3574.00	-75.26	1.10	12.20	-66.31	-13.00	V
3940.40	-73.63	1.30	12.20	-64.88	-13.00	H
4289.20	-71.83	1.20	12.40	-62.78	-13.00	V

LTE Band 12, 1.4MHz, 16QAM, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1398.40	-47.56	0.70	6.00	-44.41	-13.00	V
2098.00	-60.57	0.90	9.80	-53.82	-13.00	H
2852.00	-62.36	1.00	10.70	-54.81	-13.00	V
4195.60	-71.78	1.20	12.40	-62.73	-13.00	V
4784.80	-71.26	1.30	12.50	-62.21	-13.00	H
6418.40	-71.05	1.60	13.10	-61.70	-13.00	H

LTE Band 12, 1.4MHz 16QAM, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1414.00	-48.29	0.70	6.00	-45.14	-13.00	H
2121.20	-61.95	0.90	9.80	-55.20	-13.00	H
2480.40	-61.20	0.90	9.80	-54.45	-13.00	V
4242.40	-71.01	1.20	12.40	-61.96	-13.00	V
4751.60	-71.06	1.30	12.50	-62.01	-13.00	H
5931.50	-71.55	1.50	13.10	-62.10	-13.00	H

LTE Band 12, 1.4MHz, 16QAM, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1429.60	-46.78	0.70	6.00	-43.63	-13.00	H
2144.40	-61.67	0.90	9.80	-54.92	-13.00	H
2859.60	-62.22	1.00	10.70	-54.67	-13.00	H
4289.20	-71.63	1.20	12.40	-62.58	-13.00	V
4752.00	-71.13	1.30	12.50	-62.08	-13.00	H
5935.40	-71.76	1.50	13.10	-62.31	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 13, 5 MHz, QPSK, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1563.20	-53.66	0.70	8.10	-48.41	-40.00	H
2344.80	-56.10	0.90	9.80	-49.35	-13.00	H
2847.60	-62.92	1.00	10.70	-55.37	-13.00	V
3942.80	-73.90	1.30	12.20	-65.15	-13.00	H
4785.60	-71.37	1.30	12.50	-62.32	-13.00	H
7119.80	-66.46	1.90	12.00	-58.51	-13.00	V

LTE Band 13, 5 MHz, QPSK, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1568.40	-53.58	0.70	8.10	-48.33	-40.00	H
2352.80	-56.99	0.90	9.80	-50.24	-13.00	H
3920.80	-73.72	1.30	12.20	-64.97	-13.00	V
4764.00	-71.36	1.30	12.50	-62.31	-13.00	H
5327.90	-72.16	1.30	12.50	-63.11	-13.00	V
7121.00	-66.50	1.90	12.00	-58.55	-13.00	H

LTE Band 13, 5 MHz, QPSK, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1573.20	-53.07	0.70	8.10	-47.82	-40.00	H
2360.00	-57.52	0.90	9.80	-50.77	-13.00	V
2960.80	-62.93	1.00	10.70	-55.38	-13.00	H
4765.60	-71.42	1.30	12.50	-62.37	-13.00	V
5935.10	-72.20	1.50	13.10	-62.75	-13.00	H
7131.20	-66.67	1.90	12.00	-58.72	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1563.20	-53.39	0.70	8.10	-48.14	-40.00	H
2120.00	-62.36	0.90	9.80	-55.61	-13.00	H
2345.20	-56.19	0.90	9.80	-49.44	-13.00	V
3941.20	-73.90	1.30	12.20	-65.15	-13.00	H
4786.40	-71.15	1.30	12.50	-62.10	-13.00	V
7115.00	-66.62	1.90	12.00	-58.67	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1568.40	-53.19	0.70	8.10	-47.94	-40.00	H
2352.80	-56.63	0.90	9.80	-49.88	-13.00	H
2987.20	-62.80	1.00	10.70	-55.25	-13.00	V
3920.80	-73.68	1.30	12.20	-64.93	-13.00	H
4755.60	-71.27	1.30	12.50	-62.22	-13.00	V
7126.40	-66.46	1.90	12.00	-58.51	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1573.20	-53.10	0.70	8.10	-47.85	-40.00	H
2360.00	-58.06	0.90	9.80	-51.31	-13.00	H
3943.20	-73.97	1.30	12.20	-65.22	-13.00	V
4760.40	-71.19	1.30	12.50	-62.14	-13.00	H
5893.70	-72.30	1.50	13.10	-62.85	-13.00	V
7128.50	-66.65	1.90	12.00	-58.70	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 26(814MHz-824MHz), 1.4MHz, QPSK, Channel 26783

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
1645.60	-46.63	0.80	8.10	-41.48	-13.00	H
2468.40	-56.17	0.90	9.80	-49.42	-13.00	H
2965.20	-61.46	1.00	10.70	-53.91	-13.00	H
3291.20	-71.88	1.10	11.50	-63.63	-13.00	V
4114.40	-70.67	1.20	12.40	-61.62	-13.00	V
5760.00	-70.56	1.50	13.10	-61.11	-13.00	H

LTE Band 26(814MHz-824MHz), 1.4MHz, QPSK, Channel 26740

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
1637.20	-46.39	0.80	8.10	-41.24	-13.00	H
2455.60	-57.26	0.90	9.80	-50.51	-13.00	H
3274.00	-70.87	1.10	11.50	-62.62	-13.00	V
4092.80	-68.66	1.30	12.40	-59.71	-13.00	V
4911.60	-70.37	1.40	12.50	-61.42	-13.00	V
5730.00	-70.48	1.50	13.10	-61.03	-13.00	H

LTE Band 26(814MHz-824MHz), 1.4MHz, QPSK, Channel 26697

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
1628.80	-47.08	0.80	8.10	-41.93	-13.00	H
2120.00	-62.56	0.90	9.80	-55.81	-13.00	V
2442.80	-55.70	0.90	9.80	-48.95	-13.00	V
4071.20	-72.16	1.30	12.40	-63.21	-13.00	H
4785.20	-71.59	1.30	12.50	-62.54	-13.00	H
5699.60	-72.12	1.30	13.10	-62.47	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, 16QAM, Channel 26783

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
1645.80	-46.93	0.80	8.10	-41.78	-13.00	H
2120.00	-63.12	0.90	9.80	-56.37	-13.00	H
2468.60	-55.89	0.90	9.80	-49.14	-13.00	H
3291.20	-71.92	1.10	11.50	-63.67	-13.00	V
4114.40	-70.58	1.20	12.40	-61.53	-13.00	V
5760.00	-70.09	1.50	13.10	-60.64	-13.00	H

LTE Band 26(814MHz-824MHz), 1.4MHz, 16QAM, Channel 26740

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
1637.00	-52.92	0.80	8.10	-47.77	-13.00	H
2455.80	-61.51	0.90	9.80	-54.76	-13.00	H
3274.00	-70.70	1.10	11.50	-62.45	-13.00	V
4092.80	-68.07	1.30	12.40	-59.12	-13.00	H
4911.60	-70.37	1.40	12.50	-61.42	-13.00	H
7411.20	-66.56	1.90	12.00	-58.61	-13.00	H

LTE Band 26(814MHz-824MHz), 1.4MHz, 16QAM, Channel 26697

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
1628.60	-46.82	0.80	8.10	-41.67	-13.00	H
2443.00	-55.33	0.90	9.80	-48.58	-13.00	H
3257.20	-72.93	1.10	11.50	-64.68	-13.00	V
4071.20	-68.46	1.30	12.40	-59.51	-13.00	V
4756.40	-71.30	1.30	12.50	-62.25	-13.00	H
5699.60	-71.97	1.30	13.10	-62.32	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE band 26(824MHz-849MHz), 1.4MHz, QPSK, Channel 27033

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1695.80	-52.02	0.80	8.10	-46.87	-13.00	H
2120.00	-63.19	0.90	9.80	-56.44	-13.00	H
2543.80	-58.27	0.90	10.70	-50.62	-13.00	H
3391.20	-69.47	1.10	11.50	-61.22	-13.00	V
4239.20	-68.60	1.20	12.40	-59.55	-13.00	V
5935.20	-70.25	1.50	13.10	-60.80	-13.00	H

LTE band 26(824MHz-849MHz), 1.4MHz, QPSK, Channel 26915

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1672.20	-49.26	0.80	8.10	-44.11	-13.00	H
2119.80	-63.18	0.90	9.80	-56.43	-13.00	H
2508.20	-58.80	0.90	10.70	-51.15	-13.00	H
3344.00	-69.52	1.10	11.50	-61.27	-13.00	V
4180.40	-68.26	1.20	12.40	-59.21	-13.00	V
5852.40	-70.38	1.40	13.10	-60.83	-13.00	H

LTE band 26(824MHz-849MHz), 1.4MHz, QPSK, Channel 26797

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1648.60	-46.37	0.80	8.10	-41.22	-13.00	H
2120.00	-63.06	0.90	9.80	-56.31	-13.00	H
2472.60	-55.47	0.90	9.80	-48.72	-13.00	H
3296.80	-73.27	1.10	11.50	-65.02	-13.00	V
4121.20	-71.54	1.20	12.40	-62.49	-13.00	V
5769.60	-71.56	1.50	13.10	-62.11	-13.00	H

LTE band 26(824MHz-849MHz), 1.4MHz, 16QAM, Channel 27033

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1695.80	-51.42	0.80	8.10	-46.27	-13.00	H
2119.80	-63.46	0.90	9.80	-56.71	-13.00	H
2543.40	-58.17	0.90	10.70	-50.52	-13.00	H
3391.20	-69.46	1.10	11.50	-61.21	-13.00	V
4239.20	-68.59	1.20	12.40	-59.54	-13.00	V
5934.80	-70.01	1.50	13.10	-60.56	-13.00	H

LTE band 26(824MHz-849MHz), 1.4MHz, 16QAM, Channel 26915

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1672.20	-52.67	0.80	8.10	-47.52	-13.00	H
2492.20	-64.50	0.90	9.80	-57.75	-13.00	H
2965.20	-62.30	1.00	10.70	-54.75	-13.00	H
3344.00	-69.95	1.10	11.50	-61.70	-13.00	V
4180.40	-68.25	1.20	12.40	-59.20	-13.00	H
4919.20	-72.02	1.30	12.50	-62.97	-13.00	H

LTE band 26(824MHz-849MHz), 1.4MHz, 16QAM, Channel 26797

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1648.40	-46.36	0.80	8.10	-41.21	-13.00	H
2119.80	-63.06	0.90	9.80	-56.31	-13.00	V
2472.60	-55.73	0.90	9.80	-48.98	-13.00	H
2974.00	-61.52	1.00	10.70	-53.97	-13.00	H
3940.40	-73.93	1.30	12.20	-65.18	-13.00	H
5769.60	-71.25	1.50	13.10	-61.80	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 38, 5MHz, QPSK, Channel 37775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2970.80	-62.00	1.00	10.70	-52.30	-25.00	H
4811.20	-69.54	1.30	12.50	-58.34	-25.00	H
7089.10	-65.40	1.80	12.00	-55.20	-25.00	H
9898.50	-59.39	2.20	11.20	-50.39	-25.00	V
14810.00	-53.69	2.50	11.20	-44.99	-25.00	H
17752.50	-52.93	3.60	12.80	-43.73	-25.00	H

LTE Band 38, 5MHz, QPSK, Channel 38000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2796.80	-60.93	1.00	10.70	-51.23	-25.00	H
4830.00	-68.77	1.30	12.50	-57.57	-25.00	H
7410.30	-64.56	1.90	12.00	-54.46	-25.00	H
9899.60	-59.80	2.20	11.20	-50.80	-25.00	V
14739.60	-54.52	2.50	11.20	-45.82	-25.00	H
17756.90	-52.52	3.60	12.80	-43.32	-25.00	H

LTE Band 38, 5MHz, QPSK, Channel 38225

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2801.60	-60.98	1.00	10.70	-51.28	-25.00	V
4791.20	-69.50	1.30	12.50	-58.30	-25.00	H
7370.70	-65.00	1.70	12.00	-54.70	-25.00	V
9957.90	-59.82	2.20	11.20	-50.82	-25.00	V
14751.70	-53.49	2.50	11.20	-44.79	-25.00	H
17758.00	-52.32	3.60	12.80	-43.12	-25.00	H

LTE Band 38, 5MHz, 16QAM, Channel 37775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2799.60	-61.03	1.00	10.70	-51.33	-25.00	H
4753.20	-69.49	1.30	12.50	-58.29	-25.00	H
7414.70	-64.32	1.90	12.00	-54.22	-25.00	H
9955.70	-60.60	2.20	11.20	-51.60	-25.00	H
14812.20	-53.66	2.50	11.20	-44.96	-25.00	H
17751.40	-52.84	3.60	12.80	-43.64	-25.00	H

LTE Band 38, 5MHz, 16QAM, Channel 38000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2953.20	-61.49	1.00	10.70	-51.79	-25.00	H
4784.40	-69.46	1.30	12.50	-58.26	-25.00	H
7354.20	-64.98	1.70	12.00	-54.68	-25.00	H
9949.10	-60.07	2.20	11.20	-51.07	-25.00	V
14790.20	-54.46	2.50	11.20	-45.76	-25.00	H
17753.60	-52.48	3.60	12.80	-43.28	-25.00	H

LTE Band 38, 5MHz, 16QAM, Channel 38225

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2794.80	-61.22	1.00	10.70	-51.52	-25.00	V
4921.60	-69.26	1.30	12.50	-58.06	-25.00	H
7858.00	-64.43	1.70	11.30	-54.83	-25.00	H
9953.50	-60.13	2.20	11.20	-51.13	-25.00	H
14818.80	-54.02	2.50	11.20	-45.32	-25.00	H
17743.70	-52.72	3.60	12.80	-43.52	-25.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 66, 1.4MHz QPSK, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2788.40	-60.68	1.00	10.70	-50.98	-13.00	H
3418.40	-67.82	1.20	11.50	-57.52	-13.00	V
7104.50	-64.19	1.90	12.00	-54.09	-13.00	H
11244.90	-57.12	2.60	10.50	-49.22	-13.00	V
14808.90	-54.12	2.50	11.20	-45.42	-13.00	H
15363.30	-55.39	2.70	12.40	-45.69	-13.00	H

LTE Band 66, 1.4MHz, QPSK, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2855.60	-61.26	1.00	10.70	-51.56	-13.00	V
3487.60	-70.42	1.10	11.50	-60.02	-13.00	H
4768.80	-69.53	1.30	12.50	-58.33	-13.00	H
7371.80	-63.92	1.70	12.00	-53.62	-13.00	V
8722.60	-62.76	2.00	12.00	-52.76	-13.00	H
14876.00	-53.91	2.70	11.20	-45.41	-13.00	H

LTE Band 66, 1.4MHz, QPSK, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2937.60	-61.50	1.00	10.70	-51.80	-13.00	H
3556.00	-71.69	1.20	12.20	-60.69	-13.00	H
4910.40	-69.88	1.40	12.50	-58.78	-13.00	H
7381.70	-64.77	1.70	12.00	-54.47	-13.00	H
11061.20	-57.52	2.30	10.50	-49.32	-13.00	V
14811.10	-54.32	2.50	11.20	-45.62	-13.00	H

LTE Band 66, 1.4MHz, 16QAM, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2847.20	-60.96	1.00	10.70	-51.26	-13.00	H
3418.40	-67.40	1.20	11.50	-57.10	-13.00	V
4766.40	-69.58	1.30	12.50	-58.38	-13.00	H
7416.90	-64.59	1.90	12.00	-54.49	-13.00	H
9993.10	-60.60	2.20	11.20	-51.60	-13.00	V
15361.10	-54.85	2.70	12.40	-45.15	-13.00	H

LTE Band 66, 1.4MHz, 16QAM, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2799.20	-61.00	1.00	10.70	-51.30	-13.00	V
3487.20	-71.36	1.10	11.50	-60.96	-13.00	V
4812.80	-68.80	1.30	12.50	-57.60	-13.00	H
8722.60	-62.61	2.00	12.00	-52.61	-13.00	V
11335.10	-56.69	2.50	10.50	-48.69	-13.00	V
14874.90	-53.89	2.70	11.20	-45.39	-13.00	V

LTE Band 66, 1.4MHz, 16QAM, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2790.40	-61.09	1.00	10.70	-51.39	-13.00	H
3556.00	-71.97	1.20	12.20	-60.97	-13.00	V
4910.00	-69.29	1.40	12.50	-58.19	-13.00	H
7114.40	-63.36	1.90	12.00	-53.26	-13.00	V
11271.30	-57.46	2.60	10.50	-49.56	-13.00	V
14747.30	-53.93	2.50	11.20	-45.23	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235, 27.54, 90.213.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5V and 4.4V, with a nominal voltage of 3.85V. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -10.0 % and +12.5%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	15	17	0.008	0.009
3.85	6	25	0.003	0.013
4.40	12	16	0.006	0.009

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	25	25	0.013	0.013
-20	14	28	0.007	0.015
-10	14	24	0.007	0.013
0	16	4	0.009	0.002
10	3	6	0.002	0.003
20	1	7	0.001	0.004
30	-8	15	0.004	0.008
40	53	22	0.028	0.012
50	41	-7	0.022	0.004

Expanded measurement uncertainty is 10 Hz, $k = 2$

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	2	22	0.003	0.028
3.85	8	25	0.010	0.032
4.40	13	15	0.017	0.019

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	15	7	0.019	0.009
-20	22	42	0.028	0.054
-10	31	35	0.040	0.045
0	6	2	0.008	0.003
10	3	7	0.004	0.009
20	28	25	0.036	0.032
30	-5	2	0.006	0.003
40	22	28	0.028	0.036
50	15	41	0.019	0.052

Expanded measurement uncertainty is 10 Hz, $k = 2$

LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	12	27	0.015	0.035
3.85	16	22	0.020	0.028
4.40	26	13	0.033	0.017

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	20	19	0.026	0.024
-20	12	16	0.015	0.020
-10	5	12	0.006	0.015
0	-4	-6	0.005	0.008
10	-6	-8	0.008	0.010
20	13	24	0.017	0.031
30	-21	-11	0.027	0.014
40	46	38	0.059	0.049
50	17	19	0.022	0.024

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 13, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	16	25	0.020	0.032
3.85	19	19	0.024	0.024
4.40	16	19	0.020	0.024

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	23	29	0.029	0.037
-20	14	19	0.018	0.024
-10	6	13	0.008	0.017
0	8	12	0.010	0.015
10	-8	-3	0.010	0.004
20	25	20	0.032	0.026
30	28	23	0.036	0.029
40	22	33	0.028	0.042
50	13	17	0.017	0.022

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 26(814MHz-824MHz), 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	15	19	0.008	0.010
3.85	22	28	0.012	0.015
4.40	14	17	0.007	0.009

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	18	28	0.010	0.015
-20	4	8	0.002	0.004
-10	7	9	0.004	0.005
0	29	34	0.015	0.018
10	24	26	0.013	0.014
20	15	13	0.008	0.007
30	-5	-1	0.003	0.001
40	8	12	0.004	0.006
50	6	10	0.003	0.005

Expanded measurement uncertainty is 10Hz, k = 2

LTE band 26(824MHz-849MHz), 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	19	22	0.023	0.026
3.85	10	18	0.012	0.022
4.40	35	18	0.042	0.022

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	26	15	0.014	0.008
-20	14	24	0.008	0.014
-10	16	9	0.009	0.005
0	15	3	0.008	0.002
10	28	6	0.015	0.003
20	14	17	0.007	0.009
30	7	18	0.004	0.010
40	9	22	0.005	0.012
50	13	9	0.007	0.005

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 38, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	29	32	0.037	0.041
3.85	28	15	0.036	0.019
4.40	16	49	0.020	0.063

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	29	35	0.037	0.045
-20	34	48	0.043	0.061
-10	24	18	0.031	0.023
0	19	15	0.024	0.019
10	16	28	0.020	0.036
20	17	24	0.022	0.031
30	26	35	0.033	0.045
40	14	18	0.018	0.023
50	28	28	0.036	0.036

Expanded measurement uncertainty is 10 Hz, $k = 2$
LTE Band 66, 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	8	11	0.011	0.015
3.85	-7	-5	0.010	0.007
4.40	12	17	0.017	0.024

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	17	27	0.024	0.038
-20	18	20	0.025	0.028
-10	5	9	0.007	0.013
0	7	16	0.010	0.023
10	12	17	0.017	0.024
20	-5	6	0.007	0.008
30	-7	-4	0.010	0.006
40	21	22	0.030	0.031
50	20	19	0.028	0.027

Expanded measurement uncertainty is 10Hz, $k = 2$

A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238, 27.53, 90.1215.

A.4.1 Occupied Bandwidth Results


Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- Set the detection mode to peak, and the trace mode to max hold.
- Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 2,BW1.4MHz(99%)


Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1880.00	1083.24	1089.66

LTE band 2 , BW1.4MHz Bandwidth,QPSK (99% BW)

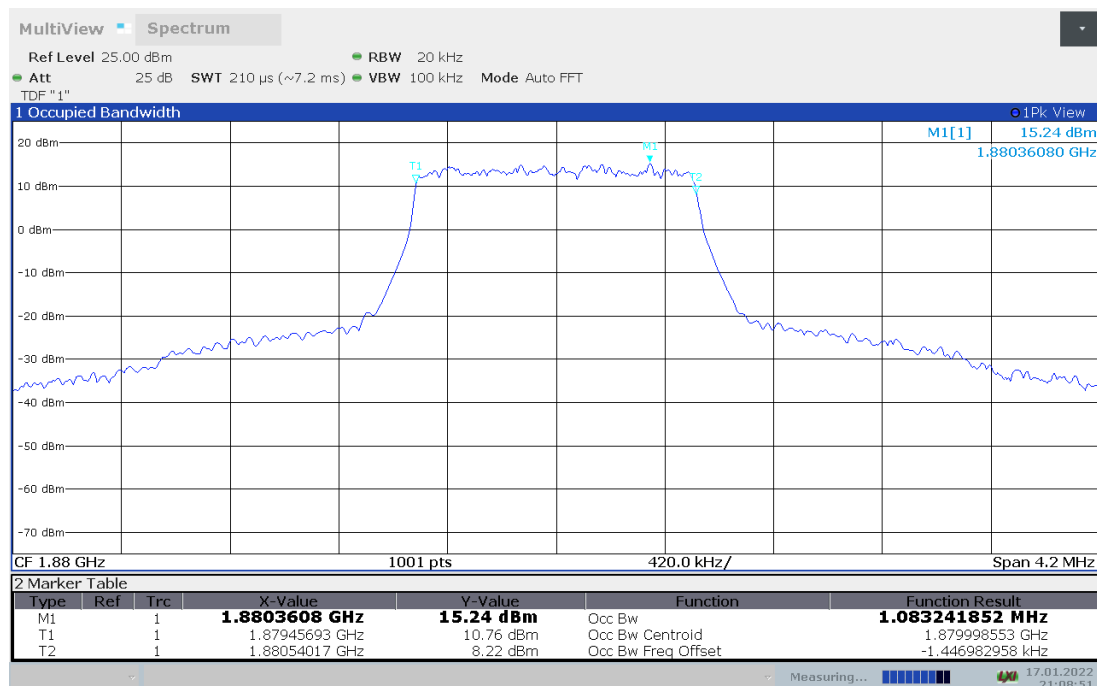




LTE band 2 , BW1.4MHz Bandwidth,16QAM (99% BW)

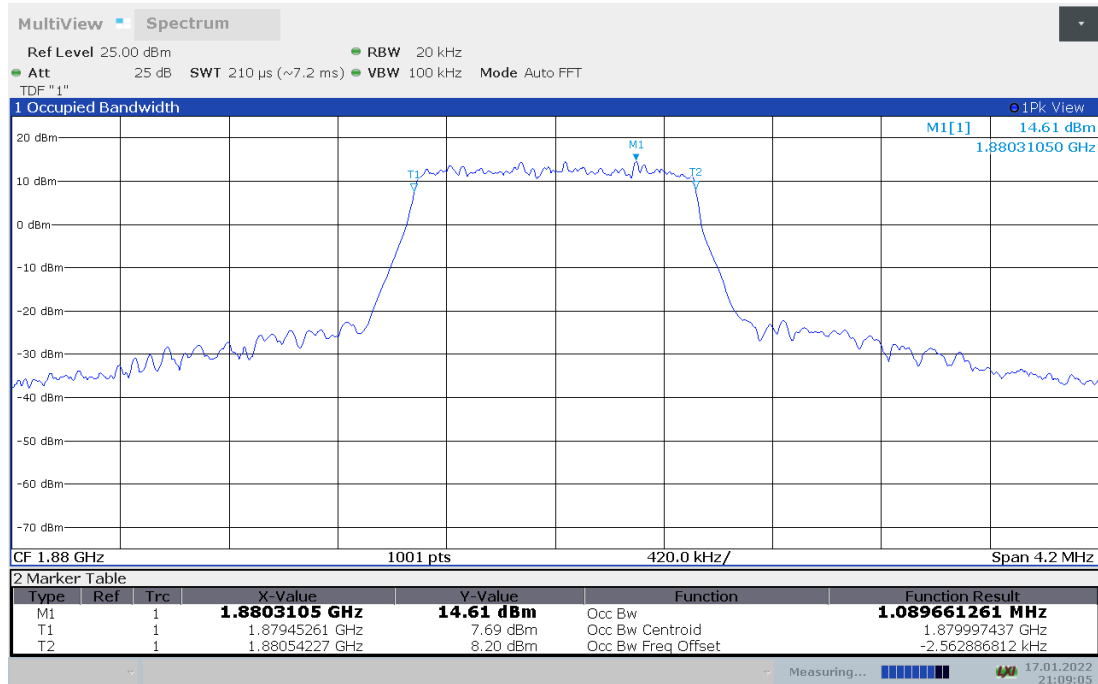


LTE band 2,3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1880.00	2681.87	2677.81

LTE band 2 , 3MHz Bandwidth,QPSK (99% BW)

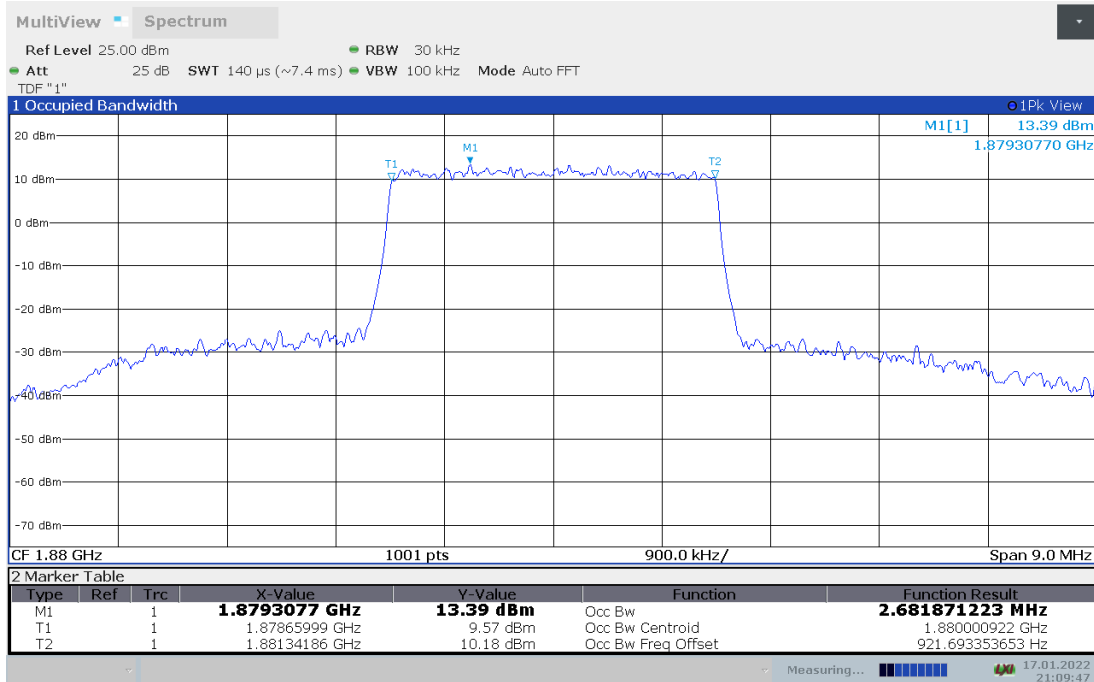


LTE band 2 , 3MHz Bandwidth,16QAM (99% BW)

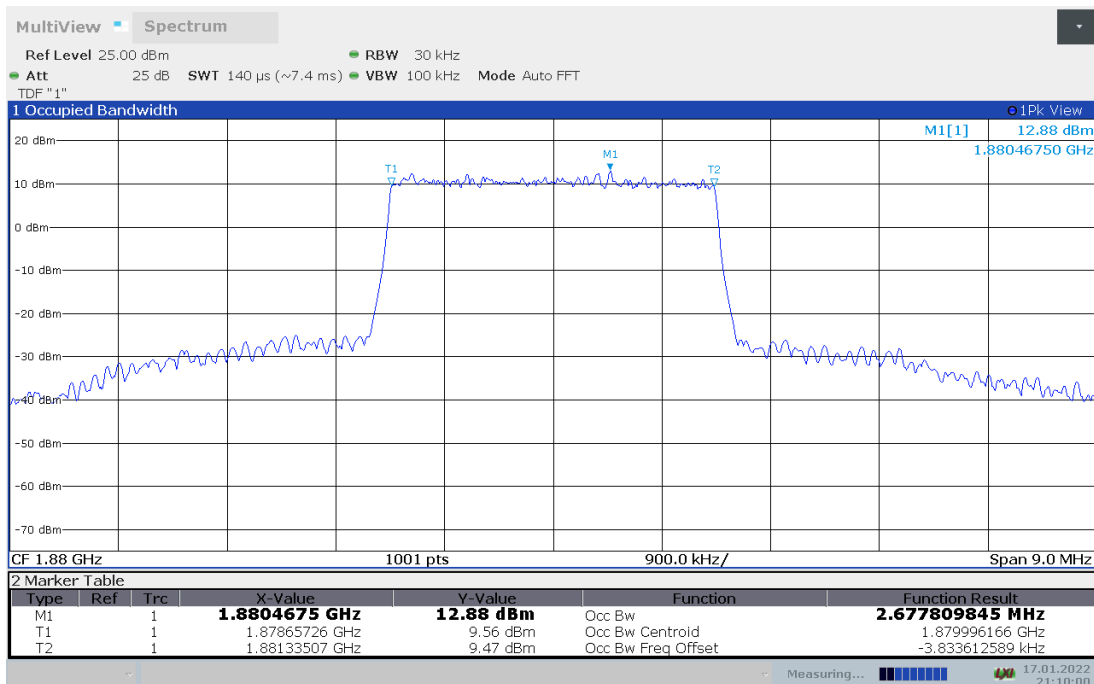


LTE band 2,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1880.00	4481.38	4479.31

LTE band 2 , 5MHz Bandwidth,QPSK (99% BW)

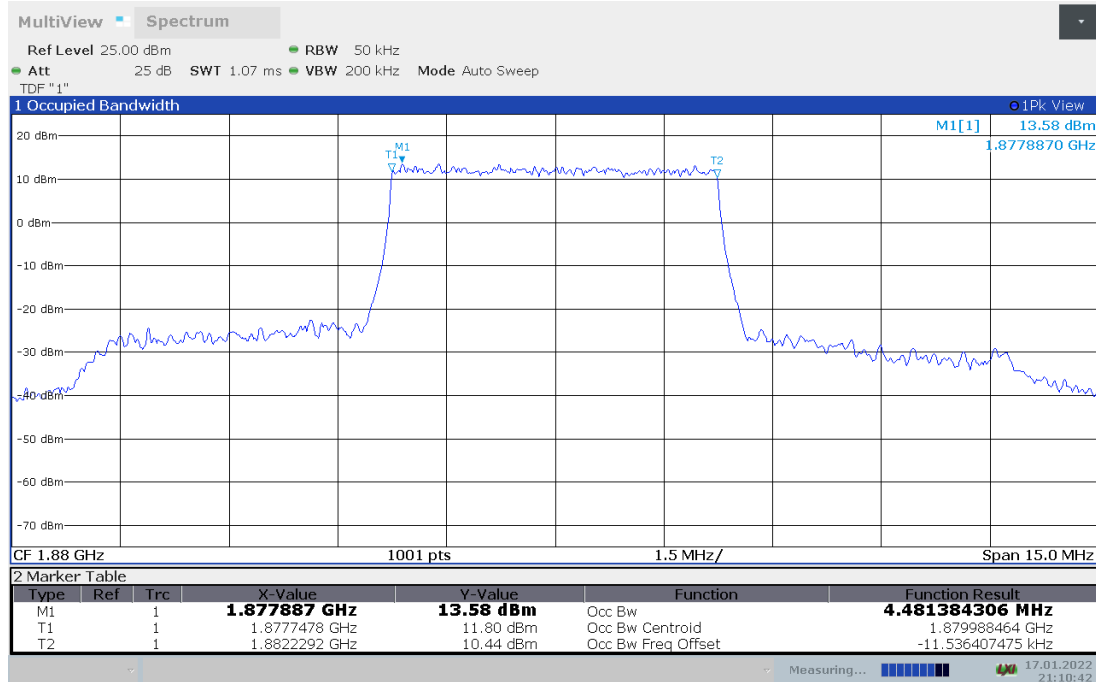


LTE band 2 , 5MHz Bandwidth,16QAM (99% BW)

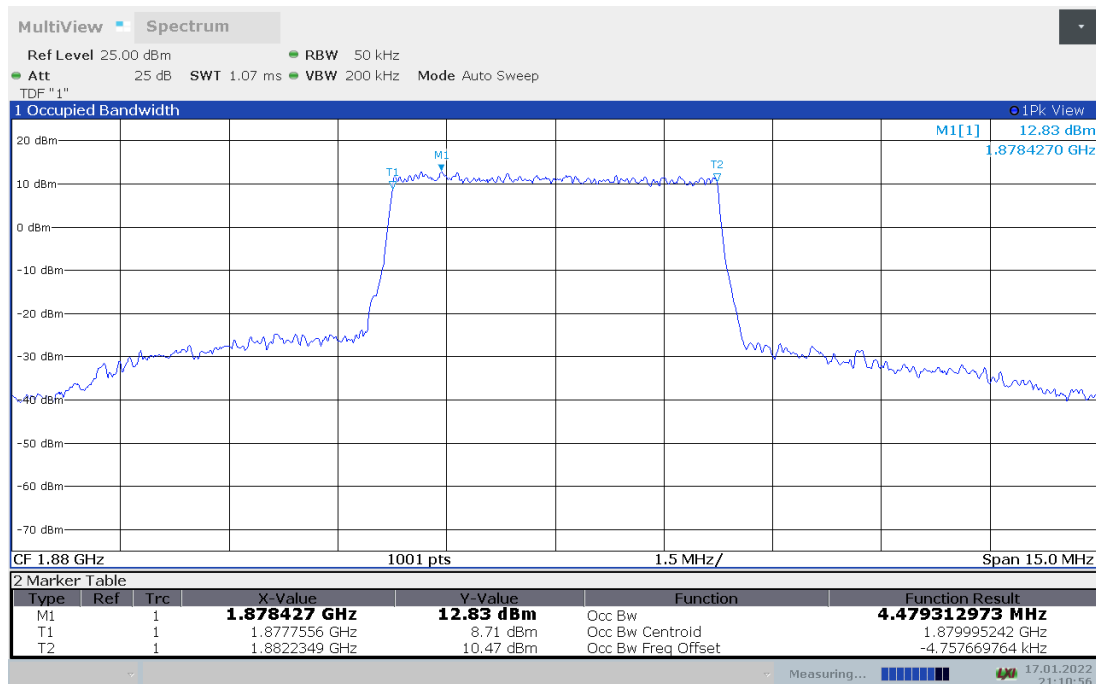


LTE band 2,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1880.00	8945.15	8955.20

LTE band 2 , 10MHz Bandwidth,QPSK (99% BW)

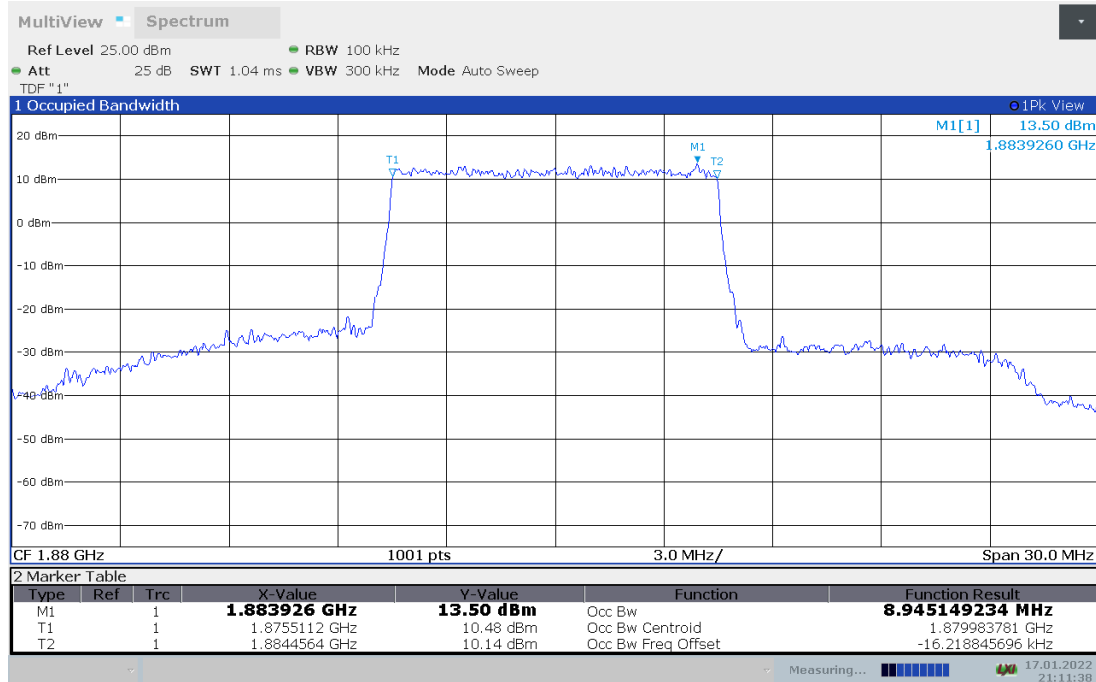


LTE band 2 , 10MHz Bandwidth,16QAM (99% BW)

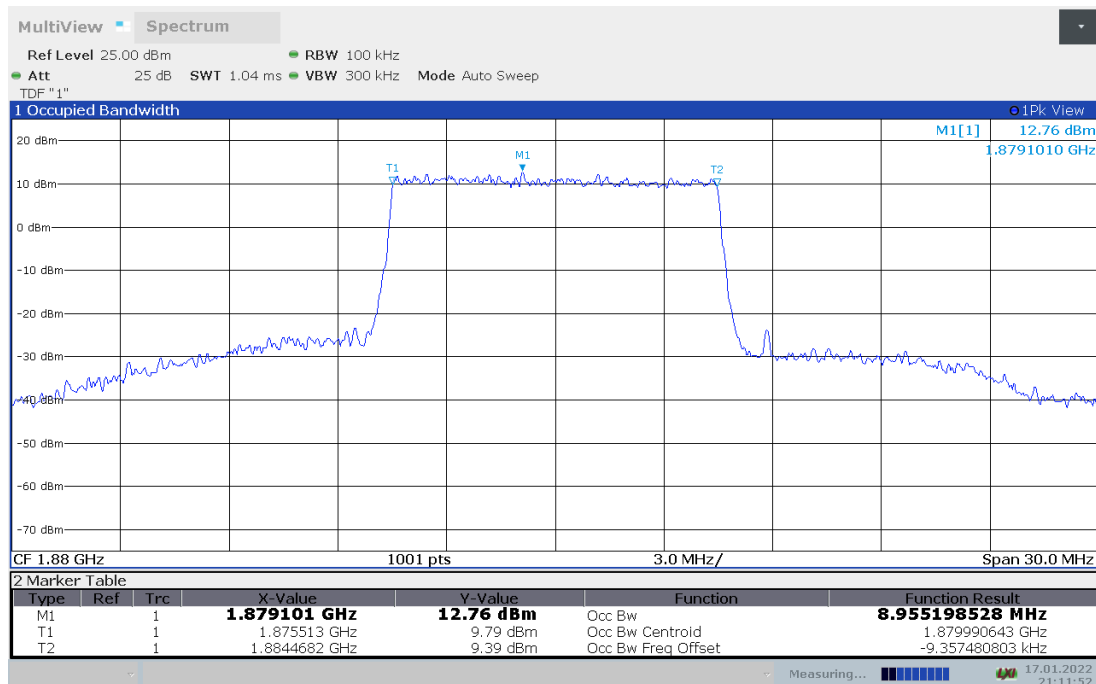


LTE band 2,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1880.00	13419.98	13458.58

LTE band 2 , 15MHz Bandwidth,QPSK (99% BW)

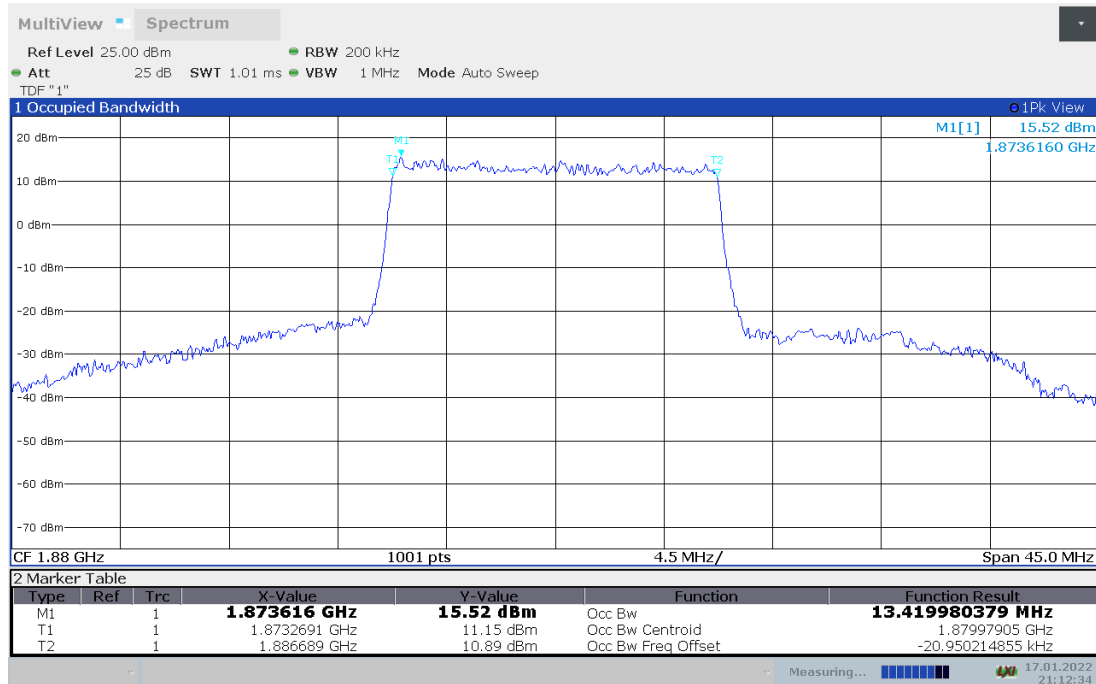


LTE band 2 , 15MHz Bandwidth,16QAM (99% BW)

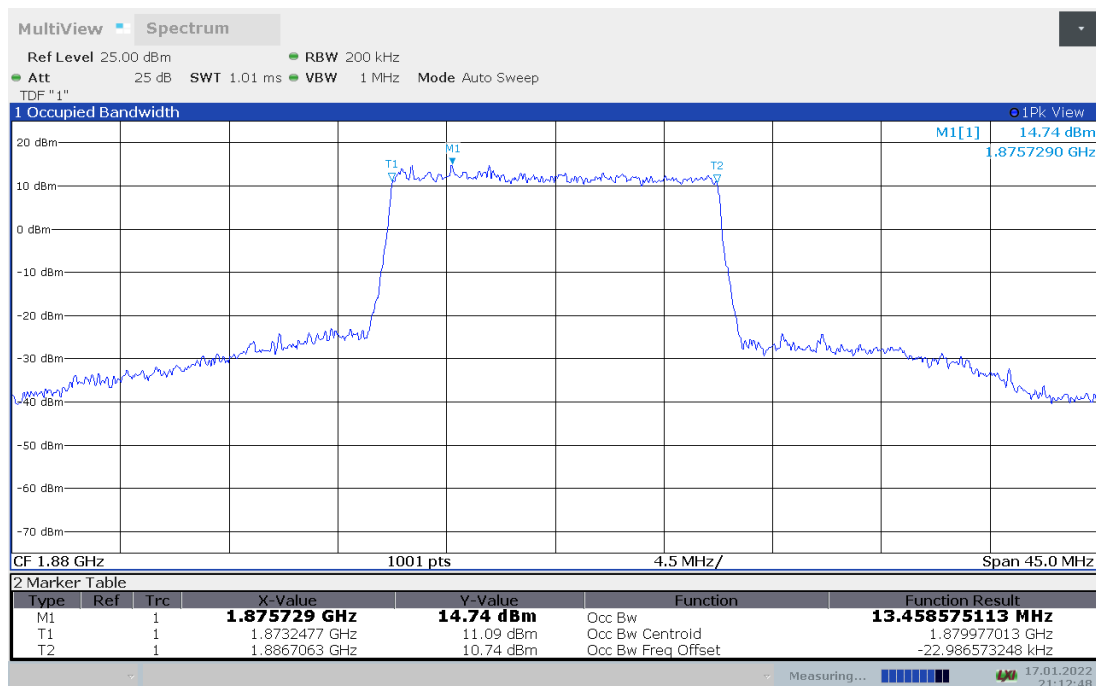


LTE band 2,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1880.00	17882.72	17895.41

LTE band 2 , 20MHz Bandwidth,QPSK (99% BW)

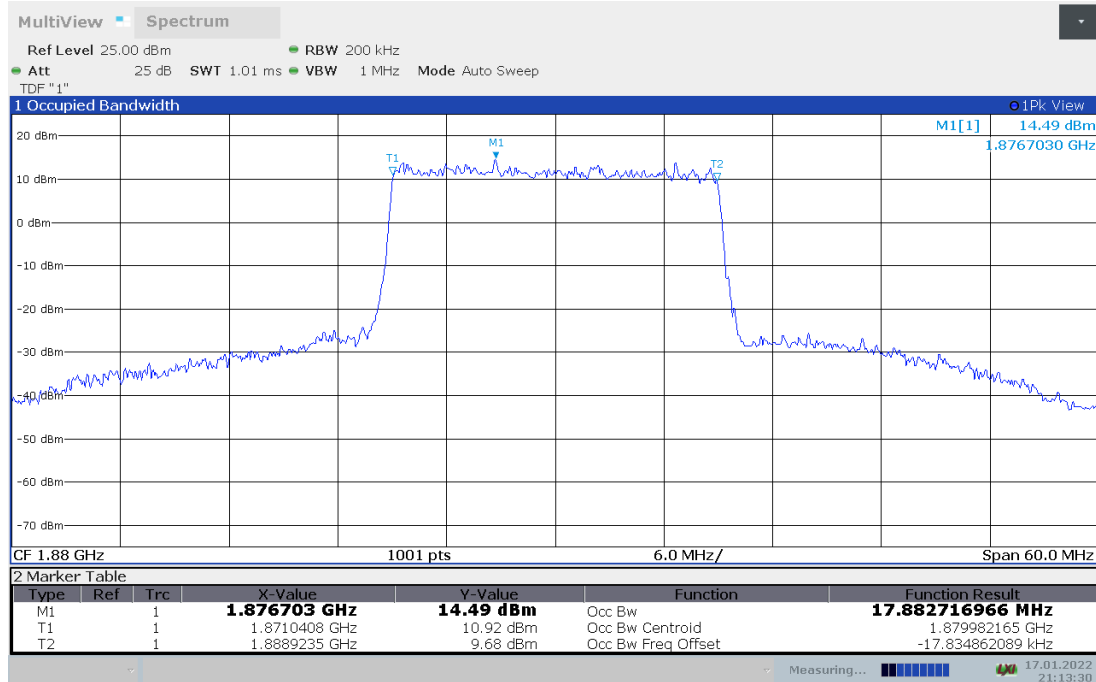


LTE band 2 , 20MHz Bandwidth,16QAM (99% BW)

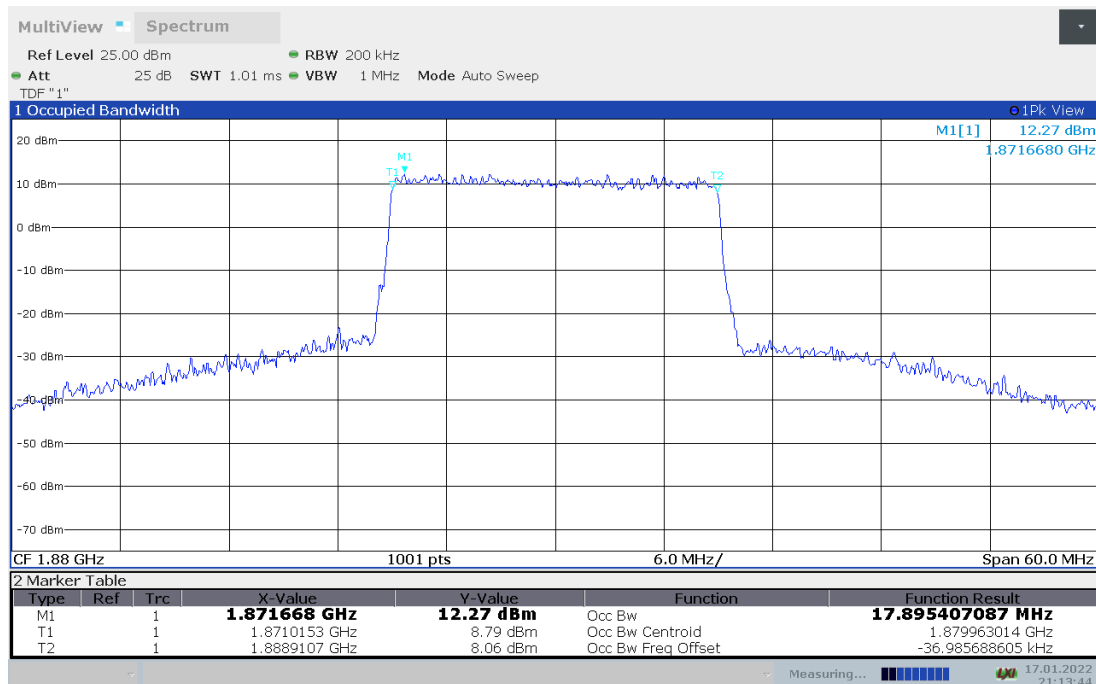


LTE band 7,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2535.00	4480.66	4468.27

LTE band 7 , 5MHz Bandwidth,QPSK (99% BW)

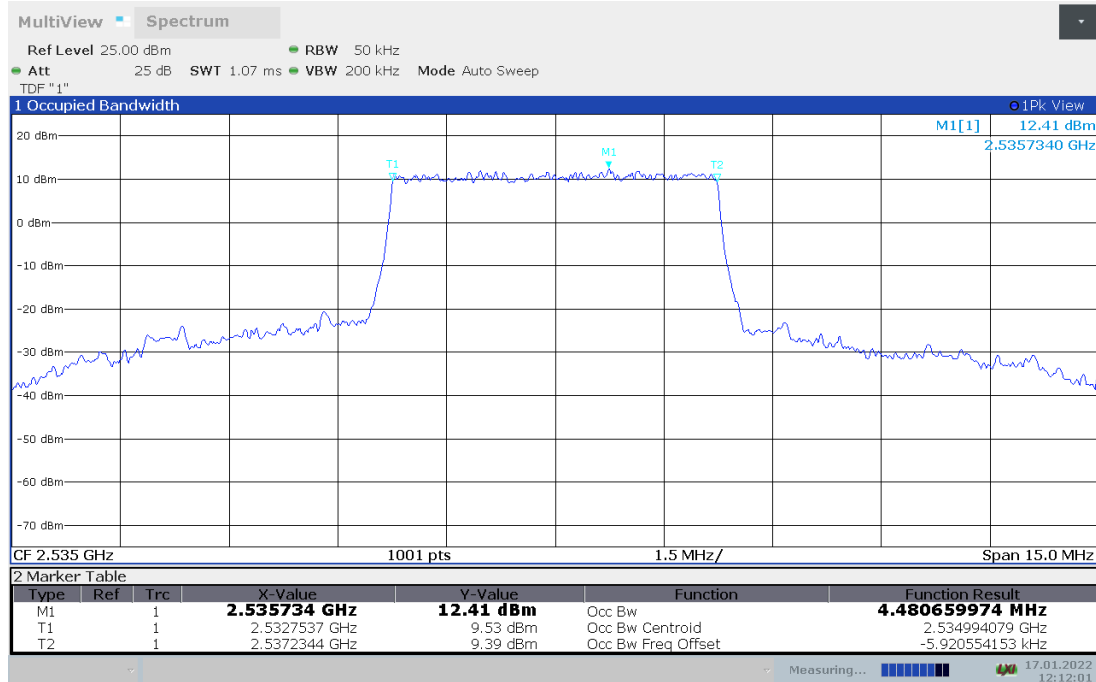


LTE band 7 , 5MHz Bandwidth,16QAM (99% BW)

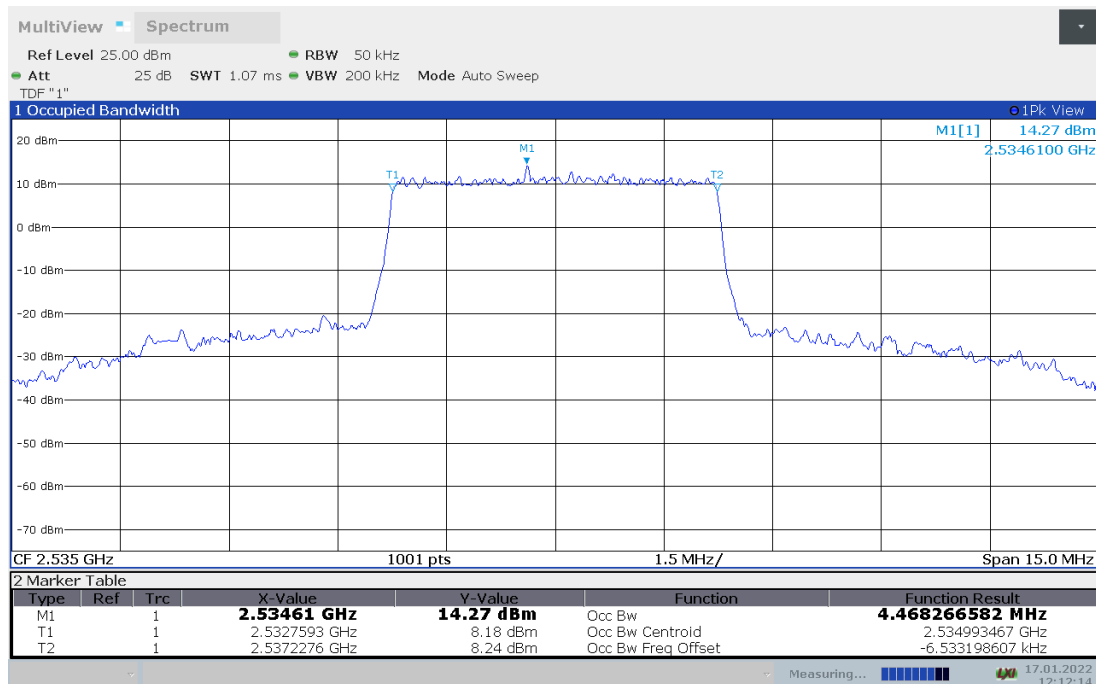


LTE band 7,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2535.00	8941.44	8947.40

LTE band 7 , 10MHz Bandwidth,QPSK (99% BW)

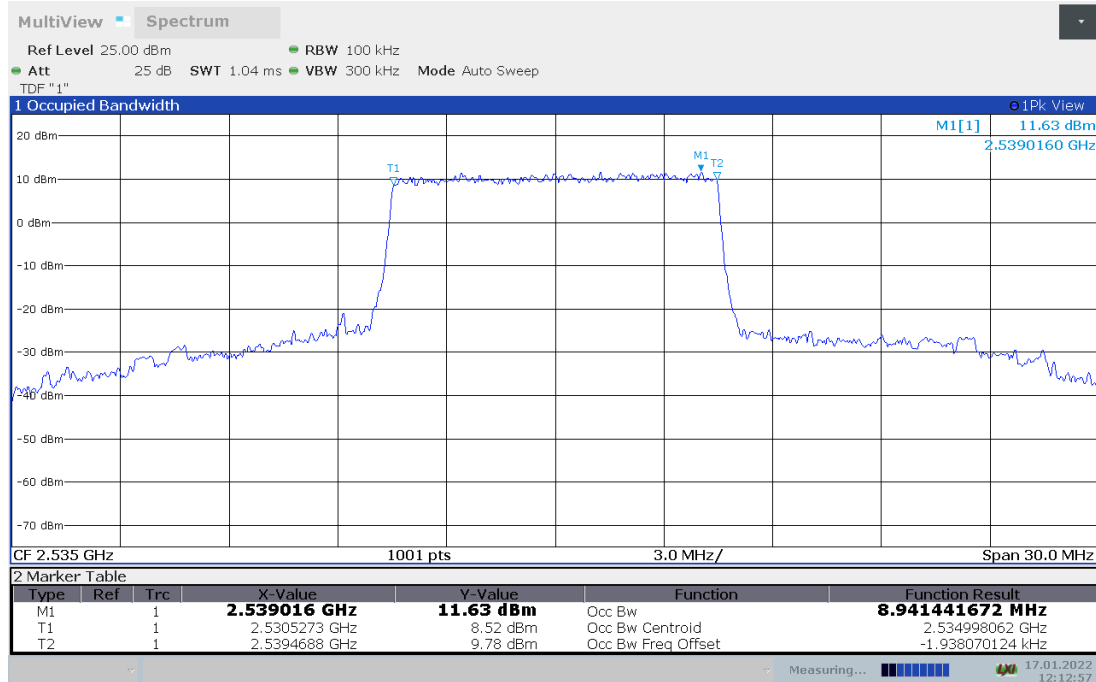


LTE band 7 , 10MHz Bandwidth,16QAM (99% BW)

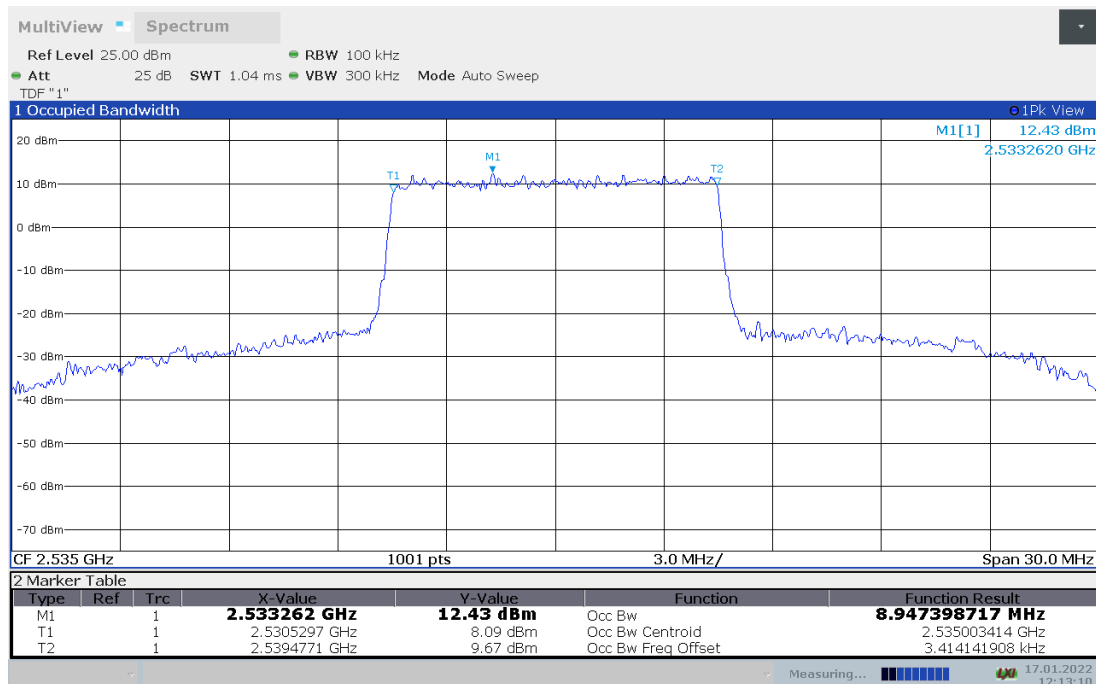


LTE band 7,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2535.00	13403.09	13448.12

LTE band 7 , 15MHz Bandwidth,QPSK (99% BW)

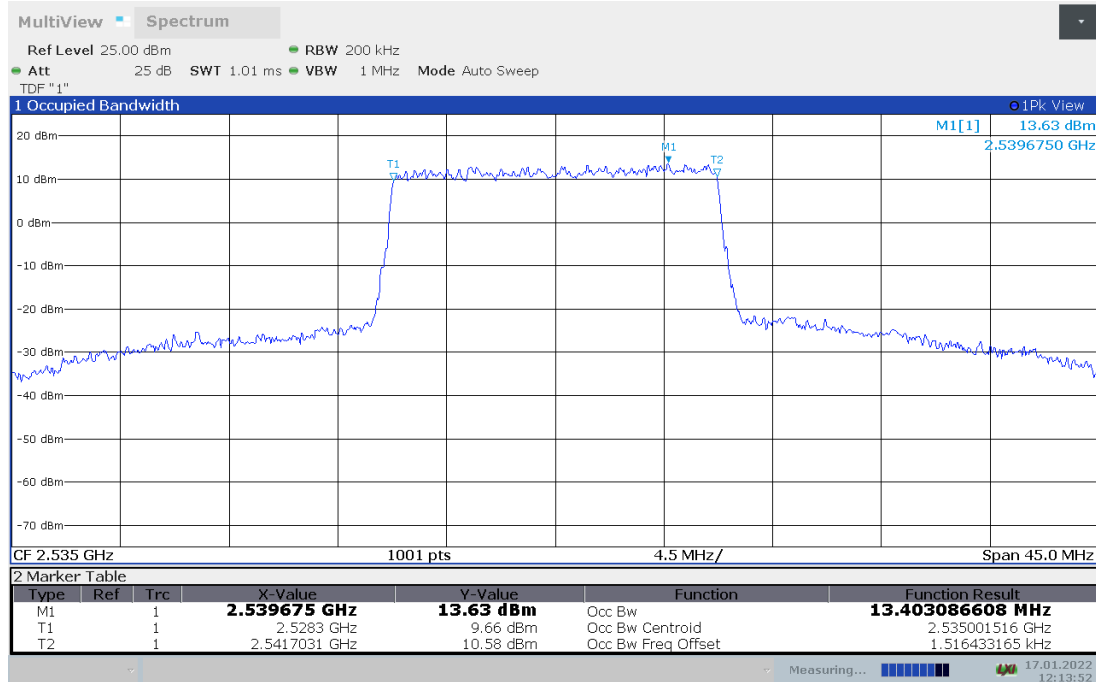


LTE band 7 , 15MHz Bandwidth,16QAM (99% BW)

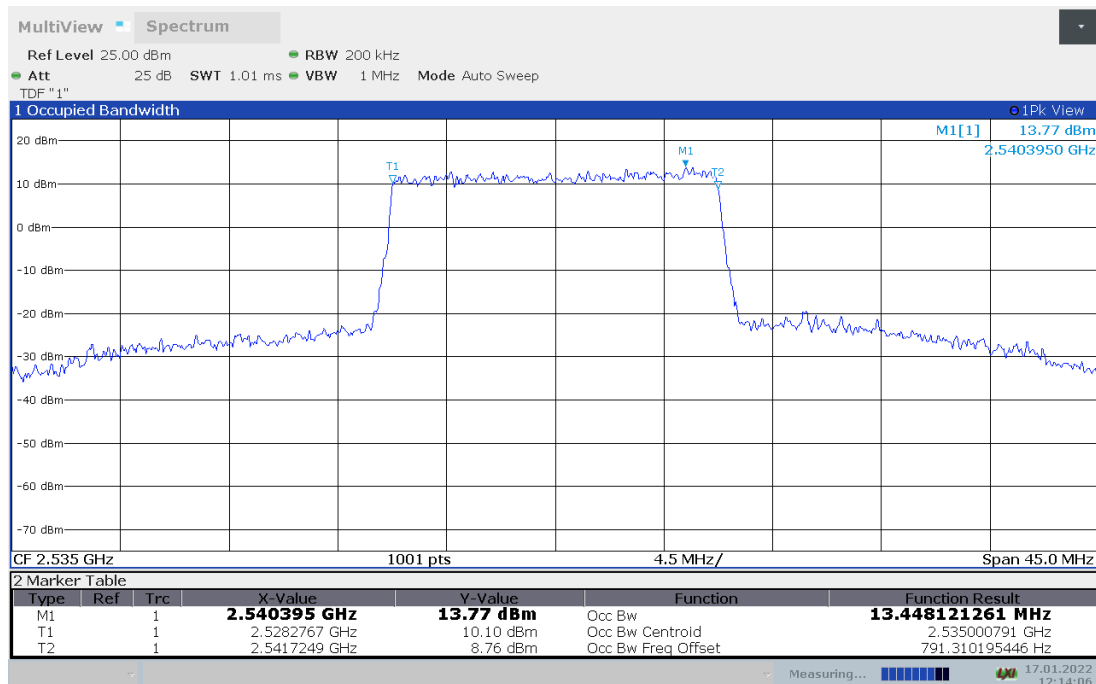


LTE band 7,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2535.00	17910.59	17894.76

LTE band 7 , 20MHz Bandwidth,QPSK (99% BW)

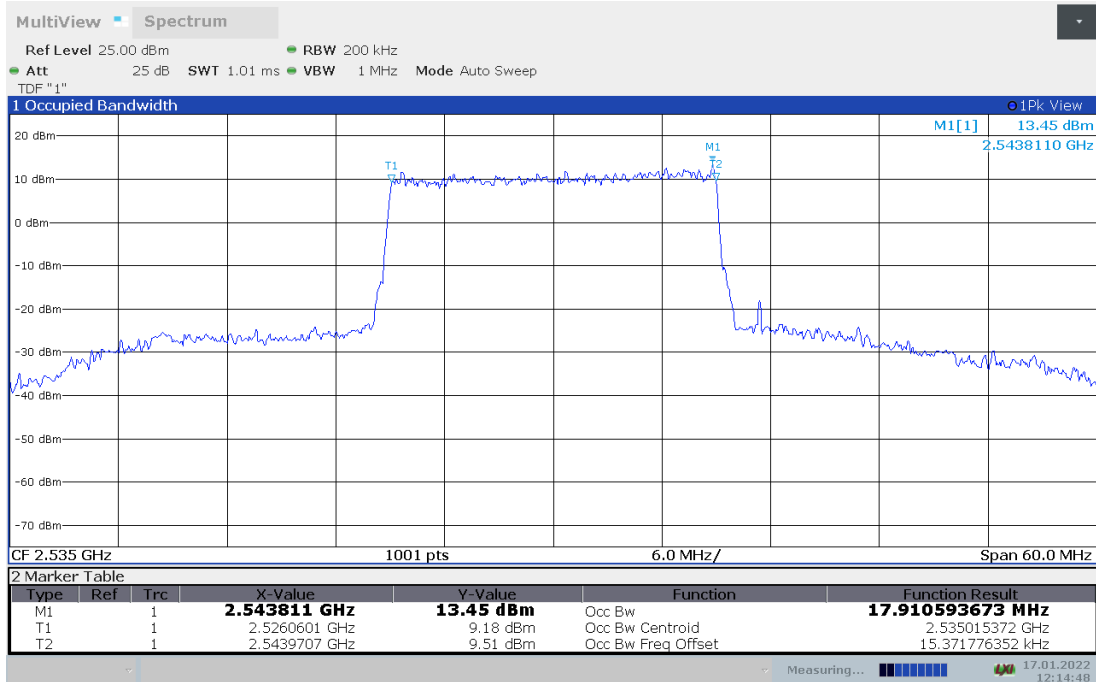


LTE band 7 , 20MHz Bandwidth,16QAM (99% BW)

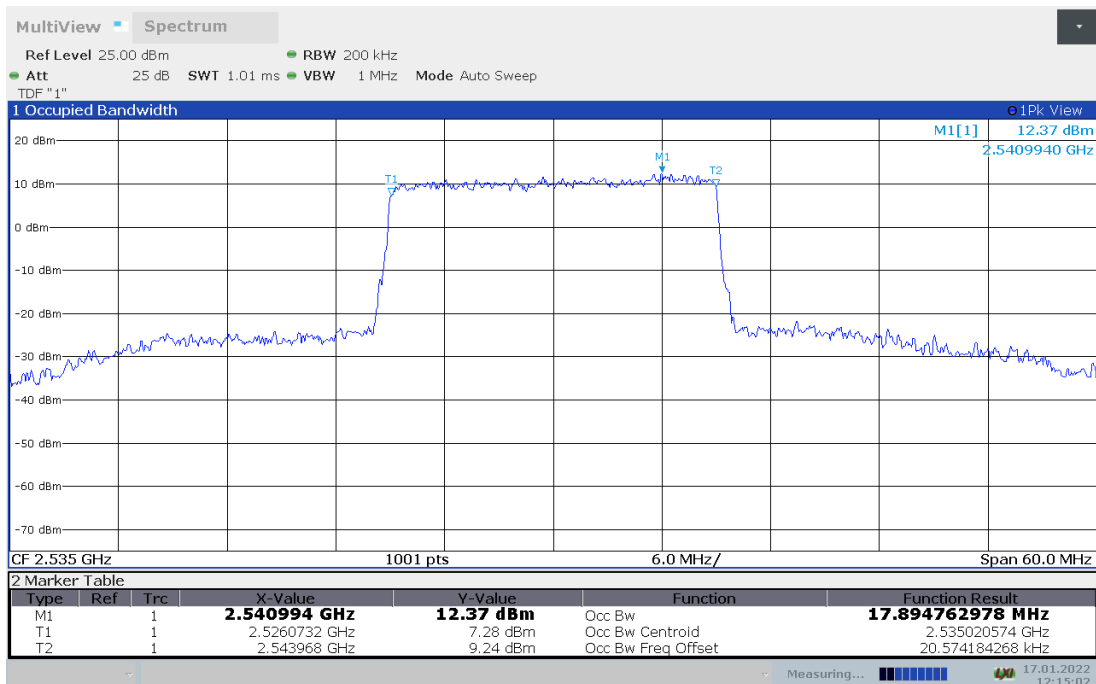


LTE band 12,BW1.4MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
707.50	1089.86	1082.72

LTE band 12 , BW1.4MHz Bandwidth,QPSK (99% BW)

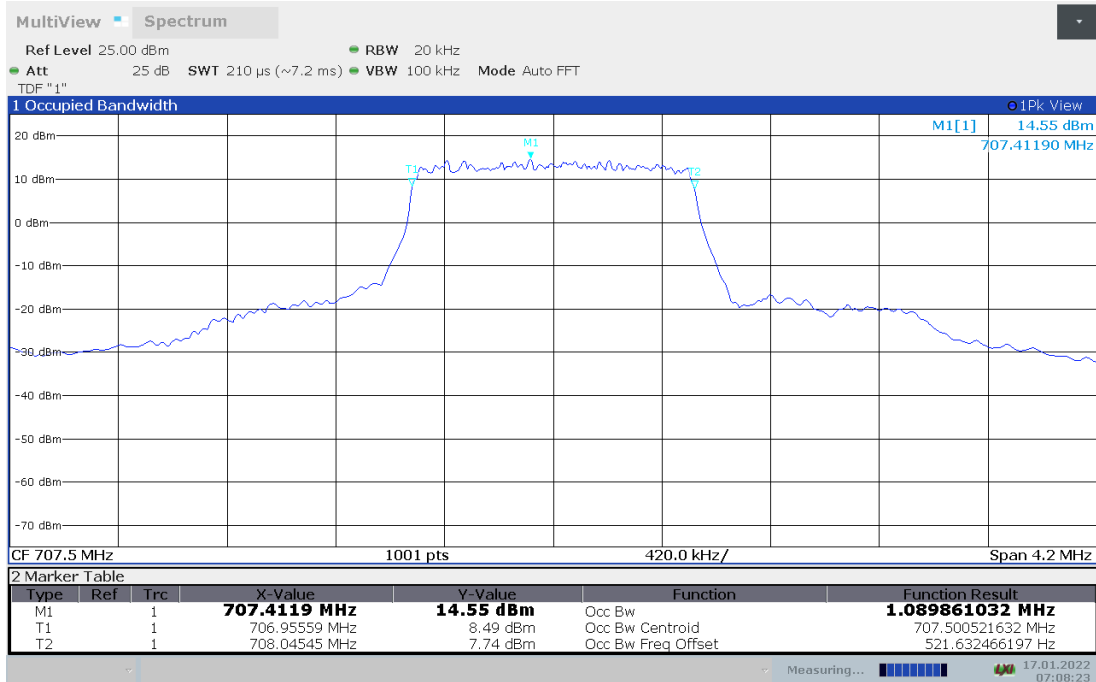


LTE band 12 , BW1.4MHz Bandwidth,16QAM (99% BW)

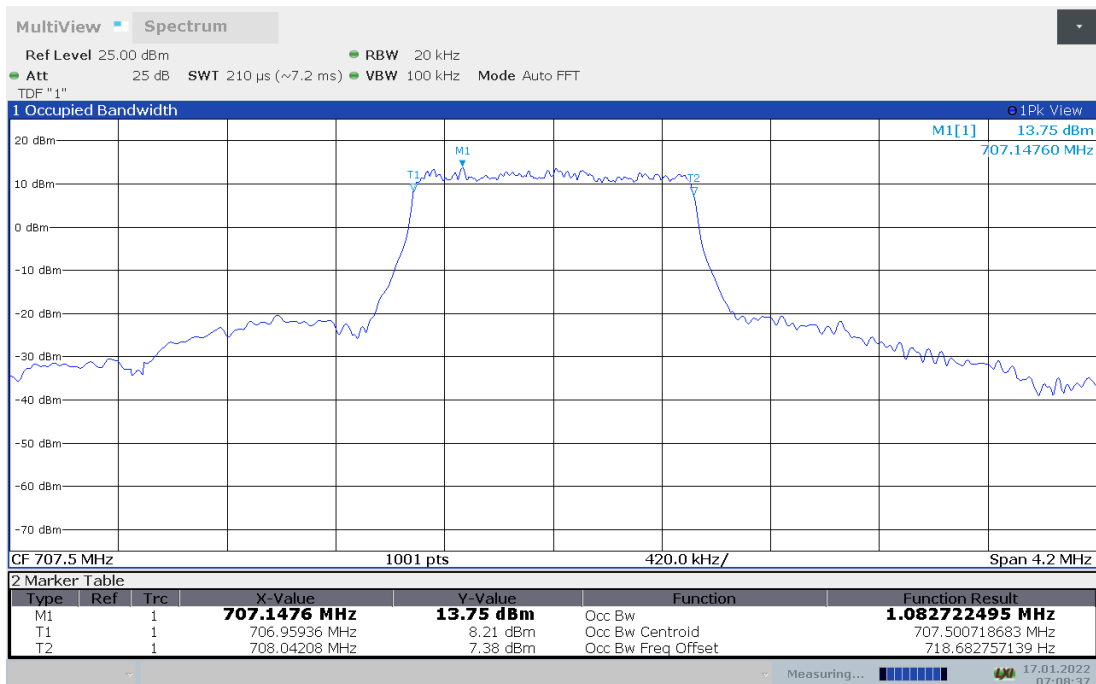


LTE band 12,3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
707.50	2681.07	2679.24

LTE band 12 , 3MHz Bandwidth,QPSK (99% BW)

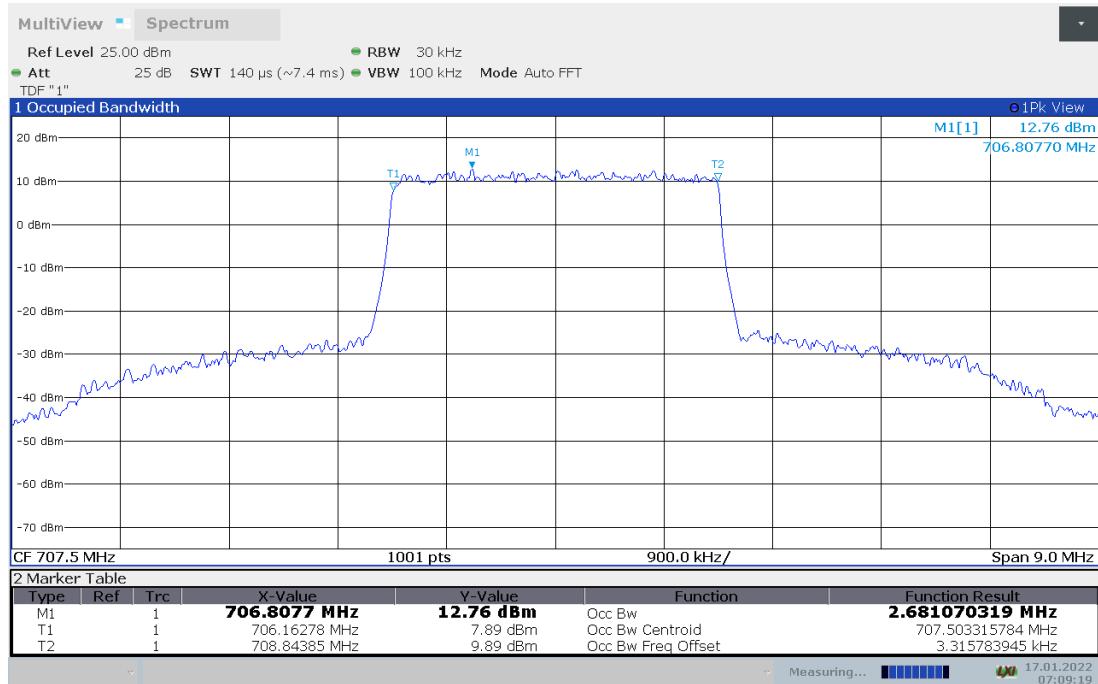


LTE band 12 , 3MHz Bandwidth,16QAM (99% BW)

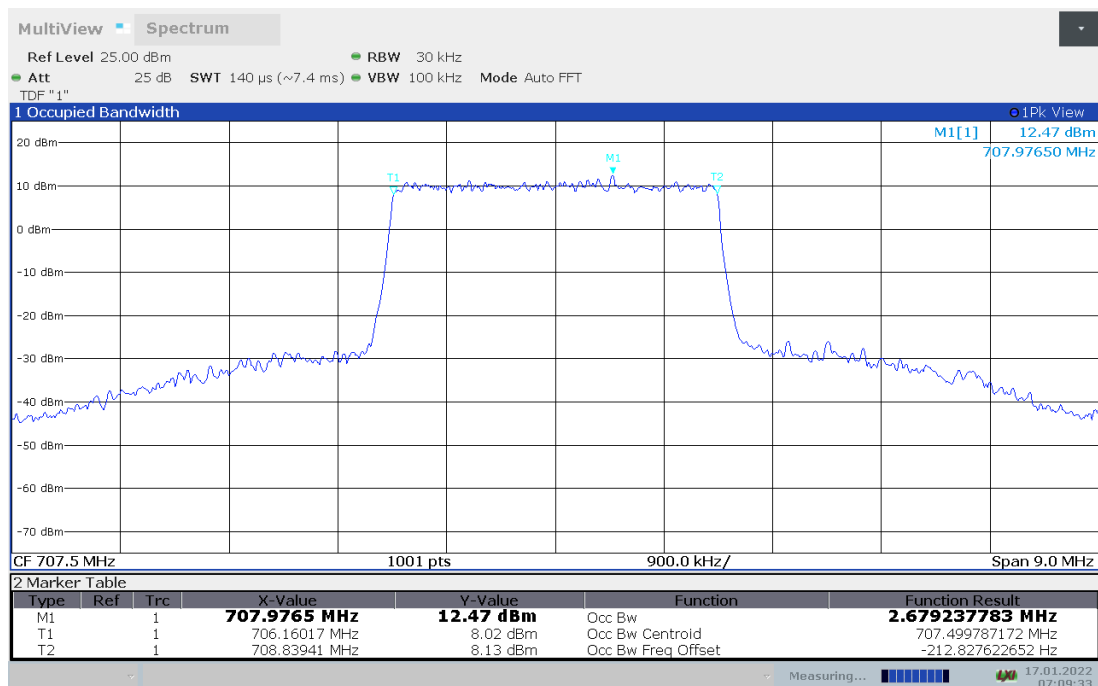


LTE band 12,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
707.50	4488.16	4489.84

LTE band 12 , 5MHz Bandwidth,QPSK (99% BW)

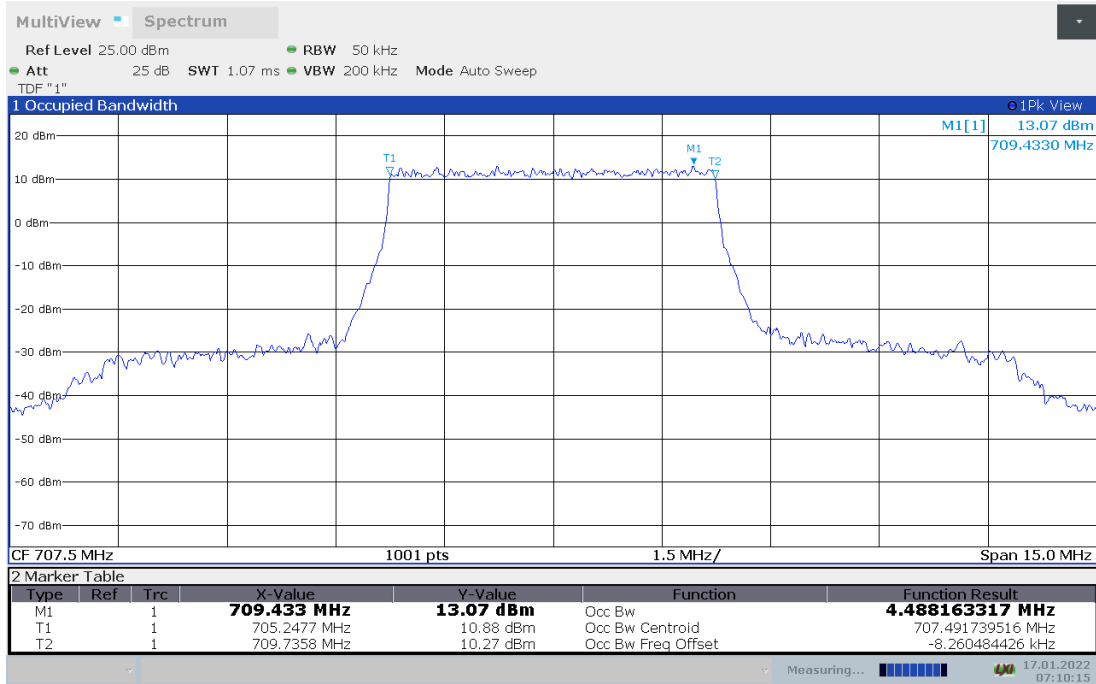


LTE band 12 , 5MHz Bandwidth,16QAM (99% BW)

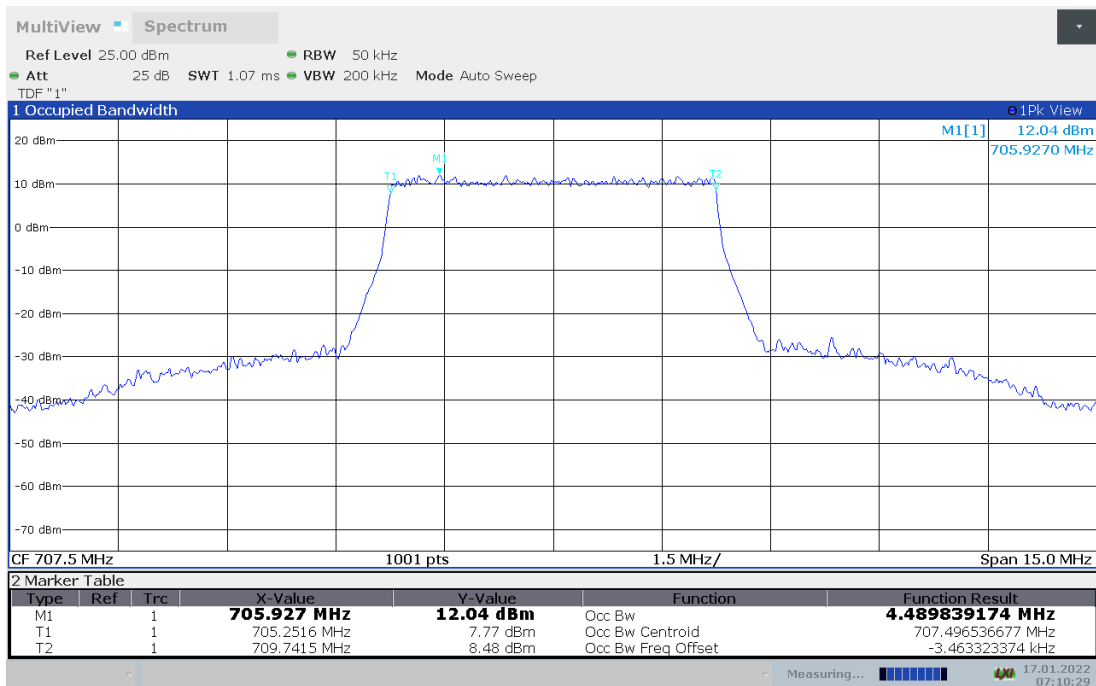


LTE band 12,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
707.50	8951.89	8948.11

LTE band 12 , 10MHz Bandwidth,QPSK (99% BW)

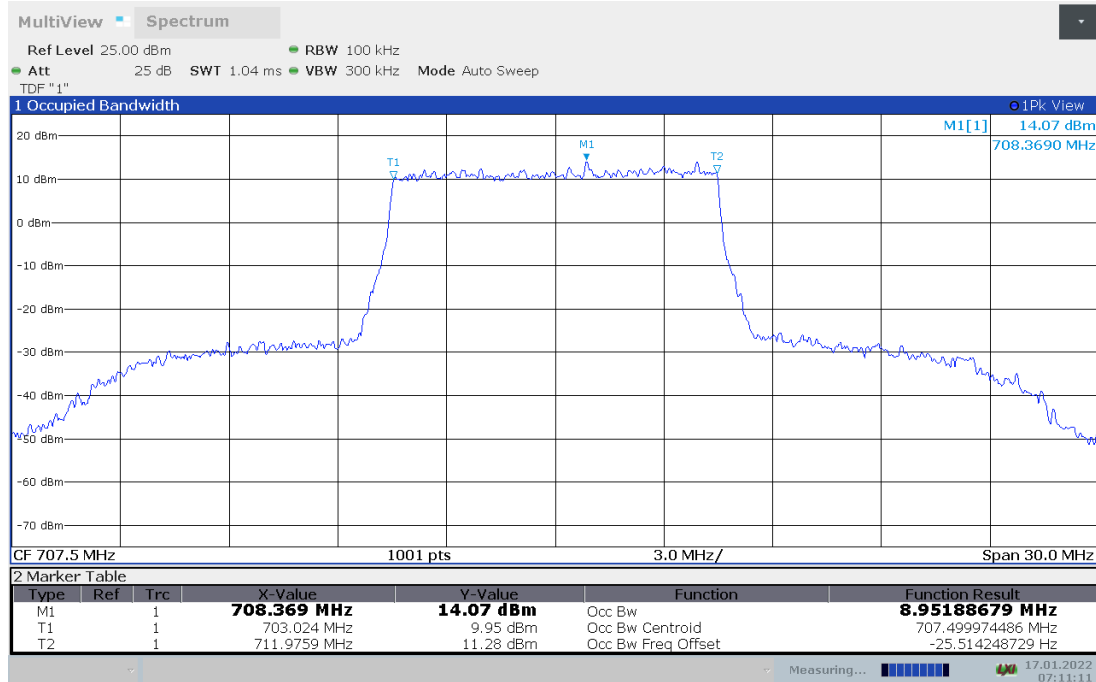


LTE band 12 , 10MHz Bandwidth,16QAM (99% BW)

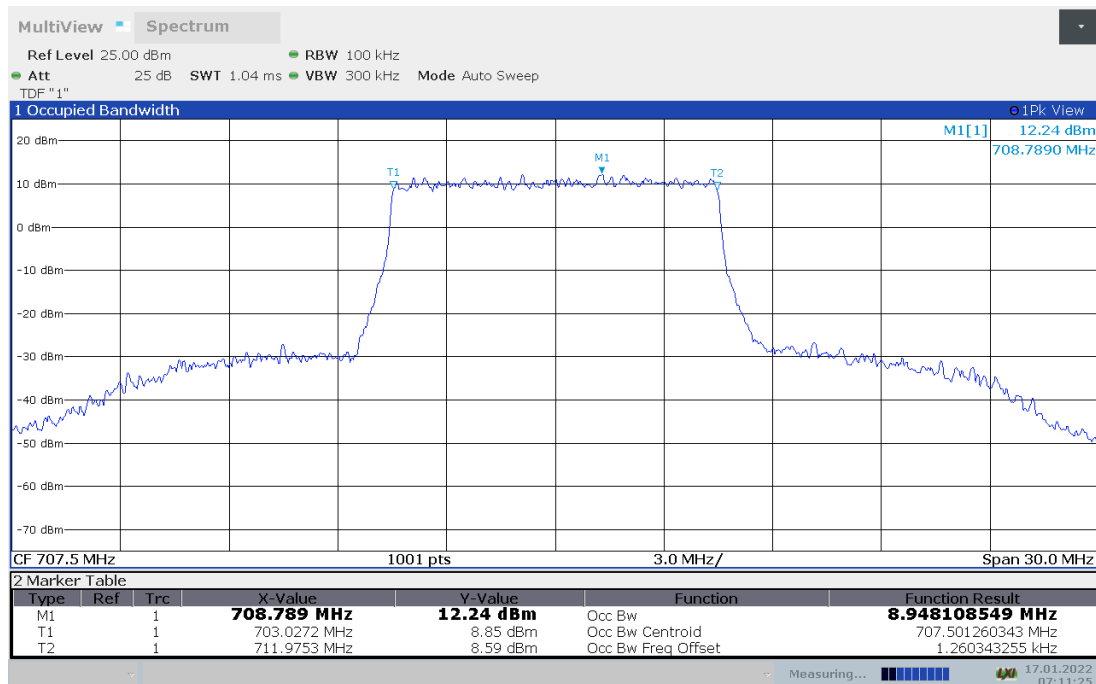


LTE band 13,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
782.00	4490.68	4478.50

LTE band 13 , 5MHz Bandwidth,QPSK (99% BW)

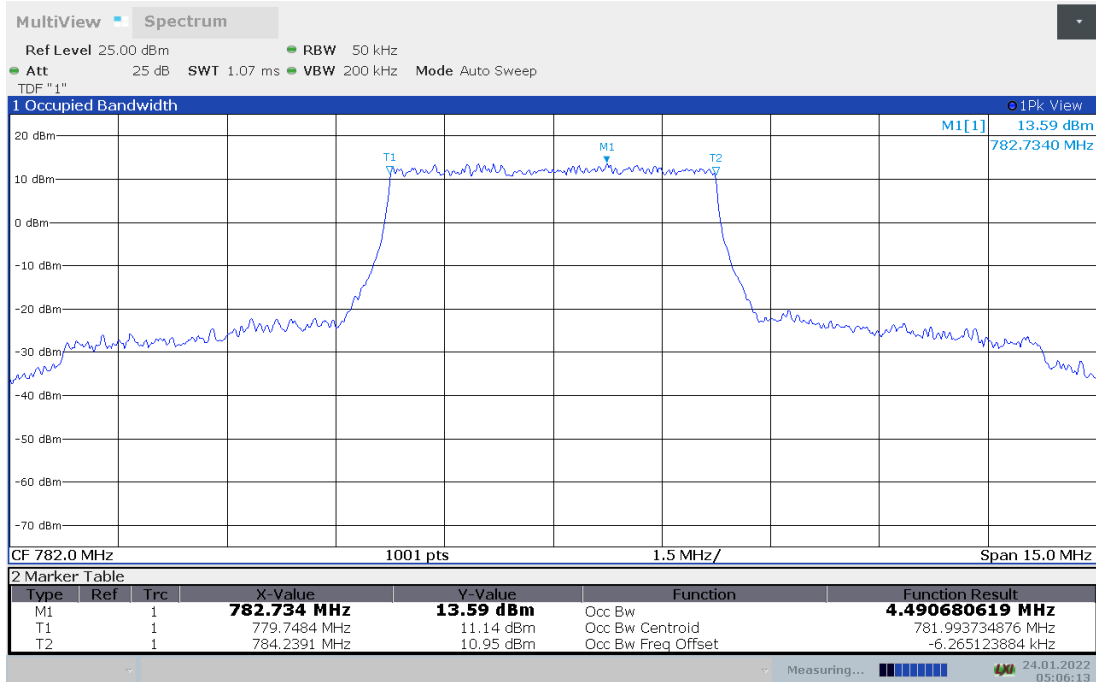


LTE band 13 , 5MHz Bandwidth,16QAM (99% BW)

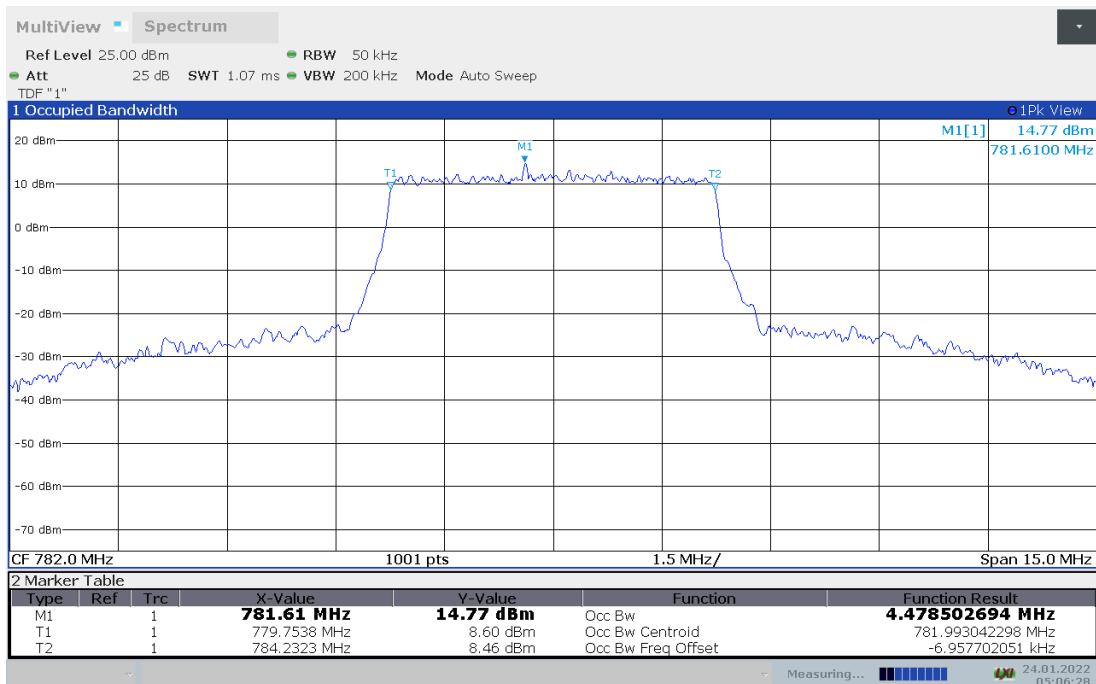


LTE band 13,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
782.00	8946.54	8961.80

LTE band 13 , 10MHz Bandwidth,QPSK (99% BW)


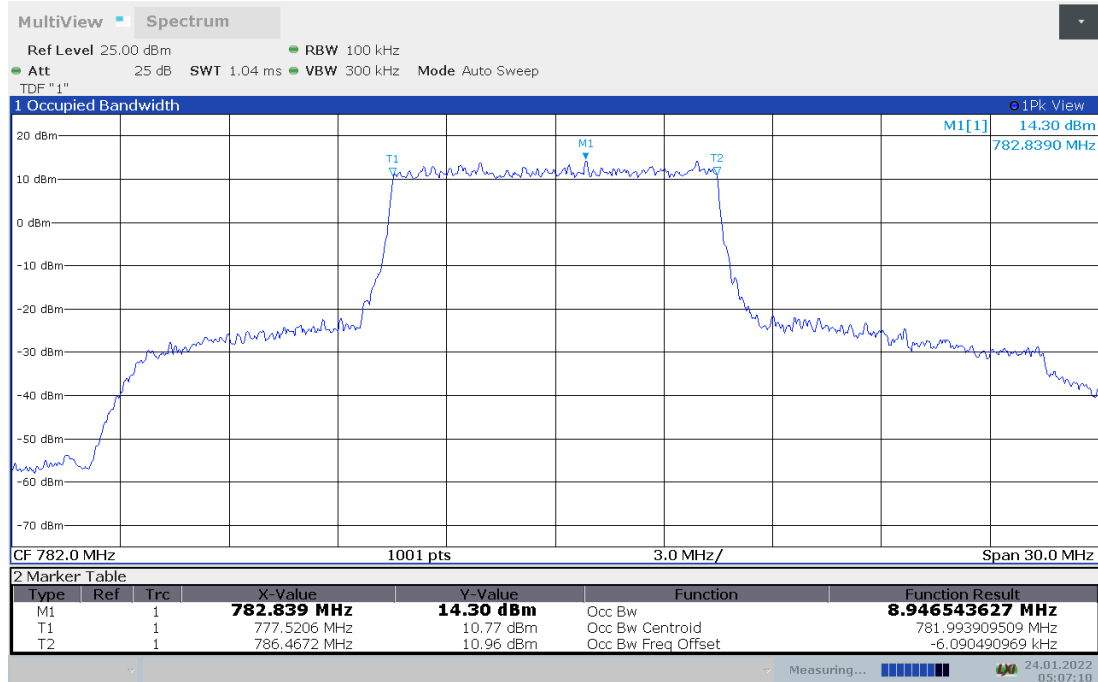


LTE band 13 , 10MHz Bandwidth,16QAM (99% BW)

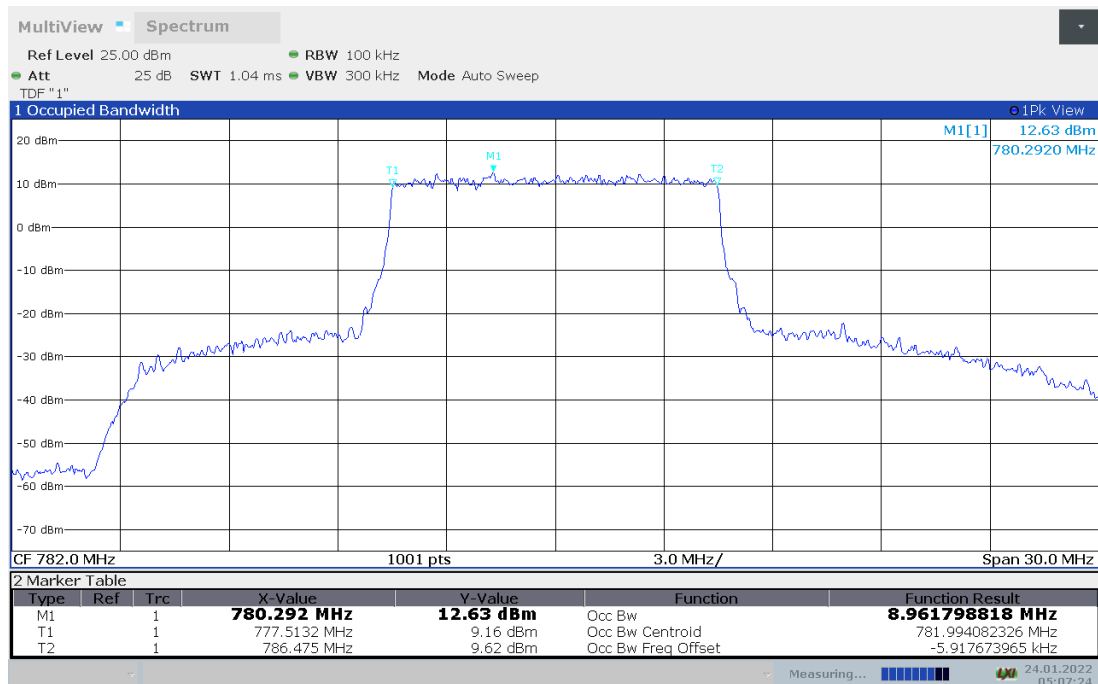

LTE band 26(824MHz-849MHz),BW1.4MHz(99%)


Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
836.50	1084.42	1089.27

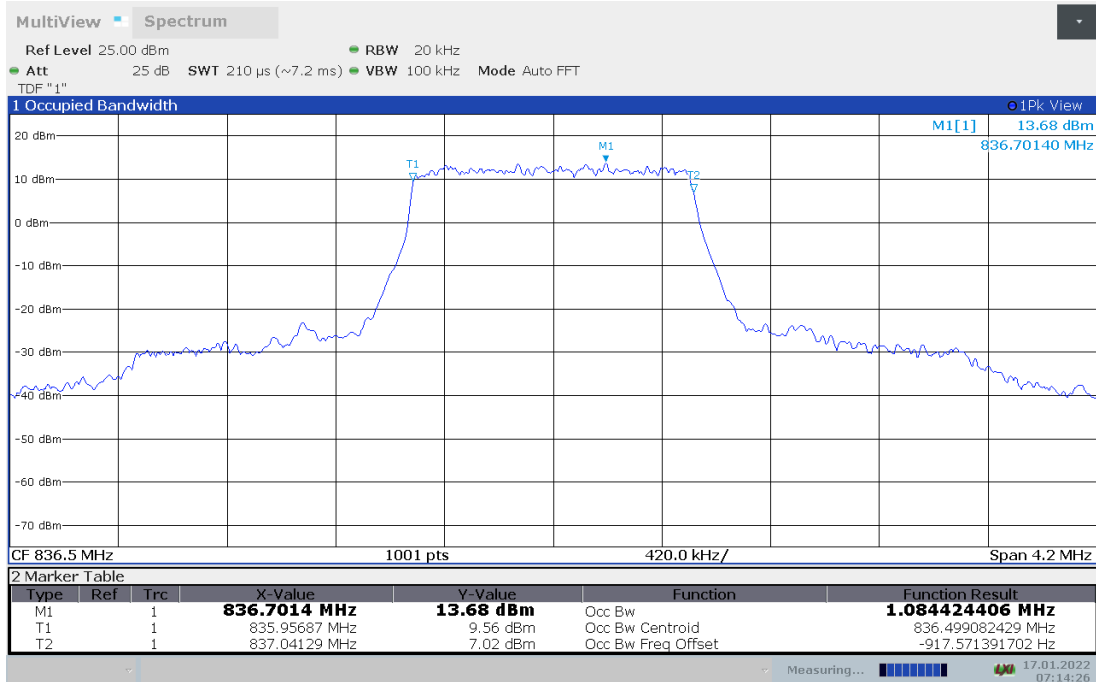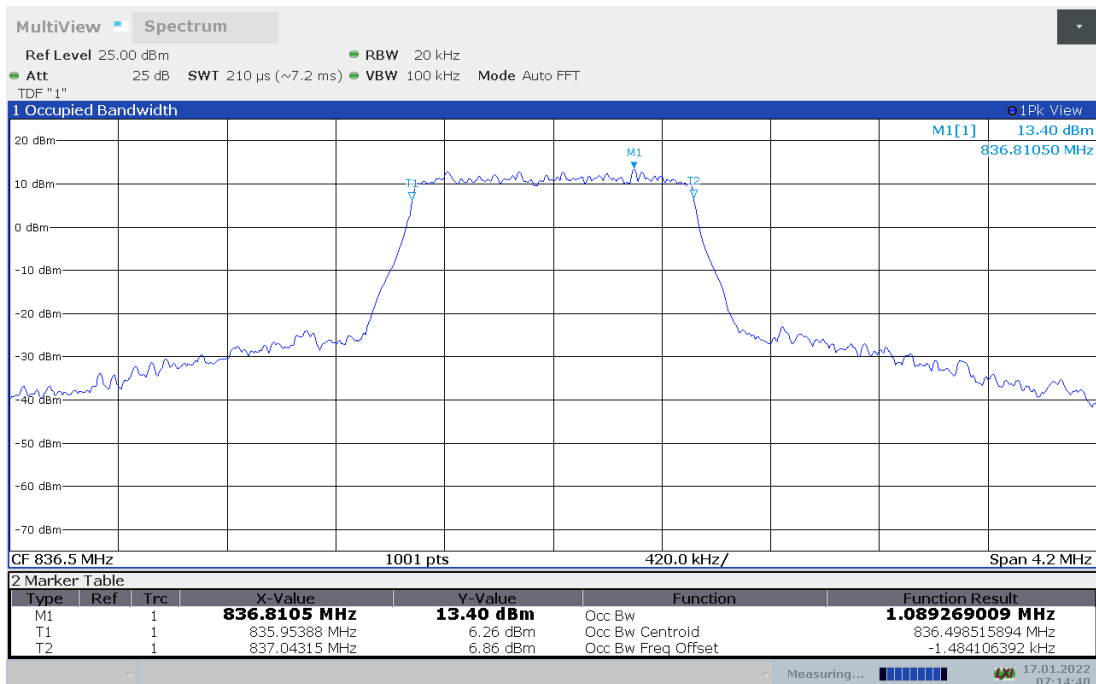LTE band 26(824MHz-849MHz), BW1.4MHz Bandwidth,QPSK (99% BW)

LTE band 26(824MHz-849MHz), BW1.4MHz Bandwidth,16QAM (99% BW)


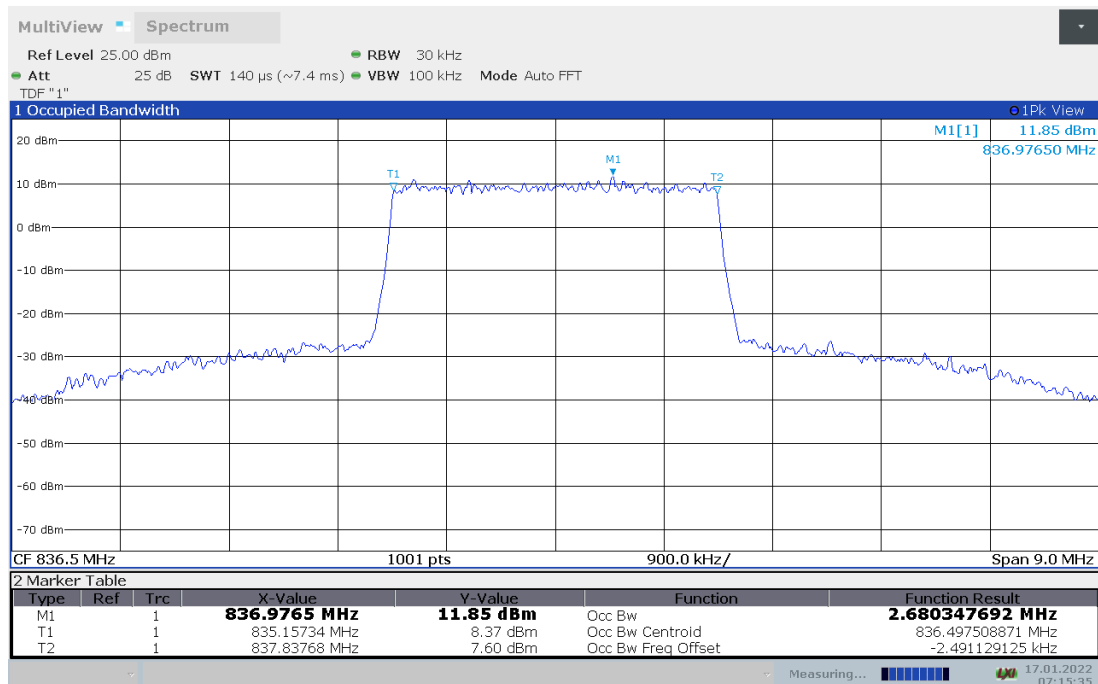
LTE band 26(824MHz-849MHz),3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
836.50	2680.28	2680.35

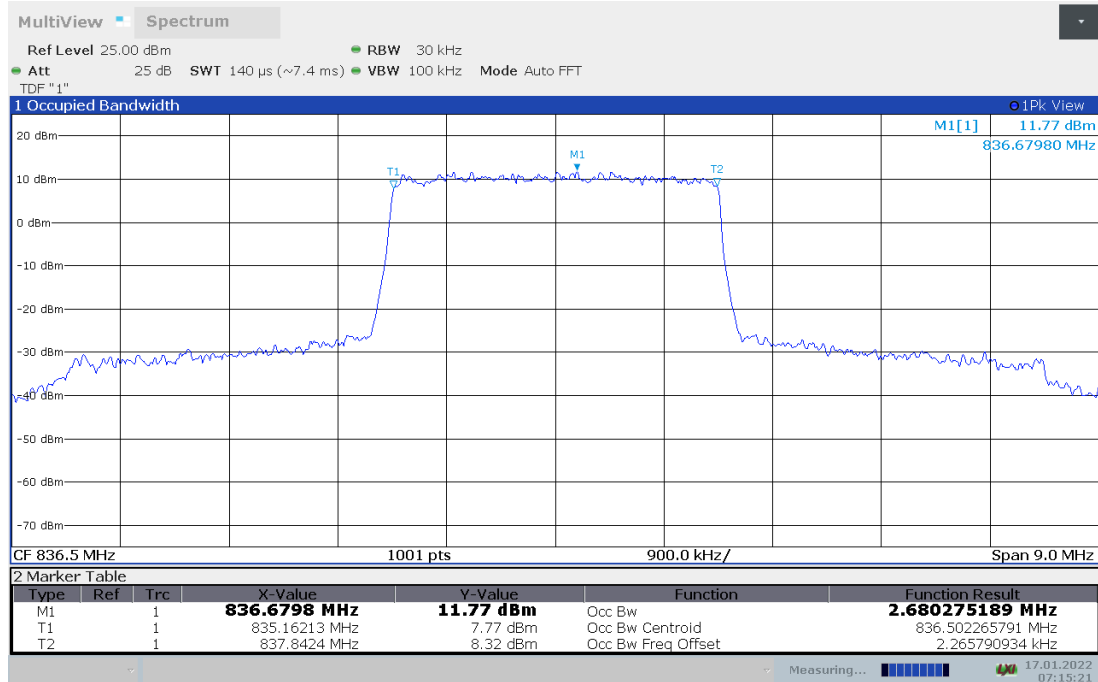LTE band 26(824MHz-849MHz) , 3MHz Bandwidth,QPSK (99% BW)




LTE band 26(824MHz-849MHz) , 3MHz Bandwidth,16QAM (99% BW)




LTE band 26(824MHz-849MHz),5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
836.50	4480.26	4476.93

LTE band 26(824MHz-849MHz), 5MHz Bandwidth,QPSK (99% BW)

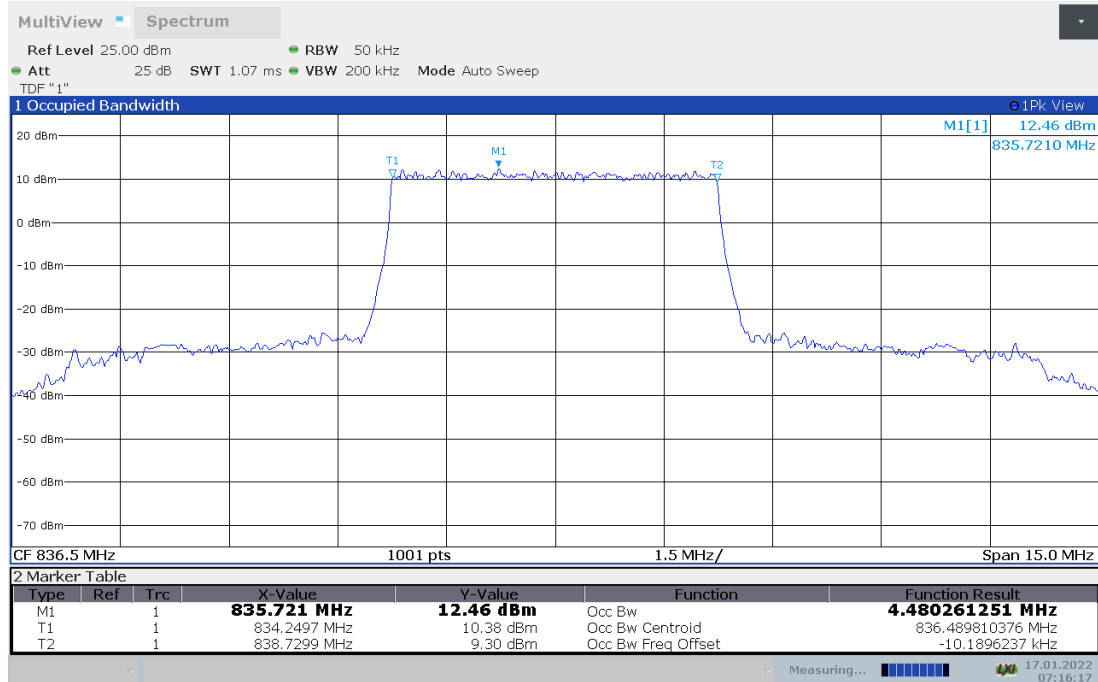


LTE band 26(824MHz-849MHz), 5MHz Bandwidth,16QAM (99% BW)

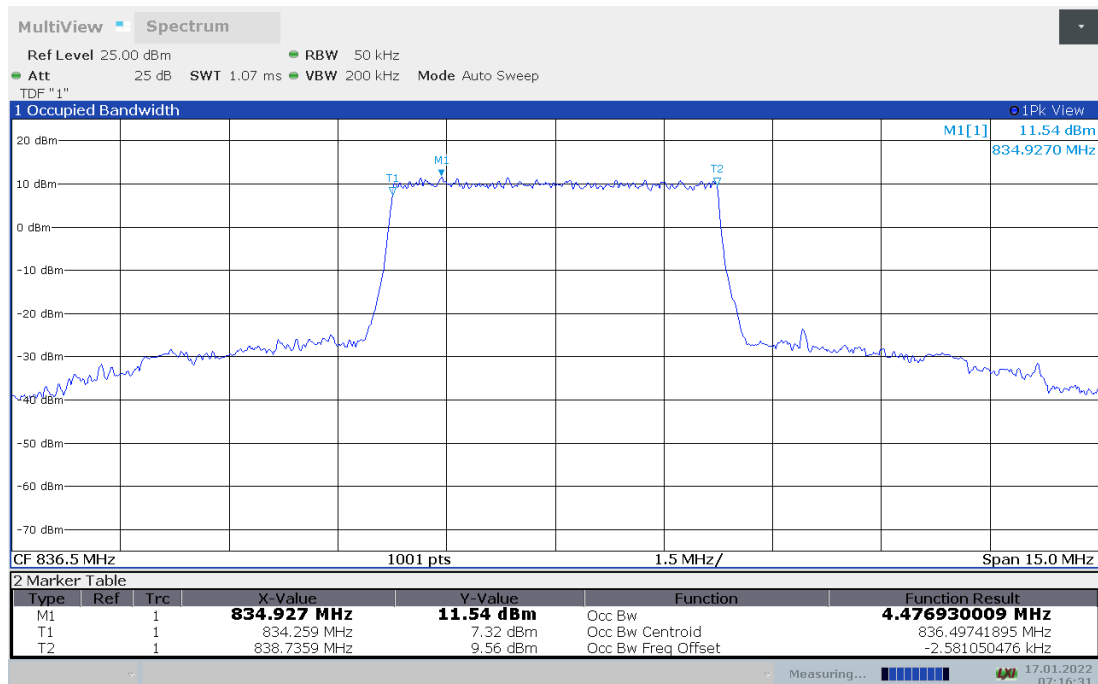


LTE band 26(824MHz-849MHz),10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
836.50	8942.97	8956.71

LTE band 26(824MHz-849MHz), 10MHz Bandwidth,QPSK (99% BW)

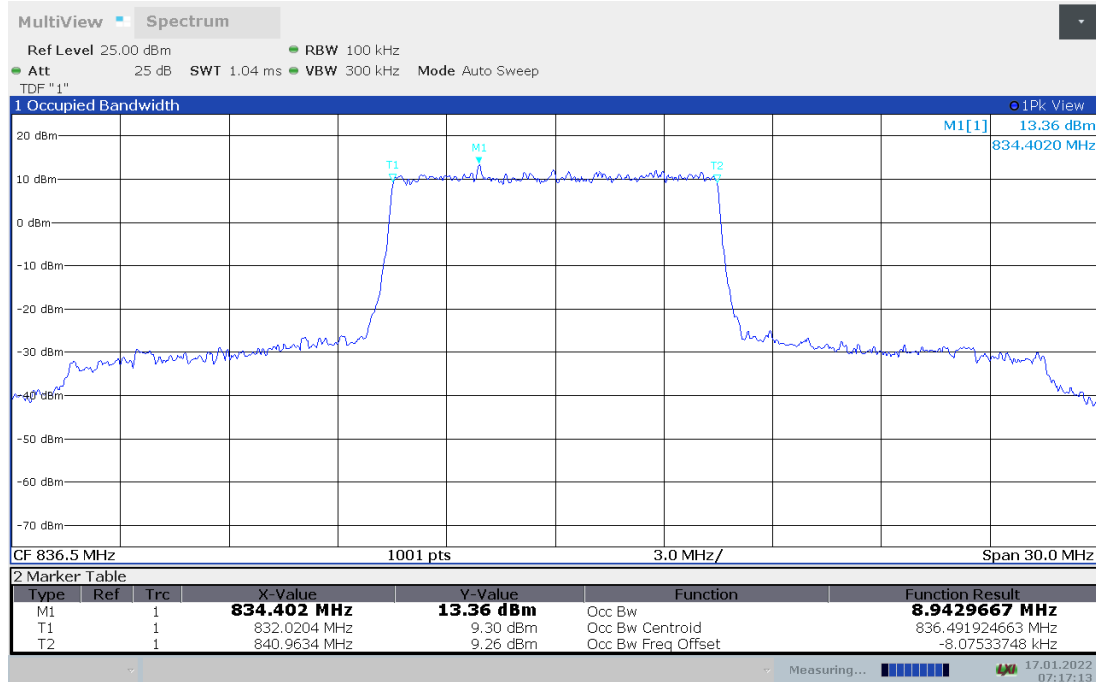


LTE band 26(824MHz-849MHz), 10MHz Bandwidth,16QAM (99% BW)

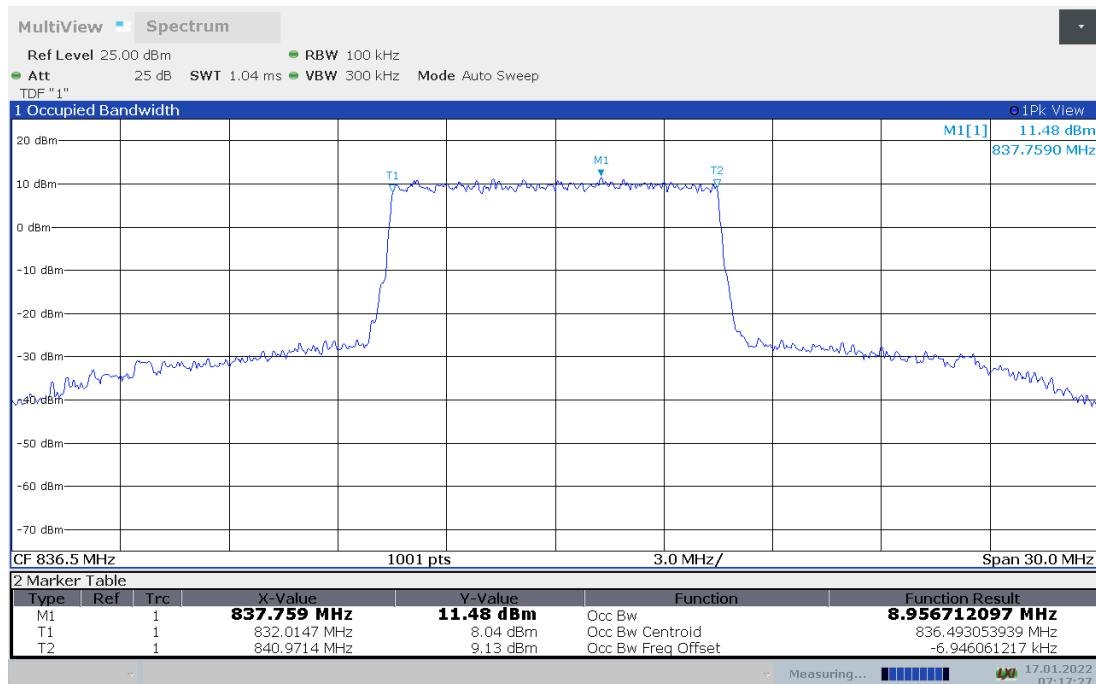


LTE band 26(824MHz-849MHz),15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
836.50	13423.86	13431.82

LTE band 26(824MHz-849MHz), 15MHz Bandwidth,QPSK (99% BW)


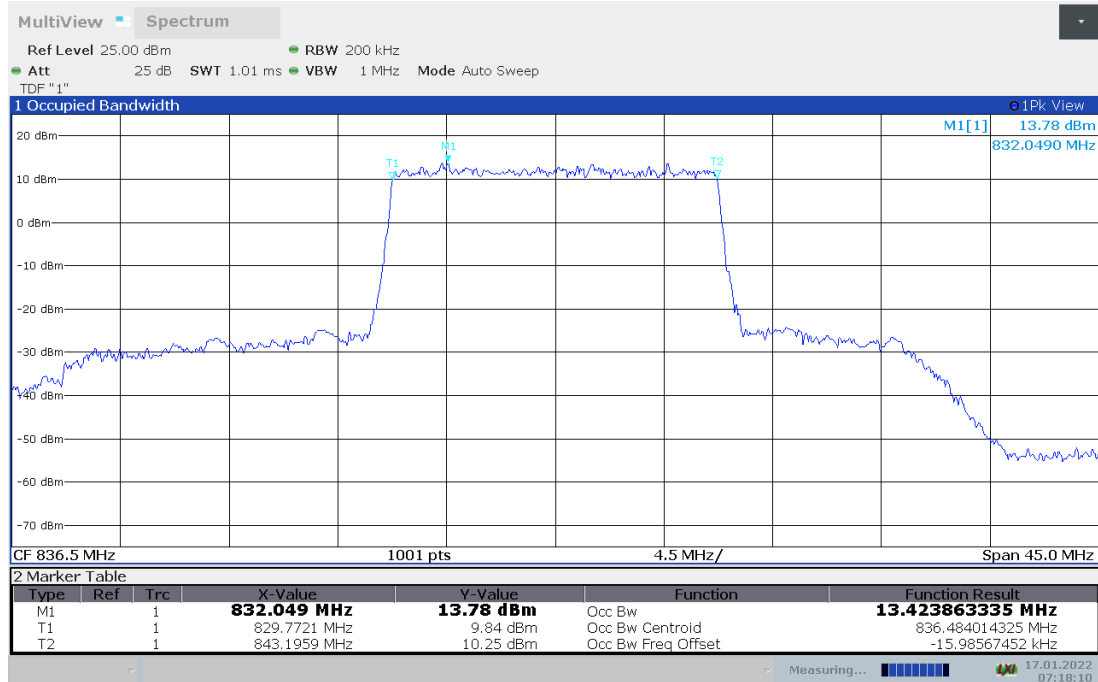


LTE band 26(824MHz-849MHz), 15MHz Bandwidth,16QAM (99% BW)

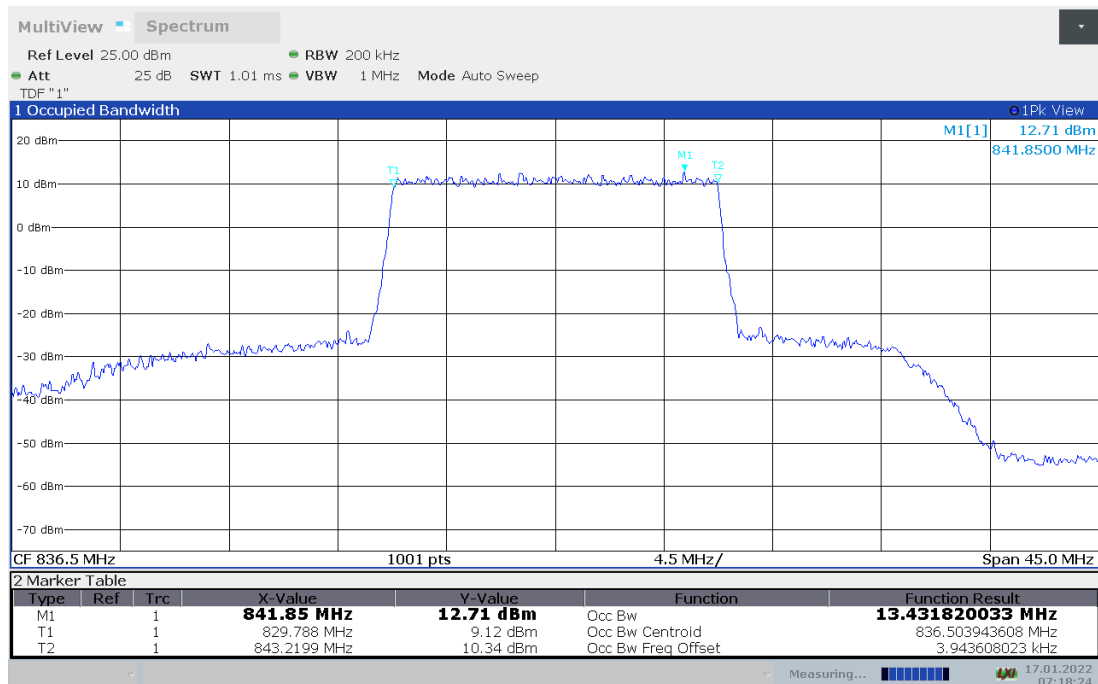

LTE band 26(814MHz-824MHz),BW1.4MHz(99%)


Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
819.00	1083.52	1087.38

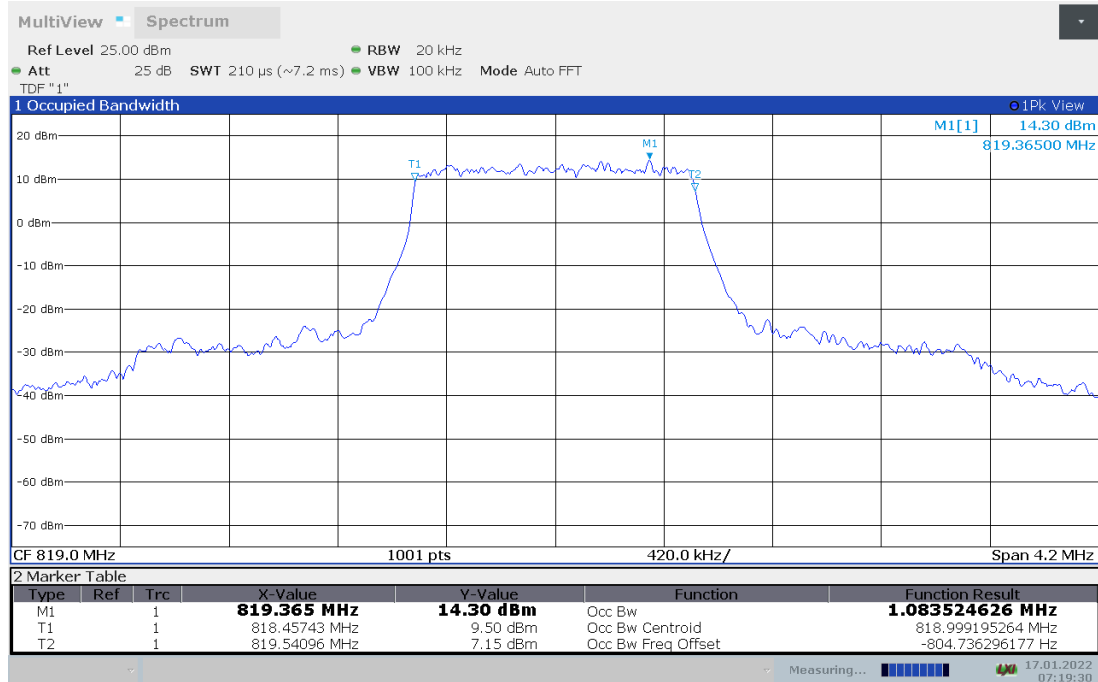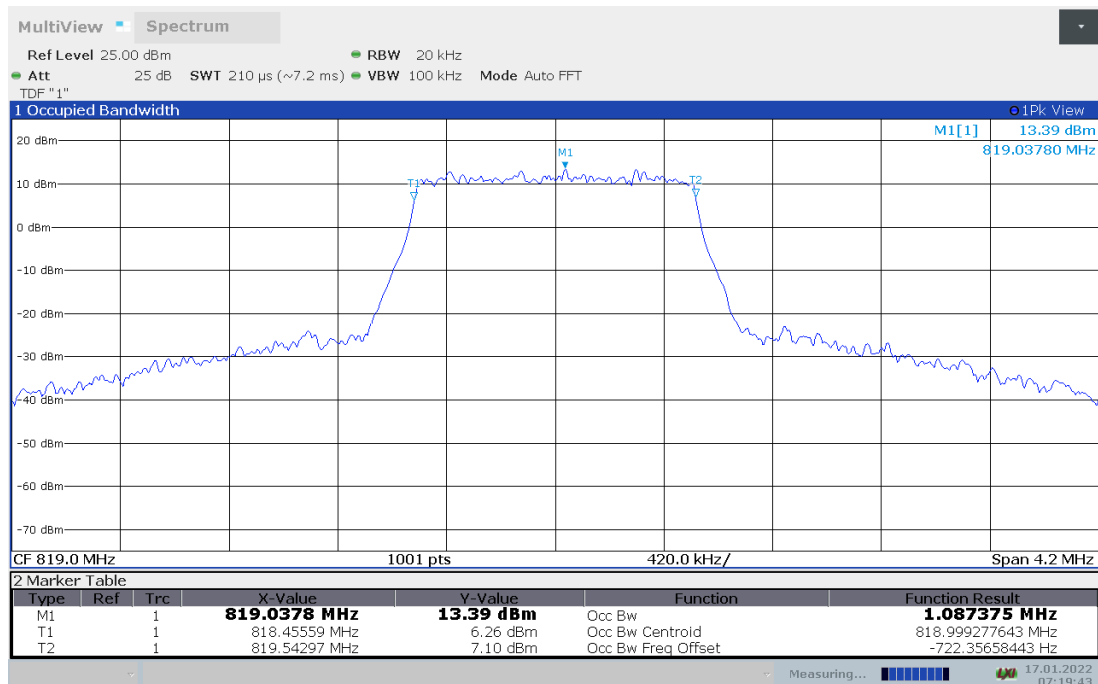LTE band 26(814MHz-824MHz), BW1.4MHz Bandwidth,QPSK (99% BW)

LTE band 26(814MHz-824MHz), BW1.4MHz Bandwidth,16QAM (99% BW)


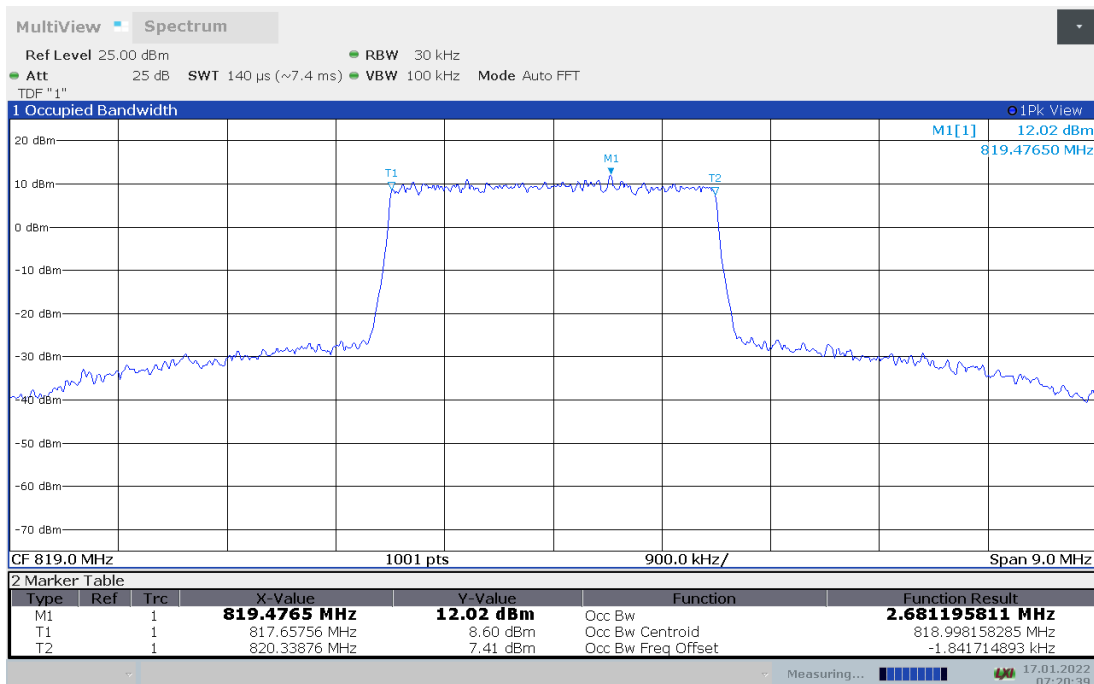
LTE band 26(814MHz-824MHz),3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
819.00	2681.73	2681.20

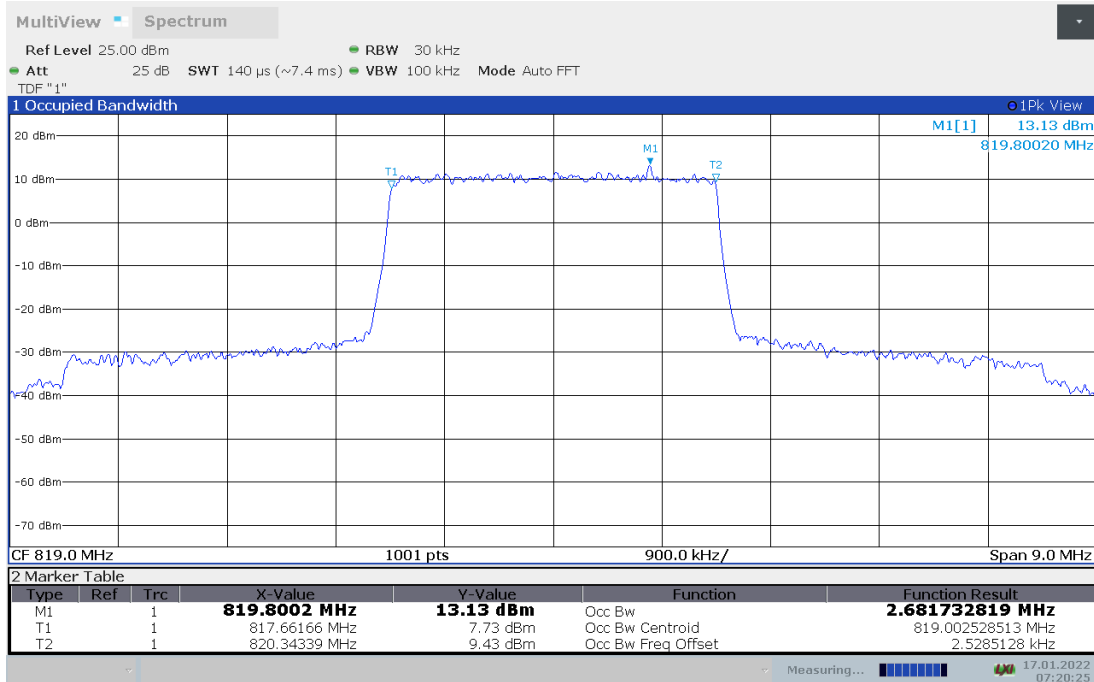LTE band 26(814MHz-824MHz), 3MHz Bandwidth,QPSK (99% BW)




LTE band 26(814MHz-824MHz), 3MHz Bandwidth,16QAM (99% BW)




LTE band 26(814MHz-824MHz),5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
819.00	4481.51	4477.85

LTE band 26(814MHz-824MHz), 5MHz Bandwidth,QPSK (99% BW)

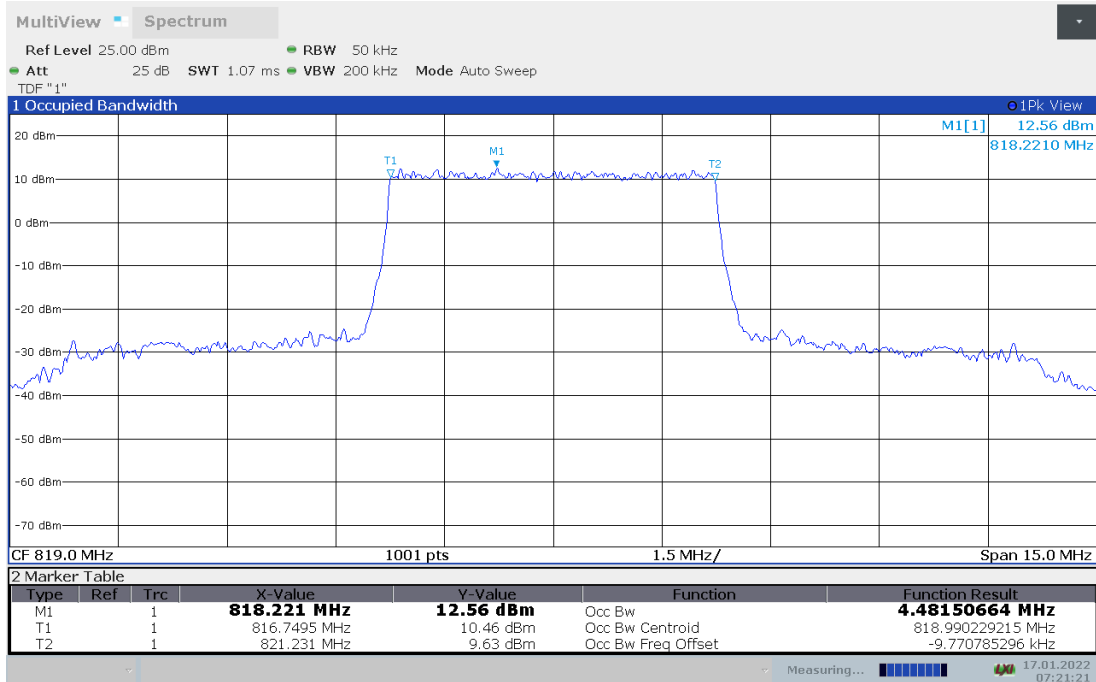


LTE band 26(814MHz-824MHz), 5MHz Bandwidth,16QAM (99% BW)

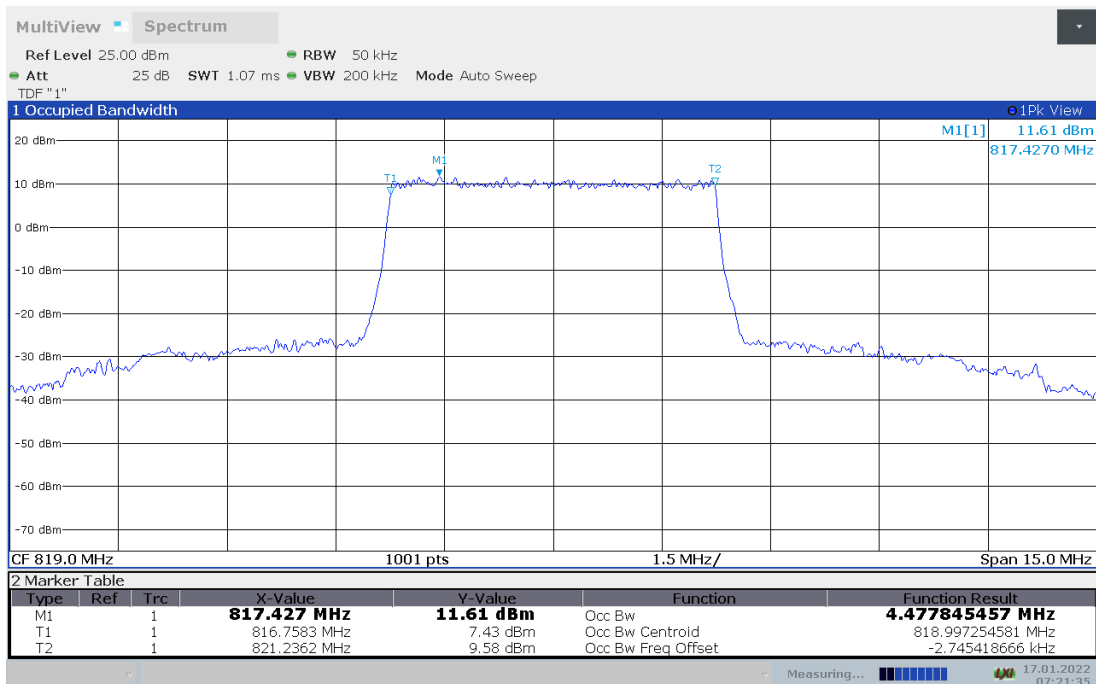


LTE band 26(814MHz-824MHz),10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
819.00	8937.41	8954.37

LTE band 26(814MHz-824MHz), 10MHz Bandwidth,QPSK (99% BW)

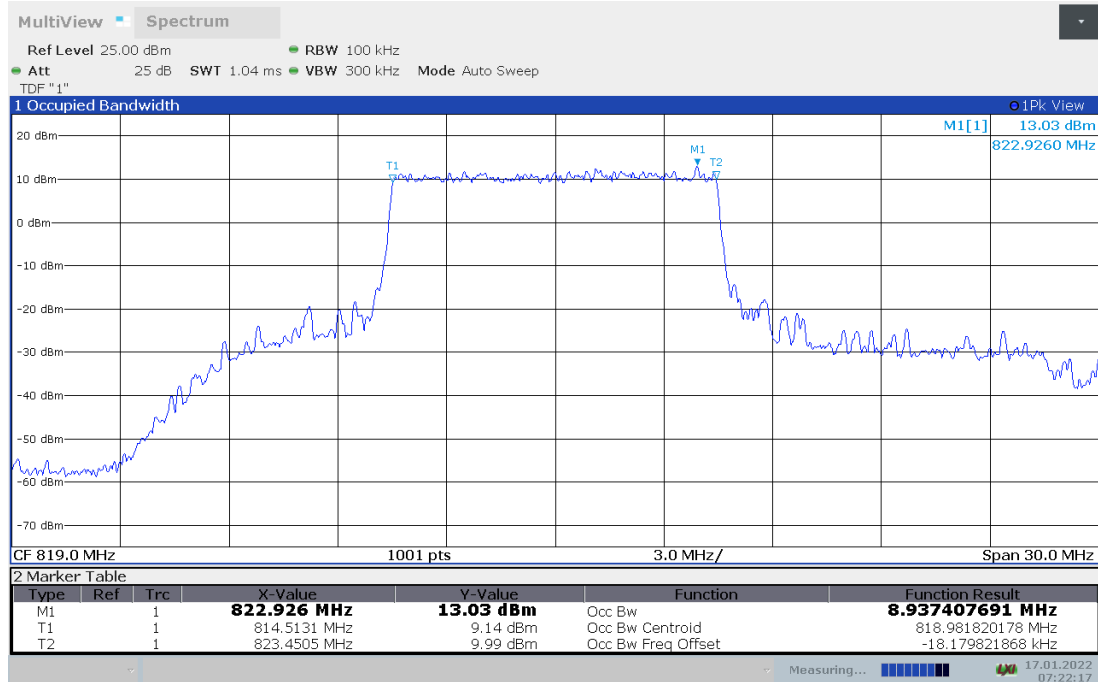


LTE band 26(814MHz-824MHz), 10MHz Bandwidth,16QAM (99% BW)

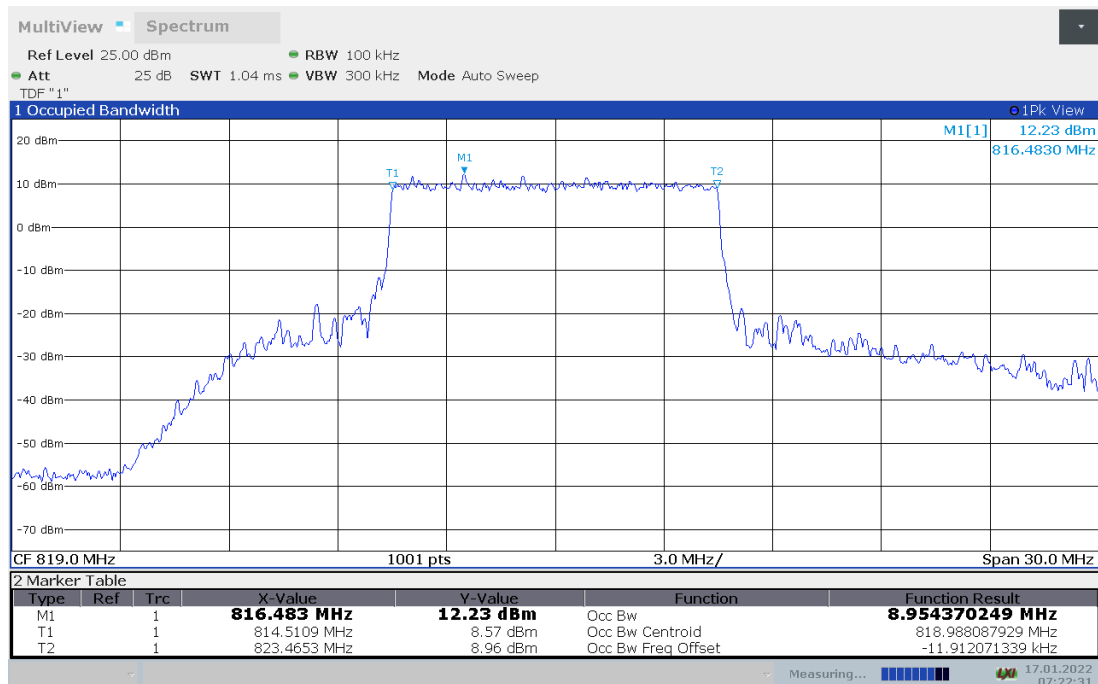


LTE band 38,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2595.00	4484.83	4466.62

LTE band 38 , 5MHz Bandwidth,QPSK (99% BW)

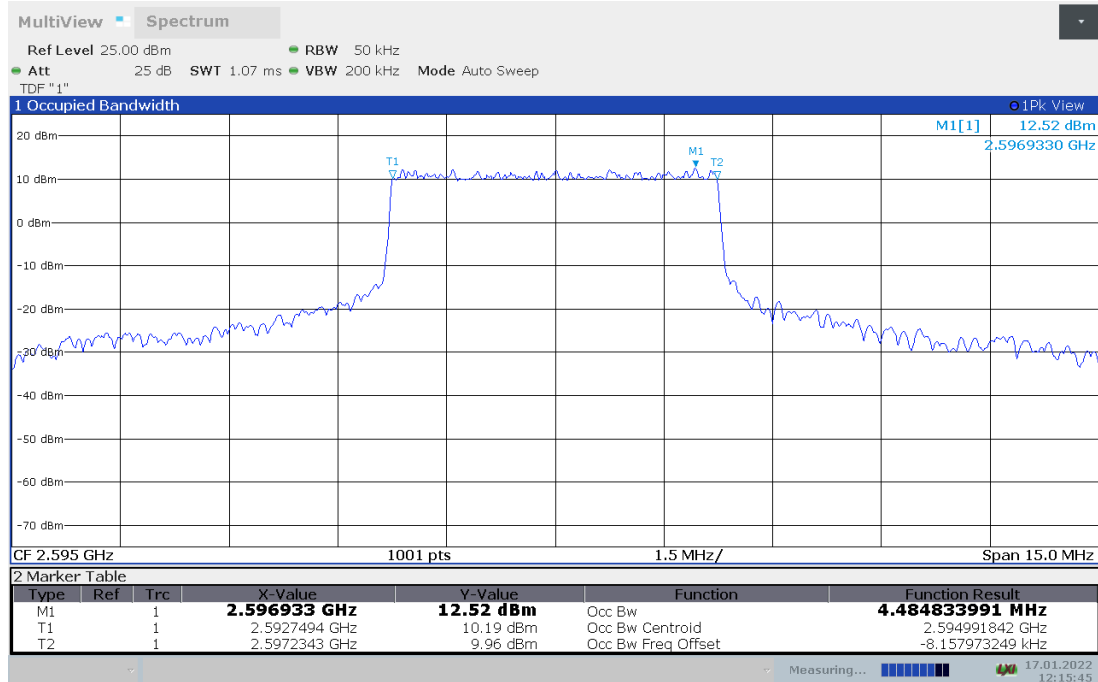


LTE band 38 , 5MHz Bandwidth,16QAM (99% BW)

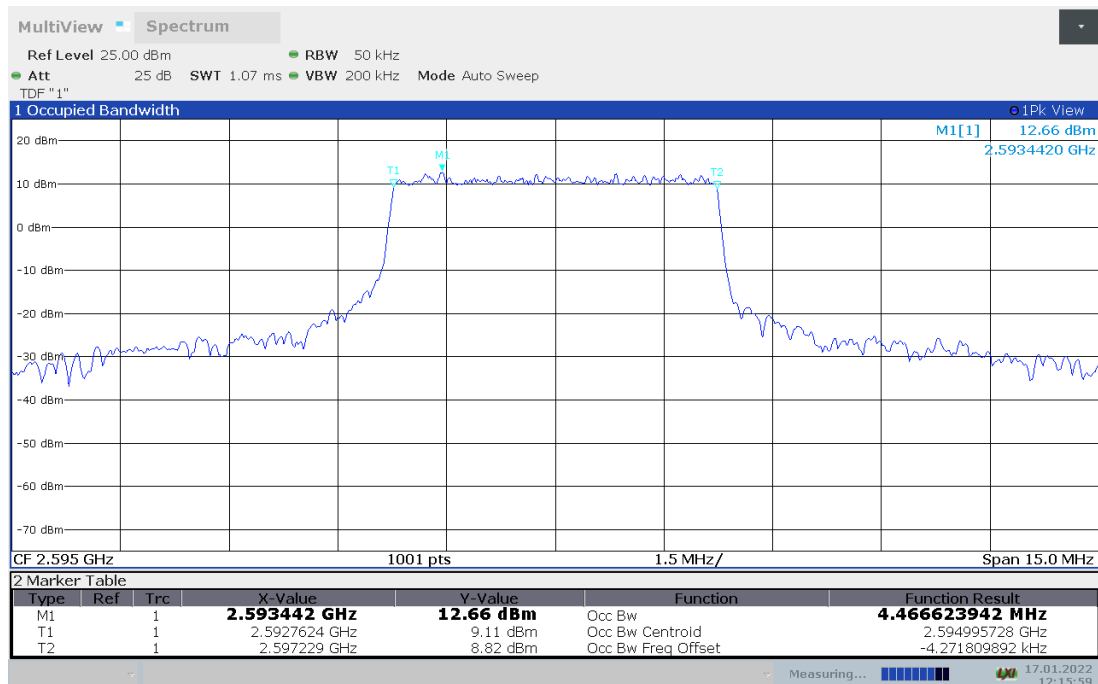


LTE band 38,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2595.00	8950.65	8952.86

LTE band 38 , 10MHz Bandwidth,QPSK (99% BW)

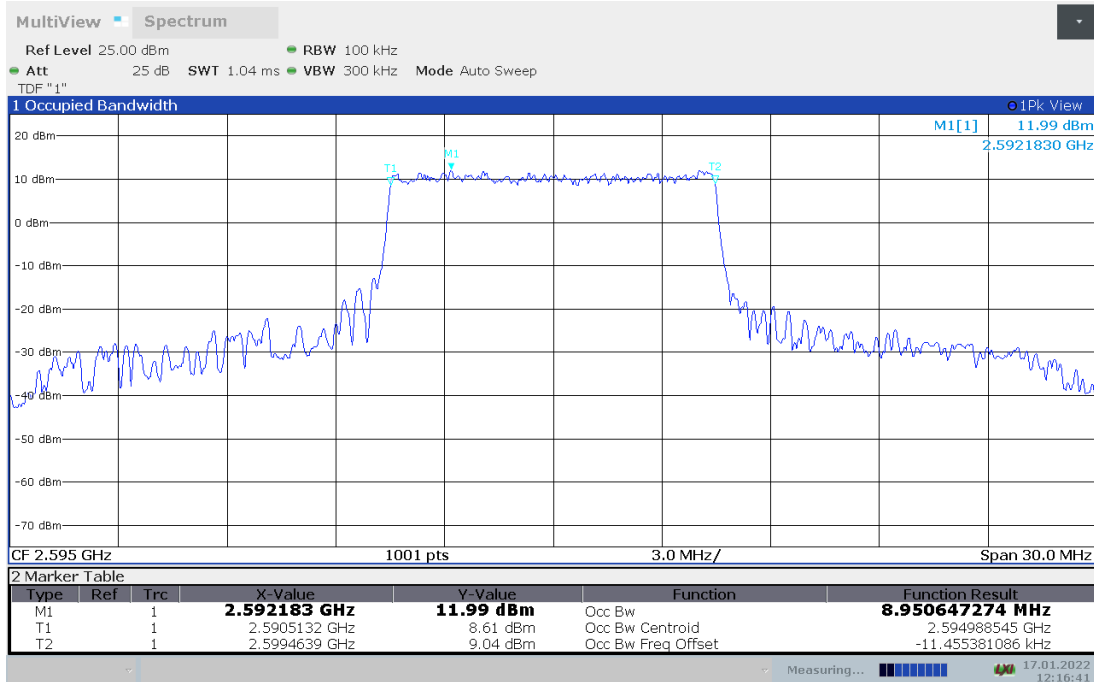


LTE band 38 , 10MHz Bandwidth,16QAM (99% BW)

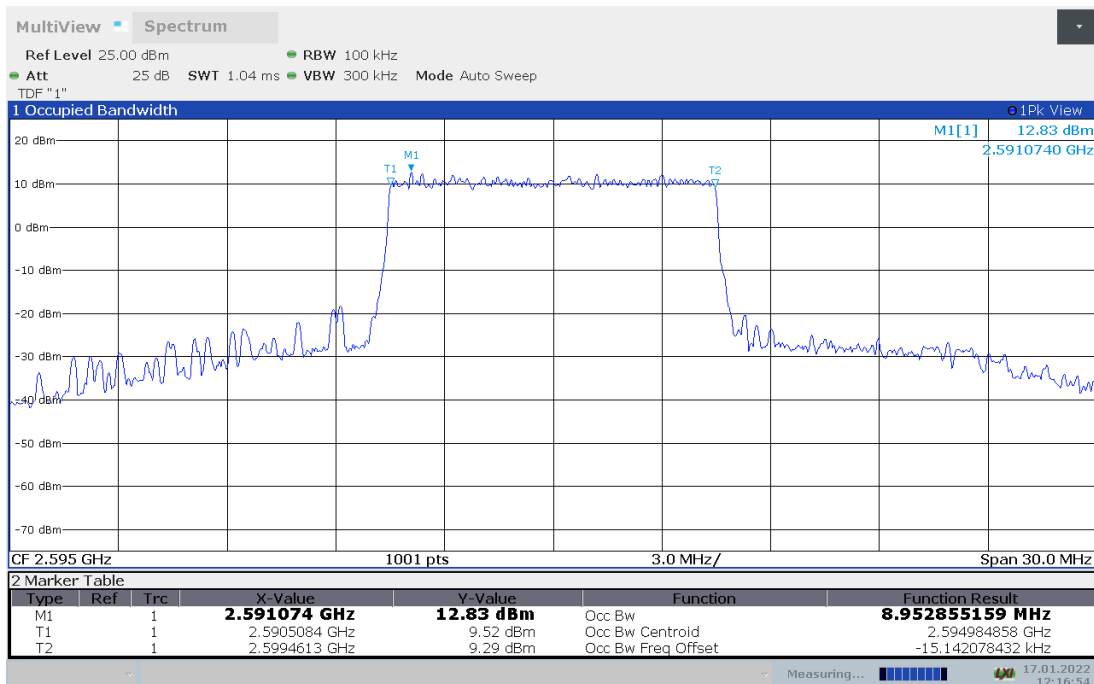


LTE band 38,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2595.00	13458.41	13470.28

LTE band 38 , 15MHz Bandwidth,QPSK (99% BW)

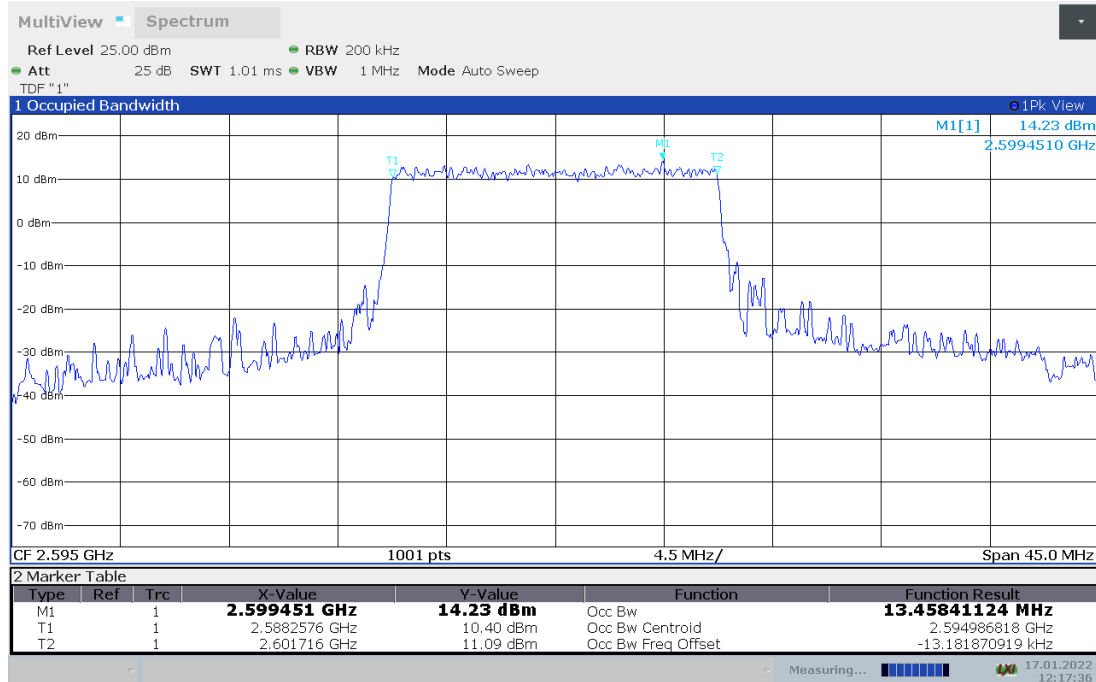


LTE band 38 , 15MHz Bandwidth,16QAM (99% BW)

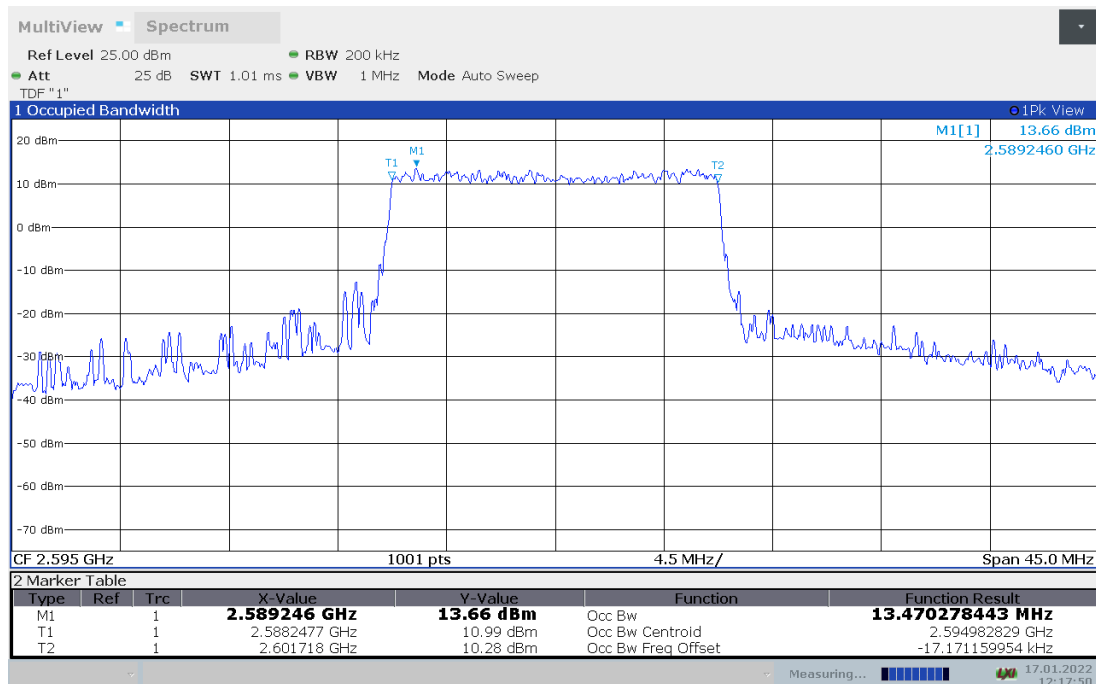


LTE band 38,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2595.00	17896.88	17895.87

LTE band 38 , 20MHz Bandwidth,QPSK (99% BW)

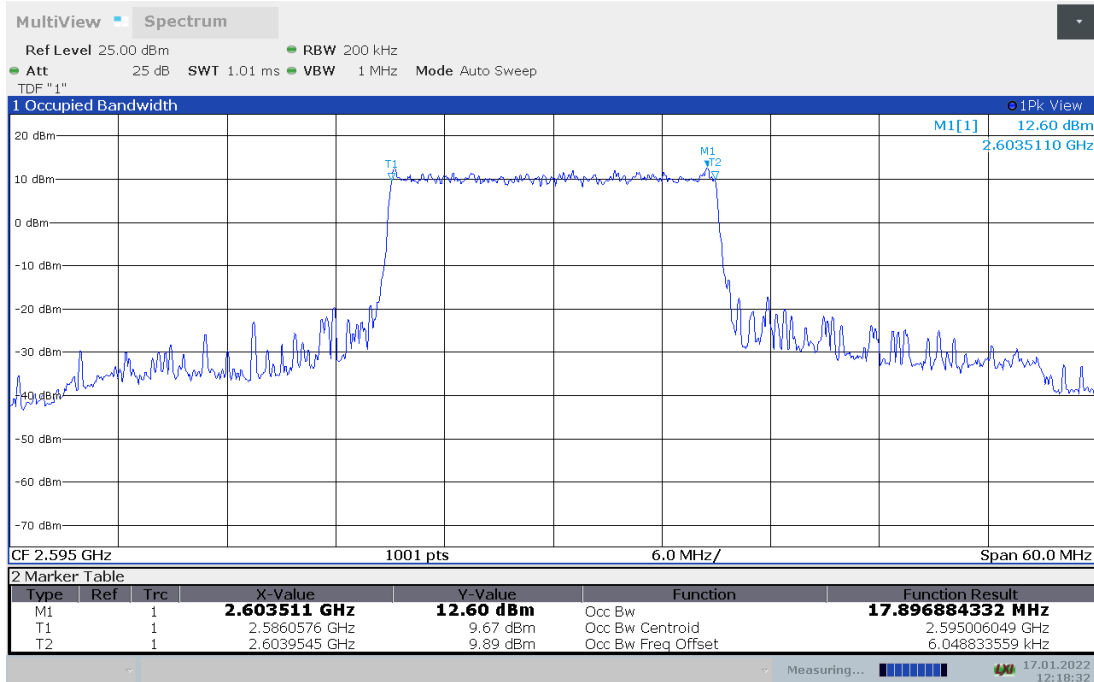


LTE band 38 , 20MHz Bandwidth,16QAM (99% BW)

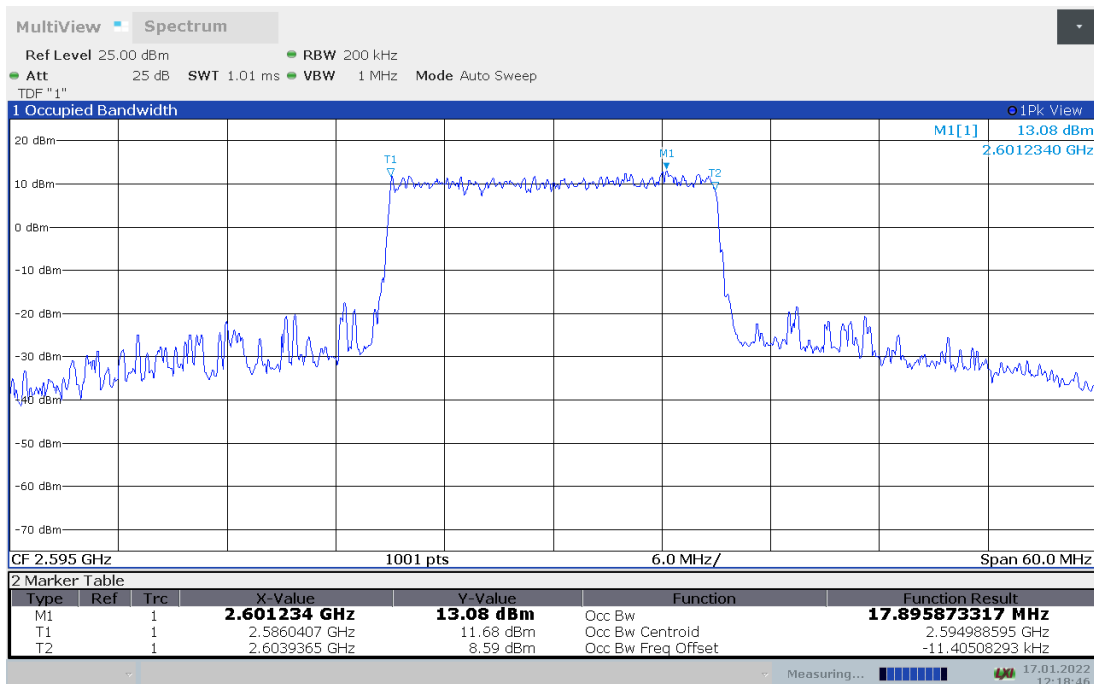


LTE band 66,BW1.4MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1745.00	1089.81	1086.19

LTE band 66 , BW1.4MHz Bandwidth,QPSK (99% BW)

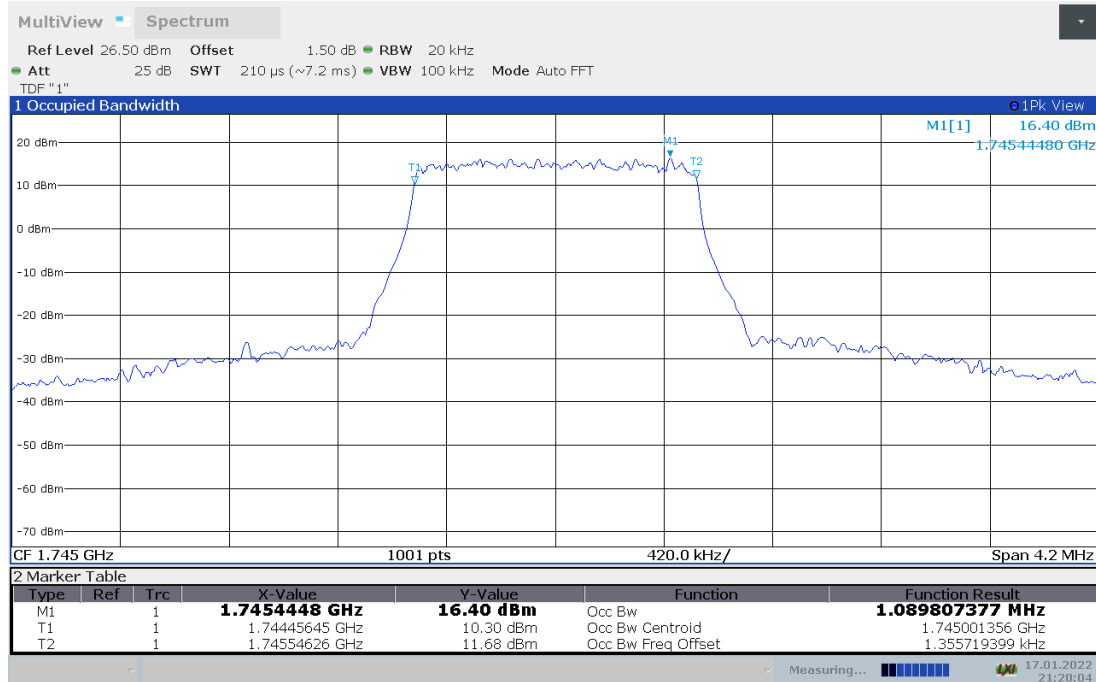


LTE band 66 , BW1.4MHz Bandwidth,16QAM (99% BW)

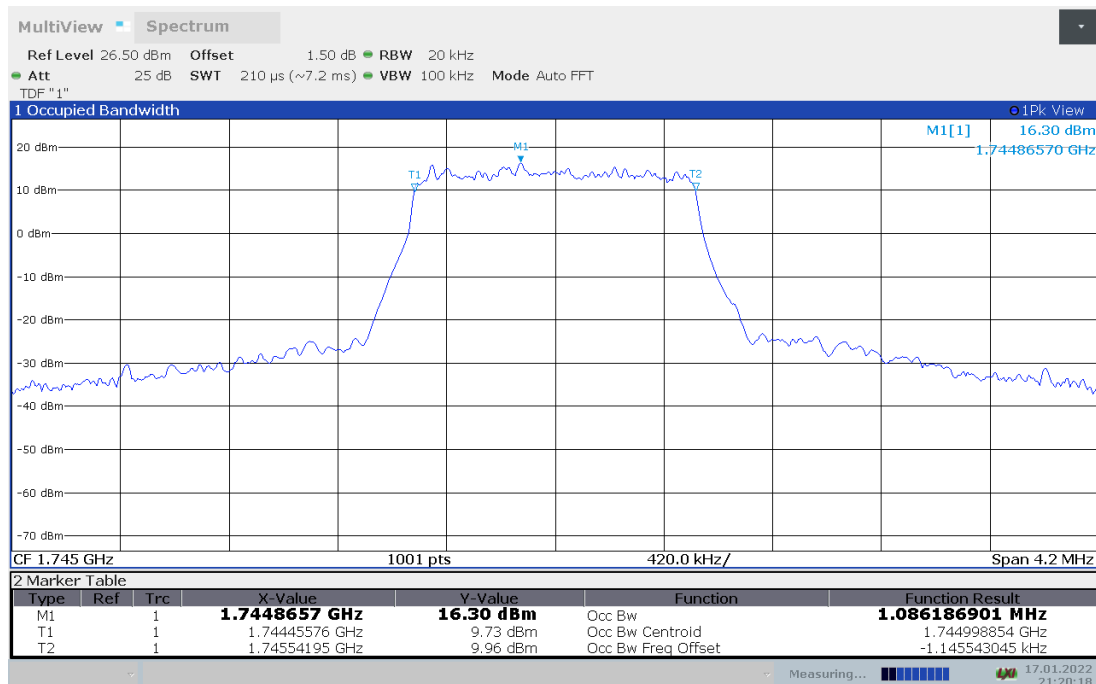


LTE band 66,3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1745.00	2680.71	2680.95

LTE band 66 , 3MHz Bandwidth,QPSK (99% BW)

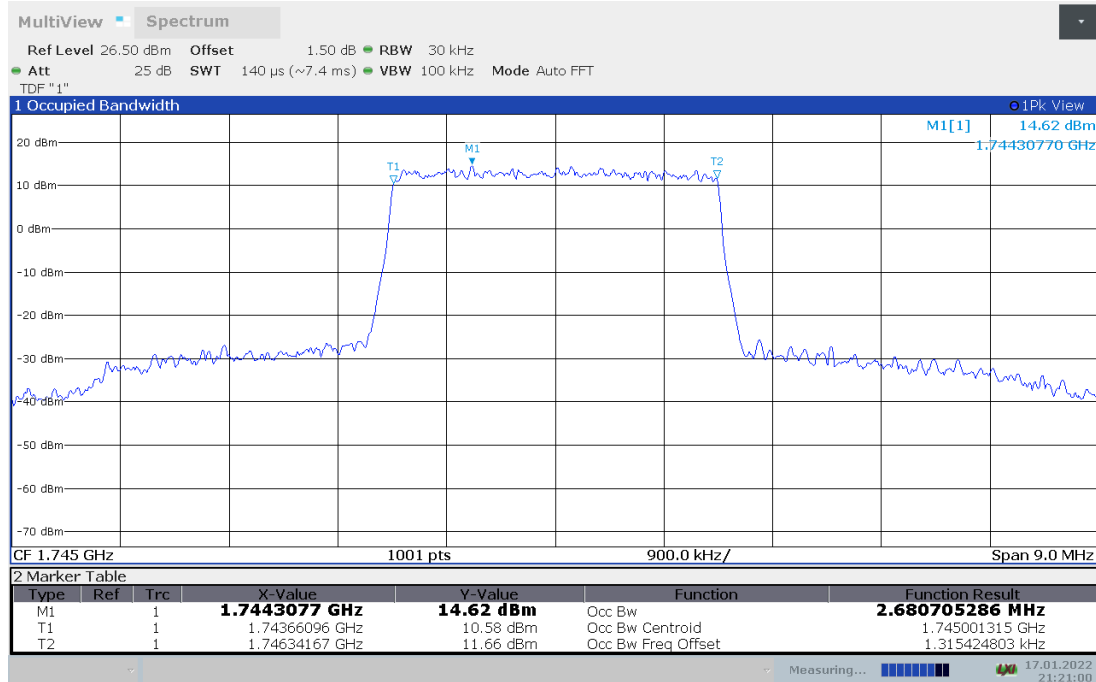


LTE band 66 , 3MHz Bandwidth,16QAM (99% BW)

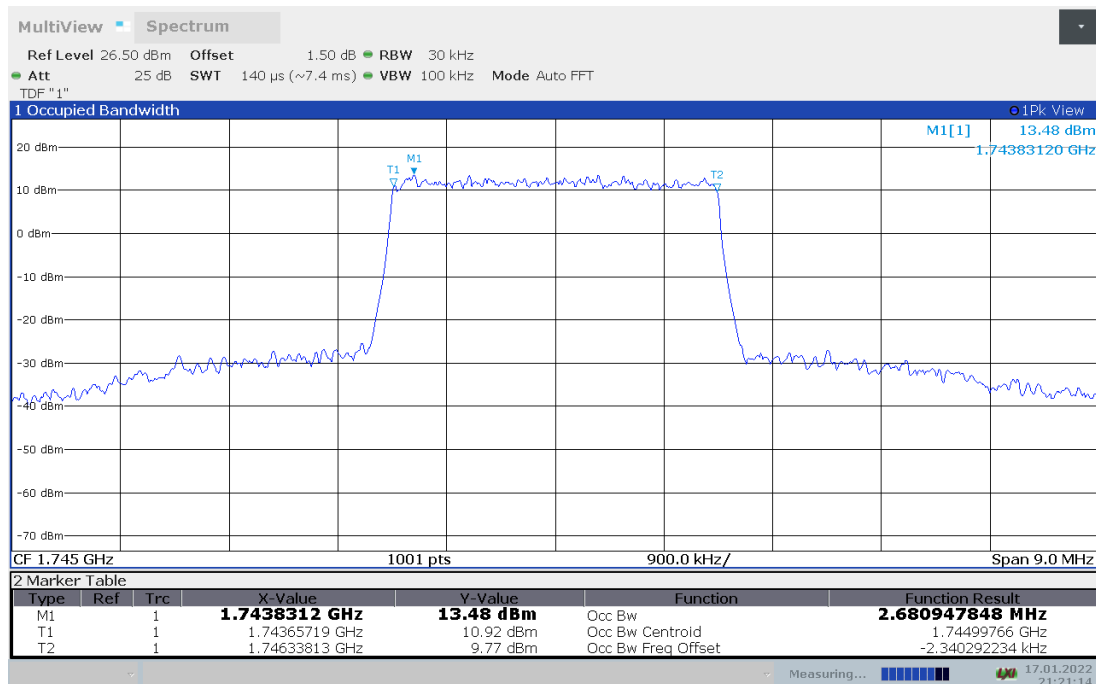


LTE band 66,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1745.00	4491.81	4495.27

LTE band 66 , 5MHz Bandwidth,QPSK (99% BW)

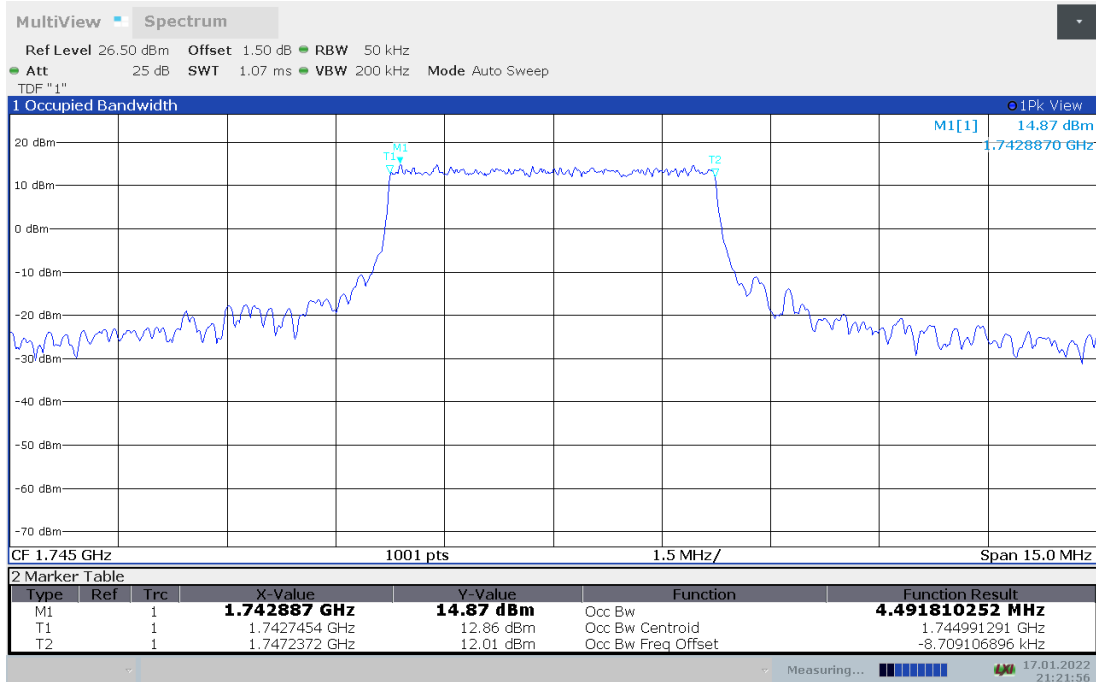


LTE band 66 , 5MHz Bandwidth,16QAM (99% BW)

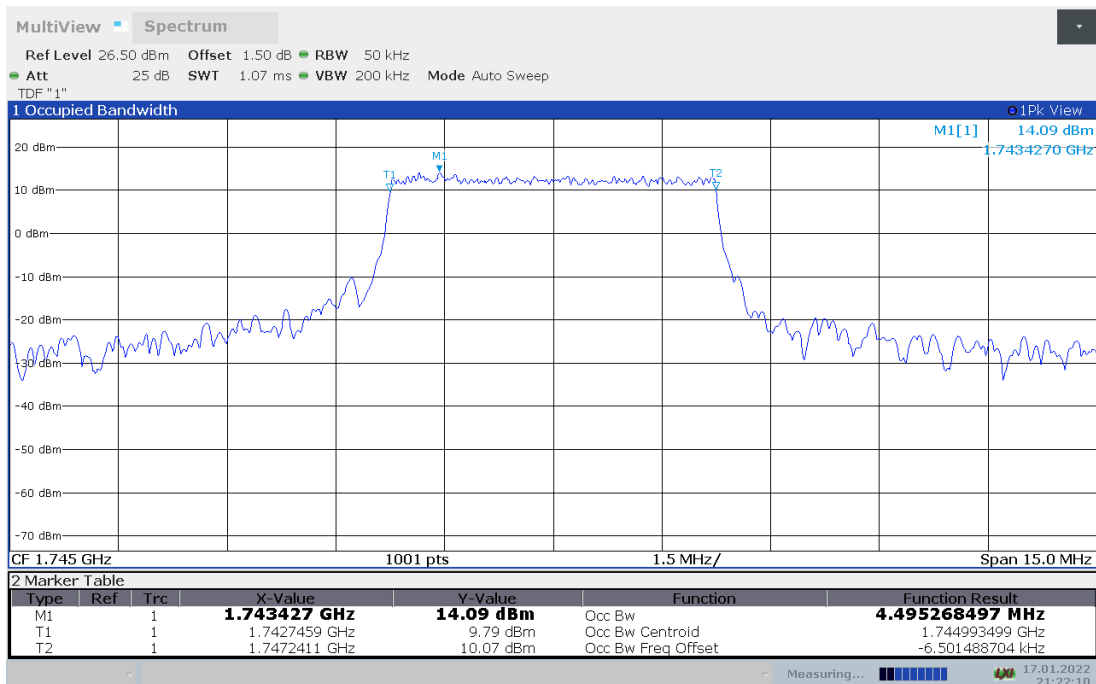


LTE band 66,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1745.00	8947.92	8960.14

LTE band 66 , 10MHz Bandwidth,QPSK (99% BW)

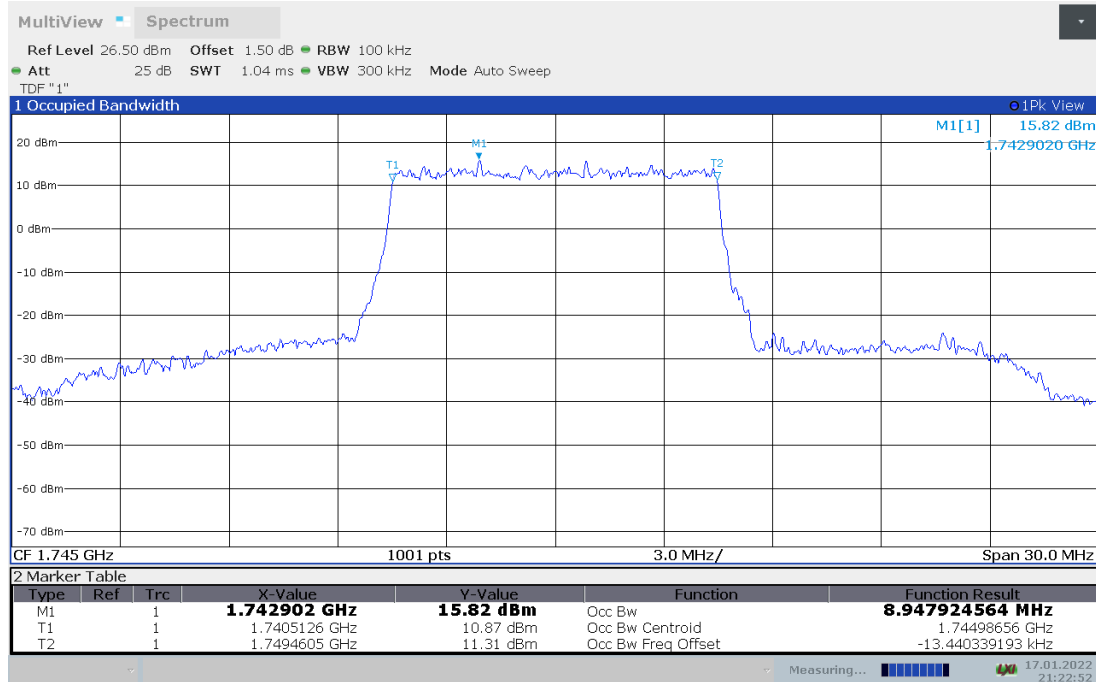


LTE band 66 , 10MHz Bandwidth,16QAM (99% BW)

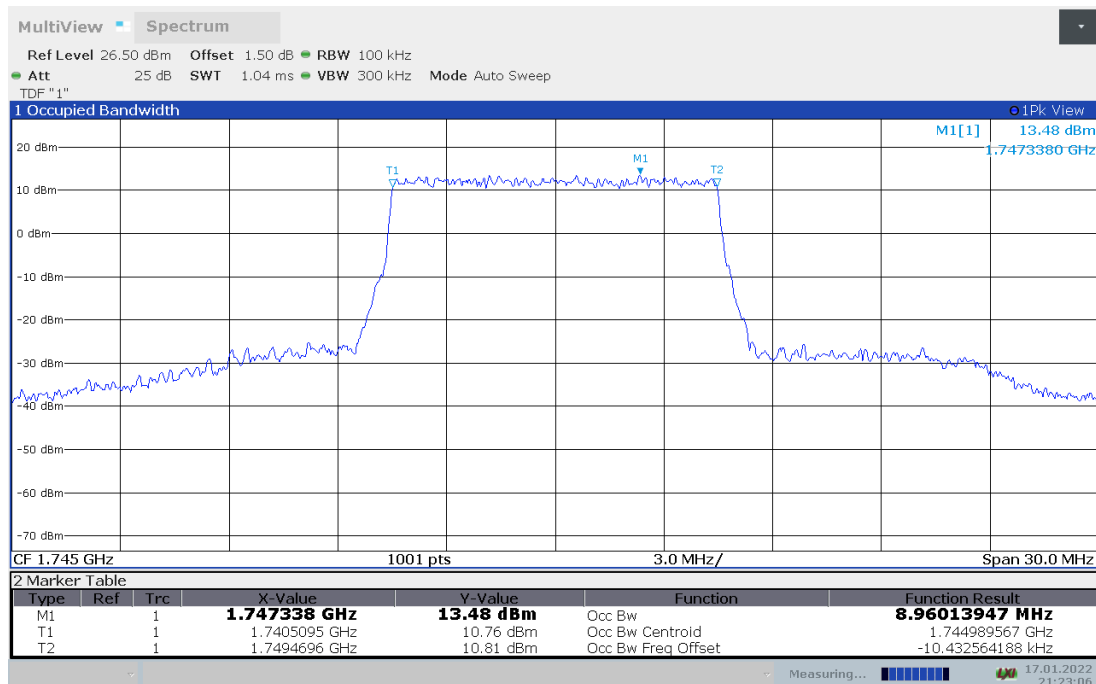


LTE band 66,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1745.00	13433.43	13495.72

LTE band 66 , 15MHz Bandwidth,QPSK (99% BW)

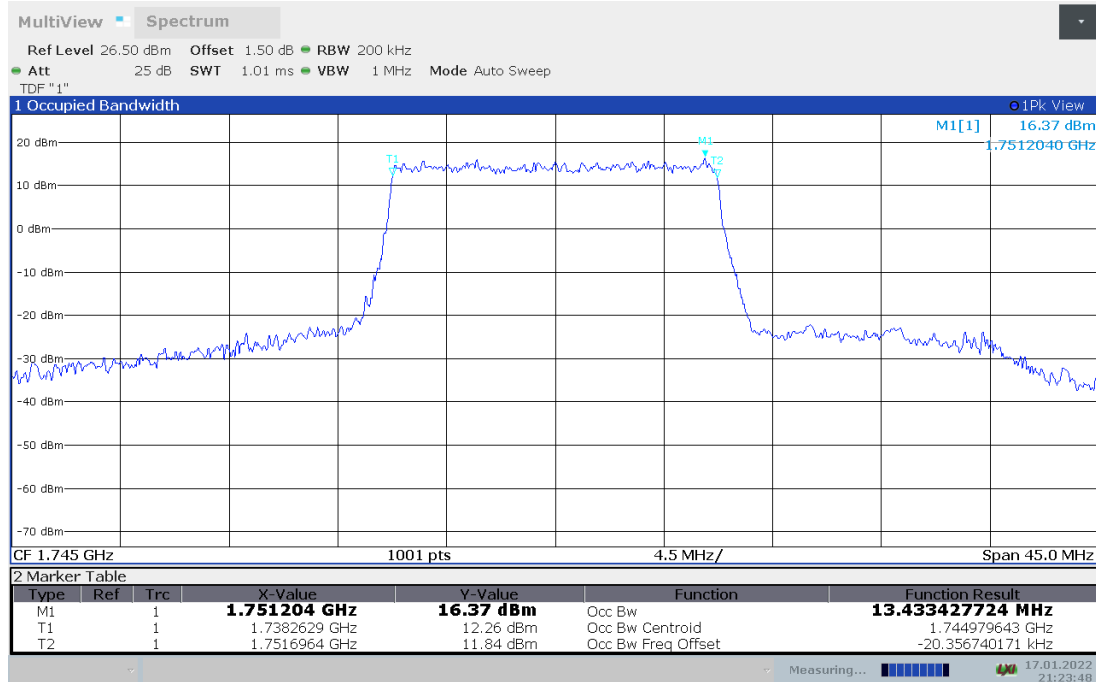


LTE band 66 , 15MHz Bandwidth,16QAM (99% BW)

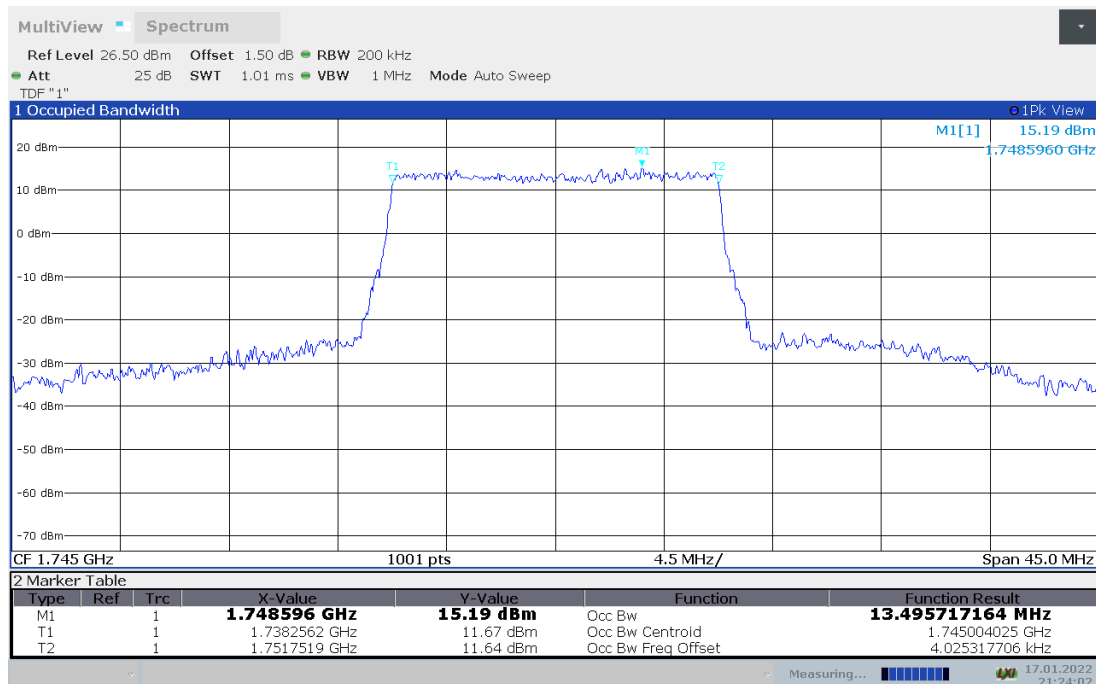


LTE band 66,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
1745.00	17924.01	17897.00

LTE band 66 , 20MHz Bandwidth,QPSK (99% BW)

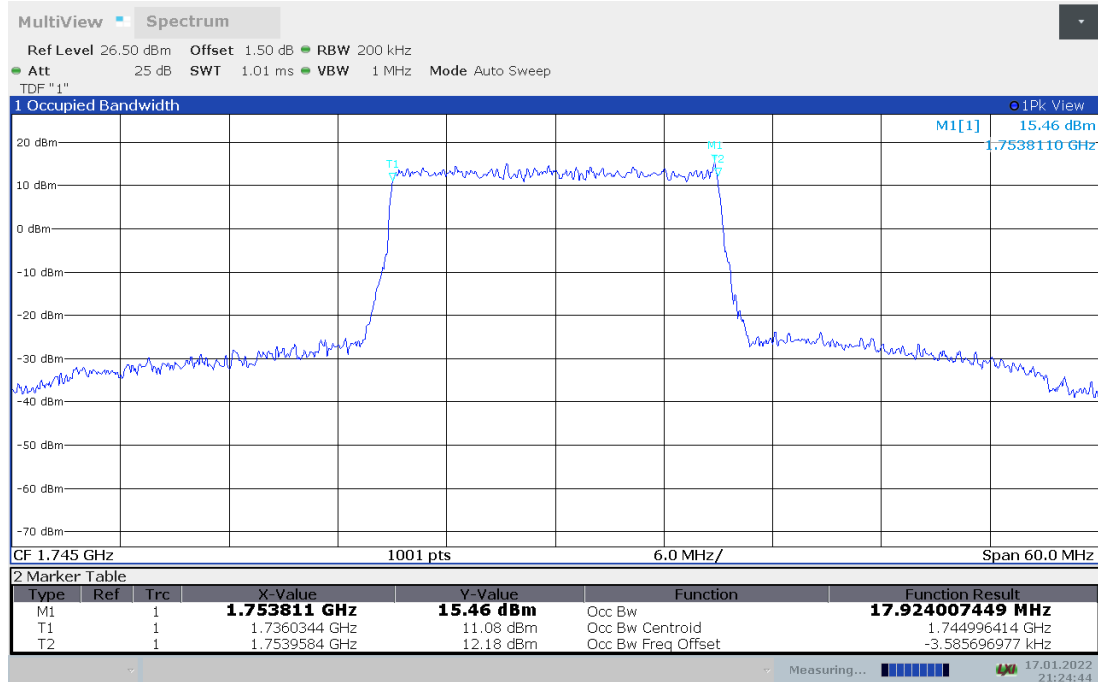

LTE band 66 , 20MHz Bandwidth,16QAM (99% BW)

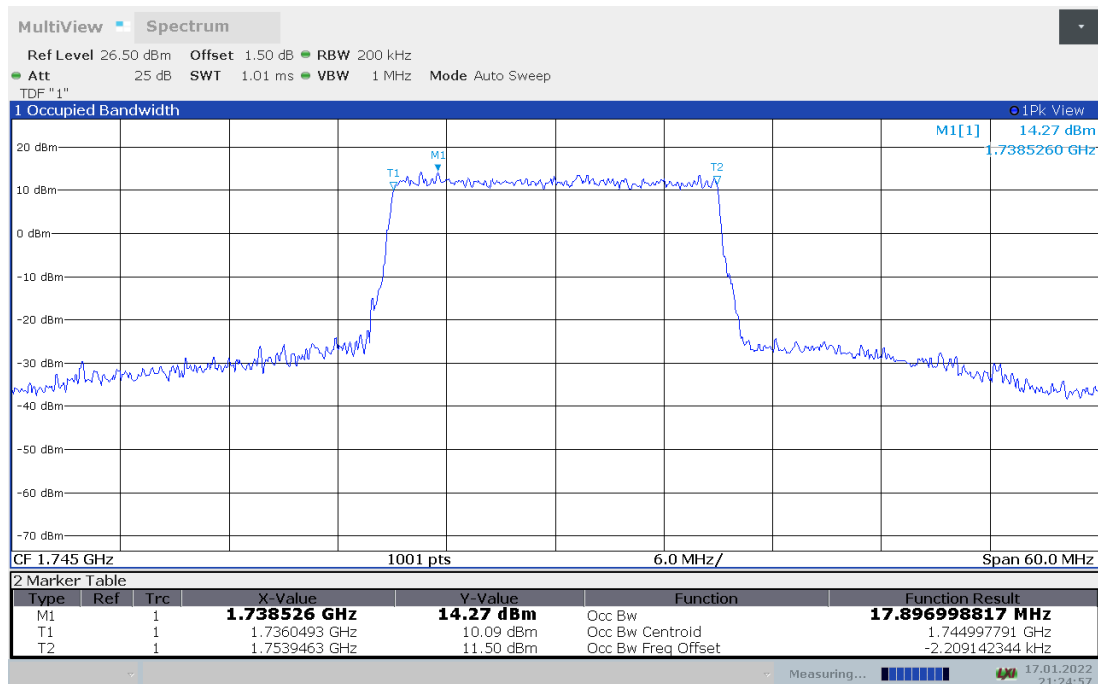

Note: Expanded measurement uncertainty is $U = 3428$ Hz, $k = 2$

A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238, 27.53, 90.1215.

A.5.1 Measurement Procedure

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 26dB bandwidth function of the spectrum analyzer and report the measured bandwidth.


A.5.2 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


LTE band 2, BW1.4MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880.00	1.27	1.26

LTE band 2 , BW1.4MHz Bandwidth,QPSK (-26dBc BW)

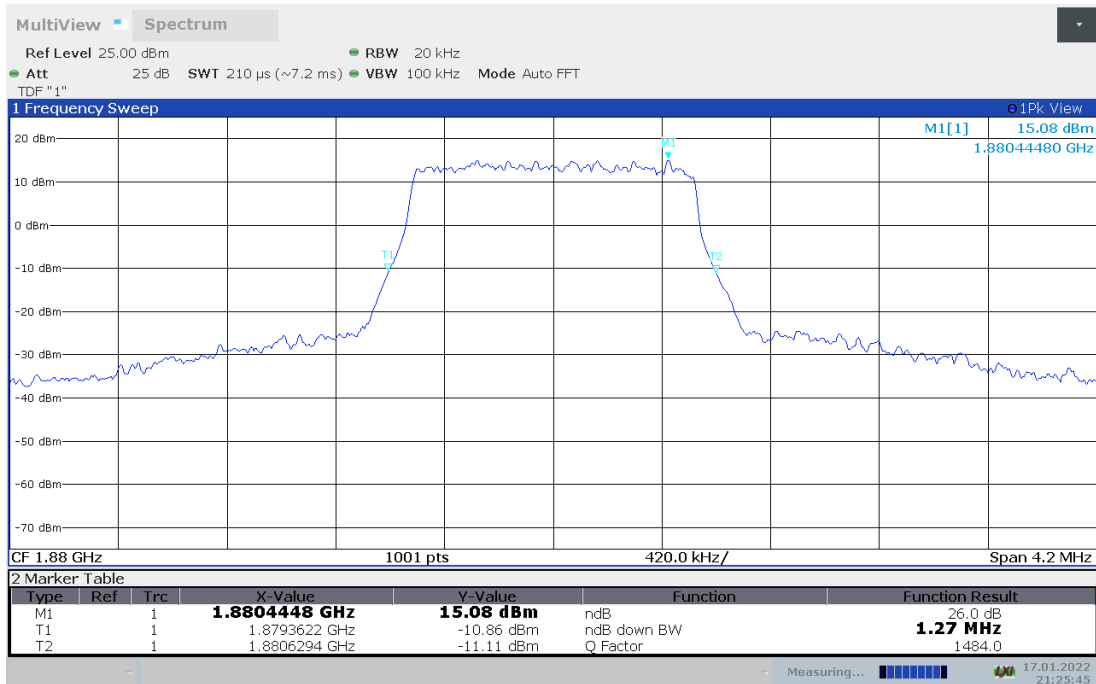


LTE band 2 , BW1.4MHz Bandwidth,16QAM (-26dBc BW)

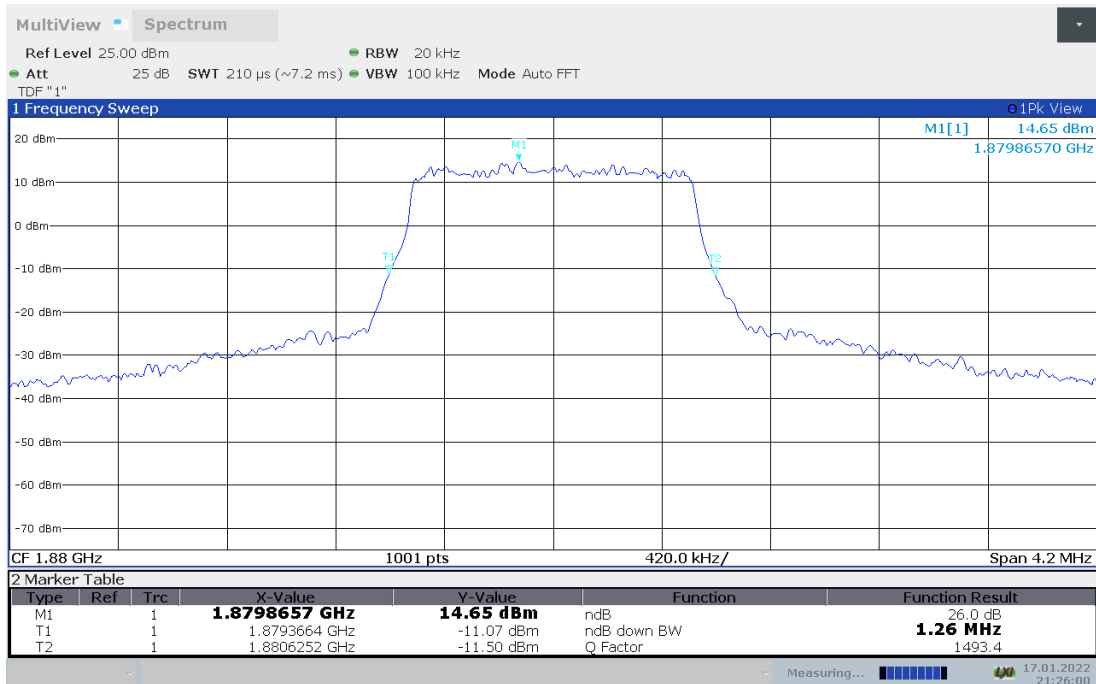


LTE band 2,3MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880.00	2.87	2.86

LTE band 2 , 3MHz Bandwidth,QPSK (-26dBc BW)

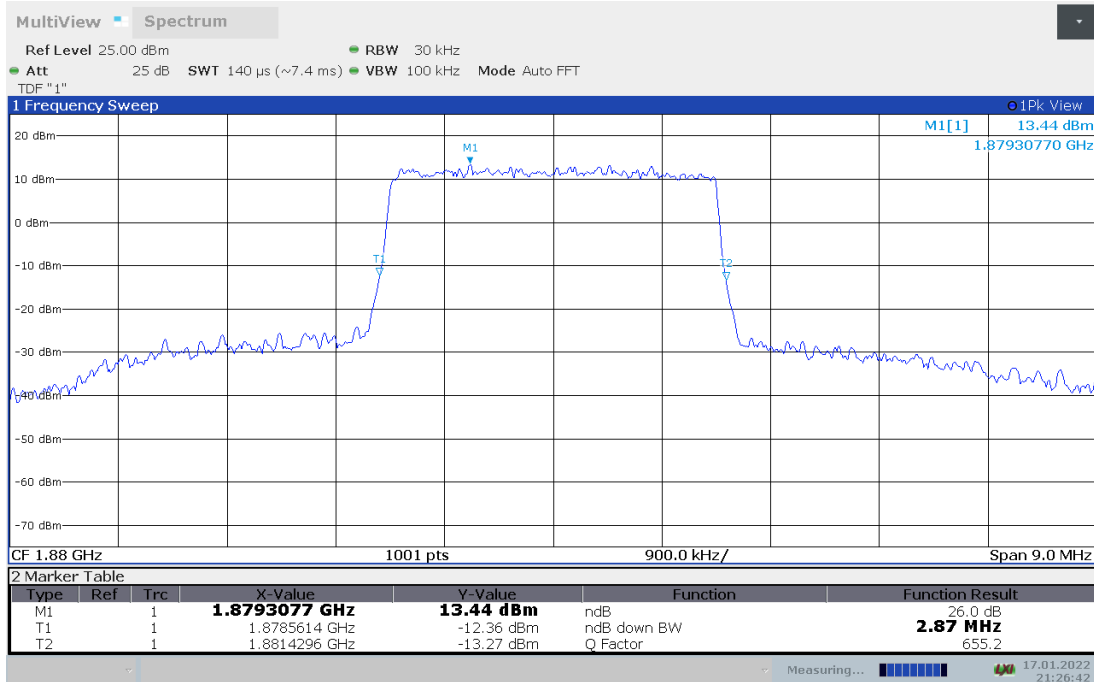


LTE band 2 , 3MHz Bandwidth,16QAM (-26dBc BW)

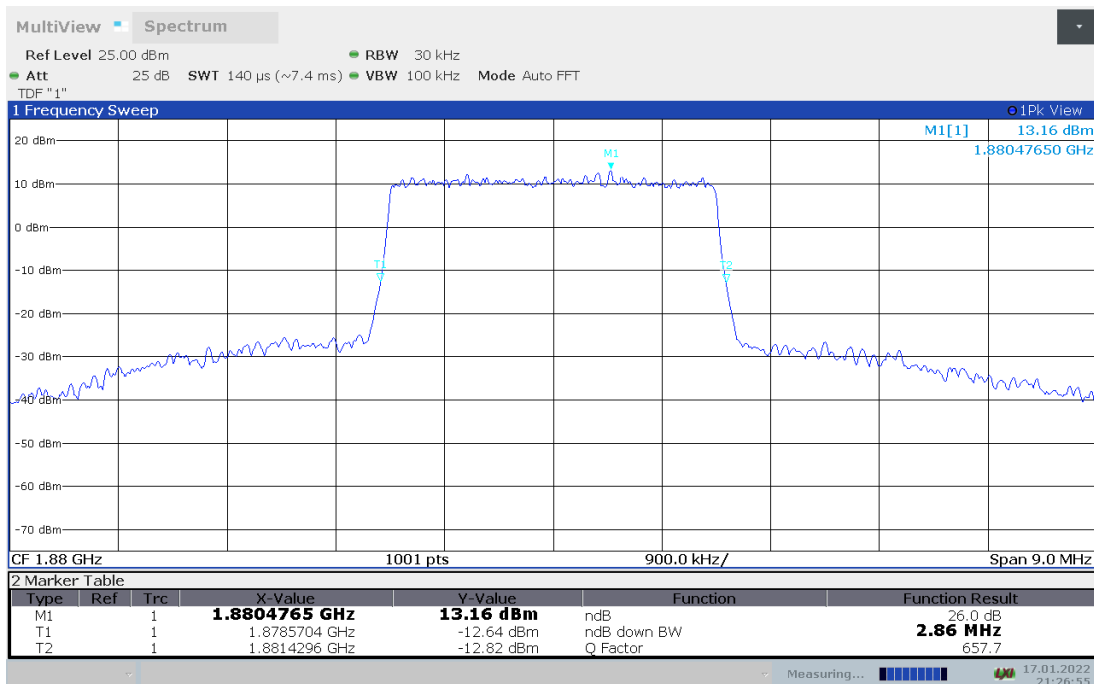


LTE band 2,5MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880.00	4.84	4.84

LTE band 2 , 5MHz Bandwidth,QPSK (-26dBc BW)

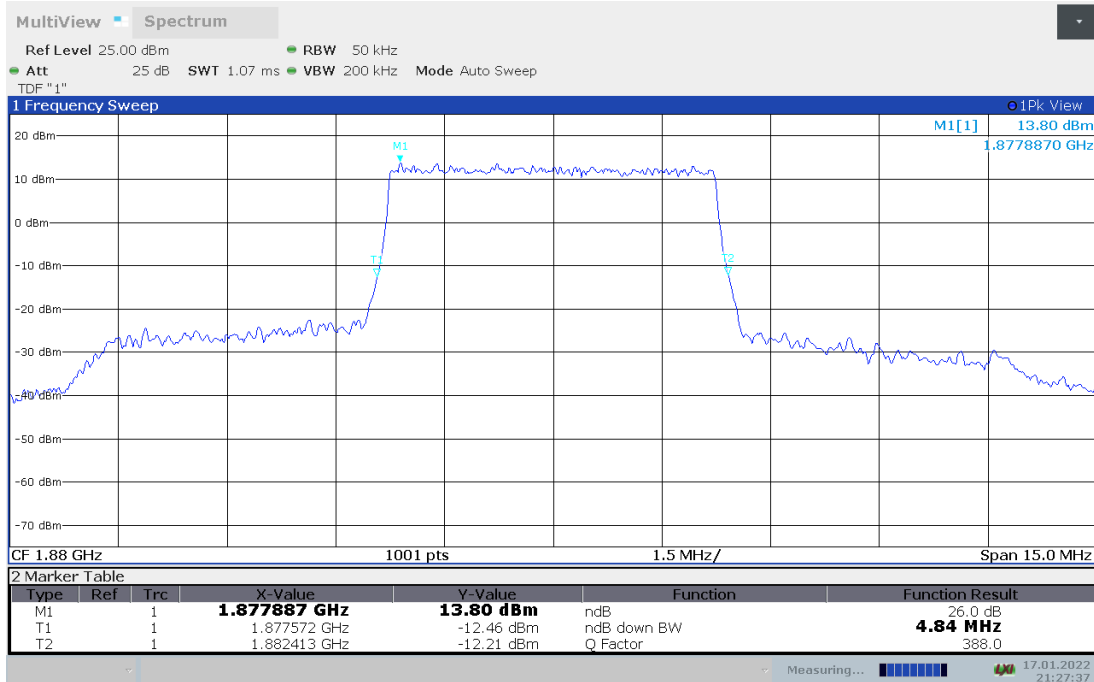


LTE band 2 , 5MHz Bandwidth,16QAM (-26dBc BW)

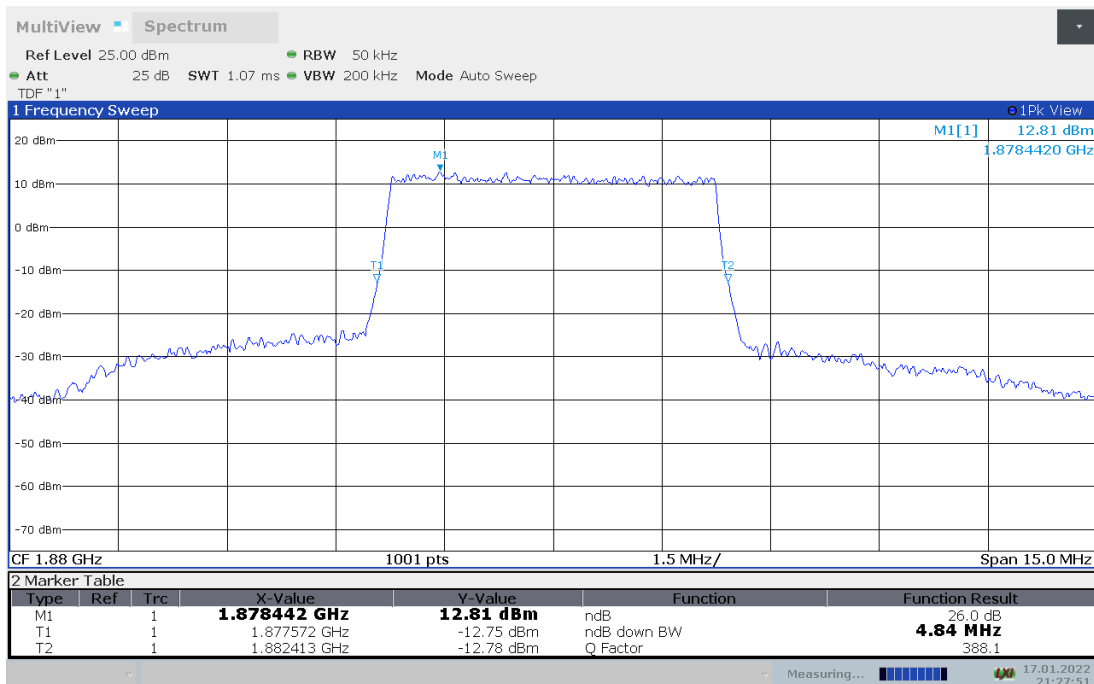


LTE band 2,10MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880.00	9.59	9.62

LTE band 2 , 10MHz Bandwidth,QPSK (-26dBc BW)

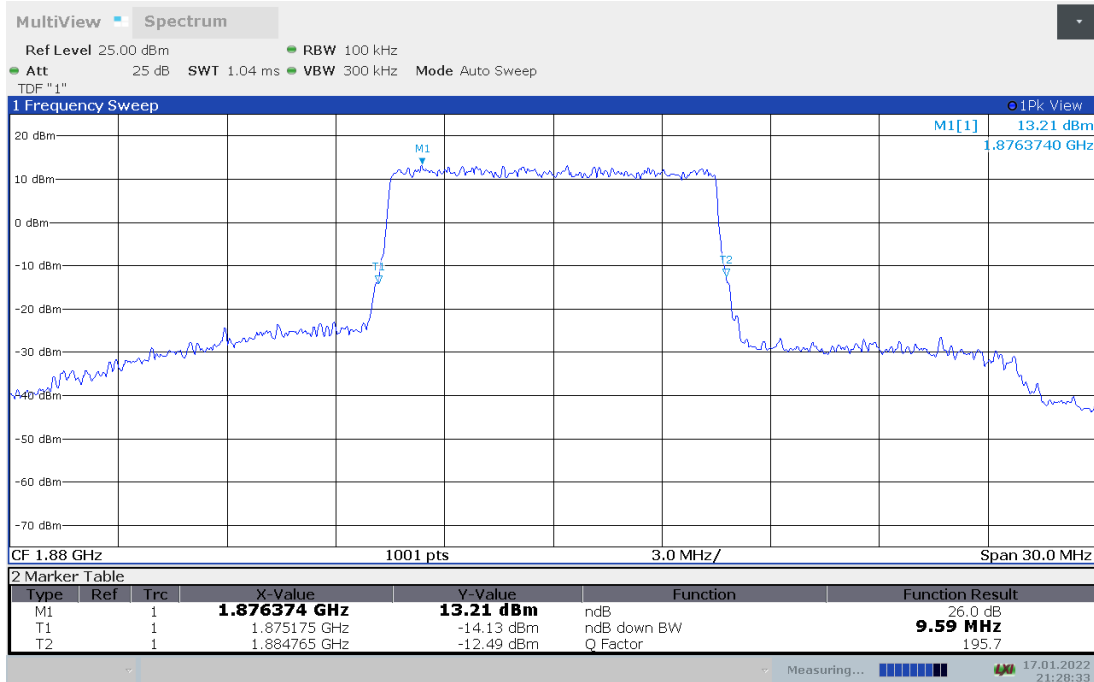


LTE band 2 , 10MHz Bandwidth,16QAM (-26dBc BW)

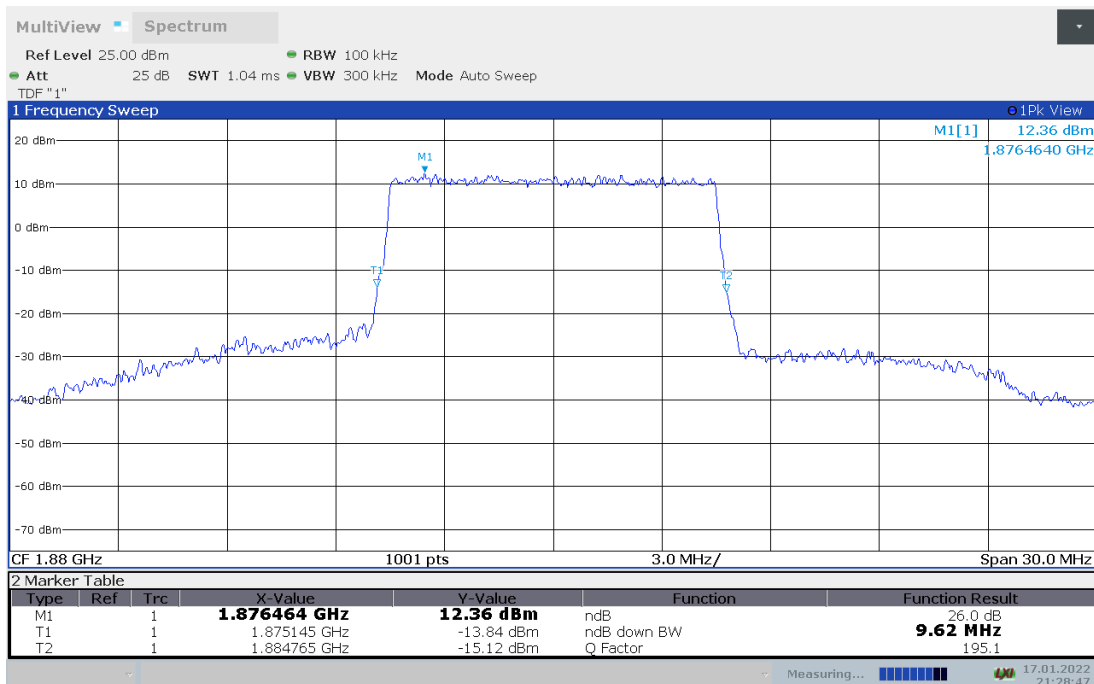


LTE band 2,15MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880.00	14.34	14.34

LTE band 2 , 15MHz Bandwidth,QPSK (-26dBc BW)

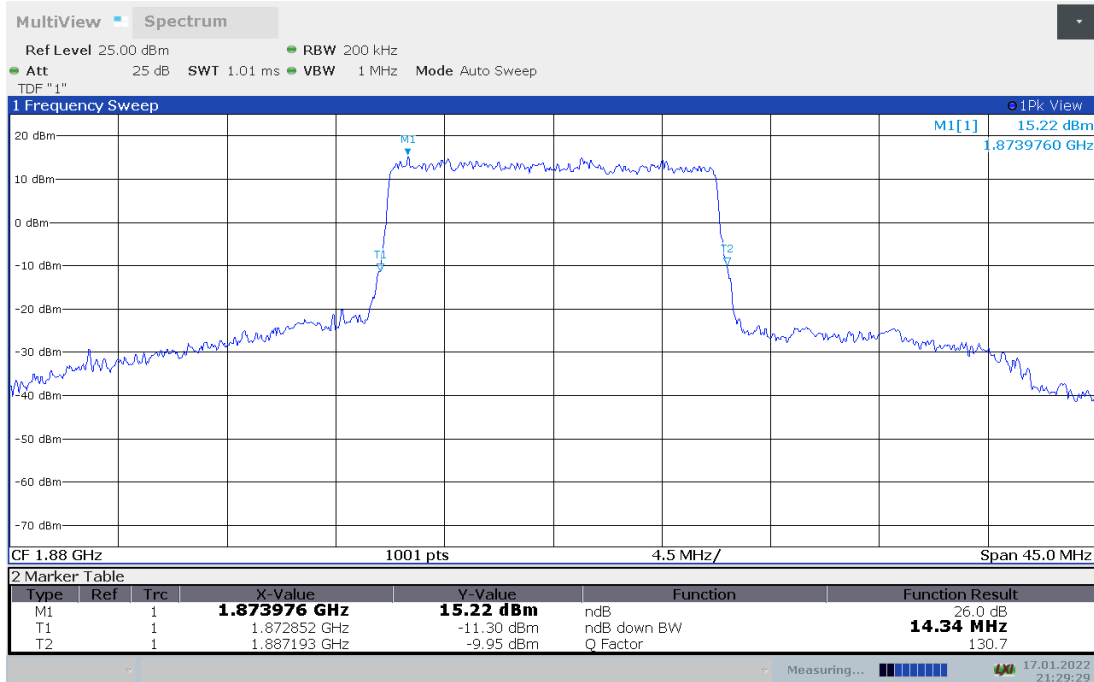


LTE band 2 , 15MHz Bandwidth,16QAM (-26dBc BW)

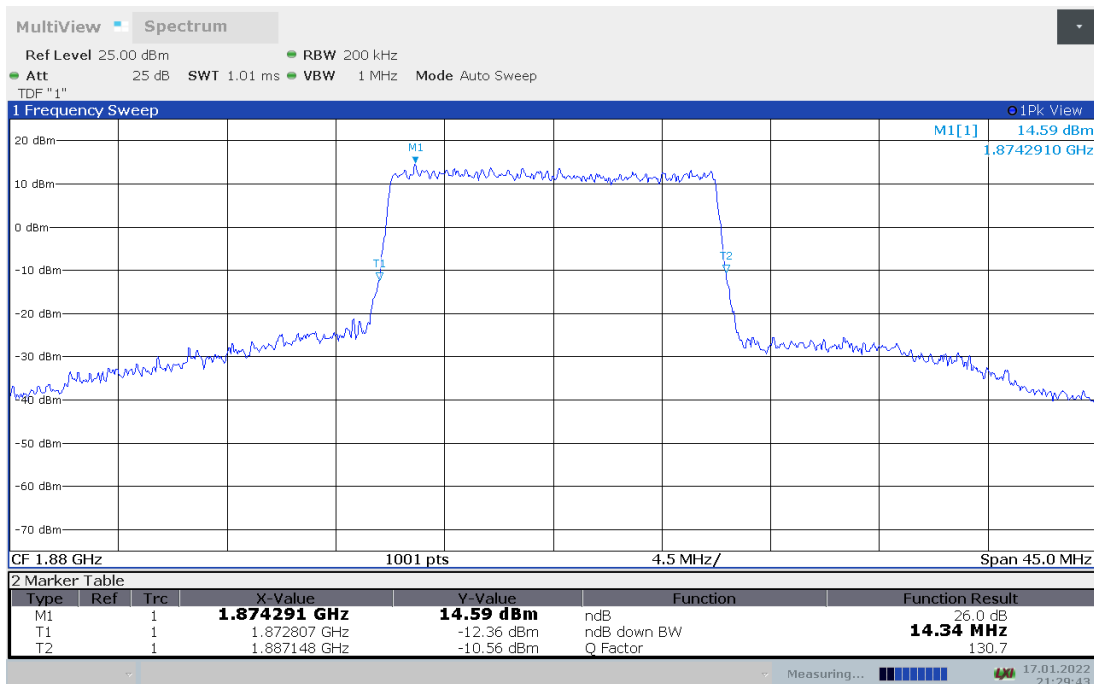


LTE band 2,20MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880.00	19.06	18.88

LTE band 2 , 20MHz Bandwidth,QPSK (-26dBc BW)

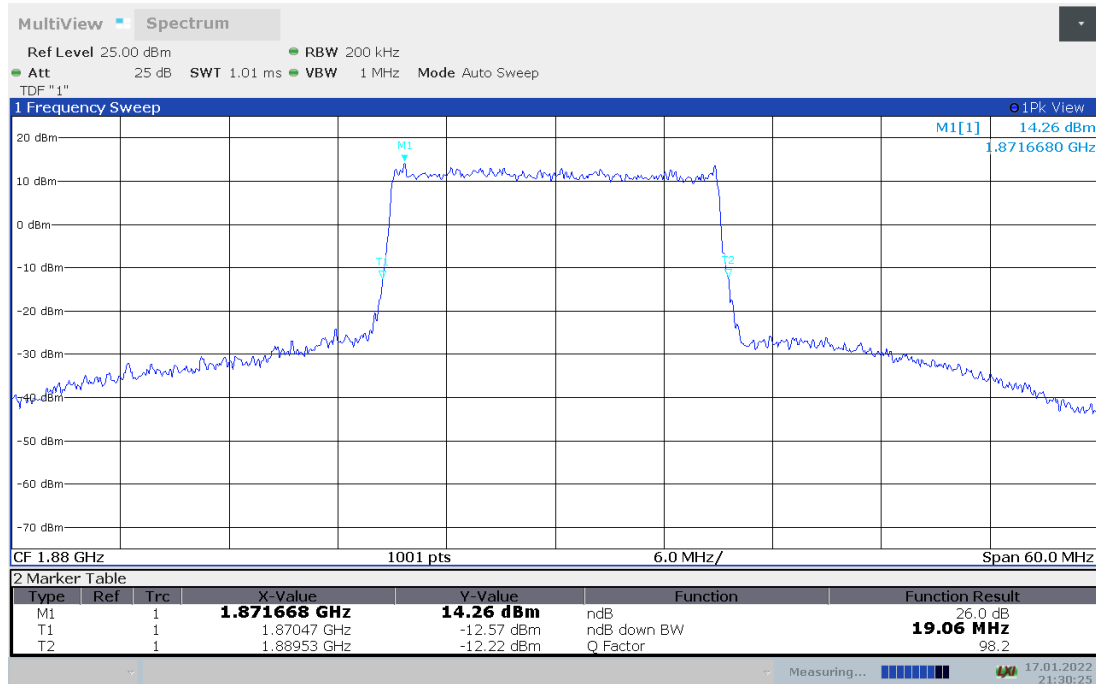


LTE band 2 , 20MHz Bandwidth,16QAM (-26dBc BW)

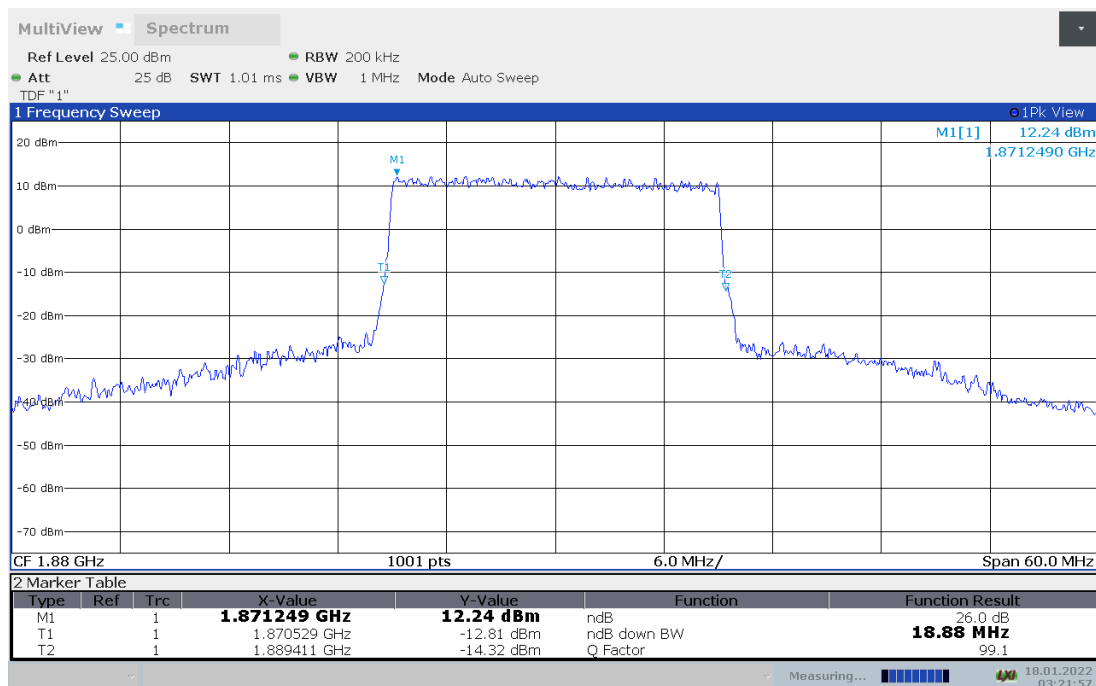


LTE band 7,5MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535.00	4.87	4.78

LTE band 7 , 5MHz Bandwidth,QPSK (-26dBc BW)

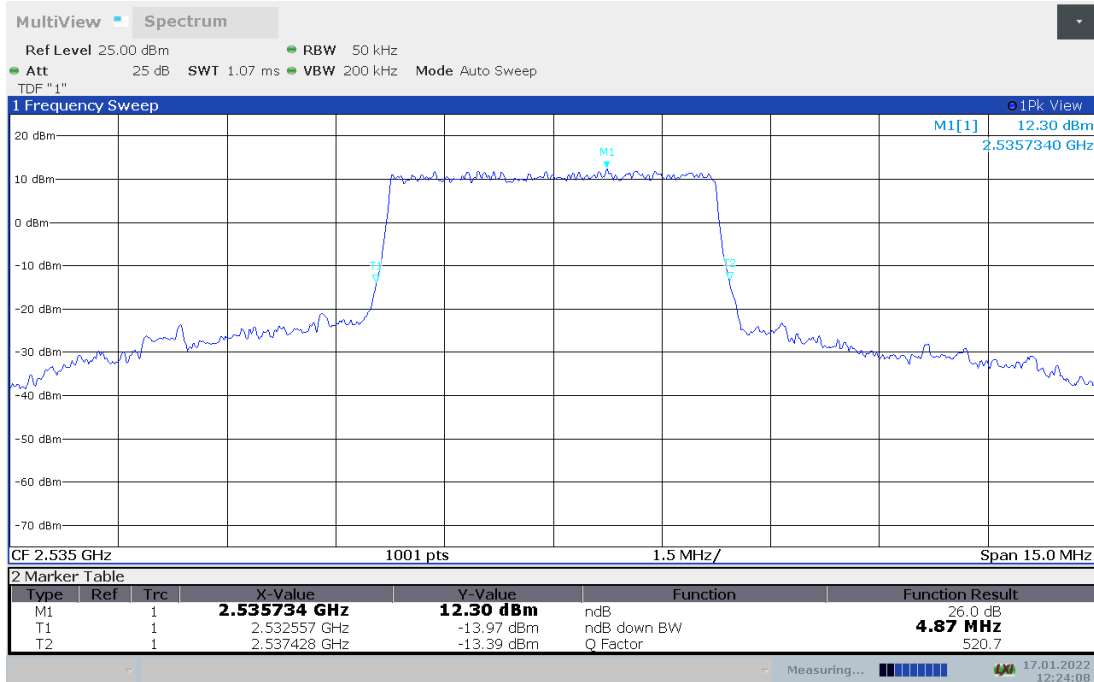


LTE band 7 , 5MHz Bandwidth,16QAM (-26dBc BW)

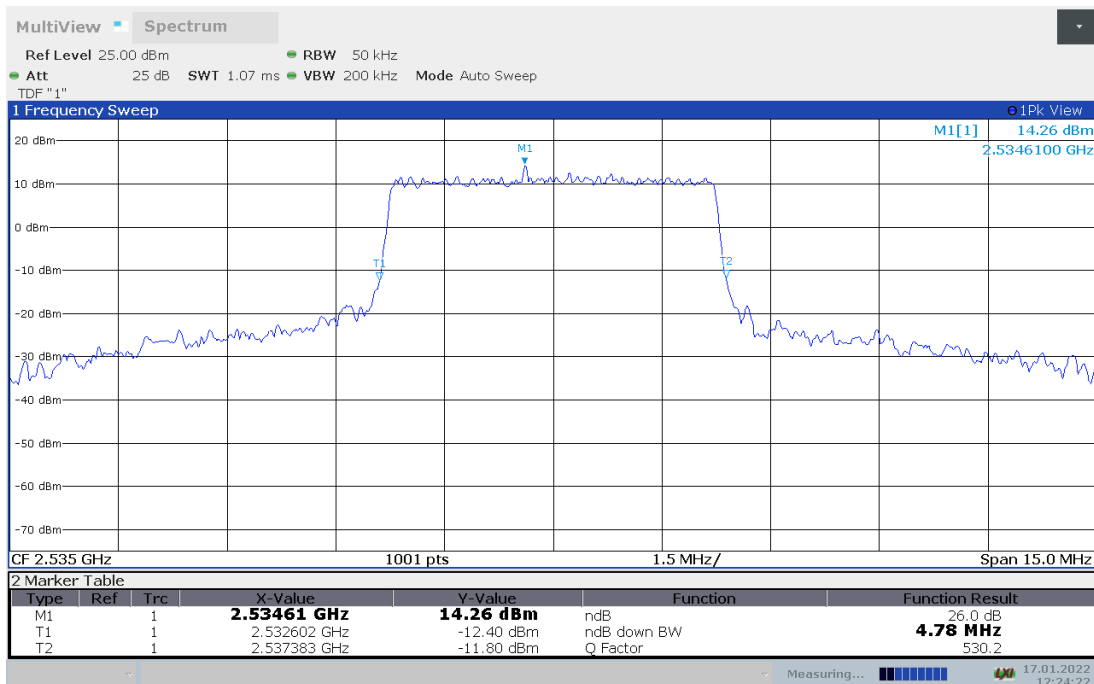


LTE band 7,10MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535.00	9.62	9.62

LTE band 7 , 10MHz Bandwidth,QPSK (-26dBc BW)

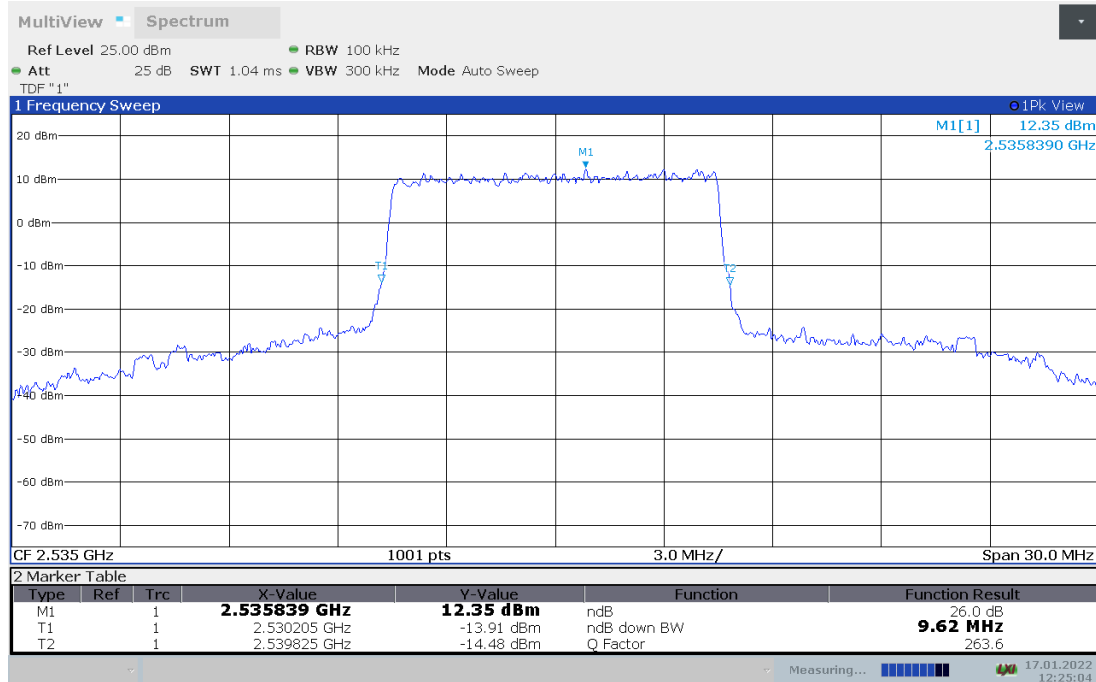


LTE band 7 , 10MHz Bandwidth,16QAM (-26dBc BW)

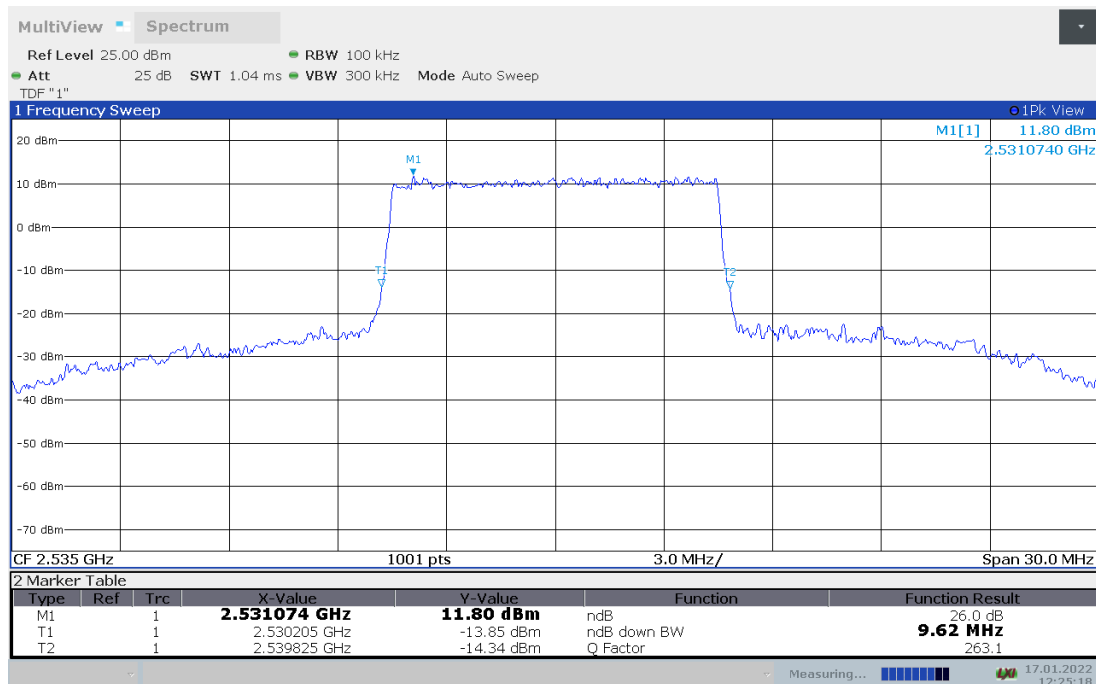


LTE band 7,15MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535.00	14.39	14.39

LTE band 7 , 15MHz Bandwidth,QPSK (-26dBc BW)

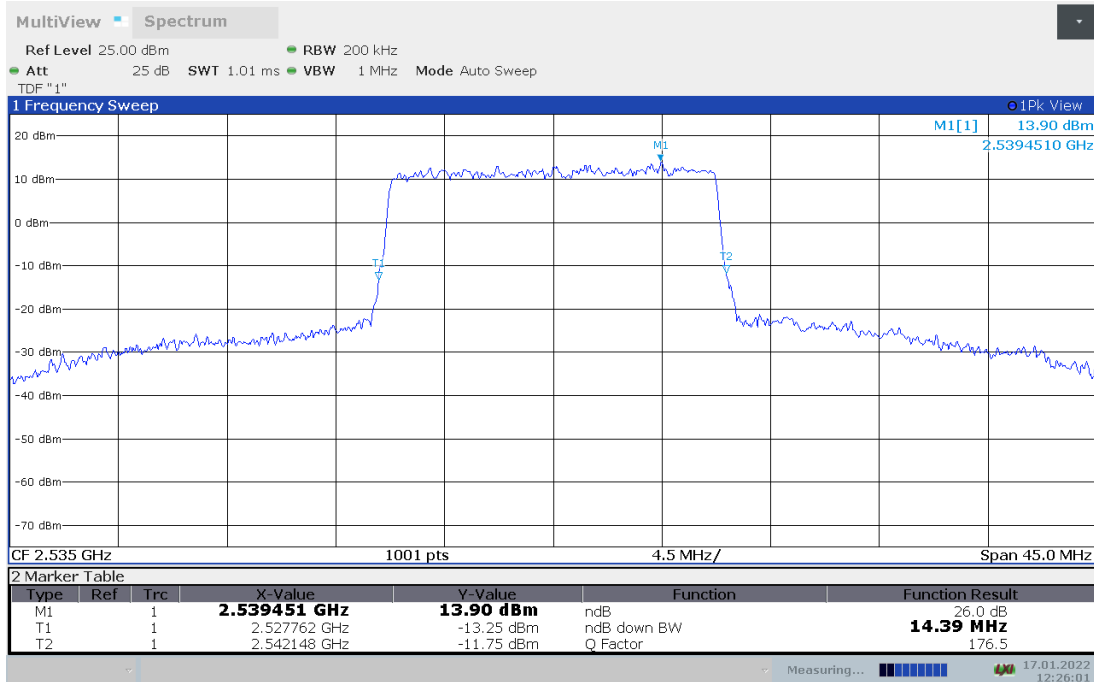


LTE band 7 , 15MHz Bandwidth,16QAM (-26dBc BW)

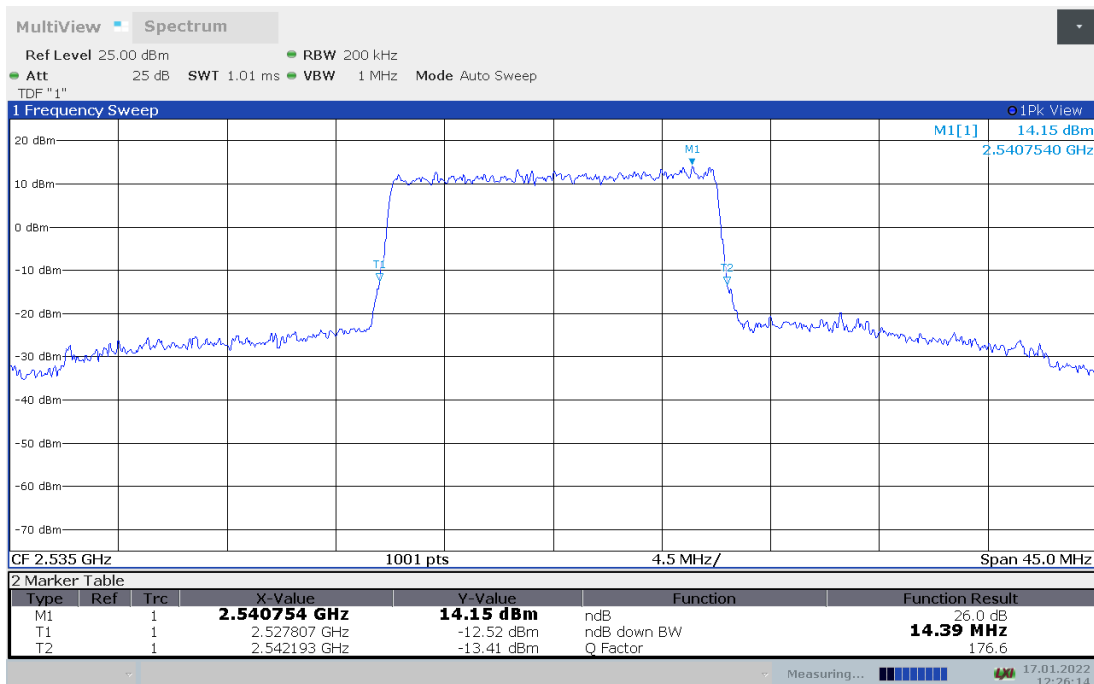


LTE band 7,20MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535.00	18.94	19.18

LTE band 7 , 20MHz Bandwidth,QPSK (-26dBc BW)

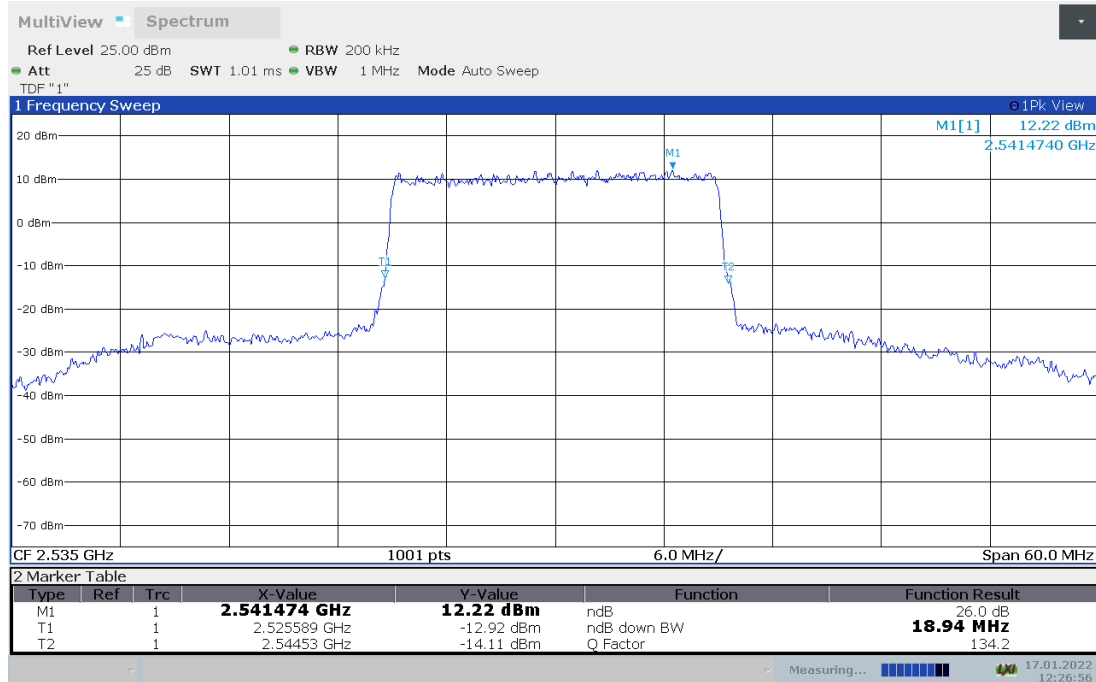


LTE band 7 , 20MHz Bandwidth,16QAM (-26dBc BW)

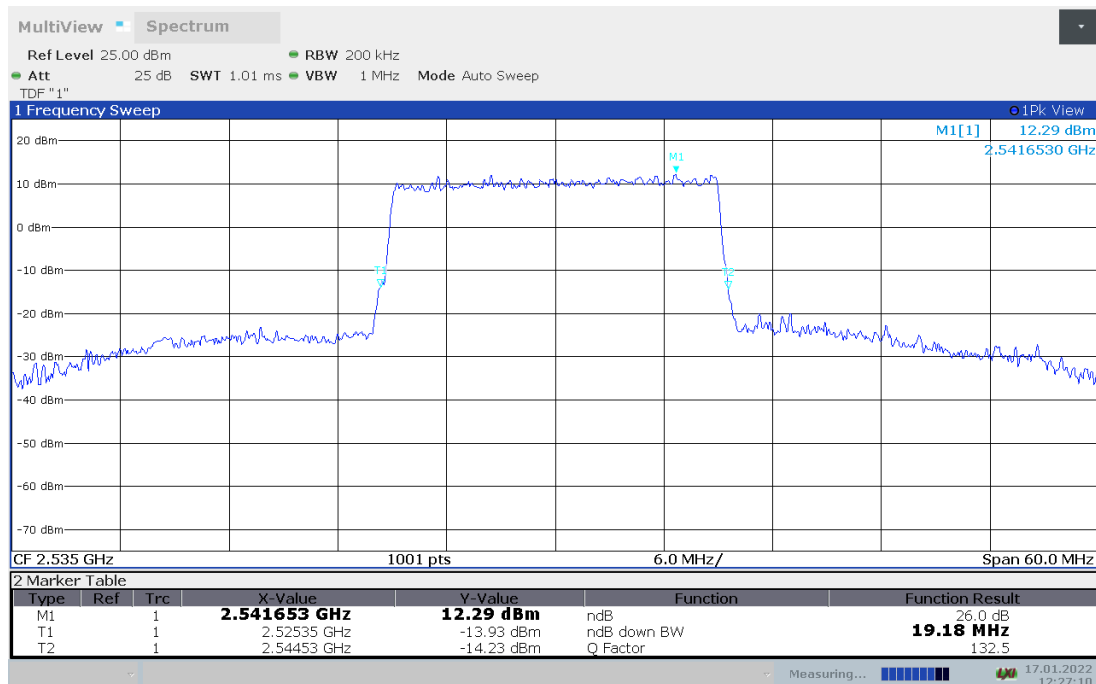


LTE band 12,BW1.4MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.50	1.27	1.29

LTE band 12 , BW1.4MHz Bandwidth,QPSK (-26dBc BW)

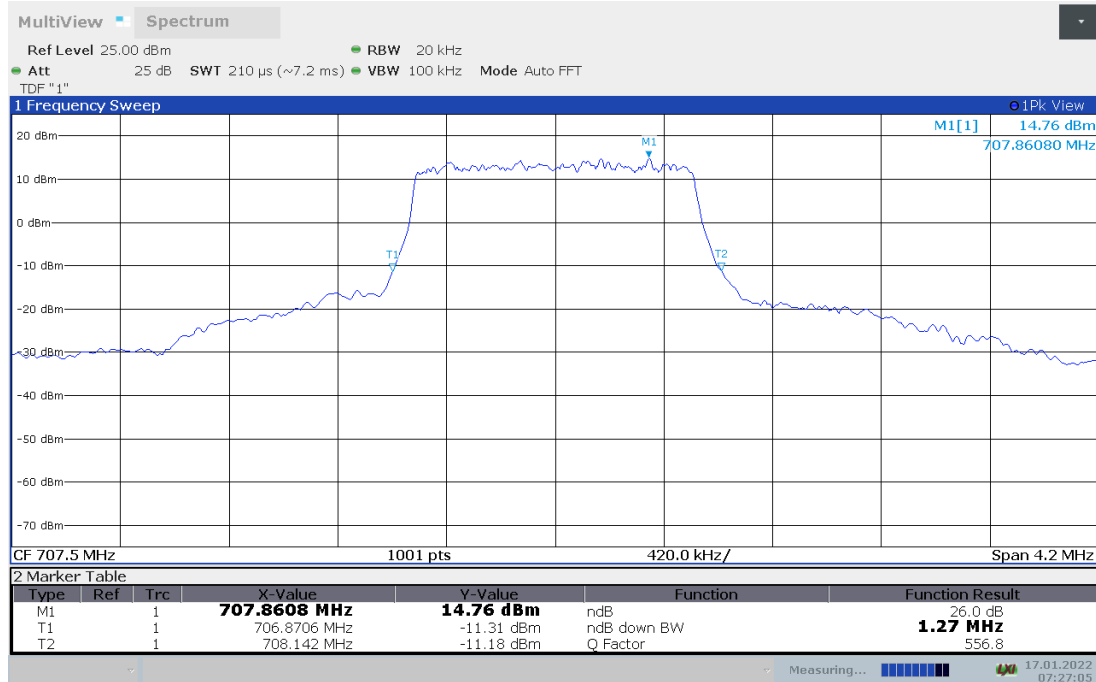


LTE band 12 , BW1.4MHz Bandwidth,16QAM (-26dBc BW)

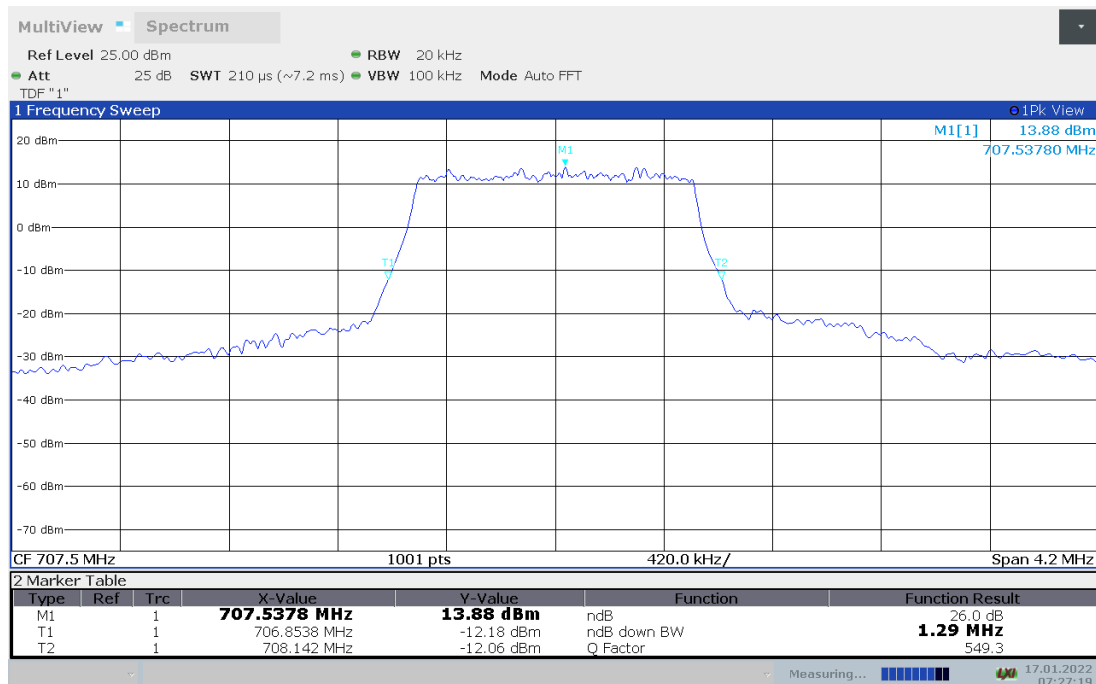


LTE band 12,3MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.50	2.88	2.86

LTE band 12 , 3MHz Bandwidth,QPSK (-26dBc BW)

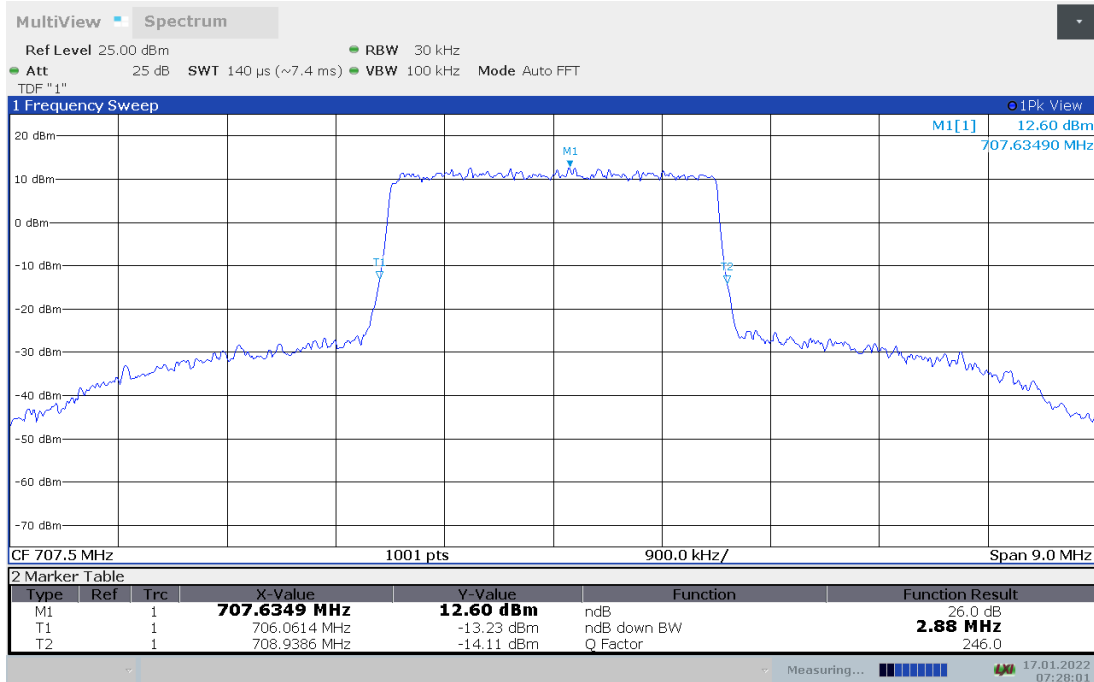


LTE band 12 , 3MHz Bandwidth,16QAM (-26dBc BW)

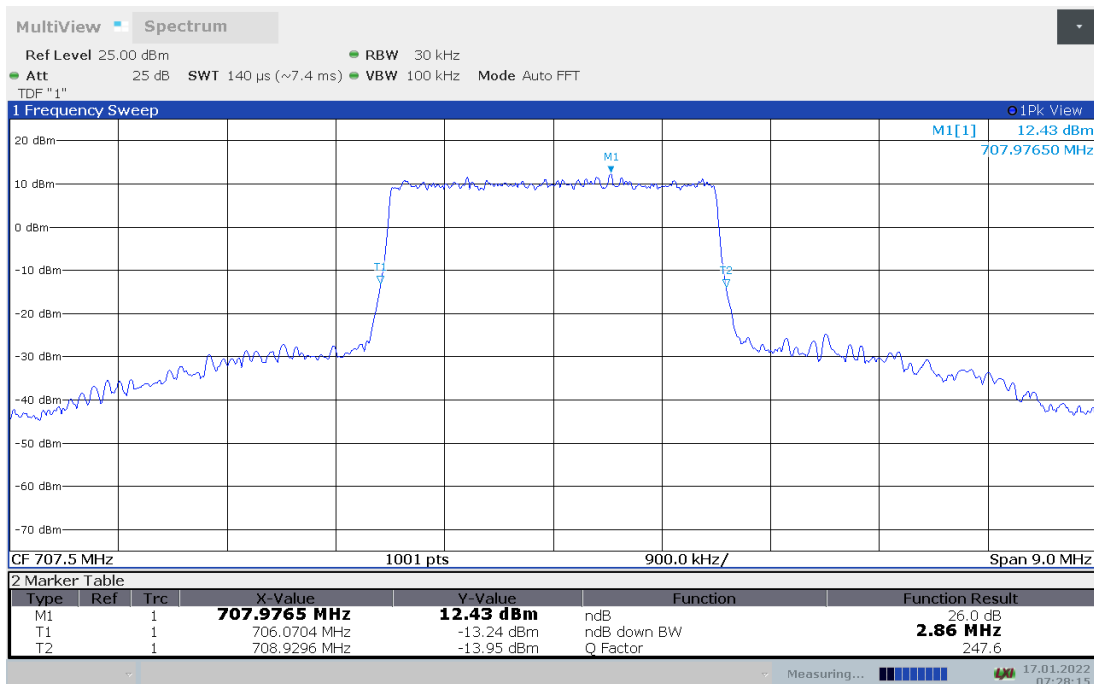


LTE band 12,5MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.50	5.08	5.05

LTE band 12 , 5MHz Bandwidth,QPSK (-26dBc BW)

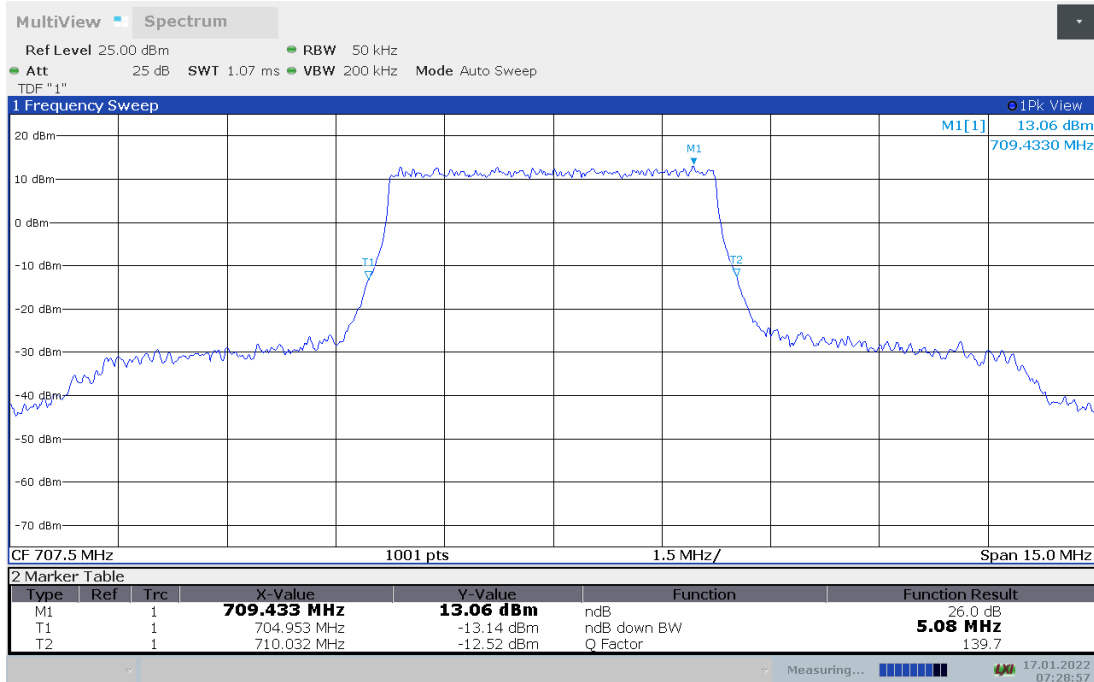


LTE band 12 , 5MHz Bandwidth,16QAM (-26dBc BW)

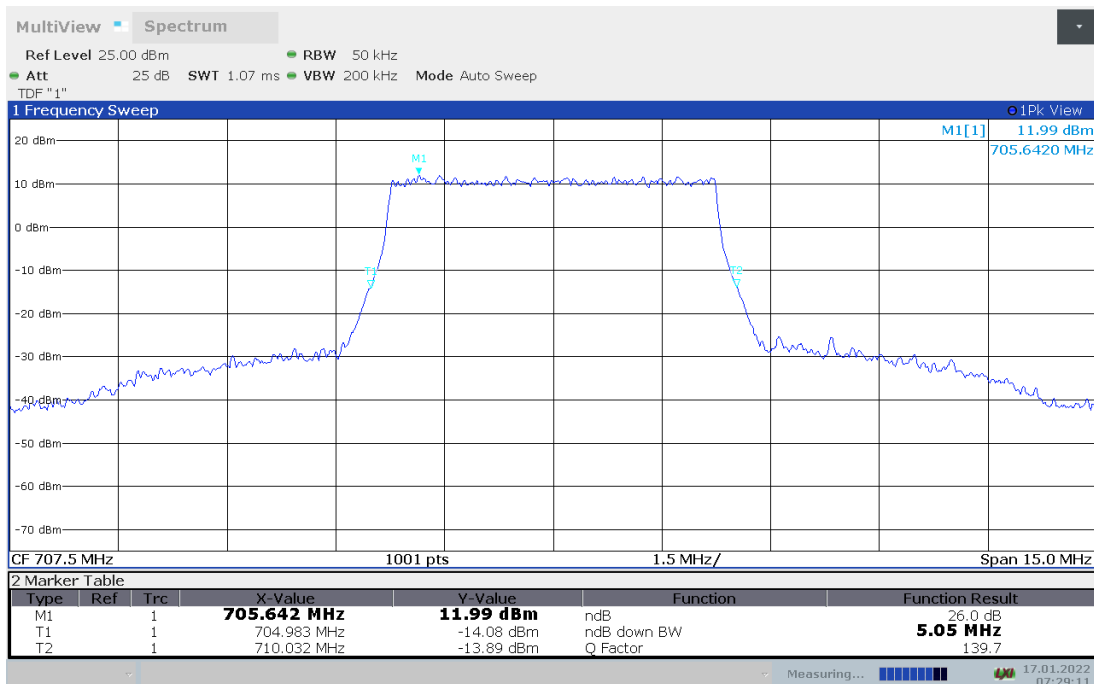


LTE band 12,10MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.50	9.71	9.80

LTE band 12 , 10MHz Bandwidth,QPSK (-26dBc BW)

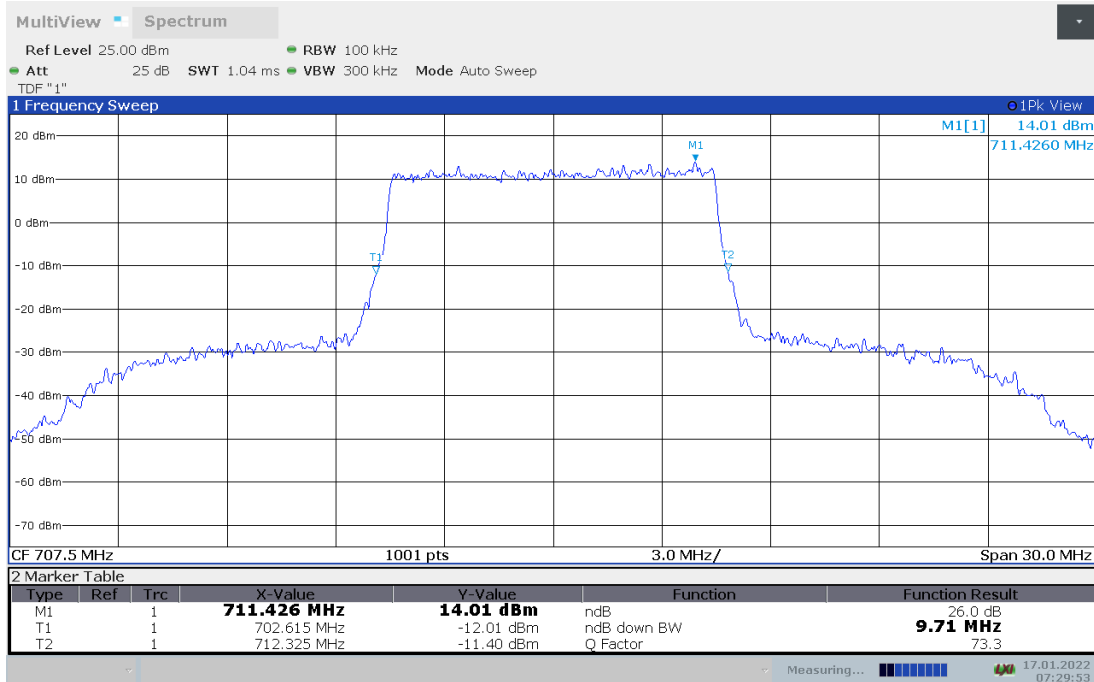


LTE band 12 , 10MHz Bandwidth,16QAM (-26dBc BW)

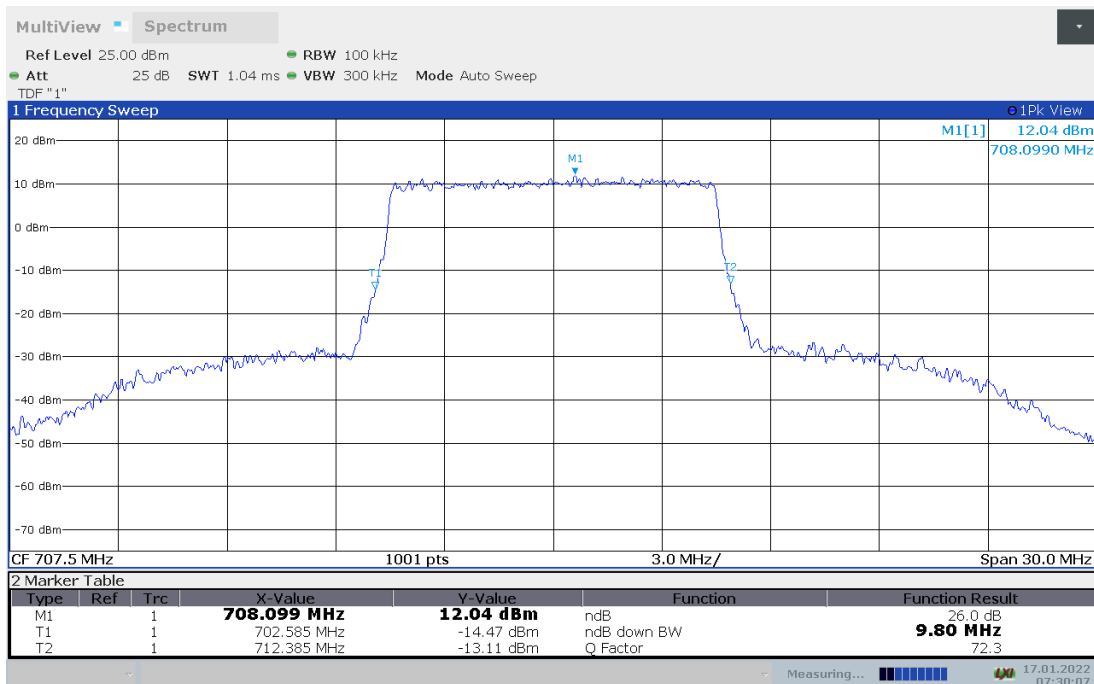


LTE band 13,5MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
782.00	5.05	4.99

LTE band 13 , 5MHz Bandwidth,QPSK (-26dBc BW)

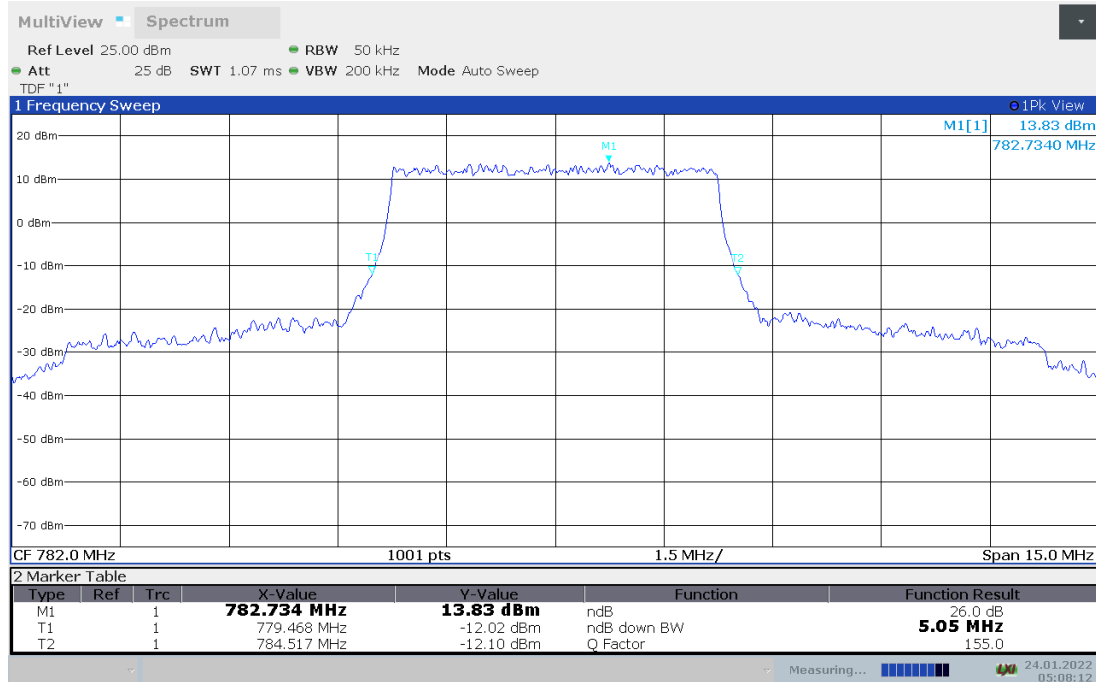


LTE band 13 , 5MHz Bandwidth,16QAM (-26dBc BW)

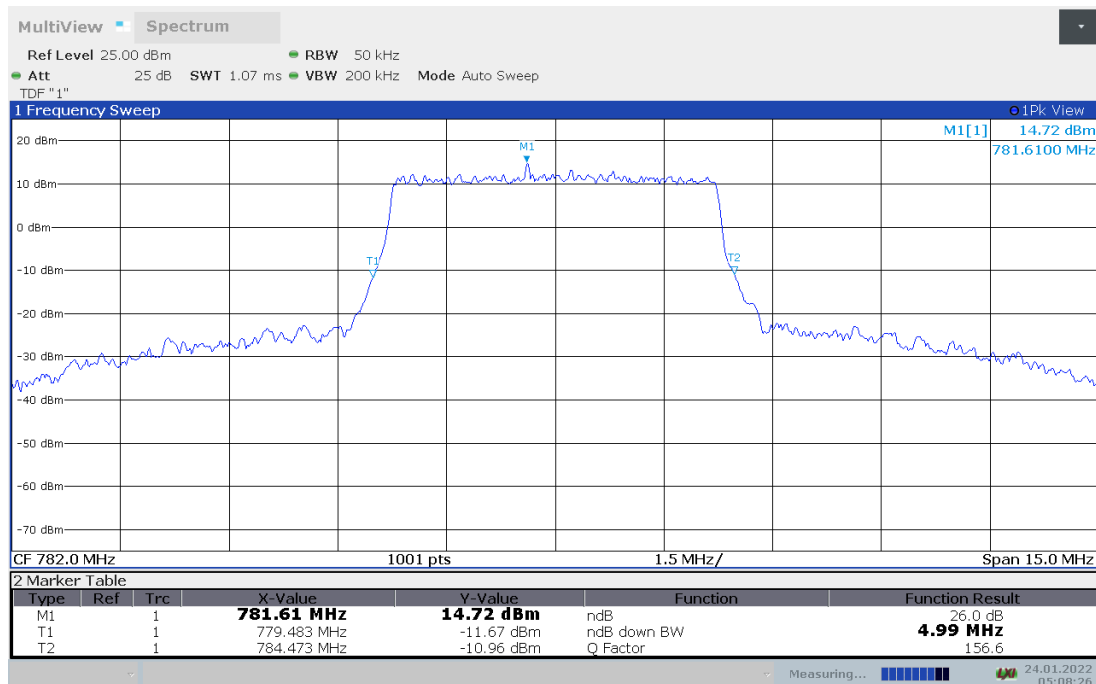


LTE band 13,10MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
782.00	9.80	9.80

LTE band 13 , 10MHz Bandwidth,QPSK (-26dBc BW)

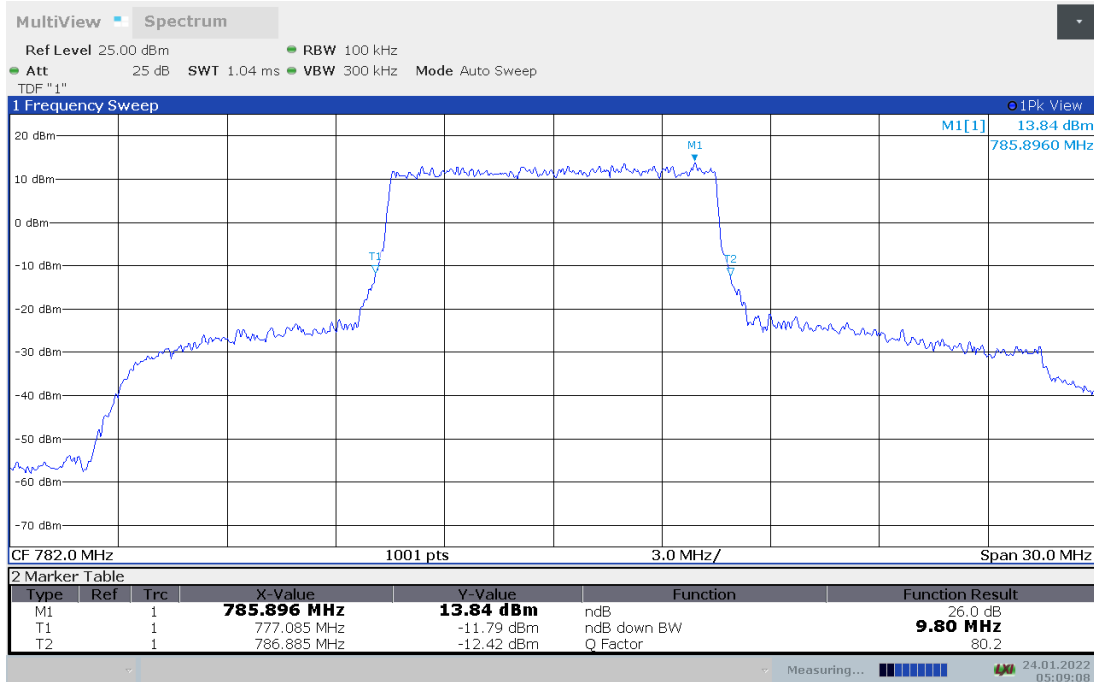


LTE band 13 , 10MHz Bandwidth,16QAM (-26dBc BW)

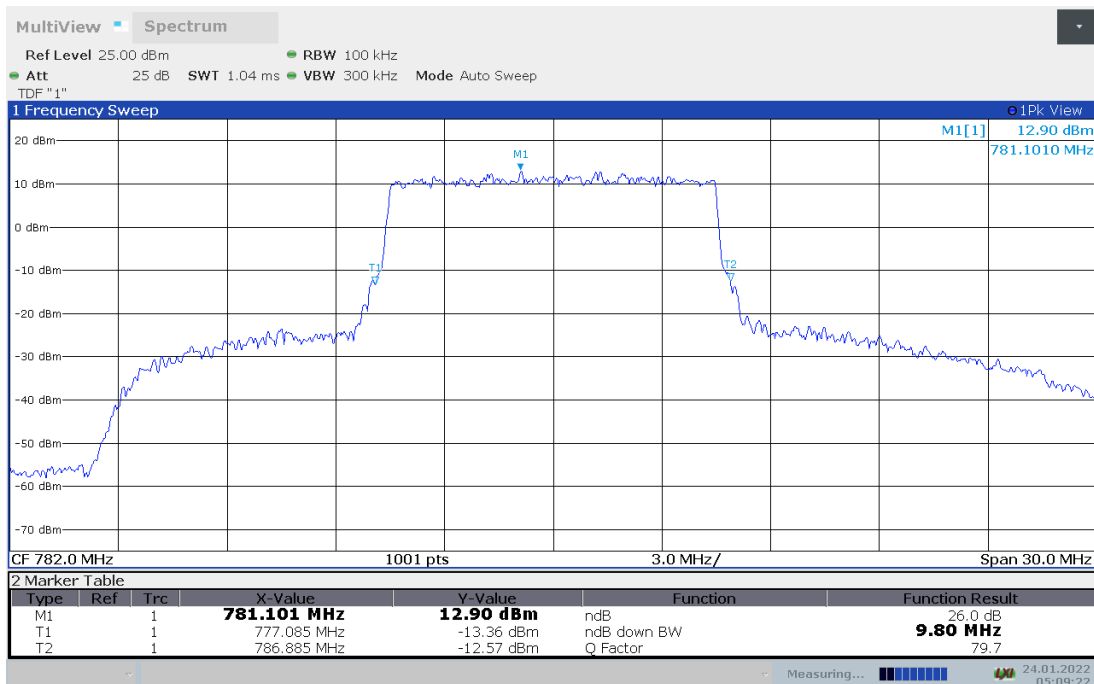


LTE band 26(824MHz-849MHz),BW1.4MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.50	1.27	1.29

LTE band 26(824MHz-849MHz), BW1.4MHz Bandwidth,QPSK (-26dBc BW)

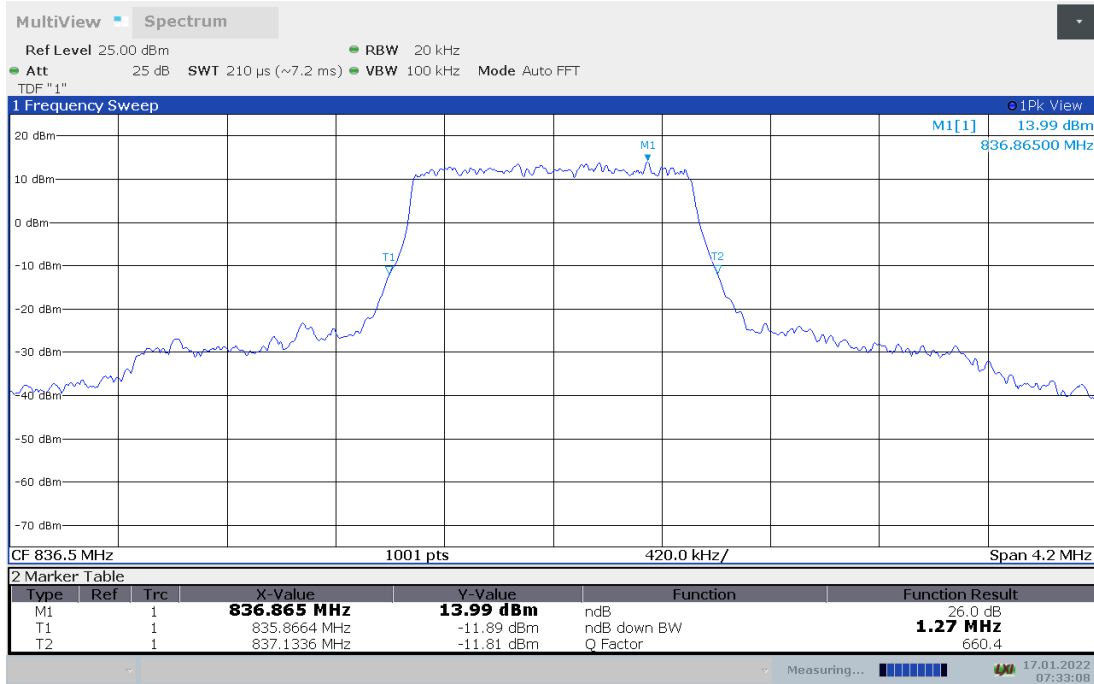


LTE band 26(824MHz-849MHz), BW1.4MHz Bandwidth,16QAM (-26dBc BW)

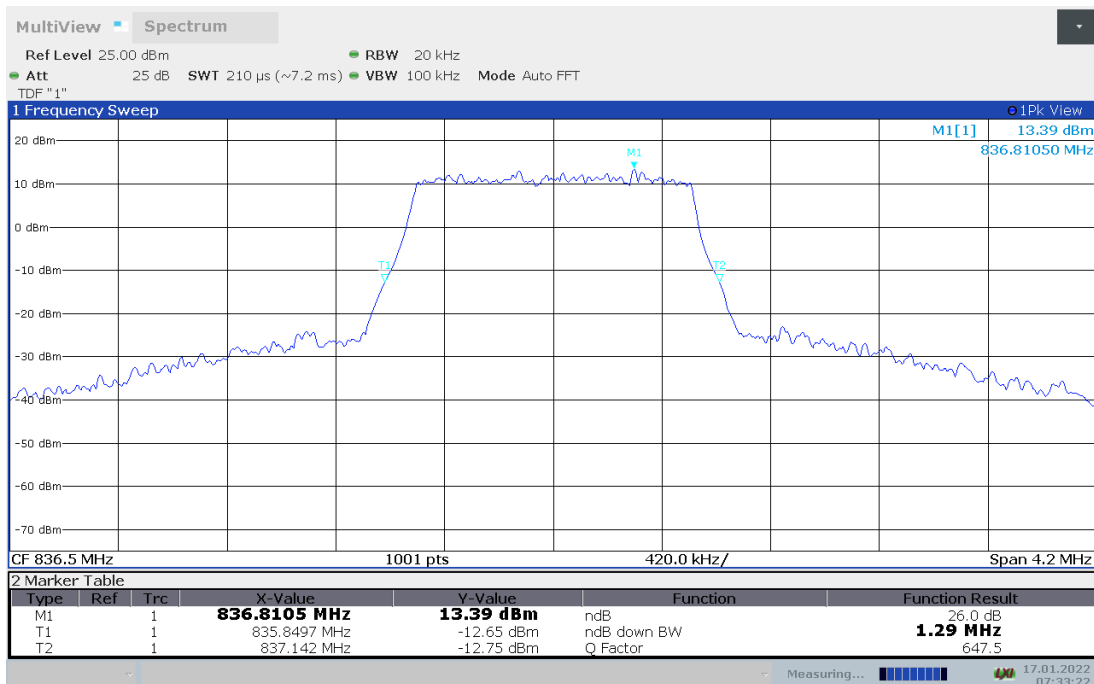


LTE band 26(824MHz-849MHz),3MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.50	2.87	2.88

LTE band 26(824MHz-849MHz), 3MHz Bandwidth,QPSK (-26dBc BW)

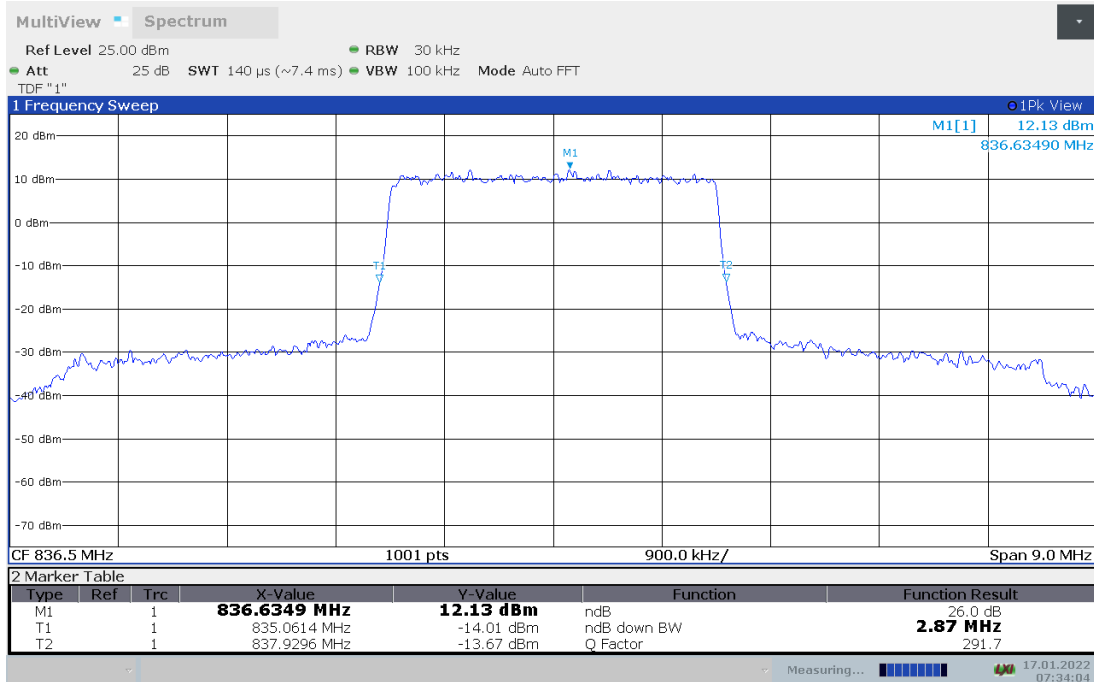


LTE band 26(824MHz-849MHz), 3MHz Bandwidth,16QAM (-26dBc BW)

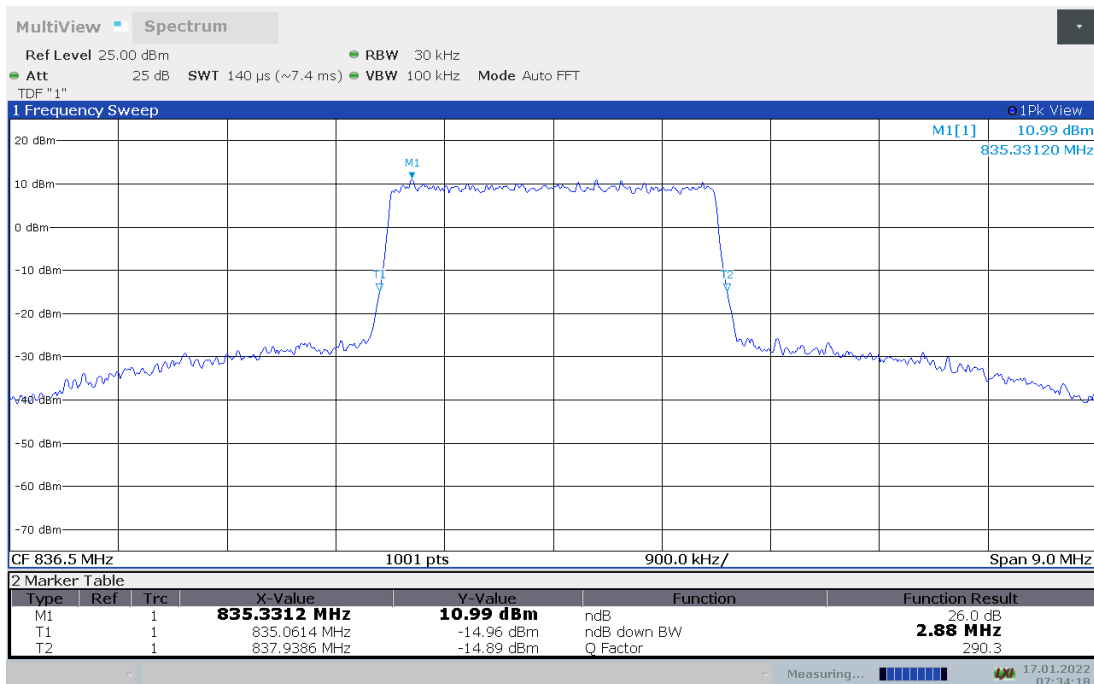


LTE band 26(824MHz-849MHz),5MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.50	4.87	4.86

LTE band 26 , 5MHz Bandwidth,QPSK (-26dBc BW)

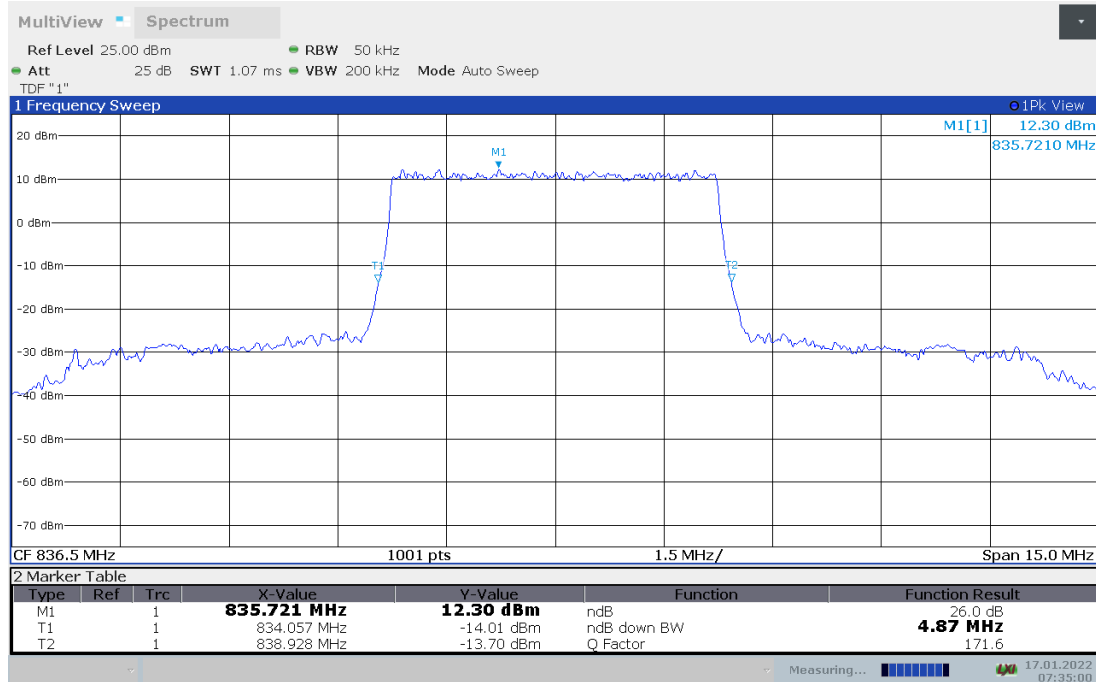


LTE band 26 , 5MHz Bandwidth,16QAM (-26dBc BW)

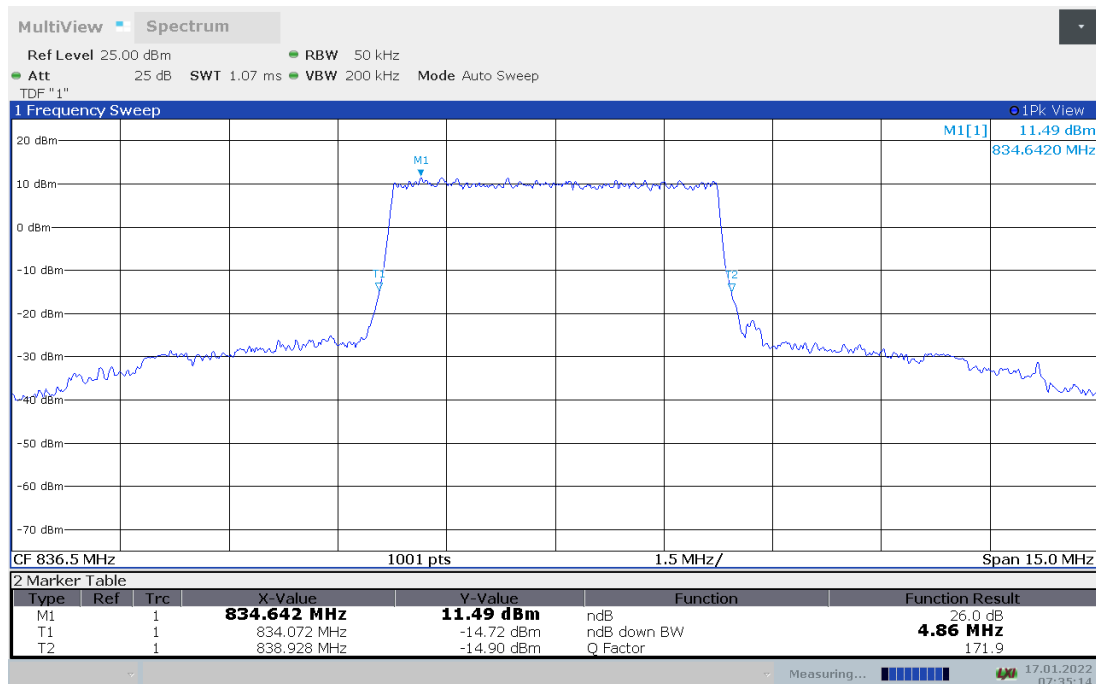


LTE band 26(824MHz-849MHz),10MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.50	9.56	9.56

LTE band 26(824MHz-849MHz), 10MHz Bandwidth,QPSK (-26dBc BW)

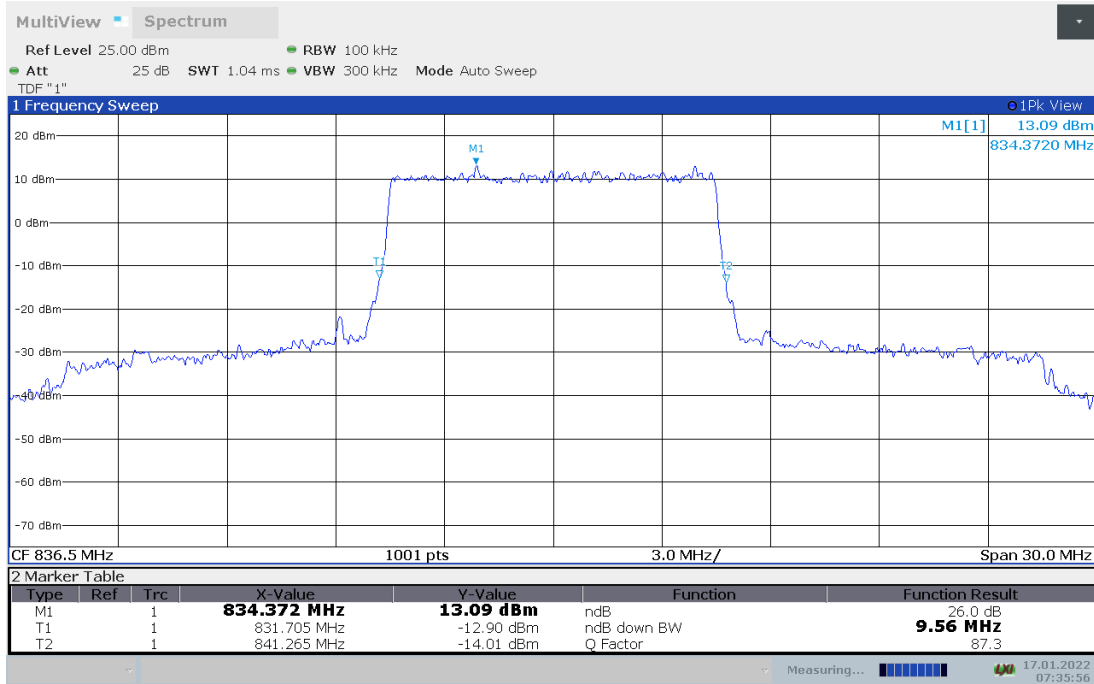


LTE band 26(824MHz-849MHz), 10MHz Bandwidth,16QAM (-26dBc BW)

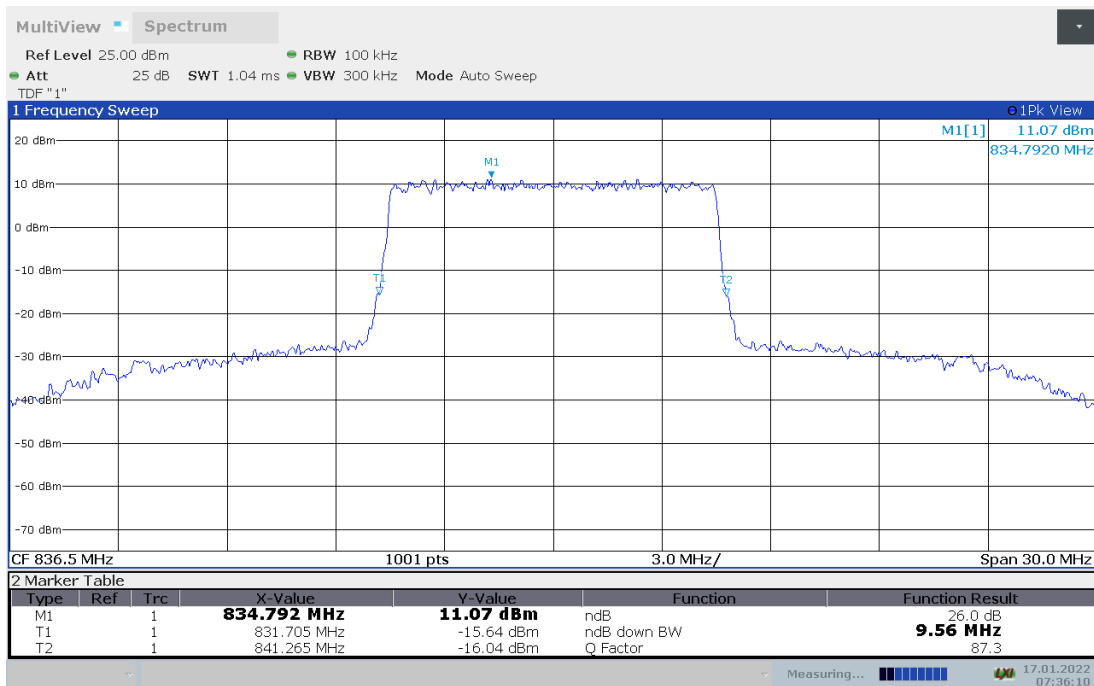


LTE band 26(824MHz-849MHz),15MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.50	14.39	14.34

LTE band 26(824MHz-849MHz), 15MHz Bandwidth,QPSK (-26dBc BW)

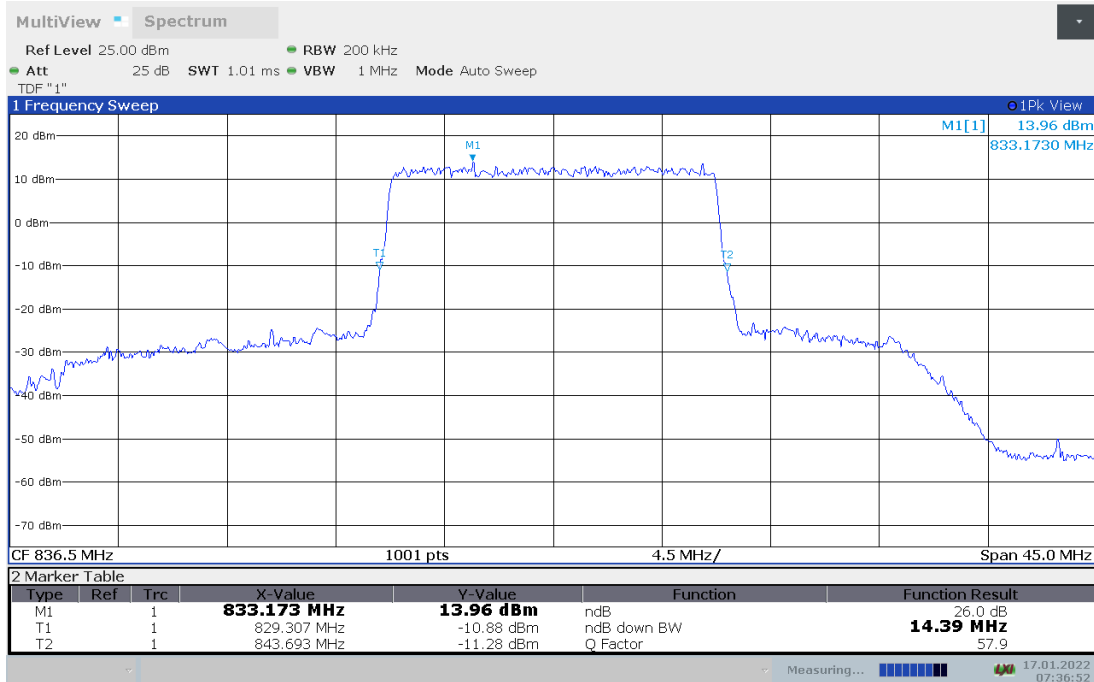


LTE band 26(824MHz-849MHz), 15MHz Bandwidth,16QAM (-26dBc BW)

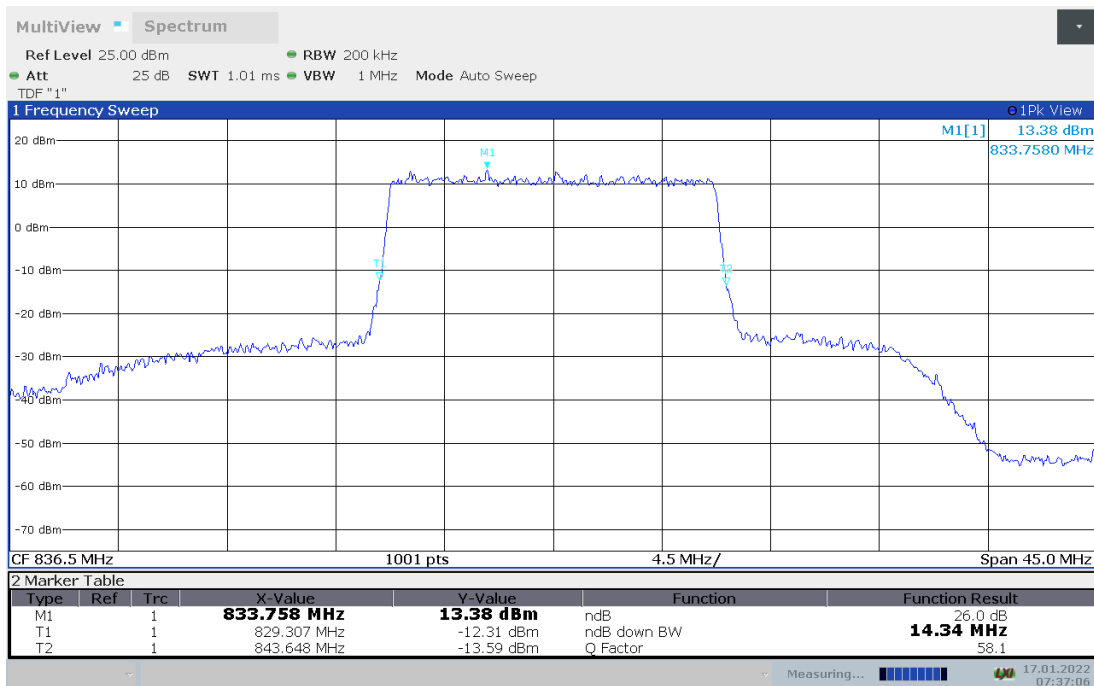

LTE band 26(814MHz-824MHz),BW1.4MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
819.00	1.26	1.28

LTE band 26(814MHz-824MHz), BW1.4MHz Bandwidth,QPSK (-26dBc BW)

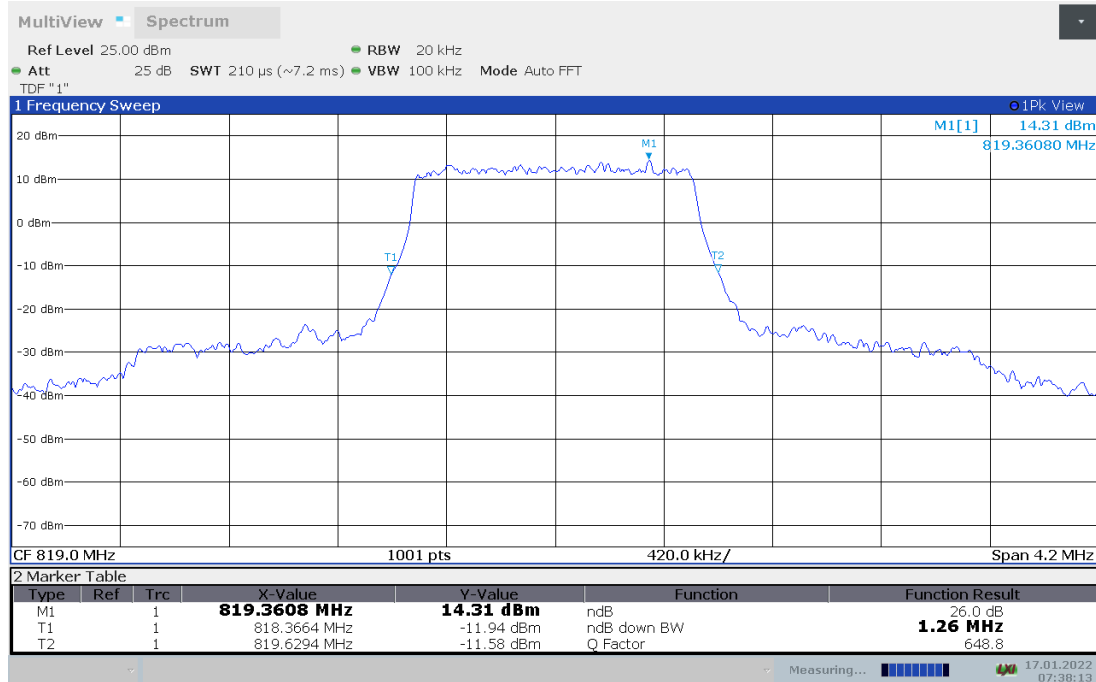

LTE band 26(814MHz-824MHz), BW1.4MHz Bandwidth,16QAM (-26dBc BW)

