



# TEST REPORT

## No. I22Z70288-WMD02

for

**Samsung Electronics Co., Ltd.**

**Multi-band GSM/WCDMA/LTE Phone with Bluetooth, WLAN**

**Model Name: SM-A042M/DS, SM-A042M**

**FCC ID: ZCASMA042M**

with

**Hardware Version: REV1.0**

**Software Version: A042M.001**

**Issued Date: 2022-09-07**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z70288-WMD02	Rev.0	1 <sup>st</sup> edition	2022-09-07

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION.....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE.....</b>	<b>5</b>
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. DOCUMENTS SUPPLIED BY APPLICANT .....</b>	<b>8</b>
<b>4.2. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULT .....</b>	<b>10</b>
<b>7. TEST EQUIPMENT UTILIZED .....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>13</b>
<b>A.1 OUTPUT POWER.....</b>	<b>13</b>
<b>A.2 EMISSION LIMIT.....</b>	<b>19</b>
<b>A.3 FREQUENCY STABILITY .....</b>	<b>25</b>
<b>A.4 OCCUPIED BANDWIDTH.....</b>	<b>28</b>
<b>A.5 EMISSION BANDWIDTH.....</b>	<b>41</b>
<b>A.6 BAND EDGE COMPLIANCE.....</b>	<b>54</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION.....</b>	<b>58</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>65</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>66</b>



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P.  
R. China 100191

Location 2: CTTL (BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology Development  
Area, Beijing, 100176, P.R. China

### 1.3. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2022-08-10  
Testing End Date: 2022-09-06

### 1.5. Signature



---

Dong Yuan  
(Prepared this test report)



---

Zhou Yu  
(Reviewed this test report)



---

Zhao Hui Lin  
Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: SAMSUNG Electronics Co., Ltd.  
Address /Post: 19 Chapin Rd., Building D Pine Brook, NJ 07058  
Contact: Jenni Chun  
Email: j1.chun@samsung.com  
Telephone: +1-201-937-4203

### **2.2. Manufacturer Information**

Company Name: Samsung Electronics Co., Ltd.  
Address /Post: Samsung R5, Maetan dong 129, Samsung ro  
Youngtong gu, Suwon city 443 742, Korea  
Contact: Sunghoon Cho  
Email: ggobi.cho@samsung.com  
Telephone: +82-10-2722-4159

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Multi-band GSM/WCDMA/LTE Phone with Bluetooth, WLAN
Model Name	SM-A042M/DS, SM-A042M
FCC ID	ZCASMA042M
Antenna	Embedded
Output power	22dBm maximum EIRP measured for WCDMA Band II
Extreme vol. Limits	3.6VDC to 4.4VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT11a	70288UT11a	REV1.0	A042M.001	2022-08-10
UT06a	70288UT06a	REV1.0	A042M.001	2022-08-01

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE2	Battery

##### **AE1**

Model	HQ-50SD
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Capacitance	5000mAh

##### **AE2**

Model	HQ-50S
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Capacitance	5000mAh

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters are supplied by the customer, which are the bases of testing. CAICT is not responsible for the accuracy of customer supplied technical information that may affect the test results (for example, antenna gain and loss of customer supplied cable).

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-21 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-21 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-21 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

## 5. Laboratory Environment

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 0.5 Ω

**Semi-anechoic chamber SAC** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**Fully-anechoic chamber FAC** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## 6. Summary Of Test Result

### WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

### WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

### WCDMA Band IV

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

All the test results are based on normal power.

Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK and 16QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

## 7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Universal Radio Communication Tester	CMU200	108646	R&S	2023-01-17	25 months
Spectrum Analyzer	FSU	200030	R&S	2023-05-25	1 year
Climate chamber	SH-242	93008556	ESPEC	2023-12-23	3 years
Wireless Communication Test Set	E5515E	MY53211012	Agilent	2023-08-02	1 year
Test Receiver	E4440A	MY48250642	Agilent	2023-03-10	1 year
EMI Antenna	VULB9163	9163-482	Schwarzbeck	2022-11-16	1 year
EMI Antenna	LB-7180-NF	J203001300005	A-INFO	2023-02-23	1 year
EMI Antenna	3117	00058889	ETS-Lindgren	2022-11-07	1 year
EMI Antenna	9117	167	Schwarzbeck	2022-09-21	1 year
EMI Antenna	LB-7180-NF	J211060826	A-INFO	2023-02-27	1 year
Signal Generator	SMF100A	101295	R&S	2022-12-23	1 year
Power Amplifier	5S1G4	0341863	AR	/	/
Universal Radio Communication Tester	CMW500	143008	R&S	2022-12-01	1 year

## Annex A: Measurement Results

### A.1 Output Power

#### A.1.1 Summary

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### A.1.2 Conducted

##### A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

The results below include a correction factor for cable loss that is provided by the customer.

##### A.1.2.2 Measurement Result

###### WCDMA Band II

###### QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	22.96
	9400	1880.0	22.90
	9538	1907.6	22.84

###### 16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	22.11
	9400	1880.0	22.25
	9538	1907.6	22.21

###### WCDMA Band V

###### QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	24.72
	4183	836.6	24.71
	4233	846.6	24.60

###### 16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	23.98
	4183	836.6	23.97
	4233	846.6	23.87

**WCDMA Band IV****QPSK**

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)
	1312	1712.4	23.68
	1412	1732.4	23.58
	1513	1752.6	23.58

**16QAM**

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)
	1312	1712.4	22.95
	1412	1732.4	22.98
	1513	1752.6	22.91

Note: Expanded measurement uncertainty is  $U = 0.578$  dB,  $k = 2$ .

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".


Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

Part 27.50(d) specifies "Fixed, mobile and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".


#### A.1.3.2 Method of Measurement

The measurements procedures in ANSI C63.26 are used.

1. EUT was placed on a 0.8/1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The receiving antenna shall be varied from 1 to 4m in height above the reference ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and the EUT is manipulated through all orthogonal planes representative of its typical use. The test is carried out with both vertical and horizontal polarization of the receiving antenna. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with rms detector.

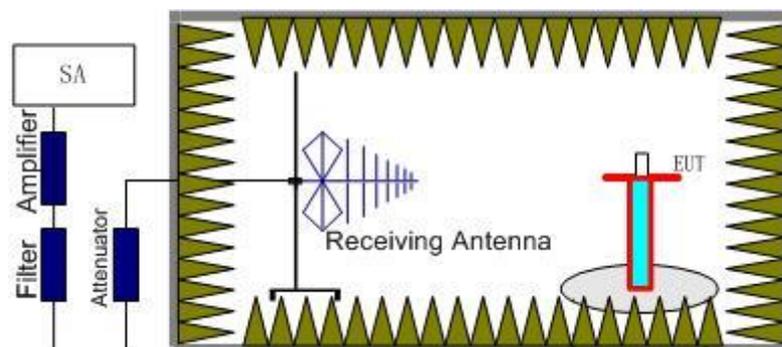

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test and the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

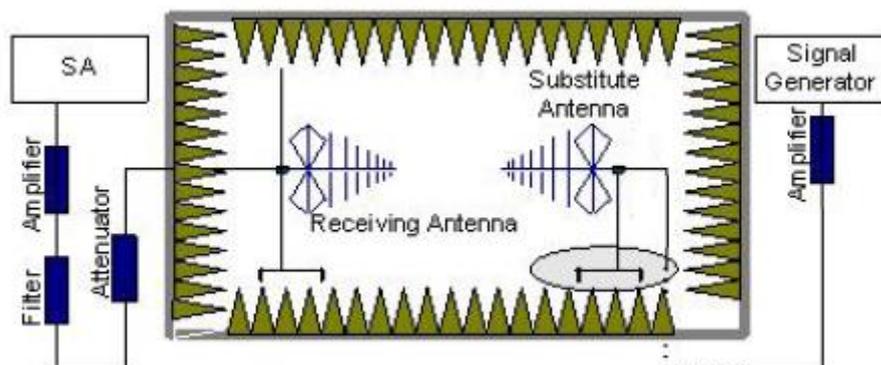

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the Amplifier and the Substitution Antenna.  
The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### WCDMA Band II-EIRP

#### Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm

#### Measurement result-QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.40	-24.02	2.84	43.75	4.87	21.76	33.00	11.24	H
1880.00	-23.74	2.85	43.75	4.82	21.98	33.00	11.02	H
1907.60	-23.63	2.88	43.77	4.77	22.03	33.00	10.97	H

#### Measurement result-16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.40	-24.04	2.84	43.75	4.87	21.74	33.00	11.26	H
1880.00	-23.77	2.85	43.75	4.82	21.95	33.00	11.05	H
1907.60	-23.66	2.88	43.77	4.77	22.00	33.00	11.00	H

### WCDMA Band V-ERP

#### Limits

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

#### Measurement result-QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.40	-23.47	2.25	45.76	0.93	2.15	18.82	38.45	19.63	V
836.60	-22.61	2.26	45.66	0.82	2.15	19.46	38.45	18.99	V
846.60	-23.04	2.26	45.56	0.81	2.15	18.92	38.45	19.53	V

#### Measurement result-16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.40	-23.50	2.25	45.76	0.93	2.15	18.79	38.45	19.66	V
836.60	-22.61	2.26	45.66	0.82	2.15	19.46	38.45	18.99	V
846.60	-23.08	2.26	45.56	0.81	2.15	18.88	38.45	19.57	V

## WCDMA Band IV-EIRP

### Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤30dBm

### Measurement result-QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.40	-26.79	3.66	44.10	5.12	18.77	30.00	11.23	V
1732.40	-26.75	3.31	44.13	5.08	19.16	30.00	10.84	V
1752.60	-25.09	3.85	44.14	5.05	20.25	30.00	9.75	H

### Measurement result-16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.40	-26.77	3.66	44.10	5.12	18.79	30.00	11.21	V
1732.40	-26.77	3.31	44.13	5.08	19.14	30.00	10.86	V
1752.60	-25.09	3.85	44.14	5.05	20.25	30.00	9.75	H

Frequency: 1752.60MHz

Peak EIRP (dBm)=P<sub>Mea</sub>(-25.94)-P<sub>cl</sub>(3.85dB)+P<sub>Ag</sub>(44.14dB)+G<sub>a</sub> (5.05dB) = 19.40dBm

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.69 dB, k = 2.

## A.2 Emission Limit


### **A.2.1 Measurement Method**

The measurements procedures in ANSI C63.26 are used. This measurement is carried out in fully-anechoic chamber.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

#### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 0.8/1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The receiving antenna shall be varied from 1 to 4m in height above the reference ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and the EUT is manipulated through all orthogonal planes representative of its typical use. The test is carried out with both vertical and horizontal polarization of the receiving antenna. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

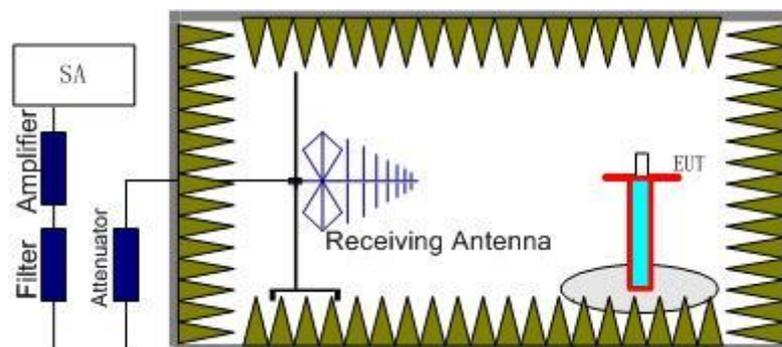

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

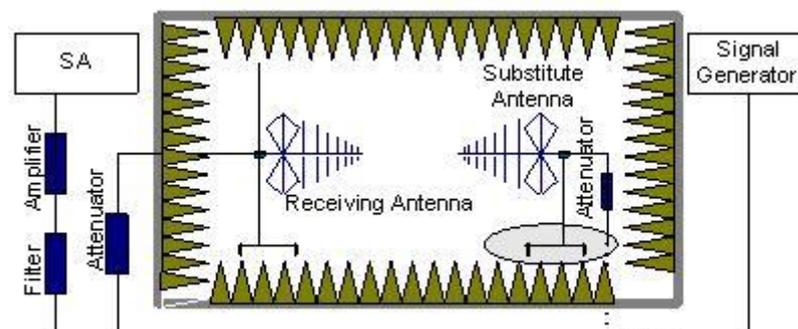

In the chamber, a substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### A.2.2 Measurement Limit

Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV (1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. All mode of operation were investigated and the worst case configuration results are reported in this section. The range of evaluated frequency is from 9 kHz to 20GHz. Measurement value show only up to 6 maximum emissions noted.

### A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	9KHz -10GHz	Pass
	Middle	9KHz -10GHz	Pass
	High	9KHz -10GHz	Pass
WCDMA Band II	Low	9KHz -20GHz	Pass
	Middle	9KHz -20GHz	Pass
	High	9KHz -20GHz	Pass
WCDMA Band IV	Low	9KHz -20GHz	Pass
	Middle	9KHz -20GHz	Pass
	High	9KHz -20GHz	Pass

### A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	
WCDMA Band IV	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3707.02	-45.72	6.41	8.49	-43.64	-13.00	30.64	H
5562.02	-54.01	7.19	10.59	-50.61	-13.00	37.61	V
7390.01	-54.11	8.12	12.07	-50.16	-13.00	37.16	V
9250.01	-51.94	9.04	13.25	-47.73	-13.00	34.73	V
11105.01	-49.92	9.81	13.18	-46.55	-13.00	33.55	V
12979.01	-48.29	10.47	13.49	-45.27	-13.00	32.27	H

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3761.02	-48.33	6.26	8.57	-46.02	-13.00	33.02	H
5636.02	-54.06	7.27	10.57	-50.76	-13.00	37.76	V
7520.01	-53.45	8.31	12.22	-49.54	-13.00	36.54	V
9415.01	-53.25	9.11	13.35	-49.01	-13.00	36.01	V
11258.01	-49.73	9.75	13.15	-46.33	-13.00	33.33	V
13142.01	-44.28	10.75	13.70	-41.33	-13.00	28.33	V

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3814.02	-58.10	6.09	8.64	-55.55	-13.00	42.55	V
5729.02	-58.00	7.29	10.55	-54.74	-13.00	41.74	V
7619.01	-54.08	8.06	12.30	-49.84	-13.00	36.84	V
9552.01	-53.57	9.35	13.35	-49.57	-13.00	36.57	H
11465.01	-49.25	9.90	13.11	-46.04	-13.00	33.04	V
13371.01	-44.30	10.57	14.02	-40.85	-13.00	27.85	V

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.01	-55.28	3.56	5.23	2.15	-55.76	-13.00	42.76	H
2473.00	-48.74	4.60	6.02	2.15	-49.47	-13.00	36.47	H
3296.02	-62.00	5.29	7.71	2.15	-61.73	-13.00	48.73	V
4120.02	-57.18	6.04	9.02	2.15	-56.35	-13.00	43.35	V
4946.01	-57.90	6.70	9.85	2.15	-56.90	-13.00	43.90	V
5769.01	-58.34	7.24	10.55	2.15	-57.18	-13.00	44.18	V

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1671.01	-53.60	3.58	5.19	2.15	-54.14	-13.00	41.14	H
2506.00	-43.32	4.63	6.11	2.15	-43.99	-13.00	30.99	V
3356.02	-59.86	5.32	7.85	2.15	-59.48	-13.00	46.48	V
4165.02	-57.25	6.13	9.07	2.15	-56.46	-13.00	43.46	V
5025.01	-57.21	6.56	9.94	2.15	-55.98	-13.00	42.98	H
5839.01	-56.77	7.20	10.53	2.15	-55.59	-13.00	42.59	V

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1691.01	-54.04	3.59	5.16	2.15	-54.62	-13.00	41.62	H
2542.00	-45.35	4.66	6.18	2.15	-45.98	-13.00	32.98	H
3390.02	-60.83	5.35	7.94	2.15	-60.39	-13.00	47.39	V
4246.02	-57.52	6.24	9.15	2.15	-56.76	-13.00	43.76	H
5074.01	-56.84	6.70	10.00	2.15	-55.69	-13.00	42.69	V
5961.01	-56.77	7.47	10.51	2.15	-55.88	-13.00	42.88	V

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.02	-56.51	5.38	8.02	-53.87	-13.00	40.87	H
5139.02	-62.40	6.86	10.09	-59.17	-13.00	46.17	V
6853.01	-63.10	7.82	11.42	-59.50	-13.00	46.50	H
8558.01	-63.81	8.57	13.01	-59.37	-13.00	46.37	V
10291.01	-61.54	9.61	13.02	-58.13	-13.00	45.13	V
11993.01	-58.68	10.08	13.00	-55.76	-13.00	42.76	V

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3463.02	-62.11	5.45	8.11	-59.45	-13.00	46.45	V
5200.02	-63.58	6.96	10.18	-60.36	-13.00	47.36	V
6979.01	-64.74	8.14	11.57	-61.31	-13.00	48.31	V
8718.01	-64.26	8.41	13.04	-59.63	-13.00	46.63	V
10444.01	-60.49	9.74	13.08	-57.15	-13.00	44.15	V
12192.01	-59.14	10.08	13.08	-56.14	-13.00	43.14	V

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3507.02	-57.66	5.53	8.21	-54.98	-13.00	41.98	H
5255.02	-64.39	7.00	10.26	-61.13	-13.00	48.13	V
7013.01	-62.70	8.28	11.62	-59.36	-13.00	46.36	H
8746.01	-63.44	8.50	13.05	-58.89	-13.00	45.89	V
10496.01	-60.98	9.66	13.10	-57.54	-13.00	44.54	V
12249.01	-58.70	10.03	13.10	-55.63	-13.00	42.63	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.69 dB, k = 2.

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### WCDMA Band II QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	1850.112	1909.880		
50				3.97	0.0021
40				2.96	0.0016
30				2.23	0.0012
10				2.75	0.0015
0				2.56	0.0014
-10				2.12	0.0011
-20				8.93	0.0048
-30				5.02	0.0027

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1850.112	1909.880	2.09	0.0011
4.4				1.72	0.0009

#### WCDMA Band V QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	824.088	848.888		
50				6.09	0.0073
40				6.21	0.0074
30				2.79	0.0033
10				3.89	0.0046
0				4.53	0.0054
-10				4.67	0.0056
-20				0.95	0.0011
-30				3.49	0.0042

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	824.088	848.888	2.82	0.0034
4.4				4.85	0.0058

**WCDMA Band IV QPSK**
**Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	1710.120	1754.880		
50				1.77	0.0010
40				4.70	0.0027
30				5.40	0.0031
10				3.10	0.0018
0				7.39	0.0043
-10				6.07	0.0035
-20				5.66	0.0033
-30				8.06	0.0047

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1710.120	1754.880	6.36	0.0037
4.4				4.09	0.0024

Note: Expanded measurement uncertainty is U = 0.01 PPM, k = 2.

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

### WCDMA Band II (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4198.72
1880.0	4182.69
1907.6	4182.69


### WCDMA Band II (99%)

#### Channel 9262-Occupied Bandwidth (99% BW)

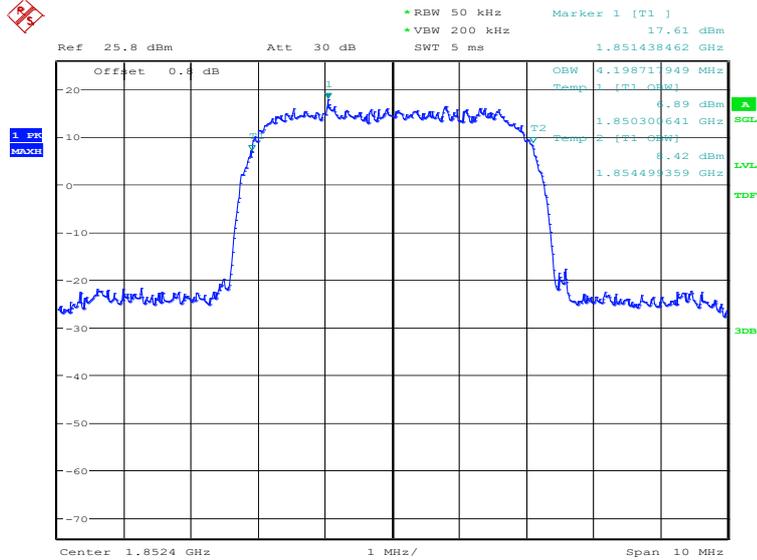


Date: 11.AUG.2022 10:48:46

### Channel 9400-Occupied Bandwidth (99% BW)

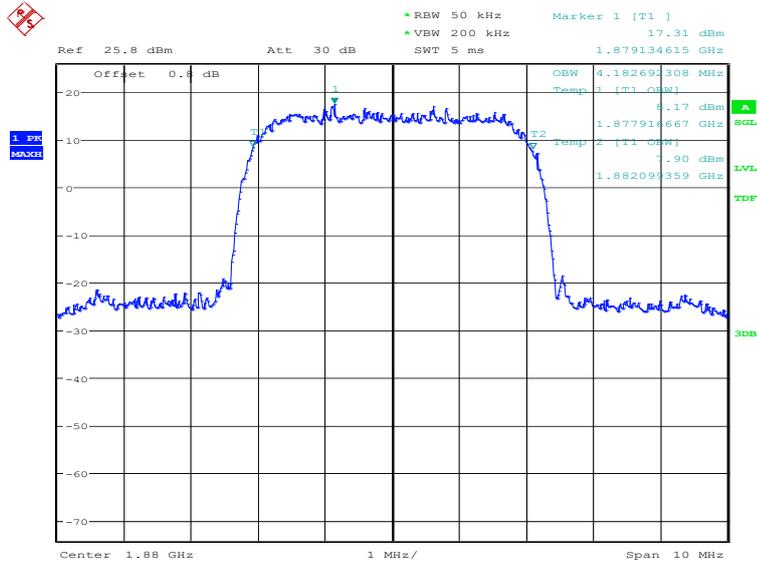

Date: 11.AUG.2022 10:49:13

### Channel 9538-Occupied Bandwidth (99% BW)

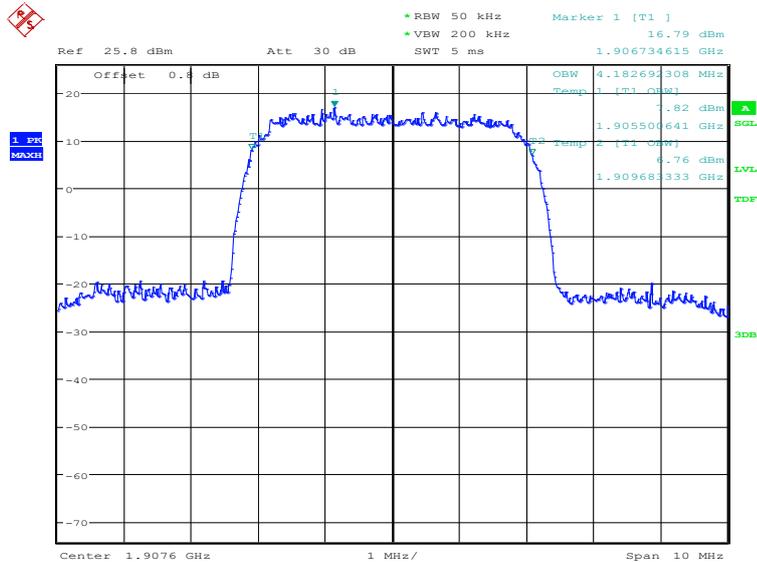


Date: 11.AUG.2022 10:49:41

**WCDMA Band II (99%)-16QAM**

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4166.67
1880.0	4182.69
1907.6	4182.69


**WCDMA Band II (99%)**

**Channel 9262-Occupied Bandwidth (99% BW)**

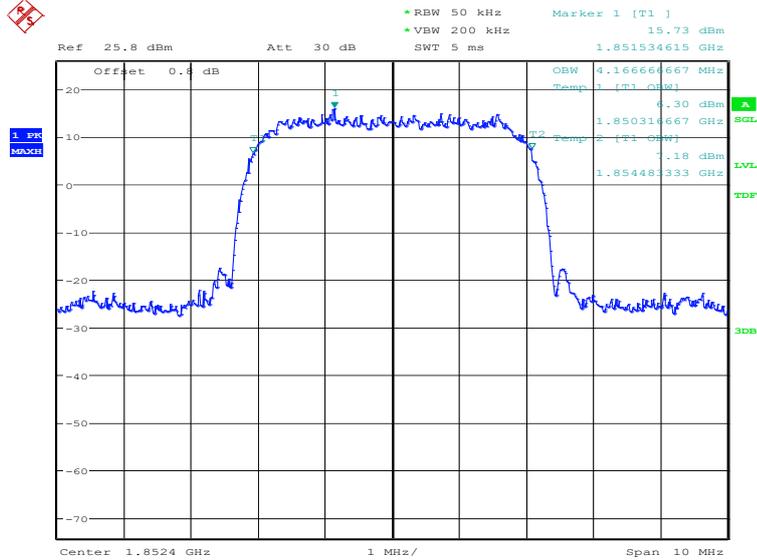


Date: 26.AUG.2022 15:41:31

### Channel 9400-Occupied Bandwidth (99% BW)

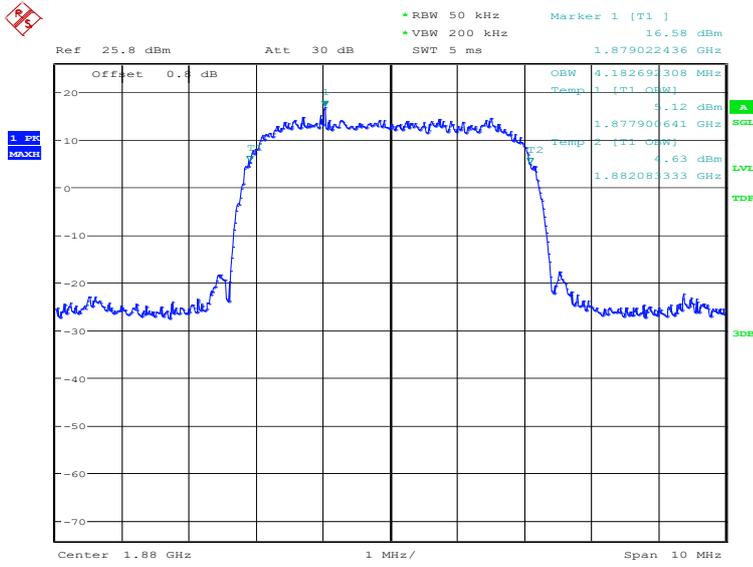

Date: 26.AUG.2022 15:41:58

### Channel 9538-Occupied Bandwidth (99% BW)

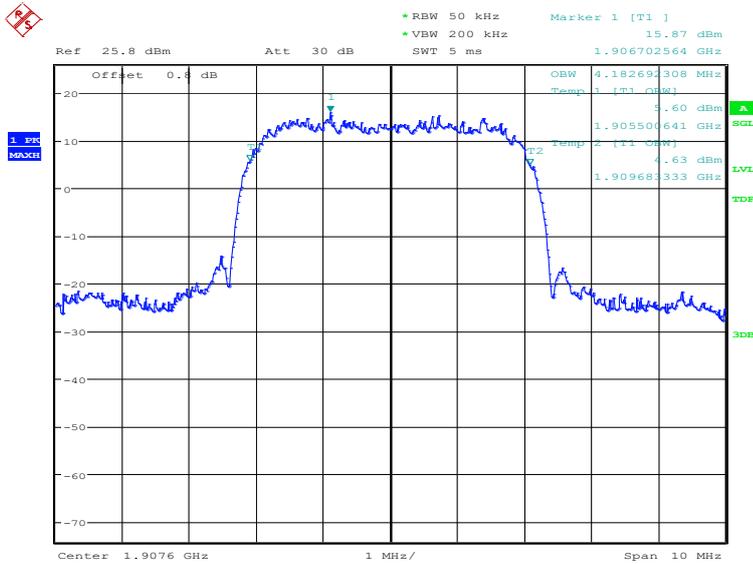


Date: 26.AUG.2022 15:42:25

### WCDMA Band V (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4198.72
836.6	4182.69
846.6	4166.67


### WCDMA Band V (99%)

#### Channel 4132-Occupied Bandwidth (99% BW)

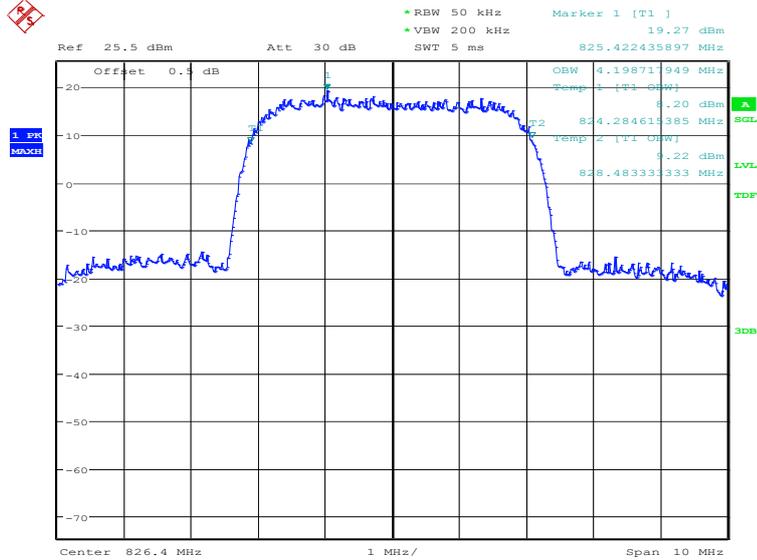


Date: 11.AUG.2022 10:52:44

### Channel 4183-Occupied Bandwidth (99% BW)

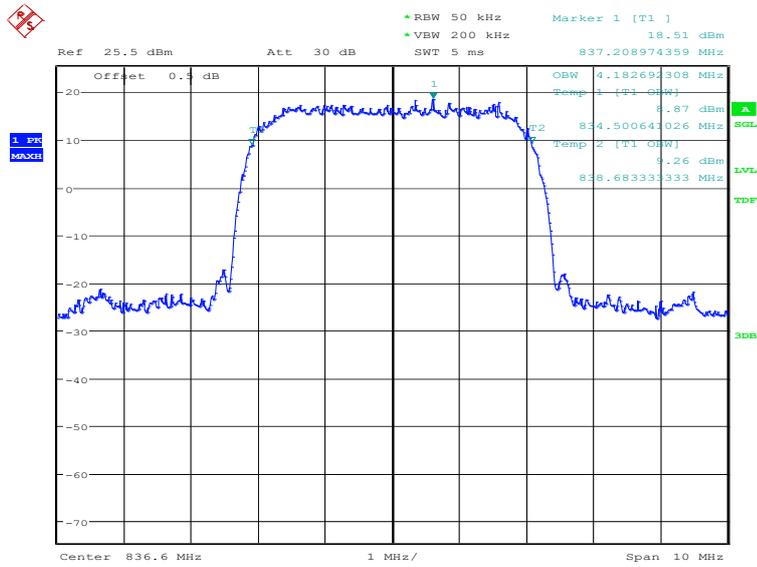

Date: 11.AUG.2022 10:53:11

### Channel 4233-Occupied Bandwidth (99% BW)

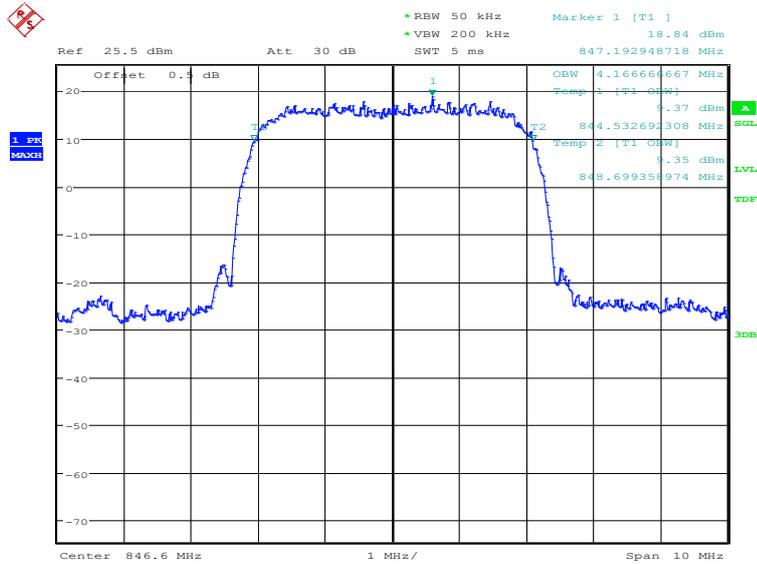


Date: 11.AUG.2022 10:53:38

### WCDMA Band V (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4166.67
836.6	4166.67
846.6	4166.67


### WCDMA Band V (99%)

#### Channel 4132-Occupied Bandwidth (99% BW)

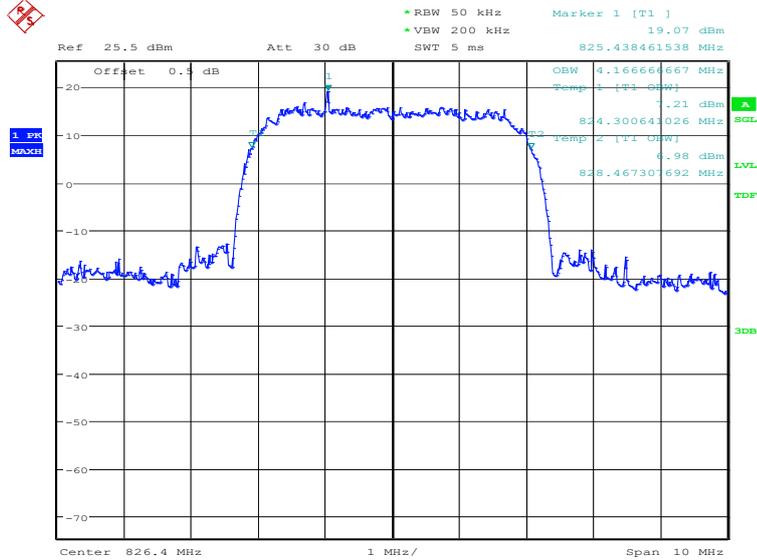


Date: 26.AUG.2022 15:46:02

### Channel 4183-Occupied Bandwidth (99% BW)

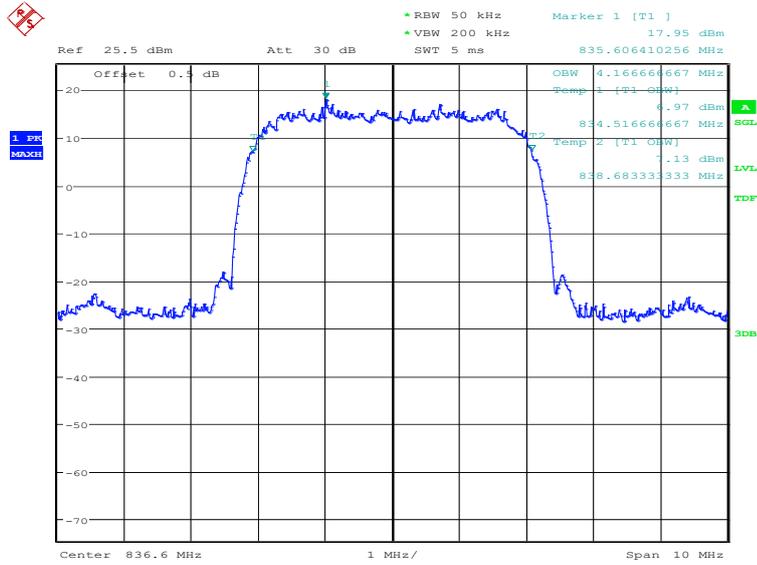

Date: 26.AUG.2022 15:46:29

### Channel 4233-Occupied Bandwidth (99% BW)

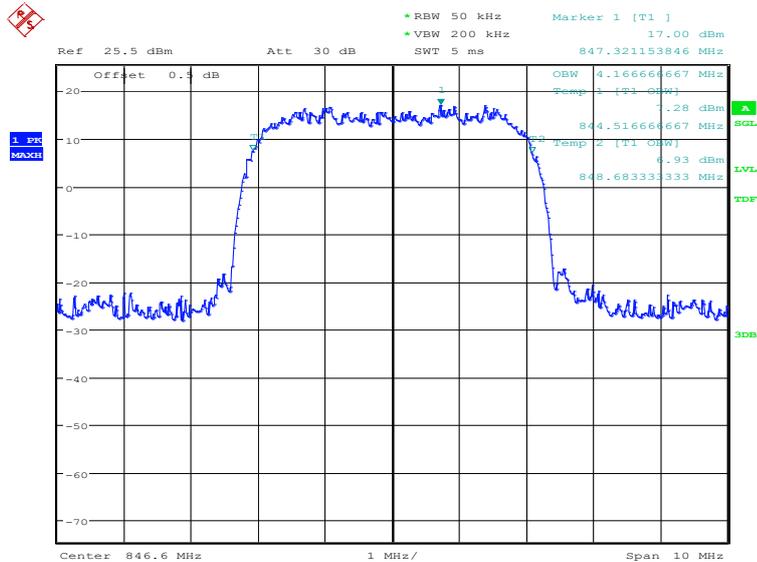


Date: 26.AUG.2022 15:46:56

### WCDMA Band IV (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4182.69
1732.4	4198.72
1752.6	4182.69


### WCDMA Band IV (99%)

#### Channel 1312-Occupied Bandwidth (99% BW)

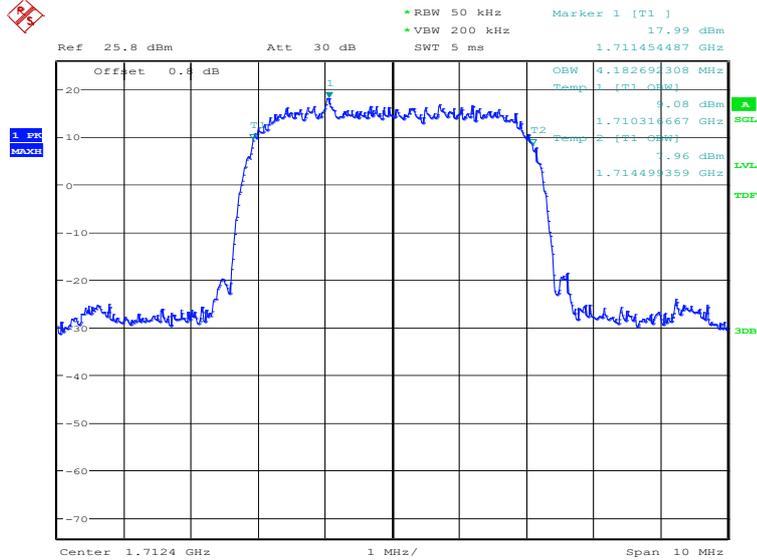


Date: 11.AUG.2022 10:50:45

### Channel 1412-Occupied Bandwidth (99% BW)

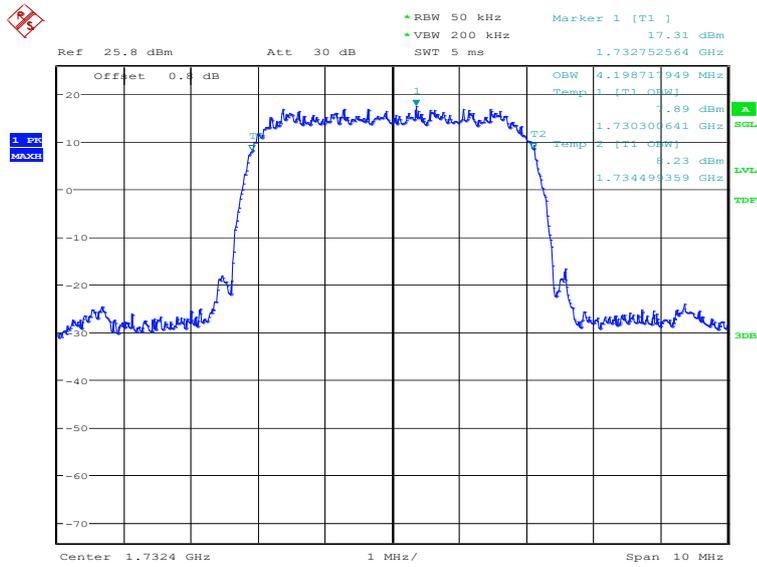

Date: 11.AUG.2022 10:51:12

### Channel 1513-Occupied Bandwidth (99% BW)

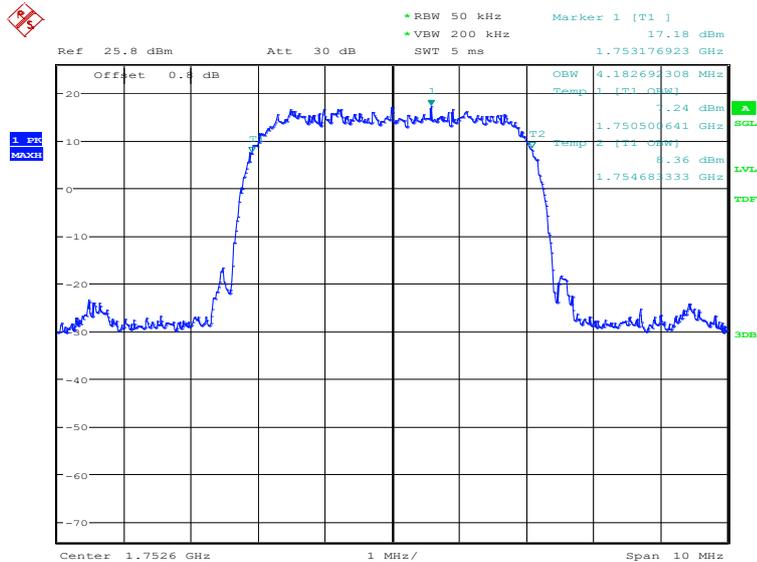


Date: 11.AUG.2022 10:51:40

**WCDMA Band IV (99%)-16QAM**

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4182.69
1732.4	4182.69
1752.6	4182.69


**WCDMA Band IV (99%)**

**Channel 1312-Occupied Bandwidth (99% BW)**

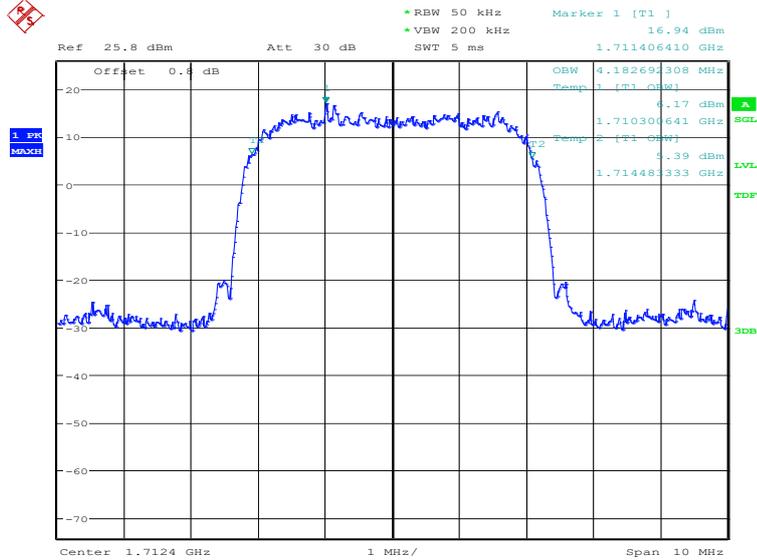


Date: 26.AUG.2022 15:43:47

### Channel 1412-Occupied Bandwidth (99% BW)

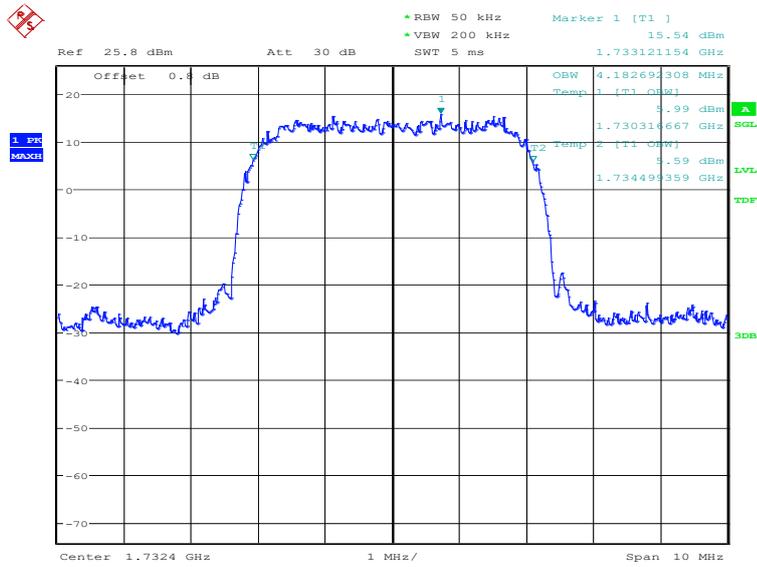

Date: 26.AUG.2022 15:44:14

### Channel 1513-Occupied Bandwidth (99% BW)

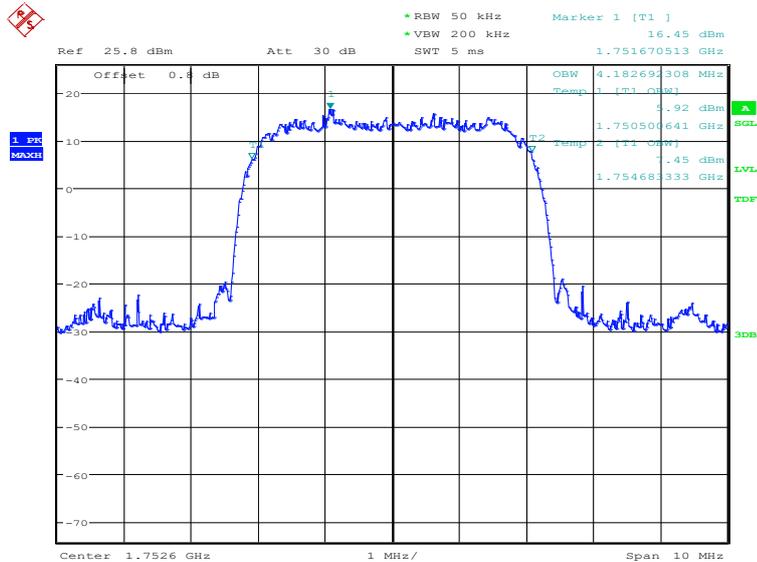

Date: 26.AUG.2022 15:44:41

Note: Expanded measurement uncertainty is  $U = 3428 \text{ Hz}$ ,  $k = 2$ .

## **A.5 Emission Bandwidth**


The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

**WCDMA Band II-QPSK (-26dBc)**

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4727.56
1880.0	4711.54
1907.6	4711.54

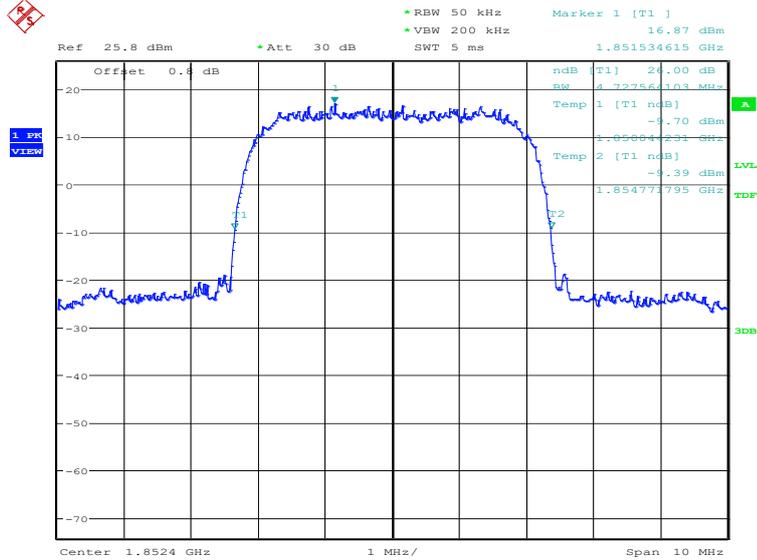**WCDMA Band II (-26dBc)**
**Channel 9262-Emission Bandwidth (-26dBc BW)**


Date: 11.AUG.2022 10:54:55




**WCDMA Band II -16QAM (-26dBc)**

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4647.44
1880.0	4663.46
1907.6	4647.44


**WCDMA Band II (-26dBc)**

**Channel 9262-Emission Bandwidth (-26dBc BW)**

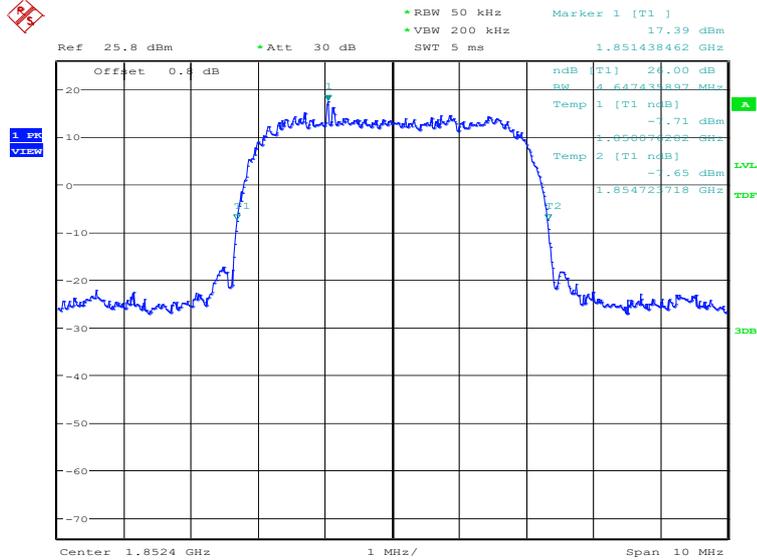


Date: 26.AUG.2022 15:48:24

### Channel 9400-Emission Bandwidth (-26dBc BW)

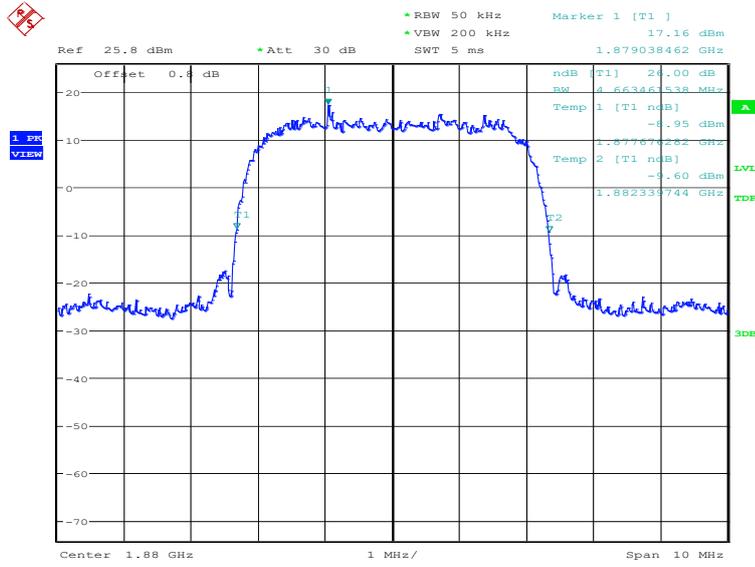

Date: 26.AUG.2022 15:48:51

### Channel 9538-Emission Bandwidth (-26dBc BW)

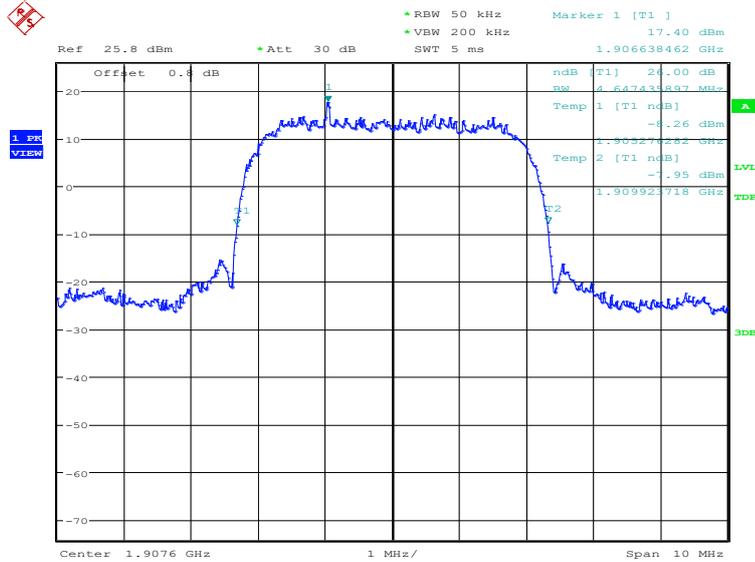


Date: 26.AUG.2022 15:49:18

### WCDMA Band V-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4743.59
836.60	4679.49
846.60	4679.49


### WCDMA Band V (-26dBc)

#### Channel 4132-Emission Bandwidth (-26dBc BW)

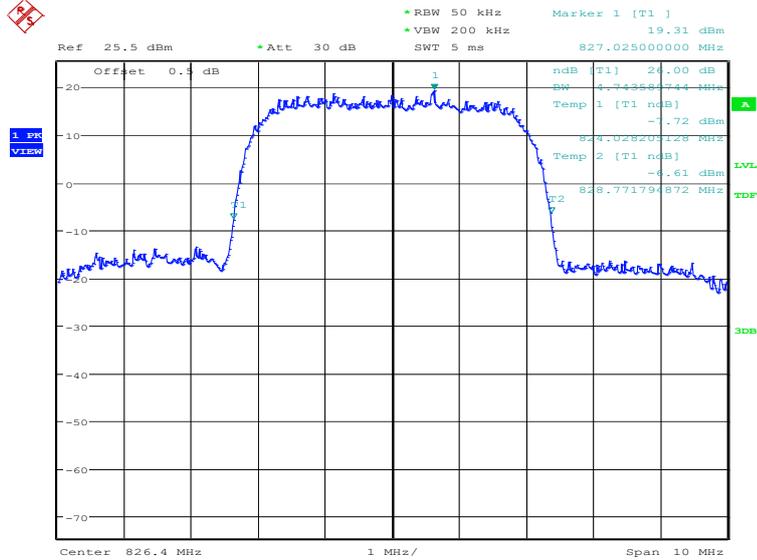


Date: 11.AUG.2022 10:58:54

### Channel 4183-Emission Bandwidth (-26dBc BW)

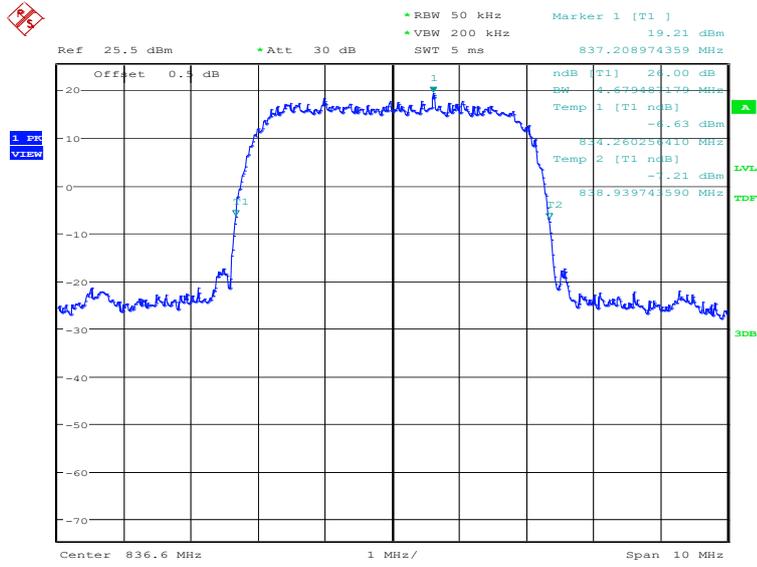

Date: 11.AUG.2022 10:59:21

### Channel 4233-Emission Bandwidth (-26dBc BW)

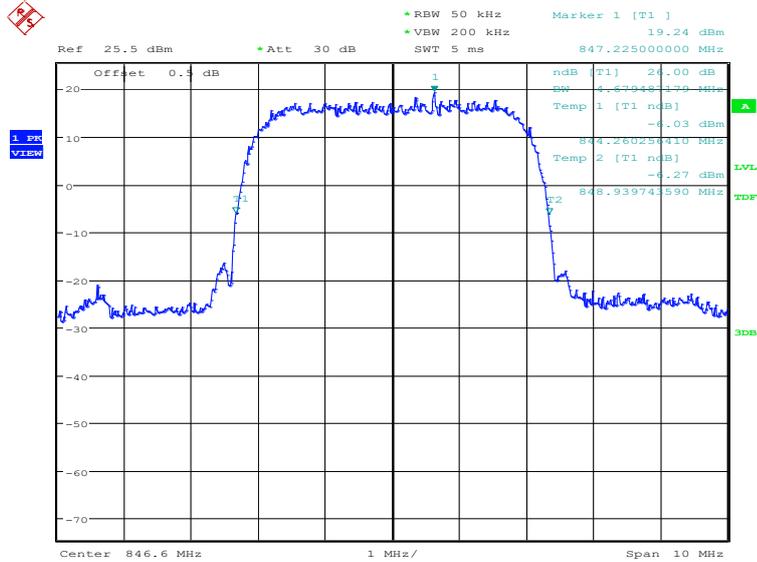


Date: 11.AUG.2022 10:59:49

### WCDMA Band V-16QAM (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4647.44
836.60	4663.46
846.60	4711.54


### WCDMA Band V (-26dBc)

#### Channel 4132-Emission Bandwidth (-26dBc BW)

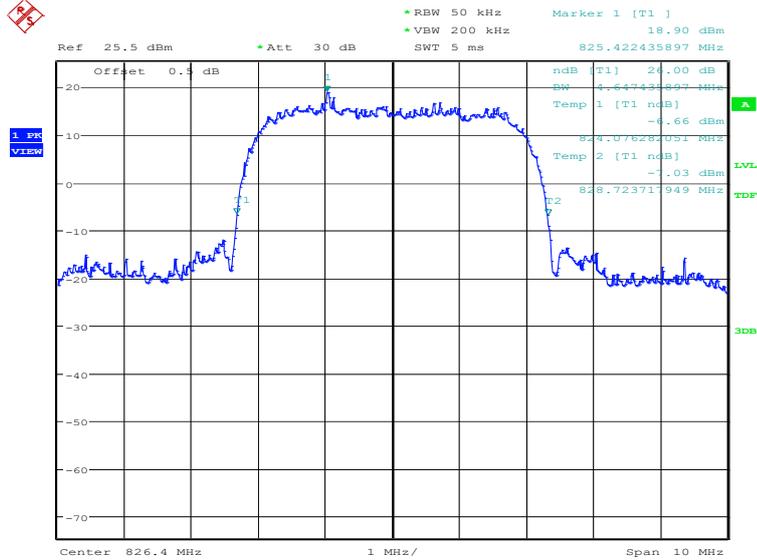


Date: 26.AUG.2022 15:52:56

### Channel 4183-Emission Bandwidth (-26dBc BW)

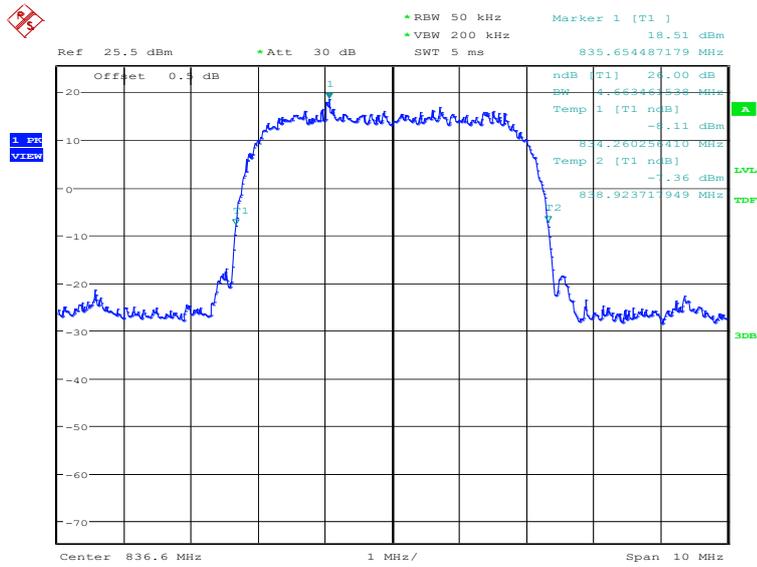

Date: 26.AUG.2022 15:53:23

### Channel 4233-Emission Bandwidth (-26dBc BW)

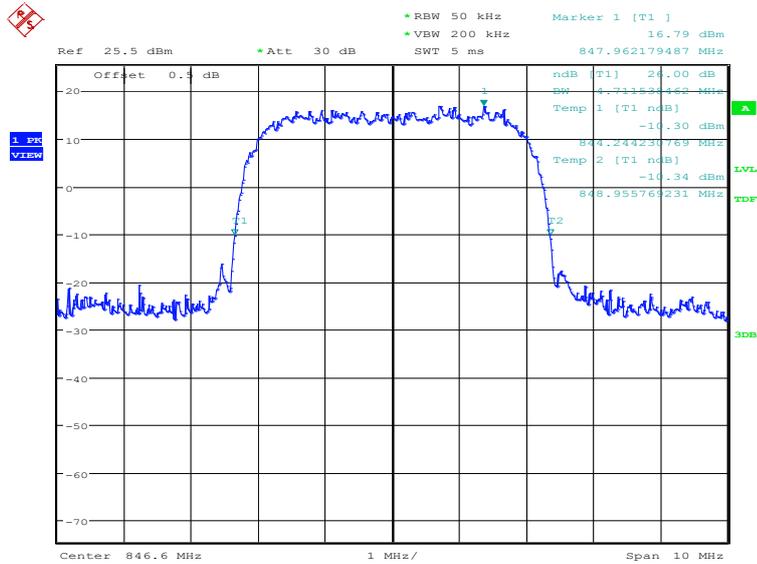


Date: 26.AUG.2022 15:53:50

### WCDMA Band IV-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4711.54
1732.4	4711.54
1752.6	4679.49


### WCDMA Band IV (-26dBc)

#### Channel 1312-Emission Bandwidth (-26dBc BW)

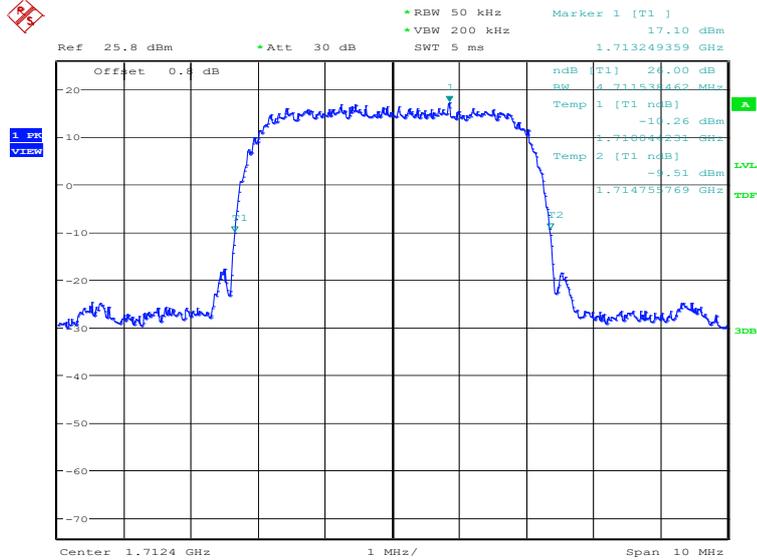


Date: 11.AUG.2022 10:56:54

### Channel 1412-Emission Bandwidth (-26dBc BW)

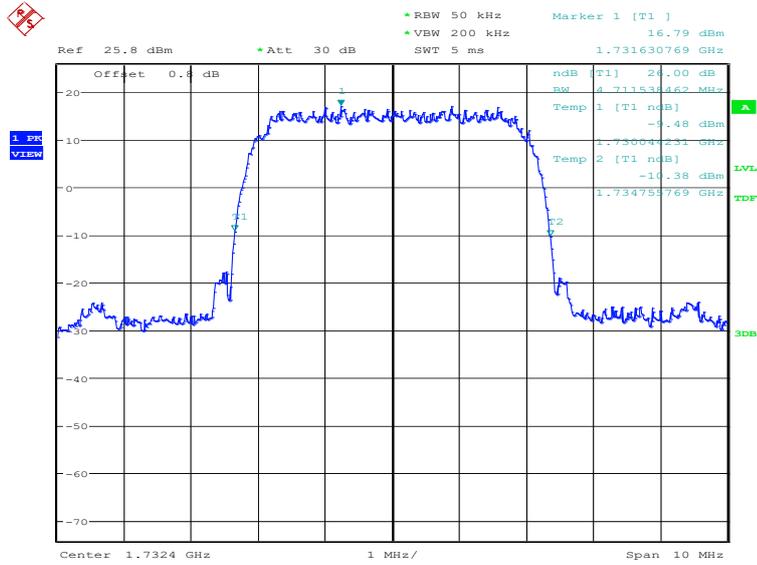

Date: 11.AUG.2022 10:57:22

### Channel 1513-Emission Bandwidth (-26dBc BW)

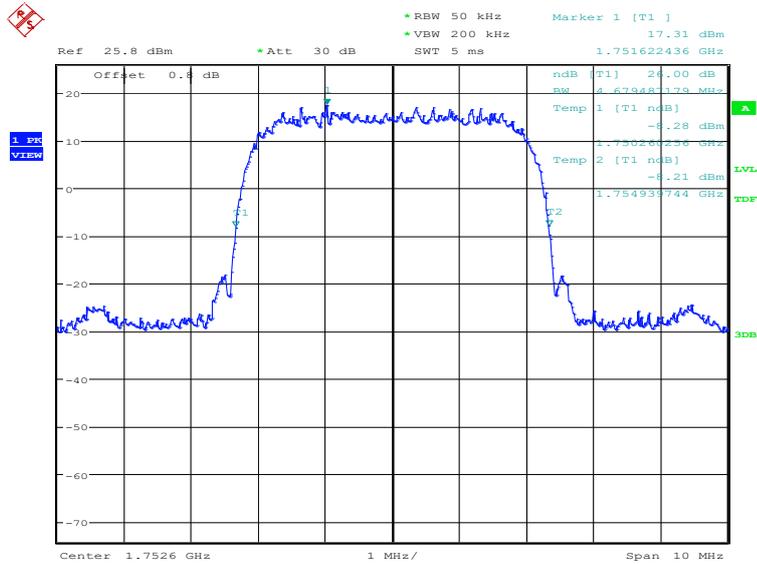


Date: 11.AUG.2022 10:57:49

### WCDMA Band IV-16QAM (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4679.49
1732.4	4695.51
1752.6	4679.49


### WCDMA Band IV (-26dBc)

#### Channel 1312-Emission Bandwidth (-26dBc BW)

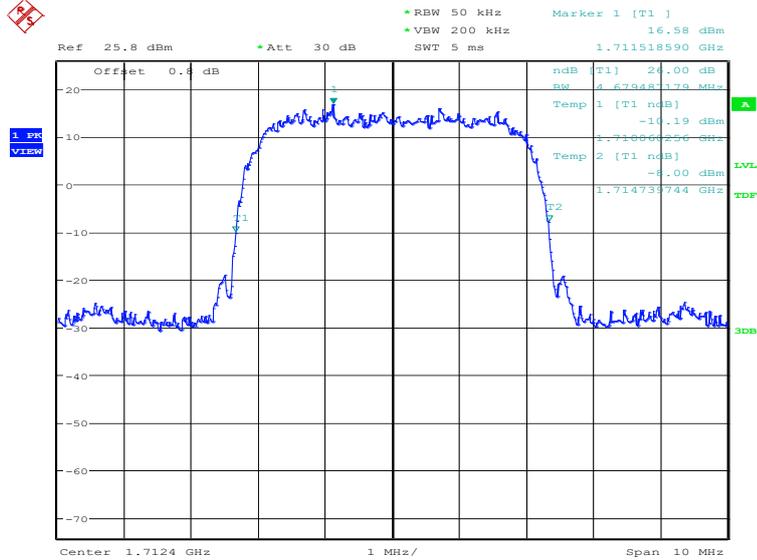


Date: 26.AUG.2022 15:50:40

### Channel 1412-Emission Bandwidth (-26dBc BW)

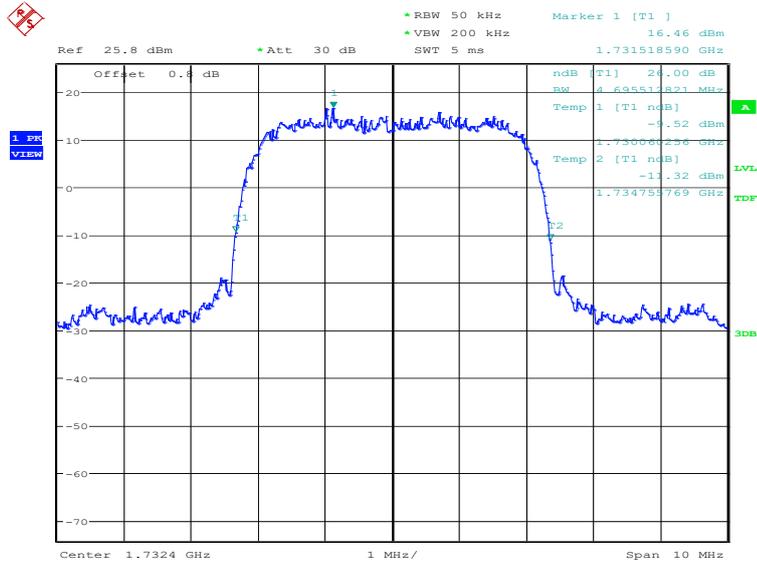

Date: 26.AUG.2022 15:51:07

### Channel 1513-Emission Bandwidth (-26dBc BW)

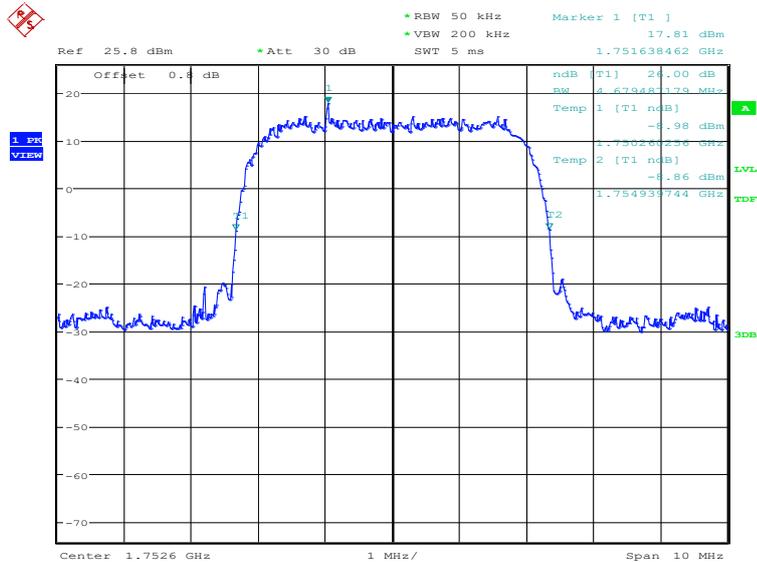

Date: 26.AUG.2022 15:51:34

Note: Expanded measurement uncertainty is  $U = 3428 \text{ Hz}$ ,  $k = 2$ .

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

### A.6.2 Measurement result


#### WCDMA Band II-QPSK

#### Channel 9262

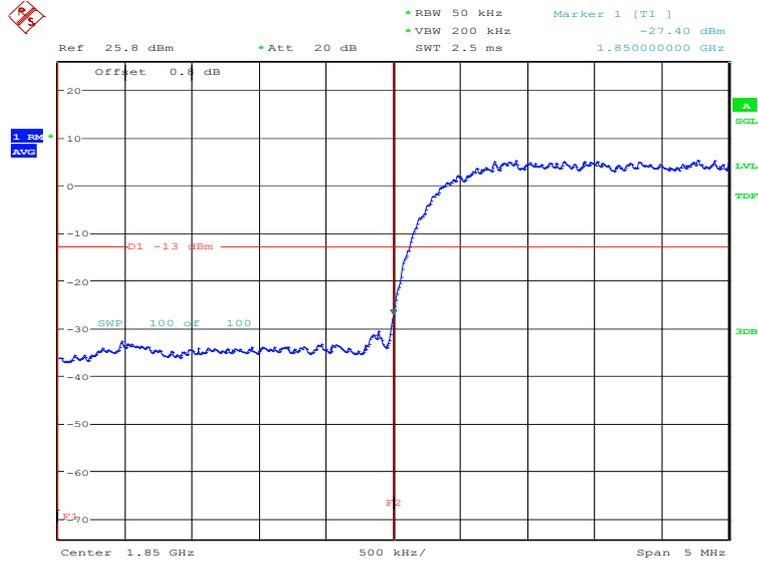


Date: 11.AUG.2022 11:00:56

#### Channel 9538

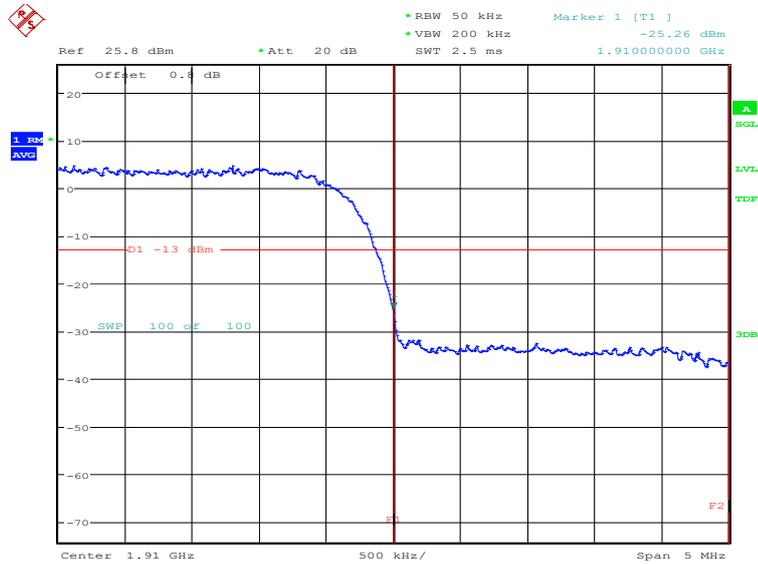


Date: 11.AUG.2022 11:02:12

### WCDMA Band V-QPSK Channel 4132

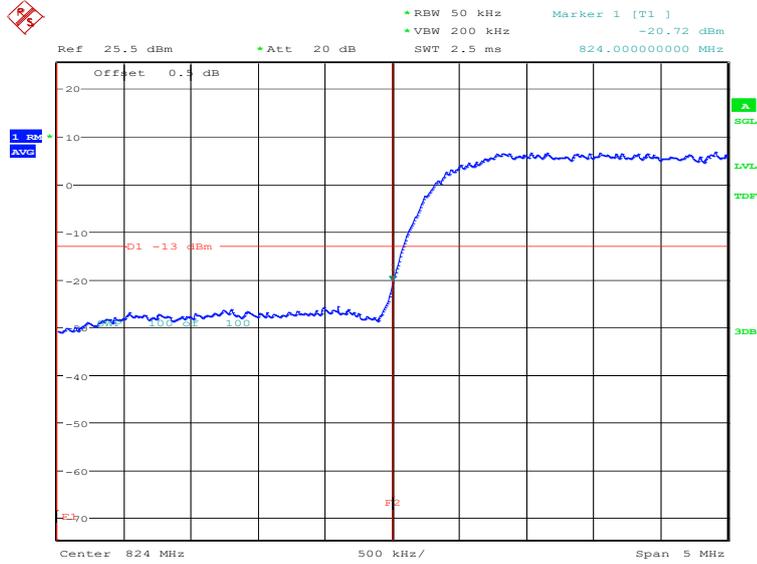

Date: 11.AUG.2022 11:07:11

### Channel 4233

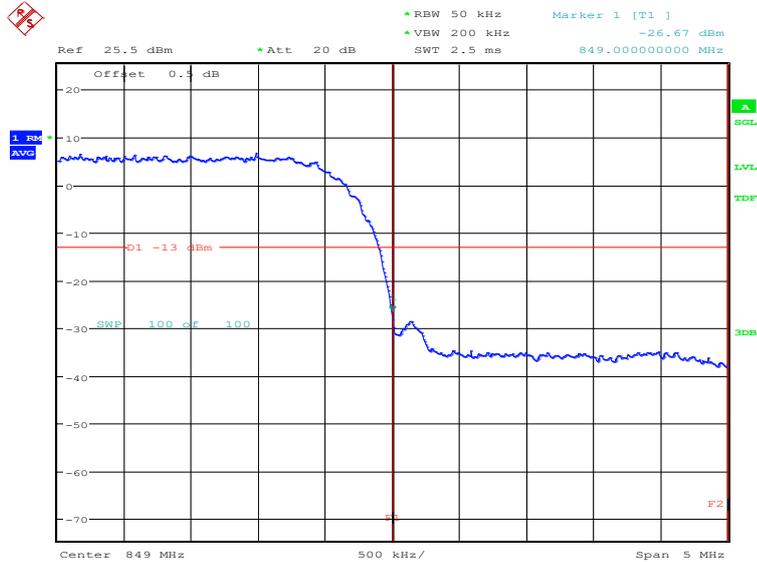

Date: 11.AUG.2022 11:08:26



## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than  $2 \times \text{span/RBW}$ .

### **A. 7.2 Measurement Limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### A.7.3 Measurement result

#### WCDMA Band II

#### Channel 9262: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

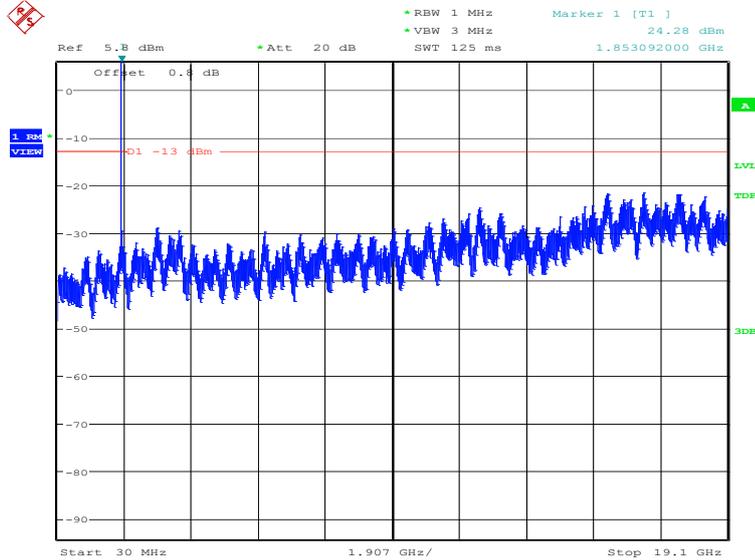

Date: 11.AUG.2022 11:10:42

#### Channel 9400: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

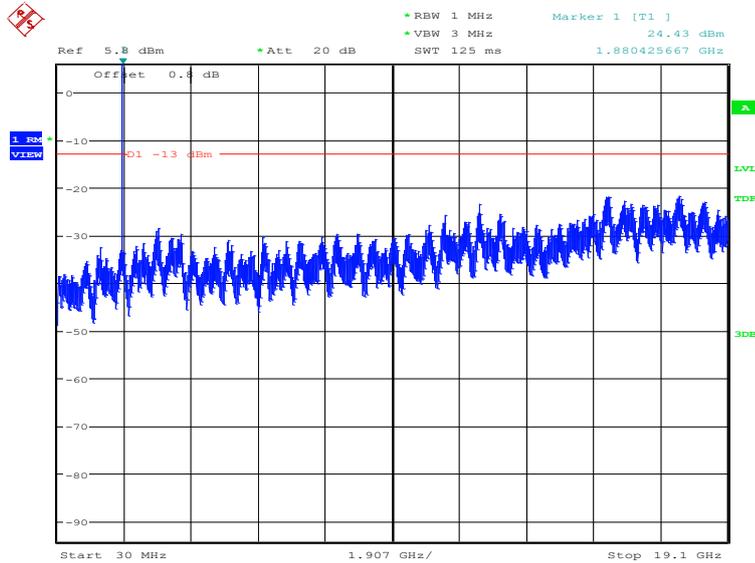

Date: 11.AUG.2022 11:11:12

### Channel 9538: 30MHz –19.10GHz

NOTE: peak above the limit line is the carrier frequency.

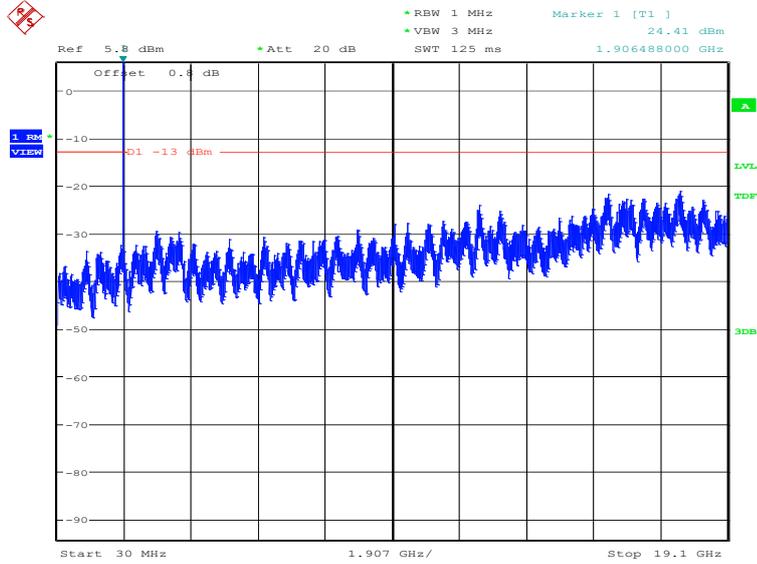


Date: 11.AUG.2022 11:11:42

### WCDMA Band V

### Channel 4132: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

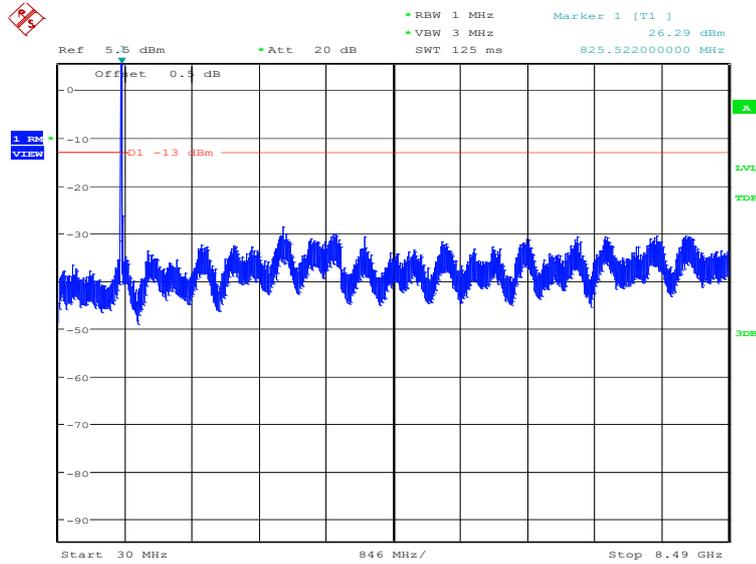

Date: 11.AUG.2022 11:14:57

### Channel 4183: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

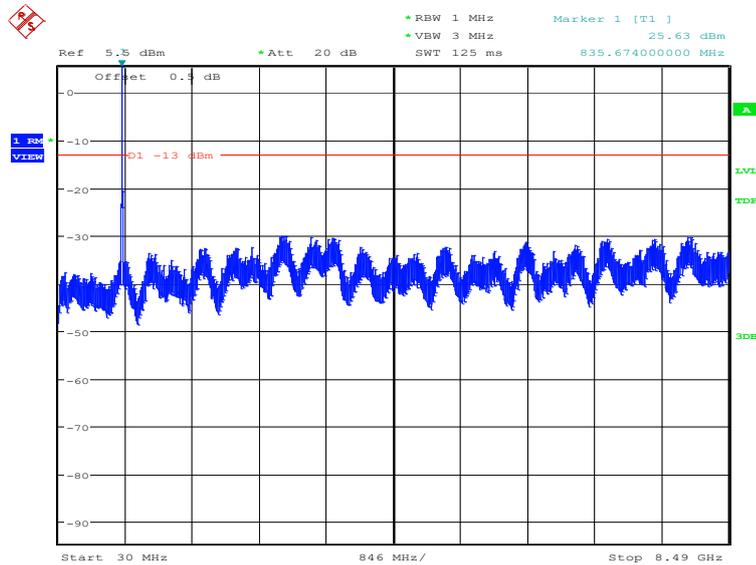

Date: 11.AUG.2022 11:15:27

### Channel 4233: 30MHz –8.49GHz

NOTE: peak above the limit line is the carrier frequency.

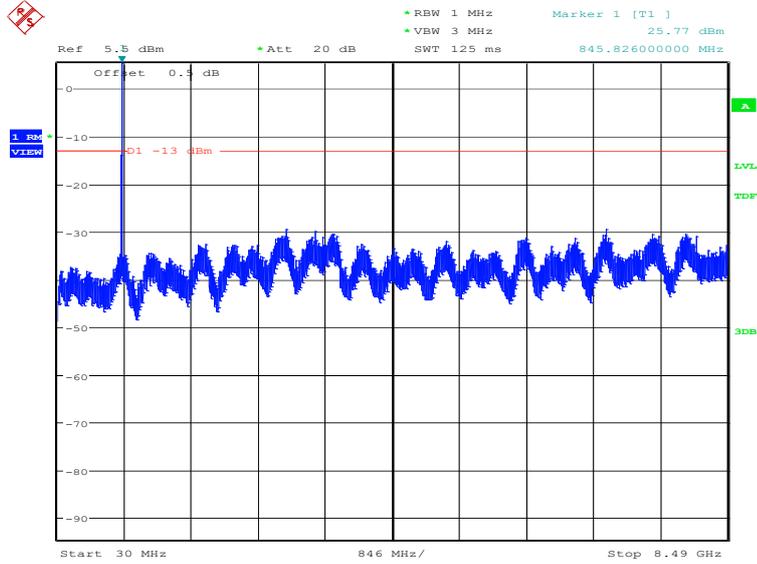


Date: 11.AUG.2022 11:15:58

### WCDMA Band IV

#### Channel 1312: 30MHz -17.55GHz

NOTE: peak above the limit line is the carrier frequency.

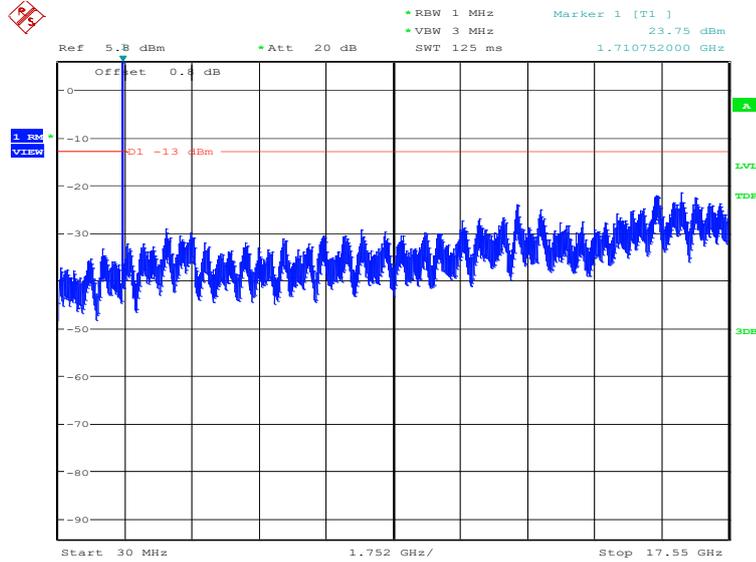


Date: 11.AUG.2022 11:12:50

### WCDMA Band IV

#### Channel 1412: 30MHz -17.55GHz

NOTE: peak above the limit line is the carrier frequency.

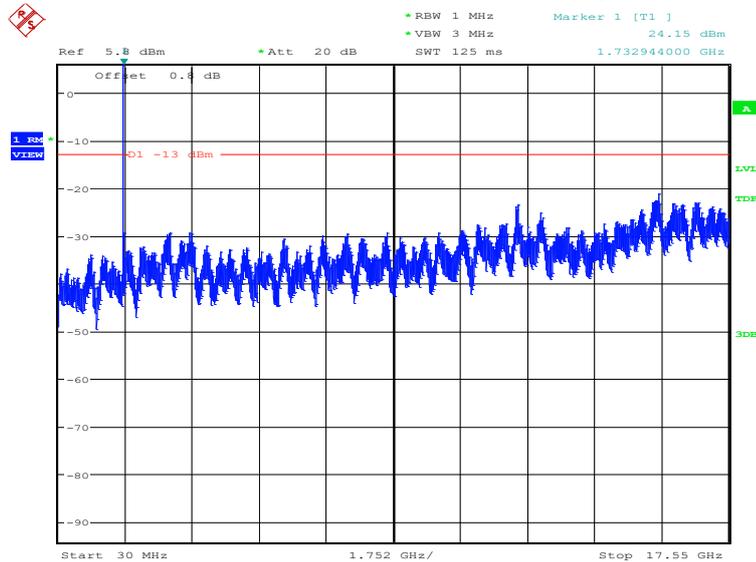


Date: 11.AUG.2022 11:13:20

**WCDMA Band IV**

**Channel 1513: 30MHz –17.55GHz**

**NOTE: peak above the limit line is the carrier frequency.**

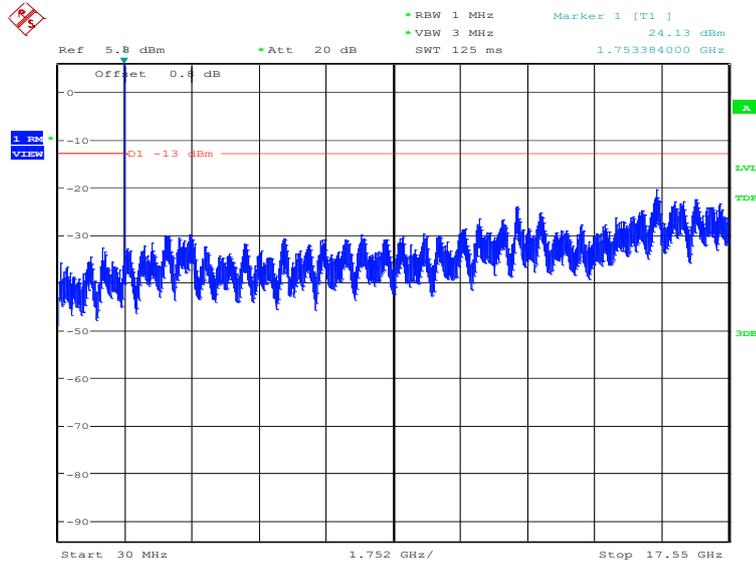

Date: 11.AUG.2022 11:13:50

Note: Expanded measurement uncertainty is  $U = 0.622 \text{ dB}$ ,  $k = 2$ .

## **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

### **WCDMA Band II-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	3.53

### **WCDMA Band II-16QAM**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	4.84

### **WCDMA Band IV-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.17


### **WCDMA Band IV-16QAM**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	4.46

Note: Expanded measurement uncertainty is  $U = 0.578$  dB,  $k = 2$ .

## Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2021-09-29 through 2022-09-30 <i>Effective Dates</i>	 <hr/>  <i>For the National Voluntary Laboratory Accreditation Program</i>

\*\*\*END OF REPORT\*\*\*