

Prüfbericht-Nr.: <i>Test Report No.:</i>	16070602 001	Auftrags-Nr.: <i>Order No.:</i>	174030253	Seite 1 von 37 Page 1 of 37
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	352690	Auftragsdatum: <i>Order date.:</i>	04 Jan 2015	
Auftraggeber: <i>Client:</i>	Seikaku Technical Group Limited Offshore Chambers, P. O. Box 217 Apia, Samoa			
Prüfgegenstand: <i>Test item:</i>	UHF Wireless System			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	U-899P, TMW U-100BP, U-299P			
Auftrags-Inhalt: <i>Order content:</i>	TUV Rheinland - EMC service			
Prüfgrundlage: <i>Test specification:</i>	TIA/EIA-603-D-2010 FCC 47 CFR Part 74.861, Subpart H: 2013			
Wareneingangsdatum: <i>Date of receipt:</i>	04 Jan 2015			
Prüfmuster-Nr.: <i>Test sample No.:</i>	174030253-002			
Prüfzeitraum: <i>Testing period:</i>	Refer to test report			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Guangdong) Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Guangdong) Ltd. EMC Laboratory			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
				
31 Mar 2016 Storm Shu / Assistant Project Manager		31 Mar 2016 Max Y. C. Yao / Department Manager		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1 CONDUCTED OUTPUT POWER

RESULT: Pass

5.2 SPURIOUS RADIATION MEASUREMENT (TX)

RESULT: Pass

5.3 MODULATION CHARACTERISTICS MEASUREMENT

RESULT: Pass

5.4 OCCUPIED BANDWIDTH

RESULT: Pass

5.5 FREQUENCY TOLERANCE

RESULT: Pass

5.6 EMISSION MASK

RESULT: Pass

5.7 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1.	GENERAL REMARKS.....	5
1.1.	COMPLEMENTARY MATERIALS	5
2.	TEST SITES.....	5
2.1.	TEST FACILITIES.....	5
2.2.	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3.	TRACE ABILITY.....	6
2.4.	CALIBRATION.....	6
2.5.	ABBREVIATIONS	6
2.6.	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1.	PRODUCT FUNCTION AND INTENDED USE	8
3.2.	RATING AND PHYSICAL CHARACTERISTICS.....	8
3.3.	NOISE GENERATING OR SOURCES OF INTERFERENCE	8
3.4.	NOISE SUPPRESSING PARTS	8
3.5.	SUBMITTED DOCUMENTS.....	8
4.	TEST SET-UP AND OPERATION MODES.....	9
4.1.	TEST METHODOLOGY.....	9
4.2.	INDEPENDENT AND TEST OPERATION MODES	9
4.3.	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4.	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5.	TEST SETUP	10
5.	TEST RESULTS EMISSION	12
5.1.	CONDUCTED OUTPUT POWER	12
5.2.	SPURIOUS RADIATION MEASUREMENT.....	14
5.3.	MODULATION CHARACTERISTICS MEASUREMENT.....	26
5.4.	OCCUPIED BANDWIDTH.....	28
5.5.	FREQUENCY TOLERANCE	29
5.6.	EMISSION MASK	30
5.7.	ELECTROMAGNETIC FIELDS.....	35
6.	PHOTOGRAPHS OF TEST SETUP	36

Prüfbericht - Nr.: 16070602 001
Test Report No.

Seite 4 von 38
Page 4 of 38

7.	LIST OF TABLES	37
8.	LIST OF FIGURES	37
9.	LIST OF PICTURES	38

1. General Remarks

1.1. Complementary Materials

All attachments are integral parts of this test report.

2. Test Sites

2.1. Test Facilities

TÜV Rheinland(Guangdong) Ltd. EMC Laboratory.
 No.102, 1F of Southwest and No.205, 2F of West Warehouse Building, No.767 Tianyuan Road, Tianhe District, Guangzhou, Guangdong, P.R.China

2.2. List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	16.Mar.2016	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	16.Mar.2016	1 year
Trilog-Broadband Antenna	VULB9168 (30MHz-1GHz)	SCHWARZBECK MESSELEKTRONIK	209	16.Mar.2016	2 years
Double-Ridged Waveguide Horn Antenna	HF906 (1-18GHz)	Rohde & Schwarz	100385	16.Mar.2016	2 years
Pre-amplifier	AFS42-00101800-25-S-42	MITEQ	1101599	16.Mar.2016	2 years
Band Reject Filter	BRM50702	Micro-Tronics	023	16.Mar.2016	2 years
Standard Gain Horn Antenna	3160-09 (18-26.5GHz)	EMCO	21642	16.Mar.2016	5 years
Pre-amplifier	AFS33-18002650-30-8P-44	MITEQ	1108282	16.Mar.2016	2 years
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Mar.2016	1 year
Loop Antenna	HFH2-Z2 (<30MHz)	Rohde & Schwarz	100111	16.Mar.2016	2 years
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	16.Mar.2016	1 year

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
Two-Line V-Network	ESH3-Z5	Rohde & Schwarz	100308	16.Mar.2016	1 year
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100701	16.Mar.2016	1 year
Trilog-Broadband Antenna	VULB9168 (30MHz-1GHz)	SCHWARZBECK MESSELEKTRONIK	210	16.Mar.2016	2 years
Double-Ridged Waveguide Horn Antenna	HF906 (1-18GHz)	Rohde & Schwarz	100407	16.Mar.2016	2 years
Signal Generator	SMR27 (10M-27GHz)	Rohde & Schwarz	100125	16.Mar.2016	1 years

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

2.3. Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4. Calibration

All equipment requiring calibration is calibrated periodically by the manufacturer or accredited calibration services according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5. Abbreviations

PASS means 'complied with requirement'	N/A means 'not applicable'
FAIL means 'not complied'	N.C.R. means 'no calibration required'

2.6. Measurement Uncertainty

Table 2: Measurement Uncertainty

Testing Item	Frequency Range	Uncertainty
Conducted Emission (Mains port)	0.09MHz - 30MHz	2.26 dB
Radiated Emission (966 Chamber: 3m)	0.09MHz - 30MHz	4.42 dB
Radiated Emission (966 Chamber: 3m)	30MHz – 1000MHz	5.16 dB
Radiated Emission (966 Chamber: 3m)	Above 1000MHz	2.22 dB

Note:

The uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. General Product Information

3.1. Product Function and Intended Use

The tested sample is a "**UHF Wireless Microphone**" with model number as shown in the cover page of test report for new approval.

The tested sample has microphone input function.

U-899P, TMW U-100BP and U-299P are same except the model names and appearance, therefore the all tests were performed on U-899P only.

3.2. Rating and Physical Characteristics

Product name:	Wireless Microphone
Model name:	U-899P, TMW U-100BP, U-299P
Rating:	3Vdc
Frequency range:	470 ~ 494MHz
	494 ~ 518MHz
	518 ~ 542MHz
	542 ~ 566MHz
Channel numbers:	320
Bandwidth:	200kHz
Modulation:	FM
Antenna:	Integral
Temperature	-10 ~ +60 °C

3.3. Noise Generating or Sources of Interference

- 1) IC circuits

3.4. Noise Suppressing Parts

Please refer to Attachment Photo Documentation for details.

3.5. Submitted Documents

- 1) Circuit diagram
- 2) Block diagram
- 3) User manual
- 4) PCB Layout
- 5) BOM List

4. Test Set-up and Operation Modes

4.1. Test Methodology

The test methodology used is based on the requirement of 47 CFR PART 15, section 15.31, 15.33, 15.35, 15.107 and 15.109, or of ICES-003.

The test methods, which have been used, are based on ANSI C63.10 or CAN/CSA-CEI/IEC CISPR 22.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2. Independent and Test Operation Modes

The basic operation mode is:

- A. Transmitter mode
1. Low CH
 2. Middle CH
 3. High CH

4.3. Special Accessories and Auxiliary Equipment

The EUT was tested as an independent unit with the following equipment:

Description	Manufacturer	Model No.	S/N	Certification
N/A	N/A	N/A	N/A	N/A

4.4. Countermeasures to achieve EMC compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5. Test Setup

The test setup was realized on a table of 80cm height during all the tests.
The test arrangement is configured and set according to manufacturer's installations.

Diagram 1 of Configuration for testing other test items

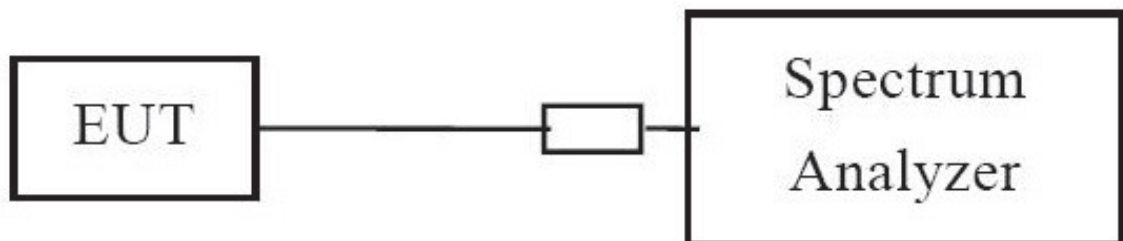


Diagram 2 of Measurement Equipment Configuration for Testing Radiated Emission

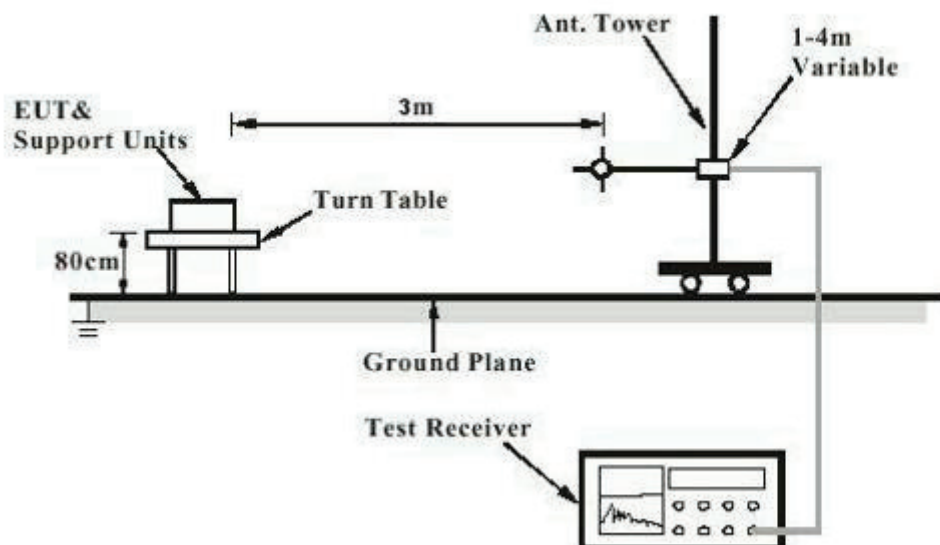
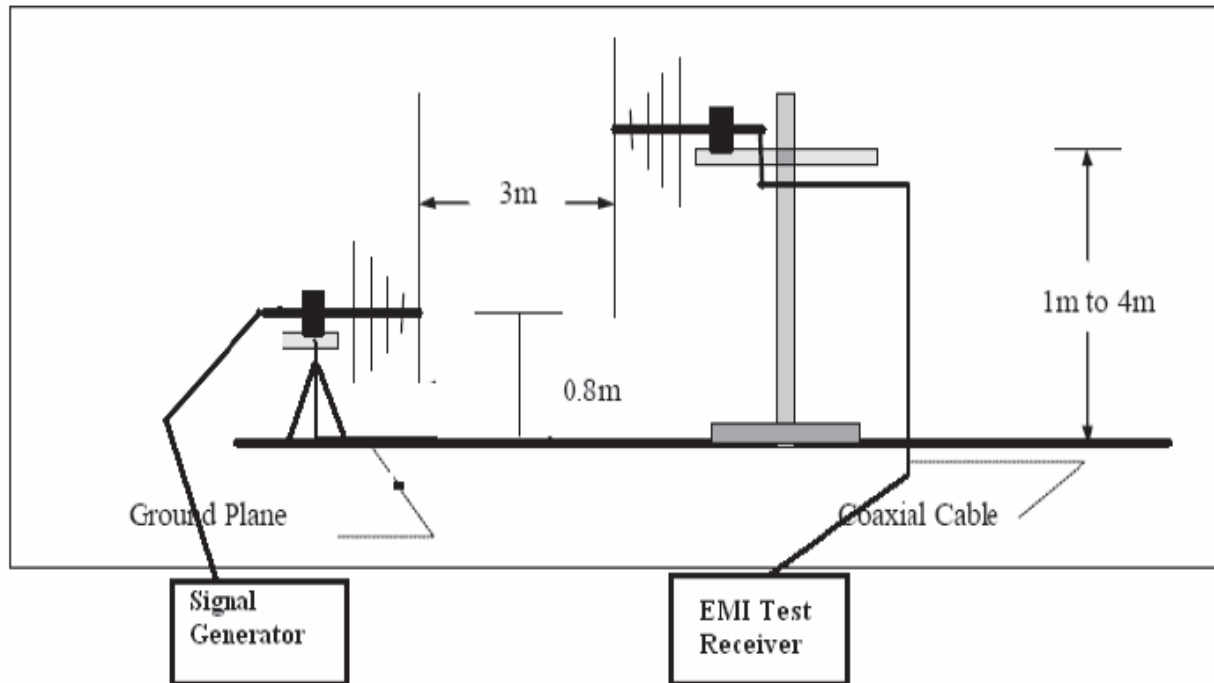


Diagram 3 of Measurement Equipment Configuration for Substitution Method



5. Test Results EMISSION

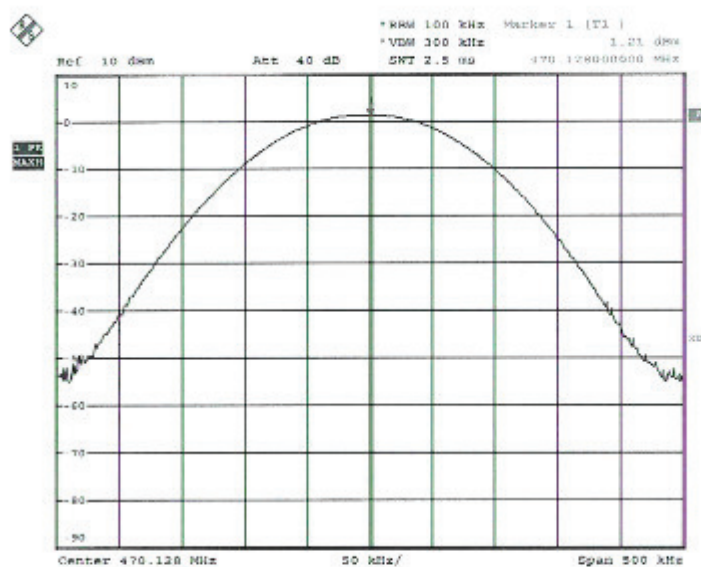
5.1. Conducted Output Power

RESULT:
PASS

Date of testing	:	28 Jan 2016
Test specification	:	FCC Part 2 Per Section 2.1046(a)
Guide	:	ANSI/TIA-603-D-2010, clause 2.2.1
Limits	:	FCC Part 74 Per Section 74.861(e)(1)
Kind of test site	:	3m Anechoic Chamber
Operation mode	:	Transmitting (unmodulated)
Temperature	:	23°C
Humidity	:	50%
Limit	:	174-216MHz: 50mW (17dBm)
		470-608MHz: 250mW (17dBm)
		614-806MHz: 250mW (24dBm)

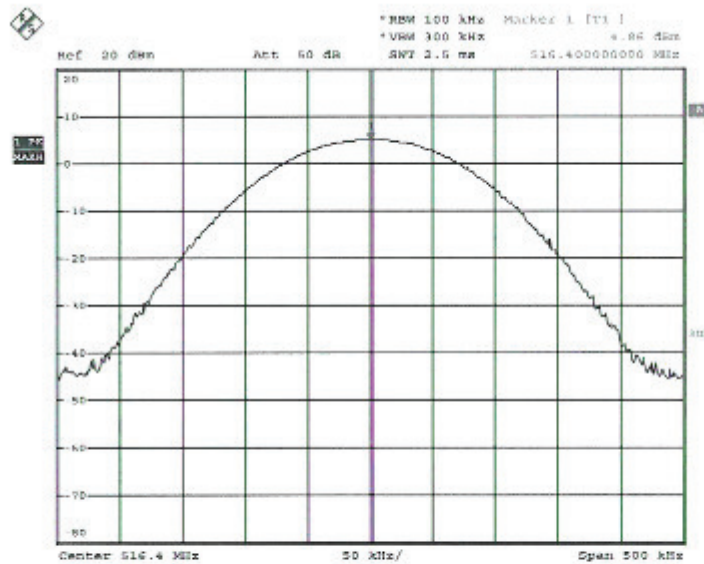
Figure 1: Conducted Output Power

Low CH (470.125MHz):



Date: 28.JAN.2016 02:38:59

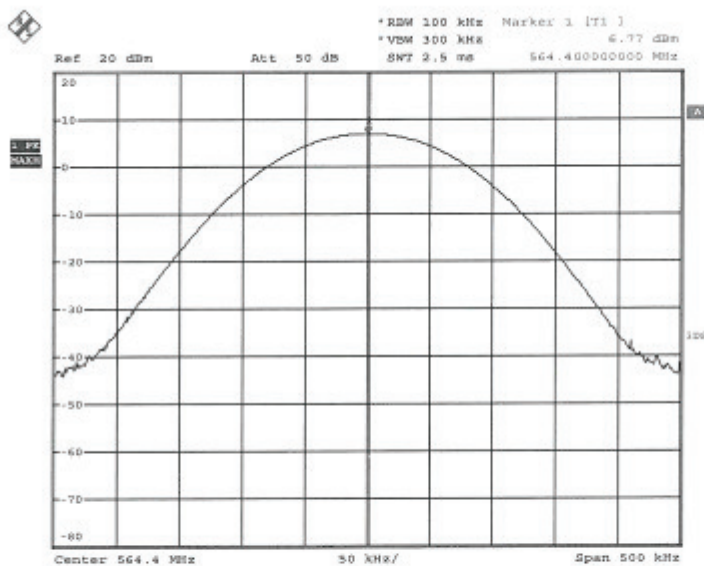
U-899P peak power L

Middle CH (516.4MHz):


Date: 28.JAN.2016 05:04:48



U-899P peak power M


High CH (564.4MHz):


Date: 28.JAN.2016 02:46:49

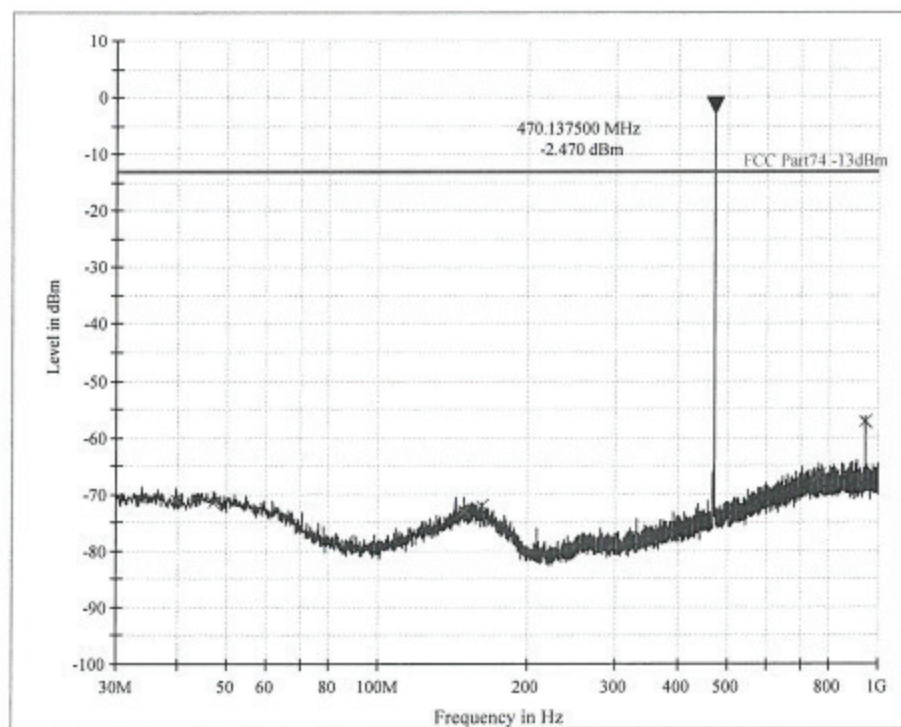
U-899P peak power H

5.2. Spurious Radiation Measurement

RESULT:
PASS

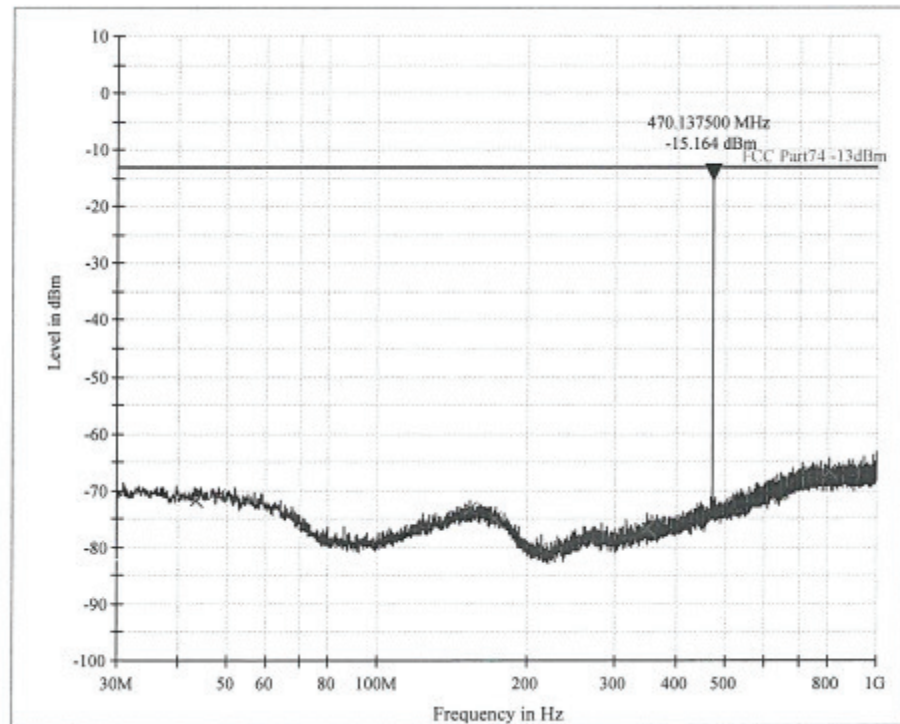
Date of testing : 16 Sep 2015 & 18 Sep 2015
 Test specification : FCC Part 2 Per Section 2.1053(a) and 2.1057
 Guide : ANSI/TIA-603-D-2010, clause 2.2.12
 Limits : FCC Part 74 Per Section 74.861(e)(6)(iii)
 Kind of test site : 3m Full-Anechoic Chamber
 Operation mode : Transmitting (unmodulated)
 Temperature : 23°C
 Humidity : 50%

Figure 2: TX Spurious Radiation, 30 – 1000 MHz, Vertical (U-899P, Low CH)

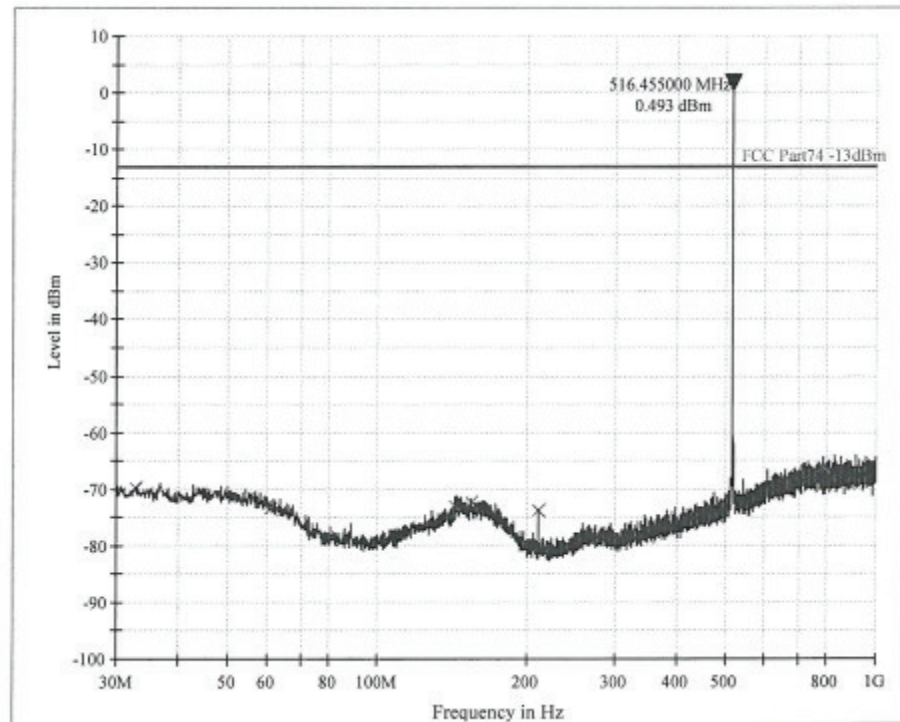


Limit and Margin PK

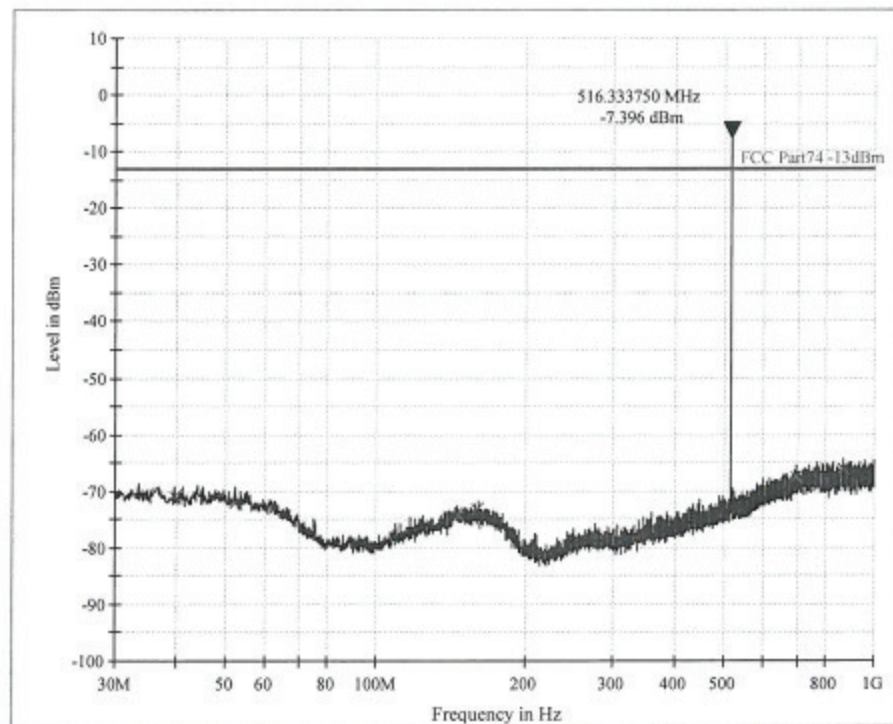
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
39.720000	-71.0	1000.0	100.000	V	-75.2	58.0	-13.0	
47.220000	-71.5	1000.0	100.000	V	-74.9	58.5	-13.0	
148.920000	-73.0	1000.0	100.000	V	-77.9	60.0	-13.0	
161.820000	-72.0	1000.0	100.000	V	-77.5	59.0	-13.0	
760.260000	-66.5	1000.0	100.000	V	-70.9	53.5	-13.0	
940.320000	-57.3	1000.0	100.000	V	-70.6	44.3	-13.0	

Figure 3: TX Spurious Radiation, 30 – 1000 MHz, Horizontal (U-899P, Low CH)

Limit and Margin PK

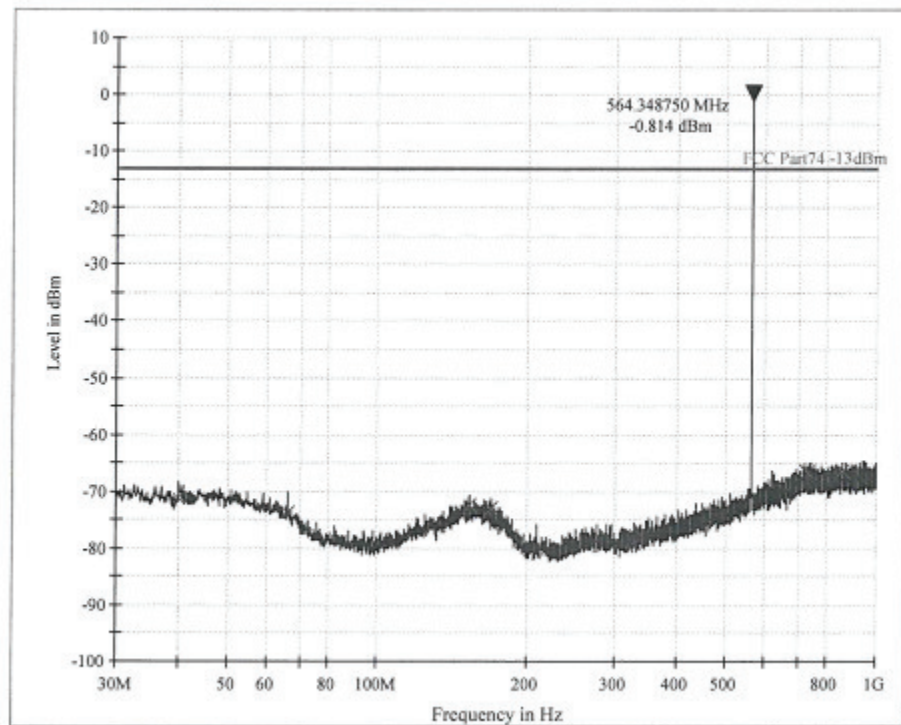
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
43.440000	-71.8	1000.0	100.000	H	-74.9	58.8	-13.0	
48.300000	-70.9	1000.0	100.000	H	-75.0	57.9	-13.0	
153.660000	-73.2	1000.0	100.000	H	-77.6	60.2	-13.0	
171.480000	-75.0	1000.0	100.000	H	-78.1	62.0	-13.0	
349.620000	-76.8	1000.0	100.000	H	-80.2	63.8	-13.0	
804.540000	-66.6	1000.0	100.000	H	-70.9	53.6	-13.0	

Figure 4: TX Spurious Radiation, 30 – 1000 MHz, Vertical (U-899P, Middle CH)

Limit and Margin PK

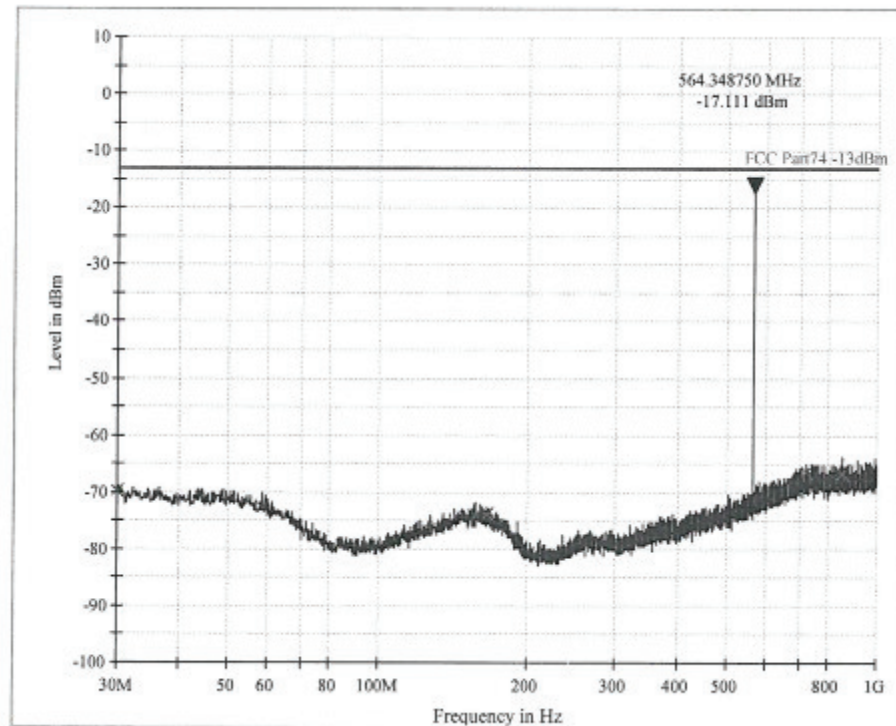
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
32.760000	-69.7	1000.0	100.000	V	-74.5	56.7	-13.0	
61.020000	-73.4	1000.0	100.000	V	-76.9	60.4	-13.0	
144.000000	-72.8	1000.0	100.000	V	-78.3	59.8	-13.0	
155.280000	-72.4	1000.0	100.000	V	-77.6	59.4	-13.0	
210.660000	-73.8	1000.0	100.000	V	-84.2	60.8	-13.0	
787.440000	-66.2	1000.0	100.000	V	-70.9	53.2	-13.0	

Figure 5: TX Spurious Radiation, 30 – 1000 MHz, Horizontal (U-899P, Middle CH)

Limit and Margin PK

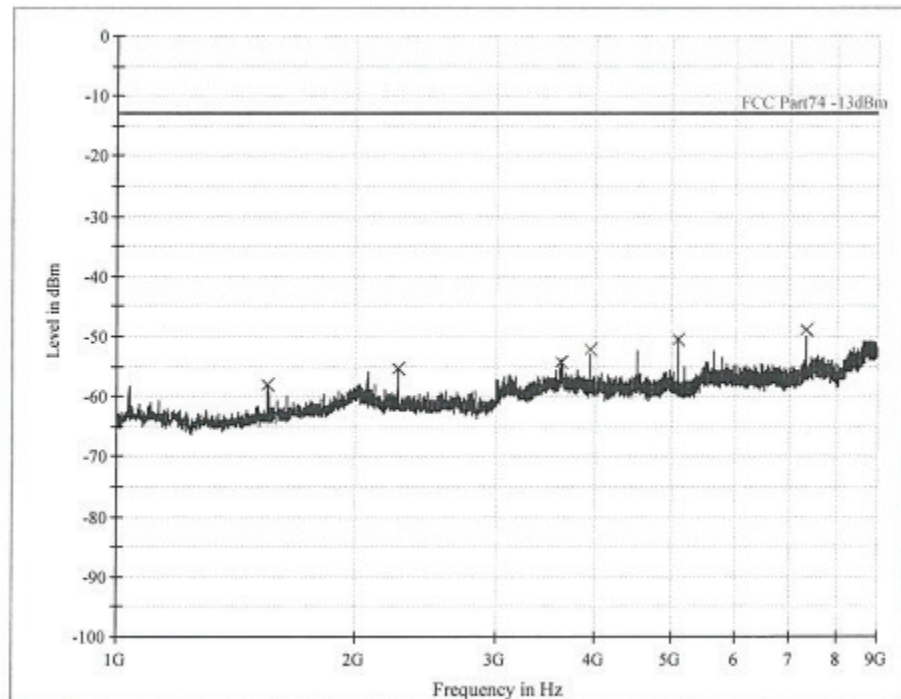
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
39.600000	-71.0	1000.0	100.000	H	-75.2	58.0	-13.0	
52.440000	-72.2	1000.0	100.000	H	-75.4	59.2	-13.0	
146.520000	-74.5	1000.0	100.000	H	-78.1	61.5	-13.0	
159.960000	-73.2	1000.0	100.000	H	-77.4	60.2	-13.0	
697.620000	-67.6	1000.0	100.000	H	-71.6	54.6	-13.0	
864.780000	-66.2	1000.0	100.000	H	-70.7	53.2	-13.0	

Figure 6: TX Spurious Radiation, 30 – 1000 MHz, Vertical (U-899P, High CH)

Limit and Margin PK

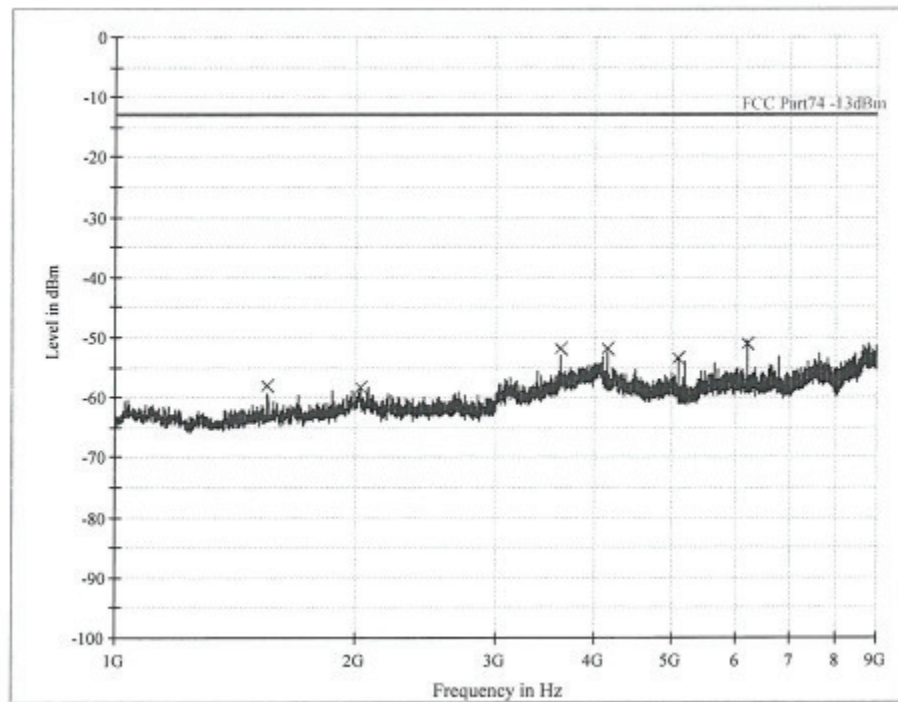
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
40.080000	-71.2	1000.0	100.000	V	-75.3	58.2	-13.0	
66.000000	-73.9	1000.0	100.000	V	-78.3	60.9	-13.0	
153.060000	-72.5	1000.0	100.000	V	-77.6	59.5	-13.0	
169.920000	-72.8	1000.0	100.000	V	-77.9	59.8	-13.0	
723.060000	-66.1	1000.0	100.000	V	-71.0	53.1	-13.0	
862.980000	-66.5	1000.0	100.000	V	-70.7	53.5	-13.0	

Figure 7: TX Spurious Radiation, 30 – 1000 MHz, Horizontal (U-899P, High CH)

Limit and Margin PK

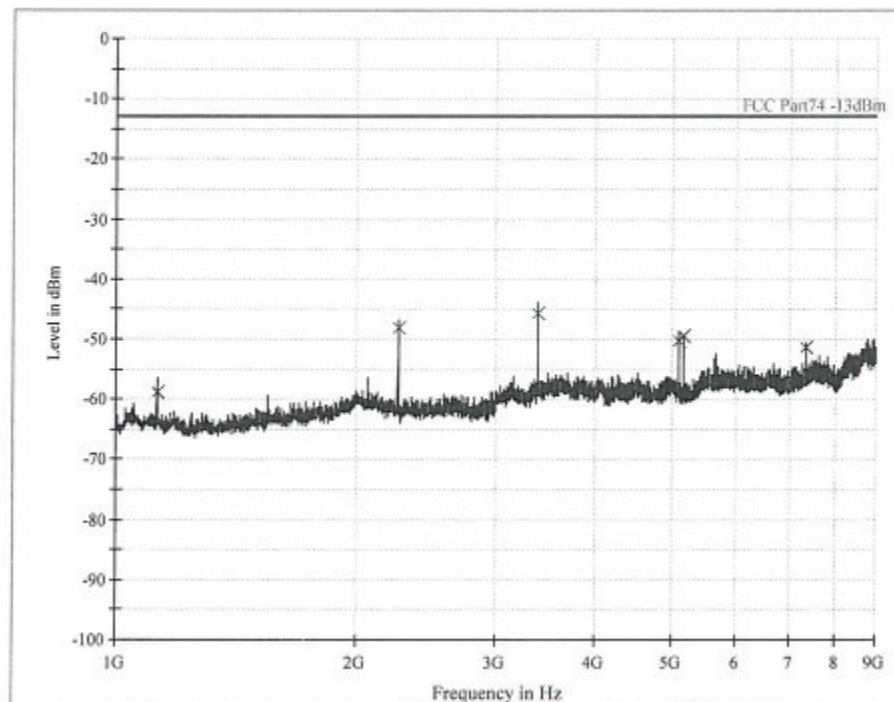
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
30.000000	-69.9	1000.0	100.000	H	-74.6	56.9	-13.0	
58.620000	-72.5	1000.0	100.000	H	-76.4	59.5	-13.0	
156.600000	-73.9	1000.0	100.000	H	-77.5	60.9	-13.0	
166.140000	-73.8	1000.0	100.000	H	-77.7	60.8	-13.0	
722.700000	-66.5	1000.0	100.000	H	-71.0	53.5	-13.0	
854.880000	-66.8	1000.0	100.000	H	-70.7	53.8	-13.0	

Figure 8: TX Spurious Radiation, Above 1GHz, Vertical (U-899P, Low CH)

Limit and Margin PK

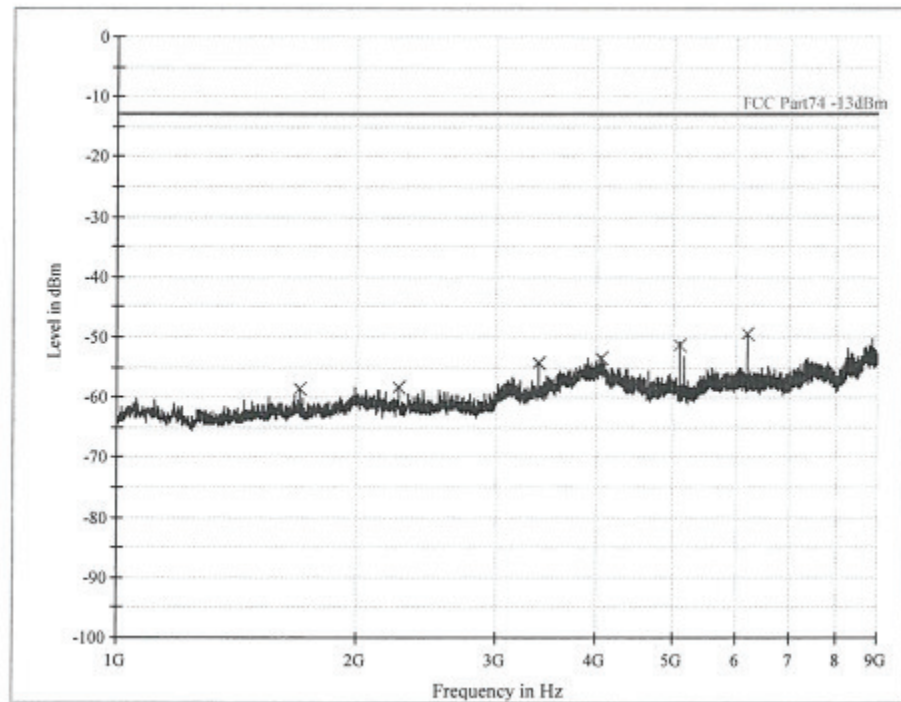
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1554.000000	-58.0	1000.0	1000.000	V	-114.6	45.0	-13.0	
2258.000000	-55.3	1000.0	1000.000	V	-112.7	42.3	-13.0	
3626.000000	-54.3	1000.0	1000.000	V	-109.4	41.3	-13.0	
3951.000000	-52.2	1000.0	1000.000	V	-110.2	39.2	-13.0	
5080.000000	-50.5	1000.0	1000.000	V	-108.4	37.5	-13.0	
7337.000000	-49.0	1000.0	1000.000	V	-104.2	36.0	-13.0	

Figure 9: TX Spurious Radiation, Above 1GHz, Horizontal (U-899P, Low CH)

Limit and Margin PK

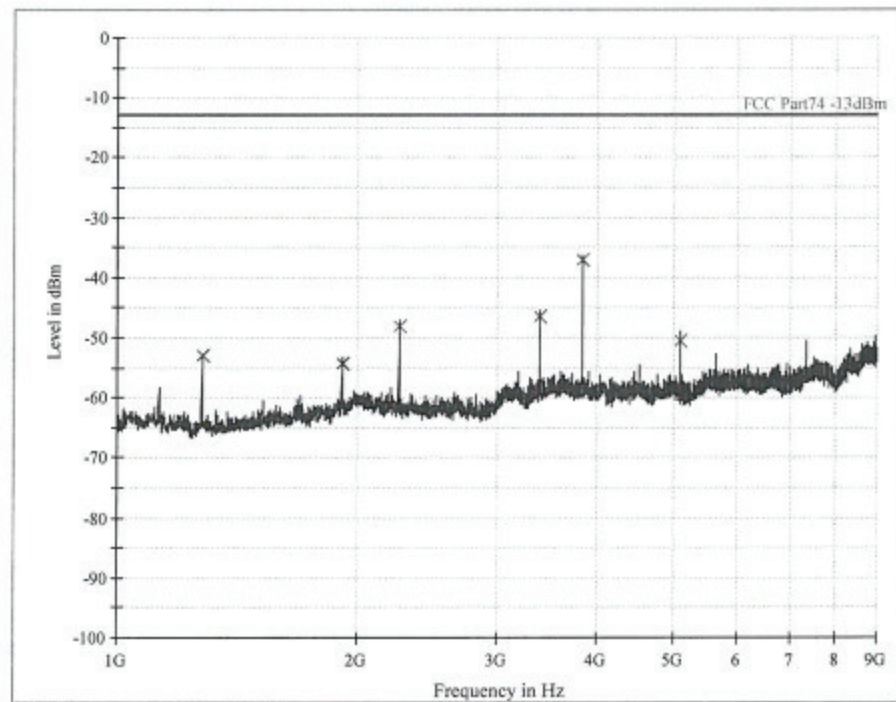
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1554.000000	-58.1	1000.0	1000.000	H	-114.2	45.1	-13.0	
2024.000000	-58.3	1000.0	1000.000	H	-112.0	45.3	-13.0	
3627.000000	-52.0	1000.0	1000.000	H	-109.1	39.0	-13.0	
4145.000000	-51.9	1000.0	1000.000	H	-107.5	38.9	-13.0	
5080.000000	-53.6	1000.0	1000.000	H	-108.7	40.6	-13.0	
6209.000000	-51.0	1000.0	1000.000	H	-107.4	38.0	-13.0	

Figure 10: TX Spurious Radiation, Above 1GHz, Vertical (U-899P, Middle CH)

Limit and Margin PK

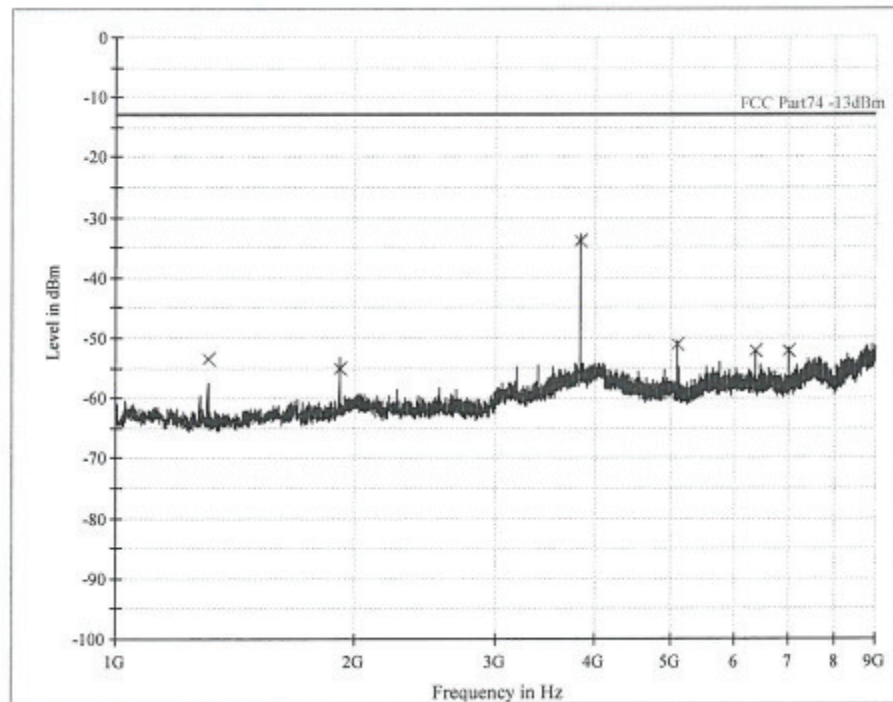
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1128.000000	-58.8	1000.0	1000.000	V	-115.0	45.8	-13.0	
2258.000000	-48.1	1000.0	1000.000	V	-112.7	35.1	-13.0	
3386.000000	-45.8	1000.0	1000.000	V	-109.6	32.8	-13.0	
5079.000000	-50.4	1000.0	1000.000	V	-108.4	37.4	-13.0	
5164.000000	-49.5	1000.0	1000.000	V	-108.0	36.5	-13.0	
7338.000000	-51.3	1000.0	1000.000	V	-104.2	38.3	-13.0	

Figure 11: TX Spurious Radiation, Above 1GHz, Horizontal (U-899P, Middle CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1693.000000	-58.6	1000.0	1000.000	H	-113.7	45.6	-13.0	
2257.000000	-58.5	1000.0	1000.000	H	-113.1	45.5	-13.0	
3386.000000	-54.3	1000.0	1000.000	H	-110.0	41.3	-13.0	
4053.000000	-53.5	1000.0	1000.000	H	-107.1	40.5	-13.0	
5080.000000	-51.4	1000.0	1000.000	H	-108.7	38.4	-13.0	
6197.000000	-49.4	1000.0	1000.000	H	-107.4	36.4	-13.0	

Figure 13: TX Spurious Radiation, Above 1GHz, Vertical (U-899P, High CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1276.000000	-53.0	1000.0	1000.000	V	-115.4	40.0	-13.0	
1915.000000	-54.2	1000.0	1000.000	V	-112.5	41.2	-13.0	
2258.000000	-48.2	1000.0	1000.000	V	-112.7	35.2	-13.0	
3386.000000	-46.5	1000.0	1000.000	V	-109.6	33.5	-13.0	
3828.000000	-37.0	1000.0	1000.000	V	-109.5	24.0	-13.0	
5079.000000	-50.6	1000.0	1000.000	V	-108.4	37.6	-13.0	

Figure 13: TX Spurious Radiation, Above 1GHz, Horizontal (U-899P, High CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1306.000000	-53.5	1000.0	1000.000	H	-114.8	40.5	-13.0	
1915.000000	-55.0	1000.0	1000.000	H	-112.9	42.0	-13.0	
3828.000000	-33.9	1000.0	1000.000	H	-107.7	20.9	-13.0	
5080.000000	-51.2	1000.0	1000.000	H	-108.7	38.2	-13.0	
6382.000000	-52.2	1000.0	1000.000	H	-106.9	39.2	-13.0	
7020.000000	-52.3	1000.0	1000.000	H	-106.5	39.3	-13.0	

5.3. Modulation Characteristics measurement

RESULT:
PASS

Date of testing : 01 Feb 2016
 Test specification : FCC Part 2 Per Section 2.1047(a) and (b)
 Guide : ANSI/TIA-603-D-2010, clause 2.2.3
 Limits : FCC Part 74 Per Section 74.861(e)(3)
 FCC Part 2 Per Section 2.1047(a) and (b)
 Operation mode : Transmitting
 Temperature : 20°C
 Humidity : 51%

Figure 14: Modulation Characteristics measurement (U-899P)
Modulation Limiting

Frequency (Hz)	Deviation (kHz)	Frequency (Hz)	Deviation (kHz)
100	7.7	4000	10.9
200	8.2	5000	12.9
300	8.5	6000	13.7
400	8.6	7000	14.6
500	8.5	8000	15.3
600	8.6	9000	16.1
700	8.6	10000	16.5
800	8.7	12000	16.9
900	8.8	13000	16.4
1000	9.2	14000	15.1
1500	9.4	15000	13.1
2000	9.9	16000	10.9
3000	10.9	17000	8.8

Modulation (dB)		-20	-10	0	5	15	20
400Hz	kHz	8.1	14.1	24.7	32.3	47.7	53.2
600Hz	kHz	8.2	14.4	25.3	32.1	46.5	52.1
2kHz	kHz	9.4	16.5	28.9	36.8	46.7	49.3
5kHz	kHz	12.2	21.5	36.2	43.8	56.5	59.3
9kHz	kHz	16.2	26.8	43.4	49.8	67.9	68.3
12kHz	kHz	16.1	28.1	43.5	49.8	55.5	55.7
14kHz	kHz	14.3	25.1	38.5	42.5	46.5	46.7

Maximum Deviation

Maximum Deviation	Limit
71kHz	75kHz

Audio Frequency Response

Modulation Frequency (Hz)	Input Level (mV)	Audio Frequency Response (dB)
100	22.75	1.08
300	21.91	0.75
500	21.51	0.59
700	21.10	0.43
1000	20.09	0
1500	17.90	-1.0
2000	13.58	-2.02
2500	15.92	-3.40
3500	11.37	-4.94
5000	8.72	-7.25

5.4. Occupied Bandwidth

RESULT:
PASS

Date of testing : 01 Feb 2016
 Test specification : FCC Part 2 Per Section 2.1049(c)1
 Guide : ANSI/TIA-603-D-2010, clause 2.2.11
 Limits : FCC Part 74 Per Section 74.861(e)(3),
 74.861(e)(5) and 74.861(e)(6)
 Operation mode : Transmitting (modulated)
 Temperature : 22°C
 Humidity : 54%

Figure 15: Occupied Bandwidth (U-899P)

Occupied Bandwidth

Equipment under test: *u-899P*
 Ambient temperature: *22*
 Relative humidity: *54*
 Result: *pass*
 Remark: *RBW=300Hz VBW=1kHz*

Channel	Frequency (GHz)	Test Result (kHz)
<i>H</i>	<i>564.4 MHz</i>	<i>80</i>
<i>M</i>	<i>516.4 MHz</i>	<i>75</i>
<i>L</i>	<i>470.125 MHz</i>	<i>80</i>

5.5. Frequency tolerance

RESULT:
PASS

Date of testing : 01 Feb 2016
 Test specification : FCC Part 2 Per Section 2.1055
 Guide : ANSI/TIA-603-C-2004, clause 2.2.2
 Limits : FCC Part 74 Per Section 74.861(e)(4)
 Operation mode : Transmitting (unmodulated)
 Temperature : -30°C to 60°C
 Humidity : 51%

Figure 16: Frequency tolerance (U-899P)
U-899P
The Frequency Tolerance (temperature)

Test condition	Power supply	Low Frequency (MHz)	Middle Frequency (MHz)	High Frequency (MHz)
		(470.175)	(516.4)	(564.4)
-30°C	DC 3.0V	470.124912	516.3926	564.3908
-20°C	DC 3.0V	470.124960	516.3932	564.3932
-10°C	DC 3.0V	470.124988	516.3964	564.3944
0°C	DC 3.0V	470.124988	516.3988	564.3966
10°C	DC 3.0V	470.125002	516.4002	564.3998
20°C	DC 3.0V	470.12512	516.4002	564.4001
30°C	DC 3.0V	470.12524	516.4032	564.4012
40°C	DC 3.0V	470.12532	516.4044	564.4016
50°C	DC 3.0V	470.1254	516.4068	564.4028
60°C	DC 3.0V	470.12548	516.4054	564.4038
Frequency Error:		0.00054	0.0074	0.0092
Frequency tolerance:		0.0011%	0.0014%	0.0016%
Frequency Tolerance Limit:		0.005%		

U-899P
Table 1: The measurement of Frequency Tolerance (supply voltage)

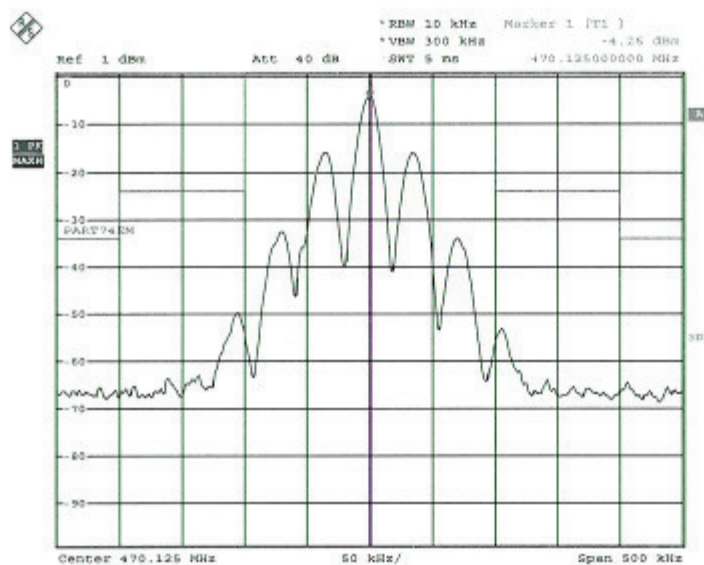
Temperature (°C)	Power supply	Low Frequency (MHz)	Middle Frequency (MHz)	High Frequency (MHz)
		(470.175)	(516.4)	(564.4)
20	DC3.3	470.12556	564.4014	564.4058
20	DC3.0	470.12532	564.4012	564.4008
20	DC2.7	470.12514	564.4044	564.4032
Frequency Error:		0.00056	0.0064	0.0058
Frequency tolerance:		0.0011%	0.0012%	0.001%
Frequency Tolerance Limit:		0.005%		

5.6. Emission Mask

RESULT:
PASS

Date of testing : 29 Jan 2016 & 15 Feb 2016
 Test specification : FCC Part 2 Per Section 2.1053(a) and 2.1057
 Guide : ANSI/TIA-603-C-2004, clause 2.2.12
 Limits : FCC Part 74 Per Section 74.861(e)(6)(7)
 Operation mode : Transmitting (modulated)
 Temperature : 20°C
 Humidity : 51%

Figure 17: Emission Mask (U-899P, Low CH)



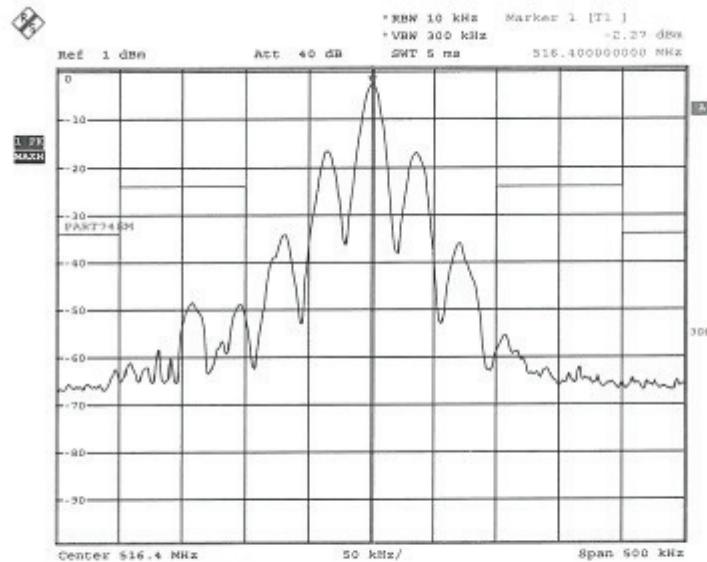
Date: 29.JAN.2016 04:21:25



U-899P Emission mask (With 2.5KHz modulating) L



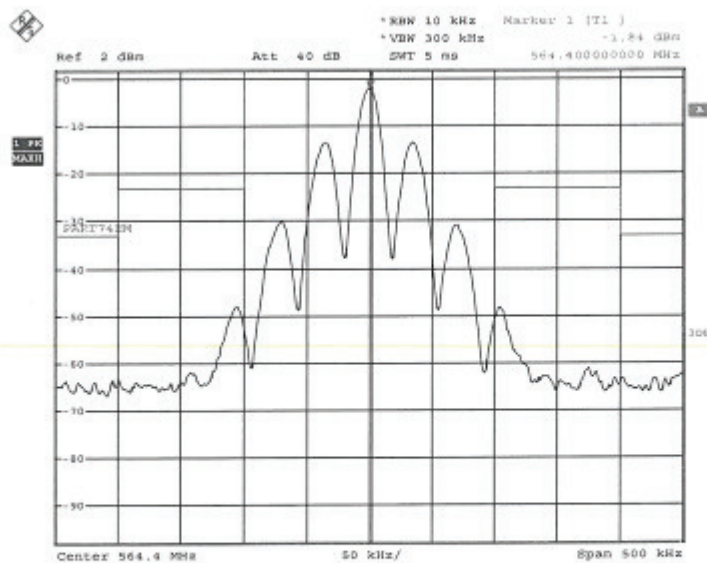
Figure 18: Emission Mask (U-899P, Middle CH)



Date: 28.JAN.2016 04:58:12

U-899P Emission mask (With 2.5KHz modulating) M

Figure 19: Emission Mask (U-899P, High CH)



Date: 29.JAN.2016 05:29:46

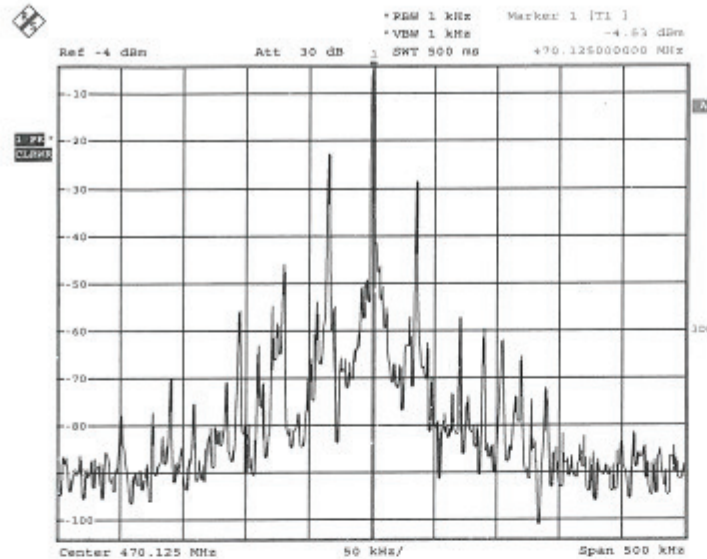
U-899P Emission mask (With 2.5KHz modulating) H



Test Data

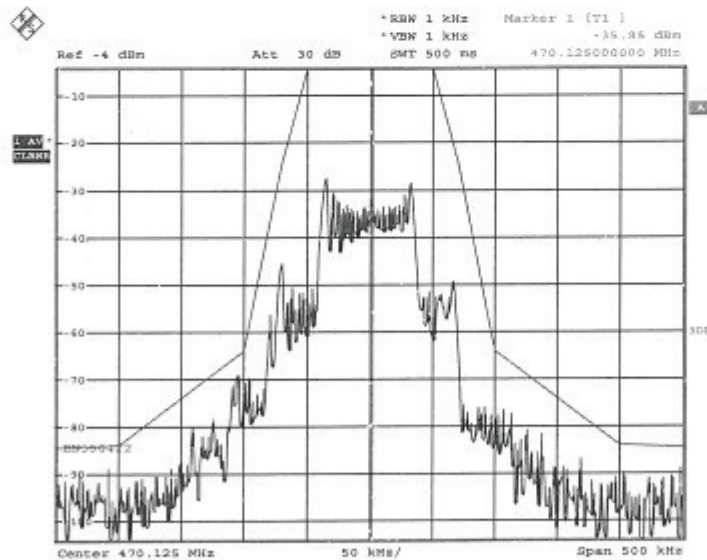


Figure 20: Emission Mask in ETSI EN300 422-1 V1.4.2 (U-899P, Low CH)



Date: 27.JAN.2016 01:01:00

U-899P Necessary bandwidth Low without Modulating (470.125MHz)



Date: 27.JAN.2016 01:01:52

U-899P Necessary bandwidth Low with Modulating (470.125MHz)


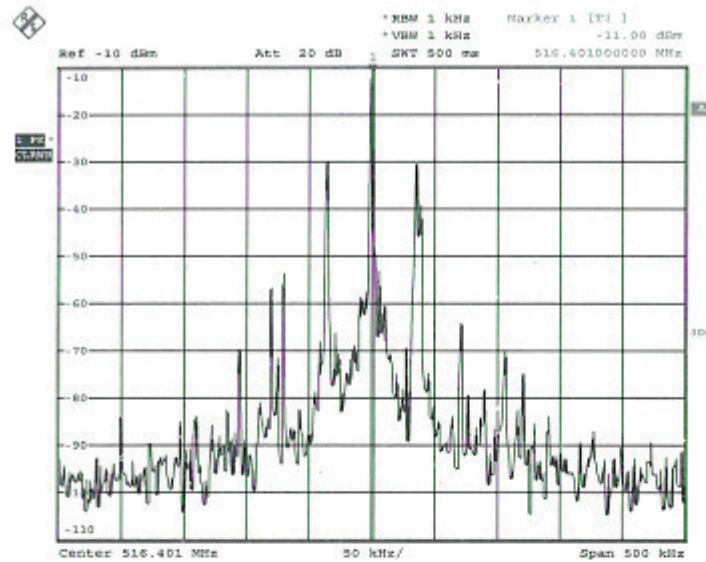
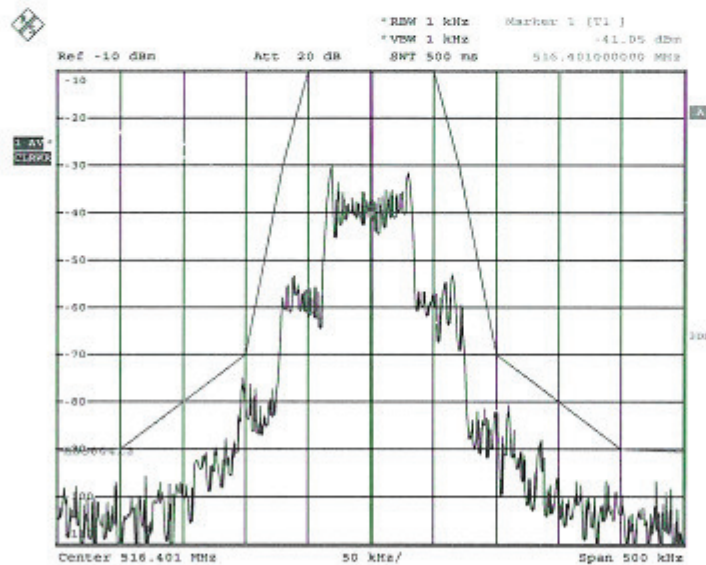


Figure 21: Emission Mask in ETSI EN300 422-1 V1.4.2 (U-899P, Middle CH)



Date: 27.JAN.2016 04:38:15

U-899P Necessary bandwidth Middle without Modulating (516.4MHz)



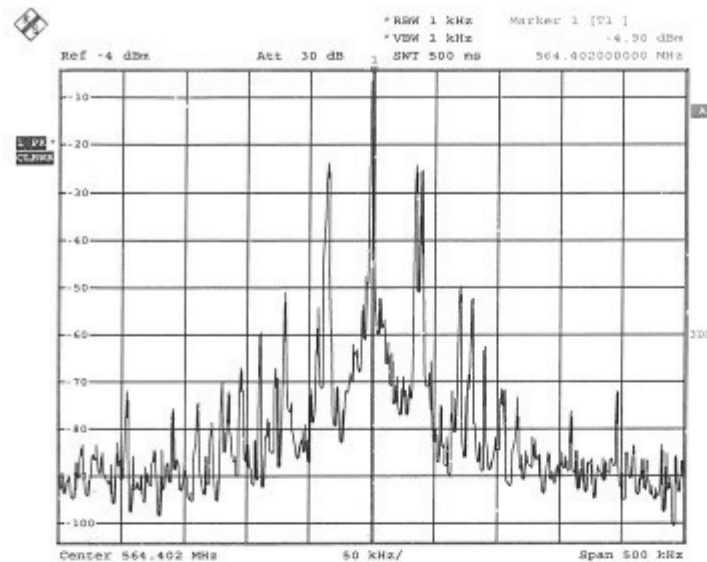
Date: 27.JAN.2016 04:39:02

U-899P Necessary bandwidth Middle with Modulating (516.4MHz)

Sign-off Test Data

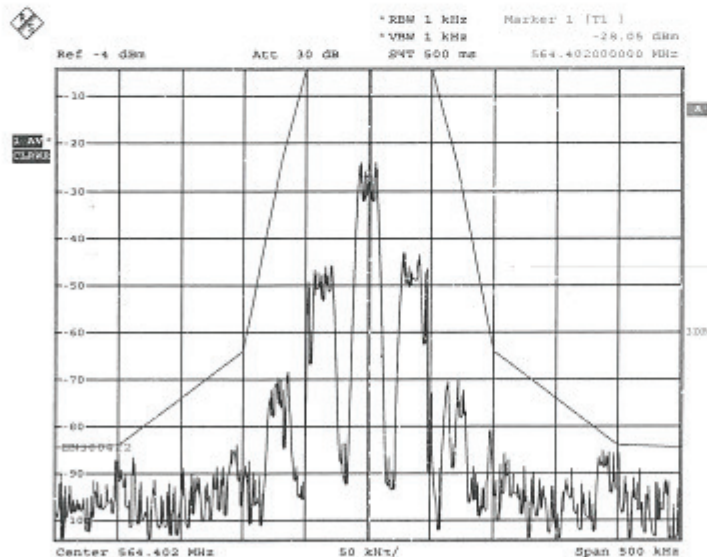


Figure 22: Emission Mask in ETSI EN300 422-1 V1.4.2 (U-899P, High CH)



Date: 26.JAN.2016 08:11:22

U-899P Necessary bandwidth High without Modulating (564.4MHz)



Date: 26.JAN.2016 08:12:55

U-899P Necessary bandwidth High with Modulating (564.4MHz)



Sign-off Test Data



5.7. Electromagnetic Fields

RESULT:	PASS
----------------	-------------

Date of testing	:	28 Jan 2016
Guide	:	FCC KDB Publication 447498

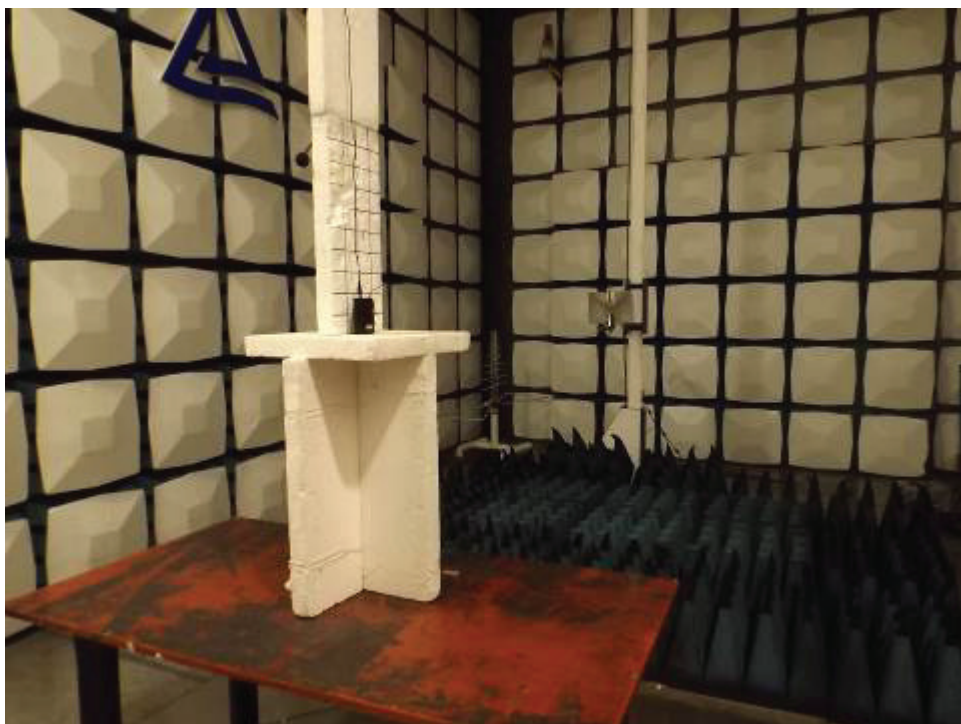
The minimum distance for the EUT is <5mm, since maximum peak output power of the transmitter is 4.75mW(6.77dBm)<22mW, hence the EUTs are excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure. Guidance v06.

6. Photographs of Test Setup

Picture 1: Spurious Radiation Measurement, 30MHz-1GHz (U-899P)



Picture 2: Spurious Radiation Measurement, Above 1GHz (U-899P)



7. List of Tables

TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....	5
TABLE 2: MEASUREMENT UNCERTAINTY.....	7

8. List of Figures

FIGURE 1: CONDUCTED OUTPUT POWER	12
FIGURE 2: TX SPURIOUS RADIATION, 30 – 1000 MHz, HORIZONTAL (U-899P, Low CH)	14
FIGURE 3: TX SPURIOUS RADIATION, 30 – 1000 MHz, VERTICAL (U-899P, Low CH).....	15
FIGURE 4: TX SPURIOUS RADIATION, 30 – 1000 MHz, HORIZONTAL (U-899P, MIDDLE CH) .	16
FIGURE 5: TX SPURIOUS RADIATION, 30 – 1000 MHz, VERTICAL (U-899P, MIDDLE CH)	17
FIGURE 6: TX SPURIOUS RADIATION, 30 – 1000 MHz, HORIZONTAL (U-899P, HIGH CH)	18
FIGURE 7: TX SPURIOUS RADIATION, 30 – 1000 MHz, VERTICAL (U-899P, HIGH CH)	19
FIGURE 8: TX SPURIOUS RADIATION, ABOVE 1GHz, HORIZONTAL (U-899P, Low CH).....	20
FIGURE 9: TX SPURIOUS RADIATION, ABOVE 1GHz, VERTICAL (U-899P, Low CH).....	21
FIGURE 10: TX SPURIOUS RADIATION, ABOVE 1GHz, HORIZONTAL (U-899P, MIDDLE CH) ..	22
FIGURE 11: TX SPURIOUS RADIATION, ABOVE 1GHz, VERTICAL (U-899P, MIDDLE CH)	23
FIGURE 12: TX SPURIOUS RADIATION, ABOVE 1GHz, HORIZONTAL (U-899P, HIGH CH).....	24
FIGURE 13: TX SPURIOUS RADIATION, ABOVE 1GHz, VERTICAL (U-899P, HIGH CH).....	24
FIGURE 14: MODULATION CHARACTERISTICS MEASUREMENT (U-899P).....	26
FIGURE 15: OCCUPIED BANDWIDTH (U-899P).....	28
FIGURE 16: FREQUENCY TOLERANCE (U-899P)	29
FIGURE 17: EMISSION MASK (U-899P, Low CH)	30
FIGURE 18: EMISSION MASK (U-899P, MIDDLE CH).....	31
FIGURE 19: EMISSION MASK (U-899P, HIGH CH).....	31

FIGURE 20: EMISSION MASK IN ETSI EN300 422-1 V1.4.2 (U-899P, Low CH).....	30
FIGURE 21: EMISSION MASK IN ETSI EN300 422-1 V1.4.2 (U-899P, MIDDLE CH).....	31
FIGURE 22: EMISSION MASK IN ETSI EN300 422-1 V1.4.2 (U-899P, HIGH CH)	32

9. List of Pictures

PICTURE 1: SPURIOUS RADIATION MEASUREMENT, 30MHz-1GHz (U-899P).....	36
PICTURE 2: SPURIOUS RADIATION MEASUREMENT, ABOVE 1GHz (U-899P).....	36