

2


Hardware Installation

The following diagrams provide you a basic installation for your PC11B2 (MS-6828), which is suitable for most desktop PCs. For more information about the PCI slot, please refer to the user's manual of your mainboard.

- Step 1.** Remove the computer cover. Locate the available PCI slot on your mainboard.


NOTE: Turn off your system and disconnect the power cable before installing the PC11B2 (MS-6828).

PCI slot

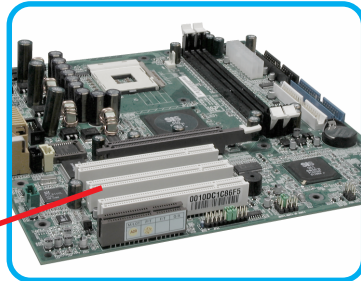

- Step 2.** Put the PC11B2 (MS-6828) directly over the PCI slot and press it into the slot firmly.

Do not hold the PC11B2 (MS-6828) on the golden finger while installing; doing this may cause interference or damage.

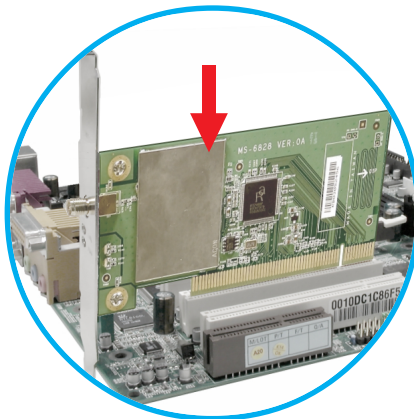


Step 3. Replace the computer cover after securing the PC11B2 (MS-6828) with a bracket screw.

Step 4. Connect the external antenna to the connector on the PC11B2's (MS-6828) bracket.



*Connecting the
external antenna*

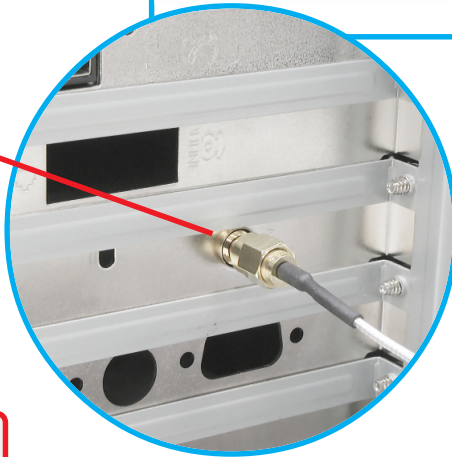

*If your are not skilled at
installing the PCI adapter,
please ask the vendor or
an experienced technician
for help.*