

# TEST REPORT

**Applicant:** GSM GLOBE.COM INC  
**Address of Applicant:** 8212 NW 30 TERRACE, DORAL, Florida 33122, United States  
**Manufacturer/Factory:** Z-TECH COMMUNICATION(SZ)CO LTD  
**Address of** 7/F BLK D BAO'AN ZHI'GU YIN'TIAN RD. NO.4 XI'XIANG ST'  
**Manufacturer/Factory:** BAO'AN SZ CN  
**Equipment Under Test (EUT)**  
Product Name: MOBILE PHONES  
Model No.: F11  
Trade mark: GOL  
**FCC ID:** 2AEJAF11  
**Applicable standards:** FCC CFR Title 47 Part 2  
FCC CFR Title 47 Part 22 Subpart H  
FCC CFR Title 47 Part 24 Subpart E  
**Date of sample receipt:** August 18, 2020  
**Date of Test:** August 18-28, 2020  
**Date of report issued:** August 28, 2020  
**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 1 Version

| Version No. | Date            | Description |
|-------------|-----------------|-------------|
| 00          | August 28, 2020 | Original    |
|             |                 |             |
|             |                 |             |
|             |                 |             |
|             |                 |             |

Prepared By:



Project Engineer

Date:

August 28, 2020

Check By:



Reviewer

Date:

August 28, 2020

## 2 Contents

Page

|          |                                                       |           |
|----------|-------------------------------------------------------|-----------|
| <b>1</b> | <b>VERSION .....</b>                                  | <b>2</b>  |
| <b>2</b> | <b>CONTENTS .....</b>                                 | <b>3</b>  |
| <b>3</b> | <b>TEST SUMMARY .....</b>                             | <b>4</b>  |
| <b>4</b> | <b>GENERAL INFORMATION .....</b>                      | <b>5</b>  |
| 4.1      | GENERAL DESCRIPTION OF EUT .....                      | 5         |
| 4.2      | RELATED SUBMITTAL(S) / GRANT (S) .....                | 7         |
| 4.3      | TEST METHODOLOGY.....                                 | 7         |
| 4.4      | DEVIATION FROM STANDARDS .....                        | 7         |
| 4.5      | ABNORMALITIES FROM STANDARD CONDITIONS.....           | 7         |
| 4.6      | TEST FACILITY .....                                   | 7         |
| 4.7      | TEST LOCATION.....                                    | 7         |
| <b>5</b> | <b>TEST INSTRUMENTS LIST .....</b>                    | <b>8</b>  |
| <b>6</b> | <b>SYSTEM TEST CONFIGURATION .....</b>                | <b>9</b>  |
| 6.1      | TEST MODE .....                                       | 9         |
| 6.2      | CONFIGURATION OF TESTED SYSTEM .....                  | 9         |
| 6.3      | CONDUCTED AVERAGE OUTPUT POWER AND ERP/EIRP .....     | 10        |
| 6.4      | PEAK-TO-AVERAGE RATIO .....                           | 13        |
| 6.5      | OCCUPY BANDWIDTH.....                                 | 15        |
| 6.6      | MODULATION CHARACTERISTIC.....                        | 23        |
| 6.7      | OUT OF BAND EMISSION AT ANTENNA TERMINALS.....        | 23        |
| 6.8      | FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT..... | 33        |
| 6.9      | FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT..... | 39        |
| 6.10     | FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT .....    | 43        |
| <b>7</b> | <b>TEST SETUP PHOTO .....</b>                         | <b>46</b> |
| <b>8</b> | <b>EUT CONSTRUCTIONAL DETAILS .....</b>               | <b>46</b> |

### 3 Test Summary

| Test Item                               | Section in CFR 47                                  | Result                                |
|-----------------------------------------|----------------------------------------------------|---------------------------------------|
| RF Exposure (SAR)                       | Part 1.1307<br>Part 2.1093                         | Pass*<br>(Please refer to SAR Report) |
| RF Output Power                         | Part 2.1046<br>Part 22.913(a)<br>Part 24.232(c)    | Pass                                  |
| Peak-to-Average Ratio                   | Part 2.1046<br>Part 22.913(d)<br>Part 24.232(d)    | Pass                                  |
| Modulation Characteristics              | Part 2.1047                                        | Pass                                  |
| 99% Occupied Bandwidth & 26dB Bandwidth | Part 2.1049<br>Part 22.917(b)<br>Part 24.238(b)    | Pass                                  |
| Spurious Emissions at Antenna Terminal  | Part 2.1051<br>Part 22.917<br>Part 24.238          | Pass                                  |
| Field Strength of Spurious Radiation    | Part 2.1053<br>Part 22.917<br>Part 24.238          | Pass                                  |
| Out of band emission, Band Edge         | Part 2.1051<br>Part 22.917<br>Part 24.238          | Pass                                  |
| ERP and EIRP                            | Part 22.913(a)<br>Part 24.232(b)                   | Pass                                  |
| Frequency stability vs. temperature     | Part 2.1055(a)(1)(b)<br>Part 22.355<br>Part 24.235 | Pass                                  |
| Frequency stability vs. voltage         | Part 2.1055(d)(1)(2)<br>Part 22.355<br>Part 24.235 | Pass                                  |

*Pass: The EUT complies with the essential requirements in the standard.*

## 4 General Information

### 4.1 General Description of EUT

|                    |                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:      | MOBILE PHONES                                                                                                                              |
| Model No.:         | F11                                                                                                                                        |
| Test sample(s) ID: | GTS202008000140-1                                                                                                                          |
| Sample(s) Status:  | Engineer sample                                                                                                                            |
| Serial No.:        | JY200721000036                                                                                                                             |
| Hardware Version:  | Y891_MB_V2                                                                                                                                 |
| Software Version:  | GOL_F11_V03                                                                                                                                |
| Support Networks:  | GSM, GPRS, WCDMA                                                                                                                           |
| Support Bands:     | GSM850, PCS1900, WCDMA Band V, WCDMA Band II                                                                                               |
| TX Frequency:      | GSM850: 824.20MHz-848.80MHz<br>PCS1900: 1850.20MHz-1909.80MHz<br>WCDMA Band V: 826.40MHz-846.60MHz<br>WCDMA Band II: 1852.40MHz-1907.60MHz |
| Modulation type:   | GSM/GPRS: GMSK<br>WCDMA Band II/V: QPSK                                                                                                    |
| Antenna type:      | PIFA antenna                                                                                                                               |
| Antenna gain:      | GSM850:-4.03dBi<br>PCS1900:1.31dBi<br>WCDMA Band V: -4.03dBi<br>WCDMA Band II: 1.31dBi                                                     |
| Power supply:      | Adaptor<br>Model: F10<br>Input: AC 100-240V, 50/60Hz, 0.15A<br>Output: DC 5.0V, 1Amp<br>Or<br>Battery: DC 3.8V, 3000mAh                    |

**Operation Frequency List:**

| GSM 850 |                 | PCS1900 |                 | WCDMA Band V |                 | WCDMA Band II |                 |
|---------|-----------------|---------|-----------------|--------------|-----------------|---------------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel      | Frequency (MHz) | Channel       | Frequency (MHz) |
| 128     | 824.20          | 512     | 1850.20         | 4132         | 826.40          | 9262          | 1852.40         |
| 129     | 824.40          | 513     | 1850.40         | 4133         | 826.60          | 9263          | 1852.60         |
| · ∴     | · ∴             | · ∴     | · ∴             | · ∴          | · ∴             | · ∴           | · ∴             |
| 189     | 836.40          | 660     | 1879.80         | 4181         | 836.20          | 9399          | 1879.80         |
| 190     | 836.60          | 661     | 1880.00         | 4182         | 836.40          | 9400          | 1880.00         |
| 191     | 836.80          | 662     | 1880.20         | 4183         | 836.60          | 9401          | 1880.20         |
| · ∴     | · ∴             | · ∴     | · ∴             | · ∴          | · ∴             | · ∴           | · ∴             |
| 250     | 848.60          | 809     | 1909.60         | 4232         | 846.40          | 9537          | 1907.40         |
| 251     | 848.80          | 810     | 1909.80         | 4233         | 846.60          | 9538          | 1907.60         |

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

**Final test channel:**

| GSM 850 |                 | PCS1900 |                 | WCDMA Band V |                 | WCDMA Band II |                 |
|---------|-----------------|---------|-----------------|--------------|-----------------|---------------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel      | Frequency (MHz) | Channel       | Frequency (MHz) |
| 128     | 824.20          | 512     | 1850.20         | 4132         | 826.40          | 9262          | 1852.40         |
| 190     | 836.60          | 661     | 1880.00         | 4183         | 836.60          | 9400          | 1880.00         |
| 251     | 848.80          | 810     | 1909.80         | 4233         | 846.60          | 9538          | 1907.60         |

## 4.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

## 4.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on ANSI C63.26:2015 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

## 4.4 Deviation from Standards

None.

## 4.5 Abnormalities from Standard Conditions

None.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 4.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 5 Test Instruments list

| Radiated Emission: |                                     |                                |                             |               |                     |                         |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                      | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | July. 02 2020       | July. 01 2025           |
| 2                  | Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                   | Rohde & Schwarz                | ESU26                       | GTS203        | June. 25 2020       | June. 24 2021           |
| 4                  | BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | June. 25 2020       | June. 24 2021           |
| 5                  | Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D                 | GTS208        | June. 25 2020       | June. 24 2021           |
| 6                  | Horn Antenna                        | ETS-LINDGREN                   | 3160                        | GTS217        | June. 25 2020       | June. 24 2021           |
| 7                  | EMI Test Software                   | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 8                  | Coaxial Cable                       | GTS                            | N/A                         | GTS213        | June. 25 2020       | June. 24 2021           |
| 9                  | Coaxial Cable                       | GTS                            | N/A                         | GTS211        | June. 25 2020       | June. 24 2021           |
| 10                 | Coaxial cable                       | GTS                            | N/A                         | GTS210        | June. 25 2020       | June. 24 2021           |
| 11                 | Coaxial Cable                       | GTS                            | N/A                         | GTS212        | June. 25 2020       | June. 24 2021           |
| 12                 | Amplifier(100kHz-3GHz)              | HP                             | 8347A                       | GTS204        | June. 25 2020       | June. 24 2021           |
| 13                 | Amplifier(2GHz-20GHz)               | HP                             | 84722A                      | GTS206        | June. 25 2020       | June. 24 2021           |
| 14                 | Amplifier (18-26GHz)                | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June. 25 2020       | June. 24 2021           |
| 15                 | Band filter                         | Amindeon                       | 82346                       | GTS219        | June. 25 2020       | June. 24 2021           |
| 16                 | Power Meter                         | Anritsu                        | ML2495A                     | GTS540        | June. 25 2020       | June. 24 2021           |
| 17                 | Power Sensor                        | Anritsu                        | MA2411B                     | GTS541        | June. 25 2020       | June. 24 2021           |
| 18                 | Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                      | GTS575        | June. 25 2020       | June. 24 2021           |
| 19                 | Splitter                            | Agilent                        | 11636B                      | GTS237        | June. 25 2020       | June. 24 2021           |
| 20                 | Loop Antenna                        | ZHINAN                         | ZN30900A                    | GTS534        | June. 25 2020       | June. 24 2021           |
| 21                 | Breitband hornantenne               | SCHWARZBECK                    | BBHA 9170                   | GTS579        | Oct. 19 2019        | Oct. 18 2020            |
| 22                 | Amplifier                           | TDK                            | PA-02-02                    | GTS574        | Oct. 19 2019        | Oct. 18 2020            |
| 23                 | Amplifier                           | TDK                            | PA-02-03                    | GTS576        | Oct. 19 2019        | Oct. 18 2020            |
| 24                 | PSA Series Spectrum Analyzer        | Rohde & Schwarz                | FSP                         | GTS578        | June. 25 2020       | June. 24 2021           |

| General used equipment: |                                 |              |           |               |                     |                         |
|-------------------------|---------------------------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item                    | Test Equipment                  | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                       | Humidity/ Temperature Indicator | KTJ          | TA328     | GTS243        | June. 25 2020       | June. 24 2021           |
| 2                       | Barometer                       | ChangChun    | DYM3      | GTS255        | June. 25 2020       | June. 24 2021           |




## 6 System test configuration

### 6.1 Test mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

| Test modes   |                     |                     |
|--------------|---------------------|---------------------|
| Band         | Radiated            | Conducted           |
| GSM 850      | ■ GSM link          | ■ GSM link          |
|              | ■ GPRS 1 link       | ■ GPRS 1 link       |
| PCS 1900     | ■ GSM link          | ■ GSM link          |
|              | ■ GPRS 1 link       | ■ GPRS 1 link       |
| WCDMA II     | ■ RMC 12.2Kbps link | ■ RMC 12.2Kbps link |
| WCDMA Band V | ■ RMC 12.2Kbps link | ■ RMC 12.2Kbps link |

### 6.2 Configuration of Tested System

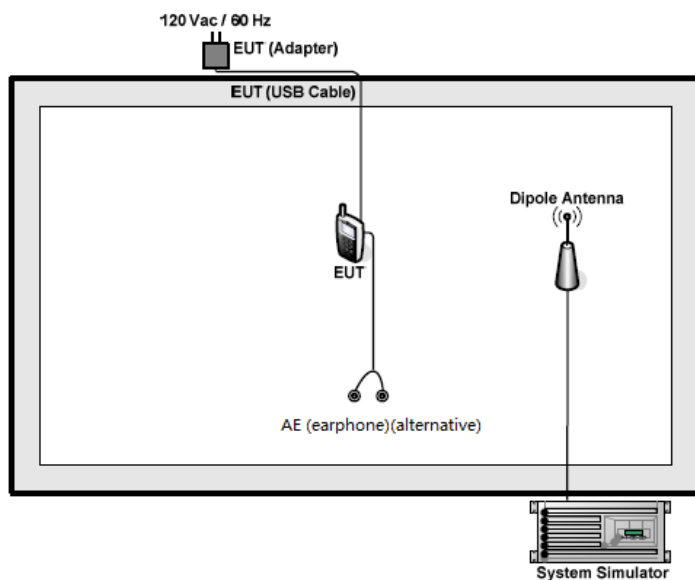

## 6.3 Conducted Average Output Power and ERP/EIRP
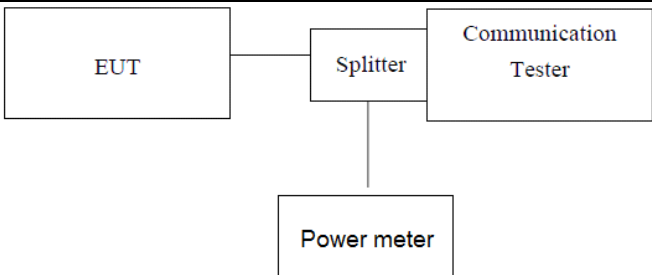
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.913(a) and FCC part 24.232(c)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Method:      | FCC part2.1046                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Limit:            | GSM850, WCDMA Band V: 7W(38.45dBm)<br>PCS1900, WCDMA Band II: 2W(33dBm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test setup:       |  <p><i>Note: Measurement setup for testing on Antenna connector</i></p>                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The transmitter output port was connected to base station.</li> <li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.</li> <li>3. Set EUT at maximum power through base station.</li> <li>4. Select lowest, middle, and highest channels for each band and different modulation.</li> <li>5. Measure the maximum burst power.</li> <li>6. EIRP=measured power+ antenna gain<br/>ERP=EIRP-2.15</li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Measurement Data


| Conducted Power (dBm)  |        |        |        |         |         |         |
|------------------------|--------|--------|--------|---------|---------|---------|
| Band                   | GSM850 |        |        | PCS1900 |         |         |
| Channel                | 128    | 190    | 251    | 512     | 661     | 810     |
| Frequency              | 824.20 | 836.60 | 848.80 | 1850.20 | 1880.00 | 1909.80 |
| GSM (GMSK, 1 TX slot)  | 32.51  | 32.38  | 32.13  | 30.16   | 29.75   | 29.61   |
| GPRS (GMSK, 1 TX slot) | 32.57  | 32.47  | 32.20  | 30.23   | 29.75   | 29.62   |
| GPRS (GMSK, 2 TX slot) | 32.13  | 32.03  | 31.70  | 29.82   | 29.11   | 28.85   |
| GPRS (GMSK, 3 TX slot) | 30.88  | 30.72  | 30.37  | 28.71   | 27.62   | 27.10   |
| GPRS (GMSK, 4 TX slot) | 29.87  | 29.73  | 29.35  | 27.79   | 26.52   | 26.98   |

| Conducted Power (dBm) |               |        |        |              |       |       |
|-----------------------|---------------|--------|--------|--------------|-------|-------|
| Band                  | WCDMA Band II |        |        | WCDMA Band V |       |       |
| Channel               | 9262          | 9400   | 9538   | 4132         | 4183  | 4233  |
| Frequency             | 1852.4        | 1880.0 | 1907.6 | 826.4        | 836.6 | 846.6 |
| RMC 12.2Kbps          | 23.93         | 23.83  | 24.48  | 24.31        | 24.27 | 24.30 |
| HSDPA Subtest-1       | 23.71         | 23.68  | 23.65  | 23.83        | 23.82 | 23.71 |
| HSDPA Subtest-2       | 23.72         | 23.69  | 23.64  | 23.76        | 23.74 | 23.68 |
| HSDPA Subtest-3       | 23.69         | 23.67  | 23.65  | 23.75        | 23.68 | 23.65 |
| HSDPA Subtest-4       | 23.68         | 23.66  | 23.65  | 23.78        | 23.72 | 23.69 |
| HSUPA Subtest-1       | 23.96         | 23.93  | 23.89  | 23.84        | 23.90 | 23.83 |
| HSUPA Subtest-2       | 23.95         | 23.90  | 23.89  | 23.85        | 23.86 | 23.83 |
| HSUPA Subtest-3       | 23.94         | 23.92  | 23.91  | 23.89        | 23.90 | 23.86 |
| HSUPA Subtest-4       | 23.97         | 23.95  | 23.91  | 23.87        | 23.86 | 23.85 |
| HSUPA Subtest-5       | 23.96         | 23.92  | 23.90  | 23.88        | 23.87 | 23.89 |
| AMR                   | 23.84         | 23.83  | 23.82  | 23.86        | 23.85 | 23.84 |

| ERP/EIRP Power (dBm)   |        |        |        |         |         |         |
|------------------------|--------|--------|--------|---------|---------|---------|
| Band                   | GSM850 |        |        | PCS1900 |         |         |
| Channel                | 128    | 190    | 251    | 512     | 661     | 810     |
| Frequency              | 824.20 | 836.60 | 848.80 | 1850.20 | 1880.00 | 1909.80 |
| GSM (GMSK, 1 TX slot)  | 26.33  | 26.20  | 25.95  | 31.47   | 31.06   | 30.92   |
| GPRS (GMSK, 1 TX slot) | 26.39  | 26.29  | 26.02  | 31.54   | 31.06   | 30.93   |
| GPRS (GMSK, 2 TX slot) | 25.95  | 25.85  | 25.52  | 31.13   | 30.42   | 30.16   |
| GPRS (GMSK, 3 TX slot) | 24.70  | 24.54  | 24.19  | 30.02   | 28.93   | 28.41   |
| GPRS (GMSK, 4 TX slot) | 23.69  | 23.55  | 23.17  | 29.10   | 27.83   | 28.29   |

| ERP/EIRP Power (dBm) |               |        |        |              |       |       |
|----------------------|---------------|--------|--------|--------------|-------|-------|
| Band                 | WCDMA Band II |        |        | WCDMA Band V |       |       |
| Channel              | 9262          | 9400   | 9538   | 4132         | 4183  | 4233  |
| Frequency            | 1852.4        | 1880.0 | 1907.6 | 826.4        | 836.6 | 846.6 |
| RMC 12.2Kbps         | 25.24         | 25.14  | 25.79  | 18.13        | 18.09 | 18.12 |
| HSDPA Subtest-1      | 25.02         | 24.99  | 24.96  | 17.65        | 17.64 | 17.53 |
| HSDPA Subtest-2      | 25.03         | 25.00  | 24.95  | 17.58        | 17.56 | 17.50 |
| HSDPA Subtest-3      | 25.00         | 24.98  | 24.96  | 17.57        | 17.50 | 17.47 |
| HSDPA Subtest-4      | 24.99         | 24.97  | 24.96  | 17.60        | 17.54 | 17.51 |
| HSUPA Subtest-1      | 25.27         | 25.24  | 25.20  | 17.66        | 17.72 | 17.65 |
| HSUPA Subtest-2      | 25.26         | 25.21  | 25.20  | 17.67        | 17.68 | 17.65 |
| HSUPA Subtest-3      | 25.25         | 25.23  | 25.22  | 17.71        | 17.72 | 17.68 |
| HSUPA Subtest-4      | 25.28         | 25.26  | 25.22  | 17.69        | 17.68 | 17.67 |
| HSUPA Subtest-5      | 25.27         | 25.23  | 25.21  | 17.70        | 17.69 | 17.71 |
| AMR                  | 25.15         | 25.14  | 25.13  | 17.68        | 17.67 | 17.66 |


## 6.4 Peak-to-Average Ratio
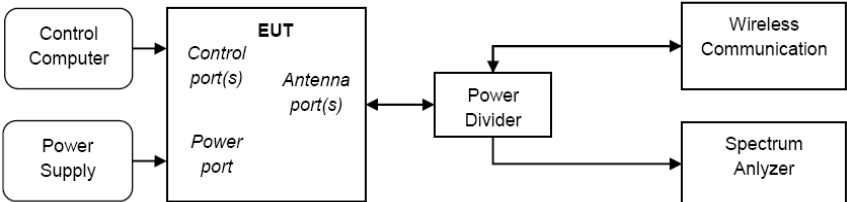
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 22.913(d) and FCC Part 24.232(d)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Method:      | FCC part2.1046                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Limit:            | 13db                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test setup:       |  <pre> graph LR     CC[Control Computer] --&gt; EUT[EUT]     PS[Power Supply] --&gt; EUT     subgraph EUT_ports [EUT]         direction TB         CP[Control port(s)]         AP[Antenna port(s)]         PP[Power port]     end     AP &lt;--&gt; PD[Power Divider]     PD --&gt; WC[Wireless Communication]     PD --&gt; SA[Spectrum Analyzer] </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test Procedure:   | <p>A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.</p> <p><b>Test Settings</b></p> <ol style="list-style-type: none"> <li>1. The signal analyzer's CCDF measurement profile enabled</li> <li>2. Frequency= carrier center frequency</li> <li>3. Measurement BW &gt; EBW of signal</li> <li>4. for continuous transmissions, set to 1ms</li> <li>5. Record the maximum PAPR level associated with a probability of 0.1%.</li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**Measurement data**

| Test Band     | Peak to Average Ratio<br>( dB ) |            |          | Limit<br>( dB ) | Result |
|---------------|---------------------------------|------------|----------|-----------------|--------|
|               | Low Ch.                         | Middle Ch. | High Ch. |                 |        |
| GSM850        | 6.33                            | 6.47       | 6.04     | 13              | PASS   |
| GSM1900       | 6.99                            | 7.13       | 9.87     | 13              | PASS   |
| WCDMA Band V  | 3.25                            | 3.85       | 3.47     | 13              | PASS   |
| WCDMA Band II | 2.87                            | 3.08       | 3.11     | 13              | PASS   |

## 6.5 Occupy Bandwidth
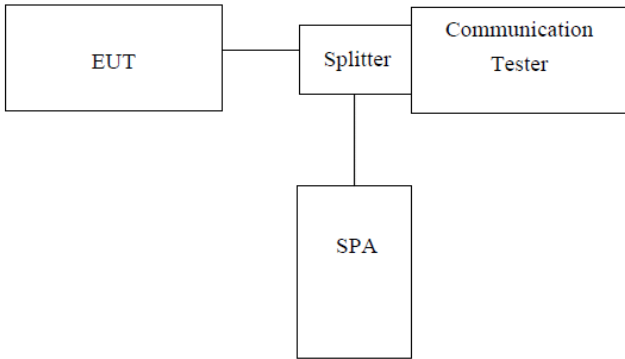
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(b) and FCC part 24.238(b)                                                                                                                                                                                                                                                                                                                                                                                |
| Test Method:      | FCC part2.1049                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test setup:       |  <p><i>Note: Measurement setup for testing on Antenna connector</i></p>                                                                                                                                                                                                                                                                |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer</li> <li>2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.</li> <li>3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.</li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                     |


## Measurement Data

| EUT Mode                                | Channel | Frequency (MHz) | 99% Occupy bandwidth (KHz) | -26dB bandwidth (KHz) |
|-----------------------------------------|---------|-----------------|----------------------------|-----------------------|
| GSM 850<br>(GSM link)                   | 128     | 824.20          | 245.5632                   | 320.803               |
|                                         | 190     | 836.60          | 246.1309                   | 324.224               |
|                                         | 251     | 848.80          | 246.9452                   | 322.563               |
| GSM 850<br>(GPRS 1 link)                | 128     | 824.20          | 246.1462                   | 322.258               |
|                                         | 190     | 836.60          | 245.1735                   | 317.481               |
|                                         | 251     | 848.80          | 146.6045                   | 316.617               |
| PCS 1900<br>(GSM link)                  | 512     | 1850.20         | 243.8843                   | 324.020               |
|                                         | 661     | 1880.00         | 245.5452                   | 298.577               |
|                                         | 810     | 1909.80         | 247.1298                   | 320.255               |
| PCS 1900<br>(GPRS 1 link)               | 512     | 1850.20         | 244.8311                   | 320.308               |
|                                         | 661     | 1880.00         | 246.3560                   | 324.972               |
|                                         | 810     | 1909.80         | 245.5011                   | 317.767               |
| WCDMA Band II<br>(RMC 12.2Kbps link)    | 9262    | 1852.4          | 4161.50                    | 4711.0                |
|                                         | 9400    | 1880.0          | 4157.30                    | 4710.0                |
|                                         | 9538    | 1907.6          | 4175.31                    | 4715.0                |
| 4684WCDMA Band V<br>(RMC 12.2Kbps link) | 4132    | 826.40          | 4165.60                    | 4720.0                |
|                                         | 4183    | 836.60          | 4136.80                    | 4708.0                |
|                                         | 4233    | 846.60          | 4161.30                    | 4705.0                |




Test plot as follows:


|            |                    |
|------------|--------------------|
| Test band: | GSM 850 (GSM link) |
|------------|--------------------|

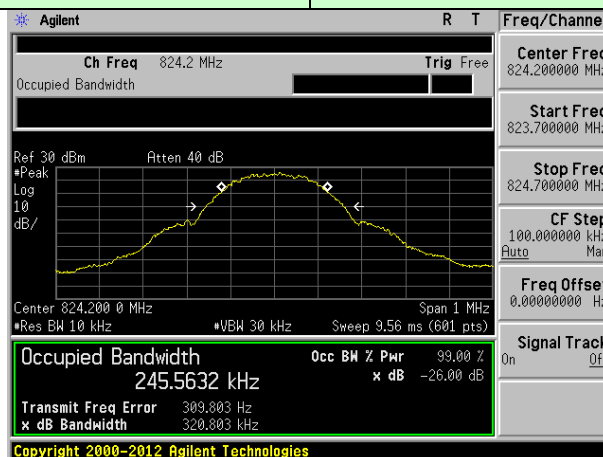

Lowest channel

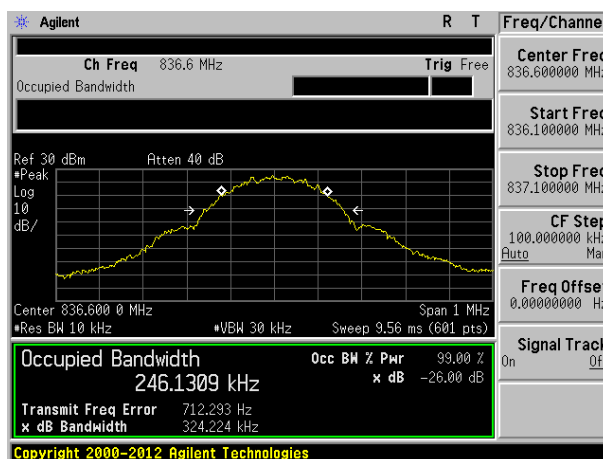


Middle channel

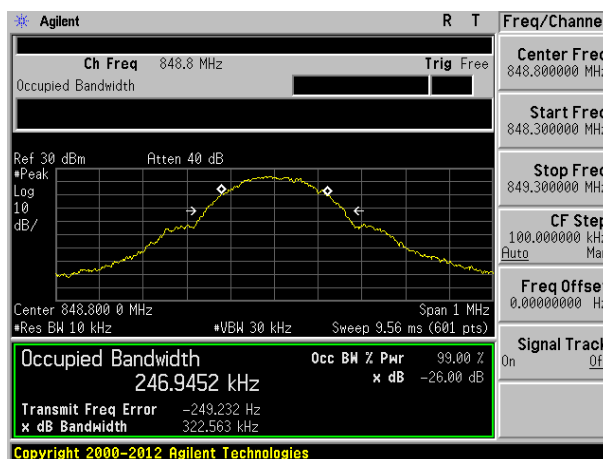


Highest channel


|            |                       |
|------------|-----------------------|
| Test band: | GSM 850 (GPRS 1 link) |
|------------|-----------------------|

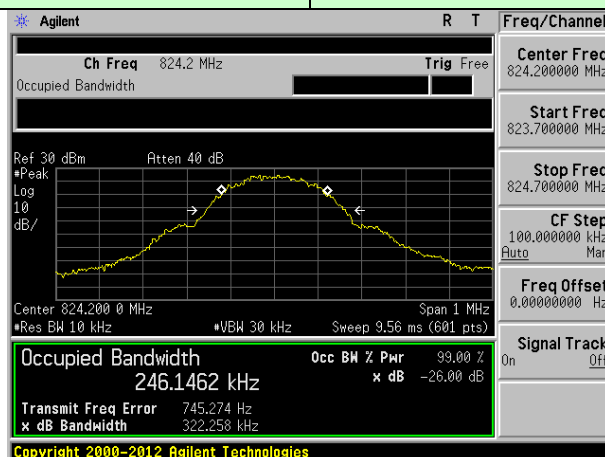

Lowest channel

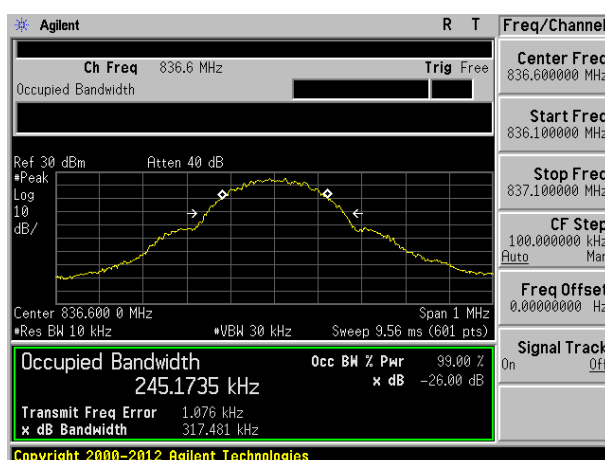


Middle channel

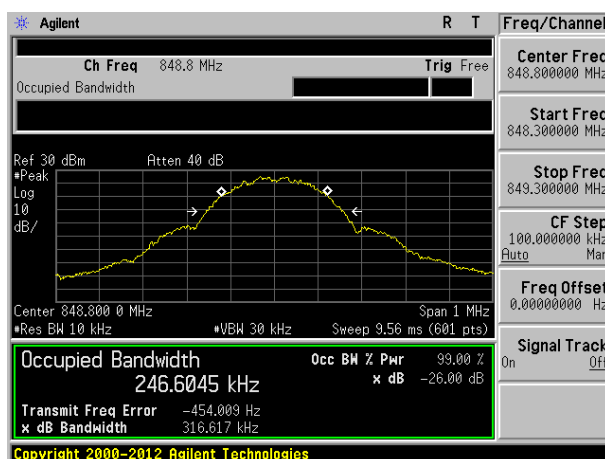


Highest channel


|            |                     |
|------------|---------------------|
| Test band: | PCS 1900 (GSM link) |
|------------|---------------------|

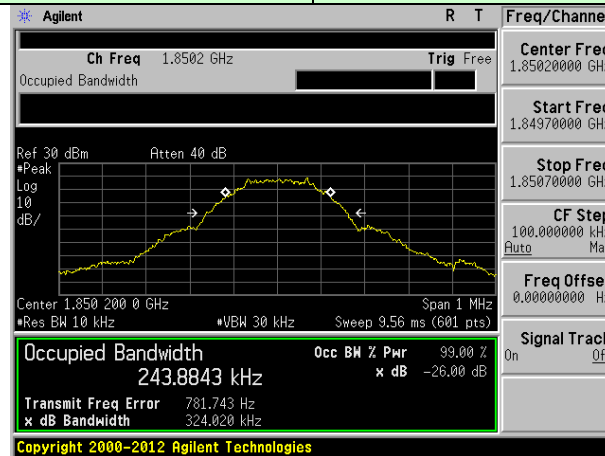

Lowest channel

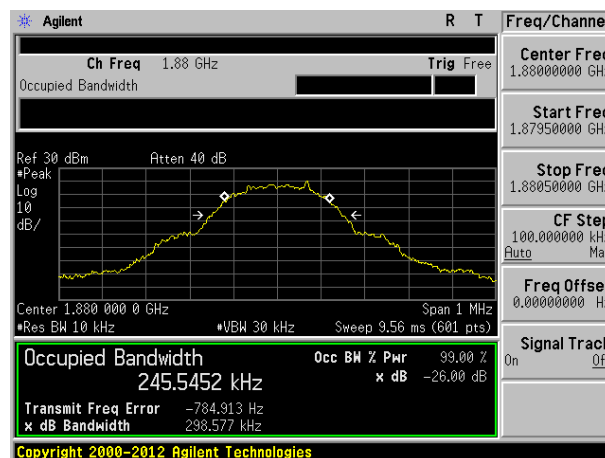


Middle channel

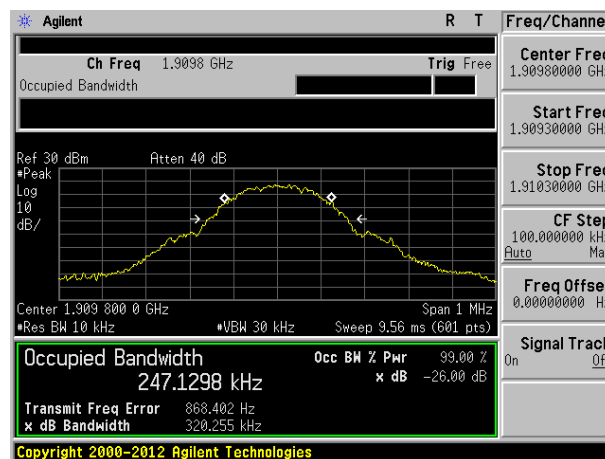


Highest channel


|            |                        |
|------------|------------------------|
| Test band: | PCS 1900 (GPRS 1 link) |
|------------|------------------------|

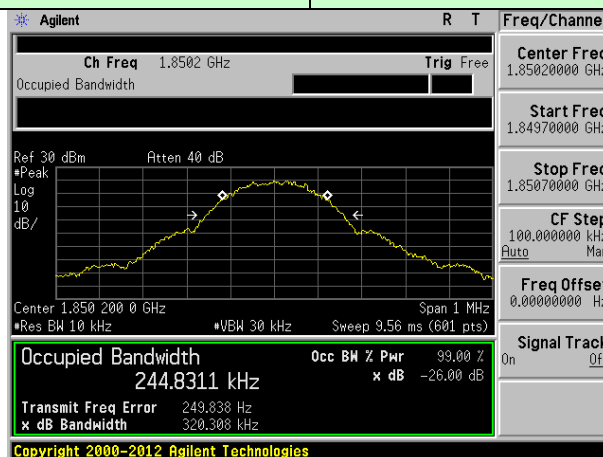

Lowest channel

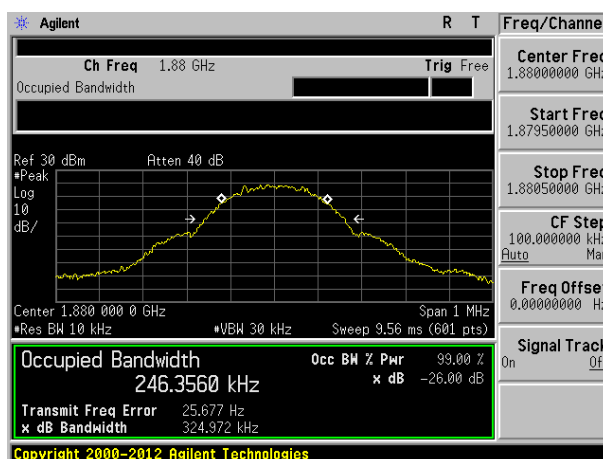


Middle channel

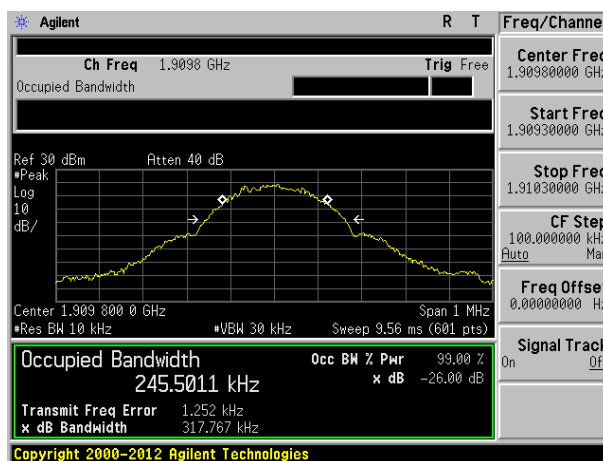


Highest channel


|            |                                   |
|------------|-----------------------------------|
| Test band: | WCDMA Band II (RMC 12.2Kbps link) |
|------------|-----------------------------------|

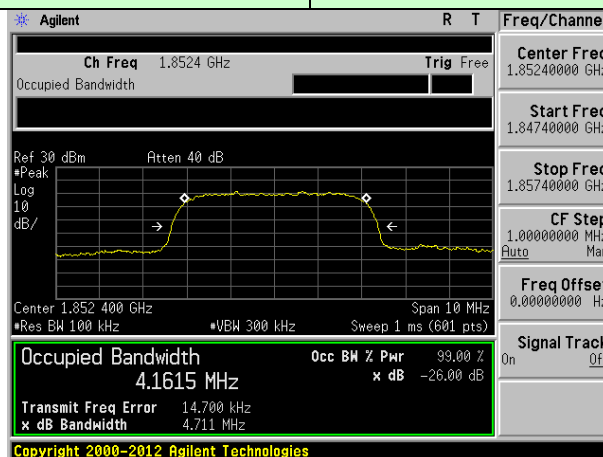

Lowest channel

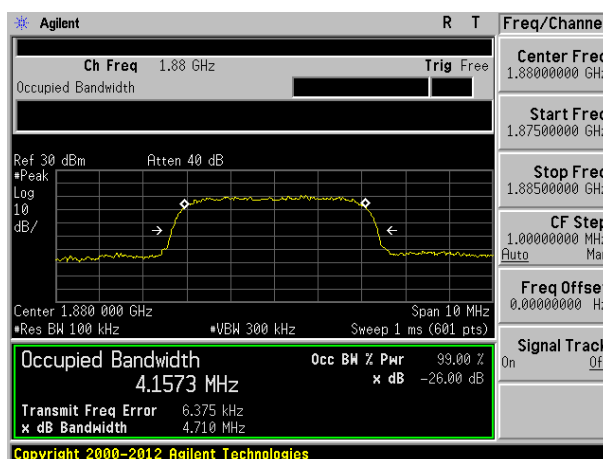


Middle channel

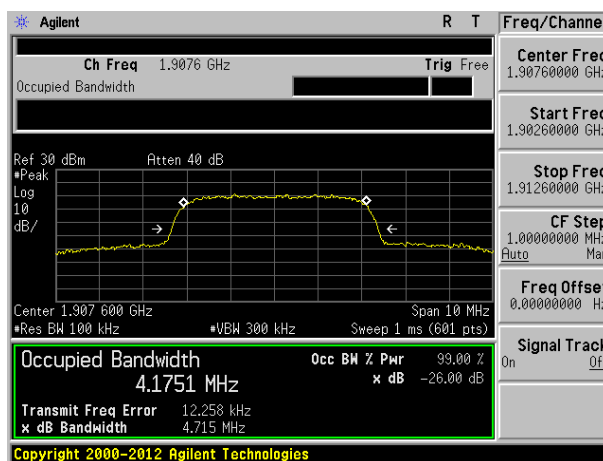


Highest channel

Test band:


WCDMA Band V (RMC 12.2Kbps link)

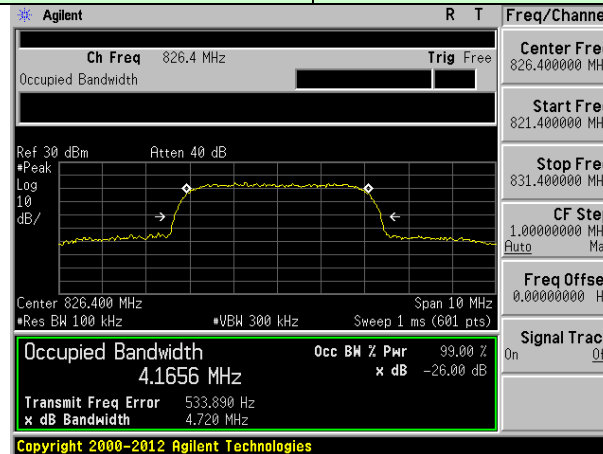

Lowest channel

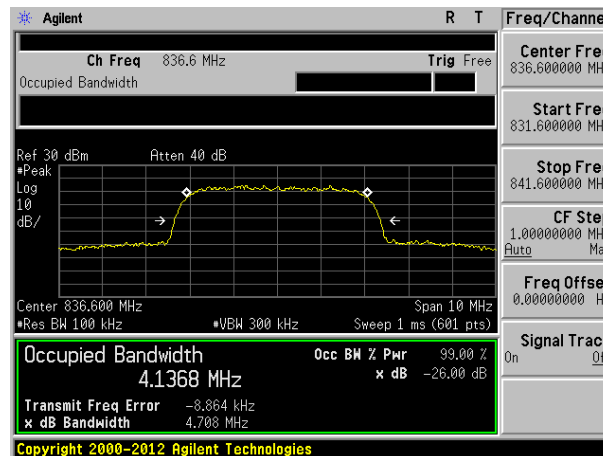

Middle channel

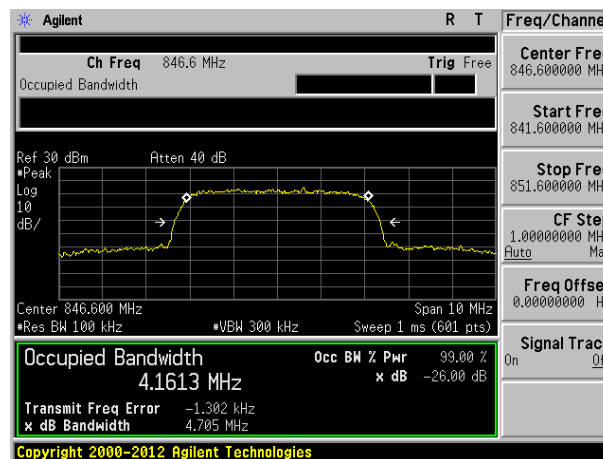


Highest channel

## 6.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.



## 6.7 Out of band emission at antenna terminals
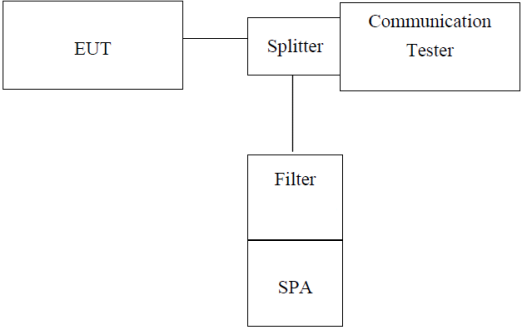
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917 and FCC part 24.238                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | FCC part2.1051                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Limit:            | -13dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test setup:       |  <p><i>Note: Measurement setup for testing on Antenna connector</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.</li> <li>2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.</li> <li>3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic.</li> <li>4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.</li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



Test plot as follows:

Test Mode: Traffic mode



GSM 850 (GSM link)

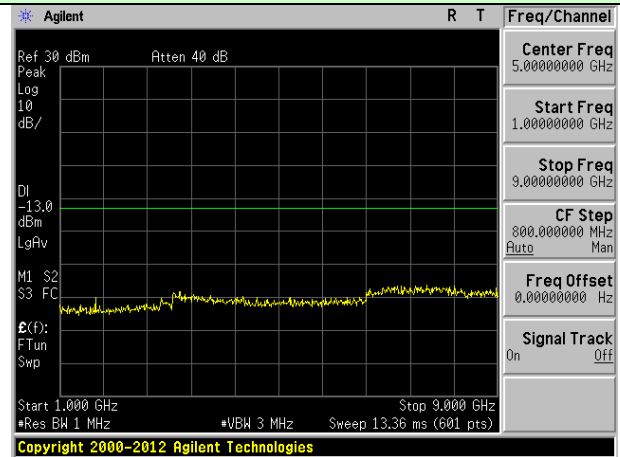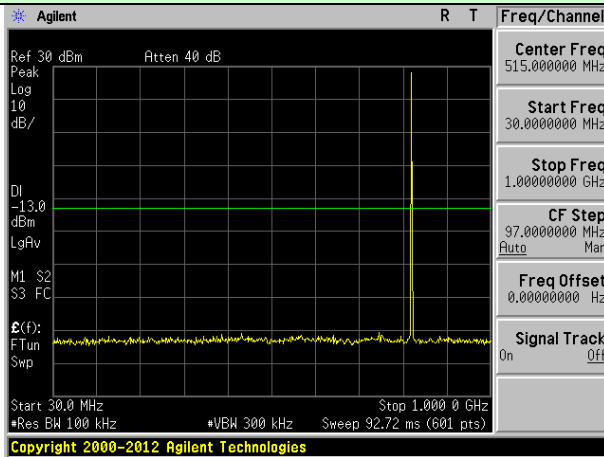

Lowest channel

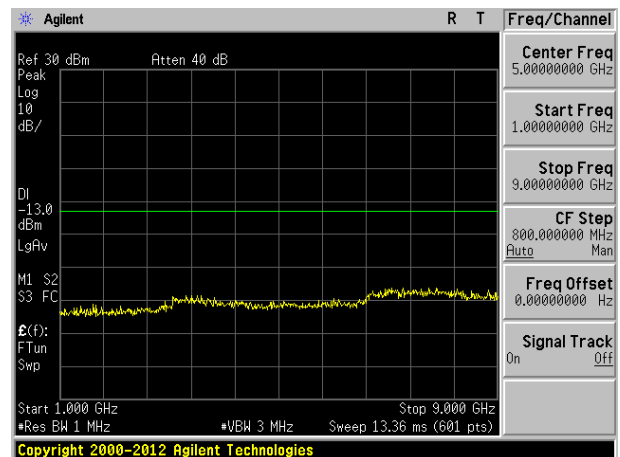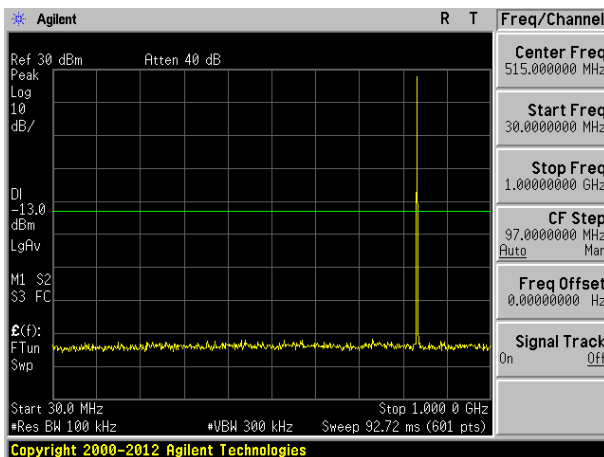

Middle channel

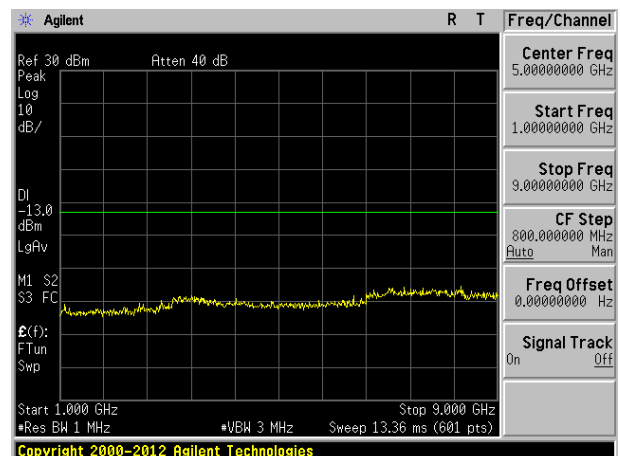
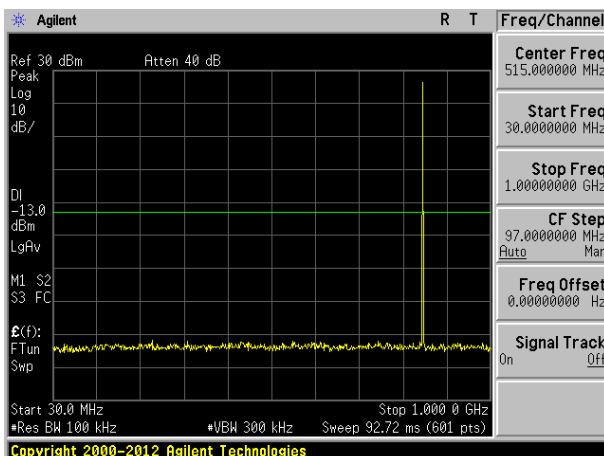


Highest channel





Test Mode: Traffic mode



GSM 850 (GPRS 1 link)

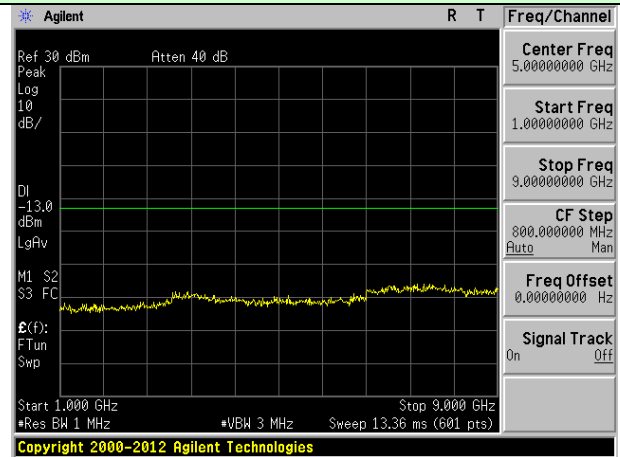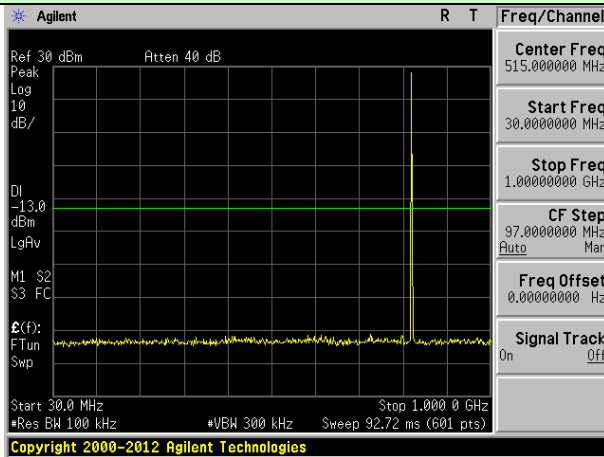

Lowest channel

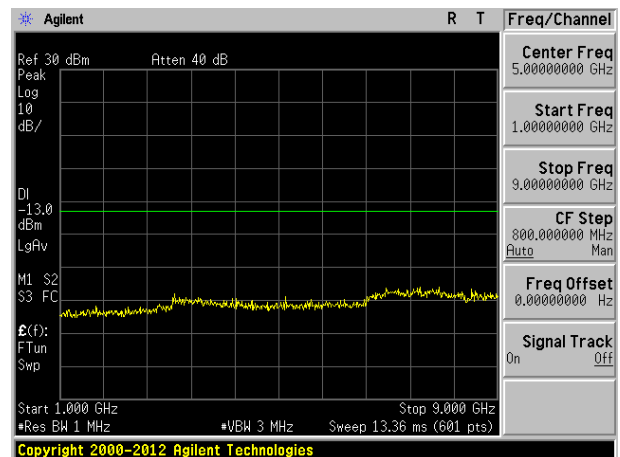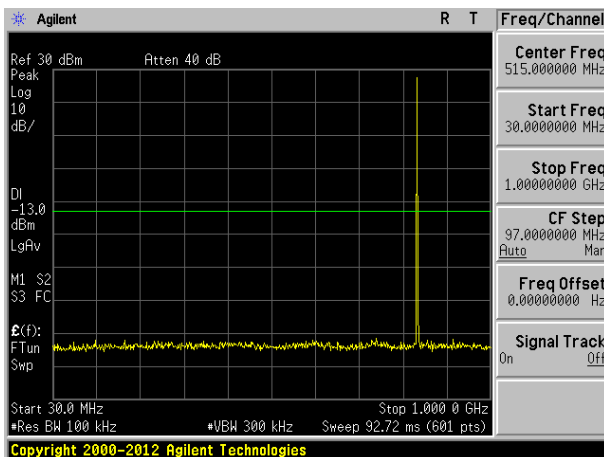


Middle channel

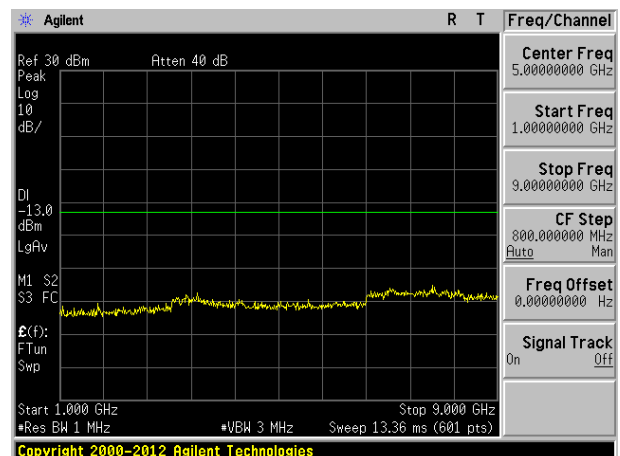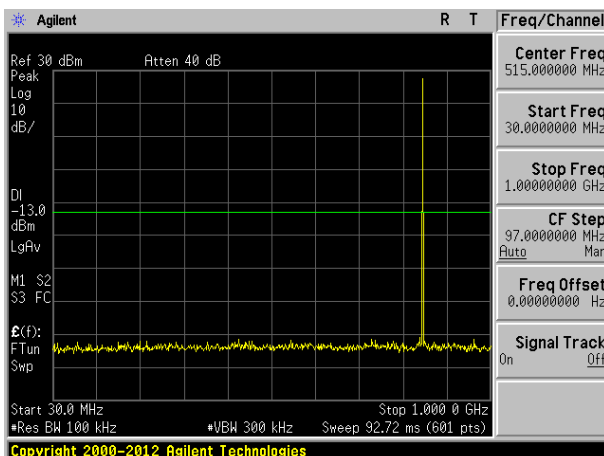



Highest channel

Test Mode: Traffic mode



PCS1900 (GSM link)

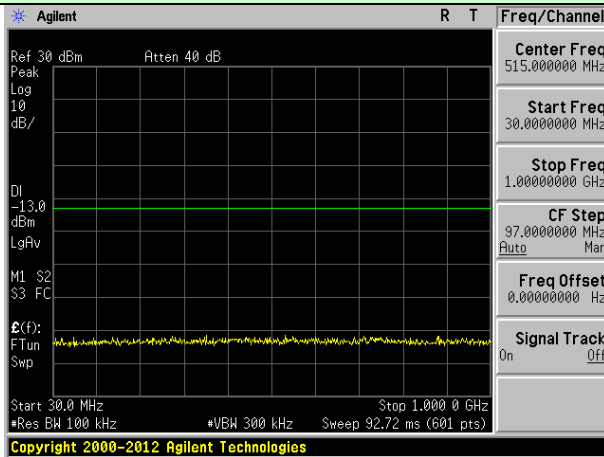

Lowest channel

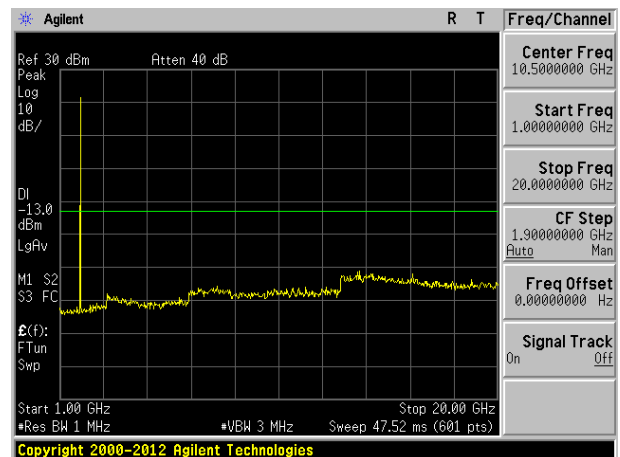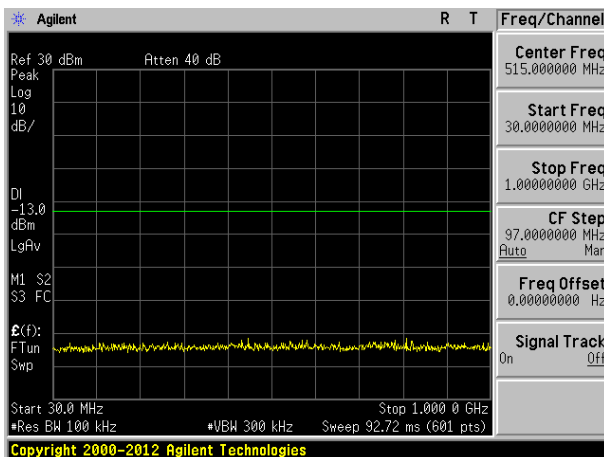



Middle channel

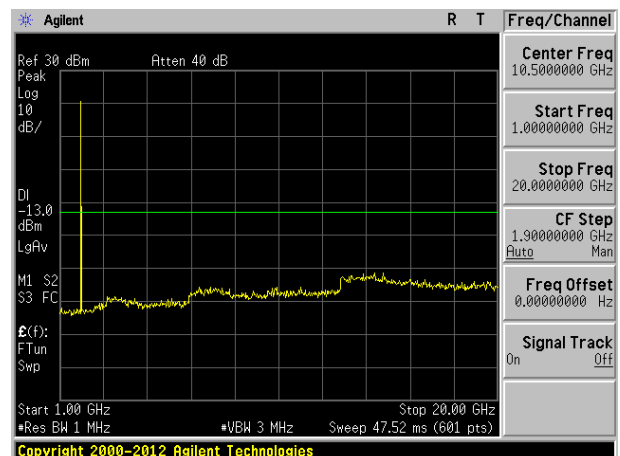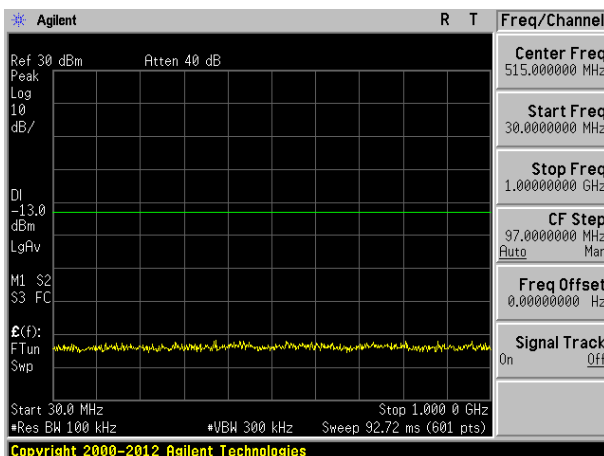



Highest channel

Test Mode: Traffic mode



PCS1900 (GPRS 1 link)

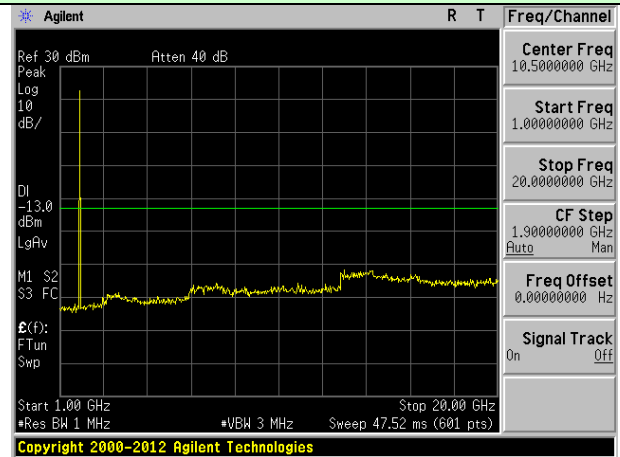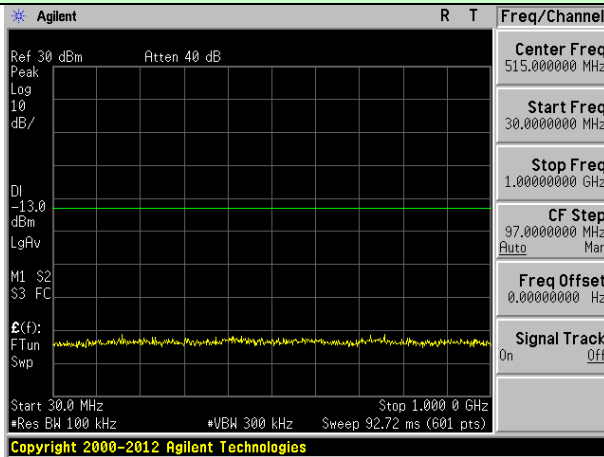

Lowest channel

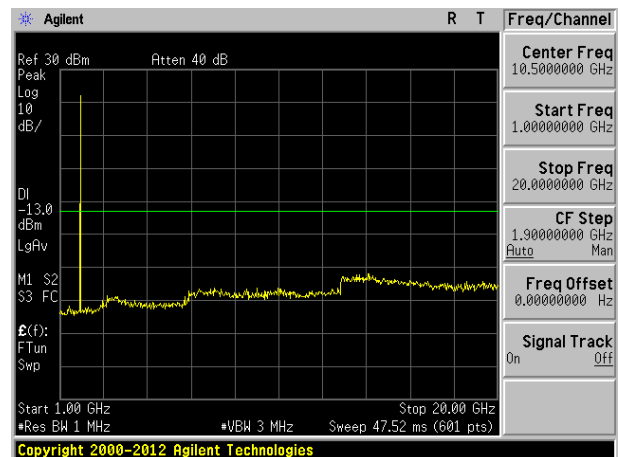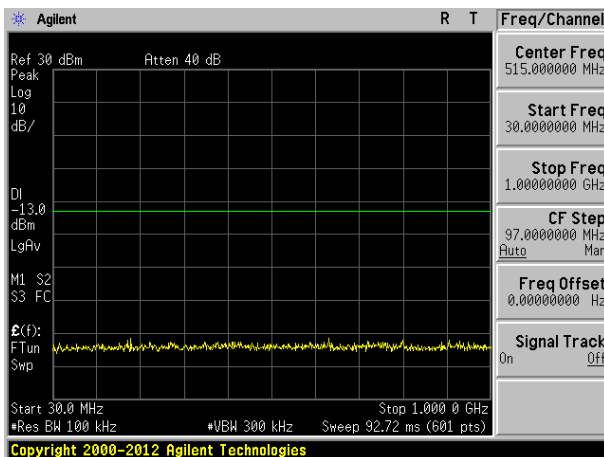



Middle channel

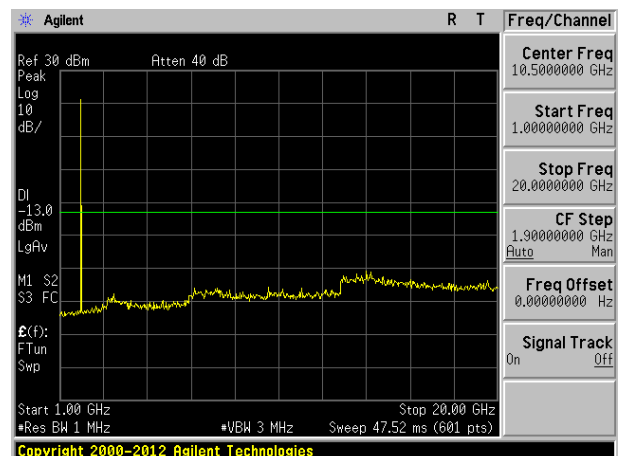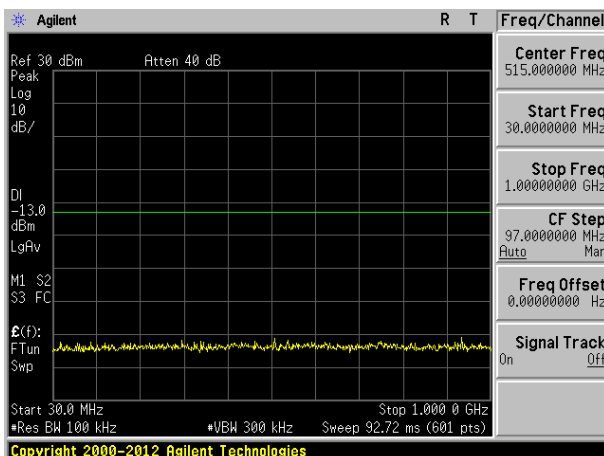



Highest channel

Test Mode: Traffic mode



WCDMA Band II (RMC 12.2Kbps link)

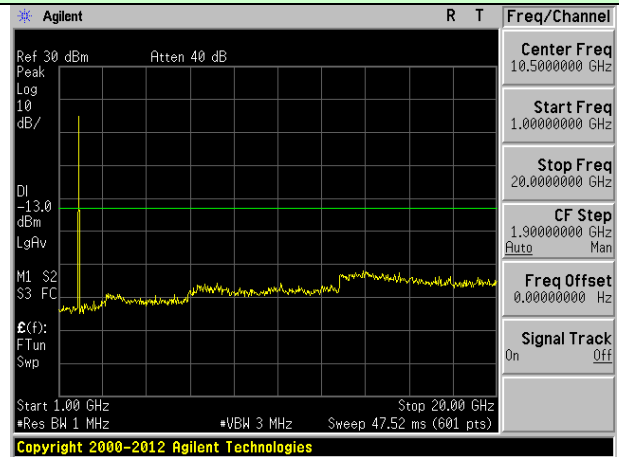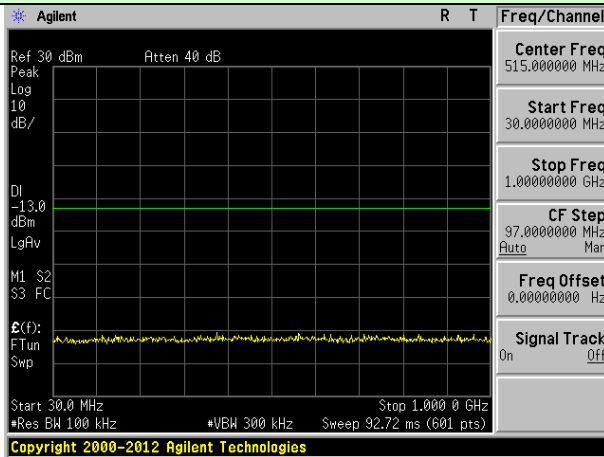

Lowest channel

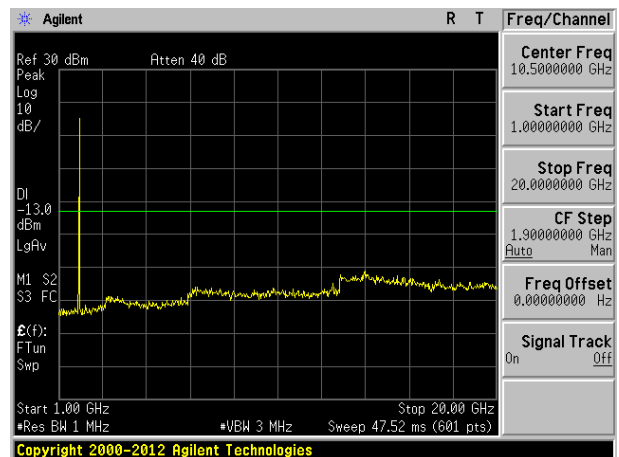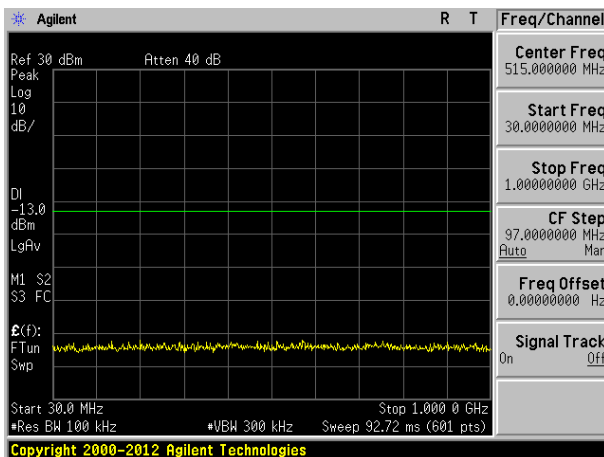



Middle channel

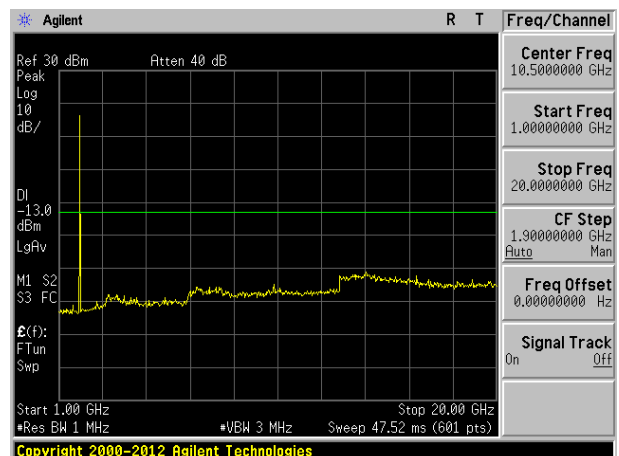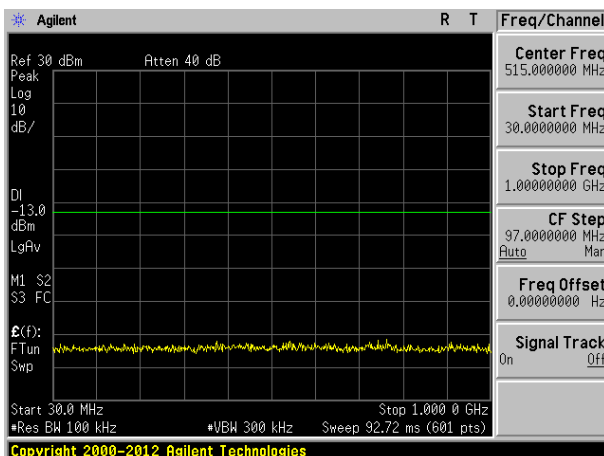



Highest channel

Test Mode: Traffic mode



WCDMA Band V (RMC 12.2Kbps link)

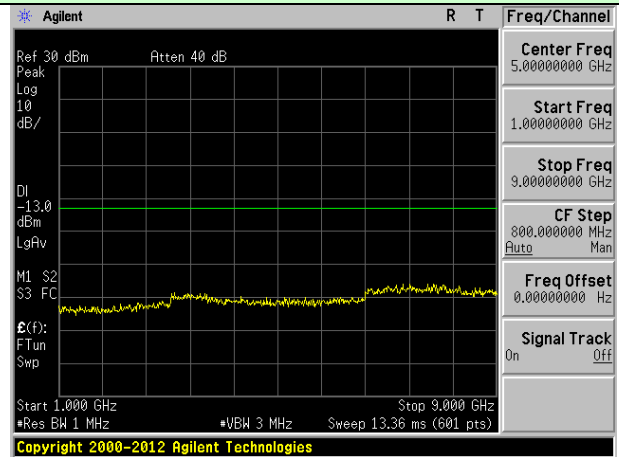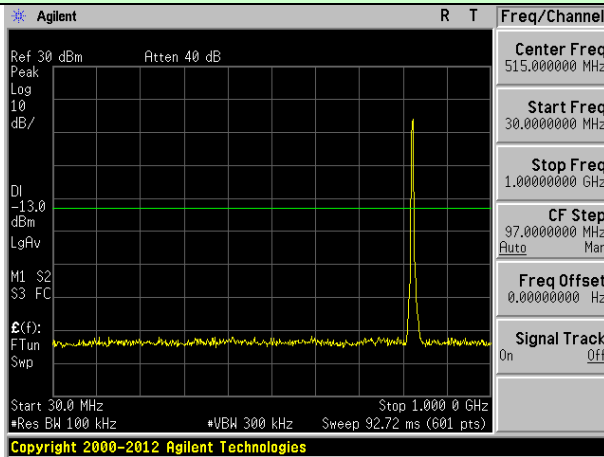

Lowest channel

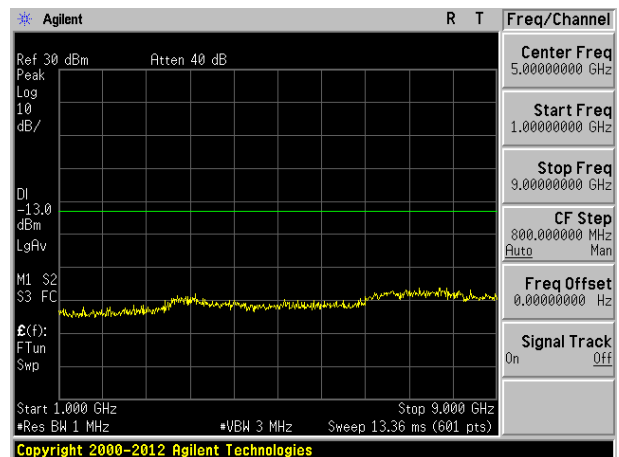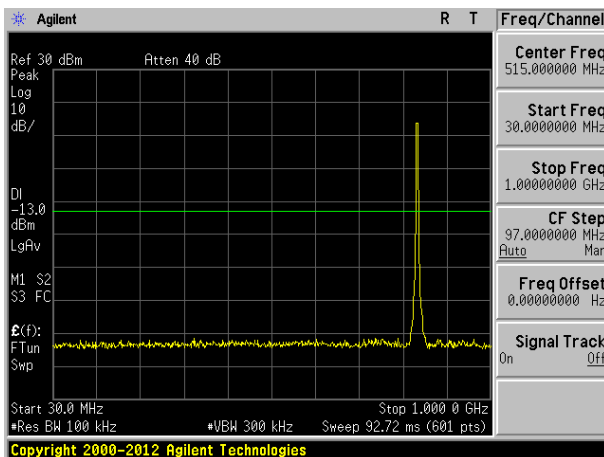


Middle channel

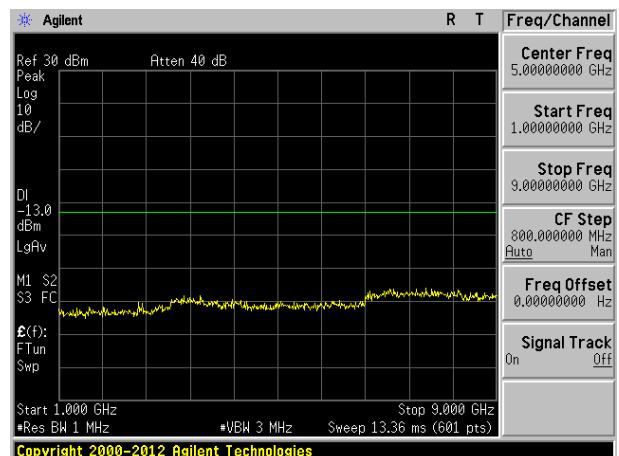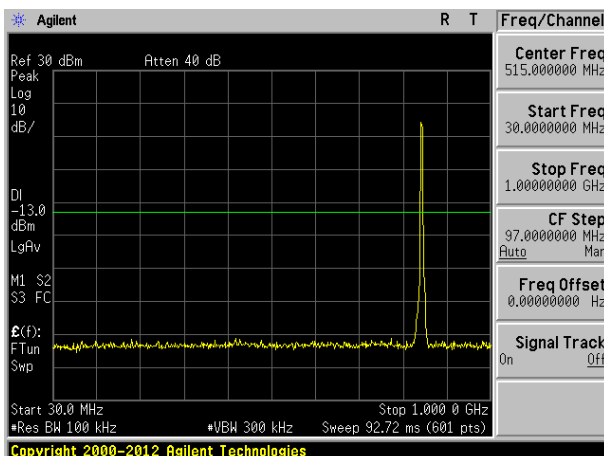


Highest channel

Band Edge:

|                         |                   |
|-------------------------|-------------------|
| Test Mode: Traffic mode | GSM850 (GSM link) |
|-------------------------|-------------------|

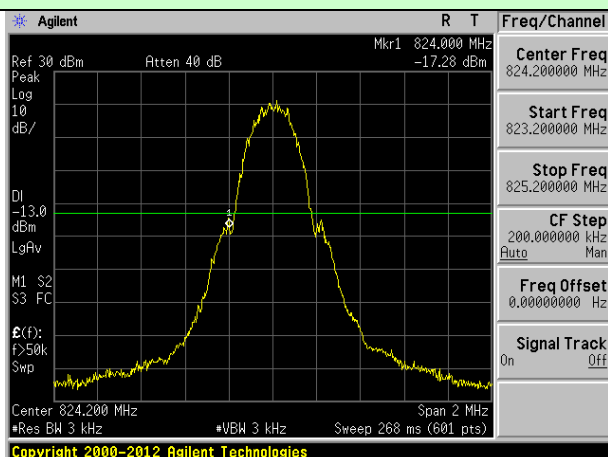


Lowest channel

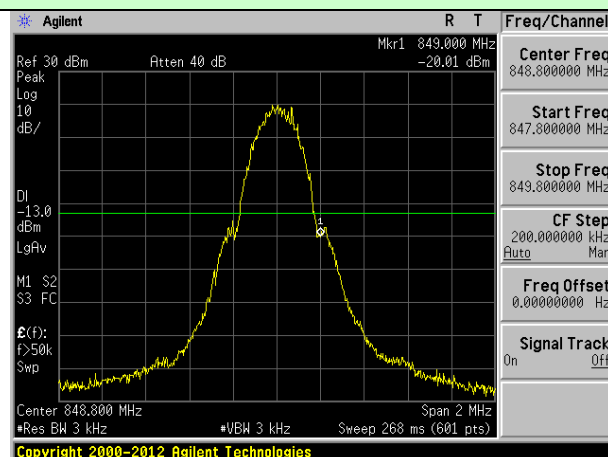


Highest channel


|                         |                      |
|-------------------------|----------------------|
| Test Mode: Traffic mode | GSM850 (GPRS 1 link) |
|-------------------------|----------------------|

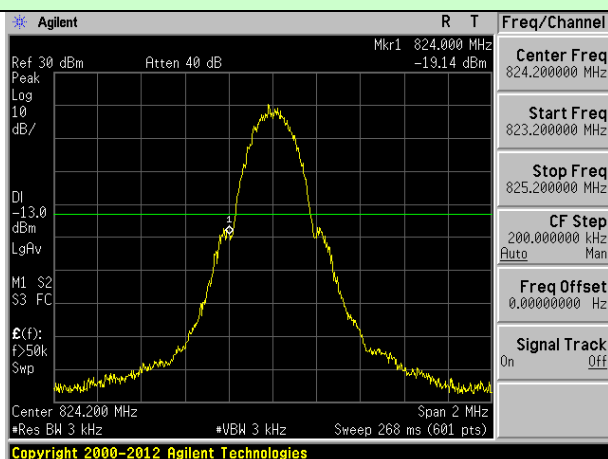


Lowest channel

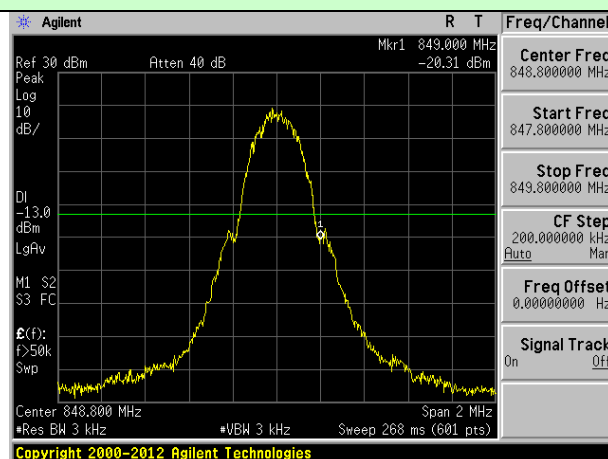


Highest channel

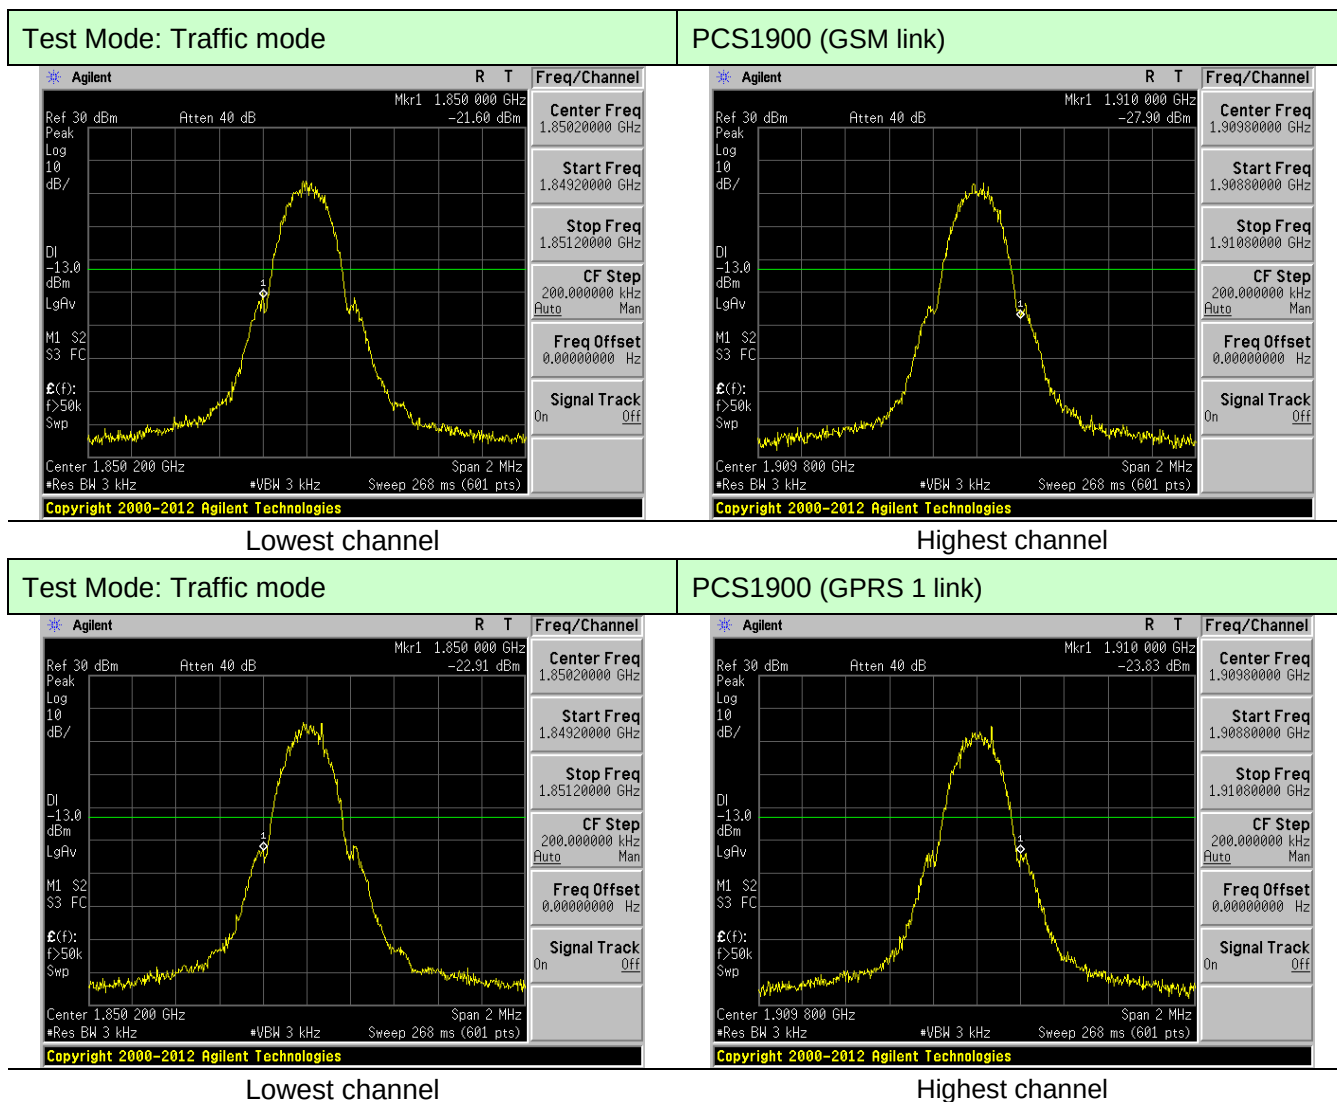

|                         |                                   |
|-------------------------|-----------------------------------|
| Test Mode: Traffic mode | WCDMA Band II (RMC 12.2Kbps link) |
|-------------------------|-----------------------------------|

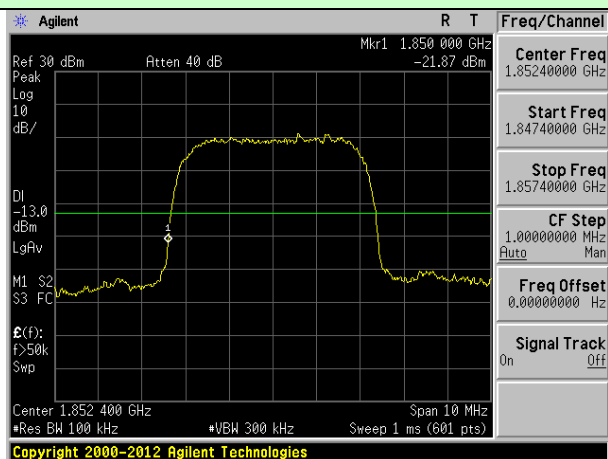


Lowest channel

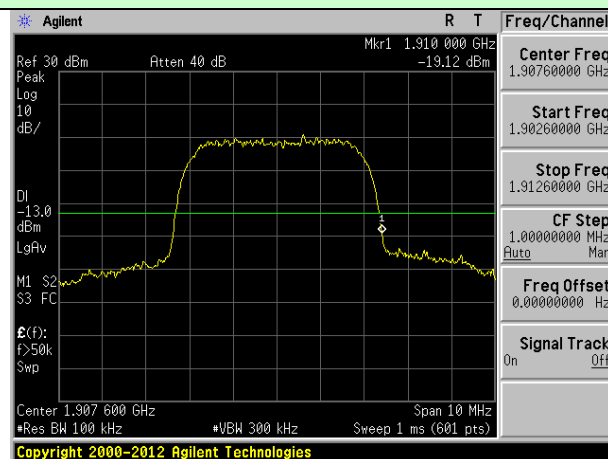


Highest channel

|                         |                                  |
|-------------------------|----------------------------------|
| Test Mode: Traffic mode | WCDMA Band V (RMC 12.2Kbps link) |
|-------------------------|----------------------------------|

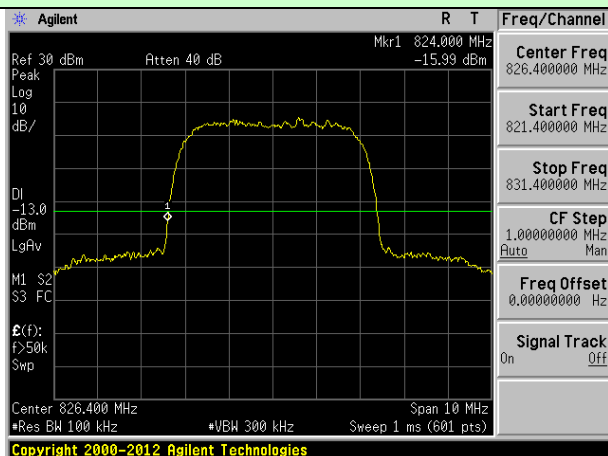




Lowest channel

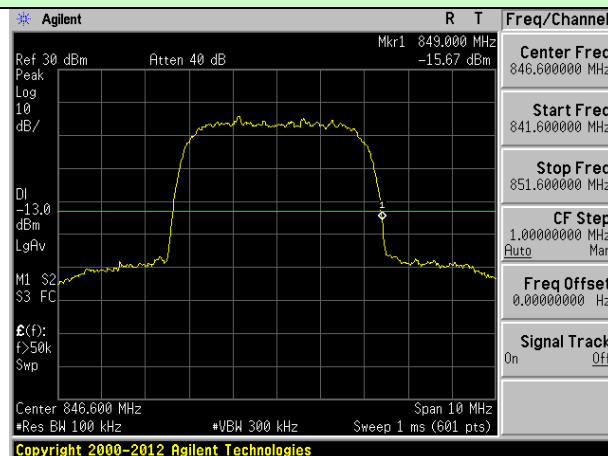

Highest channel



## 6.8 Field strength of spurious radiation measurement
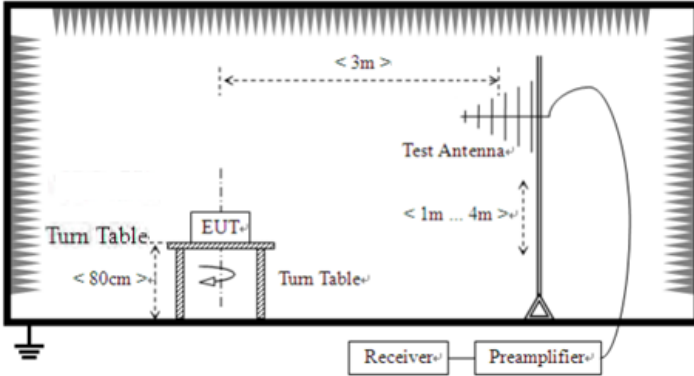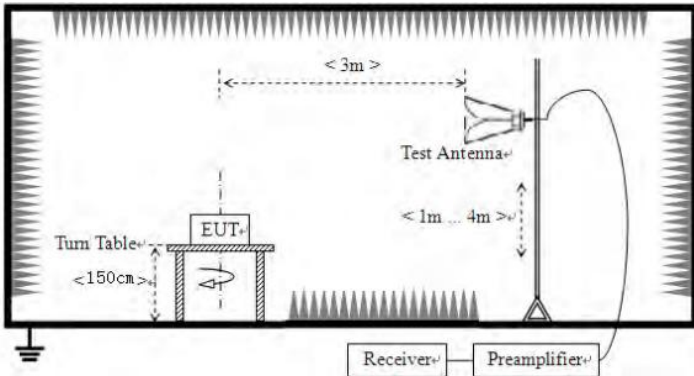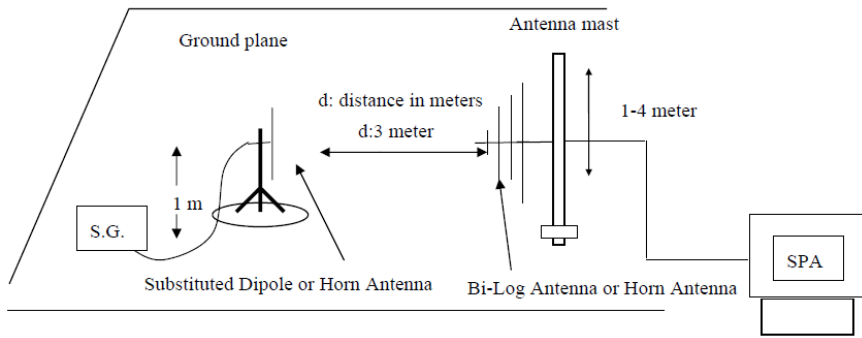
|                   |                                                                                                                                                                                                                                                                                                                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part22.917 and FCC part24.238                                                                                                                                                                                                                                                                                           |
| Test Method:      | FCC part 2.1053 and ANSI C63.26:2015                                                                                                                                                                                                                                                                                        |
| Limit:            | -13dBm                                                                                                                                                                                                                                                                                                                      |
| Test setup:       | <p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p>  |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.</li> <li>2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.</li> <li>3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.</li> <li>4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.<br/> <math display="block">\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}</math> <math display="block">\text{ERP} = \text{EIRP} - 2.15</math> </li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## Measurement Data

| GSM 850 |                |              |           |                        |                |           |             |                  |
|---------|----------------|--------------|-----------|------------------------|----------------|-----------|-------------|------------------|
| Channel | Frequency(MHz) | Polarization | SGP [dBm] | Substitution Gain[dBi] | Cable loss[dB] | ERP (dBm) | Limit (dBm) | Over Limit (dBm) |
| Lowest  | 1648.40        | H            | -62.00    | 6.74                   | 2.37           | -59.78    | -13.00      | -46.78           |
|         | 2472.60        | H            | -62.86    | 8.94                   | 3.18           | -59.25    | -13.00      | -46.25           |
|         | 3296.80        | H            | -57.10    | 10.62                  | 3.62           | -52.25    | -13.00      | -39.25           |
|         | 1648.40        | V            | -57.35    | 6.74                   | 2.37           | -55.13    | -13.00      | -42.13           |
|         | 2472.60        | V            | -64.82    | 8.94                   | 3.18           | -61.21    | -13.00      | -48.21           |
|         | 3296.80        | V            | -60.67    | 10.62                  | 3.62           | -55.82    | -13.00      | -42.82           |
| Middle  | 1673.20        | H            | -62.53    | 6.74                   | 2.39           | -60.33    | -13.00      | -47.33           |
|         | 2509.80        | H            | -58.90    | 8.94                   | 3.03           | -55.14    | -13.00      | -42.14           |
|         | 3346.40        | H            | -57.81    | 10.62                  | 3.63           | -52.97    | -13.00      | -39.97           |
|         | 1673.20        | V            | -58.19    | 6.74                   | 2.39           | -55.99    | -13.00      | -42.99           |
|         | 2509.80        | V            | -60.69    | 8.94                   | 3.03           | -56.93    | -13.00      | -43.93           |
|         | 3346.40        | V            | -58.06    | 10.62                  | 3.63           | -53.22    | -13.00      | -40.22           |
| Highest | 1697.60        | H            | -61.71    | 6.74                   | 2.40           | -59.52    | -13.00      | -46.52           |
|         | 2546.40        | H            | -64.74    | 8.94                   | 3.06           | -61.01    | -13.00      | -48.01           |
|         | 3395.20        | H            | -63.37    | 10.62                  | 3.64           | -58.54    | -13.00      | -45.54           |
|         | 1697.60        | V            | -64.65    | 6.74                   | 2.40           | -62.46    | -13.00      | -49.46           |
|         | 2546.40        | V            | -60.39    | 8.94                   | 3.06           | -56.66    | -13.00      | -43.66           |
|         | 3395.20        | V            | -57.50    | 10.62                  | 3.64           | -52.67    | -13.00      | -39.67           |

The emission levels of below 1 GHz are very lower than the limit so not show in test report

| GSM 1900 |                |              |           |                        |                |            |             |                  |
|----------|----------------|--------------|-----------|------------------------|----------------|------------|-------------|------------------|
| Channel  | Frequency(MHz) | Polarization | SGP [dBm] | Substitution Gain[dBi] | Cable loss[dB] | EIRP (dBm) | Limit (dBm) | Over Limit (dBm) |
| Lowest   | 3700.40        | H            | -58.07    | 13.13                  | 3.88           | -48.82     | -13.00      | -35.82           |
|          | 5550.60        | H            | -60.69    | 11.62                  | 5.27           | -54.34     | -13.00      | -41.34           |
|          | 7400.80        | H            | -60.83    | 10.22                  | 6.73           | -57.34     | -13.00      | -44.34           |
|          | 3700.40        | V            | -61.53    | 13.13                  | 3.88           | -52.28     | -13.00      | -39.28           |
|          | 5550.60        | V            | -62.29    | 11.62                  | 5.27           | -55.94     | -13.00      | -42.94           |
|          | 7400.80        | V            | -60.24    | 10.22                  | 6.73           | -56.75     | -13.00      | -43.75           |
| Middle   | 3760.00        | H            | -59.07    | 13.13                  | 3.9            | -49.84     | -13.00      | -36.84           |
|          | 5640.00        | H            | -57.30    | 11.62                  | 5.33           | -51.01     | -13.00      | -38.01           |
|          | 7520.00        | H            | -58.63    | 10.22                  | 6.82           | -55.23     | -13.00      | -42.23           |
|          | 3760.00        | V            | -60.53    | 13.13                  | 3.9            | -51.30     | -13.00      | -38.30           |
|          | 5640.00        | V            | -59.10    | 11.62                  | 5.33           | -52.81     | -13.00      | -39.81           |
|          | 7520.00        | V            | -58.68    | 10.22                  | 6.82           | -55.28     | -13.00      | -42.28           |
| Highest  | 3819.60        | H            | -57.47    | 13.13                  | 3.92           | -48.26     | -13.00      | -35.26           |
|          | 5729.40        | H            | -57.91    | 11.62                  | 5.4            | -51.69     | -13.00      | -38.69           |
|          | 7639.20        | H            | -59.29    | 10.22                  | 6.8            | -55.87     | -13.00      | -42.87           |
|          | 3819.60        | V            | -59.66    | 13.13                  | 3.92           | -50.45     | -13.00      | -37.45           |
|          | 5729.40        | V            | -60.46    | 11.62                  | 5.4            | -54.24     | -13.00      | -41.24           |
|          | 7639.20        | V            | -64.38    | 10.22                  | 6.8            | -60.96     | -13.00      | -47.96           |

The emission levels of below 1 GHz are very lower than the limit so not show in test report


| WCDMA Band V |                |              |           |                        |                |           |             |                  |
|--------------|----------------|--------------|-----------|------------------------|----------------|-----------|-------------|------------------|
| Channel      | Frequency(MHz) | Polarization | SGP [dBm] | Substitution Gain[dBi] | Cable loss[dB] | ERP (dBm) | Limit (dBm) | Over Limit (dBm) |
| Lowest       | 1652.80        | H            | -59.12    | 6.74                   | 2.37           | -56.90    | -13.00      | -43.90           |
|              | 2479.20        | H            | -57.90    | 8.94                   | 3.18           | -54.29    | -13.00      | -41.29           |
|              | 3305.60        | H            | -60.59    | 10.62                  | 3.62           | -55.74    | -13.00      | -42.74           |
|              | 1652.80        | V            | -60.37    | 6.74                   | 2.37           | -58.15    | -13.00      | -45.15           |
|              | 2479.20        | V            | -63.47    | 8.94                   | 3.18           | -59.86    | -13.00      | -46.86           |
|              | 3305.60        | V            | -57.12    | 10.62                  | 3.62           | -52.27    | -13.00      | -39.27           |
| Middle       | 1672.80        | H            | -60.39    | 6.74                   | 2.39           | -58.19    | -13.00      | -45.19           |
|              | 2509.20        | H            | -63.31    | 8.94                   | 3.03           | -59.55    | -13.00      | -46.55           |
|              | 3345.60        | H            | -59.02    | 10.62                  | 3.63           | -54.18    | -13.00      | -41.18           |
|              | 1672.80        | V            | -60.29    | 6.74                   | 2.39           | -58.09    | -13.00      | -45.09           |
|              | 2509.20        | V            | -59.67    | 8.94                   | 3.03           | -55.91    | -13.00      | -42.91           |
|              | 3345.60        | V            | -64.96    | 10.62                  | 3.63           | -60.12    | -13.00      | -47.12           |
| Highest      | 1693.20        | H            | -60.45    | 6.74                   | 2.4            | -58.26    | -13.00      | -45.26           |
|              | 2539.80        | H            | -58.18    | 8.94                   | 3.06           | -54.45    | -13.00      | -41.45           |
|              | 3386.40        | H            | -61.28    | 10.62                  | 3.64           | -56.45    | -13.00      | -43.45           |
|              | 1693.20        | V            | -58.89    | 6.74                   | 2.4            | -56.70    | -13.00      | -43.70           |
|              | 2539.80        | V            | -62.74    | 8.94                   | 3.06           | -59.01    | -13.00      | -46.01           |
|              | 3386.40        | V            | -58.75    | 10.62                  | 3.64           | -53.92    | -13.00      | -40.92           |

The emission levels of below 1 GHz are very lower than the limit so not show in test report

| WCDMA Band II |                |              |           |                        |                |            |             |                  |
|---------------|----------------|--------------|-----------|------------------------|----------------|------------|-------------|------------------|
| Channel       | Frequency(MHz) | Polarization | SGP [dBm] | Substitution Gain[dBi] | Cable loss[dB] | EIRP (dBm) | Limit (dBm) | Over Limit (dBm) |
| Lowest        | 3704.80        | H            | -62.34    | 13.13                  | 3.88           | -53.09     | -13.00      | -40.09           |
|               | 5557.20        | H            | -61.18    | 11.62                  | 5.27           | -54.83     | -13.00      | -41.83           |
|               | 7409.60        | H            | -58.92    | 10.22                  | 6.73           | -55.43     | -13.00      | -42.43           |
|               | 3704.80        | V            | -60.52    | 13.13                  | 3.88           | -51.27     | -13.00      | -38.27           |
|               | 5557.20        | V            | -57.06    | 11.62                  | 5.27           | -50.71     | -13.00      | -37.71           |
|               | 7409.60        | V            | -57.51    | 10.22                  | 6.73           | -54.02     | -13.00      | -41.02           |
| Middle        | 3760.00        | H            | -58.06    | 13.13                  | 3.9            | -48.83     | -13.00      | -35.83           |
|               | 5640.00        | H            | -57.44    | 11.62                  | 5.33           | -51.15     | -13.00      | -38.15           |
|               | 7520.00        | H            | -59.20    | 10.22                  | 6.82           | -55.80     | -13.00      | -42.80           |
|               | 3760.00        | V            | -57.36    | 13.13                  | 3.9            | -48.13     | -13.00      | -35.13           |
|               | 5640.00        | V            | -59.48    | 11.62                  | 5.33           | -53.19     | -13.00      | -40.19           |
|               | 7520.00        | V            | -61.57    | 10.22                  | 6.82           | -58.17     | -13.00      | -45.17           |
| Highest       | 3815.20        | H            | -61.02    | 13.13                  | 3.92           | -51.81     | -13.00      | -38.81           |
|               | 5722.80        | H            | -60.14    | 11.62                  | 5.4            | -53.92     | -13.00      | -40.92           |
|               | 7630.40        | H            | -62.72    | 10.22                  | 6.8            | -59.30     | -13.00      | -46.30           |
|               | 3815.20        | V            | -63.32    | 13.13                  | 3.92           | -54.11     | -13.00      | -41.11           |
|               | 5722.80        | V            | -62.74    | 11.62                  | 5.4            | -56.52     | -13.00      | -43.52           |
|               | 7630.40        | V            | -60.38    | 10.22                  | 6.8            | -56.96     | -13.00      | -43.96           |

The emission levels of below 1 GHz are very lower than the limit so not show in test report

## 6.9 Frequency stability V.S. Temperature measurement
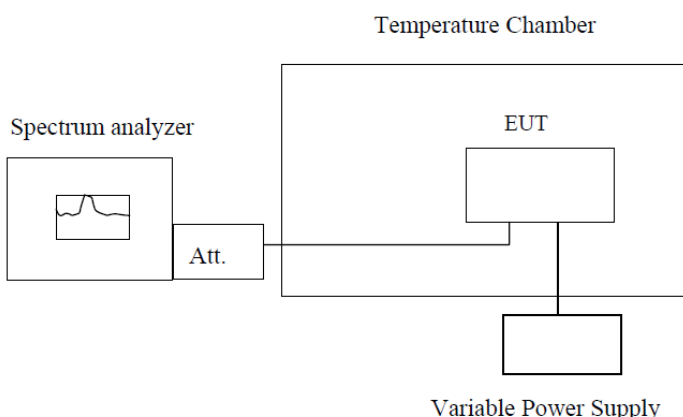
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.355 and FCC part 24.235                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | FCC Part2.1055(a)(1)(b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Limit:            | $\pm 2.5\text{ppm}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test setup:       |  <p><b>Note :</b> Measurement setup for testing on Antenna connector</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test procedure:   | <ol style="list-style-type: none"> <li>1. The equipment under test was connected to an external DC power supply and input rated voltage.</li> <li>2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.</li> <li>3. The EUT was placed inside the temperature chamber.</li> <li>4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.</li> <li>5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.</li> <li>6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.</li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### Measurement Data


| Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz    |                  |                 |        |             |        |
|-------------------------------------------------------------------------------|------------------|-----------------|--------|-------------|--------|
| Power supplied (Vdc)                                                          | Temperature (°C) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                  | Hz              | ppm    |             |        |
| 3.8                                                                           | -30              | 77              | 0.0925 | ±2.5        | Pass   |
|                                                                               | -20              | 87              | 0.1045 |             |        |
|                                                                               | -10              | 74              | 0.0885 |             |        |
|                                                                               | 0                | 61              | 0.0726 |             |        |
|                                                                               | 10               | 71              | 0.0846 |             |        |
|                                                                               | 20               | 61              | 0.0726 |             |        |
|                                                                               | 30               | 101             | 0.1204 |             |        |
|                                                                               | 40               | 91              | 0.1084 |             |        |
|                                                                               | 50               | 87              | 0.1045 |             |        |
| Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz |                  |                 |        |             |        |
| Power supplied (Vdc)                                                          | Temperature (°C) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                  | Hz              | ppm    |             |        |
| 3.8                                                                           | -30              | 22              | 0.0258 | ±2.5        | Pass   |
|                                                                               | -20              | 24              | 0.0290 |             |        |
|                                                                               | -10              | 20              | 0.0242 |             |        |
|                                                                               | 0                | 18              | 0.0211 |             |        |
|                                                                               | 10               | 19              | 0.0227 |             |        |
|                                                                               | 20               | 16              | 0.0195 |             |        |
|                                                                               | 30               | 31              | 0.0370 |             |        |
|                                                                               | 40               | 26              | 0.0306 |             |        |
|                                                                               | 50               | 24              | 0.0290 |             |        |



| Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz    |                  |                 |        |             |        |
|-------------------------------------------------------------------------------|------------------|-----------------|--------|-------------|--------|
| Power supplied (Vdc)                                                          | Temperature (°C) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                  | Hz              | ppm    |             |        |
| 3.8                                                                           | -30              | 49              | 0.0583 | ±2.5        | Pass   |
|                                                                               | -20              | 56              | 0.0670 |             |        |
|                                                                               | -10              | 47              | 0.0565 |             |        |
|                                                                               | 0                | 41              | 0.0494 |             |        |
|                                                                               | 10               | 46              | 0.0550 |             |        |
|                                                                               | 20               | 40              | 0.0482 |             |        |
|                                                                               | 30               | 67              | 0.0799 |             |        |
|                                                                               | 40               | 58              | 0.0699 |             |        |
|                                                                               | 50               | 55              | 0.0663 |             |        |
| Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz |                  |                 |        |             |        |
| Power supplied (Vdc)                                                          | Temperature (°C) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                  | Hz              | ppm    |             |        |
| 3.8                                                                           | -30              | 34              | 0.0181 | ±2.5        | Pass   |
|                                                                               | -20              | 41              | 0.0218 |             |        |
|                                                                               | -10              | 34              | 0.0181 |             |        |
|                                                                               | 0                | 28              | 0.0151 |             |        |
|                                                                               | 10               | 34              | 0.0181 |             |        |
|                                                                               | 20               | 30              | 0.0157 |             |        |
|                                                                               | 30               | 49              | 0.0260 |             |        |
|                                                                               | 40               | 42              | 0.0224 |             |        |
|                                                                               | 50               | 40              | 0.0212 |             |        |

| Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz   |                  |                 |        |             |        |
|--------------------------------------------------------------------------|------------------|-----------------|--------|-------------|--------|
| Power supplied (Vdc)                                                     | Temperature (°C) | Frequency error |        | Limit (ppm) | Result |
|                                                                          |                  | Hz              | ppm    |             |        |
| 3.80                                                                     | -30              | 97              | 0.1159 | ± 2.5       | Pass   |
|                                                                          | -20              | 139             | 0.1658 |             |        |
|                                                                          | -10              | 158             | 0.1885 |             |        |
|                                                                          | 0                | 70              | 0.0841 |             |        |
|                                                                          | 10               | 108             | 0.1295 |             |        |
|                                                                          | 20               | 120             | 0.1431 |             |        |
|                                                                          | 30               | 181             | 0.2158 |             |        |
|                                                                          | 40               | 169             | 0.2022 |             |        |
|                                                                          | 50               | 203             | 0.2431 |             |        |
| Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880.0MHz |                  |                 |        |             |        |
| Power supplied (Vdc)                                                     | Temperature (°C) | Frequency error |        | Limit (ppm) | Result |
|                                                                          |                  | Hz              | ppm    |             |        |
| 3.80                                                                     | -30              | 93              | 0.0493 | ± 2.5       | Pass   |
|                                                                          | -20              | 83              | 0.0439 |             |        |
|                                                                          | -10              | 71              | 0.0379 |             |        |
|                                                                          | 0                | 67              | 0.0355 |             |        |
|                                                                          | 10               | 61              | 0.0325 |             |        |
|                                                                          | 20               | 53              | 0.0283 |             |        |
|                                                                          | 30               | 67              | 0.0355 |             |        |
|                                                                          | 40               | 75              | 0.0397 |             |        |
|                                                                          | 50               | 71              | 0.0379 |             |        |

## 6.10 Frequency stability V.S. Voltage measurement
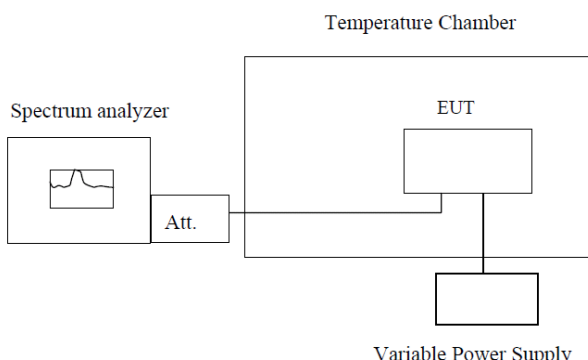
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.355 and FCC part 24.235                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Method:      | FCC Part2.1055(d)(1)(2)                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Limit:            | $\pm 2.5\text{ppm}$                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test setup:       |  <p>Note : Measurement setup for testing on Antenna connector</p>                                                                                                                                                                                                                                                                                              |
| Test procedure:   | <ol style="list-style-type: none"> <li>1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.</li> <li>2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.</li> <li>3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.</li> </ol> |
| Test Instruments: | Refer to section 5.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test mode:        | Refer to section 6.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## Measurement Data

| Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz    |                      |                 |        |             |        |
|-------------------------------------------------------------------------------|----------------------|-----------------|--------|-------------|--------|
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm    |             |        |
| 25                                                                            | 4.37                 | 59              | 0.0707 | ± 2.5       | Pass   |
|                                                                               | 3.80                 | 68              | 0.0816 |             |        |
|                                                                               | 3.23                 | 77              | 0.0925 |             |        |
| Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz |                      |                 |        |             |        |
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm    |             |        |
| 25                                                                            | 4.37                 | 118             | 0.1406 | ± 2.5       | Pass   |
|                                                                               | 3.80                 | 85              | 0.1017 |             |        |
|                                                                               | 3.23                 | 96              | 0.1147 |             |        |

| Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz    |                      |                 |        |             |        |
|-------------------------------------------------------------------------------|----------------------|-----------------|--------|-------------|--------|
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm    |             |        |
| 25                                                                            | 4.37                 | 115             | 0.1375 | ± 2.5       | Pass   |
|                                                                               | 3.80                 | 131             | 0.1566 |             |        |
|                                                                               | 3.23                 | 147             | 0.1751 |             |        |
| Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz |                      |                 |        |             |        |
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |        | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm    |             |        |
| 25                                                                            | 4.37                 | 46              | 0.0244 | ± 2.5       | Pass   |
|                                                                               | 3.80                 | 56              | 0.0298 |             |        |
|                                                                               | 3.23                 | 56              | 0.0298 |             |        |

| Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz  |                      |                 |        |             |        |
|-------------------------------------------------------------------------|----------------------|-----------------|--------|-------------|--------|
| Temperature (℃)                                                         | Power supplied (Vdc) | Frequency error |        | Limit (ppm) | Result |
|                                                                         |                      | Hz              | ppm    |             |        |
| 25                                                                      | 4.37                 | 43              | 0.0230 | ± 2.5       | Pass   |
|                                                                         | 3.80                 | 32              | 0.0171 |             |        |
|                                                                         | 3.23                 | 34              | 0.0183 |             |        |
| Reference Frequency: WCDMA Band II Middle channel=940 channel=1880.0MHz |                      |                 |        |             |        |
| Temperature (℃)                                                         | Power supplied (Vdc) | Frequency error |        | Limit (ppm) | Result |
|                                                                         |                      | Hz              | ppm    |             |        |
| 25                                                                      | 4.37                 | 62              | 0.0329 | ± 2.5       | Pass   |
|                                                                         | 3.80                 | 71              | 0.0378 |             |        |
|                                                                         | 3.23                 | 71              | 0.0380 |             |        |

## 7 Test Setup Photo

Reference to the **appendix I** for details.

## 8 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----