

Q40MRP1006217A

客户	QBIC
型号	TD-1050 PRO
销售	EU/US/ATW
安规审核Safety parts:	
Yes	☐ No ☒

内销中文字体要求高度1.5mm以上	
Yes	☒ No ☐

针对带有UL logo的标签，其厂家须在最小包装上标示UL Recognized Component Mark，公司名称，型号及 UL file no.

条码印刷:
Barcode print:
1. 所有条码需同等级: 6级及以上,
客户有特殊要求除外;

REVISION

VERSION A

版本变更说明:
Version Changed Description:
* 材质改为防刮PET

备注Remark:

xiaoling.zheng
Apr-19-19

嘉捷科技(福清)有限公司
TPV Electronics (Fujian) Co., Ltd.
地址(Add): 中国福建省福清市元洪路上郊
Shangzheng,Yuanhong Road, Fuqing City,
Fujian Province, China
电话(Tel): +86-591-85285555 85285559
传真(Fax): +86-591-85285447
邮编(Postcode): 350301

Serial 编码原则:

SN: XX X XXX X X 0 0 0 0 0 1 (SAMPLE CODE)
1 2 3 4 5 6 7 8 9 10 11 12 13

☐ 第1~2 碼為年份，年 = 公元年 - 1911，取後二碼。

☐ 第3 碼為月份，代號如下
1月=A，2月=B，3月=C，4月=D，5月=E，6月=J
7月=K，8月=L，9月=M，10月=X，11月=Y，12月=Z


☐ 第4~6碼為機櫃，同EAN code後三碼，代號如下
200:TD-1050(銀色) 201:D-1050(銀色) 204:TD-1050(白色) 230:TD-1050 PRO-B(黑色)
202:TD-1050(黑色) 203:TD-1050(紅色) 210:D-1050(黑色) 231:TD-1050 PRO-S(銀色)

☐ 第7 碼為ODM/OEM 廠英文之縮寫，ex. T: TPV

☐ 第8 碼為硬體版(音版為1)

☐ 第9~13 碼為流水號，ex. 00001

範例：2016 年05月生產的TD-1050(銀色)，代工廠TPV，版本1，第100 台。
SN: 0 5 E 2 0 0 T 1 0 0 1 0 0

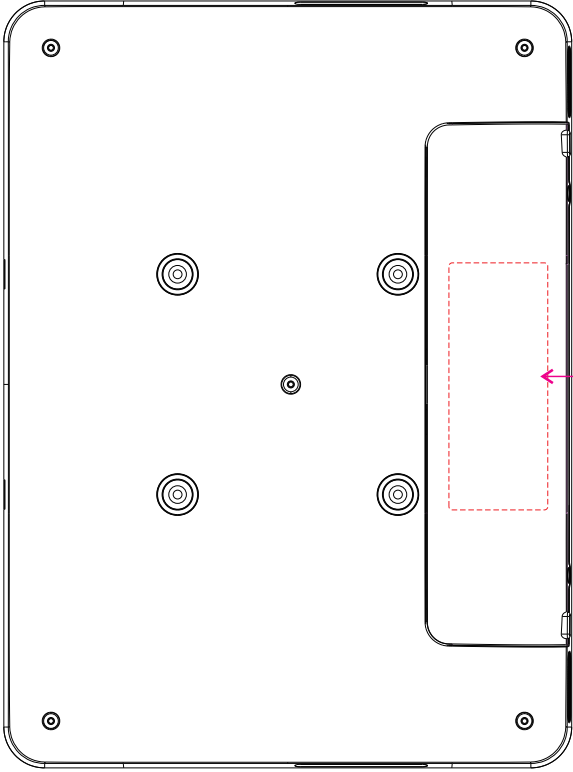

粘貼位置示意图



双频：在SN打印区域后面需要追加Ver.H
单频：在SN打印区域无需Ver.H

请注意，此label需要覆特殊雾膜，
避免无感刮伤

- NOTE:
- 印刷如上圖
 - Printing as the drawing
 - 尺寸:具体见上图所示 (公差: +/-0.2mm), R=1.5mm
 - Dimension as the above drawing (Tolerance +/-0.2mm), R=1.5mm
 - 材质: 50#防刮PET带不干背胶
 - Material: 50#PET with glue on the backside (material must be certified by UL laboratory)
 - 底色: 黑色; 字体颜色: 白色
 - Background color: Black, Fonts color: White
 - 贴附位置: 后盖(如图示)
 6. 黏力: 将label切成25mm宽，一端黏贴于钢板上，以180°方向的力拉胶带另一端，所得拉力即为黏力。用黏力测试仪进行测试。
 - Stickness strength: Cut label into 25mm width, one end paste on the plate, with 180° direction pulling the other end of the tape, the pull is stickness strength. With stickness strength instrument for testing.
 7. 正常耐高温测试: 在钢板上耐高温范围为-20~100℃，在80~100℃保持8小时后不翘角、不分层、不脱落、不起泡等。
 - 在塑胶、纸箱上耐高温范围为-20~65℃，在65℃保持8小时后不翘角、不分层、不脱落、不起泡等。
 - The normal temperature test: The range of temperature on plate is -20 ~ 100 °C. In 80 ~ 100 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 °C.
 8. 耐高温湿度循环测试: 循环条件 (贴在塑胶胶花面 (PET) 贴在塑胶胶花面): 温度-20~65℃，湿度30~90%，时间 96小时后不翘角不分层不脱落不起泡等。
 - Temperature and humidity cycle test: Cycle conditions (stick on texture (PET), stick on texture) In temperature of -20 ~ 65 °C and humidity of 30 ~ 90 % to maintain 96 hours, the label should not be warp, delamination, frothy and so on.
 9. 载切需均匀且印刷不可有溢墨及颜色不均等不良现象。
 - Pricing ink can not have overflow and printing color can not be uneven etc.
 10. 包装方式: 卷状，连接处打齿孔。
 - Packing style: coil and there should be a toothed hole between the link of two pieces
 11. 两张连接处距离3mm，左右边离型纸3mm(公差: +/-0.5mm)
 - 3mm should be left between the link of two pieces. Around the edge of paper distance is 3mm (Tolerance +/-0.5mm)
 12. 内容物由厂内打印，具体内容由业务提供。
 - The content printed by the factory barcode group and the specific content provided by SS.

13. 其它测试要求详见 (FQ-背胶类产品测试检验规格)。

- 1) According to the rule about RoHS of TPV, All raw material and assistant material and assistant material should accord with the rule of RoHS
- 2) All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr at the packing material with the product), should accord with the latest version of RD EMS-01 <<The controlled standard about environment substance for supplier>>.

- 1) 根据TPV推行RoHS的有关规定，所有的原材料及辅助材料必须符合RoHS的有关规定
- 2) 所有原材料的固定物质：如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd) +汞 (Hg) +铅 (Pb) +六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01 《供应商环境管理物质管控标准》的具体限值要求执行

客户Customer

QBIC

型号Model

TD-1050 PRO

销向Sales Area

EU/USA/TW

安规认证Safety parts:

Yes

No

No

No

内销中文字体要求高度1.8mm以上

Yes

No

No

No

针对带有UL logo的标签，其厂家须在最小包装上标示UL Recognized Component Mark

型号及UL file no

条码印刷barcode print:

1. 所有条码等级：c级及以上，客户有特殊要求除外；

REVISION

VERSION A

版本变更说明：Version Changed Description:

备注Remark:

xiaoling.zheng
Apr-19-19

冠捷科技（福清）有限公司TPV Electronics (Fujian) Co., Ltd.
地址(Add): 中国福建省福清市元洪路上郊Shangzheng Yuanhong Road, Fujqing City, Fujian Province, China
电话(Tel): +86-591-85285555 85285559
传真(Fax): +86-591-85285447
邮编(Postcode): 350301

Serial 编码原则：

S/N: XX X XXX X X 0 0 0 0 L (SAMPLE CODE)
1 2 3 4 5 6 7 8 9 10 11 12 13
□ 第1~2 碼為年份，年 = 公元年 - 1911，取後二碼。
□ 第 3 碼為月份，代號如下
1月=A，2月=B，3月=C，4月=D，5月=E，6月=J
7月=K，8月=L，9月=M，10月=X，11月=Y，12月=Z
□ 第 4~6碼為機理，同EAN code後三碼，代號如下
200:TD-1050(銀色) 201:D-1050(銀色) 204:TD-1050(白色) 230:TD-1050 PRO-B(黑色)
202:TD-1050(黑色) 203:TD-1050(紅色) 210:D-1050(黑色) 231:TD-1050 PRO-S(銀色)
□ 第 7 碼為ODM/OEM廠英文之縮寫， ex. T: TPV
□ 第 8 碼為硬體版(首版為1)
□ 第 9~13 碼為流水號， ex. 00001
範例：2016 年05月生產的TD-1050(銀色)，代工廠TPV，版本I，第100 台。
SN: 0 5 E 2 0 0 T 1 0 0 1 0 0

Panel PC/平板电脑

Model/型号: TD-1050 PRO
Input/输入: 12V == 1.5A
FCC ID: 2AF82-TD1050HPO
Plug ☐ EU ☐ UK ☐ US ☒ AU
Type: Ver.H
CE FCC RoHS
CCAF*****
Made in China 中國製造
SN:05E200T100100 Ver.H

70.00 mm

45.00 mm

15.00 mm

雙頻：在SN打印区域后面需要追加Ver.H
单频：在SN打印区域无需Ver.H

NOTE:


1.印刷如上图
2.尺寸具体见上图所示 (公差: +/-0.2mm) R=2mm
Dimension as the above drawing (Tolerance: +/-0.2mm), R=2mm
3.材质: 80#铜板纸不干胶
Material: 80#Coated Paper with glue on the backside (material must be certified by UL laboratory)
4.底色: 白色; 字体颜色: 黑色
Background color: White, Fonts color: Black
5.黏附位置: 个体包装 (如图示)
Stickness strength: Cut label into 25mm width, with 180° direction pulling the other end of the tape, the pull is stickness strength. With stickness strength instrument for testing.
6.黏力: 将label切成25mm宽，一端粘于铜板上，以180°方向的力拉胶带另一端，所得拉力即为黏力，用黏力测试仪进行测试。
7.正常耐温测试: 在铜板上耐温范围为20~100℃，在80~100℃保持8小时后不翘角、不分层、不脱落、不起泡。
The normal temperature test: The range of temperature on plate is -20 ~ 100 °C. In 80 ~ 100 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 °C.
In 65 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on.
8.耐温湿度循环测试: 循环条件 (贴在塑胶吸水面 (PET) 贴在塑胶吸水面): 温度 -20~65℃, 湿度 30~90%, 时间 96小时后不翘角不分层不脱落不起泡。
Temperature and humidity cycle test: Cycle conditions (stick on texture (PET), stick on texture) (in temperature of -20 ~ 65 °C and humidity of 30 ~ 90% to maintain 96 hours, the label should not be warp, delamination, frothy and so on. 9.裁切需均匀且印刷不可有漏墨及颜色不均等不良现象。
Printing ink can not have overflow and printing color can not be uneven etc.
10.包装方式: 卷状，连接处打齿孔。
Packing style: coil and there should be a toothed hole between the link of two pieces
11.两张连接处距离3mm，左右边裁型纸3mm(公差: +/-0.5mm)
3mm should be left between the link of two pieces. Around the edge of paper distance is 3mm (Tolerance: +/-0.5mm)
12.内容由厂内打印，具体内容由业务提供。
The content printed by the factory barcode group and the specific content provided by SS.
13.其它测试要求详见 (FQC-制程类-产品测试检验规格)。

1) 根据TPV推行RoHS的有关规定，所有的原材料及辅助材料必须符合RoHS的有关规定
2) 所有原材料的固定物质：如锡 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及 镉 (Cd) + 汞 (Hg) + 铅 (Pb) + 六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01 《供应链环境物质管控标准》的具体限值要求执行

1) According to the rule about RoHS of TPV, All raw material and assistant material and assistant material should accord with the rule of RoHS
2) All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr (aim at the packing material with the product), should accord with the latest version of RD EMS-01 <<The controlled standard about environment substance for supplier>>.

冠捷科技
VISION INNOVATOR
用心專注 领航视界

Carton label	
客户 Customer	QBIC
型号 Model	TD-1050 PRO
销 向 Sales Area	EU/USA/TW
安規認證Safety parts:	
Yes ☐ No ☒	
內銷中文字體要求高度1.8mm以上	
Yes ☒ No ☐	
针对带有UL logo的标签，其厂家须在最小包装上标示UL Recognized Consequent Mark.  公司名称，型号及 UL file no.	
条码印刷： barcode print: 1. 所有条码等级：C级及以上，客户有特殊要求除外；	
REVISION	
VERSION A 版本变更说明： Version Changed Description:	
备注Remark:	
xiaoling.zheng Apr-19-19	
嘉捷科技（福清）有限公司 TPV Electronics (Fujian) Co., Ltd. 地址(Add)：中国福建省福清市元洪路上郊 Shangzheng,Yuanhong Road, Fuqing City, Fujian Province, China 电话(Tel)：+86-591-85285555 85285559 传真(Fax)：+86-591-85285447 郵編(Postcode)：350301	

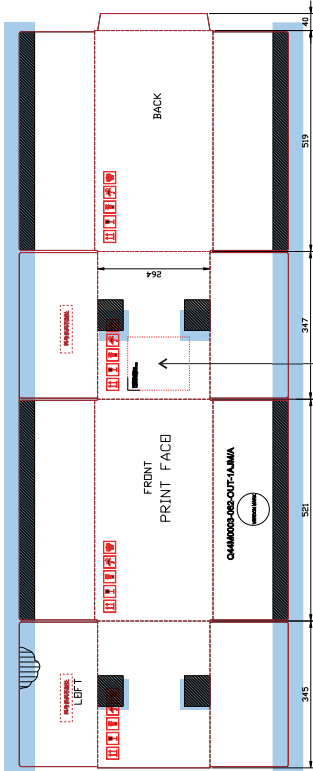

粘貼位置示意图

NOTE:

- 印刷如上图
Printing as the drawing
- 尺寸:具体见上图所示 (公差: +/-0.2mm),R=2mm
Dimension as the above drawing (Tolerance: +/-0.2mm), R=2mm
- 材质: 80#铜板纸不干背胶
Material: 80# Coated Paper with glue on the backside (material must be certified by UL laboratory)
- 底色: 白色; 字体颜色: 黑色
Background color: White, Fonts color: Black
- 贴附位置: 外框(如图示)
Stickness strength: Cut label into 25mm width, one end paste on the plate, with 180° direction pulling the other end of the tape, the pull is stickness strength. With stickness strength instrument for testing.
- 黏力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为黏力。用黏力测试仪进行测试。
The normal temperature test: The range of temperature on plate is -20 ~ 100 °C. In 80 ~ 100 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 °C. In 65 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on.
- 正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。
在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。
- 耐湿度循环测试: 循环条件 (贴在塑胶胶水面) : 温度-20~65°C, 湿度30~90%, 时间 96小时后不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions (stick on texture (PET), stick on texture) in temperature of -20 ~ 65 °C and humidity of 30 ~ 90% to maintain 96 hours, the label should not be warp, delamination, frothy and so on.
- 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象。
Printing ink can not have overflow and printing color can not be uneven etc.
- 包装方式: 卷状, 连接处打齿孔。
Packing style: coil and there should be a toothed hole between the link of two pieces
- 两张连接处距离3mm, 左右边离纸3mm(公差: +/-0.5mm)
3mm should be left between the link of two pieces. Around the edge of paper distance is 3mm (Tolerance: +/-0.5mm)
- 内容物由厂内打印, 具体内容由业务提供。
The content printed by the factory barcode group and the specific content provided by SS.
- 其它测试要求详见 (FQ-背胶类产品测试检验规格)。

- 根据TPV推行RoHS的有关规定, 所有的原材料及辅助材料必须符合RoHS的有关规定
- 所有原材料的固定物质: 如锡 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd) + 汞 (Hg) + 铅 (Pb) + 六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01 《供应链环境管理物质管控标准》的具体限值要求执行

- According to the rule about RoHS of TPV, All raw material and assistant material and assistant material should accord with the rule of RoHS
- All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr (aim at the packing material with the product), should accord with the latest version of RD EMS-01 <<The controlled standard about environment substance for supplier>>.

125.00 mm

145.00 mm

Panel PC 平板电脑

Model/型號: TD-1050 PRO

Q'ty/數量: 5PCS

Made in China/ 中國製造



双频: 在SN打印区域后面需要追加Ver. H
单频: 在SN打印区域无需Ver. H