

FCC ID: 2BE8H-W723F

Product Name:	Magnetic 5 in 1 wireless charger
Trade Mark:	AC ISLAND
Model No.:	W7-23F W7-23G, W7-23H, W7-23I, W7-23J, W7-23K, W7-23L, W7-23M
Model Difference:	All models except model name and appearance color. The internal structure is the same as the circuit.
Transmitting mode	Keep the EUT in continuously wireless charging mode
Power supply:	Input: DC5V---2.91A(35W) Output: Magnetic Wireless Charger: 5W/7.5W /10W/15W Apple Watch Charger: 3W/5W, AirPods Charger: 5W USB-A: 5V-2.4A, USB-C: 5V-2.4A (Total: 12W; Smart Distribution)
Date of Receipt:	Nov. 15, 2024
Test Date:	Nov. 15, 2024 - Nov. 29, 2024
Date of Report:	Nov. 29, 2024

Mode1.: On Mode(Magnetic Wireless Charger: 15W) Mode2.: On Mode(Magnetic Wireless Charger: 10W)

Mode3.: On Mode(Magnetic Wireless Charger: 7.5W) Mode4.: On Mode(Magnetic Wireless Charger: 5W)

Mode5.: On Mode(Apple Watch Charger: 3W) Mode6.: On Mode(Apple Watch Charger: 5W)

Mode7.: On Mode(AirPods Charger: 5W)

Mode8.: On Mode(Magnetic Wireless Charger: 15W+Apple Watch Charger: 3W+ AirPods Charger: 5W

Mode9.: On Mode(Magnetic Wireless Charger: 15W+Apple Watch Charger: 5W+ AirPods Charger: 5W

Mode10.: On Mode(Magnetic Wireless Charger: 10W+Apple Watch Charger: 3W+ AirPods Charger: 5W

Mode11.: On Mode(Magnetic Wireless Charger: 10W+Apple Watch Charger: 5W+ AirPods Charger: 5W

Mode12.: On Mode(Magnetic Wireless Charger: 7.5W+Apple Watch Charger: 3W+ AirPods Charger: 5W

Mode13.: On Mode(Magnetic Wireless Charger: 7.5W+Apple Watch Charger: 5W+ AirPods Charger: 5W

Mode14.: On Mode(Magnetic Wireless Charger: 5W+Apple Watch Charger: 3W+ AirPods Charger: 5W

Mode15.: On Mode(Magnetic Wireless Charger: 5W+Apple Watch Charger: 5W+ AirPods Charger: 5W

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

All of the test modes were tested and passed, with only mode 9 showing the worst mode, documented in this report.

RF Exposure Evaluation

1 Measuring Standard

According to Part 2.1091 RF exposure is calculated. According KDB 680106 D01 WirelessPower Transfer v04.

2 Requirements

- ① According to the item 5 of KDB 680106 v04:
- ② Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3 Test Setup

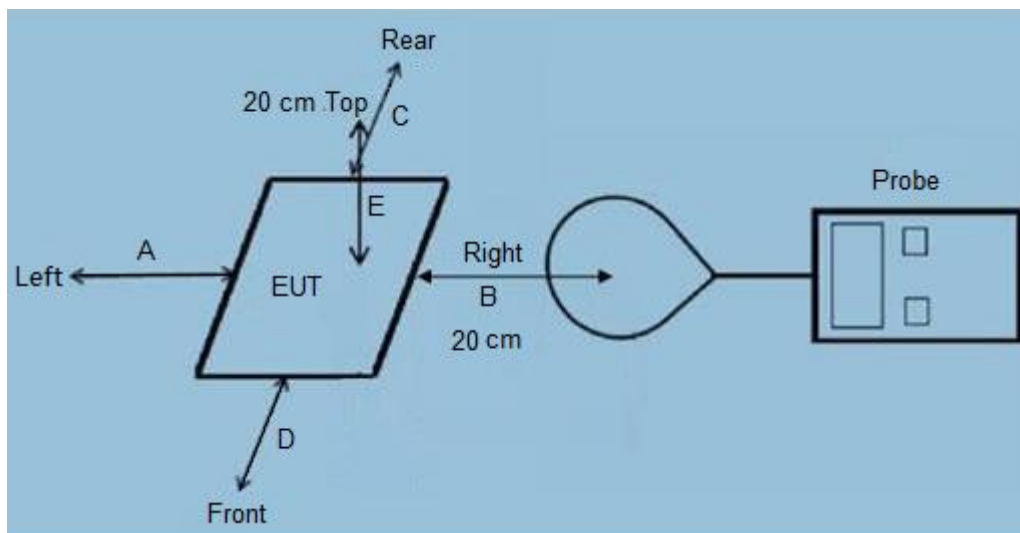

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 v04.

Remark: The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

5 Description of Support Units

Mobile phone (Provide by test lab): Manufacturer: SAMSUNG Model: Galaxy S21 5G	Watch (Provide by test lab): Manufacturer: Apple Model: Series 6
Headset (Provide by test lab): Manufacturer: Apple Model: AirPods Pro	Adapter (Provide by test lab): Manufacturer: XIAOMI Model: AD65G I/P: AC 100-240V 50/60Hz O/P: DC 5V/3A, DC 9V/3A, DC 10V/5A, DC 12V/3A, DC 15V/3A, DC 20V/3.25A

6 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	June. 25 2024	June. 26 2025
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	June. 25 2024	June. 26 2025
Field Probe	ETS	HI-6105	/	June. 25 2024	June. 26 2025
Laser Data Interface	ETS	HI-6113	/	June. 25 2024	June. 26 2025

7 Test Uncertainty

E-Filed Strength(1Hz-400kHz)

E-Filed Strength: $\pm 0.08V/m$

H-Filed Strength(1Hz-400kHz)

H-Filed Strength: $\pm 0.02A/m$

μT

μT : ± 0.01

Note: The field intensity value A/m in the report is converted from μT , and the formula is as follows:

$$\mu T \text{ to } A/m \quad A/m = \frac{\mu T}{1.25}$$

8 Test Result

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (V/m)
0.115-0.205	0.16	0.11	0.13	0.15	614

E-Filed Strength at 20 cm from the top of the EUT (V/m)

Frequency Range (MHz)	Test Position E	Limits (V/m)
0.115-0.205	0.16	614

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.115-0.205	0.07	0.15	0.09	0.14	1.63

H-Filed Strength at 20 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.115-0.205	0.13	1.63

9 Test Set-up Photo

