



FCC Certification Report for the
LA3020 WLAN PC Card
Class II Permissive Change

EXHIBIT 4

RF EXPOSURE INFO



Antenna List by FCC ID

Network Systems Organization

FCC ID: **H9PLA3020**

WLAN PC Card, 2 Mbps, Duo

Output Power: 250 mW

Grant Date	Ant #:	Model	Symbol P/N	Mfg	Mfg P/N
11/25/98					
	01	Plane	50-21900-008	Tecom	505042C(48IN)
	02	Pipe Bomb 11"x4'	50-11901-048P	Cushcraft	S2403BHPS48RBN
	02.1	Pipe Bomb 11"x15'	50-11901-180P	Cushcraft	S2403BHPS180RB
	03	Rubber Duck	50-21900-007	Cushcraft	RBN2400SXR
	04	Yagi	ML-2499-YGA1-	Cushcraft	PC2415RBN240
	05	Patch	ML-2499-PTA1-	UK	S2406P72PRBN
	06	Panel	ML-2499-PNA1-	Tecom	ML-2499-PNA1-01
	07	End Cap "C"	10-20511-01	Tecom	822319
	08	4140	50-11900-001	Dorne & Margol	DR10-2
	09	4640	21-17486-01	AIL Systems Suf	21-17486-01
	10	2040	10-17577-01	Tecom	703117
	11	6140	10-35305-01	UK	
	12	6840	10-32290-01	UK	
	13	1040	10-32447-01	Tecom	
	14	HS Dipole	50-21900-030	Huber Suhner	9090.16.0001
	15	Parapolic Grid	ML-2499-PGA1-	Conifer	26T-2400
	16	Vocollect MMCX	50-21900-025	Austin Antenna	200215
	17	Criticare MMCX	50-21900-032	Tecom	703443-2
	18	Corner Patch	ML-2499-DLA1-	Tecom	505126C
	19	Ceiling Panel	ML-2499-SD24-	UK	
12/14/99					
	01	Vocollect MMCX	50-21900-025	Austin Antenna	200215
Applied For					
	01	DASH 3000	50-21900-036	NCC	N2400MMCX1
	02	XP	50-21900-024	Tecom	703611
	03	Amtrak Omni	50-21900-027	Cushcraft	SQ2403PSNF
	04	Oniel MMCX	50-21900-031	Tecom	703620-2



RF Exposure Antenna Summary

Network Systems Organization

FCC ID: **H9PLA3020**

WLAN PC Card, 2 Mbps, Duo

Source Based

Mobile DC Factor: 1.000

Output Power: 250 mW

Class II Permissive Change

Portable DC Factor: 0.680

Mobile Antennas

Ant No	Model	Symbol P/N	Type	Gain (dBi)	Cabel Loss (dB)	Pout (dBm)	MPE (cm)	TR Status	Device Type
03.	Amtrak Omni	50-21900-027	Dipole	3.0	0.00	23.98	6.3	Tested	Mobile

Portable Antennas

Ant No	Model	Symbol P/N	Type	Gain (dBi)	Cabel Loss (dB)	Pout (dBm)	EIRP (mW)	TR Status	Device Type	Tx Limited
01.	DASH 3000	50-21900-036	Dipole	2.2	0.62	21.14	146.9	Tested	Hand Held	150 mW
02.	XP	50-21900-024	Slot	0.0	0.58	23.40	148.9	Tested	Hand Held	

Body Worn Antennas

Ant No	Model	Symbol P/N	Type	Gain (dBi)	Cabel Loss (dB)	Pout (dBm)	EIRP (mW)	TR Status	Device Type	Tx Limited
04.	Oniel MMCX	50-21900-031	Slot	0.0	0.37	23.61	156.1	Tested	Body Worn	

Antenna Gain listed without cable

TR Status refers to whether the antenna was tested. If not refer to the directed antenna test data

Duty Cycle Factors are applied to MPE and EIRP

Tx Limited configurations are for low power versions of the radio. See the specific antenna exhibit for detail


Thursday, May 18, 2000 01:33 PM

Page 1 of 1

Dash 3000 Antenna

The **Dash 3000** antenna is 1.6 dBi omnidirectional in azimuth plane. It is mounted internally on the top end of the terminal as shown in the attached photo. The **Dash 3000** uses a MMCX connector. In its use it can be carried along side a patient on a gurney from place to place. It is used in a portable device. This configuration will only be used with a low power version of the radio that is limited to 100 mW nominal 150 mW maximum transmit power. The maximum EIRP is limited to 150 mW for this configuration so according to OET Bulletin 65 Supplement C table 1. special instructions or warnings are not needed.

<i>Location</i>	Hand Held Device
<i>Pattern</i>	Omni
<i>Type</i>	Dipole
<i>Max Gain</i>	1.6 dBi
<i>Physical</i>	See attached dwg
<i>Cable</i>	RG-178
<i>Symbol P/N</i>	50-21900-036
<i>EIRP</i>	See summary tbl

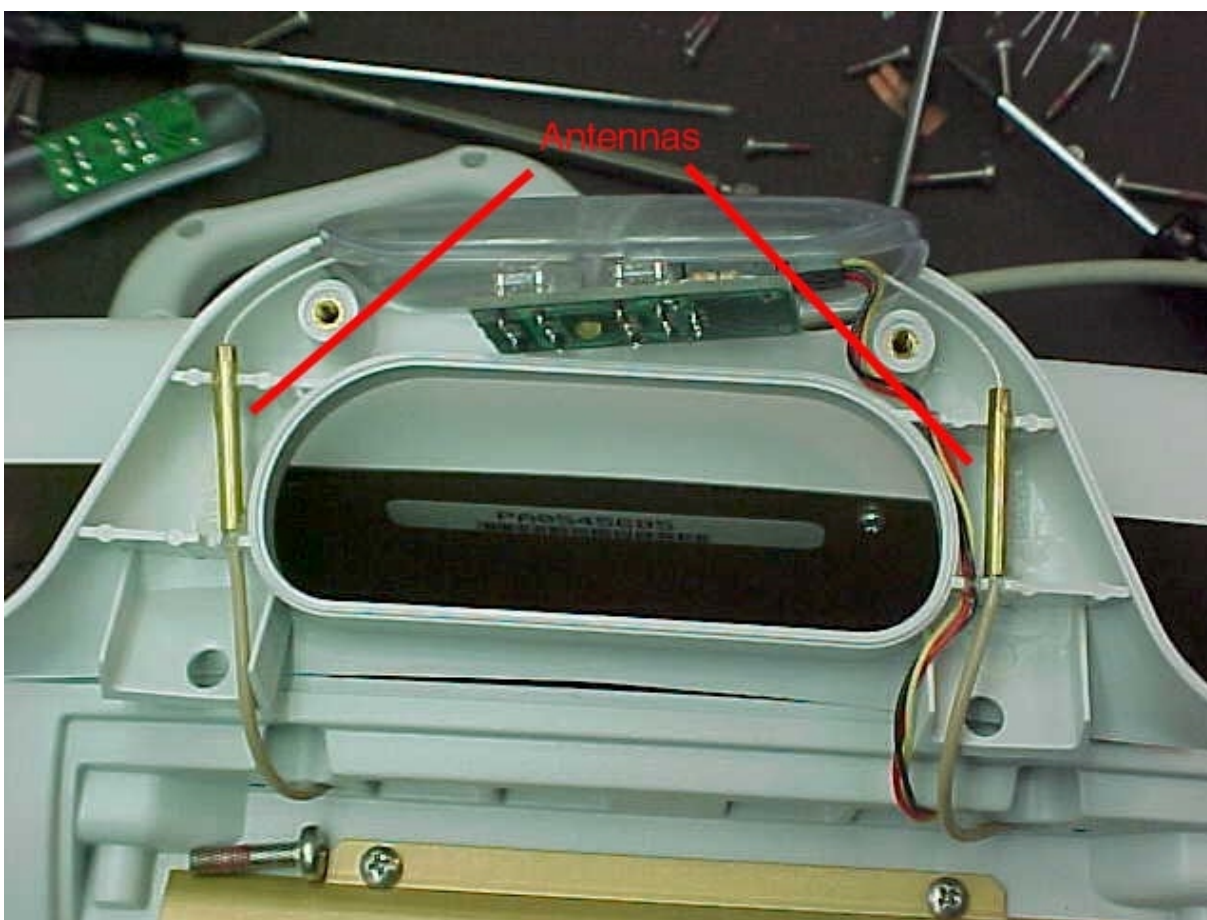

Antenna Installed in Device



Terminal Use Photo

NCC TECHNICAL DATA BULLETIN

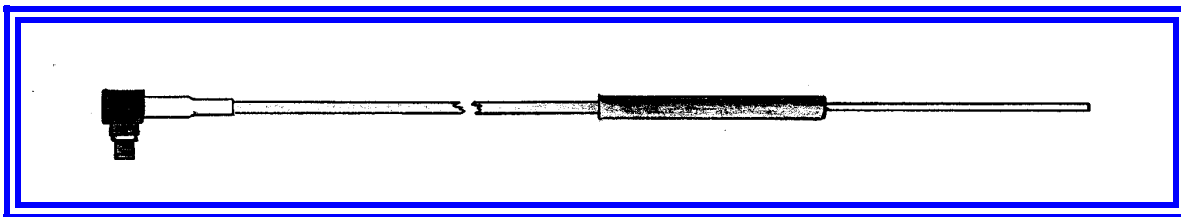


Illustration - Model N2400MMCX1

Description

2.4 GHz Antenna with Integrated Transmission Line and MMCX Connector

SPECIFICATIONS

Frequency Range - 2.4 GHz - 2.5 GHz

Bandwidth - 40 MHz <1.5:1

VSWR - <1.5:1 at Resonance

Impedance - Nominally 50 Ohms

Gain - 2 dBi

Connector - Right Angle MMCX Plug

NCC, Inc.
18385 Parkman-Nelson Road
Parkman, Ohio 44080

Telephone (440) 548-5384
Fax (440) 548-5404


GE Medical Systems
[GE Home](#)
[GE Medical Systems Home](#)
[Catalog](#)
[Community](#)
[About](#)
[Clinical Areas](#)
[Site Map](#)
[Contact Us](#)
[Help](#)
[PRODUCTS & SERVICES](#)
[EDUCATION](#)
[JOBS](#)
[PRESS ROOM](#)
[Y2K](#)

GE Marquette

Dash 3000 Monitor General Information

[General Information](#) | [Specifications](#) | [Certification](#) | [Warranty](#)

Built to move; featured to stay put.

Advanced capabilities allow you to reliably move a patient throughout your enterprise, while feature-rich, no-compromise performance at the bedside helps maximize equipment utilization.



Weighing no more than 12 pounds, regardless of configuration, this lightweight monitor is made to move with a patient. The compact, ergonomic package, complete with integral power supply, allows easy handling. And drop-test rugged design means the DASH 3000 is made to withstand your demanding portable applications.

An extensive feature set enables you to create a portable monitoring solution capable of meeting a wide range of acuity demands. Many features you would only expect to find as options elsewhere are standard on the DASH 3000 - including 3 and 5 lead ECG, pulse oximetry, noninvasive blood pressure, two temperatures and respiration.

The DASH 3000 also accommodates two invasive blood pressures, mainstream CO₂ monitoring, and your choice of full arrhythmia, true 12-lead ECG with enhanced ST segment analysis, cardiac output and PA wedge procedures.

In addition to 24-hour trending with alarm histories, productivity-enhancing software includes online help, and drug dose, cardiac and pulmonary calculations.

And to ensure easy viewing of the data, the DASH 3000 features a full 8.4" screen, in your choice of color or monochrome. It displays up to 10 parameters and 6 waveforms, and an alternate screen configuration further enhances screen utilization and visibility.

Products & Services

[X-Ray](#)
[MRI](#)
[CT](#)
[Nuclear/PET](#)
[Ultrasound](#)
[IIS](#)
[GE Marquette](#)
[News](#)
[Products](#)
[Real World Results](#)
[Service](#)
[Resources](#)
[Jobs](#)
[Refurbished Equipment](#)
[Accessories & Supplies](#)
[Financial Services](#)
[Services](#)
[Software](#)

As part of the new DASH family of monitors, the DASH 3000 is field upgradable and expansion enabled to leverage your investment over time. To ensure continuity of care, it supports 2-way wired or wireless networking, can import HIS demographic and lab data and can view other patients. And it looks and feels like other GE Marquette Medical Systems monitors, enabling users to confidently and efficiently transition from one monitor to the next, throughout your facility.

Plus, the DASH 3000's smart battery management system incorporates two, commercially available, user-accessible batteries. They feature a 4-5 hour run time and recharge in 2-4 hours, either internally or with a charger. Because the batteries can be changed one at a time, without loss of function, the DASH 3000 is specifically designed to help you maintain monitoring continuity.

Related Topics

- [News: GE Marquette Medical Systems Announces the Availability of its New Dash[®] 2000 And Dash[®] 3000 Configured Monitors](#)

[Privacy Policy](#) | [Terms and Conditions](#) © 1997-2000 General Electric Company

Amity BFA / Amity MMCX Antenna

The Amity antenna is 0 dBi omni-directional in azimuth plane. It is available with either a MuRata BFA or MMCX connector. It is mounted internally on the top end of the terminal as shown in the attached photo. In its use it would be within 20 cm of a persons hand but more than 20 cm from the users body. It is used in portable devices. The following RF exposure information is included in a prominent place in the device's user manual to inform the user of safety issues as required by OET Bullitin 65, Supplement C for EIRP greater than 200 mW.

<i>Location</i>	Hand Held Device
<i>Pattern</i>	Omni
<i>Type</i>	Slot
<i>Max Gain</i>	0 dBi
<i>Physical</i>	See attached dwg
<i>Cable</i>	MXYP75, RG-178
<i>Symbol P/N</i>	703611-1, 2

“Important Note: To comply with FCC RF exposure requirements, this hand-held device is approved for operation in a user’s hand when there is 20 cm or more between the antenna and everyone’s body.”






Antenna Installed in Device



Terminal Use Photo

ZONE	LTR	DESCRIPTION	DATE	APPROVED
.	A	9.33±.12 WAS TBD±.12 ADDED Ø.125 MAX & .68±.09 ADDED STRAIN RELIEF SLEEVE (PICTURE CHG) ADDED FOAM SUPPORT (PICTURE & CALLOUT) REDRAWN WO 2654	11-5-99 JL	

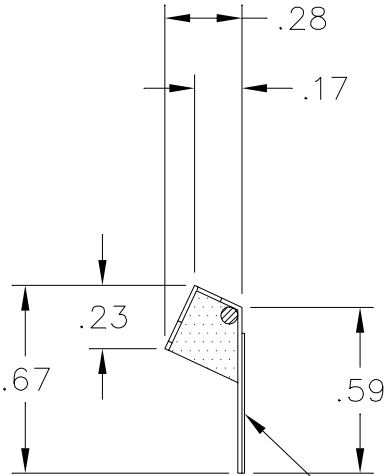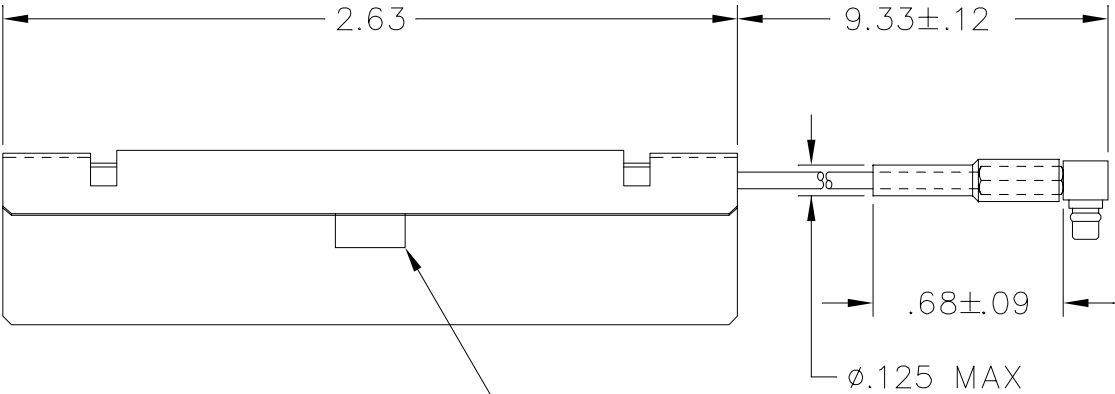


.005 THK X .50 WIDE
FILM ADHESIVE

FOAM SUPPORT

SPECIFICATIONS

FREQUENCY:	2.4-2.485 GHZ
VSWR	2.0:1 MAX
GAIN	0dBi NOMINAL
POLARIZATION	LINEAR
CONNECTOR:	MMCX MALE

4. SHARP CORNERS & EDGES .005 MAX.
3. FINISH SHALL BE UNIFORM AND EXHIBIT NO EVIDENCE OF CORROSION OR OXIDATION WHEN VIEWED WITH THE UNAIDED EYE. EDGE PLATING ON CUT OR SHEARED SURFACES IS NOT REQUIRED.
2. ALTERNATE:
MATERIAL: CRS 1008, .015 THK.
FINISH: BRIGHT TIN PLATE PER MIL-T-10727A, TYPE 1, ELECTRO DEPOSITED .00010-.00025 IN.
1. MATERIAL: ELECTROLYTIC TIN PLATED STEEL SHEET, .015 THK.



NOTES : UNLESS OTHERWISE SPECIFIED

PMIC		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: .XX ± .03 .XXX ± .010 ANGLES ± 0°30' MACHINED SURFACE ROUGHNESS 125 ✓ REMOVE BURRS, SHARP EDGES R.005-.015 MACHINED FILLETS R.005-.015 DIMENSIONS ARE AFTER PLATING. MACHINED DIA'S ON COMMON CENTERLINE CONCENTRIC WITHIN .005 TIR. INTERPRET PER ANSI Y14.5M-1982.		CONTRACT NUMBER		 TECOM INDUSTRIES INC. 9324 TOPANGA CYN BLVD CHATSWORTH, CA. 91311 TECHNICAL EXCELLENCE COMMITTED TO QUALITY			
				CONTRACTOR					
				DRAWN BY J. LOWE	DATE 10-11-99	TITLE ANTENNA, SLOT, 2.4 GHZ			
				CHECKER	MFG ENGR				
				QA	ENGR BI				
823283	CP90-065	HOLE TOLERANCES:		PRGM MGR	ENGR	SIZE C	CAGE CODE 52791	DWG NO 703611	
NEXT ASSY	USED ON	.040 - .128 +.003 -.001	.515 - .750 +.008 -.001			SCALE 2/1	UNIT WT .	SHEET 1 OF 1	
		.136 - .228 +.004 -.001	.765 - 1.000 +.010 -.002						
		.234 - .500 +.006 -.001	1.031 UP +.015 -.002						
APPLICATION		MATL ENGR	APPROVAL						

Amtrak Omni




The **Amtrak Omni** antenna is 3 dBi omni-directional in azimuth plane. The **Amtrak Omni** uses a type N connector. This antenna will only be sold to Amtrak. Installation will be by Amtrak employees that have access to train car documentation for specific cable routing. This antenna will be installed into 16 – 20 different styles of computer cars with custom cable assemblies for each style of car. The cable assembly will connect the rack mounted radio through and past structural components of the car to the antenna mounted externally on the top side of the car. In this configuration it would be farther than 20 cm from a persons body. It is used with mobile devices.

<i>Location</i>	Horizontal Surface
<i>Pattern</i>	Omni
<i>Type</i>	Folded Dipole
<i>Max Gain</i>	3 dBi
<i>Physical</i>	See attached dwg
<i>Cable</i>	None
<i>Symbol P/N</i>	SQ2403PSNF
<i>MPE Distance</i>	See summary table



Antenna Photograph

REVISION			
LTR	DESCRIPTION	DATE	INITIAL
AA	ORIGINAL	1-23-00	SKL

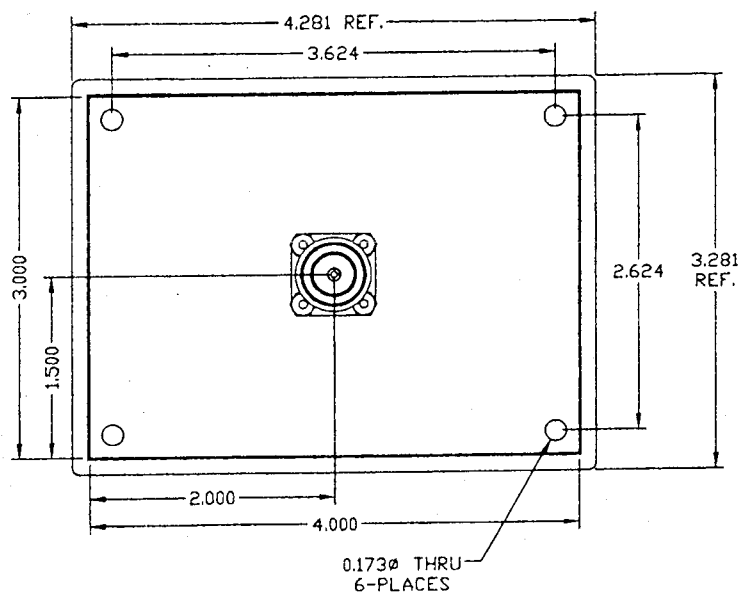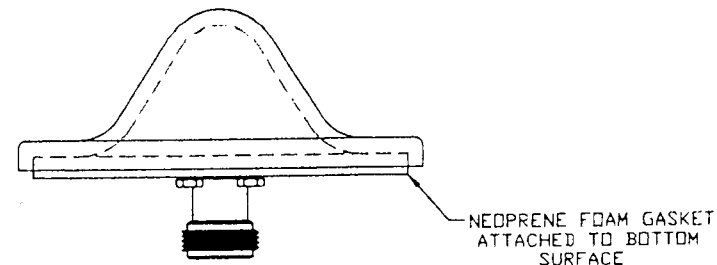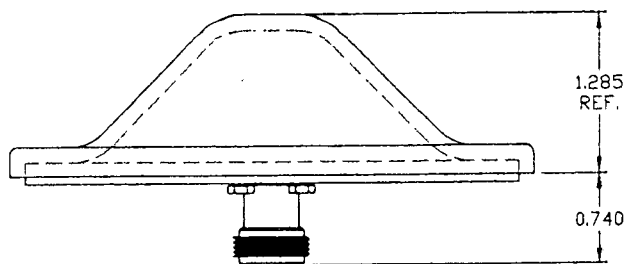

Parameter	Performance
Frequency	2.4-2.5 GHz
Gain	3 dBi Min.
Polarization	Vertical
VSWR	1.5:1 Max.
Horizontal Pattern	Omni Directional
Vertical 3 dB Beamwidth	60°
RF Connector	Type N Female
Power	50 Watts
Weight	0.25 lb
Radome Color	Gray

CONTROLLED
DOCUMENT

CONFIDENTIAL
© 1999, Cushcraft Corporation. Information contained in this document is of a
proprietary and/or legally privileged nature. It may not be reproduced without
express written permission of Cushcraft Corporation, Manchester, NH.

MATERIAL:	DRAWN S JOHNSON	DATE 1-23-00	CUSHCRAFT 48 PERIMETER ROAD MANCHESTER NH 03108	
	ENGINEER <i>David H. Johnson</i>	DATE <i>1/23/00</i>		
DO NOT SCALE DRAWING	ENGINEERING MGR <i>C. Allen</i>	DATE <i>1/23/00</i>	TITLE: SQ2403PSNF MOUNTING & OUTLINE	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ANGLES ± 0.5° FRACTIONS ± 1/64" .XX ± 0.010" .XXX ± 0.005"	FINISH:		DRAWING NO. SQ2403PSNFM0	REV AA
			SCALE 1:1	SHEET 1 OF 1

Oneil BFA / Oneil MMCX Antenna

The **Oneil** antenna is 0 dBi omnidirectional in azimuth plane. It is available with either a MuRata BFA or MMCX connector. It is mounted as an internal antenna on the O'Neil MicroFlash series of portable belt worn printers. In its use it would be within 5 cm of a users body. It is used in portable devices.

<i>Location</i>	Body worn
<i>Pattern</i>	Omni
<i>Type</i>	Slot
<i>Max Gain</i>	0 dBi
<i>Physical</i>	See attached dwg
<i>Cable</i>	MXYP75 or RG-178
<i>Symbol P/N</i>	50-21900-023 50-21900-031
<i>EIRP</i>	See Summary Tbl

Note: This antenna is only to be used with a transmitter that produces an EIRP of less than 200 mW. For an EIRP of more than 200 mW a SAR test must be performed.



Antenna Installation Photo



Device use Photograph.

