

FCC and ISED Test Report

Apple Inc
Model: A3137



In accordance with FCC 47 CFR Part 15C,
ISED RSS-247 and ISED RSS-GEN
(2.4 GHz Bluetooth BDR/EDR)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014,
USA

FCC ID: BCGA3137

IC: 579C-A3137

COMMERCIAL-IN-CONFIDENCE

Document 75960487-13 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve Marshall	Senior Engineer	Authorised Signatory	29 August 2024

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Lauren Walters	29 August 2024	

FCC Accreditation

553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation

28798/UK0003 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2023, ISED RSS-247: Issue 3 (2023-08) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2024 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	5
1.6	Identification of the EUT	5
1.7	EUT Modification Record	6
1.8	Test Location	7
2	Test Details	8
2.1	Restricted Band Edges.....	8
2.2	Frequency Hopping Systems - Average Time of Occupancy	33
2.3	Frequency Hopping Systems - Channel Separation.....	50
2.4	Frequency Hopping Systems - Number of Hopping Channels	67
2.5	Frequency Hopping Systems - 99% & 20 dB Bandwidth.....	84
2.6	Maximum Conducted Output Power	164
2.7	Authorised Band Edges	181
2.8	Spurious Radiated Emissions	205
3	Measurement Uncertainty	221



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	29-August-2024

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2023 ISED RSS-247: Issue 3 (2023-08) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Start of Test	25-April-2024
Finish of Test	12-July-2024
Name of Engineer(s)	Ahmed Al Derdiri, Colin Brain, Ioan-Alexandru Bogatu, Morsalin Hossain, David Hill, Jayvir Makwana, Ian Hart and Manohar Thota
Related Document(s)	ANSI C63.4 (2014) ANSI C63.10 (2020) KDB 662911 D01 v02r01



Summary of

summary of the tests

1.3

Brief Results

A brief carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	FCC Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz Bluetooth BDR/EDR						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.3	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2020)
2.2	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Average Time of Occupancy	Pass	ANSI C63.10 (2020)
2.3	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Channel Separation	Pass	ANSI C63.10 (2020)
2.4	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Number of Hopping Channels	Pass	ANSI C63.10 (2020)
2.5	15.247 (a)(1)	5.1	6.7	Frequency Hopping Systems - 99% & 20 dB Bandwidth	Pass	ANSI C63.10 (2020)
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2020) KDB 662911 D01 v02r01
2.7	15.247 (d)	5.5	-	Authorised Band Edges	Pass	ANSI C63.10 (2020)
2.8	15.209 and 15.247 (d)	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020)

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a desktop computer.

1.4.2 Test Modes

The EUT's 2.4 GHz Bluetooth radio supports SISO (Single Input/Single Output) operation on three different cores (Core 0, 1, and 2). It also supports MIMO (Multiple Input/Multiple Output) beamforming operation on Cores 0+1. The EUT supports Basic Rate and Enhanced Data Rate modes for FHSS operation.

Core 0 and core 1 also operate at two power settings: low power "iPA" and high power "ePA", with dedicated core 2 only supporting the lower power mode. The EUT uses different output powers per core dependent on how many cores are used.

After preliminary investigations, conducted tests on the EUT and Radiated Band Edge were performed in the following modes:

SISO modes:

- DH5 - iPA - Core 1
- 2-DH5 - iPA - Core 1
- 3-DH5 - iPA - Core 1
- DH5 - iPA - Core 2
- 2-DH5 - iPA - Core 2
- 3-DH5 - iPA - Core 2
- DH5 - ePA - Core 1
- 2-DH5 - ePA - Core 1
- 3-DH5 - ePA - Core 1

MIMO modes:

- DH5 - iPA - Core 0 + Core 1
- 2-DH5 - iPA - Core 0 + Core 1
- 3-DH5 - iPA - Core 0 + Core 1
- DH5 - ePA - Core 0 + Core 1
- 2-DH5 - ePA - Core 0 + Core 1
- 3-DH5 - ePA - Core 0 + Core 1

Spurious Radiated Emissions tests were limited to the modes shown below, with the device configured to operate at maximum output power. As this was deemed to be worst case.

SISO mode:

- DH5 - iPA - Core 2

MIMO modes:

- DH5 - ePA - Core 0 + Core 1
- DH5 - iPA - Core 0 + Core 1



1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U. FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all tests the EUT was put into a continuous transmit/receive test mode with the chipset manufacturer's test commands. These ran the specified modulation types on either a fixed single channel or in hopping mode, to ensure the measured signals were representative.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Dedicated Core	2400 to 2480	1.10	1.31
Core 0	2400 to 2480	2.40	1.32
Core 1	2400 to 2480	2.60	1.37

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3137			
Serial Number	Hardware Version	Software Version	Firmware
H6D001F73D	REV1.0	24A81452a	22.1.65.459
G5022YM6RR	REV1.0	24A81452a	22.1.65.459
LQ9QKVW0H6	REV1.0	24A81452a	22.1.65.459
FV5VYV72RL	REV1.0	24A81452a	22.1.65.459
M42K4610G2	REV1.0	24A81452a	22.1.65.459

Table 4



1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3137, Serial Number: FV5VYV72RL			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3137, Serial Number: M42K4610G2			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3137, Serial Number: LQ9QKVW0H6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3137, Serial Number: H6D001F73D			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3137, Serial Number: G5022YM6RR			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5



1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth BDR/EDR		
Restricted Band Edges	Ahmed Al Derdiri, Colin Brain, Ioan-Alexandru Bogatu and Morsalin Hossain	UKAS
Frequency Hopping Systems - Average Time of Occupancy	David Hill and Jayvir Makwana	UKAS
Frequency Hopping Systems - Channel Separation	David Hill and Jayvir Makwana	UKAS
Frequency Hopping Systems - Number of Hopping Channels	David Hill and Jayvir Makwana	UKAS
Frequency Hopping Systems - 99% & 20 dB Bandwidth	David Hill and Jayvir Makwana	UKAS
Maximum Conducted Output Power	David Hill and Jayvir Makwana	UKAS
Authorised Band Edges	Ahmed Al Derdiri, Colin Brain, Ioan-Alexandru Bogatu and Morsalin Hossain	UKAS
Spurious Radiated Emissions	Ahmed Al Derdiri, Ian Hart, Manohar Thota and Morsalin Hossain	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-247, Clause 3.3
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A3137, S/N: LQ9QKVW0H6 - Modification State 0
A3137, S/N: FV5VYV72RL - Modification State 0

2.1.3 Date of Test

25-April-2024 to 21-June-2024

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.5.2.6.

These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	22.6 - 23.8 °C
Relative Humidity	35.8 - 50.5 %


2.1.6 Test Results

2.4 GHz Bluetooth BDR/EDR



iPA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	DH5	2402	2390	54.83	40.29
Static	2-DH5	2402	2390	55.63	40.36
Static	3-DH5	2402	2390	54.85	40.36
Static	DH5	2480	2483.5	53.82	41.42
Static	2-DH5	2480	2483.5	53.69	41.87
Static	3-DH5	2480	2483.5	54.08	41.79

Table 7 - SISO Restricted Band Edge Results

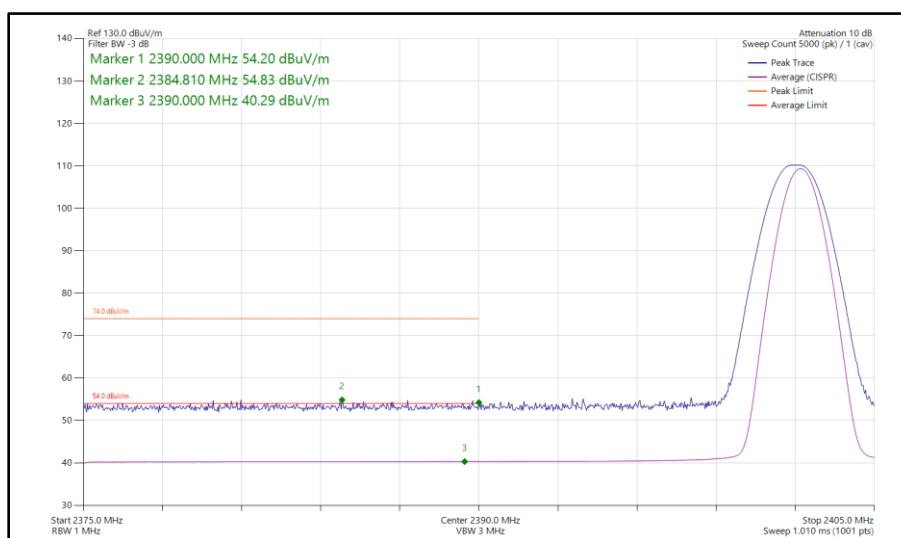

**Figure 1 - Bluetooth DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2390 MHz**



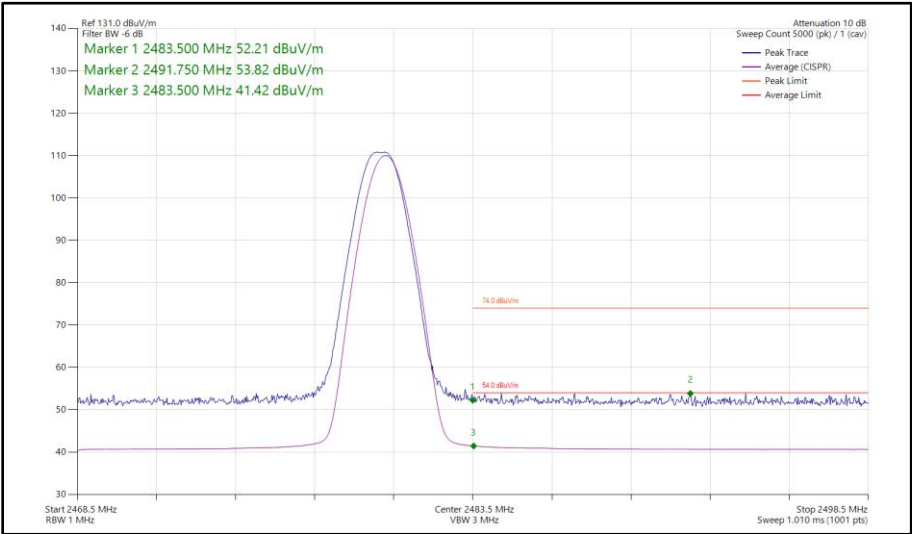


Figure 4 - Bluetooth DH5, SISO, Core 0 - 2480 MHz
Band Edge Frequency 2483.5 MHz


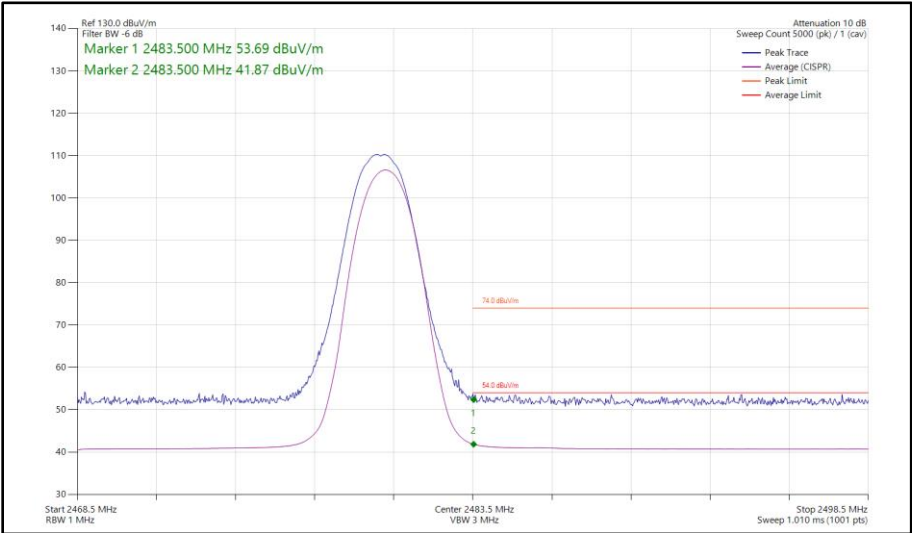


Figure 5 - Bluetooth 2-DH5, SISO, Core 0 - 2480 MHz
Band Edge Frequency 2483.5 MHz



**Figure 6 - Bluetooth 3-DH5, SISO, Core 0 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

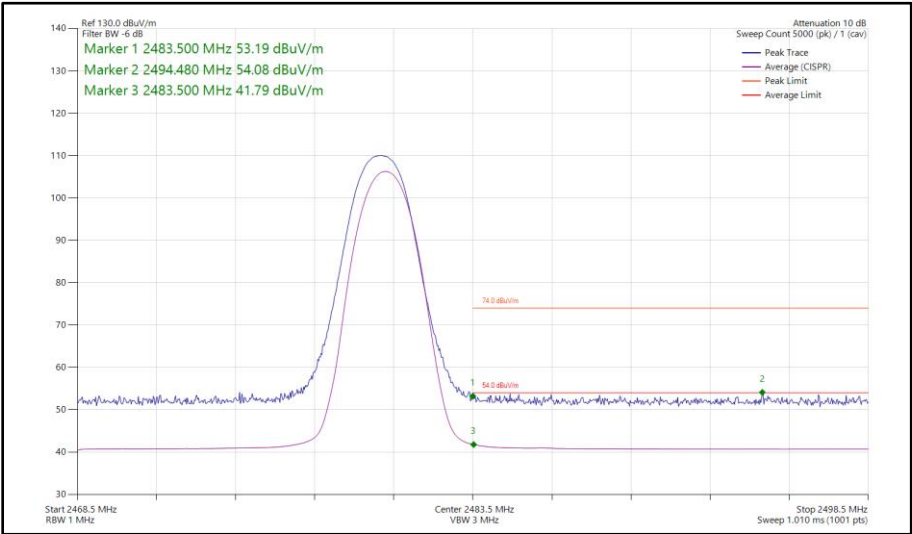

iPA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	DH5	2402	2390	55.42	40.47
Static	2-DH5	2402	2390	55.17	40.54
Static	3-DH5	2402	2390	55.37	40.55
Static	DH5	2480	2483.5	53.56	41.20
Static	2-DH5	2480	2483.5	54.49	42.14
Static	3-DH5	2480	2483.5	54.89	42.12

Table 8 - SISO Restricted Band Edge Results

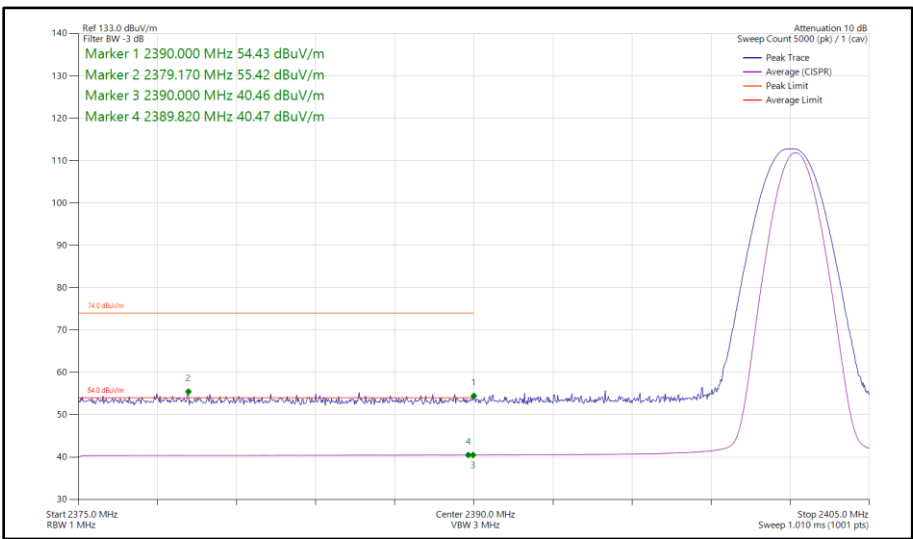


Figure 7 - Bluetooth DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz



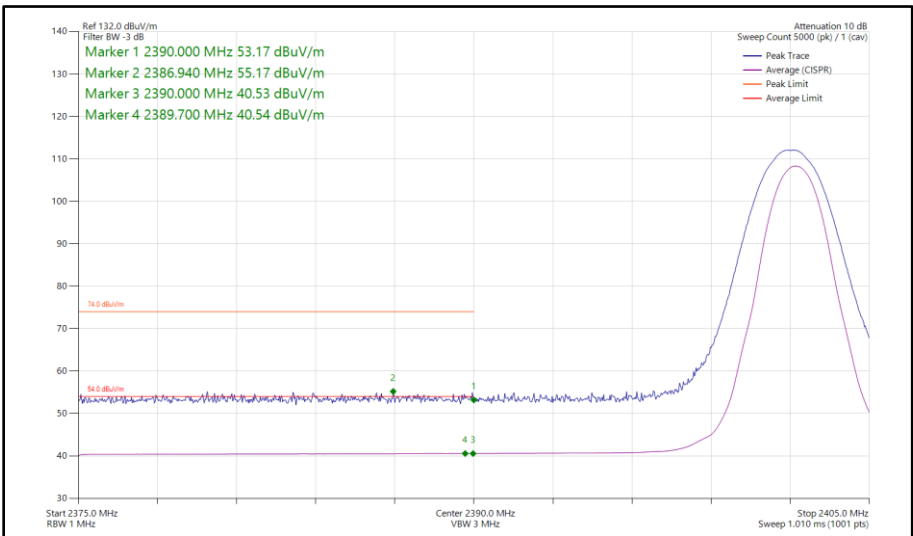



Figure 8 - Bluetooth 2-DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz

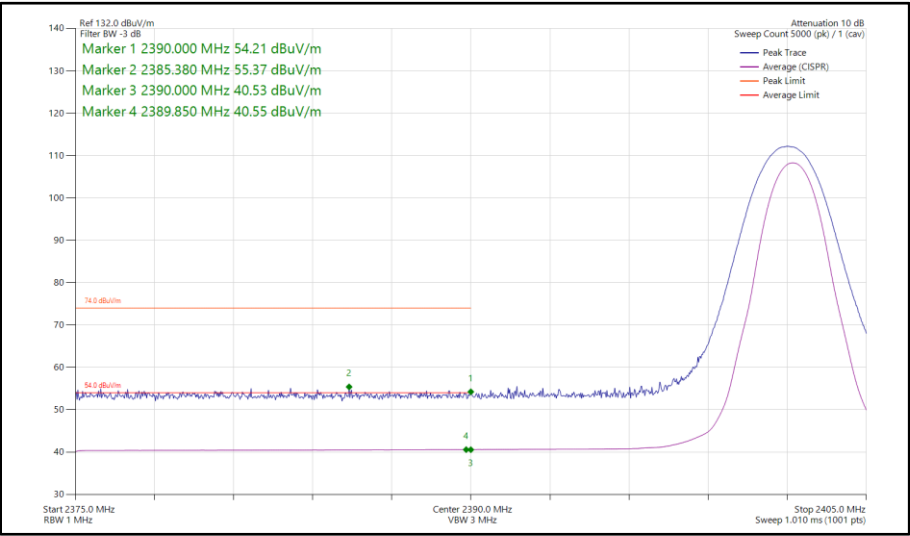


**Figure 9 - Bluetooth 3-DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz**

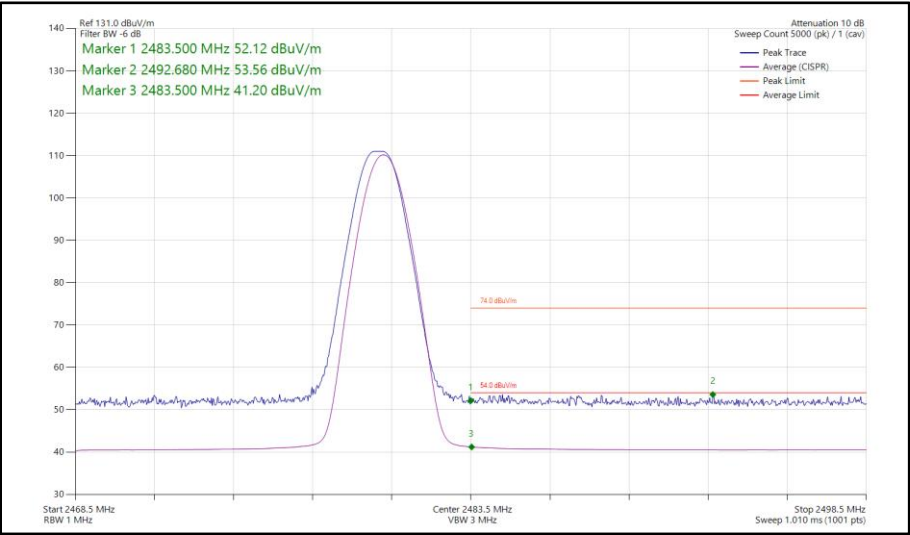

**Figure 10 - Bluetooth DH5, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

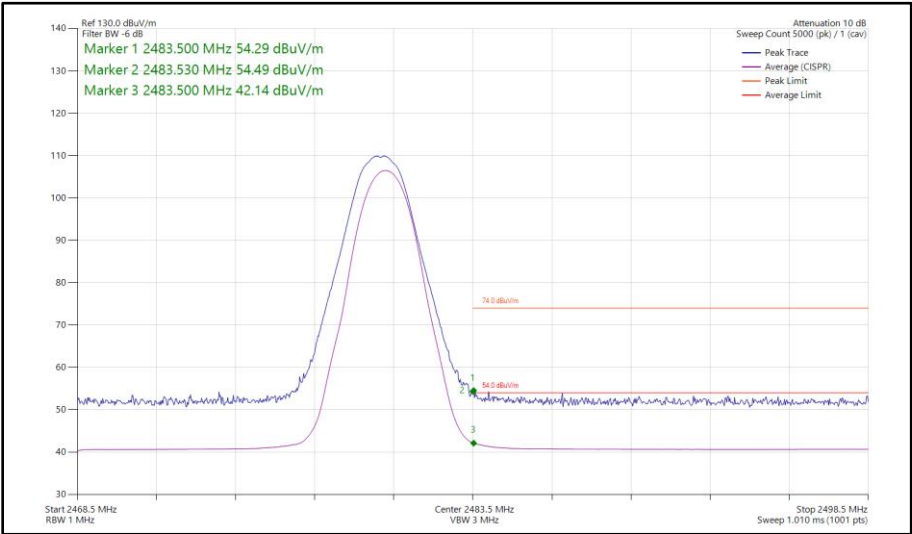

**Figure 11 - Bluetooth 2-DH5, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

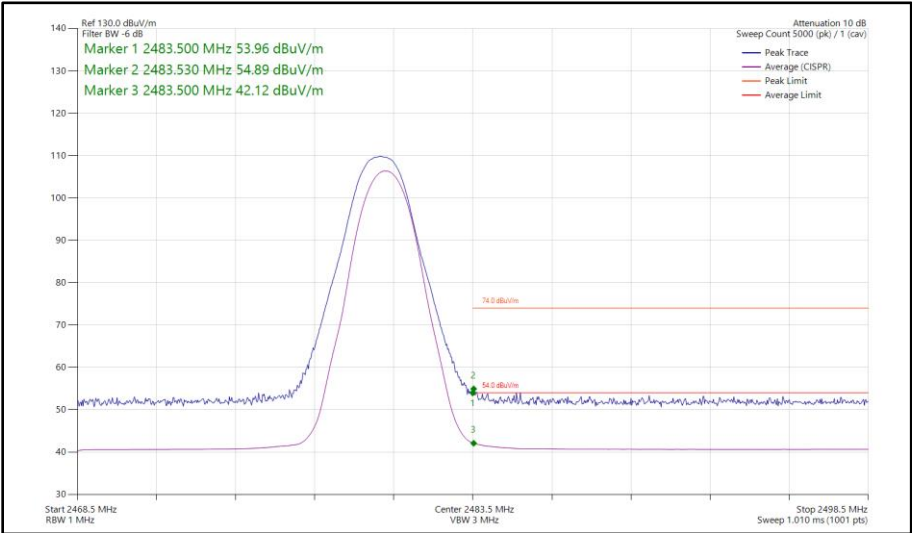


**Figure 12 - Bluetooth 3-DH5, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**


iPA - Core 2 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	DH5	2402	2390	55.26	40.19
Static	2-DH5	2402	2390	54.81	40.20
Static	3-DH5	2402	2390	55.62	40.19
Static	DH5	2480	2483.5	53.24	40.86
Static	2-DH5	2480	2483.5	53.52	41.49
Static	3-DH5	2480	2483.5	55.02	41.61


Table 9 - SISO Restricted Band Edge Results

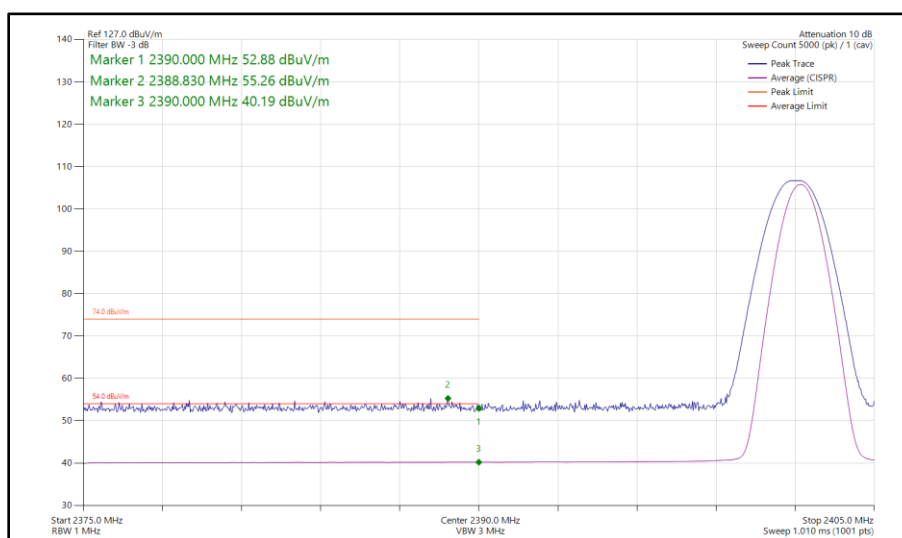


**Figure 13 - Bluetooth DH5, SISO, Core 2 - 2402 MHz
Band Edge Frequency 2390 MHz**

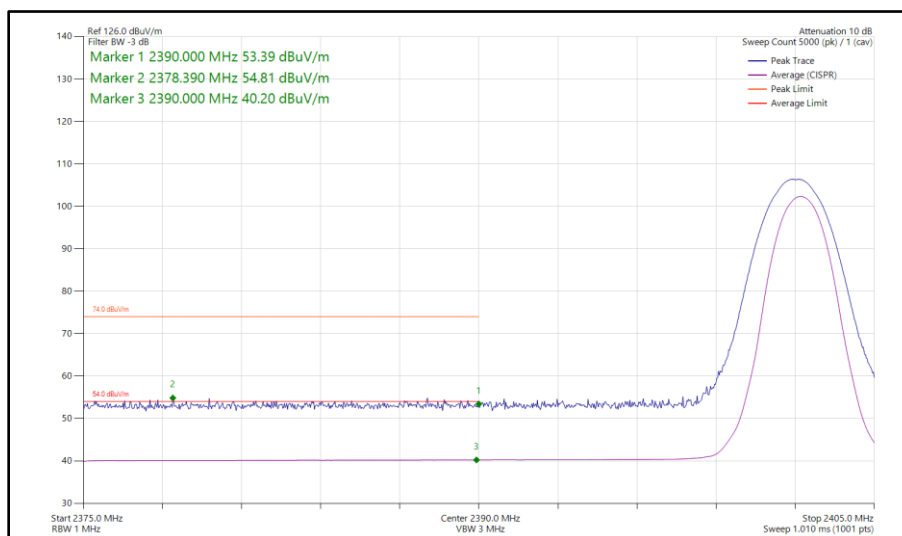


**Figure 14 - Bluetooth 2-DH5, SISO, Core 2 - 2402 MHz
Band Edge Frequency 2390 MHz**

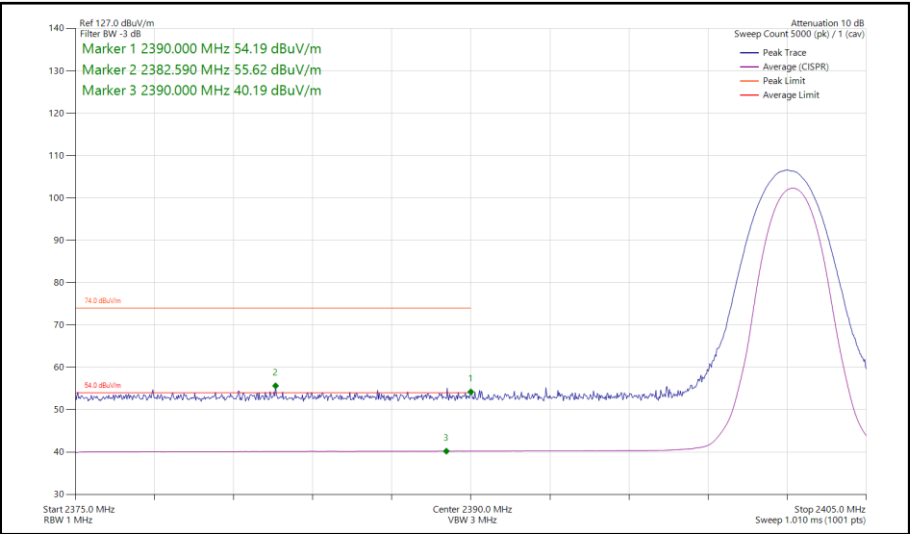


**Figure 15 - Bluetooth 3-DH5, SISO, Core 2 - 2402 MHz
Band Edge Frequency 2390 MHz**

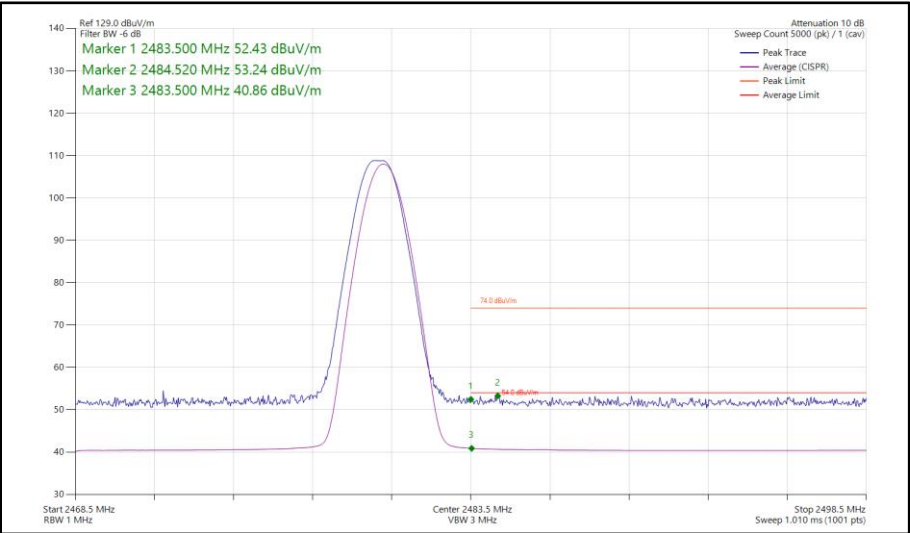

**Figure 16 - Bluetooth DH5, SISO, Core 2 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

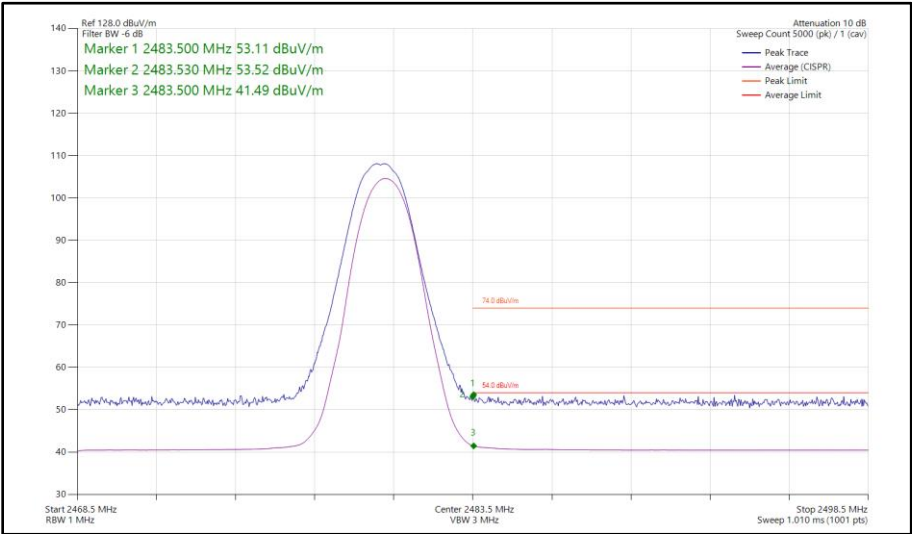

**Figure 17 - Bluetooth 2-DH5, SISO, Core 2 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

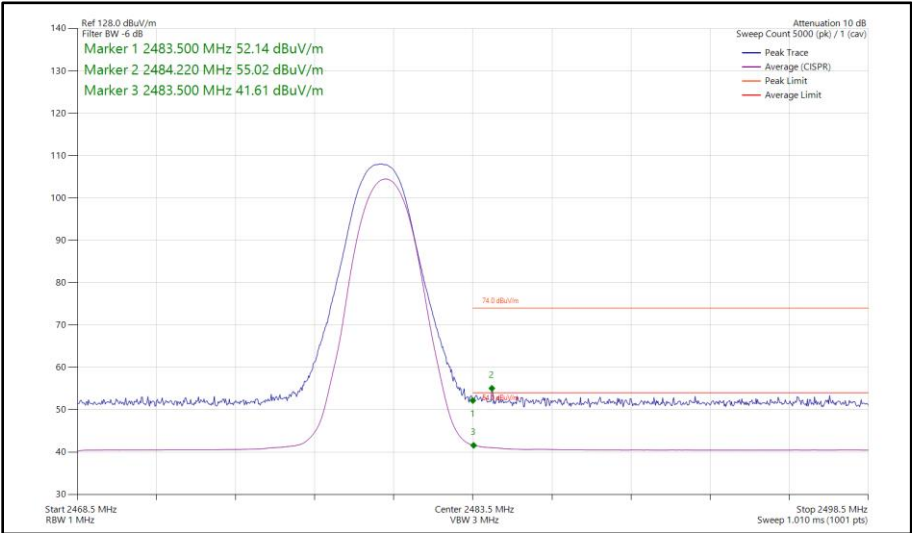

**Figure 18 - Bluetooth 3-DH5, SISO, Core 2 - 2480 MHz
Band Edge Frequency 2483.5 MHz**



iPA - Core 0 - Core 1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	DH5	2402	2390	54.93	40.49
Static	2-DH5	2402	2390	54.93	40.51
Static	3-DH5	2402	2390	54.86	40.50
Static	DH5	2480	2483.5	54.88	41.80
Static	2-DH5	2480	2483.5	54.36	41.82
Static	3-DH5	2480	2483.5	55.09	42.06

Table 10 - MIMO Restricted Band Edge Results

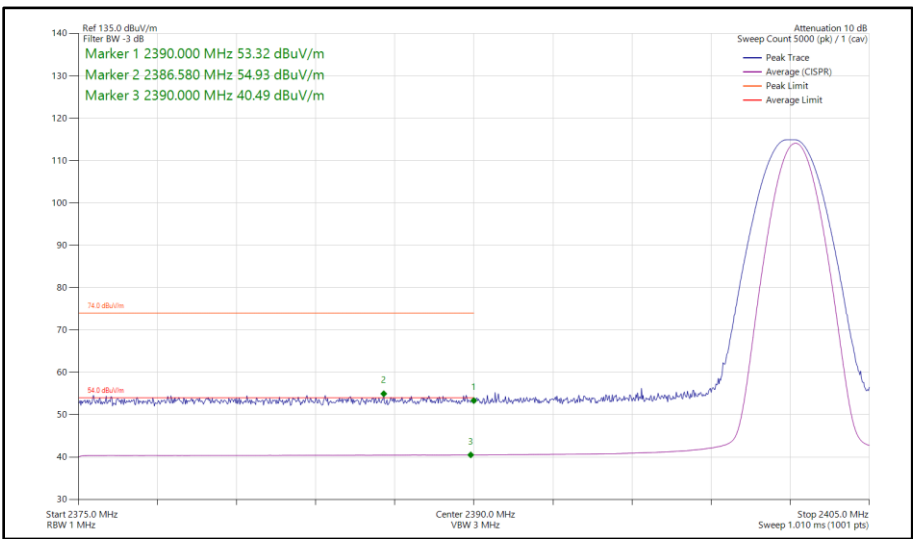


Figure 19 - Bluetooth DH5, MIMO, Core 0 - Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz



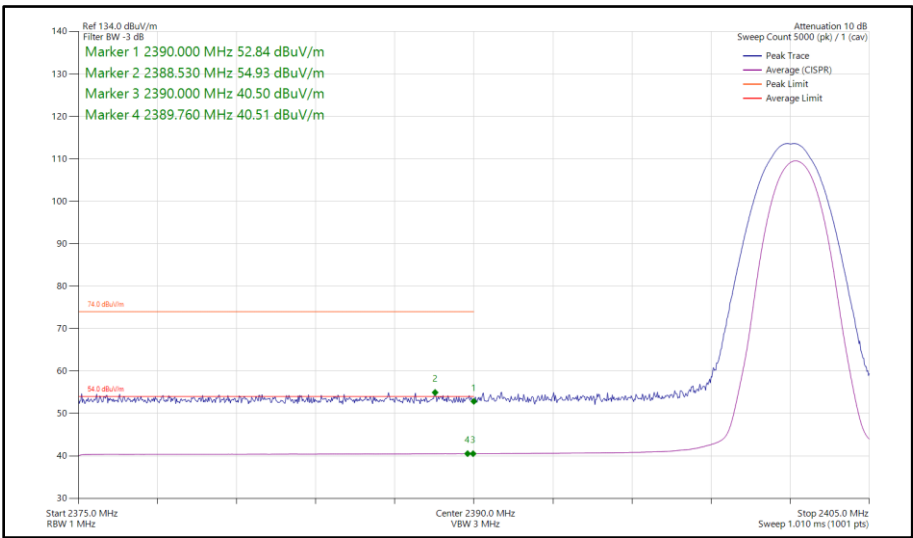


Figure 20 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz

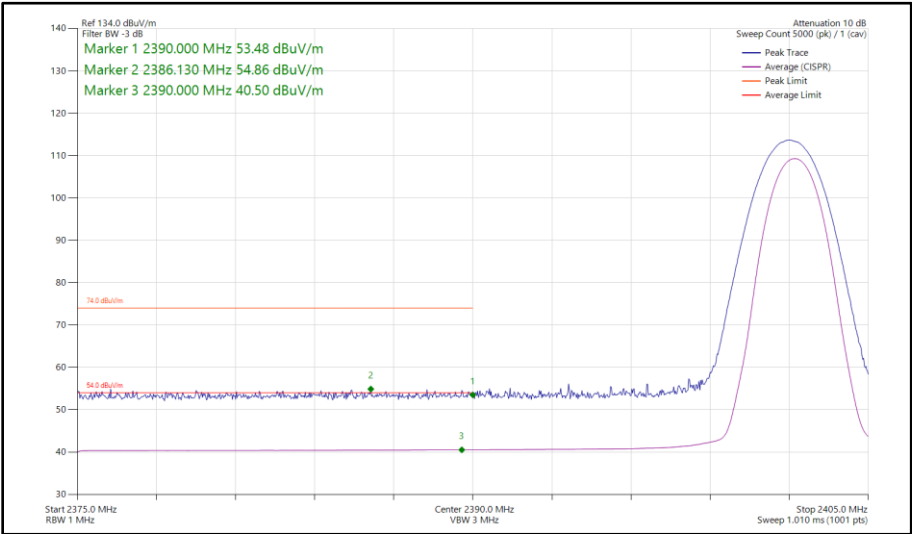

**Figure 21 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz**

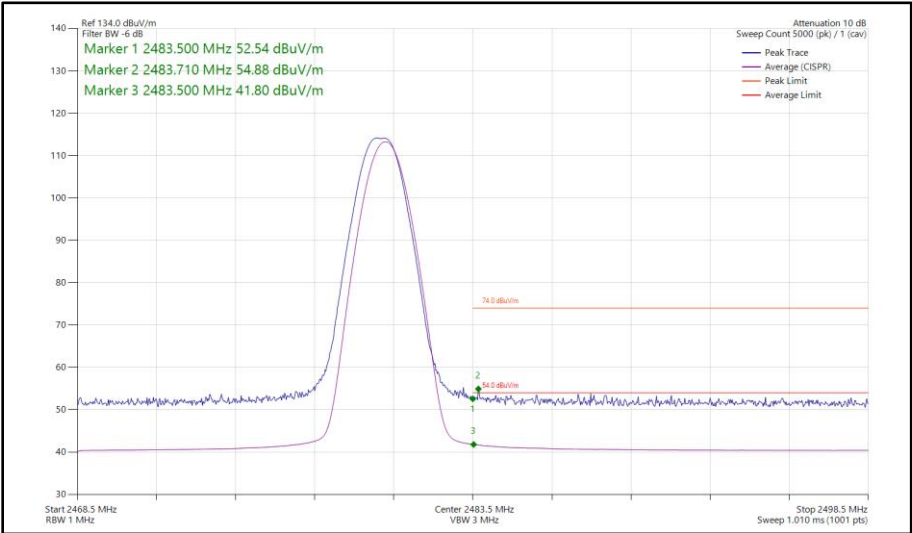

**Figure 22 - Bluetooth DH5, MIMO, Core 0 - Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

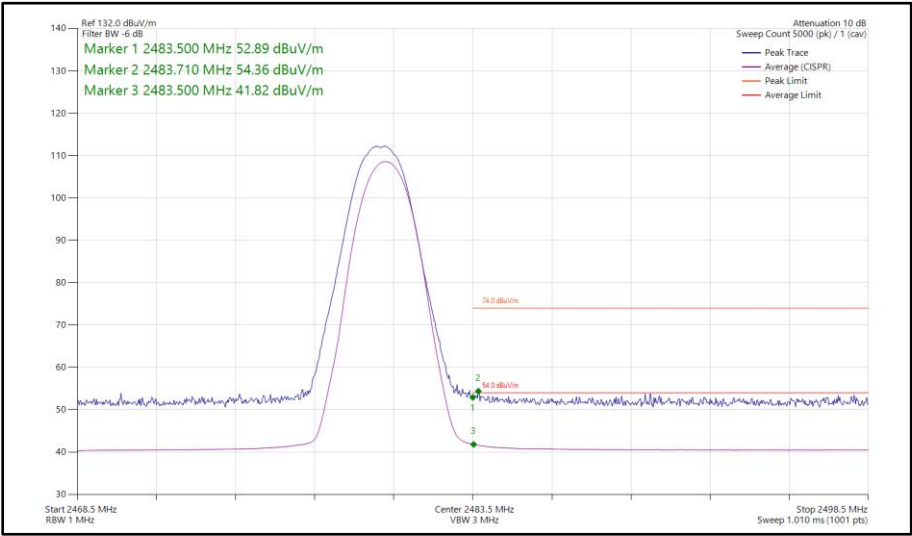


Figure 23 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

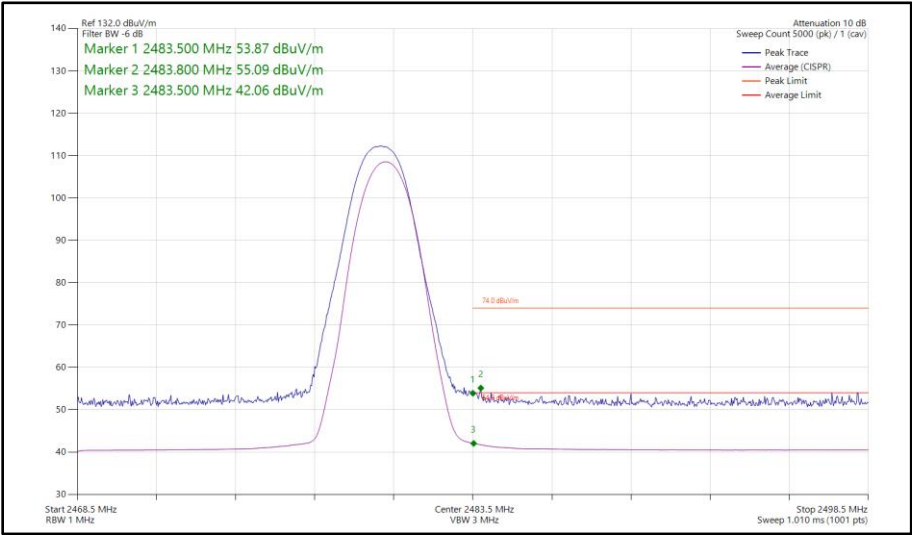


Figure 24 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz



ePA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	DH5	2402	2390	56.26	41.59
Static	2-DH5	2402	2390	56.11	41.40
Static	3-DH5	2402	2390	55.91	41.69
Static	DH5	2480	2483.5	57.44	45.18
Static	2-DH5	2480	2483.5	61.43	49.39
Static	3-DH5	2480	2483.5	63.03	50.26

Table 11 - SISO Restricted Band Edge Results

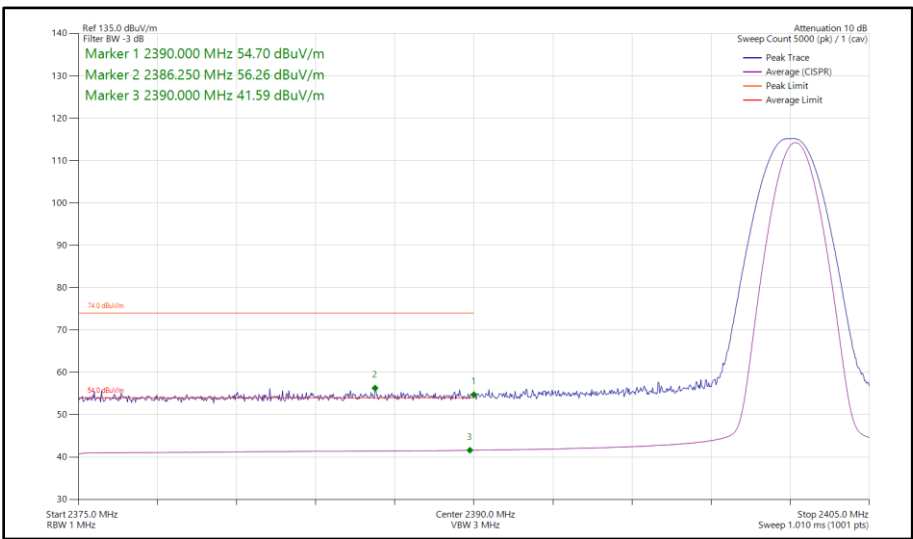


Figure 25 - Bluetooth DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2390 MHz

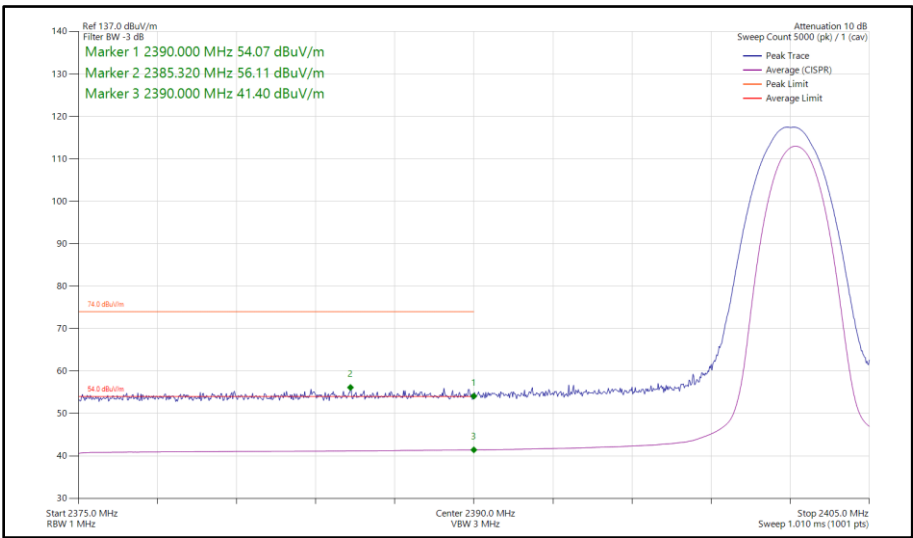


Figure 26 - Bluetooth 2-DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2390 MHz

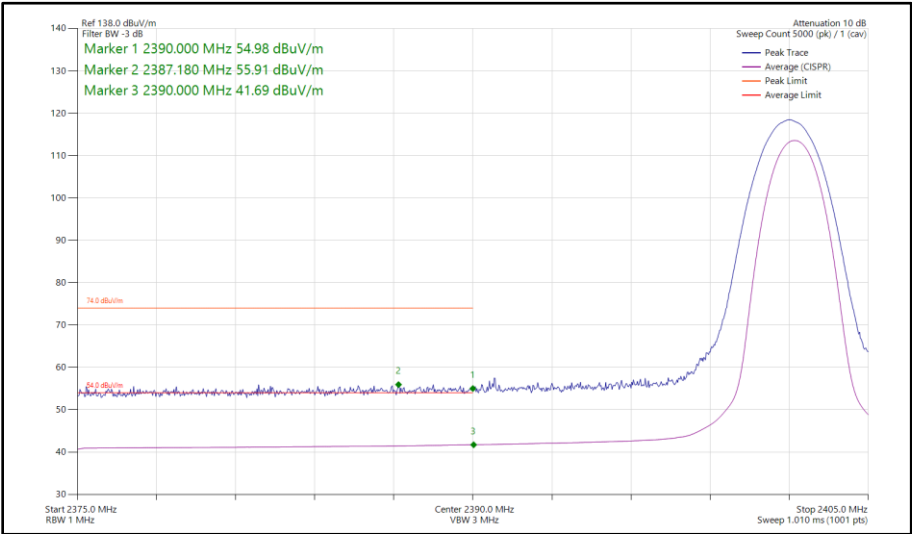


Figure 27 - Bluetooth 3-DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2390 MHz



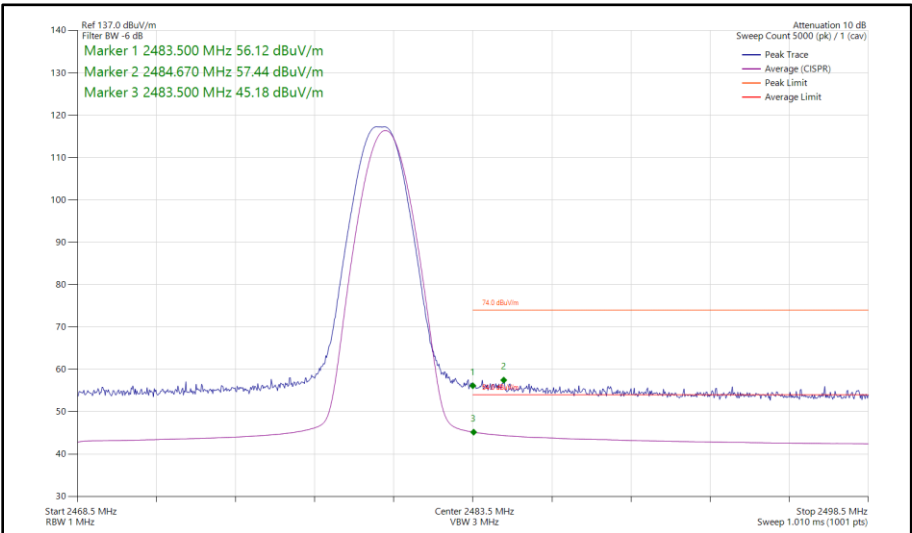


Figure 28 - Bluetooth DH5, SISO, Core 0 - 2480 MHz
Band Edge Frequency 2483.5 MHz

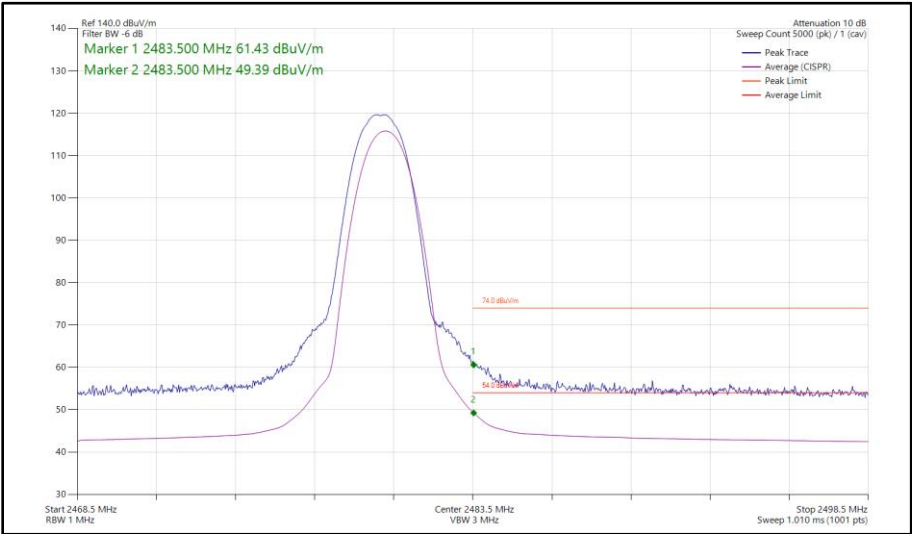

**Figure 29 - Bluetooth 2-DH5, SISO, Core 0 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

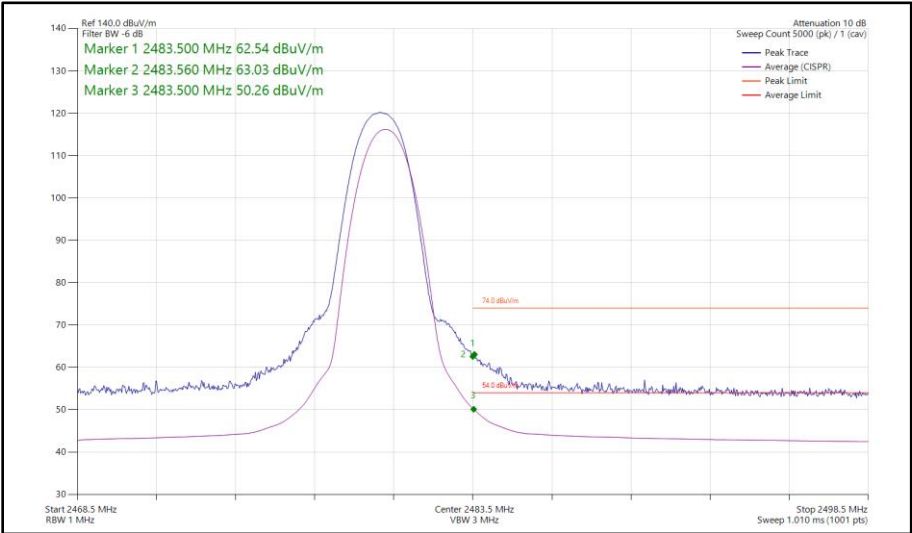

**Figure 30 - Bluetooth 3-DH5, SISO, Core 0 - 2480 MHz
Band Edge Frequency 2483.5 MHz**



ePA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	DH5	2402	2390	57.16	42.83
Static	2-DH5	2402	2390	56.94	42.32
Static	3-DH5	2402	2390	57.52	42.41
Static	DH5	2480	2483.5	56.40	44.48
Static	2-DH5	2480	2483.5	59.98	47.63
Static	3-DH5	2480	2483.5	61.18	48.24

Table 12 - SISO Restricted Band Edge Results

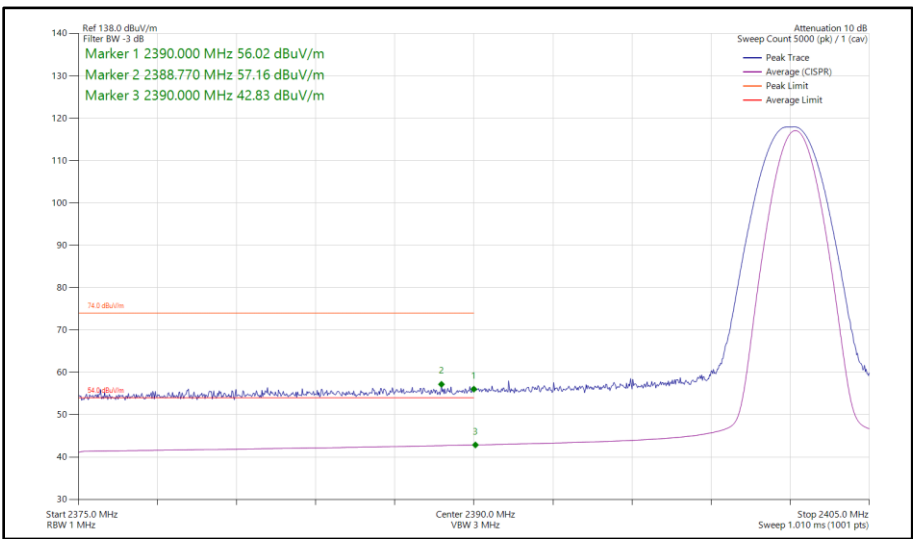


Figure 31 - Bluetooth DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz

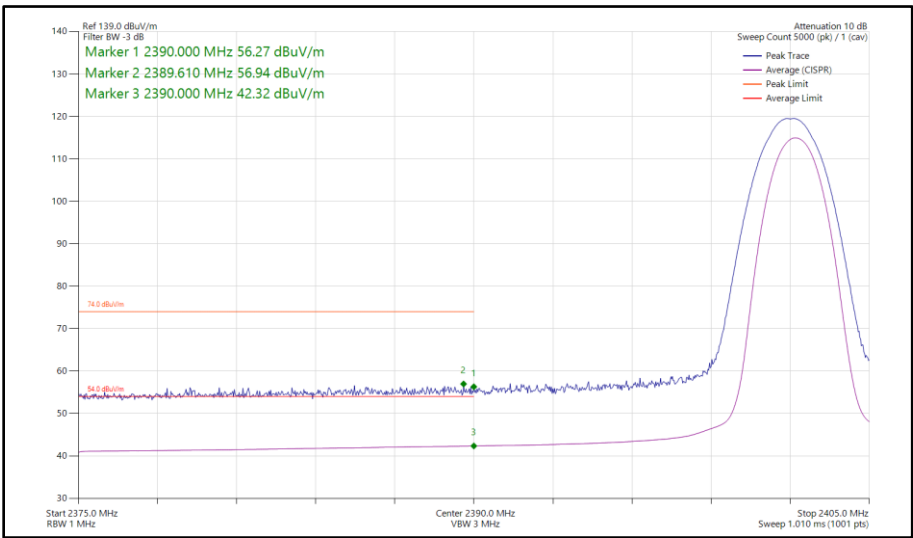


Figure 32 - Bluetooth 2-DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz

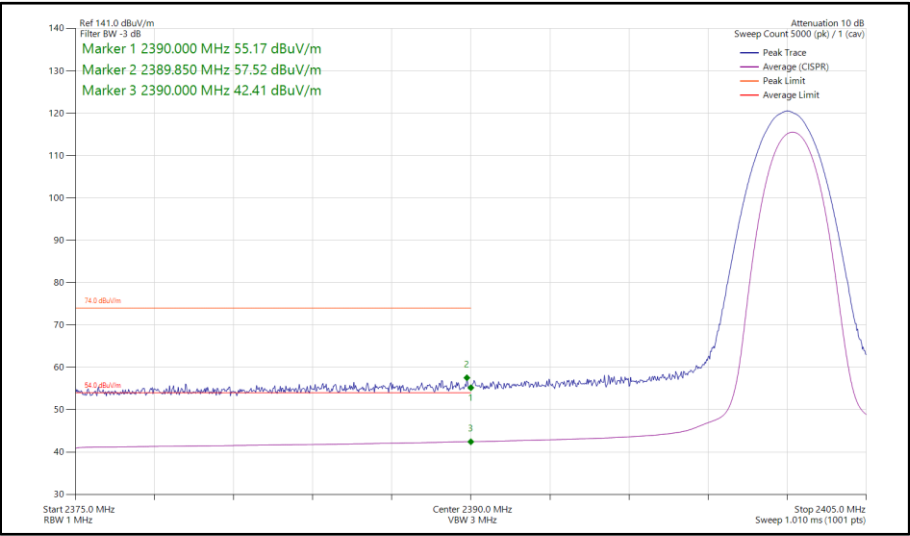


Figure 33 - Bluetooth 3-DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz

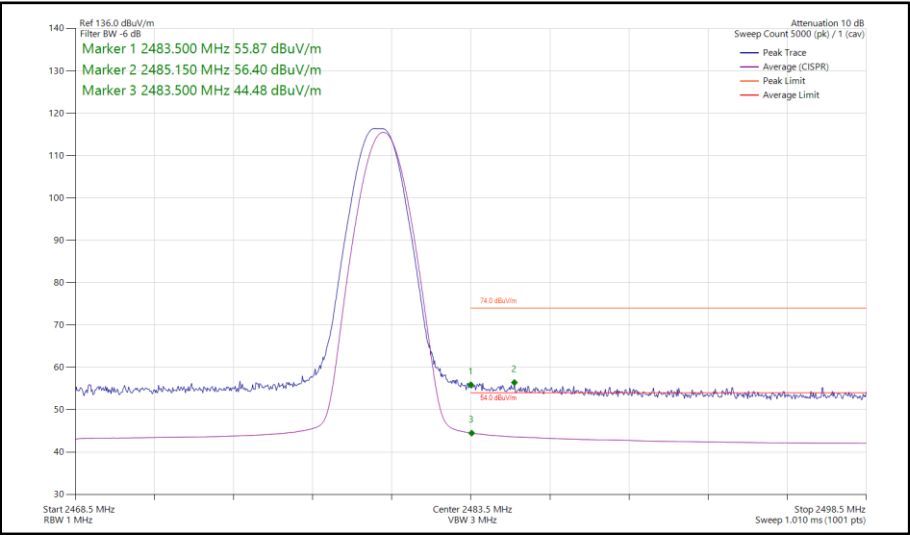


Figure 34 - Bluetooth DH5, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

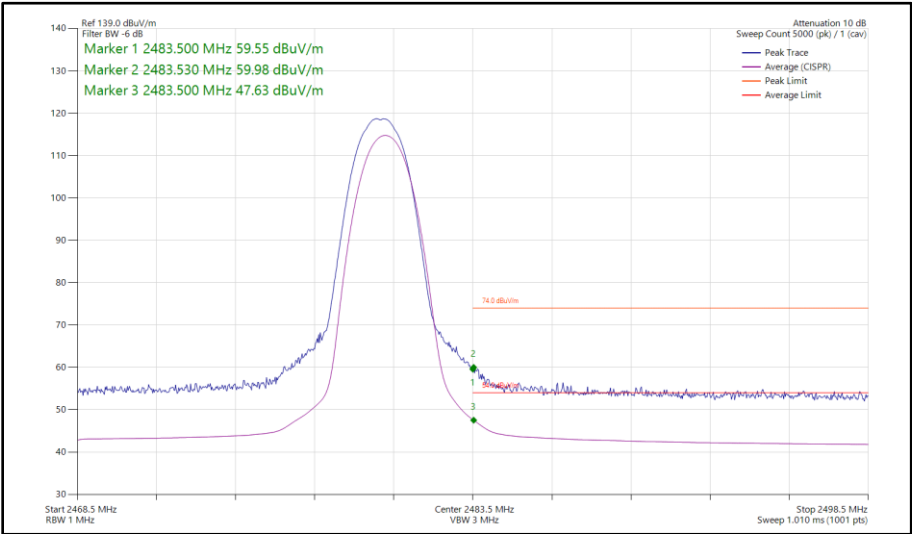


Figure 35 - Bluetooth 2-DH5, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

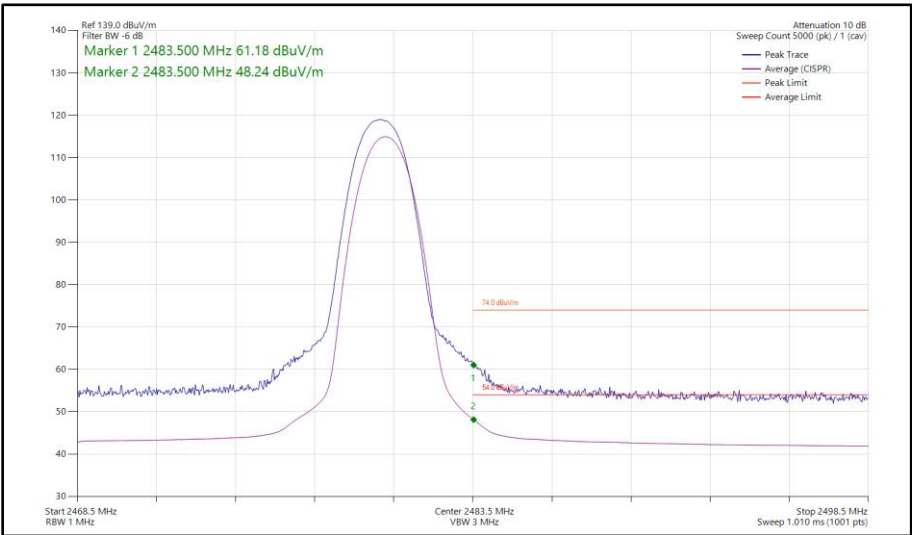


Figure 36 - Bluetooth 3-DH5, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

ePA - Core 0 - Core 1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dB μ V/m)	Average Level (dB μ V/m)
Static	DH5	2402	2390	56.74	42.03
Static	2-DH5	2402	2390	56.42	41.97
Static	3-DH5	2402	2390	57.37	42.15
Static	DH5	2480	2483.5	54.68	42.48
Static	2-DH5	2480	2483.5	56.36	44.31
Static	3-DH5	2480	2483.5	58.53	45.05

Table 13 - MIMO Restricted Band Edge Results

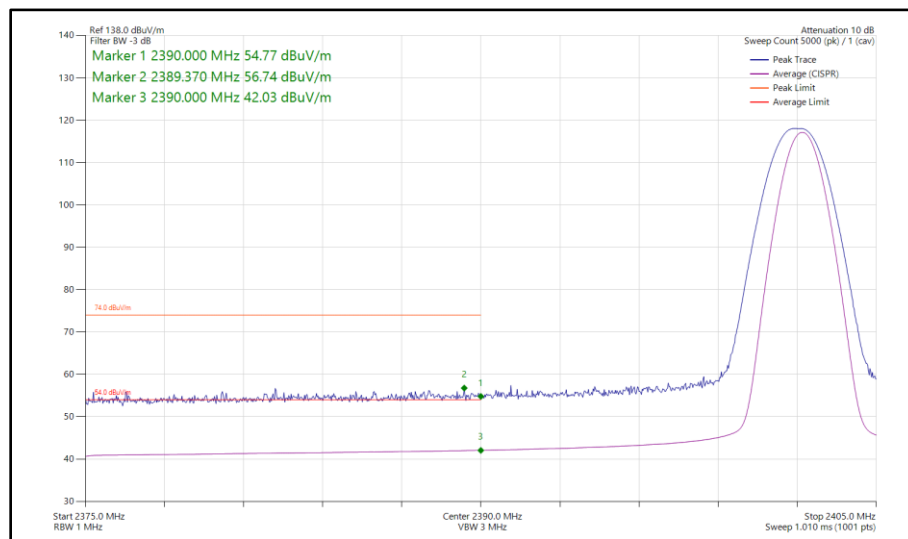


Figure 37 - Bluetooth DH5, MIMO, Core 0 - Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz



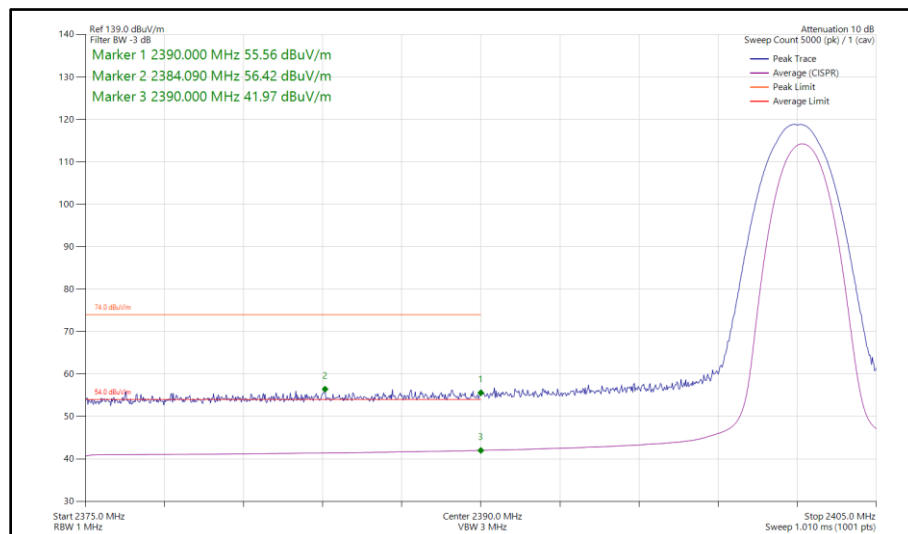



Figure 38 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz

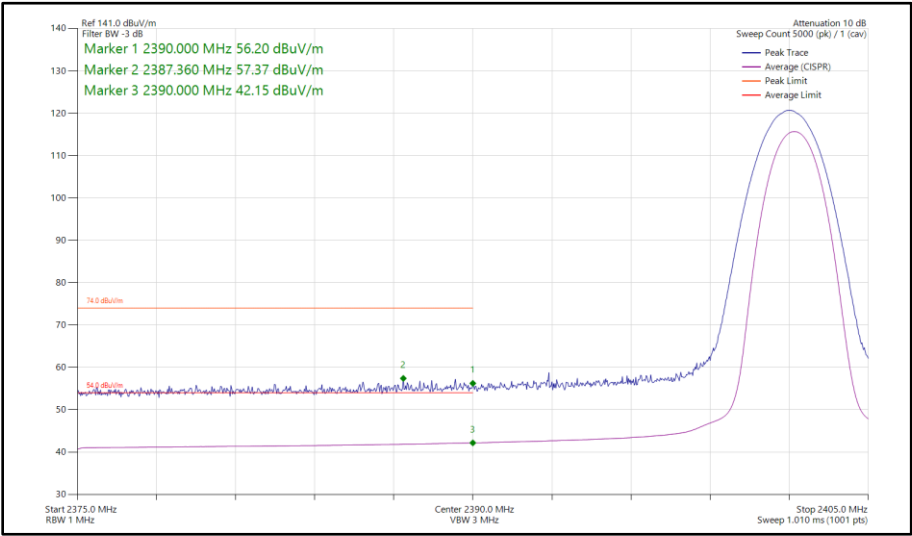


**Figure 39 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2402 MHz
Band Edge Frequency 2390 MHz**

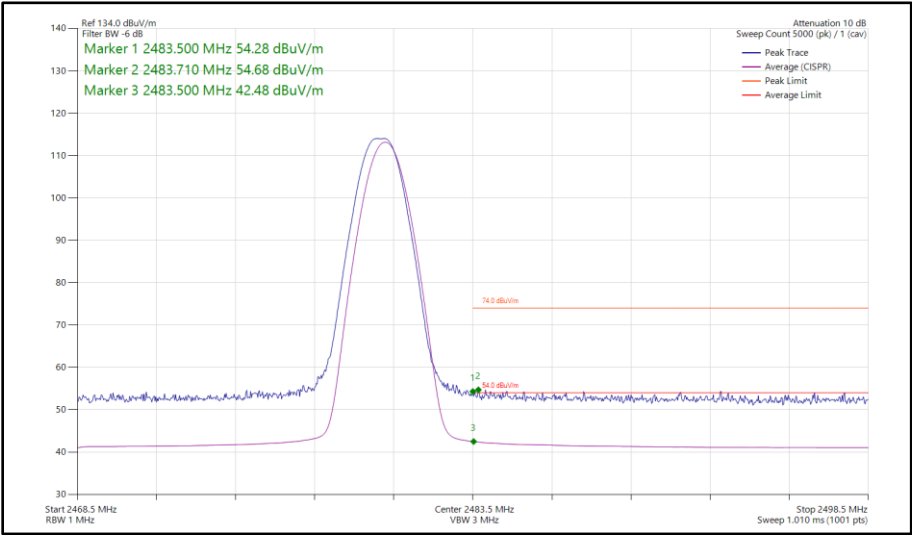

**Figure 40 - Bluetooth DH5, MIMO, Core 0 - Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

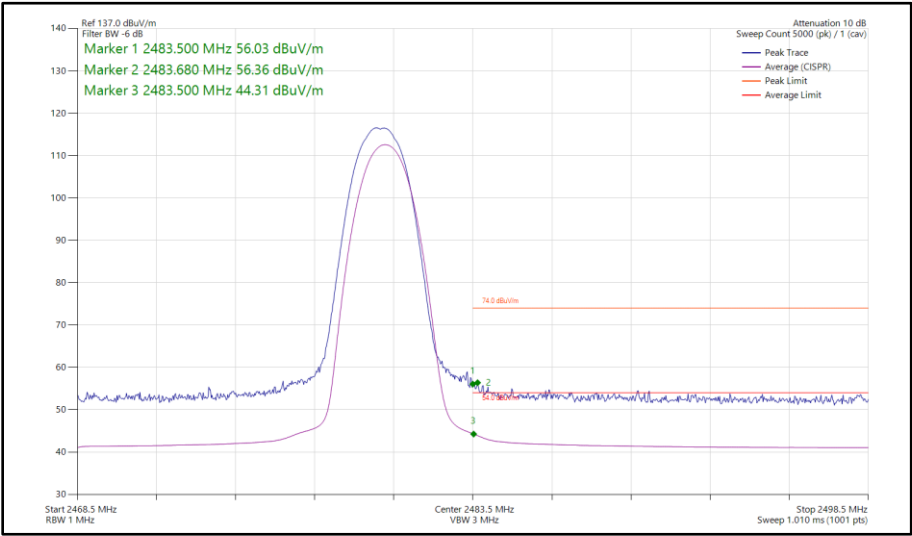

**Figure 41 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

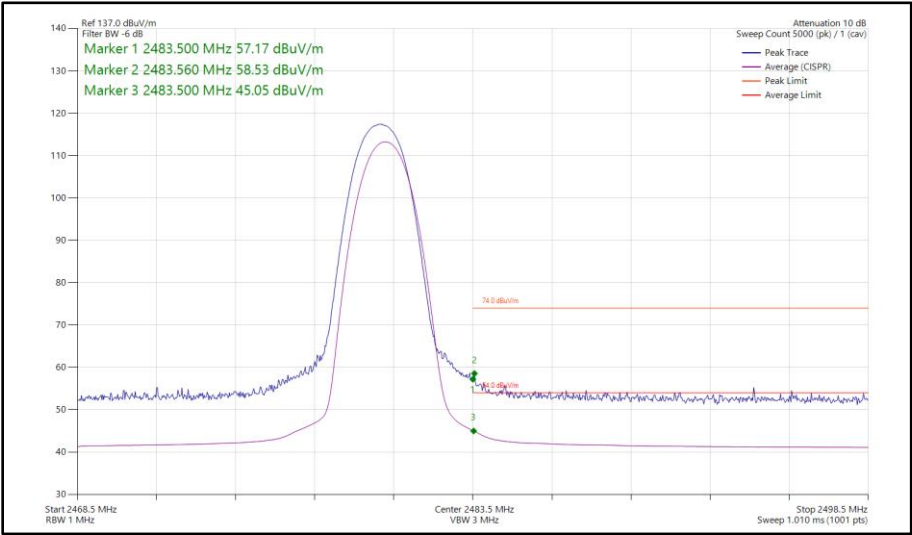

**Figure 42 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 14

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.2.0	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	11-Sep-2024
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5997	12	14-Sep-2024
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	05-Jun-2024*
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	20-May-2025*
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6140	12	26-Aug-2024
Digital Multimeter	Fluke	115	6147	12	16-Jun-2024*
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025*
Humidity & Temperature Meter	R.S Components	1364	6149	12	07-Jul-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025

Table 16

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment

*NOTE: Only used within calibration period.



2.2 Frequency Hopping Systems - Average Time of Occupancy

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.2.2 Equipment Under Test and Modification State

A3137, S/N: H6D001F73D - Modification State 0

2.2.3 Date of Test

26-June-2024 to 03-July-2024

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

2.2.5 Environmental Conditions

Ambient Temperature	22.0 - 22.2 °C
Relative Humidity	45.1 - 52.5 %



2.2.6 Test Results

2.4 GHz Bluetooth BDR/EDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.898	95	275.3	400.0

Table 17 - Time of Occupancy Results

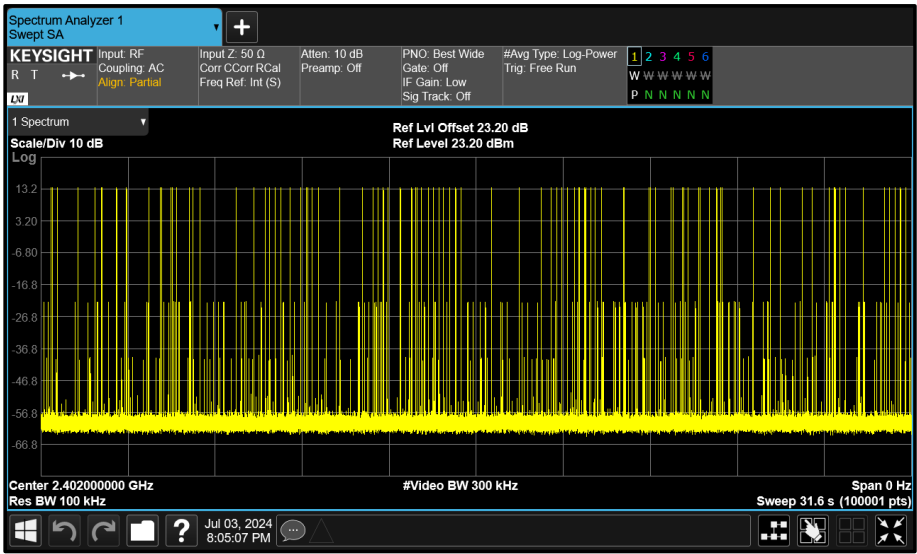


Figure 43 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.901	126	365.5	400.0

Table 18 - Time of Occupancy Results

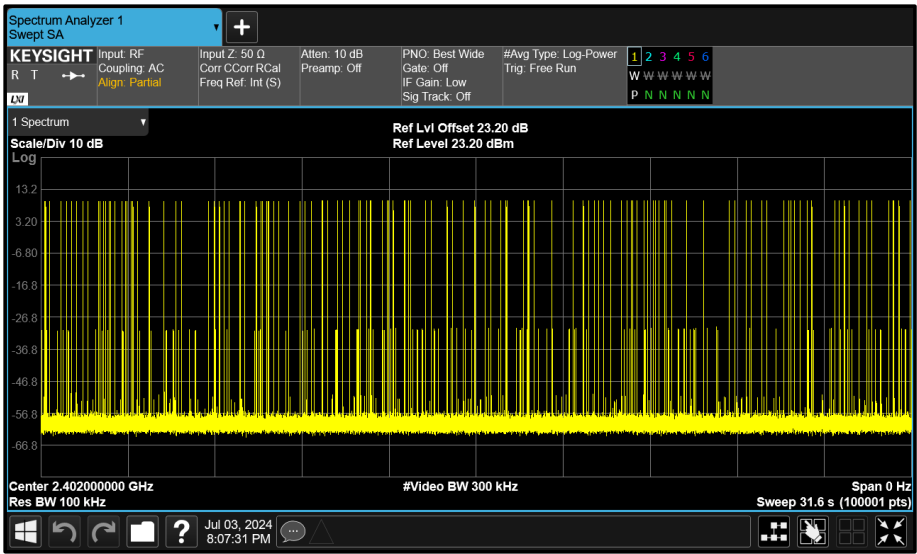


Figure 44 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.903	105	304.8	400.0

Table 19 - Time of Occupancy Results

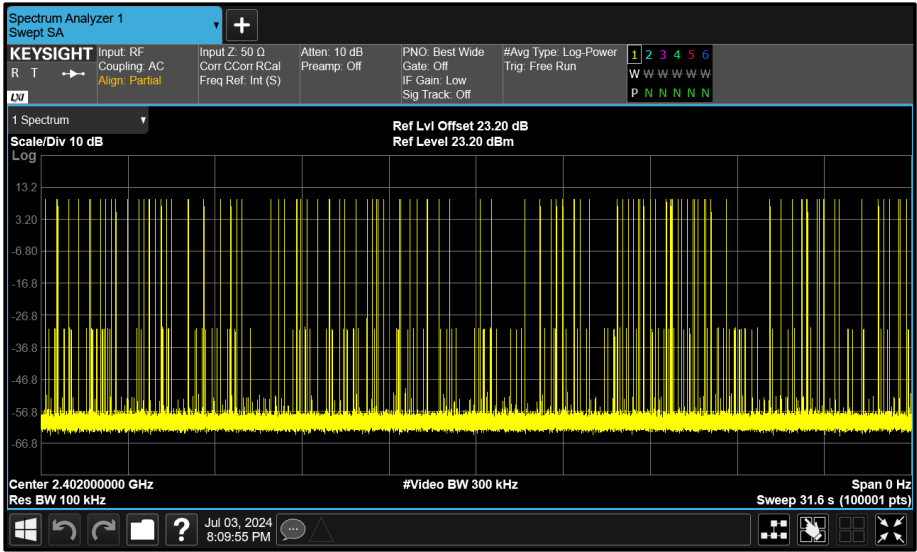


Figure 45 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	96	277.2	400.0

Table 20 - Time of Occupancy Results

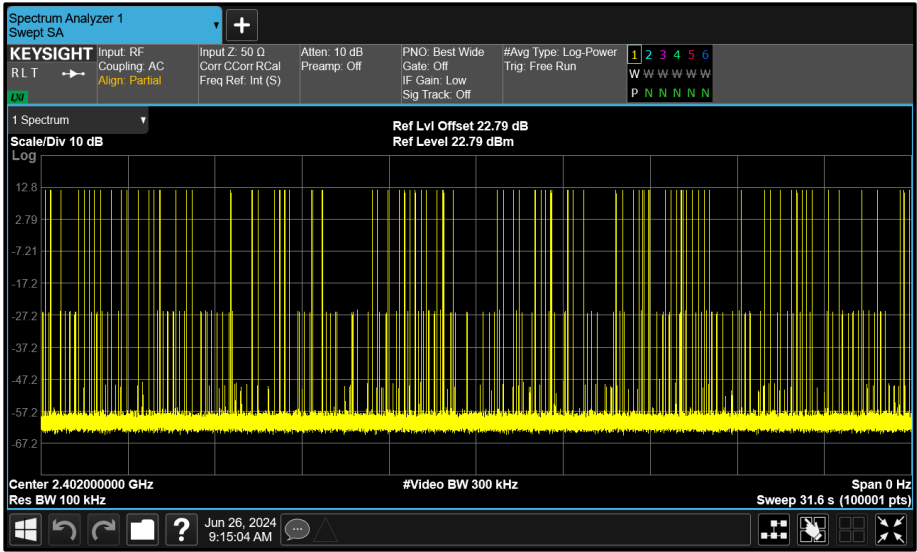


Figure 46 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.891	110	318.0	400.0

Table 21 - Time of Occupancy Results

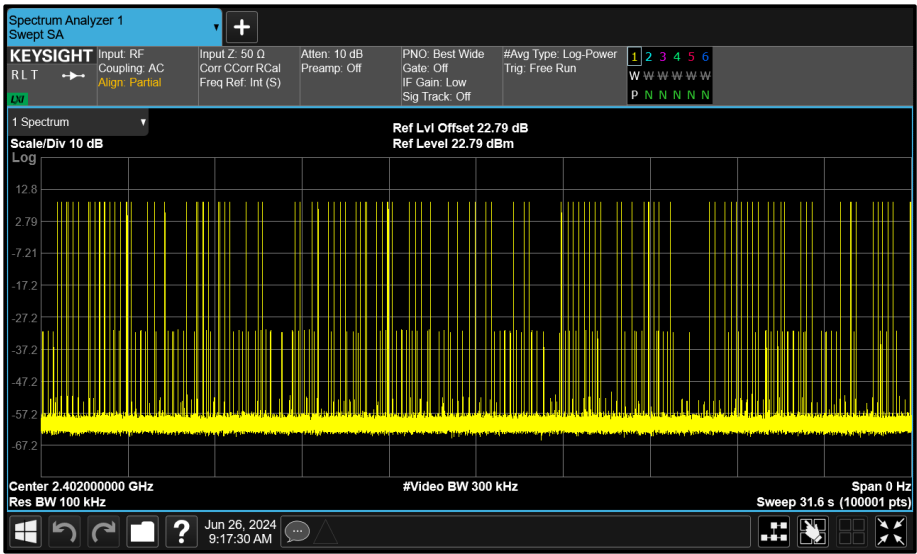


Figure 47 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	77.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	104	300.8	400.0

Table 22 - Time of Occupancy Results

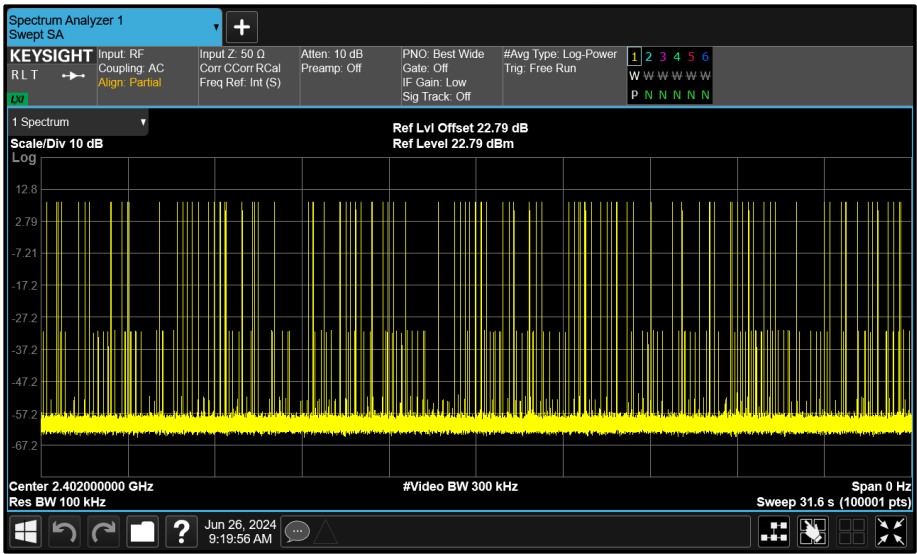


Figure 48 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.898	112	324.6	400.0

Table 23 - Time of Occupancy Results



Figure 49 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.902	112	325.1	400.0

Table 24 - Time of Occupancy Results

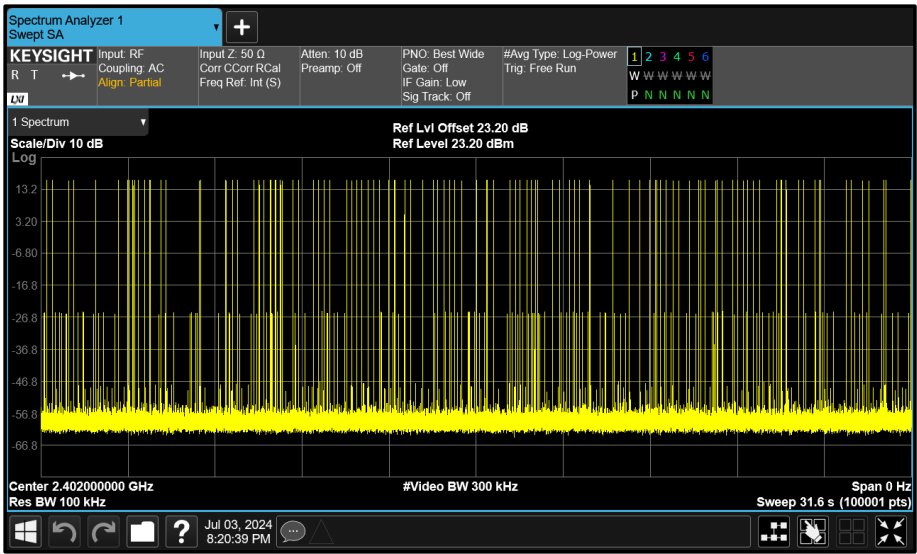


Figure 50 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.906	109	316.8	400.0

Table 25 - Time of Occupancy Results

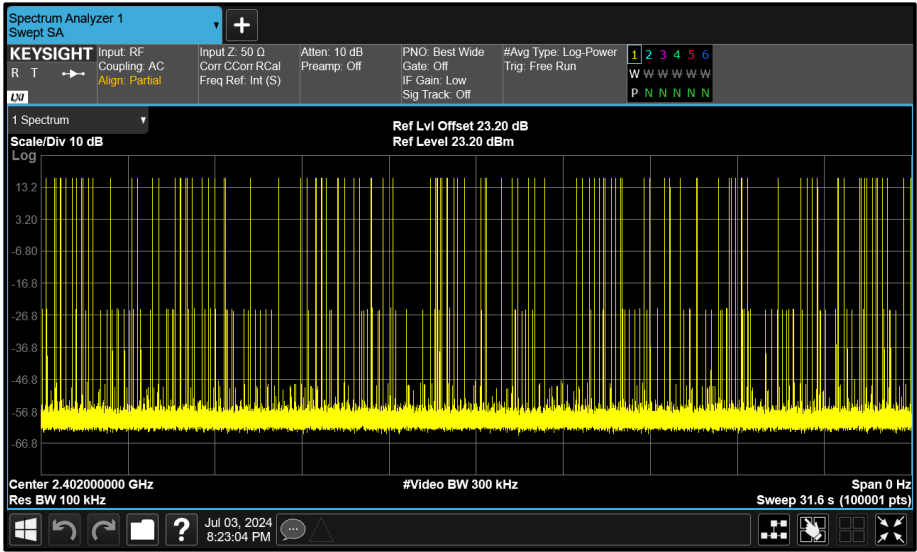


Figure 51 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	100	288.8	400.0

Table 26 - Time of Occupancy Results

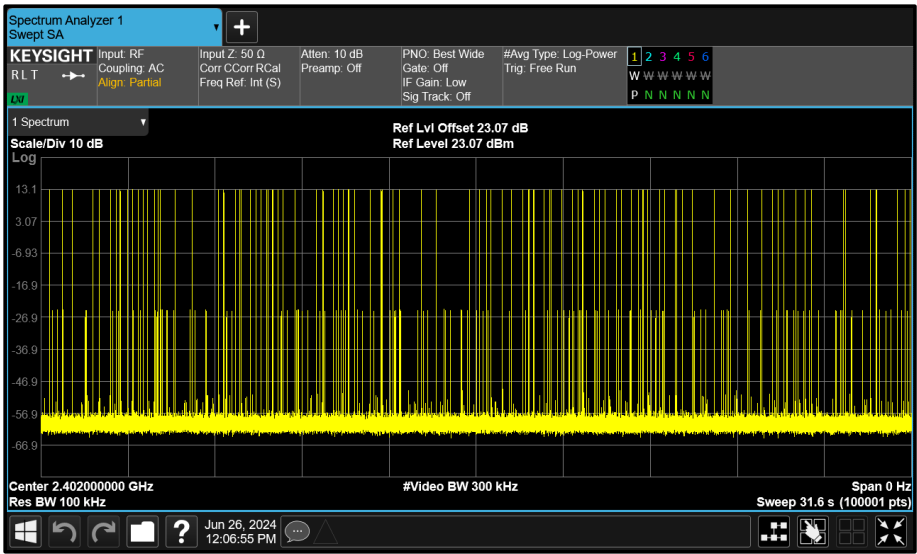


Figure 52 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.891	110	318.0	400.0

Table 27 - Time of Occupancy Results



Figure 53 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	118	341.3	400.0

Table 28 - Time of Occupancy Results

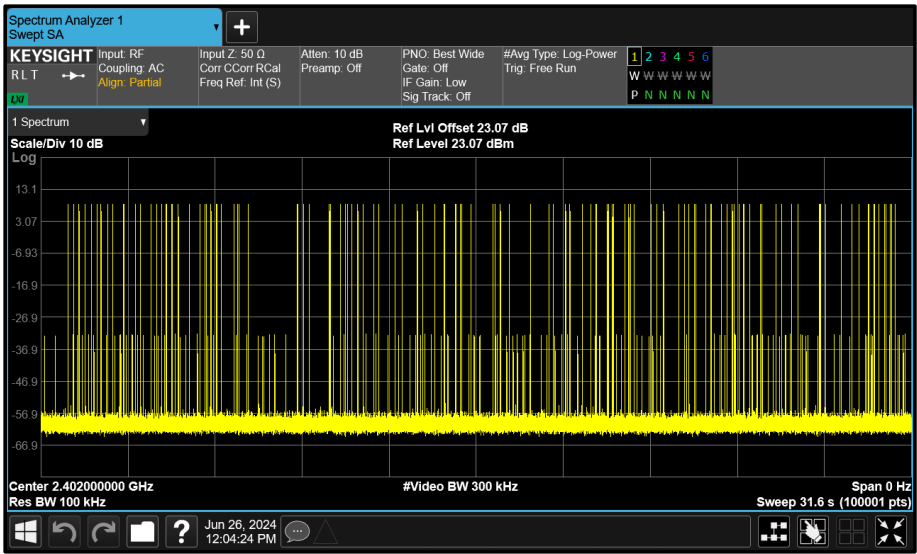


Figure 54 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration				
Frequency Range:		2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):		FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):		-		

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	119	343.7	400.0

Table 29 - Time of Occupancy Results

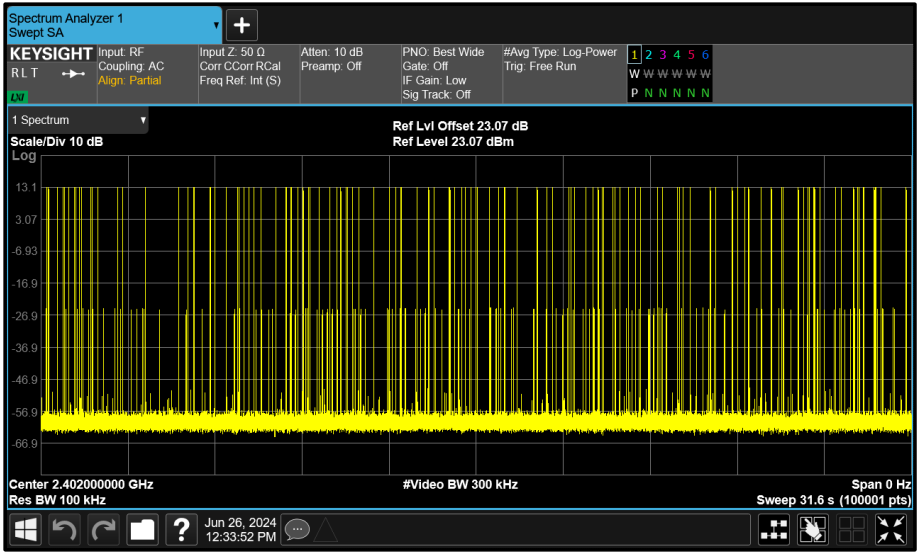


Figure 55 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.891	100	289.1	400.0

Table 30 - Time of Occupancy Results

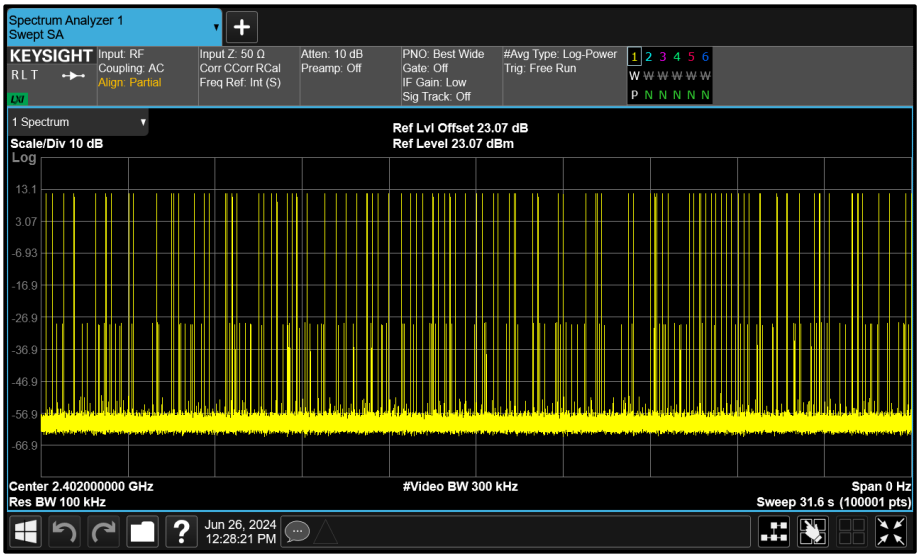


Figure 56 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	115	332.7	400.0

Table 31 - Time of Occupancy Results



Figure 57 - 8-DPSK - 2402 MHz Accumulated Transmit Time

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Industry Canada RSS-247, Limit Clause 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	26-Feb-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	16-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

Table 32

O/P Mon - Output Monitored using calibrated equipment



2.3 Frequency Hopping Systems - Channel Separation

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.3.2 Equipment Under Test and Modification State

A3137, S/N: H6D001F73D - Modification State 0
A3137, S/N: G5022YM6RR - Modification State 0

2.3.3 Date of Test

26-June-2024 to 04-July-2024

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

2.3.5 Environmental Conditions

Ambient Temperature	21.0 - 22.0 °C
Relative Humidity	45.1 - 52.5 %



2.3.6 Test Results

2.4 GHz Bluetooth BDR/EDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.929	2441.004	2442.009	1.005	≥619.0

Table 33 - Carrier Frequency Separation Results

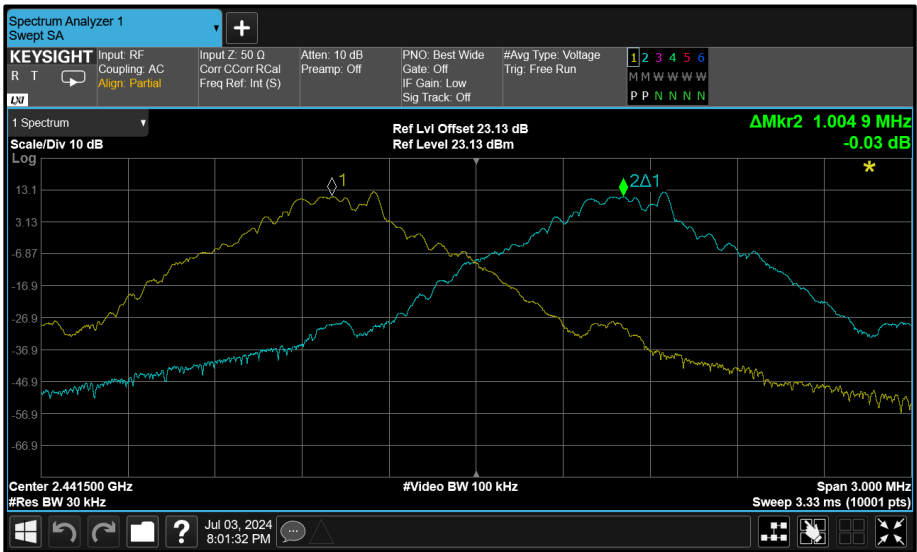


Figure 58 - GFSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.347	2440.988	2441.988	1.000	≥ 898.1

Table 34 - Carrier Frequency Separation Results

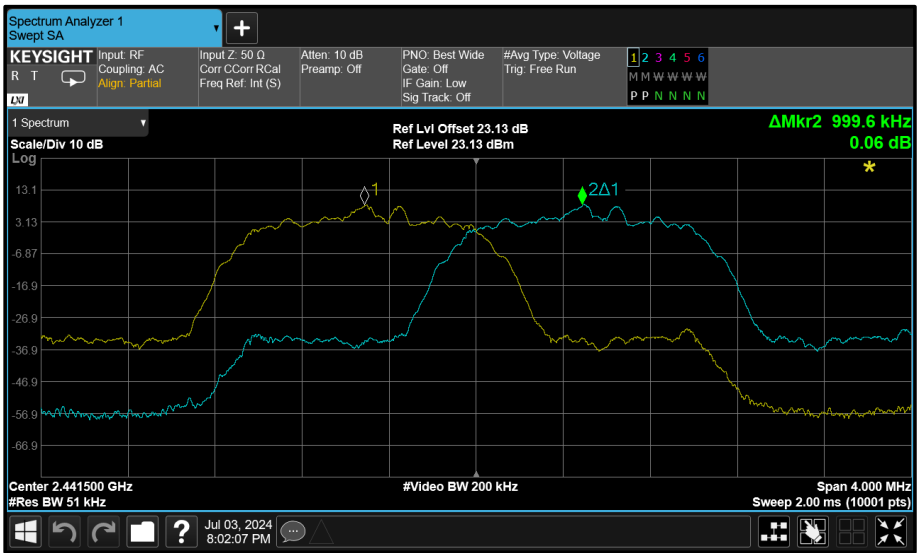


Figure 59 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration				
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-	
Antenna Configuration:	SISO	DCCF (dB):	-	
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-	

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2440.995	2441.996	1.001	≥881.6

Table 35 - Carrier Frequency Separation Results

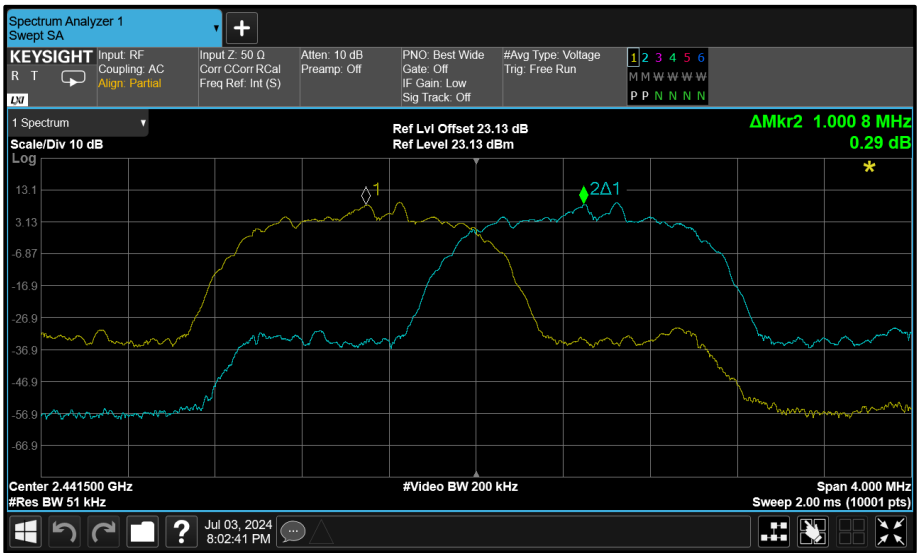


Figure 60 - 8-DPSK - 2441 MHz (CH39)



Test Configuration					
Frequency Range:		2400-2483.5 MHz		Band:	2.4 GHz
Limit Clause(s):		FCC 15.247(a)(1) RSS-247 5.1 b)		Test Method(s):	C63.10 7.8.2
Additional Reference(s):		-			

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.927	2441.008	2442.008	1.000	≥617.8

Table 36 - Carrier Frequency Separation Results

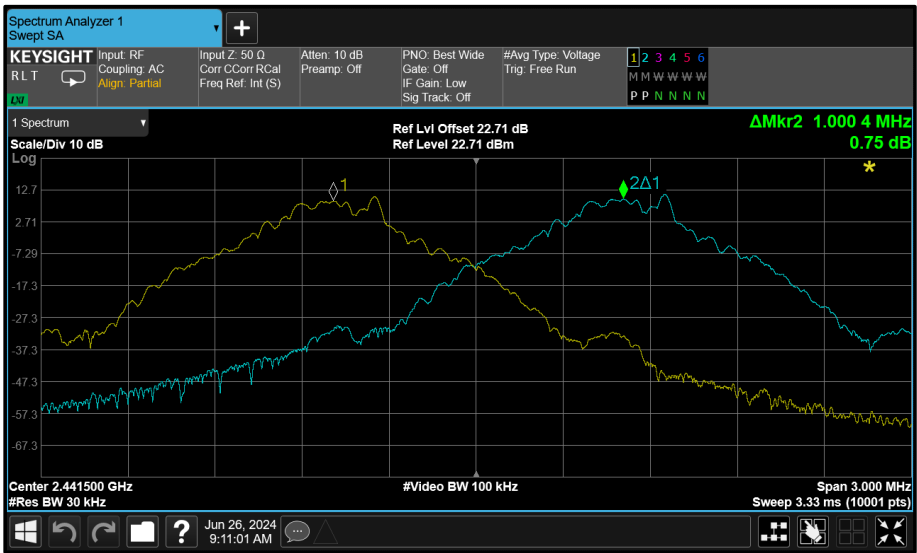


Figure 61 - GFSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.342	2440.991	2441.990	0.999	≥ 894.7

Table 37 - Carrier Frequency Separation Results

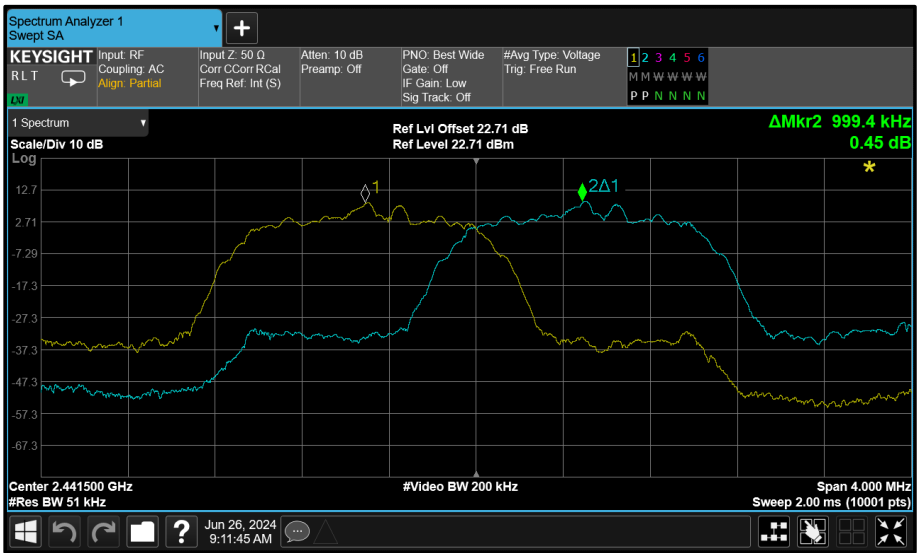


Figure 62 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2440.998	2441.997	0.999	≥881.6

Table 38 - Carrier Frequency Separation Results

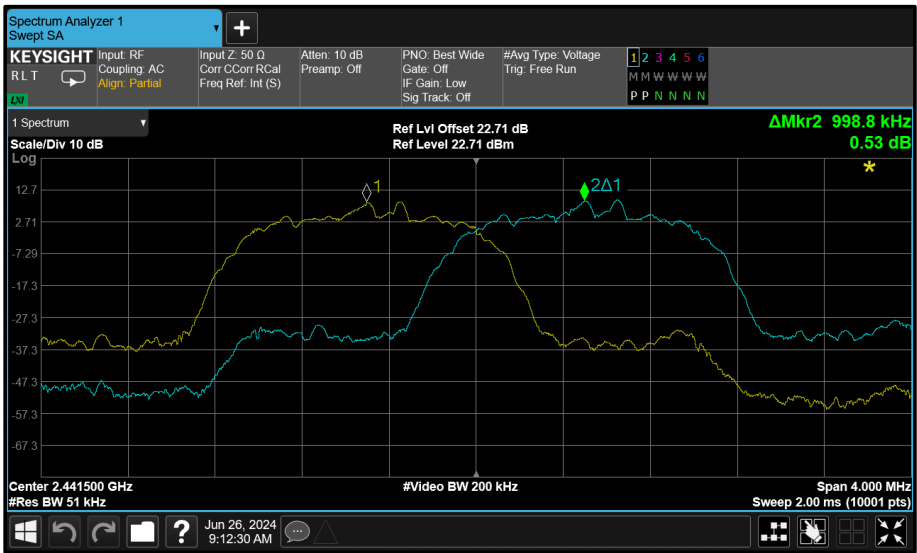


Figure 63 - 8-DPSK - 2441 MHz (CH39)

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.935	2441.005	2442.007	1.002	≥623.4

Table 39 - Carrier Frequency Separation Results

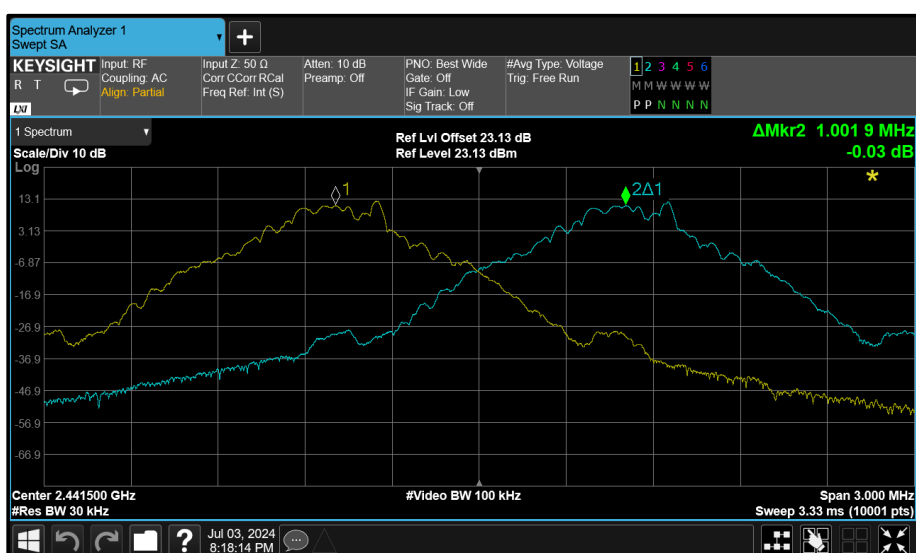


Figure 64 - GFSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.354	2440.989	2441.989	1.000	≥ 902.7

Table 40 - Carrier Frequency Separation Results

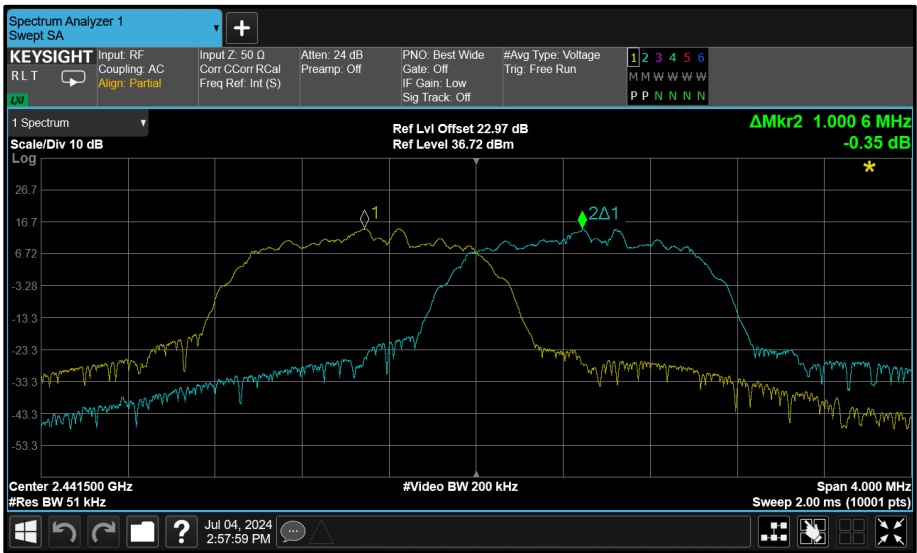


Figure 65 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.324	2440.996	2441.997	1.001	≥882.4

Table 41 - Carrier Frequency Separation Results

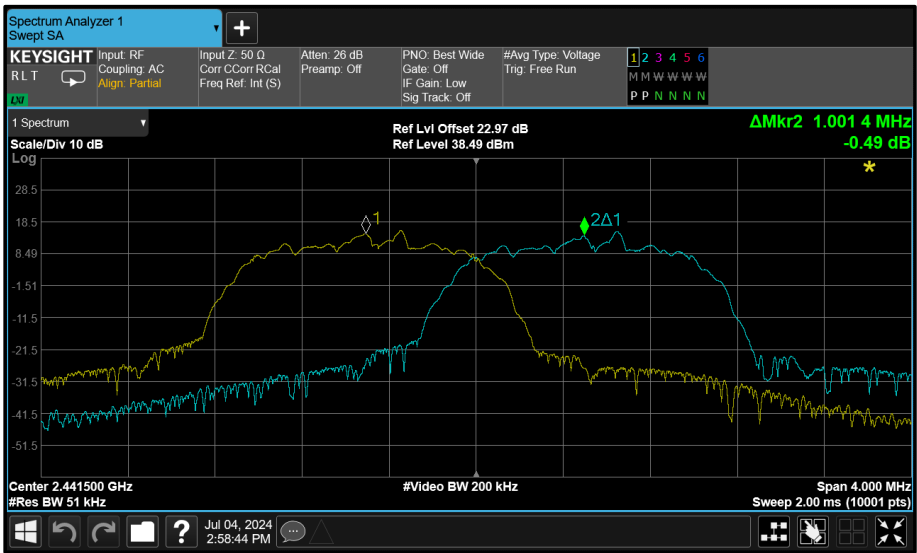


Figure 66 - 8-DPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.926	2441.007	2442.007	1.000	≥617.4

Table 42 - Carrier Frequency Separation Results

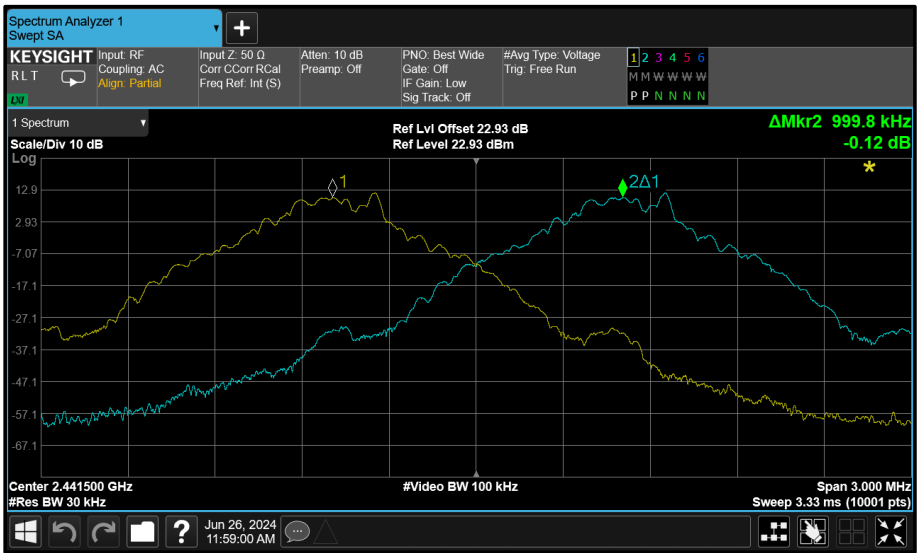


Figure 67 - GFSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.352	2440.990	2441.989	0.999	≥ 901.6

Table 43 - Carrier Frequency Separation Results

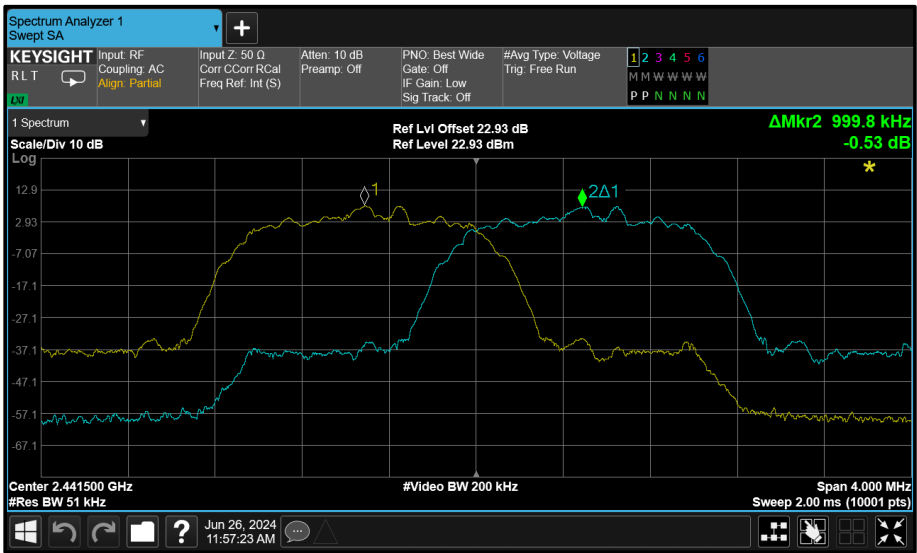


Figure 68 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration					
Frequency Range:		2400-2483.5 MHz		Band:	2.4 GHz
Limit Clause(s):		FCC 15.247(a)(1) RSS-247 5.1 b)		Test Method(s):	C63.10 7.8.2
Additional Reference(s):		-			

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.323	2440.998	2441.998	1.000	≥881.9

Table 44 - Carrier Frequency Separation Results

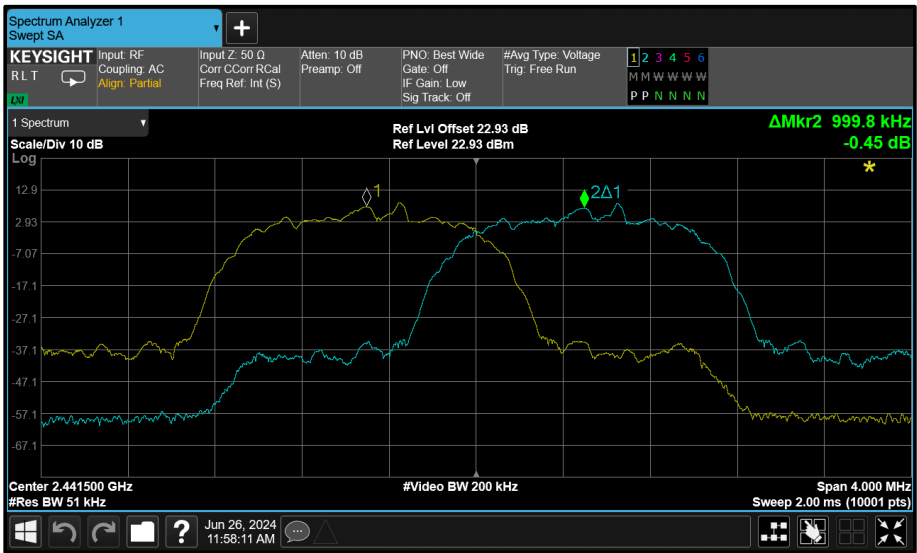


Figure 69 - 8-DPSK - 2441 MHz (CH39)



Test Configuration					
Frequency Range:		2400-2483.5 MHz		Band:	2.4 GHz
Limit Clause(s):		FCC 15.247(a)(1) RSS-247 5.1 b)		Test Method(s):	C63.10 7.8.2
Additional Reference(s):		-			

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.927	2441.007	2442.007	1.000	≥617.8

Table 45 - Carrier Frequency Separation Results

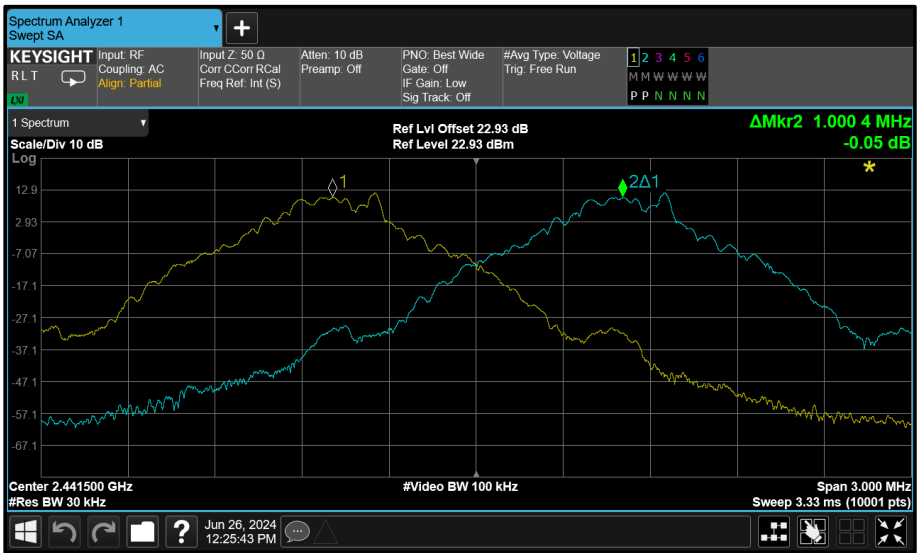


Figure 70 - GFSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.350	2440.989	2441.986	0.997	≥ 900.0

Table 46 - Carrier Frequency Separation Results

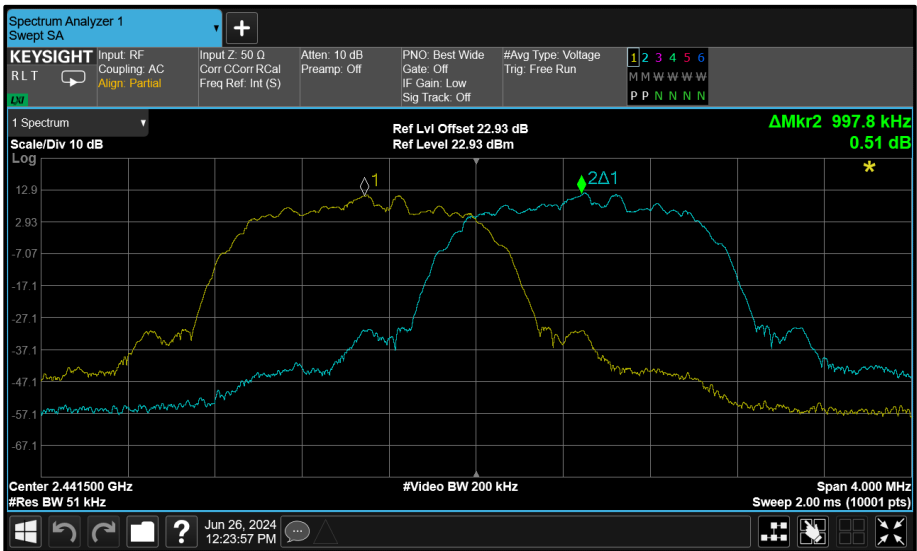


Figure 71 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.327	2440.994	2441.995	1.001	≥884.5

Table 47 - Carrier Frequency Separation Results

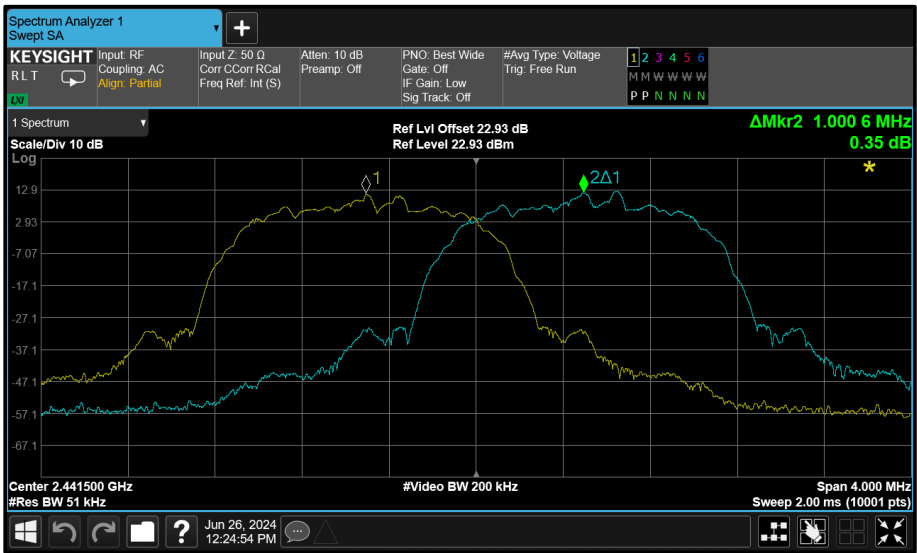


Figure 72 - 8-DPSK - 2441 MHz (CH39)