

## FCC Test Report

**Report No.:** CIVM-ESH-P24110685B-1

**FCC ID:** 2AG62M13

**Product:** FOUR-LEG ELECTRIC SIT-STAND DESK

**Test Model:** M13-42R-B

**Received Date:** Nov.26, 2024

**Test Date:** Nov.26 to Dec.16, 2024

**Issued Date:** Dec.19, 2024

**Applicant:** LUMI LEGEND CORPORATION

**Address:** 22/F., Building 1, Lisi Plaza, Huifeng East Road, Ningbo, China

**Manufacturer:** LUMI LEGEND CORPORATION

**Address:** 22/F., Building 1, Lisi Plaza, Huifeng East Road, Ningbo, China

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Address:** No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

Release Control Record.....	3
1 Certificate of Conformity .....	4
2 Summary of Test Results .....	5
2.1 Test Instruments .....	6
2.2 Measurement Uncertainty .....	7
2.3 Modification Record .....	7
2.4 Support Units.....	7
3 General Information.....	8
3.1 General Description of EUT.....	8
3.1.1 Test Mode Applicability: .....	9
3.1.2 Test Condition: .....	10
3.2 Description of Support Units.....	10
3.3 General Description of Applied Standards .....	10
4 Test Procedure and Results.....	11
4.1 AC Power Conducted Emission.....	11
4.1.1 Limits .....	11
4.1.2 Test Procedures .....	11
4.1.3 Deviation from Test Standard.....	11
4.1.4 Test Setup.....	12
4.1.5 EUT Operating Conditions.....	12
4.1.6 Test Results .....	13
4.2 Radiated Emissions Measurement .....	17
4.2.1 Test Procedure Reference .....	18
4.2.2 Test Procedures .....	18
4.2.3 Deviation from Test Standard.....	19
4.2.4 Test Setup.....	19
4.2.5 Test Results .....	21
4.3 20dB Spectrum Bandwidth Measurement.....	26
4.3.1 Limit.....	26
4.3.2 Test Setup.....	26
4.3.3 Test Procedures .....	26
4.3.4 Deviation of Test Standard.....	26
4.3.5 Test Results .....	27
5 Pictures of Test Arrangements .....	28



### Release Control Record

Issue No.	Description	Date Issued
CIVM-ESH-P24110685B-1	Original release	Dec.19, 2024



## 1 Certificate of Conformity

**Product:** FOUR-LEG ELECTRIC SIT-STAND DESK

**Brand:** --

**Test Model:** M13-42R-B

**Applicant:** LUMI LEGEND CORPORATION

**Test Date:** Nov.26 to Dec.16, 2024

**Standards:** 47 CFR FCC Part 15, Subpart C  
ANSI C63.10:2020

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**

**, Date:**

Dec.19, 2024

Yan ZHOU

Project Engineer

**Approved by :**



**, Date:**

Dec.19, 2024

Sean YU

RF Supervisor

## 2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used.
§15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
§15.209	Radiated Emission	PASS	Meet the requirement of limit.
§15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

## 2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Loop Antenna	ETS-LINDGR EN	6502	E1A1039	7/30/2024	7/29/2026
Hybrid Antenna(30MHz-1GHz)	Schwarzbeck	VULB9168	E1A1012	8/17/2023	8/16/2025
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	7/31/2024	7/30/2026
Horn Antenna(18GHz-40GHz)	Com-Power	AH-840	E1A1040	7/31/2024	7/30/2026
Pre-Amplifier(0.1MHz~1300MHz)	Agilent	8447D	E1A2001	3/3/2023	2/17/2025
Pre-Amplifier(18GHz-40GHz)	EMC Instruments Corporation	EMC184045SE	E1A2008	8/15/2024	8/14/2025
EMI Test Receiver	R&S	ESR7	E1R1005	2/18/2024	2/17/2025
EMI Test Spectrum	Keysight	N9030B	E1S1003	8/28/2024	8/27/2025
Signal Analyzer	Keysight	N9020A	E1S1004	2/19/2024	2/18/2025
LISN(signle phase)	R&S	ENV216	E1L1011	8/12/2024	8/11/2025
EMI Test Receiver	R&S	ESR3	E1R1008	5/31/2024	5/30/2025
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	Toscend	JS32-CE	5.0.0.1	N/A	N/A
Test Software	Toscend	JS32-RE	5.0.0	N/A	N/A
Test Software	Toscend	JS1120-3	V3.2.22	N/A	N/A

## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ ) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

## 2.3 Modification Record

There were no modifications required for compliance.

## 2.4 Support Units

Description	Manufacturer	Model No.	Serial No.
Dummy Load	N/A	N/A	N/A
Adaptor	Dongguan YIHENG Electronics Co., Ltd	A50R6203218	N/A

### 3 General Information

#### 3.1 General Description of EUT

Product	FOUR-LEG ELECTRIC SIT-STAND DESK
Brand	--
Test Model	M13-42R-B
Power Rating	100-240V~,50/60 Hz, 1.5A
Modulation Type	FSK
Modulation Technology	Qi
Operating Frequency	110-205KHz
Antenna Type	Coil Antenna
Antenna Connector	--

**Note:**

1. For more details, please refer to the User's manual of the EUT.
2. Wireless maximum transmitted power of the EUT is 15W, it also supports power output below 15W such as 7.5W/10W.



### 3.1.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE (9 kHz~30MHz)	RE (30MHz~1GHz)	PLC	BW	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz      **RE< 1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission      **BW**: 20dB Spectrum Bandwidth

#### Radiated Emission Test RE (9 kHz~30MHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	Charging	114.19 kHz	114.19 kHz	FSK, ASK

#### Radiated Emission Test RE (30MHz~1GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	Charging	114.19 kHz	114.19 kHz	FSK, ASK

#### Power Line Conducted Emission Test:

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	Charging	114.19 kHz	114.19 kHz	FSK, ASK

### 3.1.2 Test mode

The EUT was tested under the following modes, the final worst mode were marked in boldface and recorded in this report.

Test Mode	Test setup configuration	Changing current condition
Mode 1	EUT charging to receiver load	Near 100% battery status
<b>Mode 2</b>	<b>EUT charging to receiver load</b>	<b>50% battery status</b>
Mode 3	EUT charging to receiver load	<1% battery status
Mode 4	EUT charging standby mode	

### 3.1.3 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE (9 kHz~30MHz)	23deg. C, 58%RH	AC 120V, 60Hz
RE (30MHz~1GHz)	23deg. C, 58%RH	AC 120V, 60Hz
PLC	23deg. C, 58%RH	AC 120V, 60Hz & 230V, 50Hz

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.3 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

**FCC Part 15, Subpart C (15.207, 15.209)**

**ANSI C63.10: 2020**

All relaxed test items have been performed and recorded as per the above standard.

## 4 Test Procedure and Results

### 4.1 AC Power Conducted Emission

#### 4.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 4.1.2 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.1.3 Deviation from Test Standard

No deviation.

#### 4.1.4 Test Setup

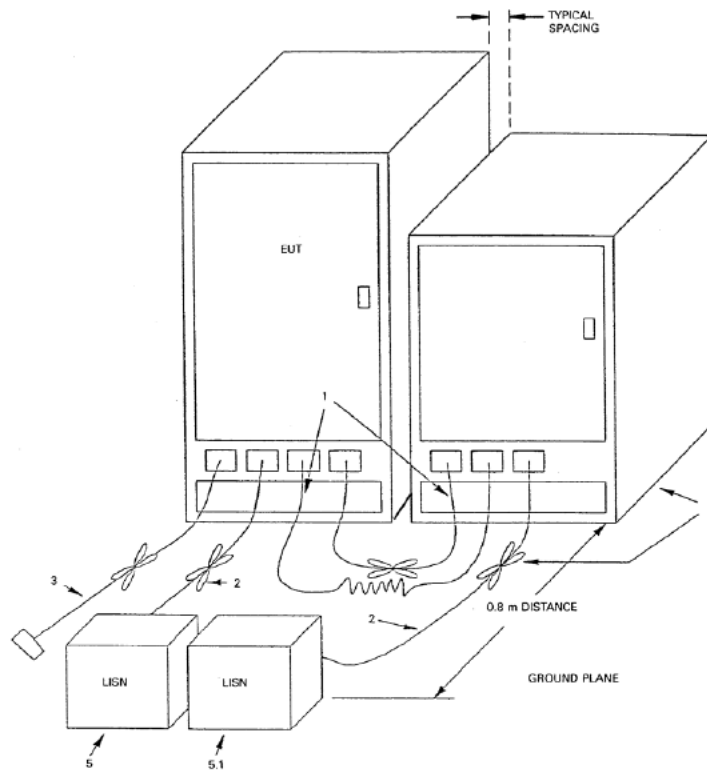

1. Excess I/O cables shall be bundled in the center. If bundling is not possible, the cables shall be arranged in a serpentine fashion. Bundling shall not exceed 40 cm in length (see 6.2.5 and 11.5.5).
2. Excess power cords shall be bundled in the center or shortened to appropriate length (see 7.3.1).
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in a serpentine fashion (see 6.2.5).
4. EUT and all cables shall be insulated, if required, from the ground plane by up to 12 mm of insulating material (see 6.2.5 and 6.3.3).
5. EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, the ground plane.
  - 5.1 All other equipment powered from a second LISN or additional LISN(s) (see 5.2.4 and 7.3.1).
  - 5.2 A multiple outlet strip can be used for multiple power cords of non-EUT equipment.

Figure 9—Test arrangement for conducted emissions of floor-standing equipment


For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.5 EUT Operating Conditions

Same as 4.1.6.

#### 4.1.6 Test Results

AC 230V 50Hz

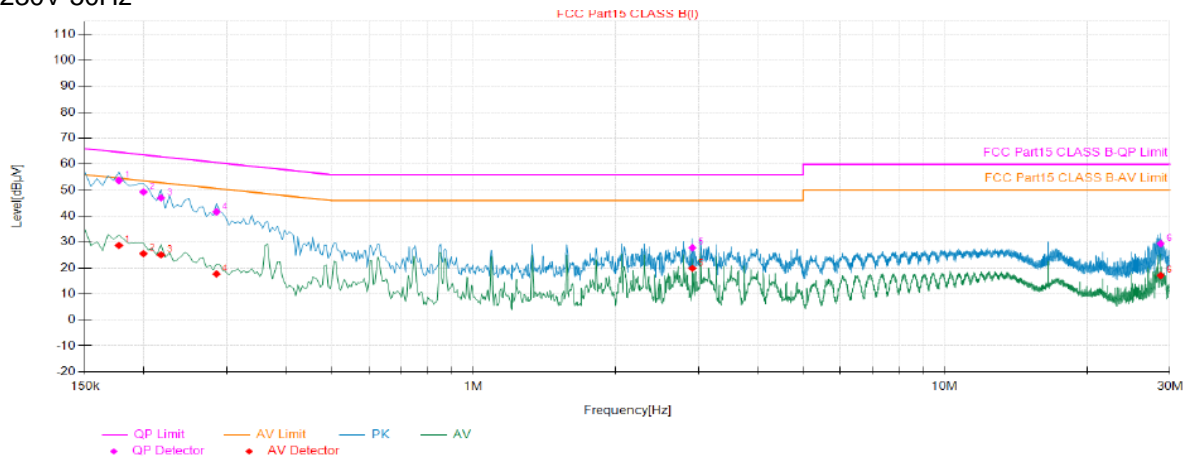


#### Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.18	9.69	44.04	53.73	64.63	10.90	19.03	28.72	54.63	25.91
2	0.20	9.68	39.64	49.32	63.63	14.31	15.91	25.59	53.63	28.04
3	0.22	9.64	37.37	47.01	62.91	15.90	15.43	25.07	52.91	27.84
4	0.29	9.48	32.16	41.64	60.67	19.03	8.24	17.72	50.67	32.95
5	2.91	9.65	18.20	27.85	56.00	28.15	10.25	19.90	46.00	26.10
6	28.67	10.17	19.28	29.45	60.00	30.55	6.97	17.14	50.00	32.86

Remarks: 1. Margin=Limit - Value, Value=Reading + Factor.

2. Factor=AMN Factor + Cable Loss.

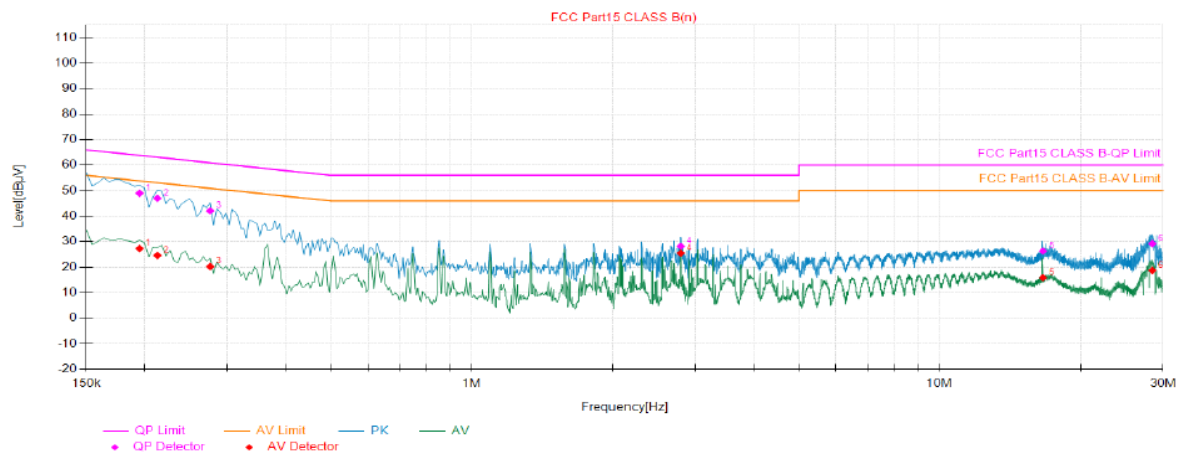


#### Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]
1	0.20	9.68	39.30	48.98	63.82	14.84	17.64	27.32	53.82	26.50
2	0.21	9.66	37.35	47.01	63.09	16.08	14.89	24.55	53.09	28.54
3	0.28	9.57	32.49	42.06	60.94	18.88	10.67	20.24	50.94	30.70
4	2.80	9.68	18.51	28.19	56.00	27.81	15.77	25.45	46.00	20.55
5	16.62	9.81	16.46	26.27	60.00	33.73	6.03	15.84	50.00	34.16
6	28.45	10.13	19.10	29.23	60.00	30.77	8.57	18.70	50.00	31.30

Remarks: 1. Margin=Limit - Value, Value=Reading + Factor.

2. Factor=AMN Factor + Cable Loss.

## AC 120V 60Hz

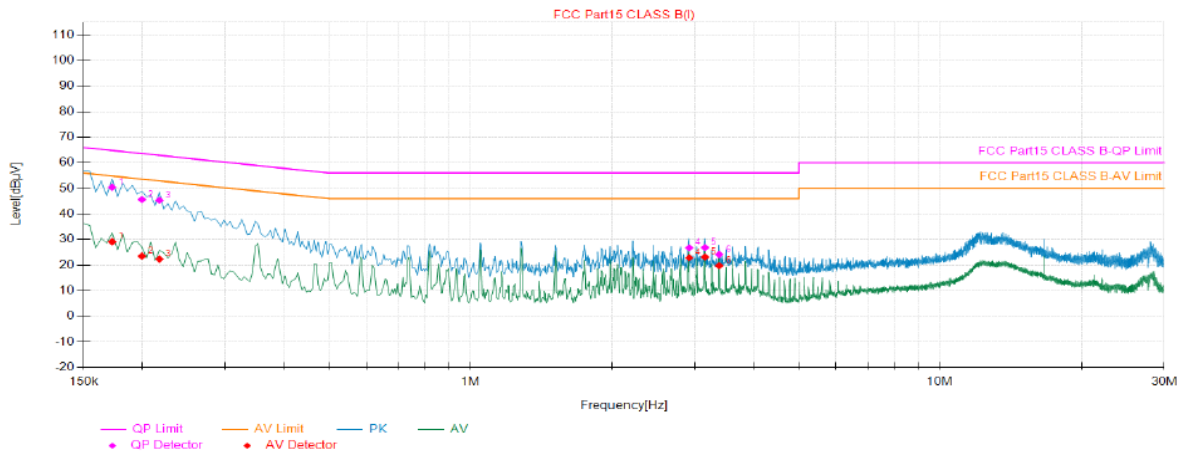


### Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.17	9.70	40.72	50.42	64.84	14.42	19.42	29.12	54.84	25.72
2	0.20	9.68	35.95	45.63	63.63	18.00	13.81	23.49	53.63	30.14
3	0.22	9.64	35.66	45.30	62.91	17.61	12.67	22.31	52.91	30.60
4	2.92	9.65	17.09	26.74	56.00	29.26	13.17	22.82	46.00	23.18
5	3.16	9.66	17.19	26.85	56.00	29.15	13.44	23.10	46.00	22.90
6	3.39	9.65	14.47	24.12	56.00	31.88	10.10	19.75	46.00	26.25

Remarks: 1. Margin=Limit - Value, Value=Reading + Factor.

2. Factor=AMN Factor + Cable Loss.

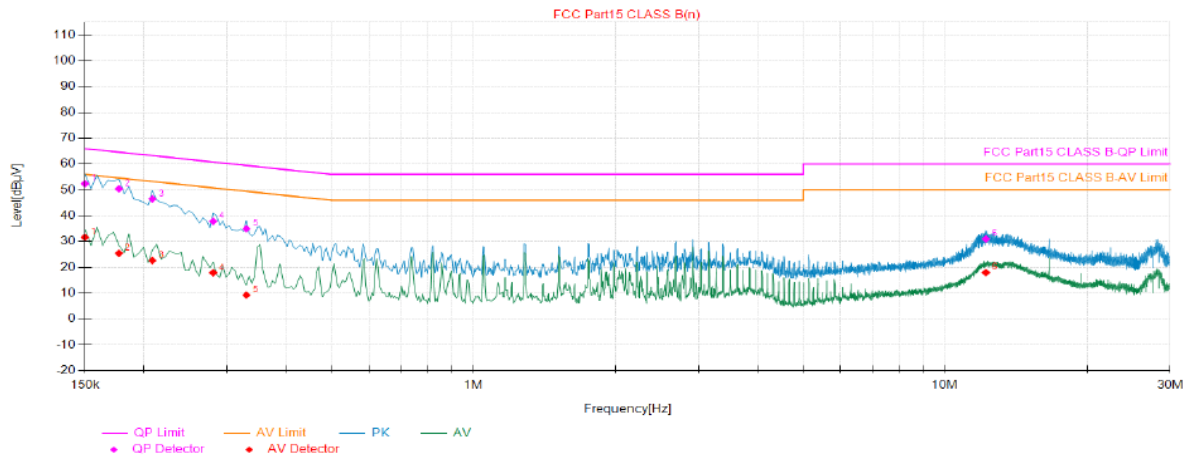

### Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.15	9.66	42.73	52.39	66.00	13.61	21.96	31.62	56.00	24.38
2	0.18	9.67	40.74	50.41	64.63	14.22	15.73	25.40	54.63	29.23
3	0.21	9.67	36.84	46.51	63.26	16.75	12.94	22.61	53.26	30.65
4	0.28	9.56	28.26	37.82	60.80	22.98	8.32	17.88	50.80	32.92
5	0.33	9.52	25.40	34.92	59.45	24.53	-0.30	9.22	49.45	40.23
6	12.20	10.09	20.91	31.00	60.00	29.00	7.85	17.94	50.00	32.06



## 4.2 Radiated Emissions Measurement

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

### FCC Part 15C 15.209

Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### 4.2.1 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

#### 4.2.2 Test Procedures

##### For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X, Y and Z axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to

make the measurement.


- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### 4.2.3 Deviation from Test Standard


No deviation.

#### 4.2.4 Test Setup

For Radiated emission below 30MHz

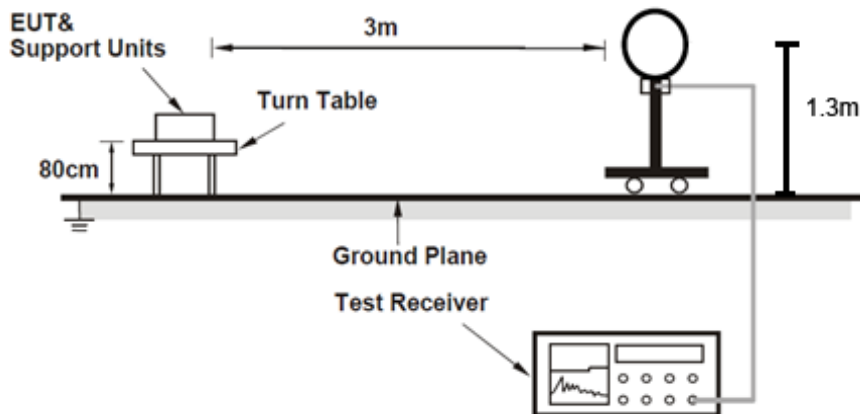

**For Radiated emission 30MHz to 1GHz**

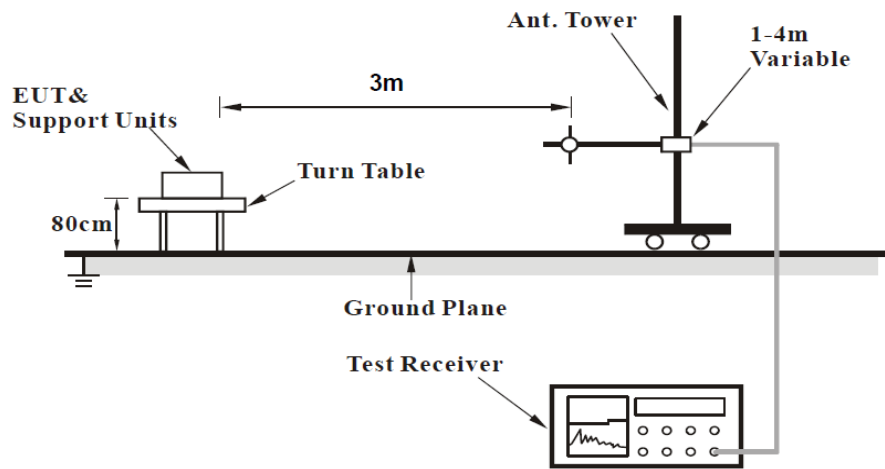


For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.5 Test Results

##### Radiated Emissions Range 9kHz~30MHz


Channel	144.19 kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9KHz ~ 30MHz	Antenna Polarity	Parallel
Mode	Operating		

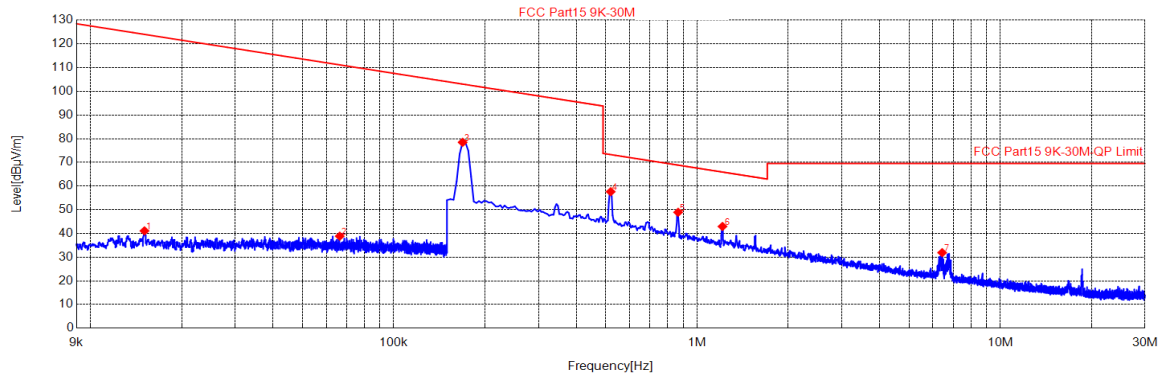

##### Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Value [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height[cm]	Angle [°]
1	0.02	25.07	16.02	41.09	124.05	82.96	100	190
2	0.07	27.73	11.13	38.86	111.17	72.31	100	347
3	0.17	67.60	10.87	78.47	103.06	24.59	100	162
4	0.52	46.83	10.79	57.62	73.29	15.67	100	170
5	0.87	38.15	10.78	48.93	68.85	19.92	100	170
6	1.21	32.14	10.81	42.95	65.92	22.97	100	170


Channel	144.19 kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9KHz ~ 30MHz	Antenna Polarity	Perpendicular
Mode	Operating		

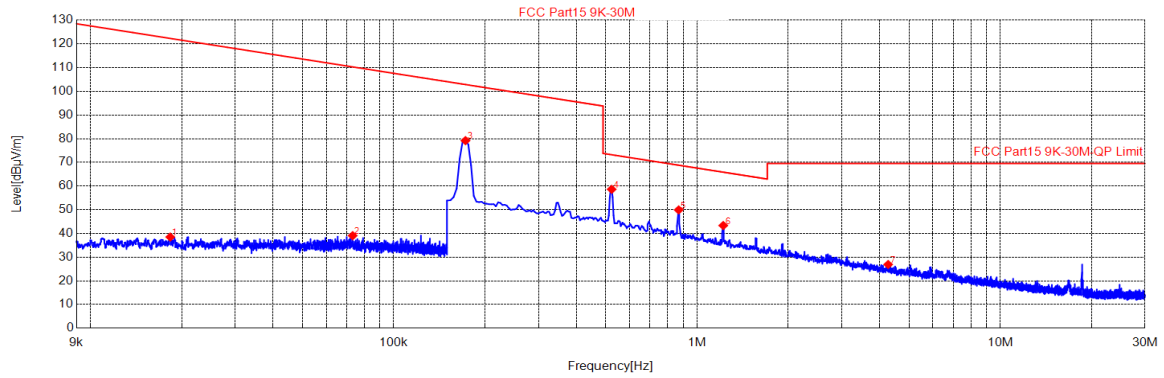

#### Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Value [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	0.02	23.90	14.6	38.50	122.34	83.84	100	190
2	0.07	27.99	11.08	39.07	110.31	71.24	100	190
3	0.17	68.33	10.86	79.19	102.87	23.68	100	170
4	0.52	47.84	10.79	58.63	73.23	14.60	100	158
5	0.87	39.15	10.78	49.93	68.81	18.88	100	150
6	1.22	32.54	10.81	43.35	65.87	22.52	100	135

Channel	144.19 kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9KHz ~ 30MHz	Antenna Polarity	Ground-parallel
Mode	Operating		

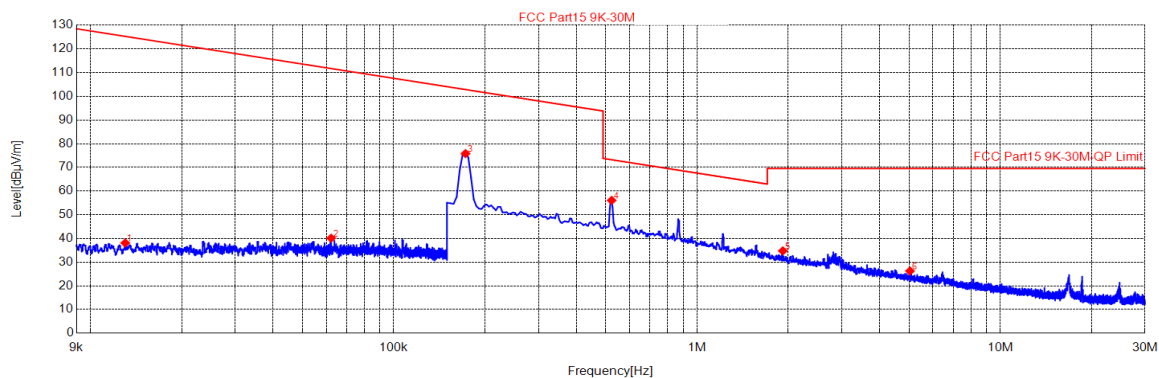

#### Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Value [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height[cm]	Angle [°]
1	0.01	21.18	16.91	38.09	125.31	87.22	100	233
2	0.06	28.97	11.15	40.12	111.73	71.61	100	190
3	0.17	64.96	10.86	75.82	102.87	27.05	100	4
4	0.52	45.28	10.79	56.07	73.23	17.16	100	170
5	1.92	23.86	10.9	34.76	69.54	34.78	100	21
6	5.04	15.75	10.51	26.26	69.54	43.28	100	48

## Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

Channel	144.19 kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz~1GHz	Antenna Polarity	Horizontal
Mode	Operating		

Test Plot:

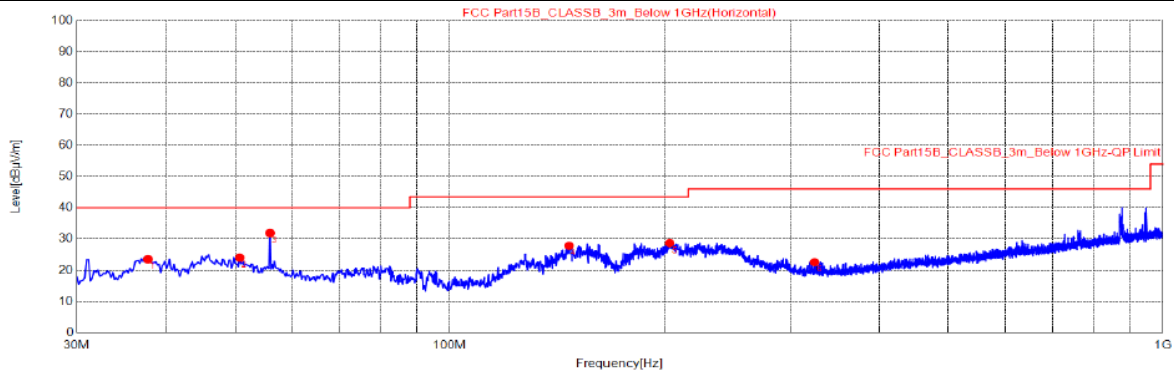

### Final Data List

NO.	Freq.[MHz]	Reading [dBμV]	Factor [dB]	Value [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle[°]	Polarity
1	37.76	34.93	-11.43	23.50	40.00	16.50	QP	169	164	Horizontal
2	50.76	34.41	-10.39	24.02	40.00	15.98	QP	135	15	Horizontal
3	56.00	42.32	-10.40	31.92	40.00	8.08	QP	200	22	Horizontal
4	146.98	37.7	-9.86	27.84	43.50	15.66	QP	142	336	Horizontal
5	203.44	41.17	-12.50	28.67	43.50	14.83	QP	115	343	Horizontal
6	324.69	30.12	-7.56	22.56	46.00	23.44	QP	200	31	Horizontal


### REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



Channel	144.19 kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical

Test Plot:

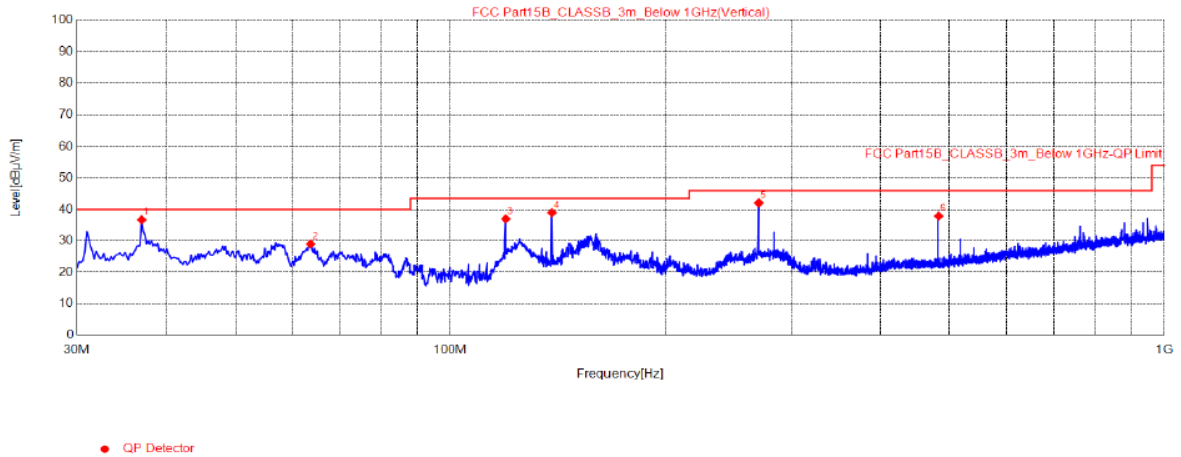

#### Suspected Data List

NO.	Freq. [MHz]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle[°]	Polarity
1	36.98	-11.49	36.69	40.00	3.31	QP	100	270	Vertical
2	63.76	-11.09	28.97	40.00	11.03	QP	100	254	Vertical
3	119.63	-11.66	36.98	43.50	6.52	QP	100	6	Vertical
4	138.83	-10.70	38.96	43.50	4.54	QP	100	293	Vertical
5	270.37	-9.17	42.10	46.00	3.90	QP	100	283	Vertical
6	482.99	-4.69	37.90	46.00	8.10	QP	100	43	Vertical

#### REMARKS:


- Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Limit value – Emission Level

### 4.3 20dB Spectrum Bandwidth Measurement

#### 4.3.1 Limit

Reporting only

#### 4.3.2 Test Setup

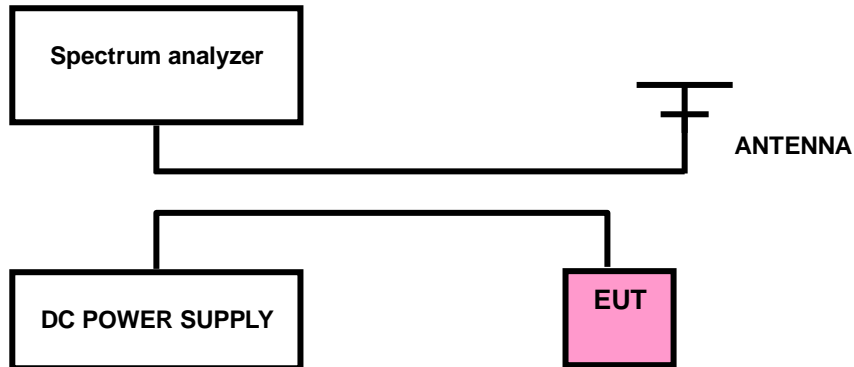

#### 4.3.3 Test Procedures


1. The resolution bandwidth of 200 Hz and the video bandwidth of 620 Hz were used.
2. EUT in peak Max hold mode.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

#### 4.3.4 Deviation of Test Standard

No deviation.

#### 4.3.5 Test Results

TEST MODE	CHANNEL FREQUENCY (KHz)	20dB BANDWIDTH (Hz)
Wireless Charging	144.19	991

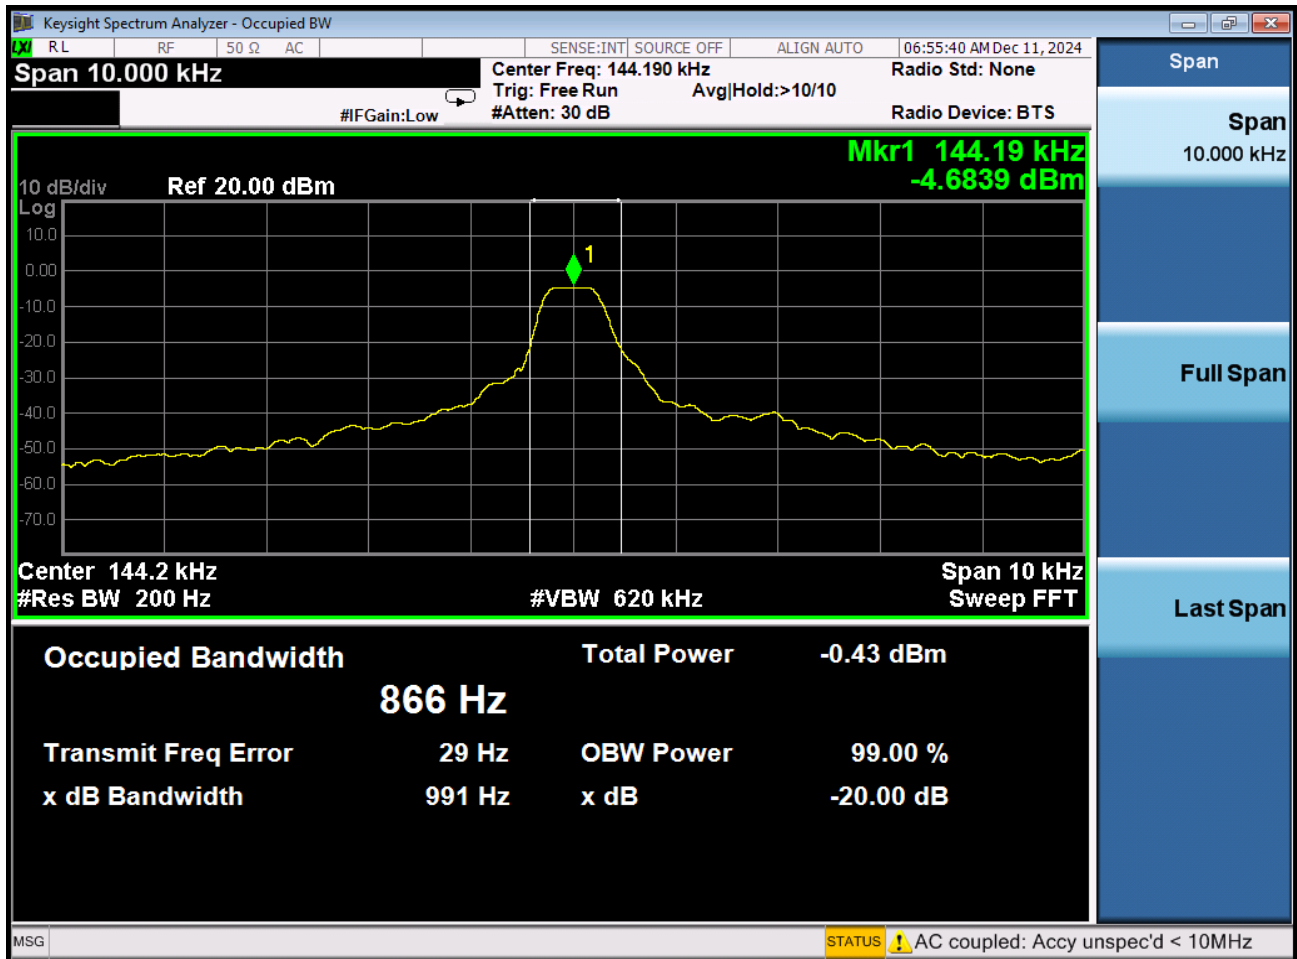

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

--- END ---