

Report No.: TW2309087E

Applicant: Shenzhen Xinrui Weiye Electronics Co., Ltd.

Product: Wireless remote control

Model No.: SA00004-1

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.231

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.231 for the evaluation of electromagnetic

compatibility

Approved By

Terry Tang

Manager

Dated: September 19, 2023


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No: TW2309087E Page 2 of 33

Date: 2023-08-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Page 3 of 33

Report No: TW2309087E

Date: 2023-08-19



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure.	10
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	12
6.5	Test Result.	13
7.0	20dB Bandwidth Test	18
8.0	Deactivate Test	20
9.0	Duty Cycle	22
10.0	Antenna Requirement.	27
11.0	FCC Label	28
12.0	Photo of Testing.	29

Report No: TW2309087E Page 4 of 33

Date: 2023-08-19



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: +86 755 83448688 Fax: +86 755 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Xinrui Weiye Electronics Co., Ltd.

Address: 301, Building B, No. 163, Huawang Road, Langkou Community, Dalang Street, Longhua

District, Shenzhen

Telephone: 0755-21019656 Fax: 0755-21019656

1.3 Description of EUT

Product: Wireless remote control

Manufacturer: Shenzhen Xinrui Weiye Electronics Co., Ltd.

Address: 301, Building B, No. 163, Huawang Road, Langkou Community, Dalang

Street, Longhua District, Shenzhen

Trademark: N/A

Model Number: SA00004-1

Additional Model Name N/A
Additional Trademark N/A

Rating: Input: 3.0V, 0.023A

Battery: DC3.0V (1pc CR2032 button battery)

Operation Frequency: 433.92MHz

Modulation Type: OOK

Hardware Version: XR-J15-45V1.0

Software Version: v1.2

Serial No.: 20230726001TX

Antenna Designation PCB Antenna with Gain 2.0dBi (Get from the antenna specification)

1.4 Submitted Sample: 3 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: TW2309087E Page 5 of 33

Date: 2023-08-19



1.5 Test Duration

2023-09-07 to 2023-09-19

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Andy -xing

Report No: TW2309087E Page 6 of 33

Date: 2023-08-19



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100253	2023-07-14	2024-07-13
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2023-07-14	2024-07-13
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2023-07-14	2024-07-13
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2023-07-14	2024-07-13
Power sensor	Anritsu	MA2491A	32263	2023-07-14	2024-07-13
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2023-07-14	2024-07-13
EMI Test Receiver	RS	ESCS 30	834115/006	2023-07-14	2024-07-13
Spectrum	HP/Agilent	E4407B	MY50441392	2023-07-14	2024-07-13
Spectrum	RS	FSP	1164.4391.38	2023-07-14	2024-07-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2023-07-14	2024-07-13
RF Cable	Zhengdi	7m		2023-07-14	2024-07-13
Pre-Amplifier	Schwarebeck	BBV9743	#218	2023-07-14	2024-07-13
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2023-07-14	2024-07-13
LISN	SCHAFFNER	NNB42	00012	2023-07-14	2024-07-13

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 33 Report No: TW2309087E

Date: 2023-08-19



3.0 **Technical Details**

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna	Pass	Compliant
	requirements		
FCC Part 15, Paragraph 15.207	Conducted	N/A	N/A
	Emission Test		
ECC Part 15 Days growth 15 200	General	Pass	Compliant
FCC Part 15, Paragraph 15.209	Requirement		Compliant
	Radiated	Pass	
FCC Part 15, Paragraph 15.231 (b)	Emission Test		Compliant
750 P 115 P 115 001 ()	20.17	-	G 11
FCC Part 15, Paragraph 15.231 (c)	20dB	Pass	Compliant
	Bandwidth		
	Testing	_	
FCC Part 15, Paragraph 15.231 (a1)	Deactivate	Pass	Compliant
	Testing		

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.231, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Page 8 of 33


Report No: TW2309087E

Date: 2023-08-19



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

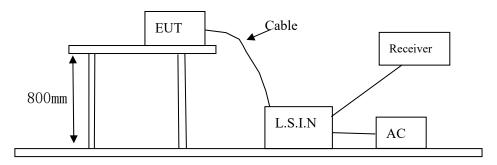

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Device Manufacturer		FCC ID
Wireless remote	Shenzhen Xinrui Weiye Electronics	SA00004-1	2DCTA CA00004 1
control	Co., Ltd.	5A00004-1	2BCTA-SA00004-1

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: TW2309087E Page 9 of 33

Date: 2023-08-19



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (c	lB μV)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results N/A

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)

Note: Due to CR2032 button Battery operation, this test item not applicable.

Report No: TW2309087E Page 10 of 33

Date: 2023-08-19




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at TIMEWAY EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 5 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

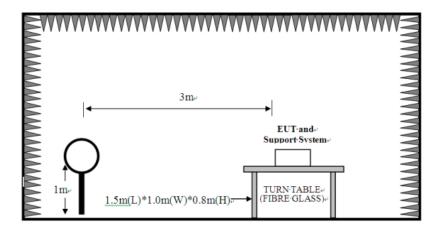


Report No: TW2309087E


Date: 2023-08-19



For radiated emissions from 30MHz to1GHz

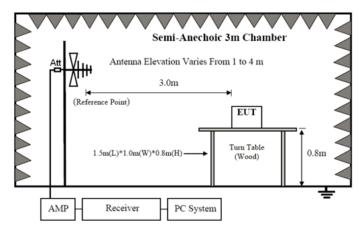

For radiated emissions above 1GHz

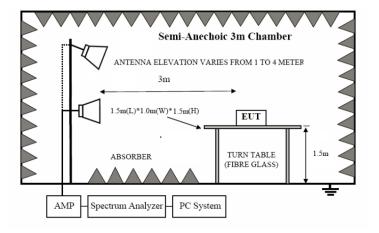

- 6.2 Configuration of the EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: TW2309087E Page 12 of 33

Date: 2023-08-19



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.231(a) Limit

Fundamental Frequency (MHz)	Field Strength of		Field Streng	gth of Spurious		
	Fundamental		Fundamental		Em	ission
	uV/m dBuV/m		uV/m	dBuV/m		
40.66-40.70	2250	67.04	225	47.04		
70-130	1250	61.94	125	41.94		
130-174	1250-3750	61.94-71.48	125-375	41.94-51.48		
174-260	3750	71.48	375	51.48		
260-470	3750-12500	71.48-81.94	375-1250	51.48-61.94		
Above 470	12500	81.94	1250	61.94		

Note:

- 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- 4. Linear interpolations for frequency ranges 130-174MHz and 260-470MHz
- 5.the above field strength limits are specified at a distance of 3-meters and the tighter limits apply at the band edges
- 6. New batteries were installed in the equipment under test for radiated emission testing.
- 7. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: TW2309087E Page 13 of 33

Date: 2023-08-19



B. Frequencies in restricted band are compiled to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-5G, the final emission level got using PK detector. And Average = peak(dBuV/m) duty cycle(dB)

6.5 Test result

A Fundamental and Harmonics Radiated emission data

Product:	Wireless remote control	Test Mode:	Keep Transmitting
Test Item:	Fundamental Radiated Emissio and Spurious Emission Data	n Temperature:	25℃
Test Voltage:	DC3.0V	Humidity:	56%
Test Result:	Pass		
Frequency	Emission PK/AV	Horizontal / Verti	cal Limits PK/AV
(MHz)	(dBuV/m)		(dBuV/m)
433.92	78.76 (PK)/ 70.024 (AV)	Н	100.8/80.6
433.92	63.84 (PK)/ 55.104(AV)	V	100.8/80.6
867.84		Н	80.8/60.6
867.84		V	80.8/60.6
1301.76	36.82 (PK)/ 28.084 (AV)	Н	74/54
1301.76	40.25 (PK)/ 31.514 (AV)	V	74/54
1735.68		Н	80.8/60.6
1735.68		V	80.8/60.6
2169.6	39.30 (PK)/ 30.564 (AV)	Н	80.8/60.6
2169.6	40.52 (PK)/ 31.784 (AV)	V	80.8/60.6
2603.52	44.09 (PK)/ 35.354 (AV)	Н	80.8/60.6
2603.52	47.97 (PK)/ 39.234 (AV)	V	80.8/60.6
3037.44	42.19 (PK)/ 33.454 (AV)	Н	80.8/60.6
3037.44	42.04 (PK)/ 33.304 (AV)	V	80.8/60.6
3471.36		H/V	80.8/60.6

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: TW2309087E Page 14 of 33

Date: 2023-08-19



3905.28	 H/V	74/54
4339.2	 H/V	74/54


Note: H=Horizontal, V=Vertical, AV=PK- | duty cycle factor | =PK -8.736

B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

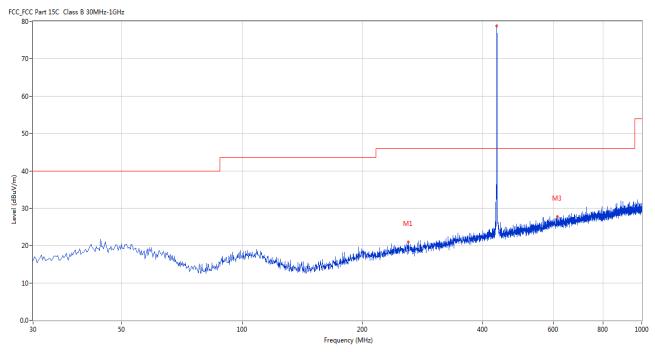

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	260.560	20.94	-11.84	46.0	25.06	Peak	157.00	100	Horizontal	Pass
2	433.904	78.76	-8.03	46.0	-32.76	Peak	94.00	100	Horizontal	N/A
3	614.521	27.73	-5.05	46.0	18.27	Peak	36.00	100	Horizontal	Pass

Report No: TW2309087E Page 15 of 33

Date: 2023-08-19




B. General Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

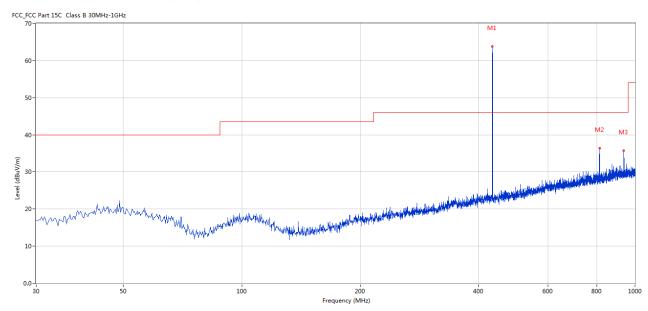

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	433.904	63.84	-8.03	46.0	-17.84	Peak	136.00	100	Vertical	N/A
2	812.594	36.34	-2.94	46.0	9.66	Peak	355.00	100	Vertical	Pass
3	937.451	35.72	-1.78	46.0	10.28	Peak	83.00	100	Vertical	Pass


Report No: TW2309087E Page 16 of 33

Date: 2023-08-19



Test Plot above 1G

Horizontal

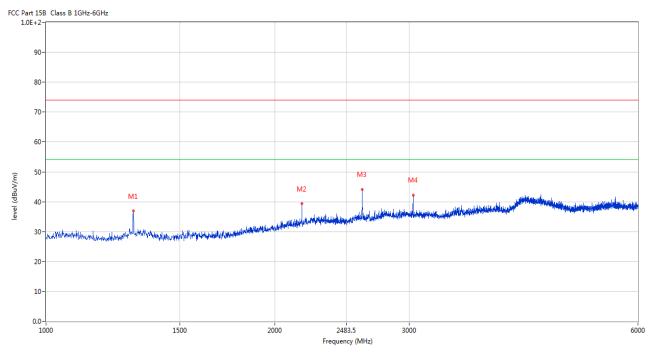


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	1301.626	36.82	-8.24	74.0	-37.18	Peak	101.00	100	Horizontal	Pass
2	2169.708	39.30	-3.55	74.0	-34.70	Peak	101.00	100	Horizontal	Pass
3	2603.349	44.09	-3.31	74.0	-29.91	Peak	250.00	100	Horizontal	Pass
4	3036.991	42.19	-2.48	74.0	-31.81	Peak	80.00	100	Horizontal	Pass

Report No: TW2309087E Page 17 of 33

Date: 2023-08-19



Vertical

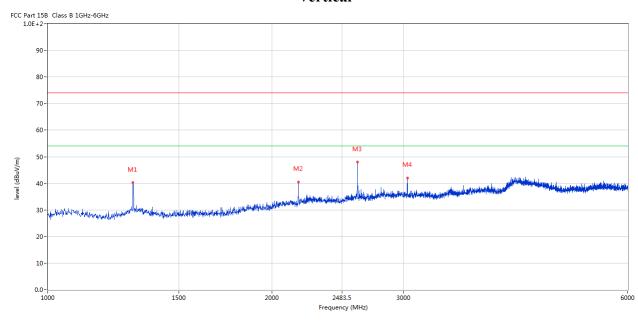

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1301.175	40.25	-8.24	74.0	-33.75	Peak	90.00	100	Vertical	Pass
2	2169.708	40.52	-3.55	74.0	-33.48	Peak	136.00	100	Vertical	Pass
3	2603.349	47.97	-3.31	74.0	-26.03	Peak	239.00	100	Vertical	Pass
4	3036.991	42.04	-2.48	74.0	-31.96	Peak	280.00	100	Vertical	Pass

Report No: TW2309087E

Date: 2023-08-19



Page 18 of 33

7.0 20dB Bandwidth Testing

7.1 Requirement

Per 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

7.3 Test Data

Frequency (MHz)	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
433.92	128.00	1084.8	Pass

Limit=Frequency x 0.25%=433.92x 0.25%=1084.8kHz

Refer to attached plots:


Page 19 of 33

Report No: TW2309087E

Date: 2023-08-19



20dB Bandwidth

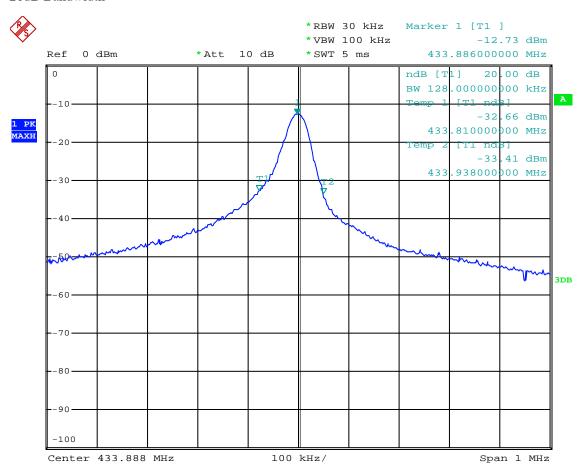

Date: 14.SEP.2023 17:34:35

Report No: TW2309087E Page 20 of 33

Date: 2023-08-19




8.0 Deactivate Test

8.1 Requirement

Per 15.231(a) (1)

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

8. 2 Radiated Test Setup

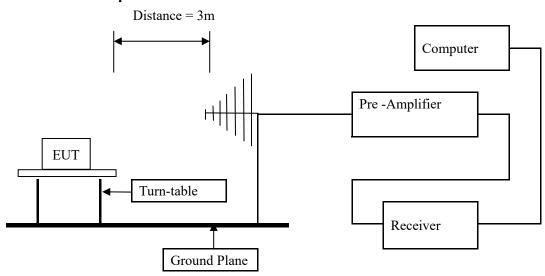

For the actual test configuration, please refer to the related items – Photos of Testing The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.231(e) limits.

8.3 Test Procedure


Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Report No: TW2309087E

Date: 2023-08-19



8.4 Test Data Refer to attached plots:

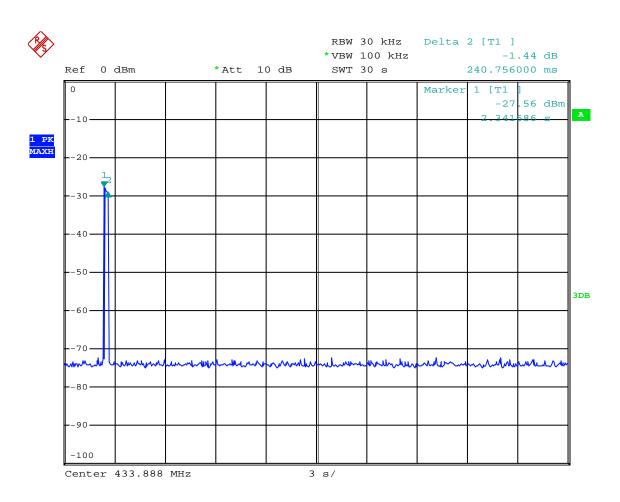

Date: 14.SEP.2023 17:55:10

8.5 Test result

Pass

Report No: TW2309087E

Date: 2023-08-19



Page 22 of 33

9.0 Duty Cycle

9.1 Limit

No dedicated limit specified in the Rules

9.2 Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW = VBW=1000kHz, Span=0Hz, Adjust Sweep=100ms.
- 5. Repeat above procedures until all frequency measured were complete.

9.3 Test Data

Base on the worst case

Tp = 100ms

 $T_{on1} = 0.756*33 = 24.948 \text{ (ms)}$

 $T_{on2} = 0.342*34 = 11.628$ (ms)

Duty cycle=Ton/Tp=36.576/100=0.36576=36.576%

Duty cycle factor = $20 * \log (\text{duty cycle}) = 20 * \log (0.36576) = -8.736 dB$


Page 23 of 33

Report No: TW2309087E

Date: 2023-08-19



Testing Plots:

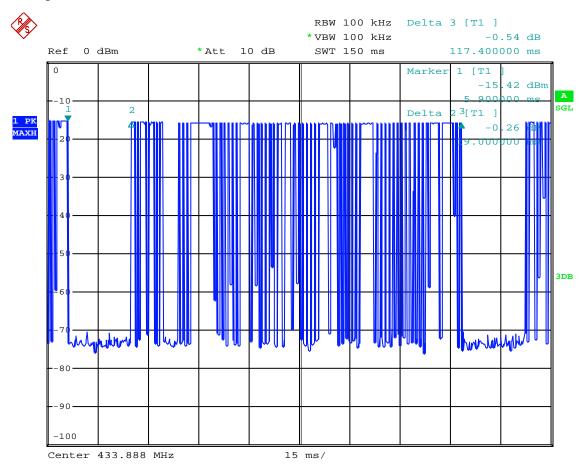


Date: 14.SEP.2023 17:41:40

Page 24 of 33

Report No: TW2309087E

Date: 2023-08-19



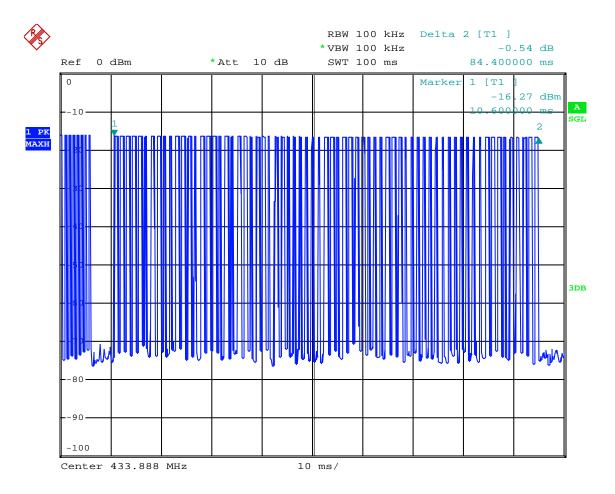

Date: 14.SEP.2023 17:44:40


Page 25 of 33

Report No: TW2309087E

Date: 2023-08-19



 $T_{on1} \\$

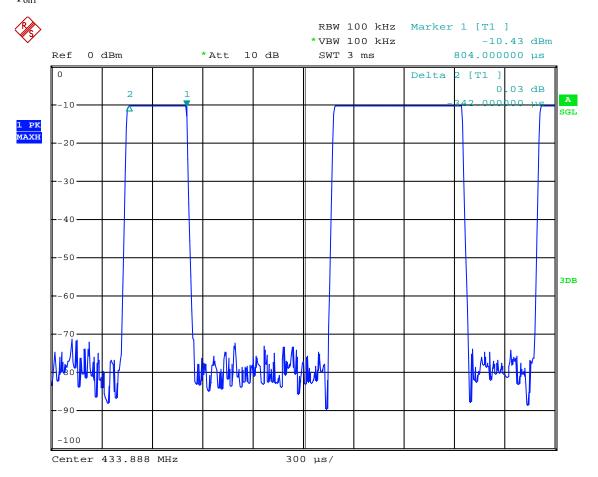

Date: 14.SEP.2023 17:45:58


Page 26 of 33

Report No: TW2309087E

Date: 2023-08-19



 T_{on2}

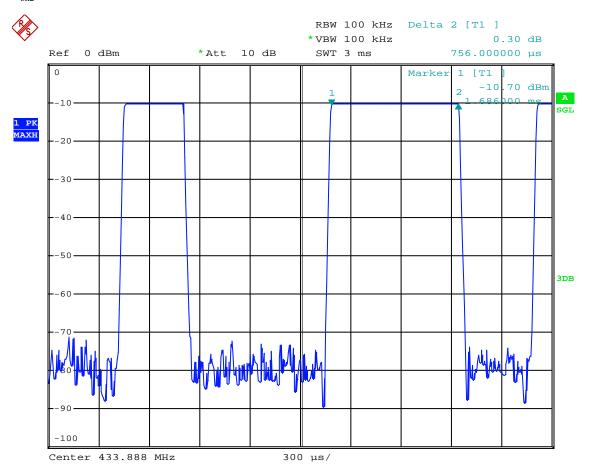

Date: 14.SEP.2023 17:46:38

Report No: TW2309087E

Date: 2023-08-19



Page 27 of 33

10.0 Antenna Requirement

10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.2 Antenna Connected constructions

The antenna is PCB Antenna which is built-in. The antenna gain is 2.0dBi. So it meets the requirement of 15.203

Report No: TW2309087E Page 28 of 33

Date: 2023-08-19




11.0 FCC ID Label

FCC ID: 2BCTA-SA00004-1

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

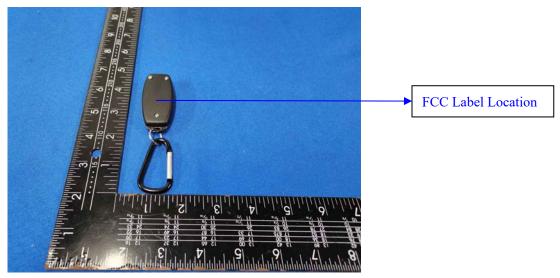

Report No: TW2309087E

Date: 2023-08-19



12.0. Photo of testing

- 12.1 Conducted test View-N/A
- 12.2





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 30 of 33 Report No: TW2309087E

Date: 2023-08-19



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 31 of 33

Report No: TW2309087E

Date: 2023-08-19



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Report No: TW2309087E Page 32 of 33

Date: 2023-08-19



Inside View



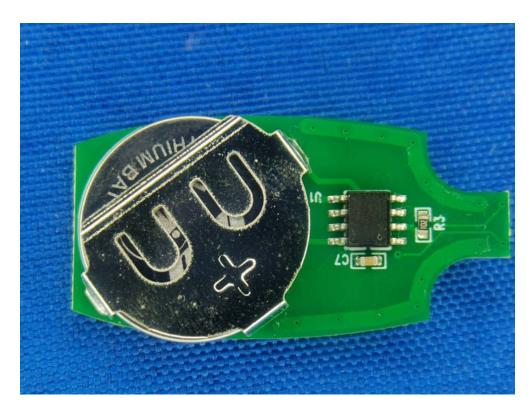

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 33 of 33 Report No: TW2309087E

Date: 2023-08-19



Inside View

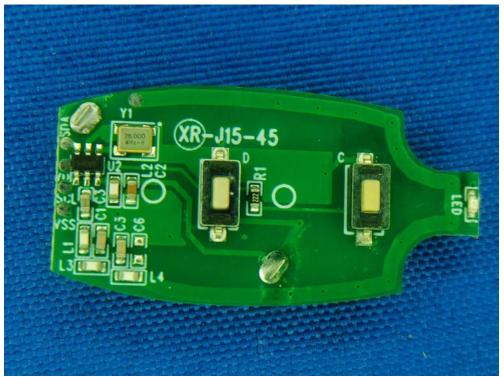

-End of the report-