

FCC Measurement/Technical Report on

WLAN and Bluetooth Module

MAYA-W160

FCC ID: XPYMAyaw160
IC: 8595A-MAYAW160

Test Report Reference: MDE_UBLOX_2404_FCC_03_rev01

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Sebastian Doose
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary	5
2	Revision History / Signatures	8
3	Administrative Data	9
3.1	Testing Laboratory	9
3.2	Project Data	9
3.3	Applicant Data	9
3.4	Manufacturer Data	10
4	Test object Data	11
4.1	General EUT Description	11
4.2	EUT Main components	12
4.3	Ancillary Equipment	12
4.4	Auxiliary Equipment	13
4.5	EUT Setups	13
4.6	Operating Modes / Test Channels	14
4.7	Product labelling	14
5	Test Results	15
5.1	Peak Power Output	15
5.2	Transmitter Spurious Radiated Emissions	23
5.3	Band Edge Compliance Radiated	40
6	Test Equipment	67
6.1	Test Equipment Hardware	67
6.2	Test Equipment Software	71
7	Antenna Factors, Cable Loss and Sample Calculations	72
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	72
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	73
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	74
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	75
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	76
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	77
8	Measurement Uncertainties	78
9	Photo Report	79

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-23 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02".
ANSI C63.10-2013 is applied.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 3: 5.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 3: 5.4 (d)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 3: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 3: 5.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.3
Receiver spurious emissions	–	–

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (b) (3)

Peak Power Output

The measurement was performed according to ANSI C63.10, chapter 11.9.1.1/11.9.2.3.2

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Measurement method				
Bluetooth BDR, high, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth BDR, low, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth BDR, mid, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth EDR 2, high, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth EDR 2, low, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth EDR 2, mid, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth EDR 3, high, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth EDR 3, low, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth EDR 3, mid, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth LE 1 Mbps, high, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth LE 1 Mbps, low, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth LE 1 Mbps, mid, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth LE 2 Mbps, high, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth LE 2 Mbps, low, conducted	S04_160_AB02	2024-07-10	Passed	Passed
Bluetooth LE 2 Mbps, mid, conducted	S04_160_AB02	2024-09-12	Passed	Passed
WLAN b, high, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN b, low, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN b, mid, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN g, high, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN g, low, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN g, mid, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN n 20 MHz, high, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN n 20 MHz, low, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN n 20 MHz, mid, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN n 40 MHz, high, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN n 40 MHz, low, conducted	S04_160_AB02	2024-07-08	Passed	Passed
WLAN n 40 MHz, mid, conducted	S04_160_AB02	2024-07-08	Passed	Passed

47 CFR CHAPTER I FCC PART 15
§ 15.247 (d)
Subpart C §15.247

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10, chapter 6.4, 6.5, 6.6.5

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Measurement range				
Bluetooth BDR, high, 1 GHz - 26 GHz	S01_160_AB02	2024-08-04	Passed	Passed
Bluetooth BDR, high, 1 GHz - 26 GHz	S03_160_AB02	2024-07-31	Passed	Passed
Bluetooth BDR, mid, 30 MHz - 1 GHz Remark: Tested together with WLAN	S01_160_AB02	2024-08-12	Passed	Passed
Bluetooth BDR, mid, 30 MHz - 1 GHz Remark: Tested together with WLAN	S03_160_AA01	2024-07-09	Passed	Passed
Bluetooth BDR, mid, 9 kHz - 30 MHz Remark: Tested together with WLAN	S01_160_AB02	2024-08-12	Passed	Passed
Bluetooth BDR, mid, 9 kHz - 30 MHz Remark: Tested together with WLAN	S03_160_AA01	2024-07-09	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz	S01_160_AC03	2024-08-05	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz	S03_160_AB02	2024-08-01	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz Remark: Tested together with Bluetooth	S01_160_AB02	2024-08-12	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz Remark: Tested together with Bluetooth	S03_160_AA01	2024-07-09	Passed	Passed
WLAN b, high, 9 kHz - 30 MHz Remark: Tested together with Bluetooth	S01_160_AB02	2024-08-12	Passed	Passed
WLAN b, high, 9 kHz - 30 MHz Remark: Tested together with Bluetooth	S03_160_AA01	2024-07-09	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz Remark: Tested in range 3.6 to 5.15 GHz only.	S01_160_AC03	2024-08-23	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz Remark: Tested in range 3.6 to 5.15 GHz only.	S01_160_AC03	2024-08-23	Passed	Passed
WLAN g, low, 1 GHz - 26 GHz Remark: Range 1 - 8 GHz tested only	S03_160_AC03	2024-08-14	Passed	Passed

47 CFR CHAPTER I FCC PART 15
§ 15.247 (d)
Subpart C §15.247

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10, chapter 6.6.5

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Band Edge				
Bluetooth BDR, high, high	S01_160_AB02	2024-08-04	Passed	Passed
Bluetooth BDR, high, high	S03_160_AB02	2024-07-31	Passed	Passed
Bluetooth EDR 2, high, high	S01_160_AB02	2024-08-04	Passed	Passed
Bluetooth EDR 2, high, high	S03_160_AB02	2024-07-31	Passed	Passed
Bluetooth EDR 3, high, high	S01_160_AB02	2024-08-04	Passed	Passed
Bluetooth EDR 3, high, high	S03_160_AB02	2024-07-31	Passed	Passed
Bluetooth LE 1 Mbps, high, high	S01_160_AB02	2024-08-04	Passed	Passed
Bluetooth LE 1 Mbps, high, high	S03_160_AB02	2024-07-31	Passed	Passed
Bluetooth LE 2 Mbps, high, high	S01_160_AB02	2024-08-04	Passed	Passed
Bluetooth LE 2 Mbps, high, high	S03_160_AB02	2024-07-31	Passed	Passed
WLAN b, high, high	S01_160_AC03	2024-08-05	Passed	Passed
WLAN b, high, high	S03_160_AB02	2024-08-01	Passed	Passed
WLAN g, high, high	S01_160_AB02	2024-08-04	Passed	Passed
WLAN g, low, low	S03_160_AB02	2024-07-31	Passed	Passed
WLAN g, high, high	S03_160_AB02	2024-07-31	Passed	Passed
WLAN n 20 MHz, low, low	S01_160_AC03	2024-08-14	Passed	Passed
WLAN n 20 MHz, high, high	S01_160_AB02	2024-08-04	Passed	Passed
WLAN n 20 MHz, high, high	S03_160_AB02	2024-07-31	Passed	Passed
WLAN n 40 MHz, low, low	S03_160_AC03	2024-08-26	Passed	Passed
WLAN n 40 MHz, high, high	S01_160_AB02	2024-08-04	Passed	Passed
WLAN n 40 MHz, low, low	S03_160_AC03	2024-08-26	Passed	Passed
WLAN n 40 MHz, high, high	S03_160_AC03	2024-08-26	Passed	Passed


N/A: Not applicable

N/P: Not performed

2 REVISION HISTORY / SIGNATURES

Report version control			
Version	Release date	Change Description	Version validity
initial	2024-09-12	--	valid
rev01	2024-11-07	Administrative changes	valid

COMMENT: This test is a spot check report for antenna with higher gain at reduced power settings. Not all tests were performed. Full testing was performed in report MDE_UBLOX_2110_FCC_01 for a variant with different antenna connectors, while spot checks for this variant were performed in report MDE_UBLOX_2110_FCC_06.



(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall



(responsible for testing and report)
B.Sc. Mohamed Fraitat



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01 | -02 | -03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier: DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall
Report Template Version: 2023-09-29

3.2 PROJECT DATA

Responsible for testing and report: B.Sc. Mohamed Fraitat
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2024-11-07
Testing Period: 2024-07-08 to 2024-09-12

3.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
8800 Thalwil
Switzerland
Contact Person: Filip Kruzela

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data

Address:

Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Host-based module with WLAN and Bluetooth technology																																																																																		
Product name	MAYA-W160-00B																																																																																		
Type	MAYA-W160-00B																																																																																		
PMN	MAYA-W160-00B																																																																																		
HVIN	MAYA-W160-00B																																																																																		
Declared EUT data by the supplier																																																																																			
Voltage Type	DC																																																																																		
Voltage Level	1.8 V + 3.3 V																																																																																		
Antenna / Gain	External / 3 dBi (Molex Antenna), 4.1 dBi (Linx Antenna)																																																																																		
Tested Modulation Type	BT Classic: GFSK (BDR), Pi/4 DQPSK (EDR 2), 8DPSK (EDR 3) BT LE: GFSK WLANb: DSSS WLANg/n: OFDM																																																																																		
Specific product description for the EUT	The EUT is a Bluetooth and WLAN module. In the 2.4 GHz band it supports SISO Mode only. Supported technologies are Bluetooth Classic, Bluetooth Low Energy and WLAN b, g, n 20 and 40 MHz bandwidth.																																																																																		
EUT ports (connected cables during testing):	Enclosure Data DC Antenna The EUT is a module with solder pads for surface mounting, so no cables were connected to the EUT itself.																																																																																		
Tested datarates	BT Classic: 1 (BDR), 2 (EDR 2) and 3 Mbps (EDR 3) BT LE: 1 and 2 Mbps WLAN b: 1 Mbps, g: 6 Mbps, n: MCS 0																																																																																		
Special software used for testing	Scripts were provided by the applicant on a laptop that control a board computer, which sets the test modes of the EUT.																																																																																		
Used output power	BT Classic: 6 dBm BT LE: 8 dBm WLAN: <table><tr><th colspan="12">2.4 GHz</th></tr><tr><th>Mode</th><th>Ch.1</th><th>Ch.2</th><th>Ch.3</th><th>Ch.4</th><th>Ch.5</th><th>Ch.6</th><th>Ch.7</th><th>Ch.8</th><th>Ch.9</th><th>Ch.10</th><th>Ch.11</th></tr><tr><td>b</td><td>16</td><td colspan="8">16</td><td></td><td>16</td></tr><tr><td>g</td><td>14</td><td>16</td><td colspan="6">16</td><td></td><td>15</td><td>14</td></tr><tr><td>n20</td><td>13</td><td>14</td><td colspan="6">14</td><td></td><td>14</td><td>13</td></tr><tr><td>n40</td><td>N/A</td><td>N/A</td><td colspan="2">12</td><td>13</td><td>14</td><td colspan="3">13</td><td>N/A</td><td>N/A</td></tr></table> Note by the laboratory: power reduced by 2 dB compared to original certification, gain raised by 1 / 2.1 dB											2.4 GHz												Mode	Ch.1	Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9	Ch.10	Ch.11	b	16	16									16	g	14	16	16							15	14	n20	13	14	14							14	13	n40	N/A	N/A	12		13	14	13			N/A	N/A
2.4 GHz																																																																																			
Mode	Ch.1	Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9	Ch.10	Ch.11																																																																								
b	16	16									16																																																																								
g	14	16	16							15	14																																																																								
n20	13	14	14							14	13																																																																								
n40	N/A	N/A	12		13	14	13			N/A	N/A																																																																								

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
MAYA-W160 AA01	AA01	
Sample Parameter	Value	
Serial No.	M426C1DEB90FBA80522	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment		

Sample Name	Sample Code	Description
MAYA-W160 AB02	AB02	-
Sample Parameter	Value	
Serial No.	M426C1DEB90FBA80400	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment		

Sample Name	Sample Code	Description
MAYA-W160 AC03	AC03	-
Sample Parameter	Value	
Serial No.	M426C1DEB90FBA80400	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment		

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX 01	Molex, 146153-0100, -, - , -	Molex PCB Antenna gain 2.4 GHz: 3 dBi 5 GHz: 4.0 dBi
AUX 02	Linx, ANT-DB1-RAF-SMA, -, - , -	Linx Dipole Antenna gain 2.4 GHz: 4.1 dBi 5 GHz: 5.1 dBi
AUX 04	NXP, i.MX 8M MINI on 8MMINI-BB, REV A5, -, TR23390198	Board Computer connected to Evaluation board for setting modes
AUX 07	UBLOX, MAYA-W1 EVK, Rev. A, - , 10000002386989006001	Evaluation board for module providing ports
AUX 08	UBLOX, MAYA-W1 EVK, Rev. A, - , 10000002386989005003	Evaluation board for module providing ports
AUX 09	UBLOX, MAYA-W1 EVK, Rev. A, - , 10000002386976004002	Evaluation board for module providing ports

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S04_160_AB02	MAYA-W160 AB02, AUX 04, AUX 08,	Conducted Setup
S03_160_AC03	MAYA-W160 AC03, AUX 01, AUX 09,	With Molex Antenna
S01_160_AC03	MAYA-W160 AB02, AUX 02, AUX 09,	With Linx Antenna
S01_160_AB02	MAYA-W160 AB02, AUX 02, AUX 08,	With Linx Antenna
S03_160_AA01	MAYA-W160 AA01, AUX 07, AUX 01,	With Molex Antenna
S03_160_AB02	MAYA-W160 AB02, AUX 08, AUX 01,	With Molex Antenna

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

WLAN

20 MHz Test Channels:

Channel:

Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
1	6	11
2412	2437	2462

40 MHz Test Channels:

Channel:

Frequency [MHz]

low	mid	high
3	6	11
2422	2437	2462

BT Test Channels:

Channel:

Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	39	78
2402	2441	2480

BT LE Test Channels:

Channel:

Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	19	39
2402	2440	2480

Duty Cycles were copied from the initial project (same samples, same commands)

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 11.9.1.1/11.9.2.3.2

5.1.1 TEST DESCRIPTION

DTS EQUIPMENT:

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.

Maximum peak conducted output power (e.g. Bluetooth Low Energy):

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

The reference level of the spectrum analyser was set higher than the output power of the EUT.


Analyser settings:

- Resolution Bandwidth (RBW): $\geq$ DTS bandwidth
- Video Bandwidth (VBW): $\geq$ 3 times RBW or maximum of analyzer
- Span: $\geq$ 3 times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 300, max. 15000)
- Sweeptime: Auto
- Detector: Peak


Maximum conducted average output power (e.g. WLAN):

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Measurement is performed using the gated RF average power meter integrated in the OSP 120 module OSP-B157W8 with signal bandwidth >300 MHz.

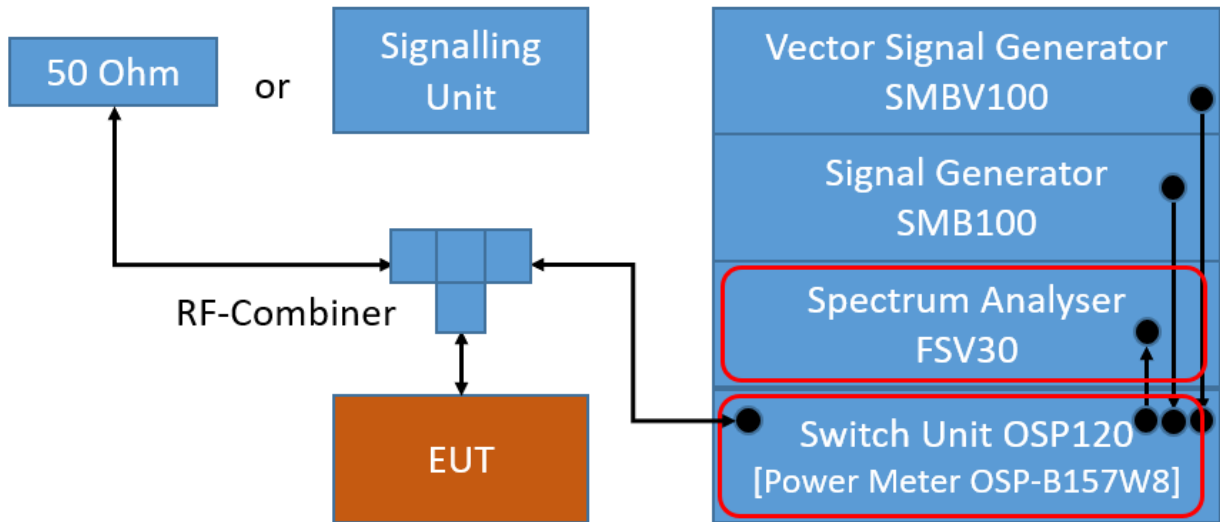

TS8997; Output Power

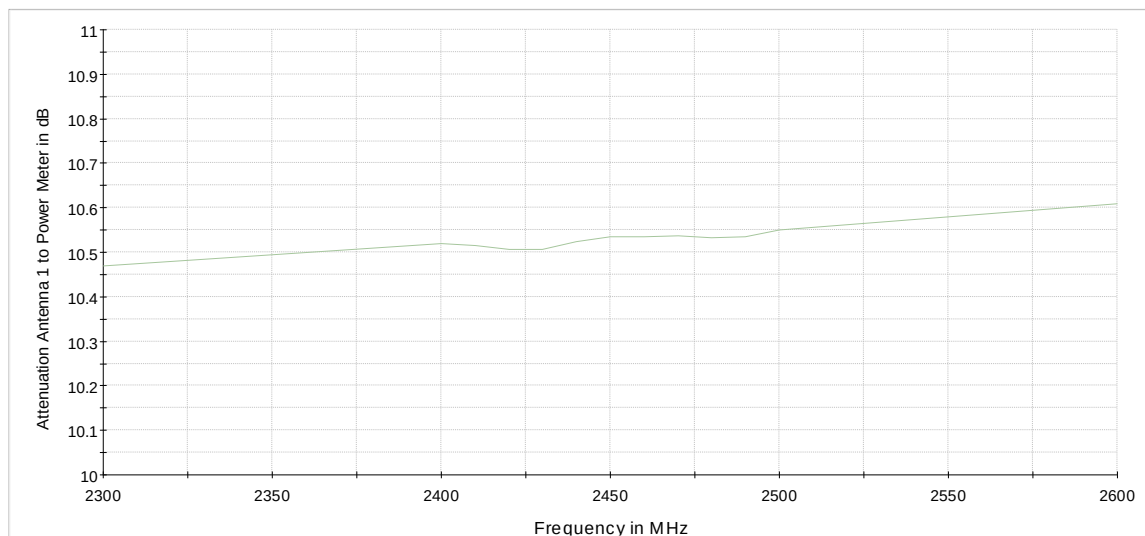

Attenuation of the measurement path to Power Meter

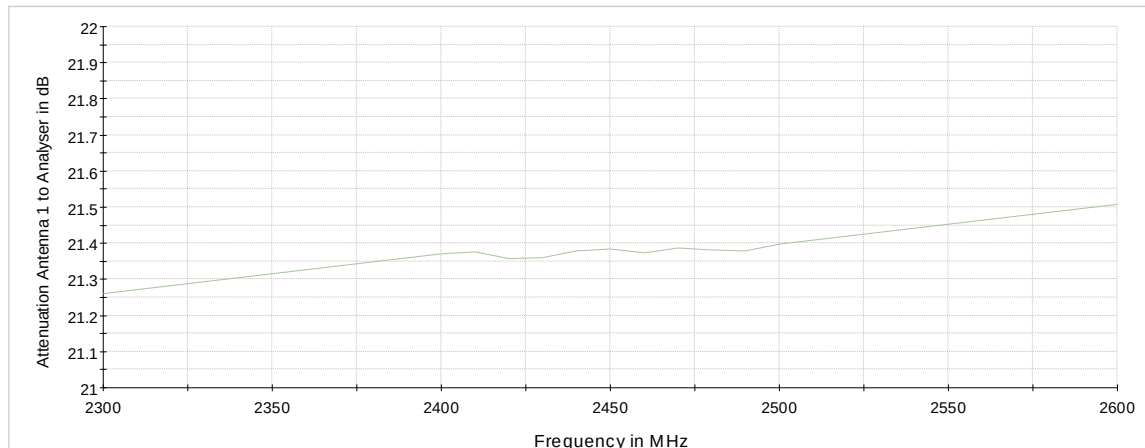

Attenuation of the measurement path to Analyser

5.1.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

=> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Frequency Hopping Systems:

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W))/1mW)

5.1.3 TEST PROTOCOL

Ambient temperature: 24 - 27 °C
 Air Pressure: 1009 - 1011 hPa
 Humidity: 40 - 50 %
 BT GFSK (1-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	5.5	30.0	24.5	9.6
	39	2441	5.3	30.0	24.7	9.4
	78	2480	5.1	30.0	24.9	9.2

BT $\pi/4$ DQPSK (2-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	4.4	30.0	25.6	8.5
	39	2441	4.4	30.0	25.6	8.5
	78	2480	4.2	30.0	25.8	8.3

BT 8-DPSK (3-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	4.9	30.0	25.1	9.0
	39	2441	4.7	30.0	25.3	8.8
	78	2480	4.4	30.0	25.6	8.5

BT LE 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	5.8	30.0	24.2	9.9
	19	2440	5.7	30.0	24.3	9.8
	39	2480	5.6	30.0	24.4	9.7

BT LE 2 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	5.9	30.0	24.1	10.0
	19	2440	5.9	30.0	24.1	10.0
	39	2480	6.5	30.0	23.5	10.6

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	17.0	30.0	13.0	21.1
	6	2437	17.0	30.0	13.0	21.1
	11	2462	17.0	30.0	13.0	21.1

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	14.7	30.0	15.3	18.8
	6	2437	16.8	30.0	13.3	20.9
	11	2462	14.7	30.0	15.3	18.8

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	13.9	30.0	16.1	18.0
	6	2437	14.9	30.0	15.1	19.0
	11	2462	13.9	30.0	16.1	18.0

WLAN n-Mode; 40 MHz; MCS0


Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	3	2422	12.8	30.0	17.2	16.9
	6	2437	14.8	30.0	15.2	18.9
	9	2452	13.7	30.0	16.3	17.8

Remark: Please see next sub-clause for the measurement plot.
 No plots provided for WLAN (power meter measurement).

5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = Bluetooth BDR, Operating Frequency = low, Measurement method = conducted
(S04_160_AB02)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	5.5	21.0	PASS

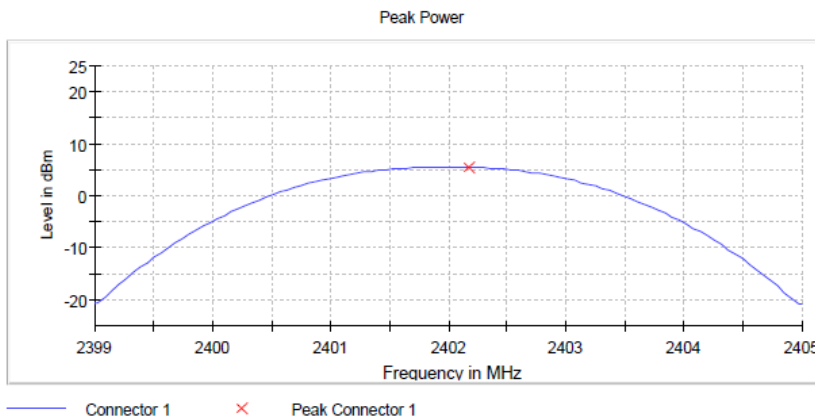

Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	953.450 ns
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.01 dB

Radio Technology = Bluetooth EDR 2, Operating Frequency = low, Measurement method = conducted
(S04_160_AB02)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	4.4	21.0	PASS

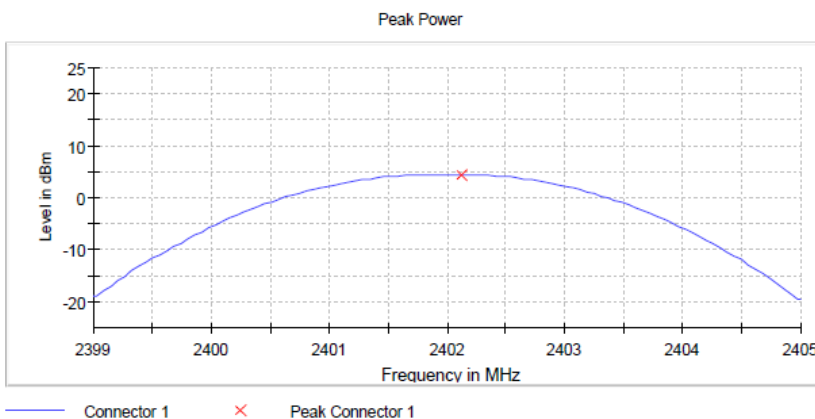

Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	953.450 ns
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.00 dB

Radio Technology = Bluetooth EDR 3, Operating Frequency = low, Measurement method = conducted
(S04_160_AB02)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	4.9	21.0	PASS

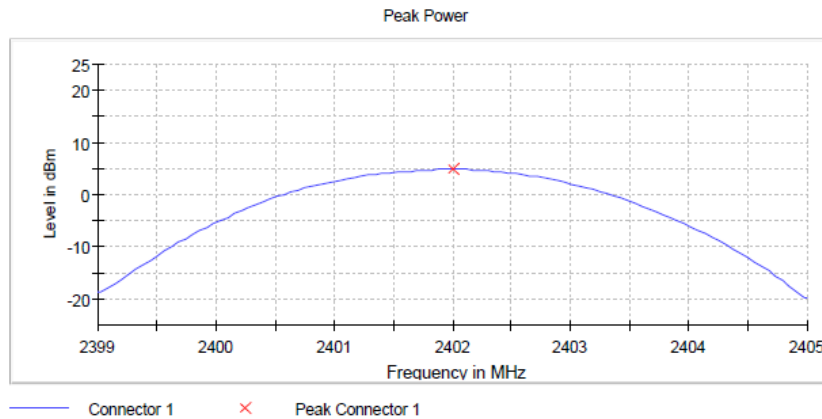

Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	953.450 ns
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.00 dB

Radio Technology = Bluetooth LE 1 Mbps, Operating Frequency = low, Measurement method = conducted
(S04_160_AB02)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	5.8	30.0	PASS

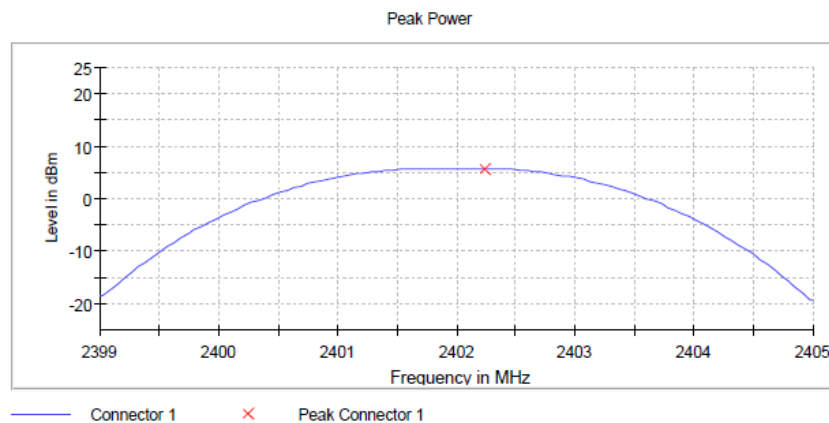

Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	953.450 ns
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.00 dB

Radio Technology = Bluetooth LE 2 Mbps, Operating Frequency = high, Measurement method
= conducted
(S04_160_AB02)

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	6.4	30.0	PASS

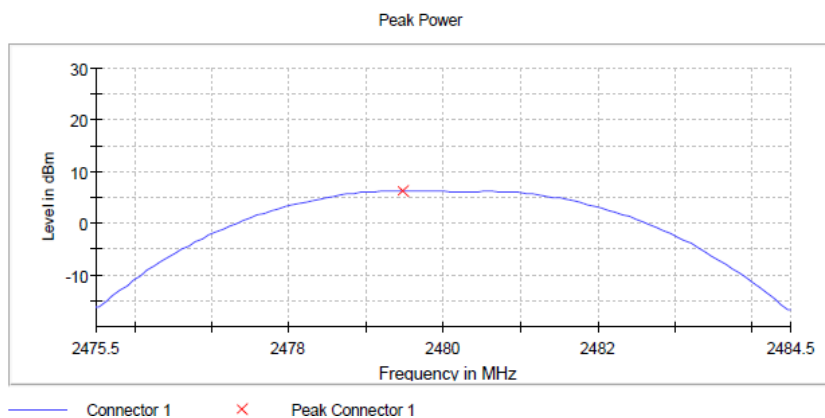

Setting	Instrument Value
Start Frequency	2.47550 GHz
Stop Frequency	2.48450 GHz
Span	9.000 MHz
RBW	3.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.271 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.00 dB

5.1.5 TEST EQUIPMENT USED

- R&S TS8997

5.2 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 6.4, 6.5, 6.6.5

5.2.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

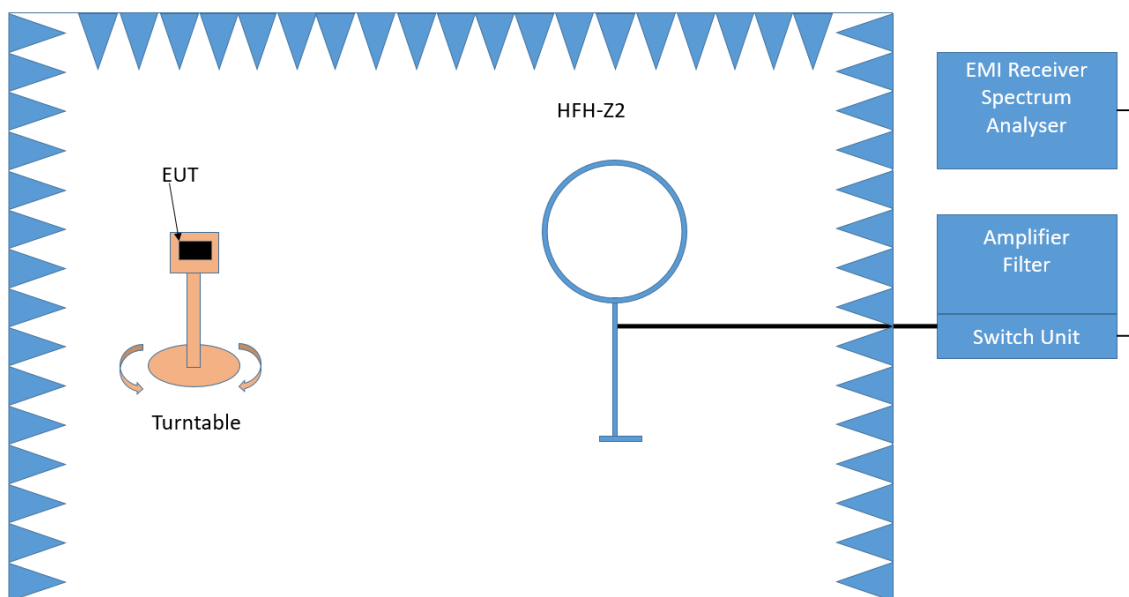

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber

- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak (9 kHz - 150 kHz, Peak / Average 150 kHz- 30 MHz)
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

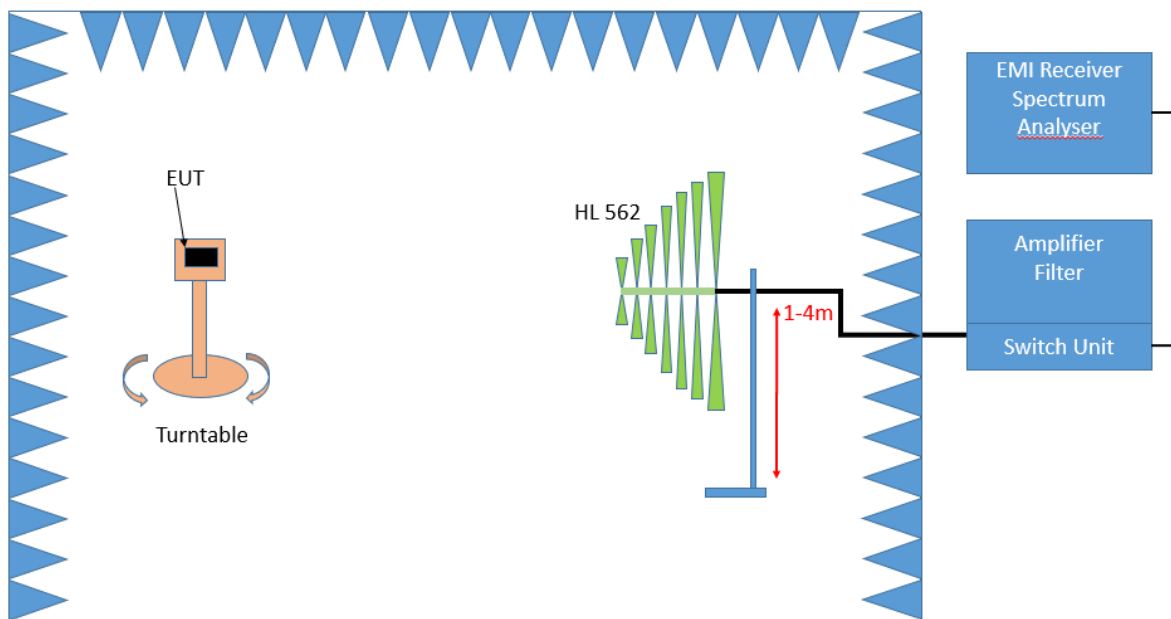

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 - 4 m

- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360°. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary between 1 – 4 meter. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: 360 °
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s


After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement above 1 GHz

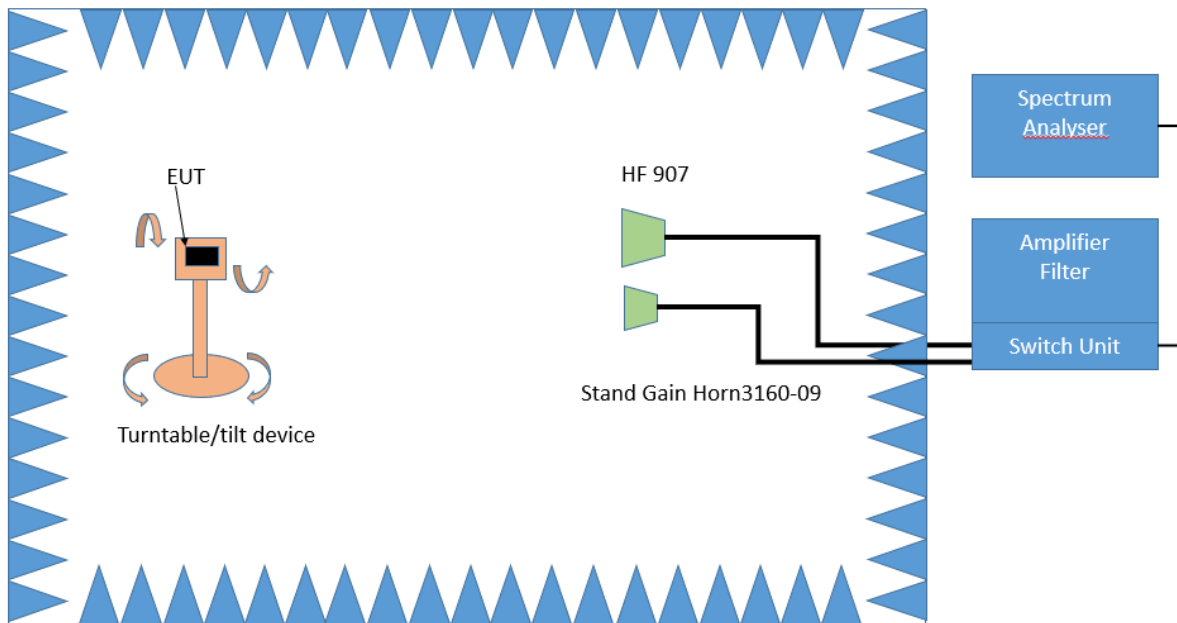

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

5.2.3 TEST PROTOCOL

Ambient temperature: 26 – 29 °C
 Air Pressure: 1003 – 1011 hPa
 Humidity: 44 – 52 %
 BT GFSK (1-DH1)
 Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]	Limit Type
Molex	2480	4960.0	50.7	PEAK	1000	74.0	23.3	RB
Molex	2480	4960.0	41.7	AV	1000	54.0	12.3	RB
Linx	2480	4960.0	52.8	PEAK	1000	74.0	21.2	RB
Linx	2480	4960.0	45.9	AV	1000	54.0	8.1	RB

WLAN b-Mode; 20 MHz; 1 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Antenna	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]	Limit Type
Linx	2412	3617.8	58.3	PEAK	1000	74.0	15.7	RB
Linx	2412	3617.8	51.8	AV	1000	54.0	2.2	RB
Linx	2412	4018.4	58.6	PEAK	1000	74.0	15.4	RB
Linx	2412	4018.4	53.0	AV	1000	54.0	1.0	RB
Linx	2412	4824.0	54.2	PEAK	1000	74.0	19.8	RB
Linx	2412	4824.0	48.9	AV	1000	54.0	5.1	RB
Molex	2462	2488.1	57.7	PEAK	1000	74.0	16.3	RB
Molex	2462	2488.1	48.5	AV	1000	54.0	5.5	RB
Molex	2462	3692.8	54.8	PEAK	1000	74.0	19.2	RB
Molex	2462	3692.8	47.1	AV	1000	54.0	6.9	RB
Molex	2462	4105.2	53.8	PEAK	1000	74.0	20.2	RB
Molex	2462	4105.2	45.8	AV	1000	54.0	8.2	RB
Molex	2462	4924.0	54.7	PEAK	1000	74.0	19.3	RB
Molex	2462	4924.0	50.1	AV	1000	54.0	3.9	RB
Molex	2462	7386.8	57.6	PEAK	1000	74.0	16.4	RB
Molex	2462	7386.8	51.3	AV	1000	54.0	2.7	RB
Molex	2462	12311.0	54.9	PEAK	1000	74.0	19.1	RB
Molex	2462	12311.0	46.1	AV	1000	54.0	7.9	RB
Linx	2437	3655.4	58.8	PEAK	1000	74.0	15.2	RB
Linx	2437	3655.4	52.5	AV	1000	54.0	1.5	RB
Linx	2437	4060.2	56.3	PEAK	1000	74.0	17.7	RB
Linx	2437	4060.2	50.0	AV	1000	54.0	4.0	RB
Linx	2437	4873.9	54.6	PEAK	1000	74.0	19.4	RB
Linx	2437	4873.9	49.7	AV	1000	54.0	4.3	RB
Linx	2462	3693.0	57.8	PEAK	1000	74.0	16.2	RB
Linx	2462	3693.0	51.4	AV	1000	54.0	2.6	RB
Linx	2462	4102.4	55.5	PEAK	1000	74.0	18.5	RB
Linx	2462	4102.4	48.6	AV	1000	54.0	5.4	RB
Linx	2462	4924.1	56.0	PEAK	1000	74.0	18.0	RB
Linx	2462	4924.1	52.2	AV	1000	54.0	1.8	RB


WLAN g-Mode; 20 MHz; 6 Mbit/s
Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
Molex	2412	1607.9	54.6	PEAK	1000	74.0	19.4	RB
Molex	2412	1607.9	40.5	AV	1000	54.0	13.5	RB
Molex	2412	3616.8	51.2	PEAK	1000	74.0	22.8	RB
Molex	2412	3616.8	39.3	AV	1000	54.0	14.7	RB
Molex	2412	4016.6	57.7	PEAK	1000	74.0	16.3	RB
Molex	2412	4016.6	43.6	AV	1000	54.0	10.4	RB

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = Bluetooth BDR, Operating Frequency = mid, Measurement range = 9 kHz
- 30 MHz
(S01_160_AB02)

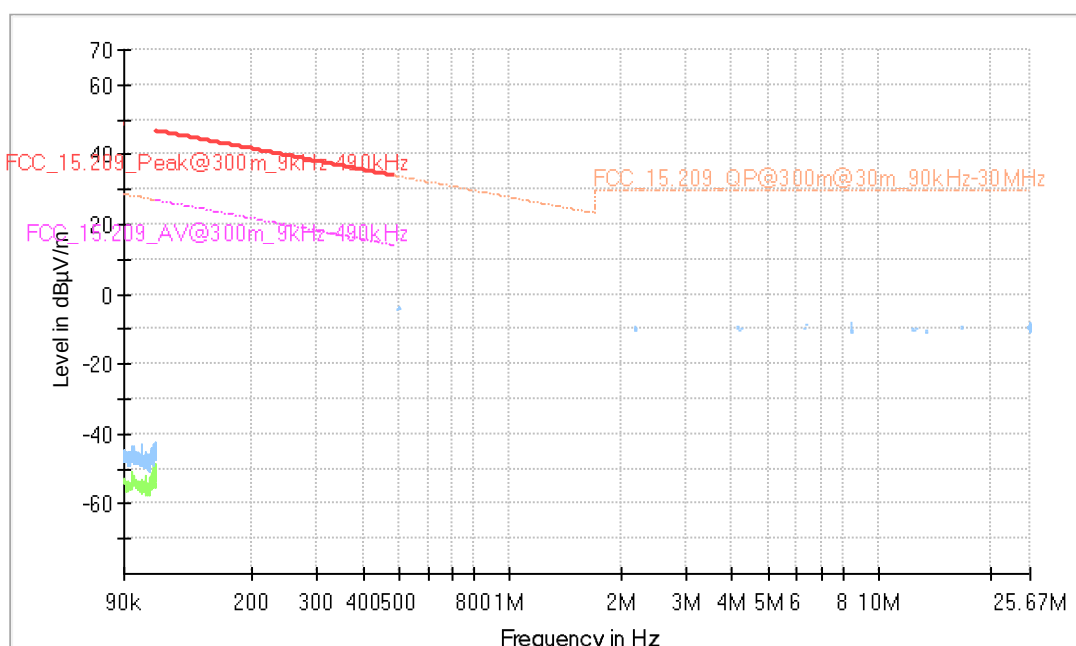

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth h (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = Bluetooth BDR, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz
(S03_160_AA01)

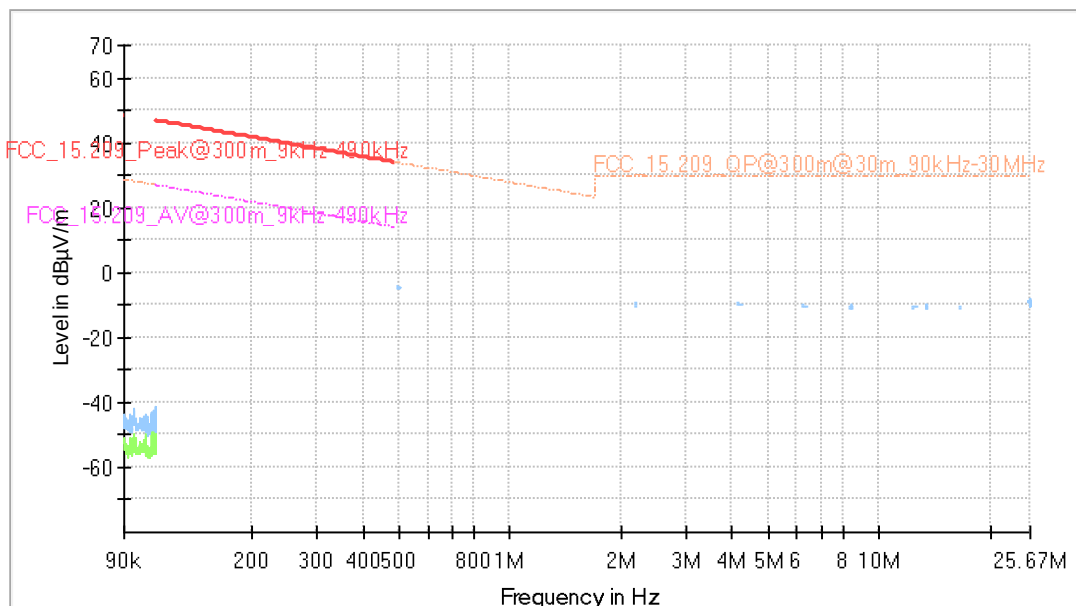

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 9 kHz - 30 MHz
(S01_160_AB02)

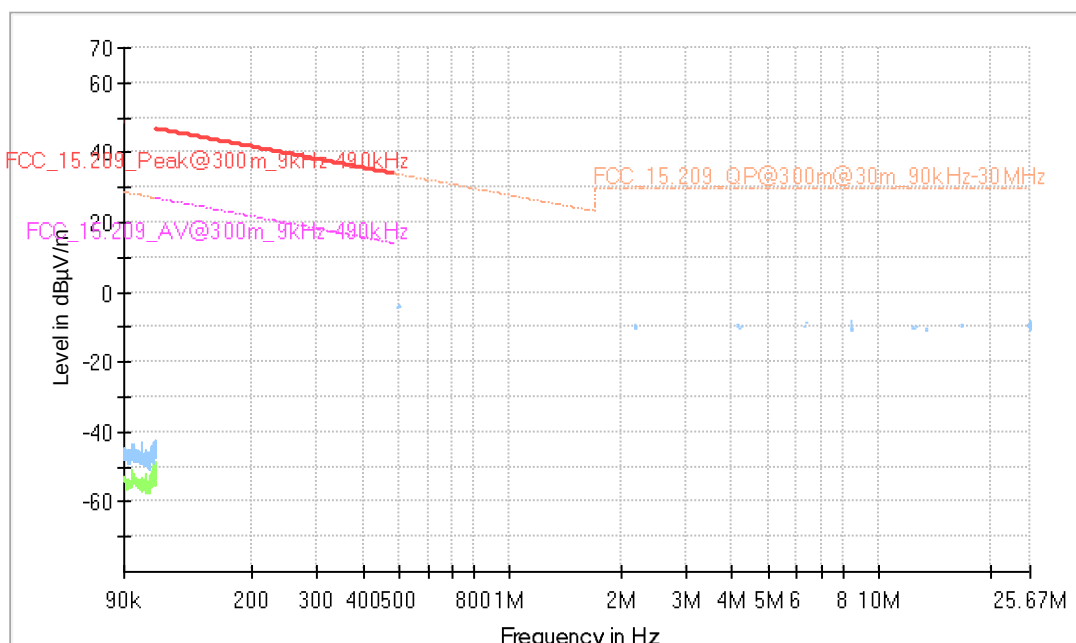

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth h (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 9 kHz - 30 MHz
(S03_160_AA01)

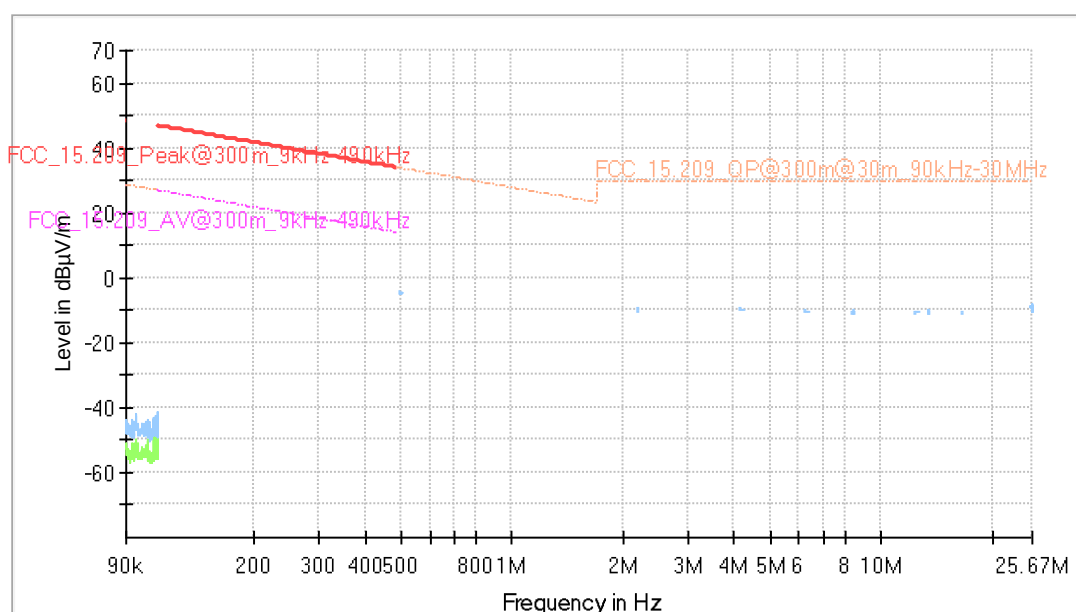

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth h (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 30 MHz - 1
GHz
(S03_160_AA01)

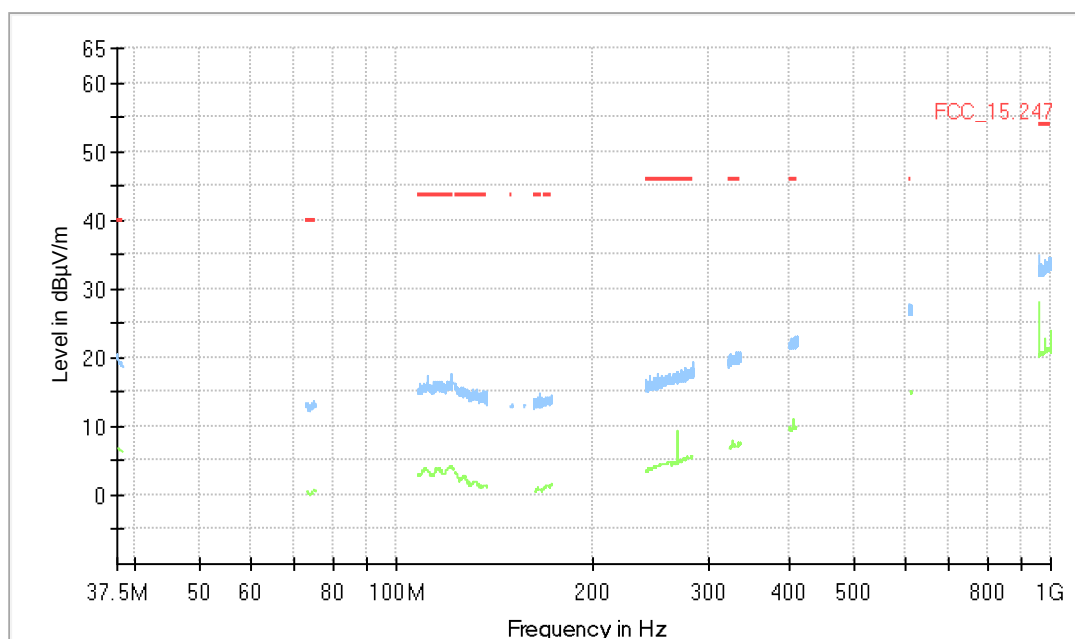

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = Bluetooth BDR, Operating Frequency = mid, Measurement range = 30
MHz - 1 GHz
(S03_160_AA01)

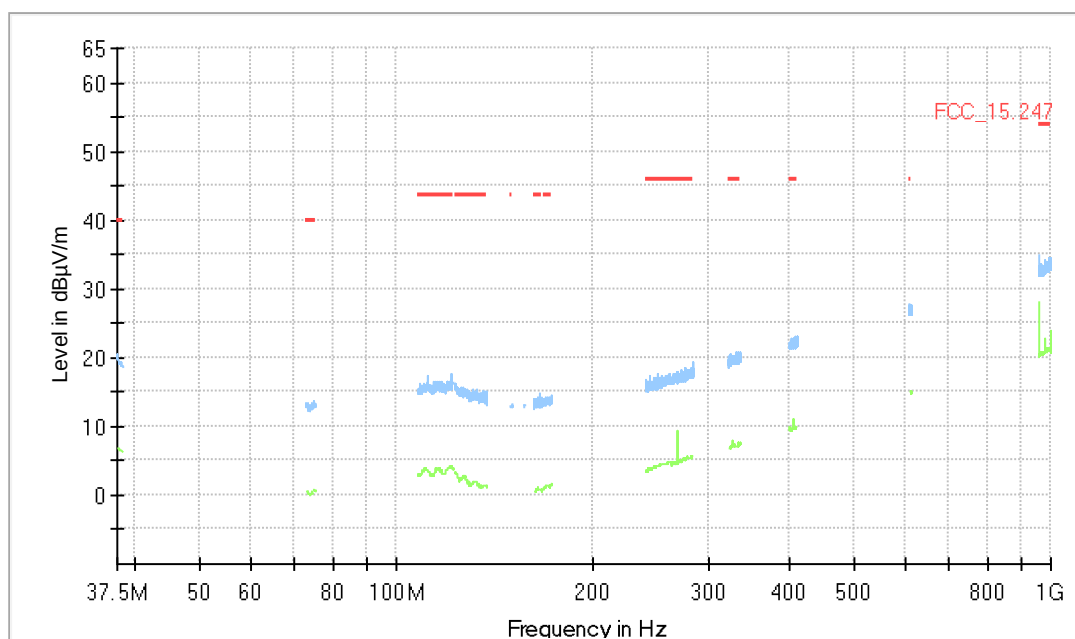

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = Bluetooth BDR, Operating Frequency = high, Measurement range = 1 GHz
- 26 GHz
(S01_160_AB02)

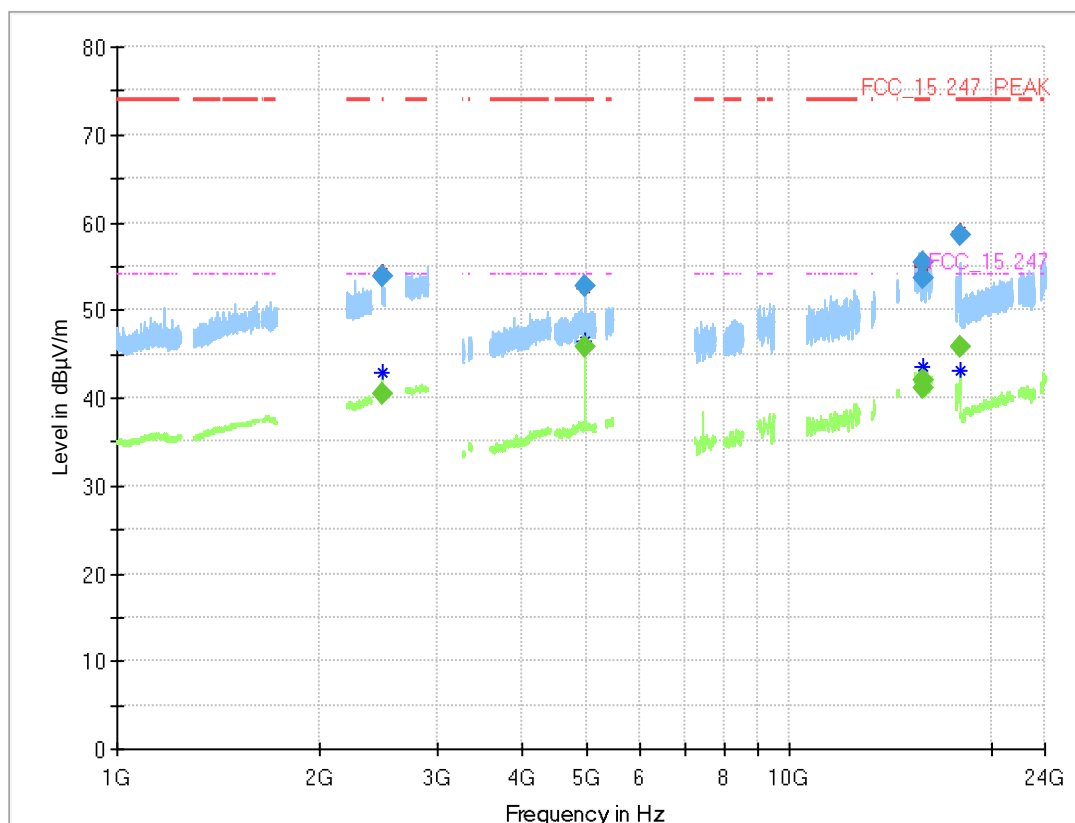

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	40.6	54.00	13.44	1000.0	1000.000	150.0	V	-97.0	75.0	7.8
2483.500	53.9	---	74.00	20.08	1000.0	1000.000	150.0	V	-97.0	75.0	7.8
4960.038	---	45.8	54.00	8.21	1000.0	1000.000	150.0	H	61.0	-6.0	5.9
4960.038	52.8	---	74.00	21.21	1000.0	1000.000	150.0	H	61.0	-6.0	5.9
15800.358	---	41.0	54.00	12.97	1000.0	1000.000	150.0	V	-112.0	15.0	-0.3
15800.358	53.7	---	74.00	20.28	1000.0	1000.000	150.0	V	-112.0	15.0	-0.3
15852.350	---	41.9	54.00	12.07	1000.0	1000.000	150.0	V	85.0	-6.0	0.6
15852.350	55.4	---	74.00	18.62	1000.0	1000.000	150.0	V	85.0	-6.0	0.6
17974.200	---	45.8	54.00	8.22	1000.0	1000.000	150.0	H	94.0	4.0	3.0
17974.200	58.4	---	74.00	15.56	1000.0	1000.000	150.0	H	94.0	4.0	3.0


Radio Technology = Bluetooth BDR, Operating Frequency = high, Measurement range = 1 GHz
- 26 GHz
(S03_160_AB02)

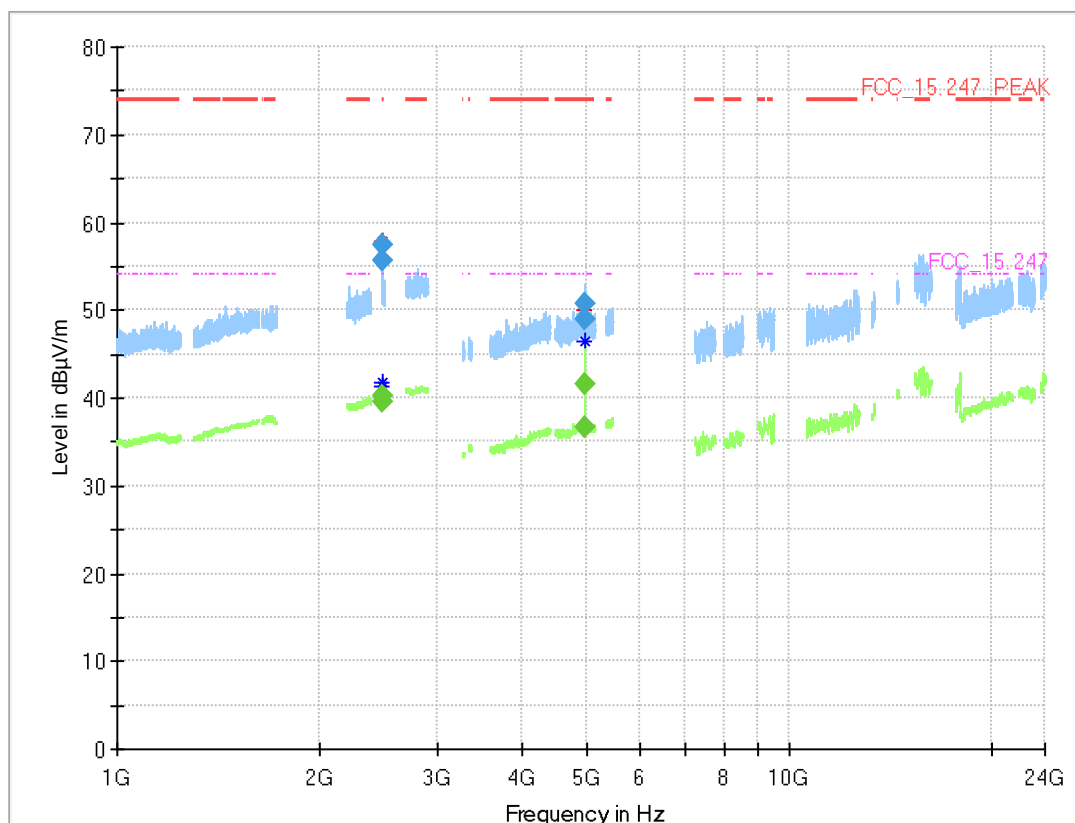

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	40.3	54.00	13.67	1000.0	1000.000	150.0	V	-11.0	91.0	7.8
2483.500	57.4	---	74.00	16.61	1000.0	1000.000	150.0	V	-11.0	91.0	7.8
2484.243	---	39.5	54.00	14.48	1000.0	1000.000	150.0	V	-11.0	92.0	7.8
2484.243	55.5	---	74.00	18.46	1000.0	1000.000	150.0	V	-11.0	92.0	7.8
4960.038	---	41.6	54.00	12.45	1000.0	1000.000	150.0	V	95.0	-15.0	5.9
4960.038	50.7	---	74.00	23.35	1000.0	1000.000	150.0	V	95.0	-15.0	5.9
4960.850	---	36.7	54.00	17.32	1000.0	1000.000	150.0	H	55.0	75.0	5.9
4960.850	49.0	---	74.00	25.05	1000.0	1000.000	150.0	H	55.0	75.0	5.9


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 1 GHz - 26
GHz
(S01_160_AC03)

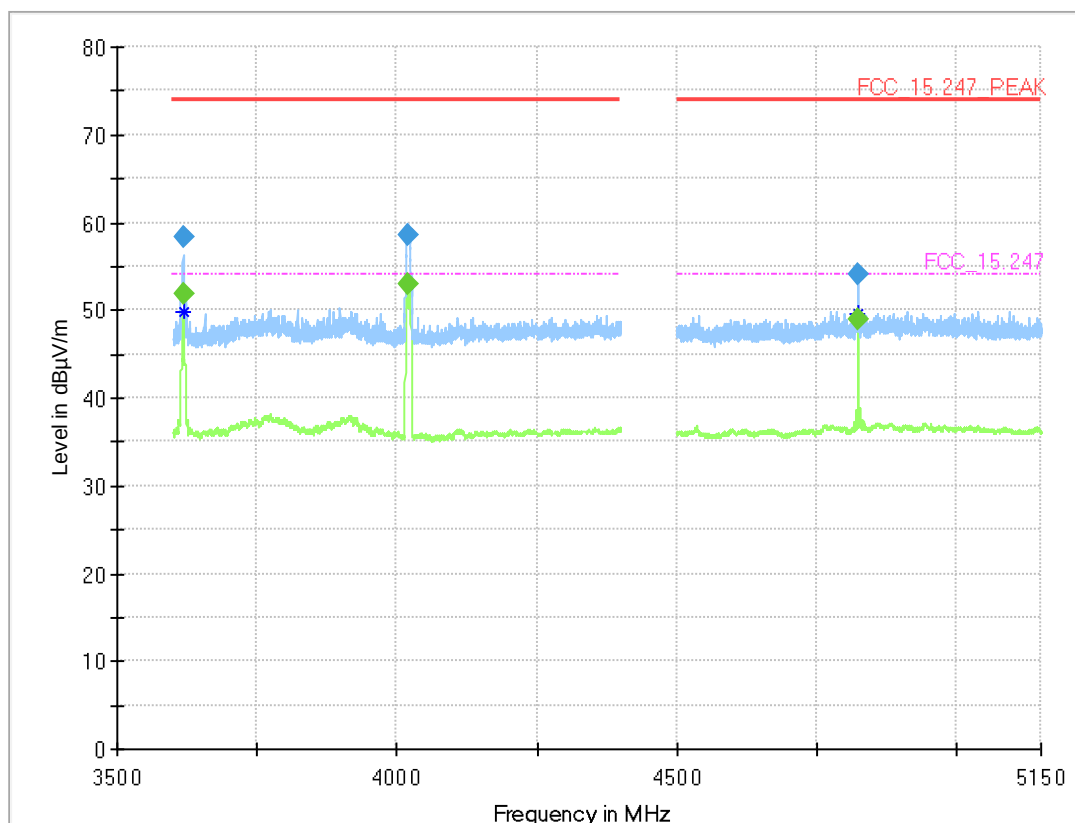

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
3617.800	---	51.8	54.00	2.22	1000.0	1000.000	150.0	H	141.0	14.0	3.2
3617.800	58.3	---	74.00	15.67	1000.0	1000.000	150.0	H	141.0	14.0	3.2
4018.400	---	53.0	54.00	0.99	1000.0	1000.000	150.0	V	96.0	98.0	3.5
4018.400	58.6	---	74.00	15.36	1000.0	1000.000	150.0	V	96.0	98.0	3.5
4824.025	---	48.9	54.00	5.12	1000.0	1000.000	150.0	V	-22.0	-7.0	5.6
4824.025	54.2	---	74.00	19.82	1000.0	1000.000	150.0	V	-22.0	-7.0	5.6


Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 1 GHz - 26
GHz
(S03_160_AB02)

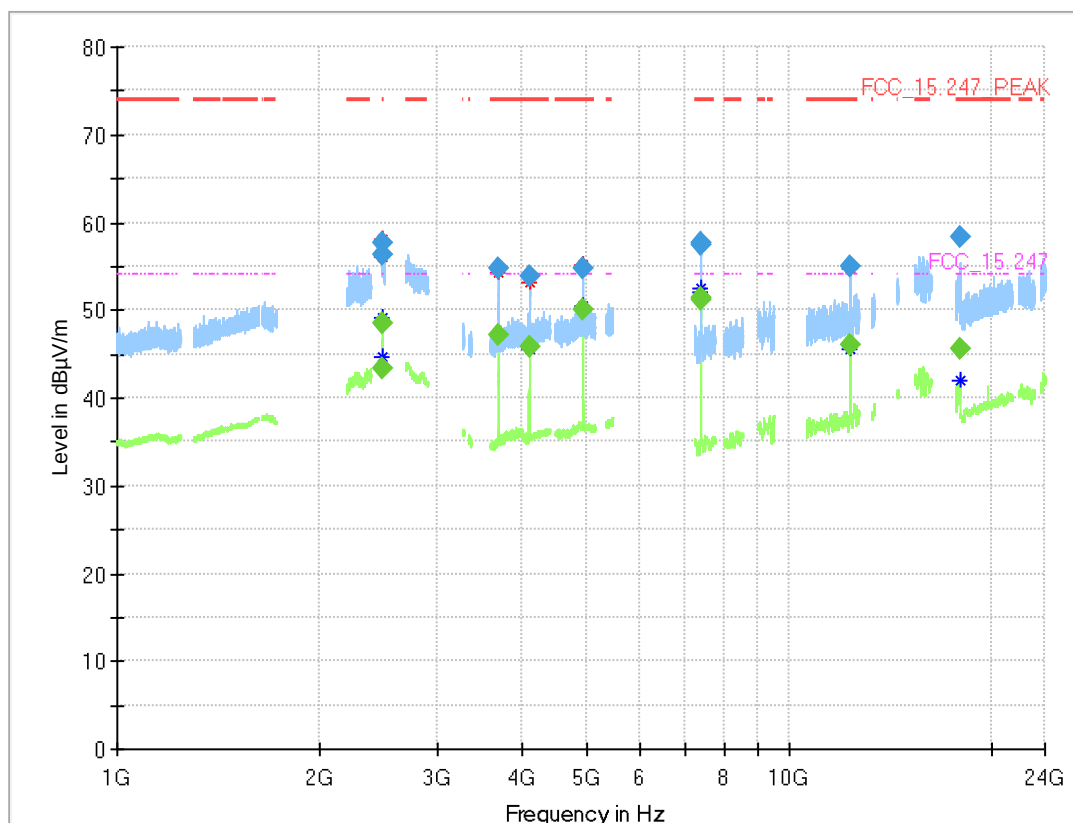

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	43.4	54.00	10.58	1000.0	1000.000	150.0	H	-175.0	83.0	7.8
2483.500	56.2	---	74.00	17.80	1000.0	1000.000	150.0	H	-175.0	83.0	7.8
2488.120	---	48.5	54.00	5.53	1000.0	1000.000	150.0	H	-169.0	15.0	7.9
2488.120	57.7	---	74.00	16.30	1000.0	1000.000	150.0	H	-169.0	15.0	7.9
3692.800	---	47.1	54.00	6.91	1000.0	1000.000	150.0	H	-146.0	9.0	3.2
3692.800	54.8	---	74.00	19.22	1000.0	1000.000	150.0	H	-146.0	9.0	3.2
4105.200	---	45.8	54.00	8.23	1000.0	1000.000	150.0	V	161.0	86.0	5.0
4105.200	53.8	---	74.00	20.17	1000.0	1000.000	150.0	V	161.0	86.0	5.0
4923.963	---	50.1	54.00	3.86	1000.0	1000.000	150.0	H	-120.0	75.0	6.6
4923.963	54.7	---	74.00	19.32	1000.0	1000.000	150.0	H	-120.0	75.0	6.6
7385.000	---	51.3	54.00	2.75	1000.0	1000.000	150.0	H	-183.0	91.0	-11.0
7385.000	57.5	---	74.00	16.54	1000.0	1000.000	150.0	H	-183.0	91.0	-11.0
7386.750	---	51.3	54.00	2.69	1000.0	1000.000	150.0	H	-189.0	91.0	-10.9
7386.750	57.6	---	74.00	16.43	1000.0	1000.000	150.0	H	-189.0	91.0	-10.9
12310.975	---	46.1	54.00	7.91	1000.0	1000.000	150.0	H	64.0	104.0	-4.3
12310.975	54.9	---	74.00	19.08	1000.0	1000.000	150.0	H	64.0	104.0	-4.3
17984.550	---	45.6	54.00	8.41	1000.0	1000.000	150.0	V	-176.0	-3.0	3.1
17984.550	58.2	---	74.00	15.79	1000.0	1000.000	150.0	V	-176.0	-3.0	3.1


Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz
(S01_160_AC03)

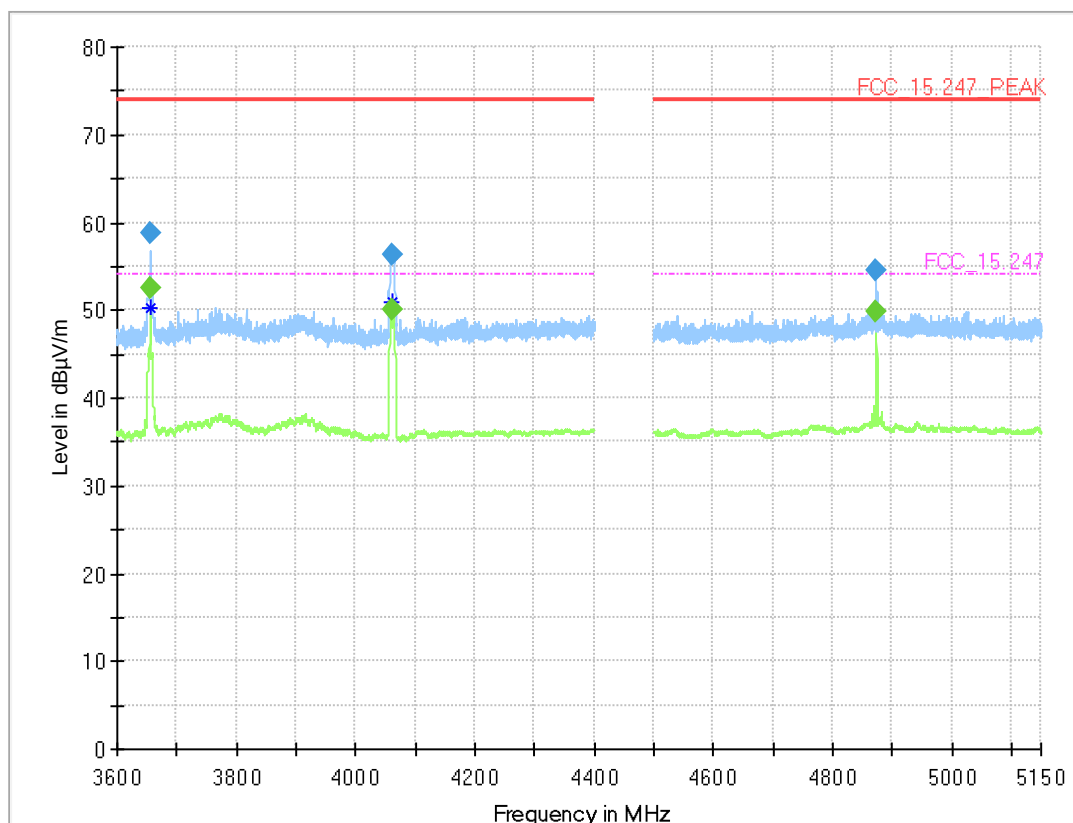

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
3655.400	---	52.5	54.00	1.55	1000.0	1000.000	150.0	H	-104.0	3.0	2.7
3655.400	58.8	---	74.00	15.17	1000.0	1000.000	150.0	H	-104.0	3.0	2.7
4060.200	---	50.0	54.00	3.95	1000.0	1000.000	150.0	H	91.0	-13.0	4.1
4060.200	56.3	---	74.00	17.70	1000.0	1000.000	150.0	H	91.0	-13.0	4.1
4873.913	---	49.7	54.00	4.26	1000.0	1000.000	150.0	H	91.0	81.0	6.4
4873.913	54.6	---	74.00	19.42	1000.0	1000.000	150.0	H	91.0	81.0	6.4

Radio Technology = WLAN g, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
(S03_160_AC03)

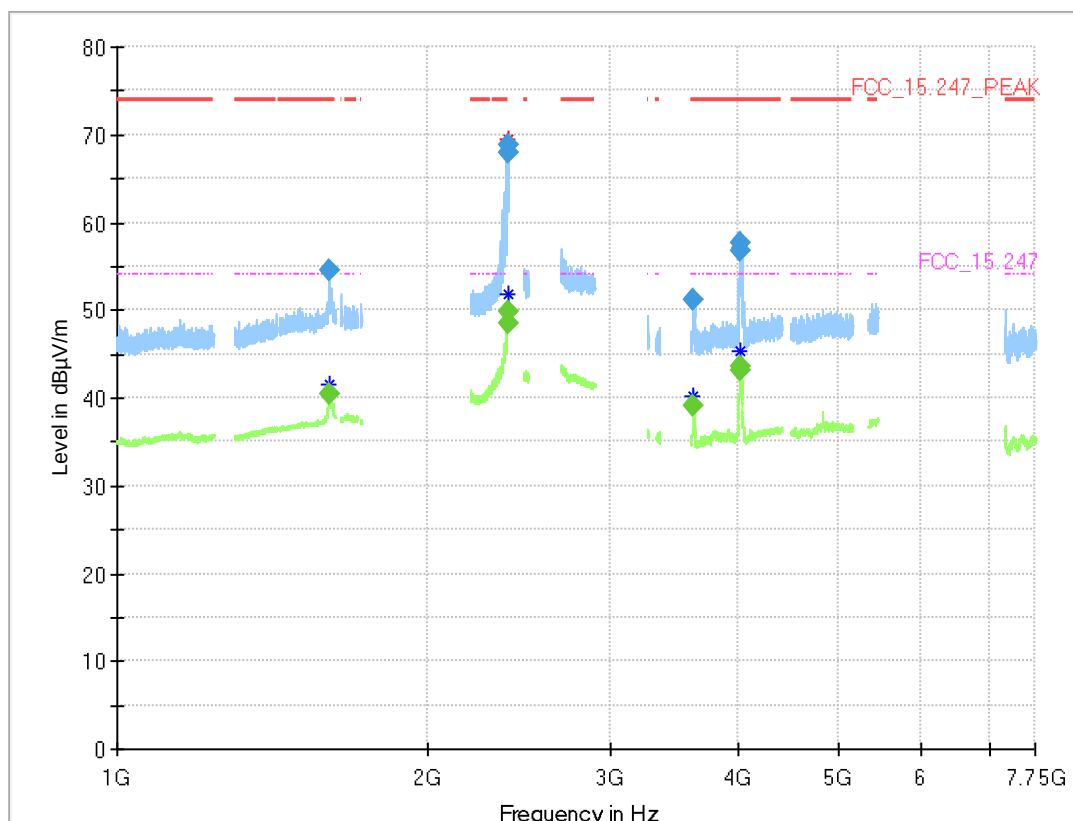

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
1607.925	54.6	---	74.00	19.43	1000.0	1000.000	150.0	H	117.0	16.0	5.3
1607.925	---	40.4	54.00	13.64	1000.0	1000.000	150.0	H	117.0	16.0	5.3
2389.760	67.9	---	74.00	6.11	1000.0	1000.000	150.0	H	-8.0	70.0	7.6
2389.760	---	48.4	54.00	5.61	1000.0	1000.000	150.0	H	-8.0	70.0	7.6
2389.840	68.8	---	74.00	5.17	1000.0	1000.000	150.0	H	12.0	110.0	7.6
2389.840	---	49.9	54.00	4.10	1000.0	1000.000	150.0	H	12.0	110.0	7.6
3616.800	---	39.2	54.00	14.81	1000.0	1000.000	150.0	H	-153.0	-1.0	3.2
3616.800	51.2	---	74.00	22.81	1000.0	1000.000	150.0	H	-153.0	-1.0	3.2
4016.600	57.7	---	74.00	16.27	1000.0	1000.000	150.0	H	154.0	9.0	3.5
4016.600	---	43.5	54.00	10.49	1000.0	1000.000	150.0	H	154.0	9.0	3.5
4021.600	---	43.2	54.00	10.84	1000.0	1000.000	150.0	V	31.0	94.0	3.5
4021.600	56.7	---	74.00	17.28	1000.0	1000.000	150.0	V	31.0	94.0	3.5

5.2.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC
- Radiated Emissions SAC H-Field
- Radiated Emissions SAC up to 1 GHz

5.3 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 6.6.5

5.3.1 TEST DESCRIPTION


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

3. Measurement above 1 GHz

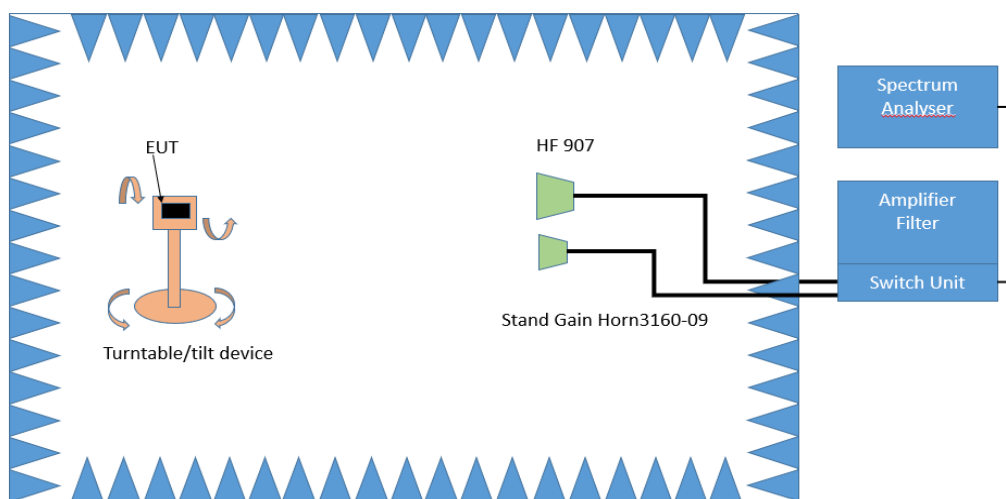

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.3.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

5.3.3 TEST PROTOCOL

Ambient temperature: 26 – 29 °C
 Air Pressure: 1005 – 1012 hPa
 Humidity: 45 – 62 %

BT GFSK (1-DH1)

Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec- tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Linx	2480	2483.5	53.9	PEAK	1000	74.0	20.1
Linx	2480	2483.5	40.7	AV	1000	54.0	13.3
Molex	2480	2483.5	57.4	PEAK	1000	74.0	16.6
Molex	2480	2483.5	40.4	AV	1000	54.0	13.6

BT n/4 DQPSK (2-DH1)

Applied duty cycle correction (AV): 0.2 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec- tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Linx	2480	2483.5	57.5	PEAK	1000	74.0	16.5
Linx	2480	2483.5	41.6	AV	1000	54.0	12.4
Molex	2480	2483.5	57.9	PEAK	1000	74.0	16.1
Molex	2480	2483.5	41.8	AV	1000	54.0	12.2

BT 8-DPSK (3-DH1)

Applied duty cycle correction (AV): 0.3 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec- tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Molex	2480	2483.5	61.4	PEAK	1000	74.0	12.6
Molex	2480	2483.5	43.2	AV	1000	54.0	10.8
Linx	2480	2483.5	60.8	PEAK	1000	74.0	13.2
Linx	2480	2483.5	42.7	AV	1000	54.0	11.3

BT LE 1 Mbit/s

Applied duty cycle correction (AV): 1.4 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec- tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Molex	2480	2483.5	54.5	PEAK	1000	74.0	19.5
Molex	2480	2483.5	39.9	AV	1000	54.0	14.1
Linx	2480	2483.5	54.3	PEAK	1000	74.0	19.7
Linx	2480	2483.5	40.7	AV	1000	54.0	13.3

BT LE 2 Mbit/s

Applied duty cycle correction (AV): 7.4 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Molex	2480	2483.5	58.8	PEAK	1000	74.0	15.2
Molex	2480	2483.5	46.4	AV	1000	54.0	7.6
Linx	2480	2483.5	59.0	PEAK	1000	74.0	15.0
Linx	2480	2483.5	46.6	AV	1000	54.0	7.4

WLAN b-Mode; 20 MHz; 1 Mbit/s

Applied duty cycle correction (AV): 0 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Linx	2462	2483.5	57.8	PEAK	1000	74.0	16.2
Linx	2462	2483.5	46.4	AV	1000	54.0	7.6
Molex	2462	2483.5	57.7	PEAK	1000	74.0	16.3
Molex	2462	2483.5	48.5	AV	1000	54.0	5.5

WLAN g-Mode; 20 MHz; 6 Mbit/s

Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Linx	2462	2483.5	73.3	PEAK	1000	74.0	0.7
Linx	2462	2483.5	53.7	AV	1000	54.0	0.3
Molex	2412	2390.0	68.8	PEAK	1000	74.0	5.2
Molex	2412	2390.0	50.0	AV	1000	54.0	4.0
Molex	2462	2483.5	67.8	PEAK	1000	74.0	6.2
Molex	2462	2483.5	46.3	AV	1000	54.0	7.7

WLAN n-Mode; 20 MHz; MCS0

Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Linx	2412	2390.0	71.1	PEAK	1000	74.0	2.9
Linx	2412	2390.0	52.5	AV	1000	54.0	1.5
Linx	2462	2483.5	69.5	PEAK	1000	74.0	4.5
Linx	2462	2483.5	47.5	AV	1000	54.0	6.5
Molex	2462	2483.5	63.6	PEAK	1000	74.0	10.4
Molex	2462	2483.5	44.8	AV	1000	54.0	9.2

WLAN n-Mode; 40 MHz; MCS0


Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec- tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Linx	2422	2390.0	69.7	PEAK	1000	74.0	4.3
Linx	2422	2390.0	51.2	AV	1000	54.0	2.8
Linx	2452	2483.5	71.7	PEAK	1000	74.0	2.3
Linx	2452	2483.5	50.5	AV	1000	54.0	3.5
Molex	2422	2390.0	67.1	PEAK	1000	74.0	6.9
Molex	2422	2390.0	50.9	AV	1000	54.0	3.1
Molex	2452	2483.5	67.2	PEAK	1000	74.0	6.8
Molex	2452	2483.5	48.3	AV	1000	54.0	5.7

Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = Bluetooth BDR, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

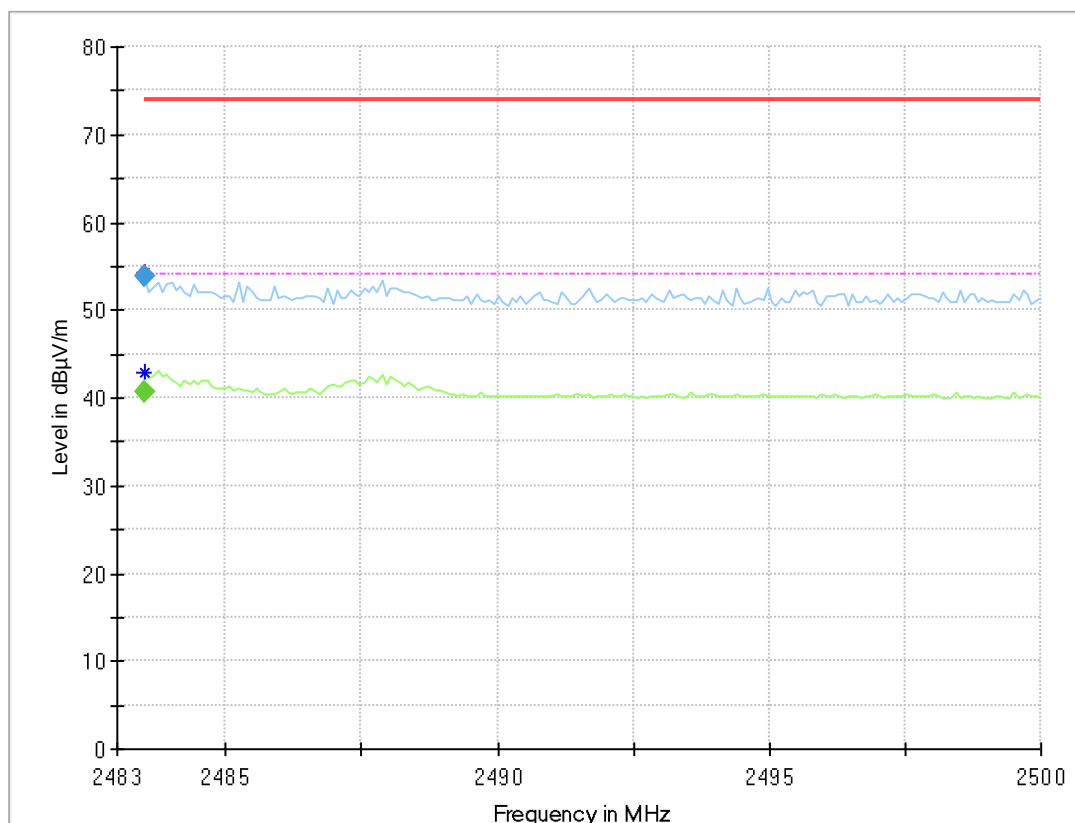

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Marg in (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	53.9	---	74.0	20.08	1000.0	1000.00	150.	V	-97.0	75.0	7.8
2483.500	---	40.6	54.0	13.44	1000.0	1000.00	150.	V	-97.0	75.0	7.8


Radio Technology = Bluetooth BDR, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

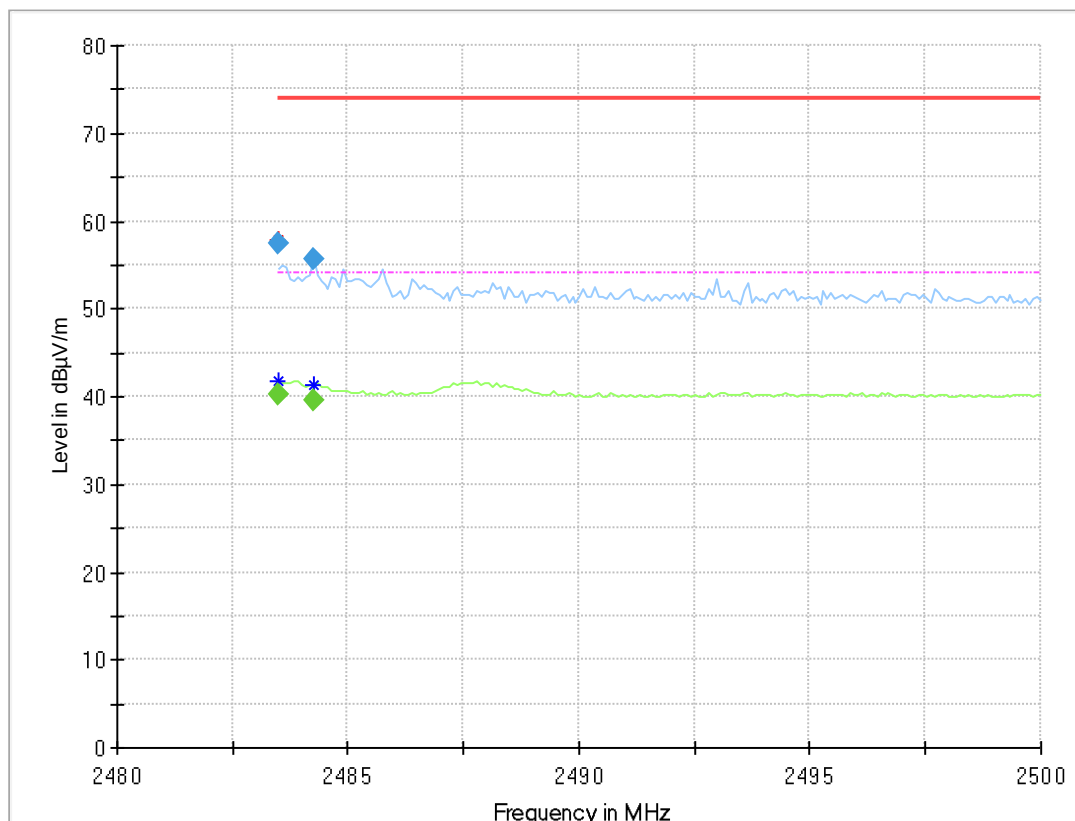

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	40.3	54.00	13.67	1000.0	1000.000	150.0	V	-11.0	91.0	7.8
2483.500	57.4	---	74.00	16.61	1000.0	1000.000	150.0	V	-11.0	91.0	7.8
2484.243	---	39.5	54.00	14.48	1000.0	1000.000	150.0	V	-11.0	92.0	7.8
2484.243	55.5	---	74.00	18.46	1000.0	1000.000	150.0	V	-11.0	92.0	7.8


Radio Technology = Bluetooth EDR 2, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

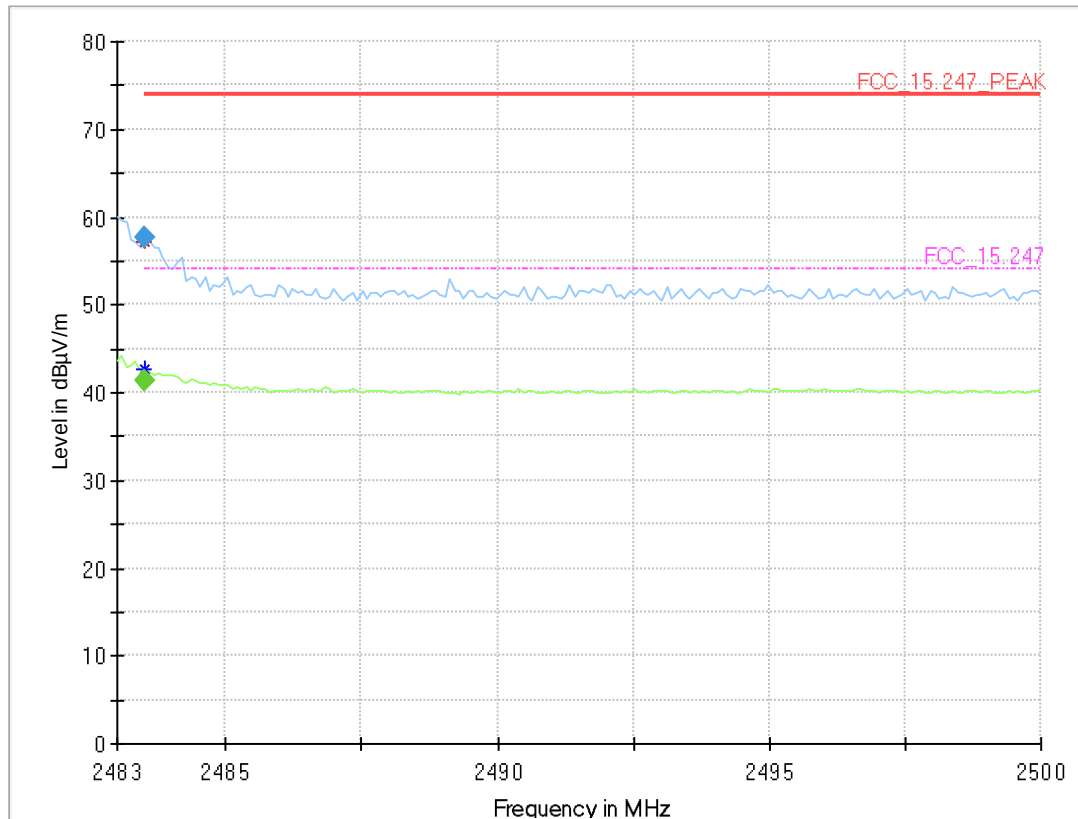

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	41.4	54.00	12.64	1000.0	1000.000	150.0	V	-92.0	84.0	7.8
2483.510	57.5	---	74.00	16.45	1000.0	1000.000	150.0	V	-92.0	84.0	7.8


Radio Technology = Bluetooth EDR 2, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

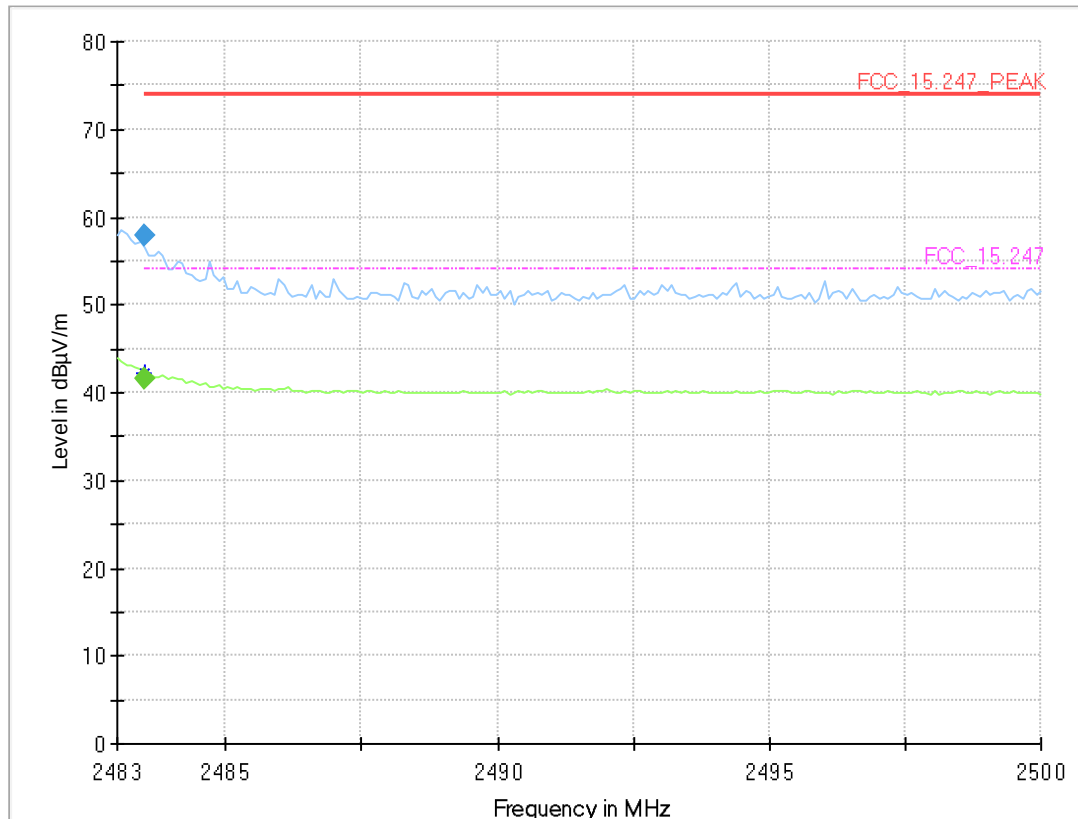

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	41.6	54.00	12.40	1000.0	1000.000	150.0	V	-173.0	96.0	7.8
2483.510	57.9	---	74.00	16.11	1000.0	1000.000	150.0	V	-173.0	96.0	7.8


Radio Technology = Bluetooth EDR 3, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

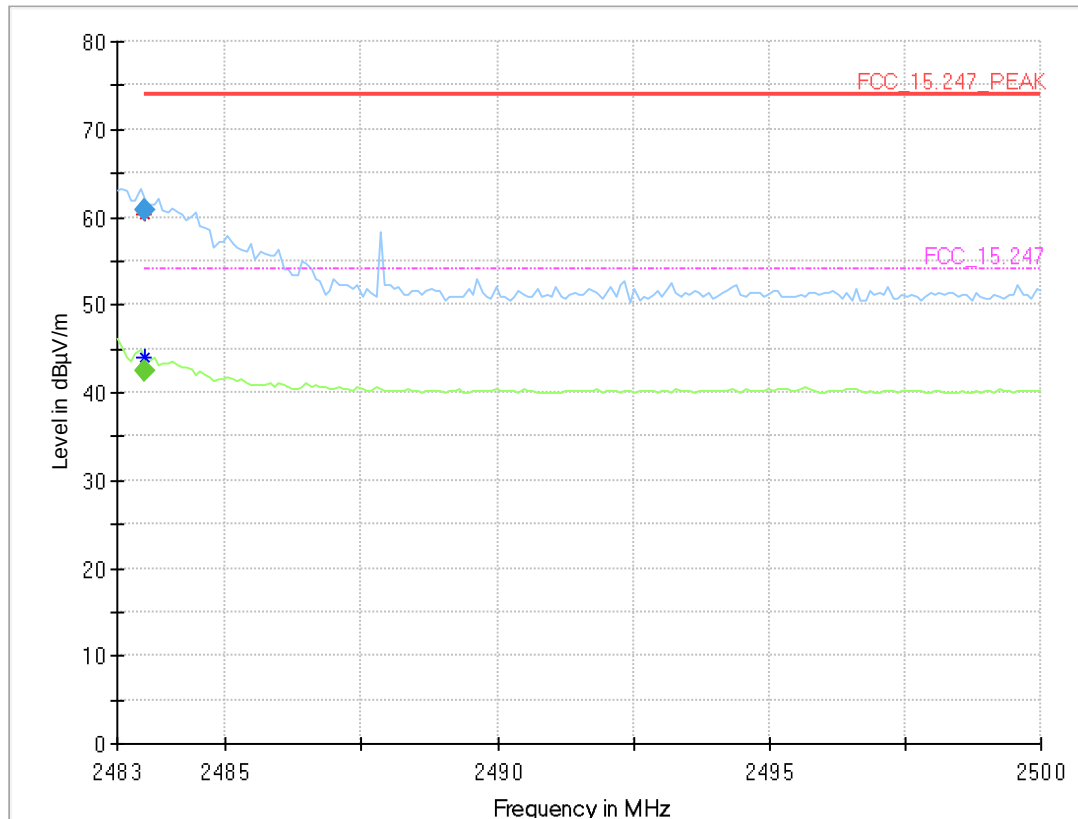

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	42.4	54.00	11.57	1000.0	1000.000	150.0	V	-94.0	81.0	7.8
2483.510	60.8	---	74.00	13.17	1000.0	1000.000	150.0	V	-94.0	81.0	7.8


Radio Technology = Bluetooth EDR 3, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

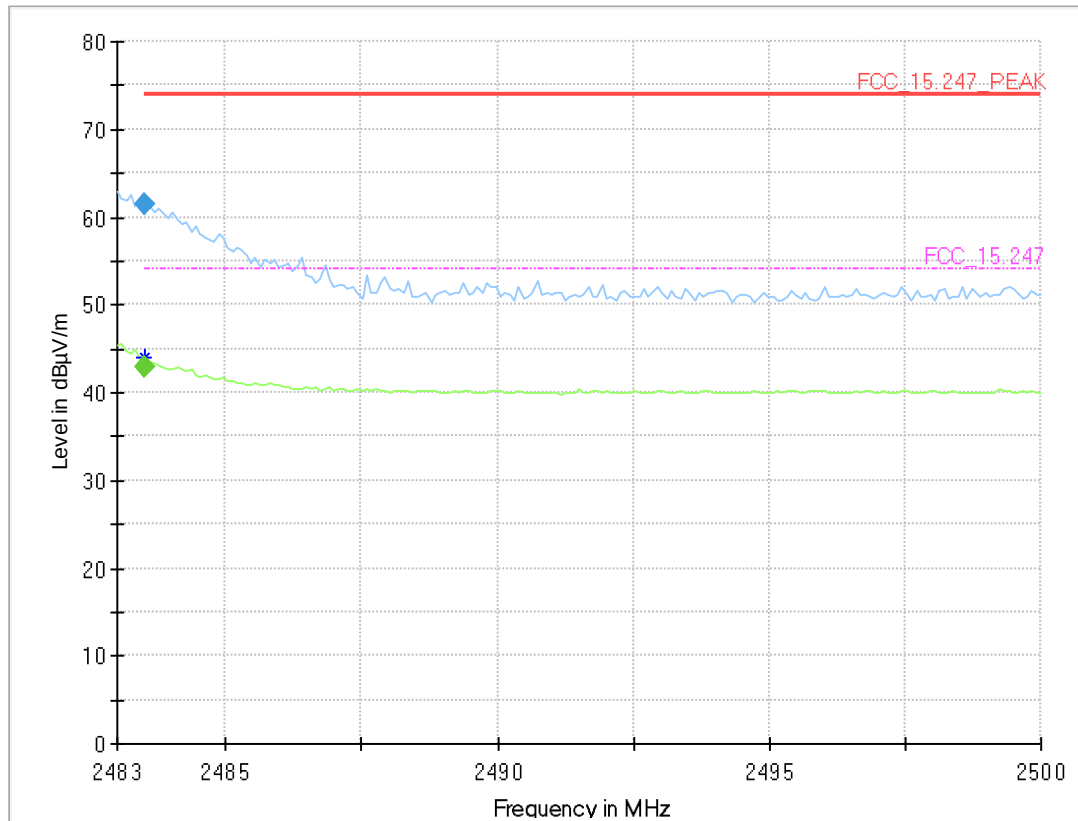

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	42.9	54.00	11.06	1000.0	1000.000	150.0	V	-175.0	94.0	7.8
2483.510	61.4	---	74.00	12.55	1000.0	1000.000	150.0	V	-175.0	94.0	7.8


Radio Technology = Bluetooth LE 1 Mbps, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

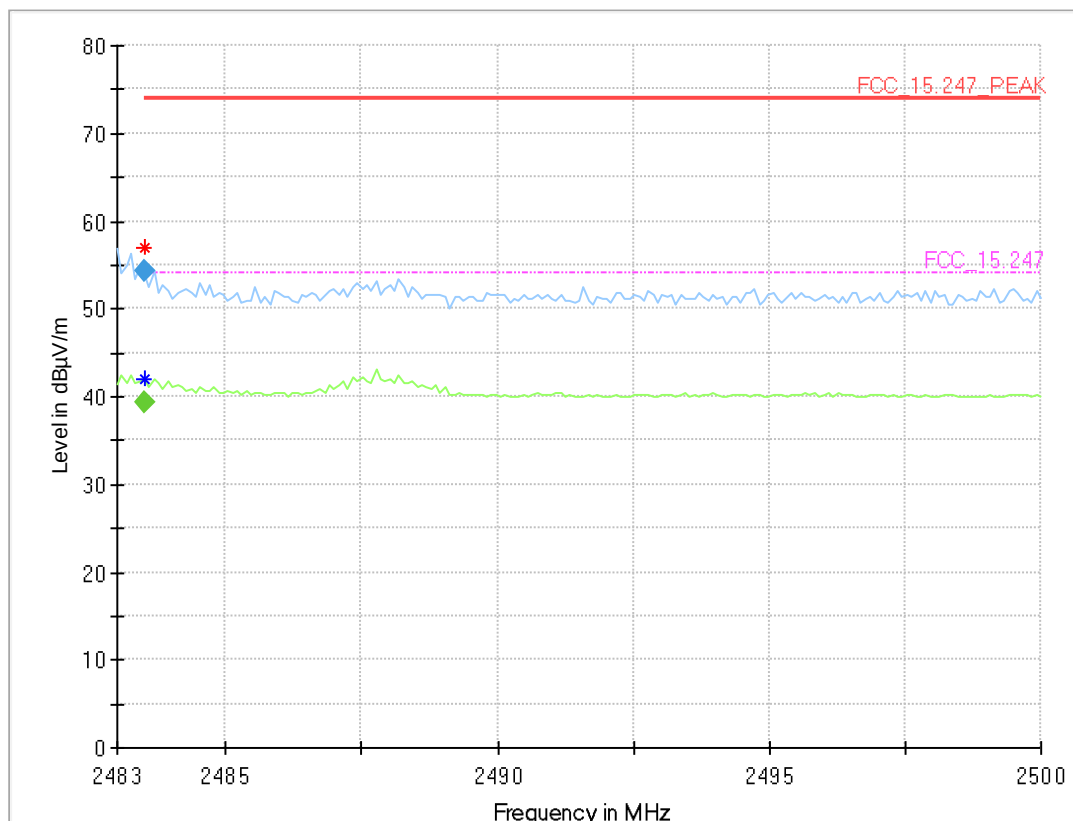

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	39.3	54.00	14.67	1000.0	1000.000	150.0	V	-85.0	100.0	7.8
2483.510	54.3	---	74.00	19.74	1000.0	1000.000	150.0	V	-85.0	100.0	7.8


Radio Technology = Bluetooth LE 1 Mbps, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

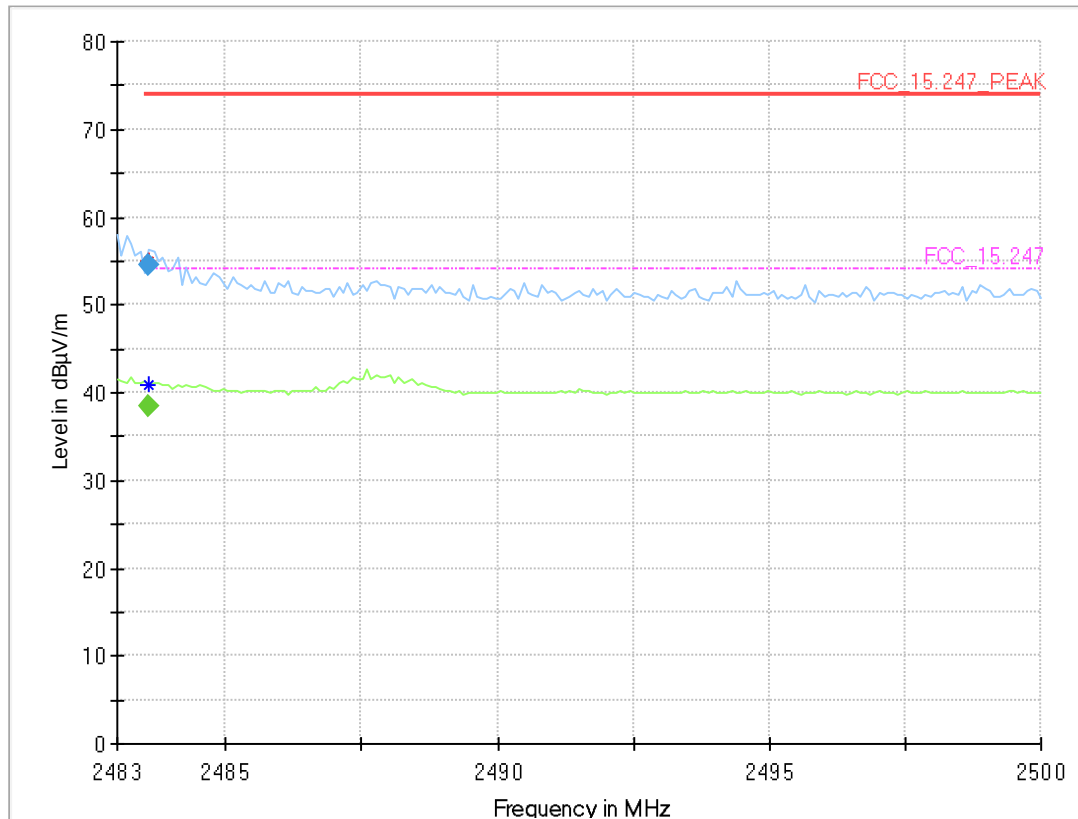

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.595	---	38.5	54.00	15.51	1000.0	1000.000	150.0	V	21.0	79.0	7.8
2483.595	54.5	---	74.00	19.51	1000.0	1000.000	150.0	V	21.0	79.0	7.8


Radio Technology = Bluetooth LE 2 Mbps, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

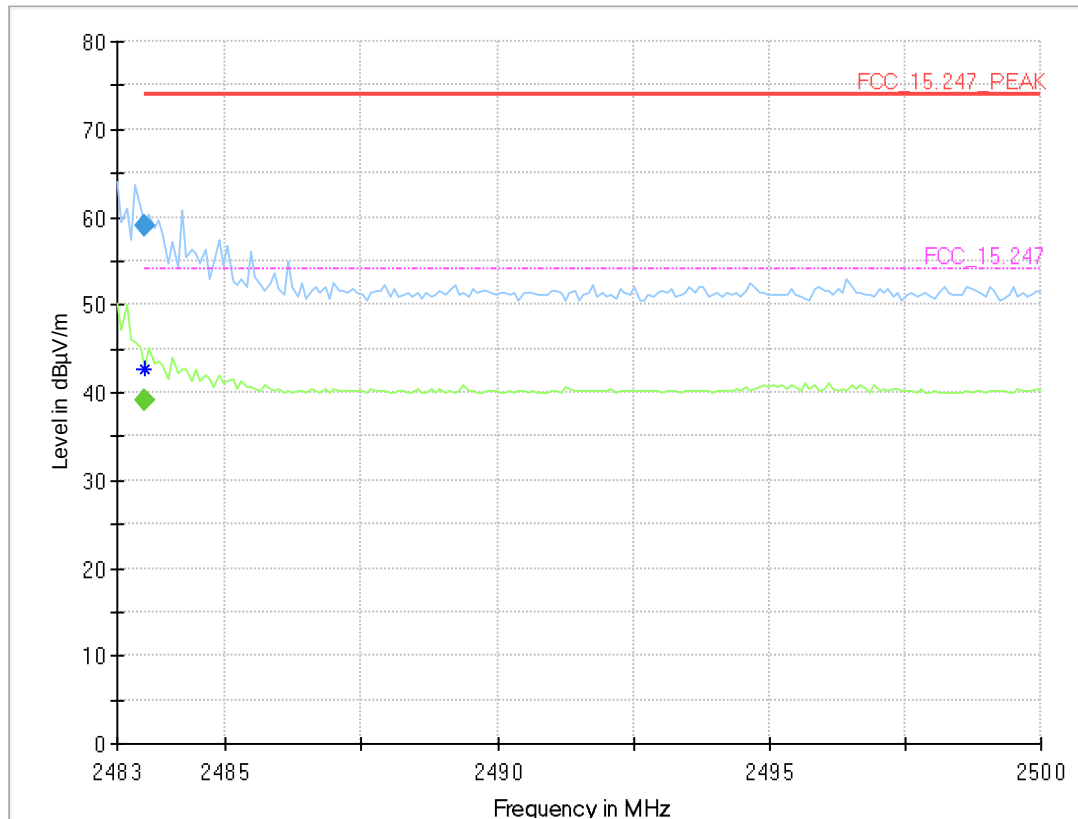

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	39.2	54.00	14.81	1000.0	1000.000	150.0	H	-58.0	-4.0	7.8
2483.510	59.0	---	74.00	15.01	1000.0	1000.000	150.0	H	-58.0	-4.0	7.8


Radio Technology = Bluetooth LE 2 Mbps, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

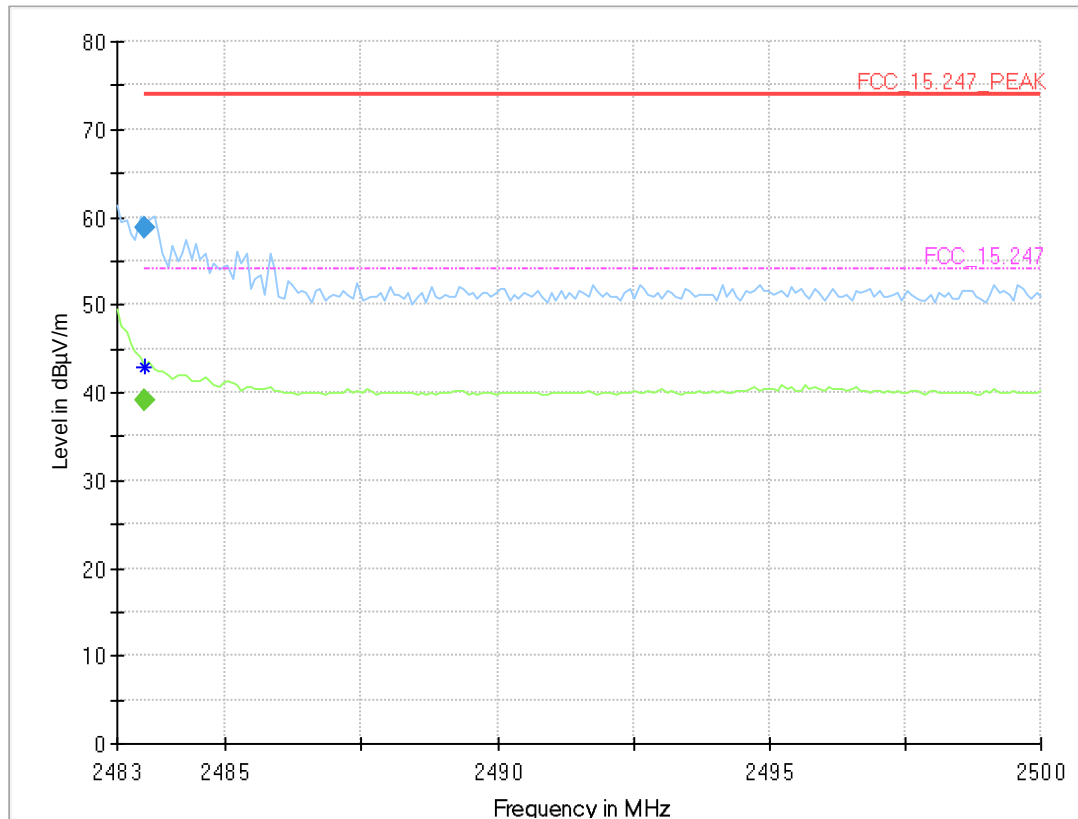

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	39.0	54.00	14.96	1000.0	1000.000	150.0	V	-152.0	94.0	7.8
2483.510	58.8	---	74.00	15.17	1000.0	1000.000	150.0	V	-152.0	94.0	7.8


Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high
(S01_160_AC03)

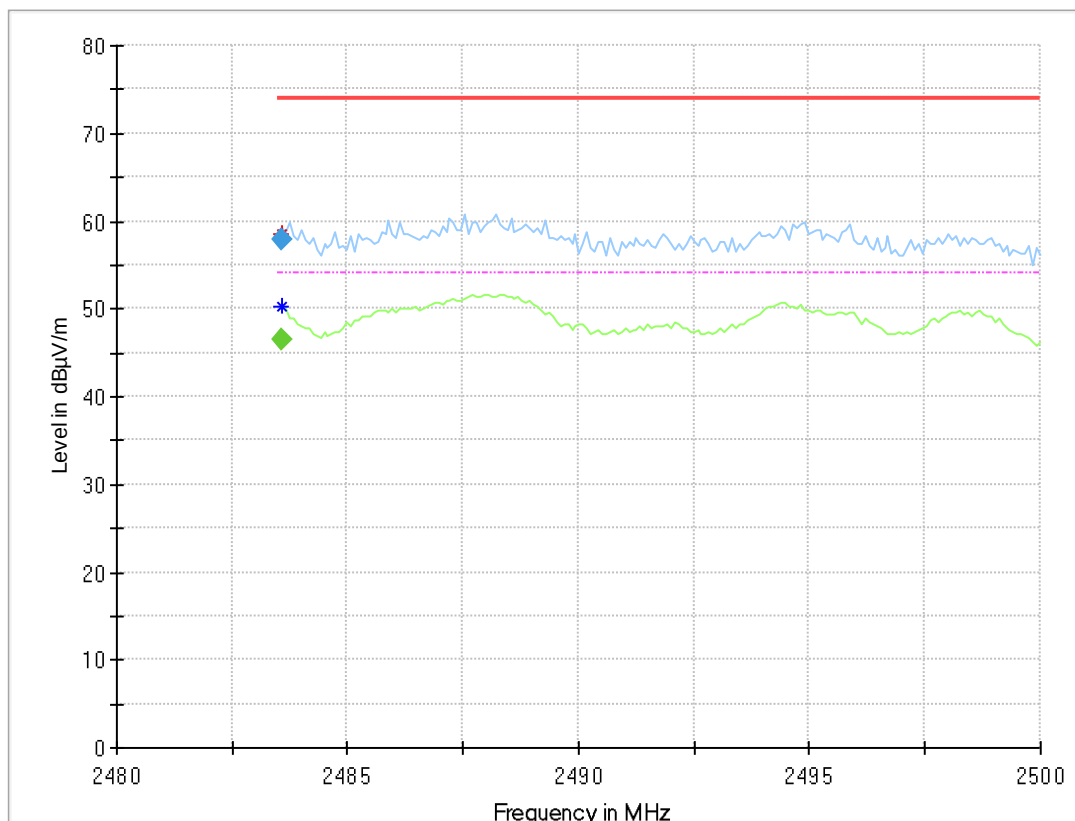

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.583	---	46.4	54.00	7.61	1000.0	1000.000	150.0	H	-152.0	-2.0	7.8
2483.583	57.8	---	74.00	16.16	1000.0	1000.000	150.0	H	-152.0	-2.0	7.8


Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

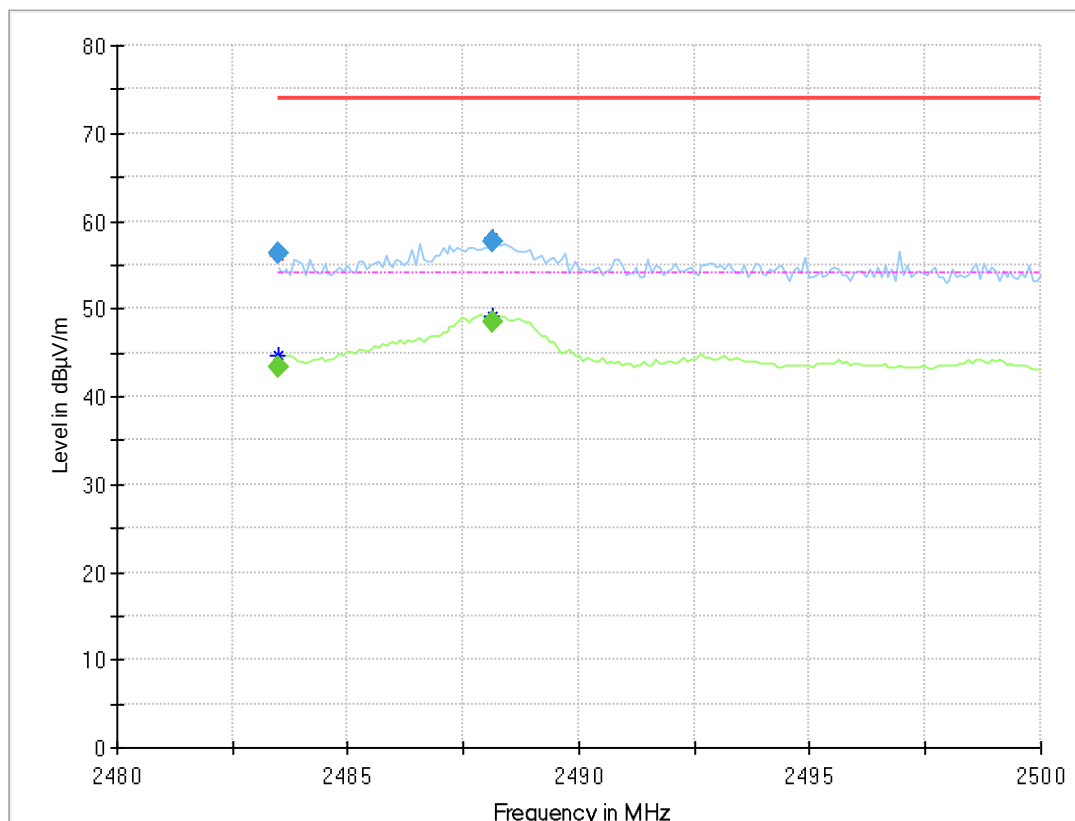

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	43.4	54.00	10.58	1000.0	1000.000	150.0	H	-175.0	83.0	7.8
2483.500	56.2	---	74.00	17.80	1000.0	1000.000	150.0	H	-175.0	83.0	7.8
2488.120	---	48.5	54.00	5.53	1000.0	1000.000	150.0	H	-169.0	15.0	7.9
2488.120	57.7	---	74.00	16.30	1000.0	1000.000	150.0	H	-169.0	15.0	7.9


Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

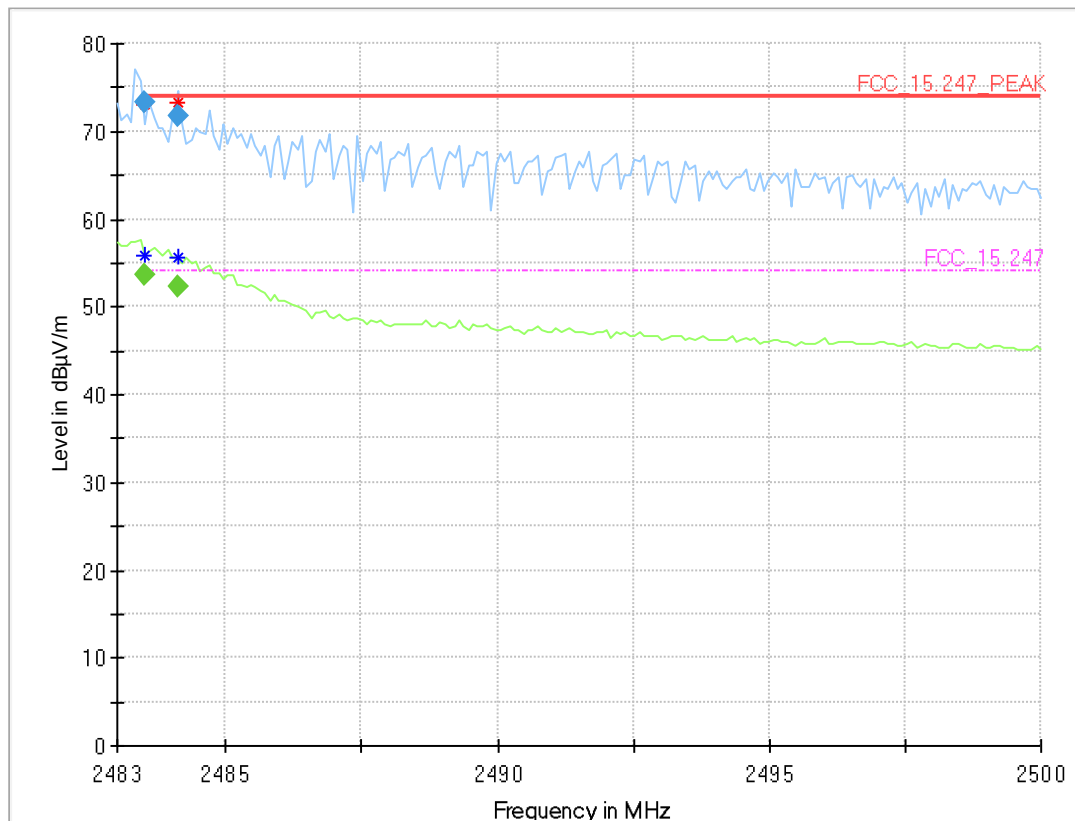

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	53.6	54.00	0.38	1000.0	1000.000	150.0	H	109.0	-6.0	7.8
2483.510	73.3	---	74.00	0.71	1000.0	1000.000	150.0	H	109.0	-6.0	7.8
2484.105	---	52.4	54.00	1.65	1000.0	1000.000	150.0	H	109.0	-15.0	7.8
2484.105	71.7	---	74.00	2.30	1000.0	1000.000	150.0	H	109.0	-15.0	7.8


Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low
(S03_160_AB02)

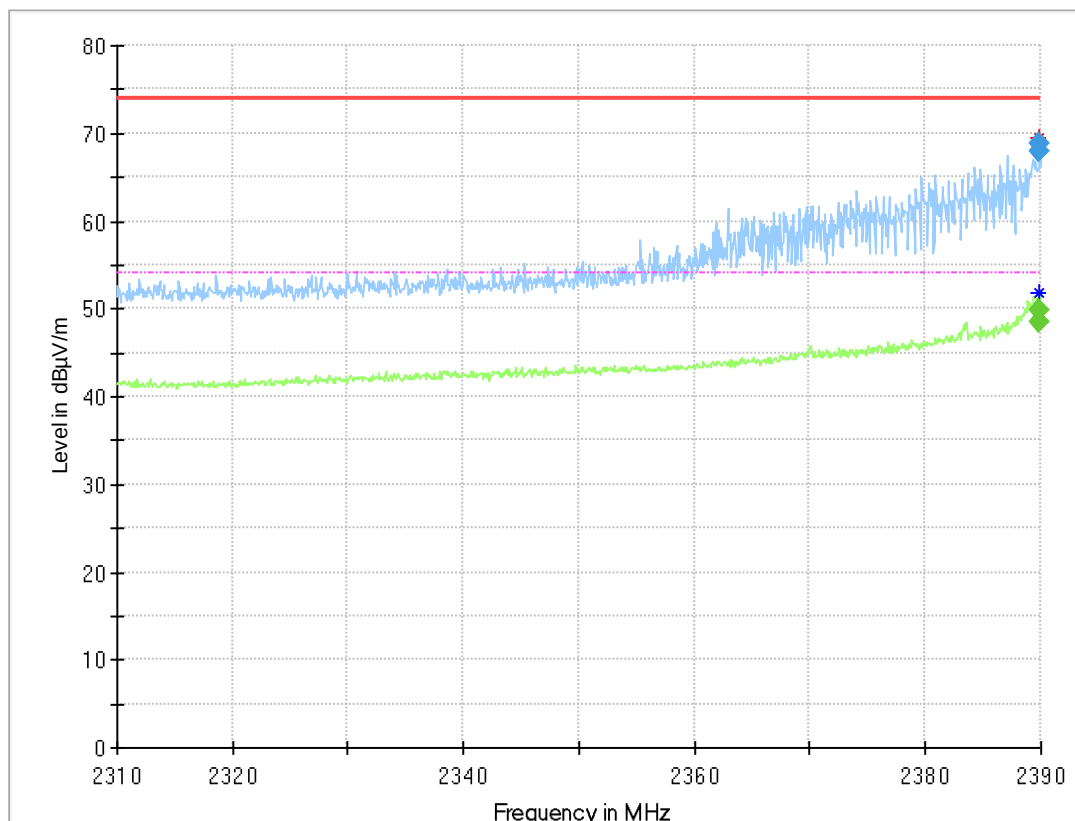

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Marg in (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2389.760	---	48.4	54.0	5.61	1000.0	1000.00	150.	H	-8.0	70.0	7.6
2389.760	67.9	---	74.0	6.11	1000.0	1000.00	150.	H	-8.0	70.0	7.6
2389.840	---	49.9	54.0	4.10	1000.0	1000.00	150.	H	12.0	110.0	7.6
2389.840	68.8	---	74.0	5.17	1000.0	1000.00	150.	H	12.0	110.0	7.6


Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high
(S03_160_AB02)

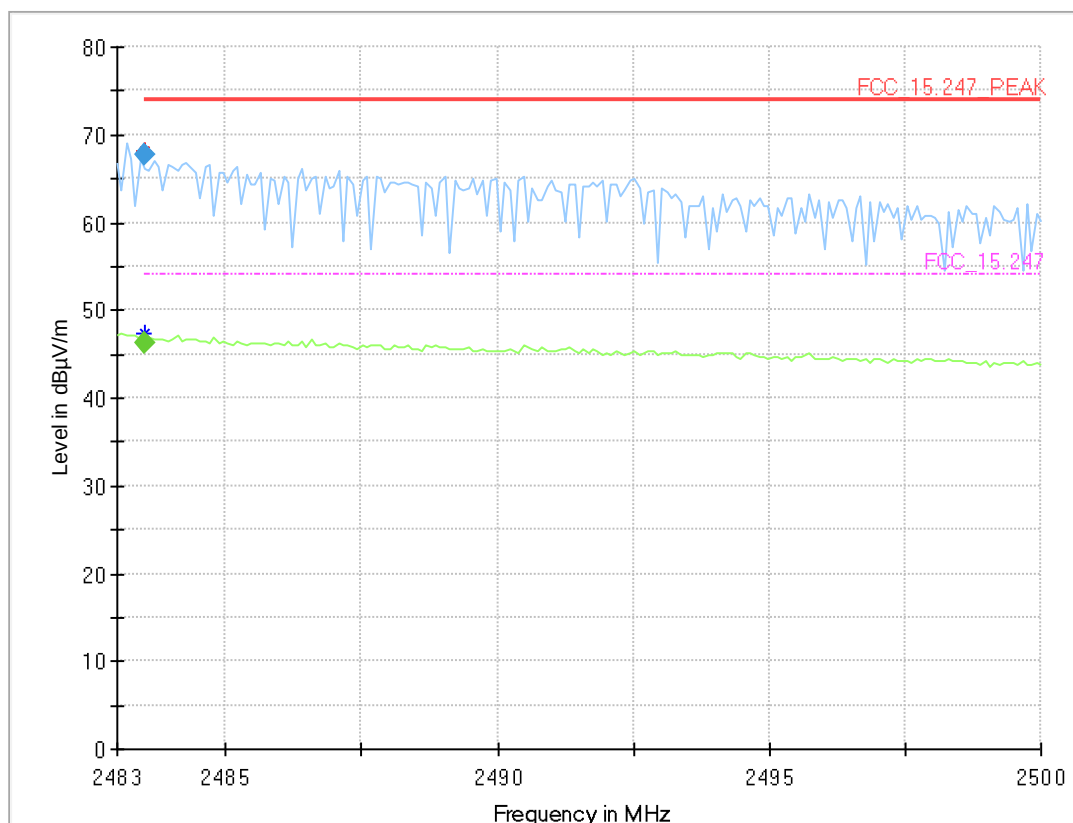

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	46.2	54.00	7.79	1000.0	1000.000	150.0	H	-161.0	8.0	7.8
2483.510	67.8	---	74.00	6.19	1000.0	1000.000	150.0	H	-161.0	8.0	7.8


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low
(S01_160_AC03)

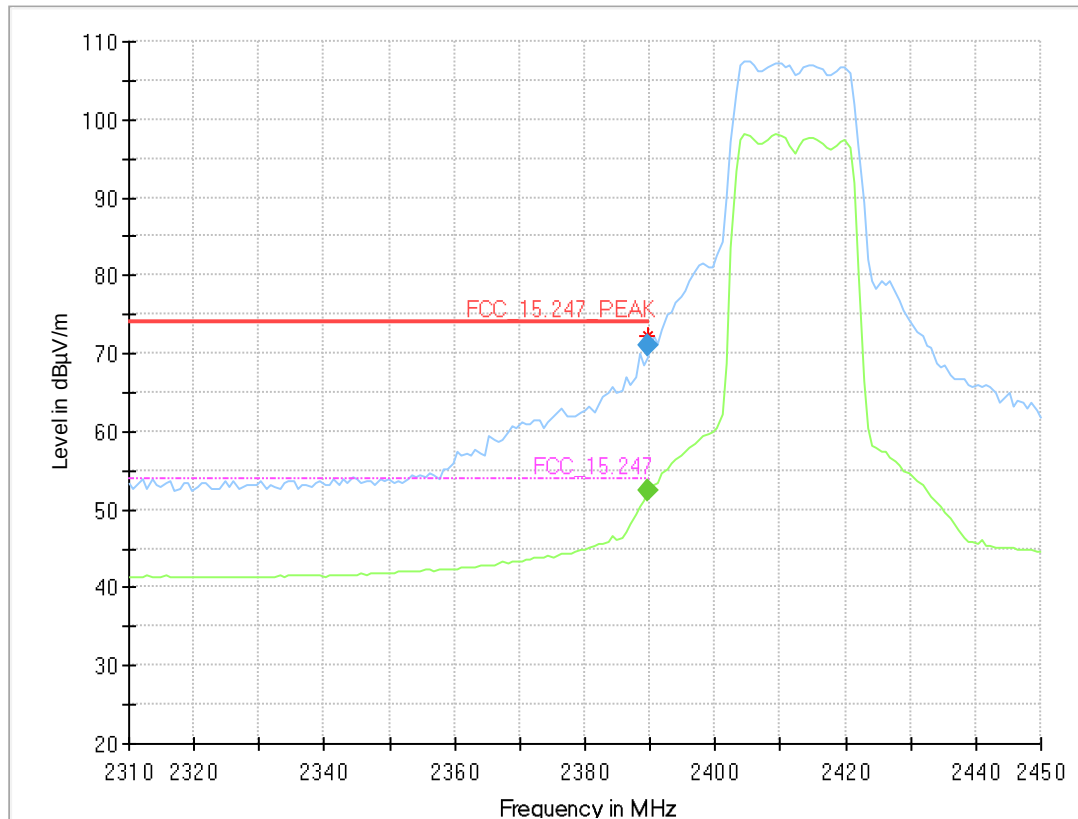

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2389.800	---	52.4	54.00	1.60	1000.0	1000.000	150.0	V	-185.0	8.0	7.6
2389.800	71.1	---	74.00	2.90	1000.0	1000.000	150.0	V	-185.0	8.0	7.6


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
(S01_160_AC03)

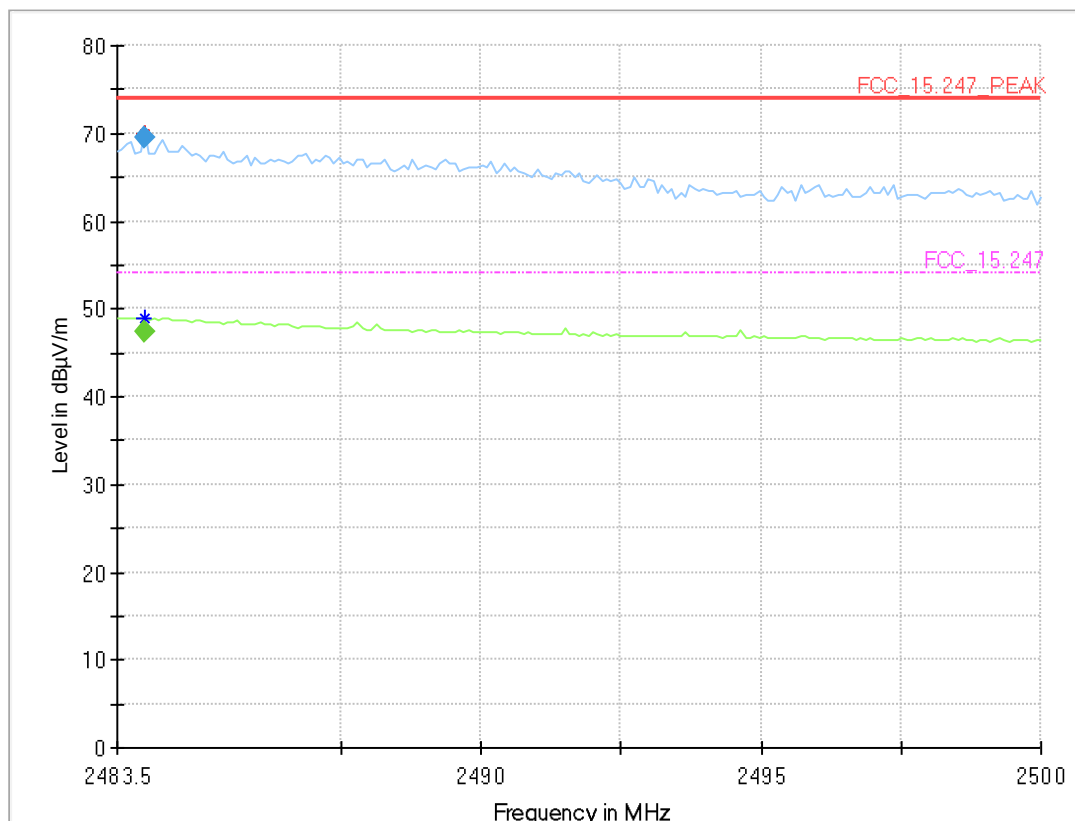

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.995	---	47.4	54.00	6.57	1000.0	1000.000	150.0	H	120.0	4.0	43.6
2483.995	69.5	---	74.00	4.55	1000.0	1000.000	150.0	H	120.0	4.0	43.6


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
 (S03_160_AB02)

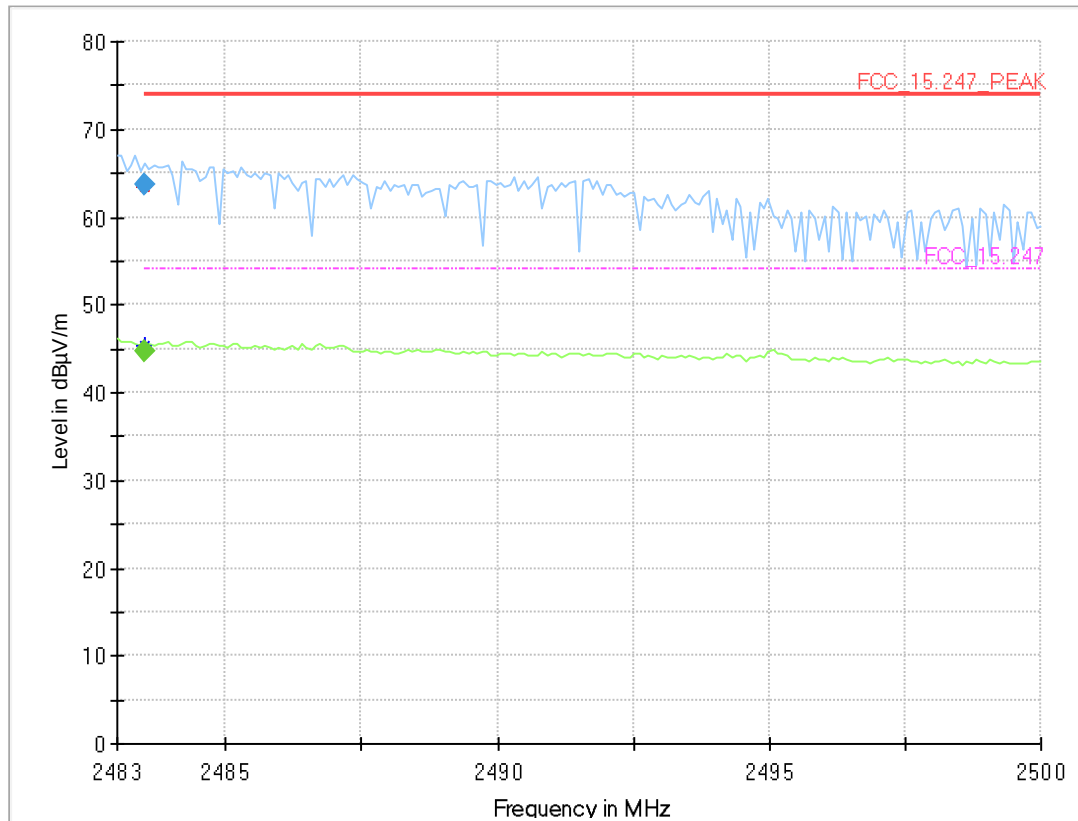

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	44.7	54.00	9.33	1000.0	1000.000	150.0	V	-101.0	89.0	7.8
2483.510	63.6	---	74.00	10.36	1000.0	1000.000	150.0	V	-101.0	89.0	7.8


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Band Edge = low
(S01_160_AC03)

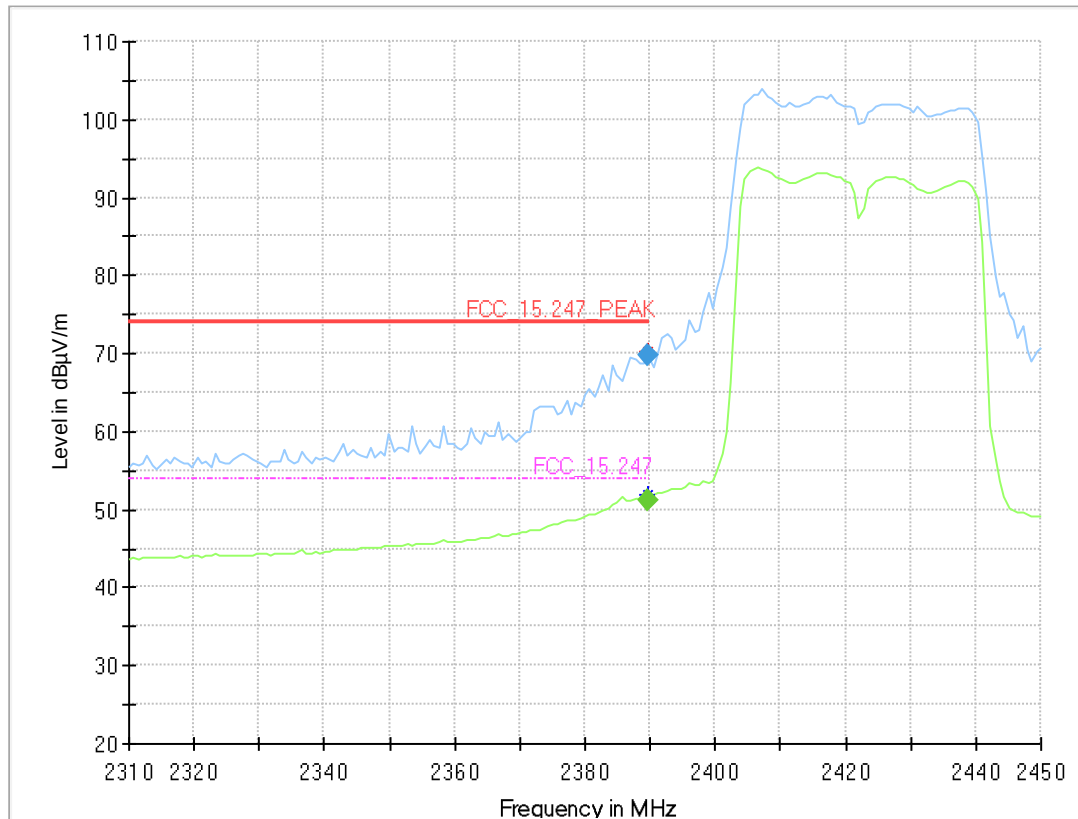

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2389.800	---	51.1	54.00	2.91	1000.0	1000.000	150.0	H	123.0	15.0	43.3
2389.800	69.7	---	74.00	4.30	1000.0	1000.000	150.0	H	123.0	15.0	43.3


Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Band Edge = high
(S01_160_AB02)

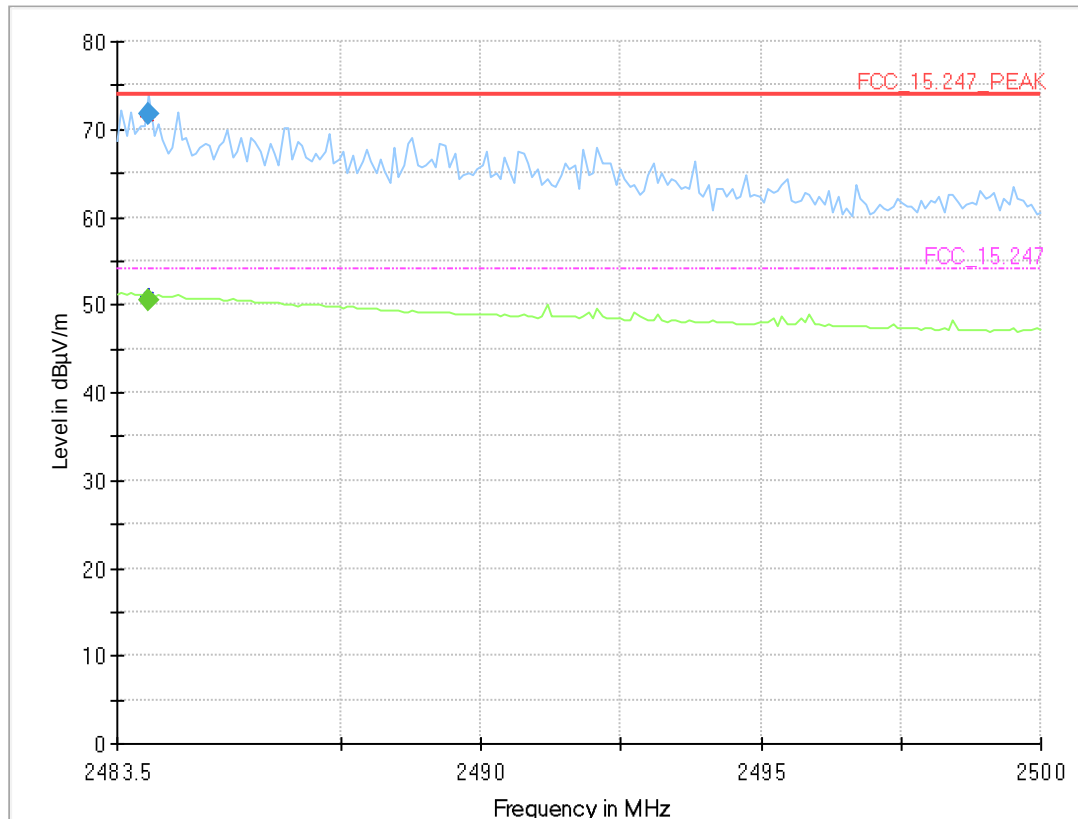

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2484.078	---	50.4	54.00	3.57	1000.0	1000.000	150.0	H	116.0	10.0	43.6
2484.078	71.7	---	74.00	2.31	1000.0	1000.000	150.0	H	116.0	10.0	43.6


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Band Edge = low
(S03_160_AC03)

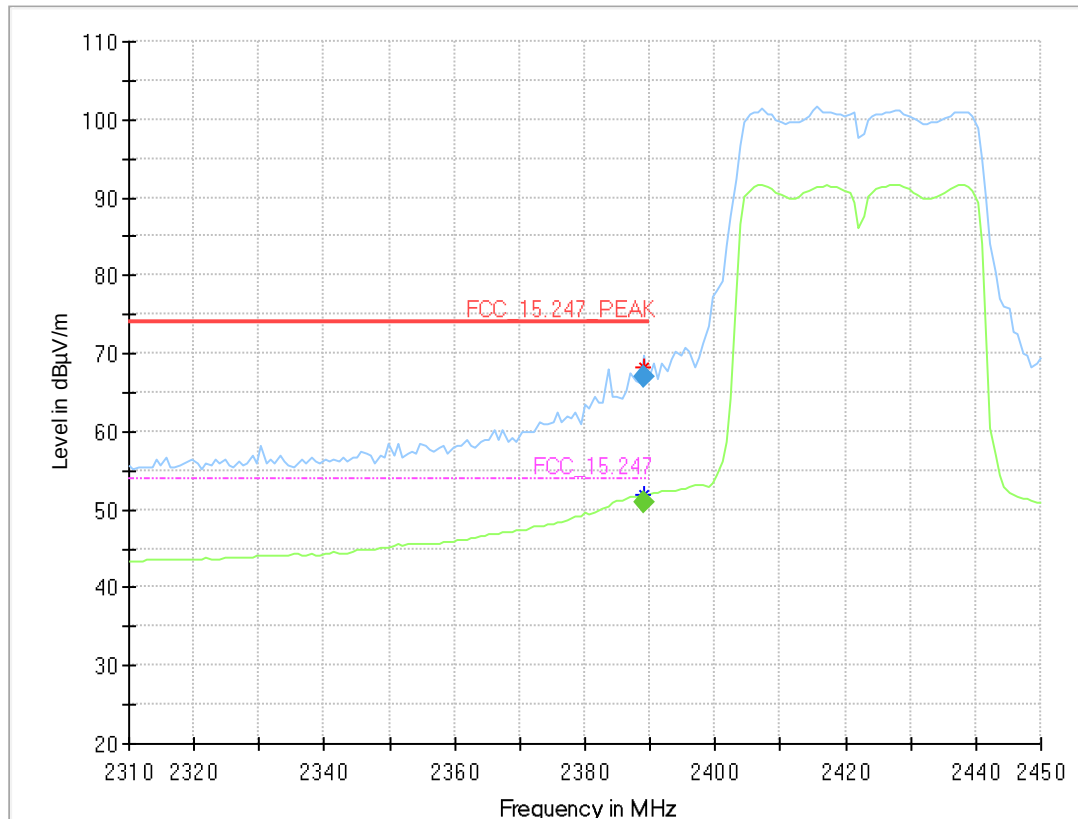

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2389.100	---	50.8	54.00	3.16	1000.0	1000.000	150.0	H	-5.0	105.0	43.2
2389.100	67.1	---	74.00	6.93	1000.0	1000.000	150.0	H	-5.0	105.0	43.2

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Band Edge = high
(S03_160_AC03)

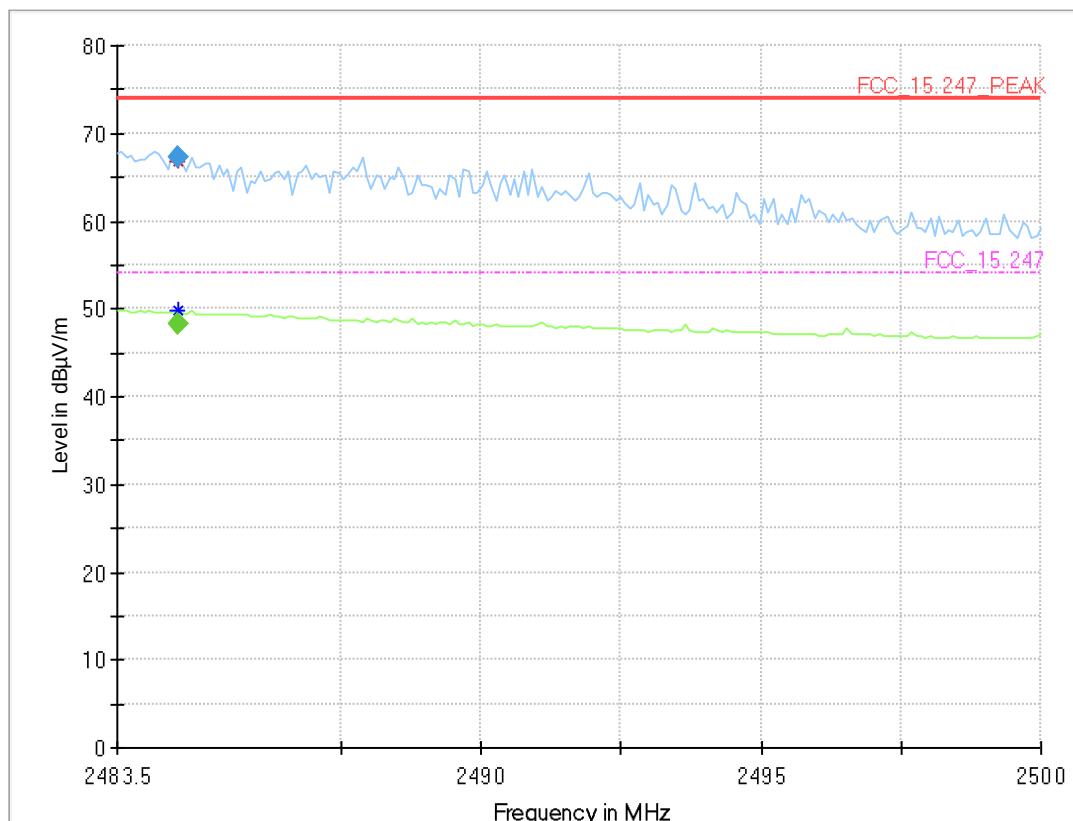

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2484.573	---	48.2	54.00	5.83	1000.0	1000.000	150.0	H	153.0	6.0	43.6
2484.573	67.2	---	74.00	6.83	1000.0	1000.000	150.0	H	153.0	6.0	43.6

5.3.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC

6 TEST EQUIPMENT

6.1 TEST EQUIPMENT HARDWARE

- 1 R&S TS8997
2.4 and 5 GHz Bands Conducted Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
1.2	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2023-08	2025-08
1.3	FSW43	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	102013	2023-07	2025-07
1.4	Opus10 THI (8152.00)	T/H Logger 14	Lufft Mess- und Regeltechnik GmbH	13993	2023-12	2025-12
1.5	HMP2020	Programmable Power Supply	Rohde & Schwarz GmbH & Co. KG	101992	N/A	N/A
1.6	OSP120	Contains Power Meter and Switching Unit OSP-B157W8 PLUS	Rohde & Schwarz	101158	2021-08	2024-08
1.7	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

2 Radiated Emissions FAR 2.4 GHz FCC
 Radiated emission tests for 2.4 GHz ISM devices in a fully anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
2.2	Innco Systems CO3000	Controller for bore sight mast FAC	innco systems GmbH	CO3000/1460/54740522/P	N/A	N/A
2.3	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq		N/A	N/A
2.4	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	N/A	N/A
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
2.6	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	N/A	N/A
2.7	FSW43	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	103779	2023-04	2025-04
2.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
2.9	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069	N/A	N/A
2.10	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09	N/A	N/A
2.11	MA3000/0800-XP-ET-compact	Bore Sight Antenna Mast	innco systems GmbH	9210522	N/A	N/A
2.12	TT 1.5 WI	Turn Table	Maturo GmbH	-	N/A	N/A
2.13	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008	N/A	N/A
2.14	Opus 20 THI (8120.00)	ThermoHygro Datalogger	Lufft Mess- und Regeltechnik GmbH	115.0318.0802.033	2023-08	2025-08
2.15	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709	N/A	N/A
2.16	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324	N/A	N/A
2.17	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2021-09	2024-09

3 Radiated Emissions SAC H-Field
 Radiated emission tests in the H-Field in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
3.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
3.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
3.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
3.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
3.6	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
3.7	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
3.8	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
3.9	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006	2024-04	2027-04
3.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

4 Radiated Emissions SAC up to 1 GHz
 Radiated emission tests up to 1 GHz in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
4.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
4.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufth Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
4.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
4.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
4.5	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2021-09	2024-09
4.6	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
4.7	Opus10 THI (8152.00)	T/H Logger 10	Lufth Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
4.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
4.9	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
4.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10
4.11	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/11920513	N/A	N/A

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6.2 TEST EQUIPMENT SOFTWARE

Semi-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
INNCO Mast Controller	1.02.62
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
MATURO Controller	1.24
MATURO Mast	12.19
MATURO Turn-Table	30.10
Fully-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
MATURO Controller	1.30
MATURO Turn-Unit	11.10
MATURO Mast	12.10
MATURO Turntable	12.11
INNCO Controller	1.03.02
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
TS 8997	
WMS32 Measurement Software	11.60.00 (till 2024-03-19), 11.70.00 + Hotfix 01
Conducted AC Emissions:	
Software	Version
EMC32 Measurement Software	10.60.20

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF HFH- Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d _{Limit} (meas. distance (limit)	d _{used} (meas. distance (used)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

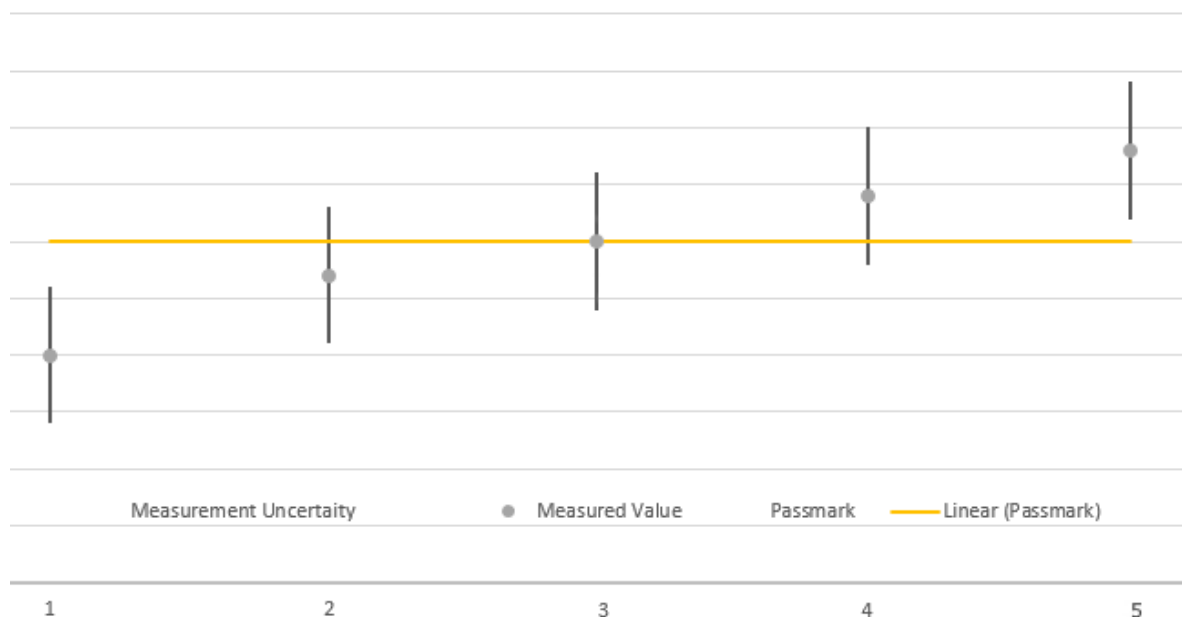

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	on pass mark	within pass mark	Passed
4	above pass mark	within pass mark	Failed
5	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.

*****END OF TEST REPORT*****